servicenow®

Zurich Public Sector

Last updated: 05/04/2026

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Some examples and graphics depicted herein are provided for illustration only. No real association or connection to ServiceNow products or services is intended or should be inferred.

ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

Please read the ServiceNow Website Terms of Use at www.servicenow.com/terms-of-use.html

Company Headquarters
2225 Lawson Lane
Santa Clara, CA 95054
United States
(408) 501-8550

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

servicenow

Table of Contents

Public Sector Digital Services (PSDS) 5

Explore 6

Data management 9

Portals 11

Playbooks and solutions 17

Case management 22

Analytics and insights 27

Configure 28

Set up your environment 30

Configure agent workspaces 47

Enable communication channels 168

Implement intelligence 171

Set up self-service 173

Extend capabilities 176

Domain Separation 177

Integrate 177

Field Service Management 178

Use 178

Portals 179

Playbooks and solutions 212

CSM Configurable Workspace 294

Virtual Agent 296

Mobile Agent 298

Service Exchange 314

Document Processor 316

Analytics and Reporting 317

Constituent Service dashboard 317

Performance Overview 322

Reference 325

Data Model 325

Core Role Relationships 345

Components installed 346

Service Catalog 393

Forms 402

Grants Management reference 424

Now Assist for PSDS 426

Explore 427

Configure 432

Use generative AI skills 450

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use agentic AI..... 457

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

servicenow

Public Sector Digital Services (PSDS)

Extend beyond the packaged government case types, leveraging the government data model to create your own workflows with low-code tools. Fulfill public service requests end-to-end with pre-packaged playbooks. Deliver a personalized experience to take care of common constituent requests using resources like the portal, service catalog, virtual agent, and online communities. Use the ServiceNow® Public Sector Digital Services (PSDS) application to serve constituents, businesses, and agencies on a single platform.

Explore



Explore how Public Sector Digital Services can help you with its key features and benefits.

Configure



Customize your implementation of Public Sector Digital Services to meet your specific needs.

Integrate




Extend capabilities in Public Sector Digital Services by integrating with other applications.

Use



Learn how agents and constituents can use Public Sector Digital Services to create, route, and manage public service requests.

Analyze



Access preconfigured dashboards with actionable data visualizations to track key metrics and improve your service.

Reference



Get additional details on Public Sector components such as lists, tables, forms, rules, components, parameters, roles, and personas.

Automate



Use Now Assist for PSDS to enhance user productivity and efficiency through proactive experiences using generative AI.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Additional resources

- To learn more about what's new and what's changed, see the Public Sector Digital Services release notes.
- Work with an implementation specialist to streamline your setup process. To learn more, see the Customer Success Center.
- Sign up for the ServiceNow Public Sector fundamentals training program and certification to learn about core functionality and release-specific features.
- Visit Now Community to share knowledge and connect with others.
- Get step-by-step guidance to help with your ServiceNow® implementations, upgrades, and more, see Now Create.


Exploring Public Sector Digital Services

Learn about Public Sector Digital Services (PSDS) features to help create a seamless support experience for constituents, businesses, internal agencies, and external agencies.

Public Sector Digital Services Overview

Public Sector Digital Services Overview

Public Sector Digital Services applications

Grants Management  Handle applications for grants submitted by public sector users.	**Social Benefits Playbook**  Handle applications for social benefit programs.	**License and Permit Playbook**  Handle license and permit requests.
Information Request Playbook  Handle public record and information requests.	**Service Request Playbook**  Handle non-emergency service requests.	

Benefits

Public Sector Digital Services enables government organizations and external agencies to support constituents and business stakeholders, all from a single platform. Extend beyond the packaged government case type, leveraging the government data model to create your own

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

workflows with low-code tools. Fulfill public service requests end-to-end with pre-packaged playbooks. Deliver a personalized experience while increasing agent efficiency, driving action to take care of common constituent requests using resources like the portal, service catalog, virtual agent, and online communities.

Provide a platform for citizens to engage

Serve the public outside of government's walls and hours of operations. Give your constituents the choice of connecting through email, phone, chat, social media, or mobile- anytime, anywhere, and from any device. Provide a streamlined platform for the public to request government services through assisted and self-service. Omni-channel advanced work assignment automatically assigns public service cases to the best-equipped agent based on capacity, skills, and case context.

Assign tasks across the enterprise

Guide government workers to fulfill public service requests quickly and consistently, and monitor the progress of other agents and teams. Create a single flow of work across governments and agencies so that cycle times are minimized and automation is maximized, end-to-end. Enable service delivery from one agency to another by connecting the public sector to other departments such as field service, finance, and legal. Collaborate with other agencies using the visual task board, workflow, and automation.

Enable insights with reporting and dashboards

Identify opportunities to improve case resolution, agent performance, and the service experience, and act on trends revealed in Performance Analytics for Public Sector Digital Services. Monitor current and prior performance to identify areas for improvement of products, services, and processes. Unlock insights to anticipate trends, prioritize, and drive actionable improvements, such as automating the most frequently recurring case resolutions.

Manage case volume with self-service

Encourage constituents to help themselves with a self-service catalog, communities, knowledge base, and portal. Expand customer support for constituents and businesses by implementing Virtual Agent, a chatbot that runs on the Government Service Portal and in supported third-party messaging applications, such as Engagement Messenger. Public sector end users can request non-emergency services through a prebuilt, automated conversation that helps them submit a request.

Key features

Public Sector Digital Services offers key features that enable administrators and agents to provide the services and support requested by constituents and businesses.

Benefits of PSDS features

Benefits	Key Features	Role
Walk constituents through the process of submitting a grant proposal, applying for a license or permit, requesting government records and other public information, or submitting non-emergency service requests. Walk agents	Playbooks and Solutions	Constituent or Agent

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Benefits of PSDS features (continued)

Benefits	Key Features	Role
through the process of fulfilling these requests.		
Drive self-service from a portal that is integrated with knowledge articles, service catalogs, communities, and chatbots.	Portals	Constituent
Improve your agent efficiency for faster resolution and a better constituent experience.	Playbooks and solutions	Agent or Manager
Manage case interactions and service level agreements (SLAs), product model relationships, and other services.	Case Management	Administrator
Increase productivity with automated case detail and comment summarization, so agents get answers fast. Also, learn how to route issues, recommend solutions, and identify trends.	Intelligence	Agent or Manager
Get at-a-glance visibility and a deep understanding of the data and identify areas that impact your processes.	Analytics and Insights	Manager
Embed a messenger-like pop up inside any website to interact with ServiceNow features, such as browsing knowledge, creating a case, and interacting with Virtual Agent and manage how your customers use your web applications and services from one central location. You can also configure the behavior and styling of the messenger and deploy the configuration on the websites or mobile sites of your choice.	Virtual Agent	Administrator
A dedicated, customizable workspace for government agents and agents from external agencies to work on issues and deliver services for constituents, agencies, and businesses.	CSM Configurable Workspace	Agent or Manager

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Benefits of PSDS features (continued)

Benefits	Key Features	Role
Administrators tailor the configurable workspace for public sector use, enabling agents to resolve issues faster and view services received, recent cases, and profiles for businesses, agencies, and constituents. Agents can manage their cases, check on service requests, and even initiate requests for others.		

Data management for Public Sector Digital Services

Data management refers to the processes and tools used to collect, organize, secure, and use constituent-related data effectively so that government service agent teams can deliver better service experiences. You can give your managers and agents a comprehensive view of constituent data, including constituent details, products and services, assets, service contracts, and entitlements.

Overview of data management

Data is the backbone of the Public Sector Digital Services application, connecting constituent, product, service, and team information, giving agents and managers a complete view of every interaction. From constituent profiles and services received to service contracts and entitlements, Public Sector works to bring citizen data together to enable fast resolutions and consistent service support.

The info-graphic illustrates the public service value chain, highlighting how agencies deliver benefits and services to constituents through different internal and external entities.

At the core, a service agency can provide both physical and digital products and services. These offerings are delivered through one or more service organizations, each of them containing employees and staff working in user-facing or back-office roles.

Some service organizations operate with physical, tangible products (for example, fixing a pothole), while others rely on digital products and services (for example, issuing a license or permit). Regardless of format, everything within this chain exists to serve the constituents of the area.

Data Management acts as the foundation of this value chain, capturing and organizing constituent and business details, including accounts, contacts, consumers, and households, allowing service organizations to personalize interactions, communicate more effectively, and provide faster resolutions. Constituent and business profiles can be linked with products, services, entitlements, and cases, confirming that agents and managers have a 360-degree view of the issue at hand. Data Management links the government agency, its service organization(s), staff, and the constituents they serve through accurate information that powers each stage of service delivery.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key elements of data management

The following key elements form the foundation of effective data management in Public Sector Digital Services:

Customer data

Customer data includes information about the constituents and users who are external to your organization, such as names and addresses, telephone numbers, and email addresses. Maintaining accurate customer data enables your agents to communicate with constituents quickly and easily.

- B2B: In the business-to-business (B2B) business model, customer data includes details about accounts and contacts.
- B2C: In the business-to-consumer (B2C) business model, it includes details about consumers and households.

To learn more about customer and constituent data, see Customer Data.

Product data

This data can include information about products and product models, service catalog items, sold products, install base items (the instance as configured for the user), and installed products. When assisting constituents, your service agents can quickly select the correct product data, add the details to case records, and view related details like knowledge articles and resolved cases.

To learn more about product data, see Product Data.

Service Model Foundation

Service Model Foundation refers to a set of pre-designed business and technical data frameworks that helps set up and manage how services are delivered and supported. It provides a standardized way to configure, monitor, and support service requests, applications, cases, and workflows across various business locations or government service organizations.

To learn more about the Service Model Foundation, see Service Model Foundation overview.

For more information on using the BLSP portal to add staff to your business location, create cases, work orders, and more, refer to the Using the BLSP.

Internal user data

Internal user data includes the information about the people within your service organization, such as managers, agents, merit reviewers, and other employees. Internal users can be grouped into teams and assigned roles to manage cases, resolve issues, and interact with constituents and applicants.

Business stakeholders for Public Sector Digital Services


Business stakeholders are internal users who directly influence service processes. They can create, view, and approve cases and requests across your service organization.

To learn more about the business stakeholders, see Business Stakeholder for Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Self-service Portals for Public Sector Digital Services

A portal provides an end user, in this case a constituent or applicant, with step-by-step guidance through submitting a public service request case. Use Portals to submit requests for licenses and permits, government records and public information, non-emergency services, or to submit applications for social benefits or grants opportunities.

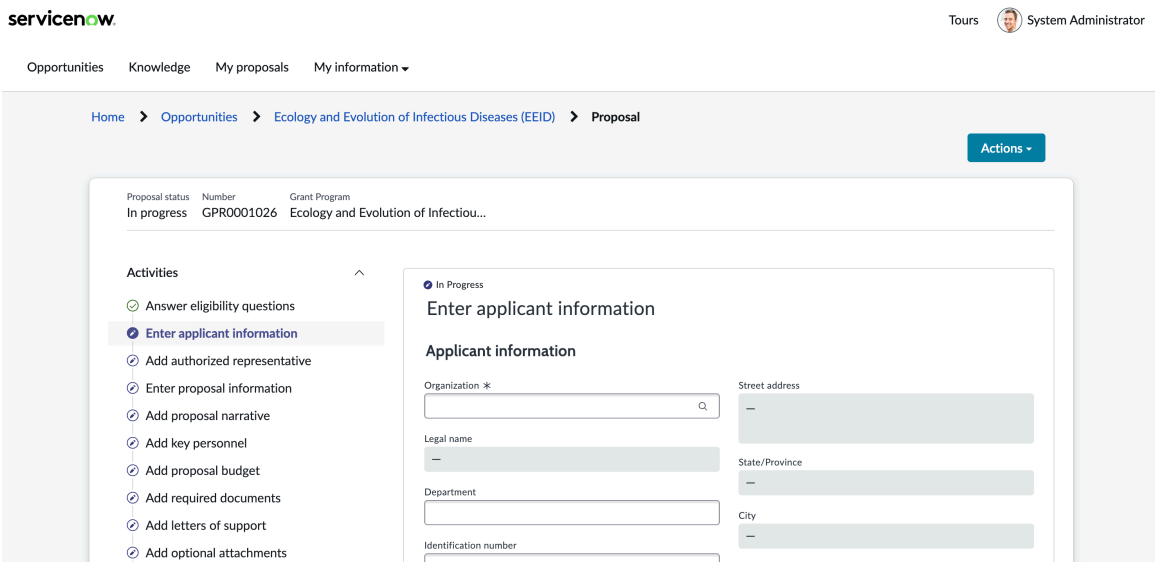

With the Public Sector Digital Services application, you can provide service for your constituents through web applications that hosts self-service capabilities like knowledge articles, community forums, service catalogs, case management, and chat.

Self-service in Public Sector offers the following benefits:

Reduces agent workload

Self-service enables constituents to resolve common issues on their own using knowledge articles, guided help, and virtual agents. This reduces the volume of incoming cases and enables support agents to focus on more complex, high-value interactions.

Seamless access to self-service support channels

Constituents can access support anytime through an intuitive portal, virtual agent, or knowledge base. Immediate access to information and automated assistance leads to faster resolution times and a more seamless support experience.

Provides consistent and accurate answers

Centralized knowledge management ensures that all constituents receive standardized and verified information. Knowledge articles and automated workflows deliver accurate, up-to-date solutions, minimizing confusion and repetitive requests.


Playbooks for Portals

Whether you're a government service agent or a constituent using the Government Service Portal or Grants Management Portal, you can use Public Sector Digital Services playbooks on service portals to complete the tasks and activities needed to resolve your requests. Playbooks on service portals (for constituents using the Government Service Portal or Grants Management Portal) integrates seamlessly into Playbooks for government service agents using the CSM Configurable Workspace, giving both parties the step-by-step guidance for the case flow process and the contextual information that you need to successfully complete each stage of the flow and its associated activities.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Guided intake with playbooks on service portals makes it effortless to fill out a form or provide information for a case. Playbooks offer a clear roadmap that indicates your progress in the submission process and the remaining steps that you need to complete. If needed, you can navigate back to a previous step, or use intuitive options and input controls that enable you to input information in a detailed manner. Additionally, you can save an application or intake form that is not yet ready for submission and resume work on it later.

This example shows the Playbooks on portal experience for applicants using the Grants Proposal Intake Playbook on the Grants Management Portal.

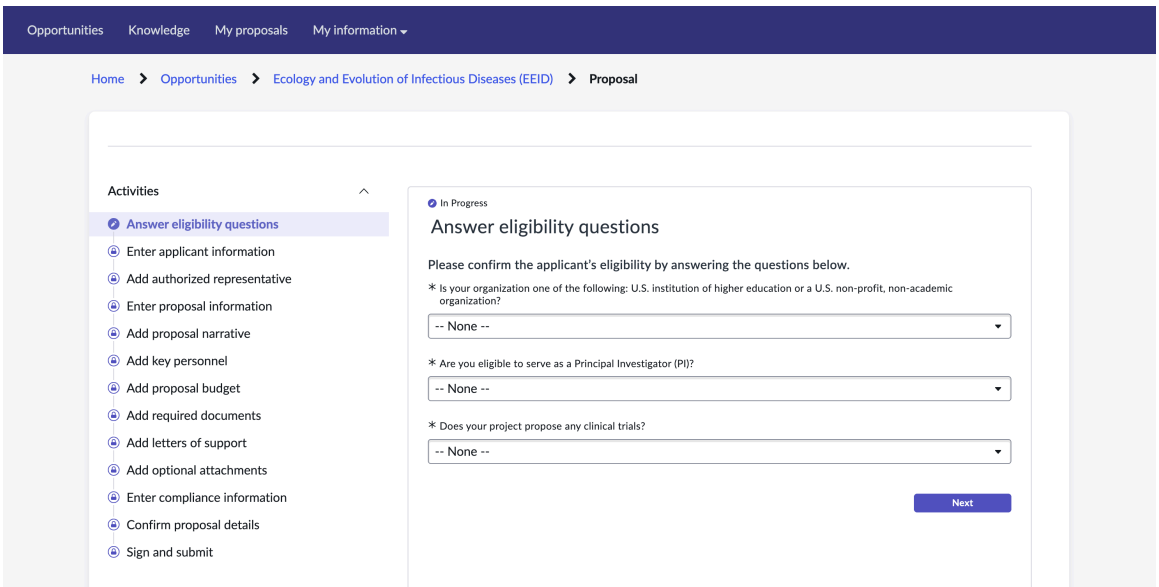

With Playbooks for Portals, you get a guided interface where you can take prompt actions on the pending tasks and activities that are related to your cases. You get the following key benefits using Playbooks for Portals:

- Enhanced experience. Follow the step-by-step process that has features, such as save and resume, where you can initiate work on a case and then resume it later.
- Decreased case resolution time. Track and complete the requested tasks promptly and accurately. You can get a faster case resolution with Playbooks for Portals.
- Increased visibility. Get visibility into the status of the case and get insights into the expected resolution time.

These playbooks are designed to guide you through the steps of the intake process. Within the playbooks, you can locate the tasks that are assigned to the case, view all ongoing activities with the associated actions, and do the actions on the assigned tasks. The activity stream for the case playbook enables you to track your progress. If it's available, you can also see the related information about the case.

The playbook includes multiple activities. You can see the activity stream against the case playbook, the task on the playbook, and the related information for the case as available. When using a playbook, you can do the following actions:

- View the activities outlined in the playbook.
- Select an activity and carry out the required tasks to complete it.
- See the status indicators that display the current state of each activity or step.
- See the check boxes and counters that indicate where you are in the workflow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Mark an activity as complete and proceed to the next activity or stage.
- Continue completing the stages and activities necessary to submit the case.

The following playbooks on service portal experiences are available for constituent use:

- Grants Management: Grants Proposal Playbook, Grants Workspace Playbook
- Service Request Playbook
- Information Request Playbook

Engagement Messenger

With the Engagement Messenger web application, constituents can access the information or services they need from your third-party web applications, even if they're located outside of the ServiceNow environment.

To learn more about Engagement Messenger, see Configure Engagement Messenger for Playbooks.

Service catalog

With the Service Catalog capability, you can create service catalogs where constituents can request items, such as service offerings. You can enable constituents to request items from the portal by associating one or more service catalogs with the portal. Constituents can also track the status of open requests from the portal.

To learn more about Service catalog, see.

Knowledge base

With the Knowledge Management capability, you can create knowledge bases with articles to share information with users on the portal. Constituents can search the knowledge bases for information, such as troubleshooting or task resolutions, to resolve issues and answer questions.

To learn more about searching the Knowledge base, see .

Chat

With the Virtual Agent platform capability, you can design and build automated conversations that help your constituents get the help that they need.

As constituents answer questions and select options presented by Virtual Agent, they're directed to a self-service resource.

If constituents want to chat with an agent, Virtual Agent hands them off to a live agent. To provide this resource, use the Connect Support feature.

To learn more about chat, see Configuring the chat channel .

Government Service Portal


By using the Government Service Portal, constituents and businesses can report issues, access and view the status of existing service requests, request public records, search for information about a question or issue, view and update their contact information, and request assistance from a government service agent— all in a user-friendly, customizable interface.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Portal for constituents

The Government Service Portal experience begins on the portal home page for constituents. Agencies usually customize their home pages to be viewed by logged-in users and users who aren't logged in. For example, a logged-in user might see different information on the home page than a user who isn't logged in.

This example shows the default home page for a registered user of the Public Sector Digital Services Government Service Portal.

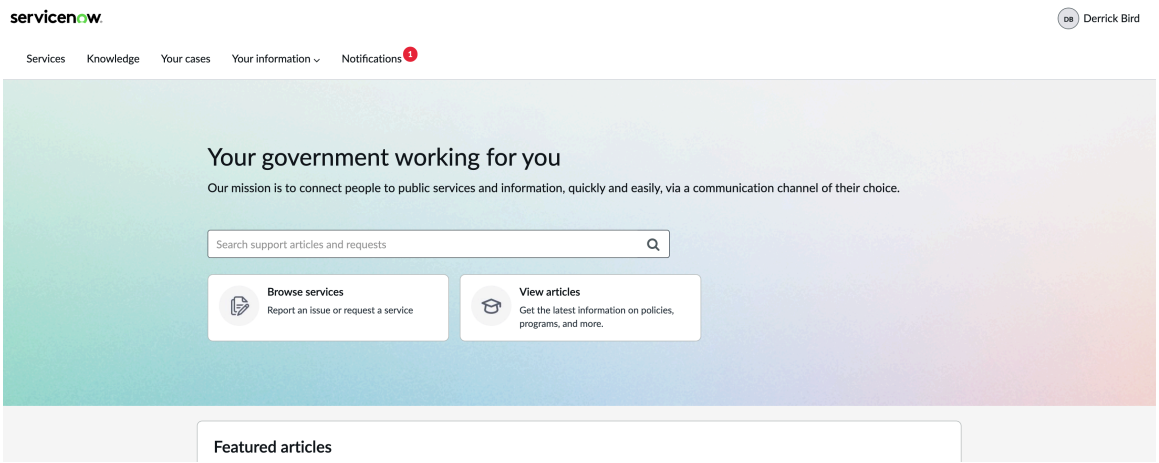

Note:
Administrators can customize Government Service Portal home pages in Service Portal, so home page appearance might differ across government agencies.

Constituents can do the following tasks in the Government Service Portal:

- Register as a new user, create a login, and create a user profile.
- Browse and request services or information, track cases, view received services, and report issues.
- Search for information, browse knowledge articles, and engage with the community.
- Get the latest information on policies and programs by searching and viewing articles.
- Discuss issues with neighbors and share perspectives by asking the community.
- View your recent services and see the popular services on the site.
- Get help using Virtual Agent.
- Request services such as street repair, trash removal, building inspections, and other public maintenance.
- Request information and public records from local, state, and federal public agencies.

For more information on the services that are offered in the Government Service portal service catalog, see Government Service Portal service catalog.

Government Service Portal for businesses and business entities

The Government Service Portal enables businesses to access their cases and service information as well as report issues. Business or business contacts can use the Government Service Portal to view their submitted cases, and raise requests by using the service request catalog.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Business contacts have the same functionality as a constituent user, with a few additional permissions. In addition to the constituent user tasks, business contacts can do the following tasks in the Government Service Portal:

- Register a new business.
- Request services that are related to licenses, social benefit programs, permits, information, and service requests.
- Request services that are related to grants, social benefit programs, licenses, permits, information, and public services.
- View the services that they received.
- View information records that they requested.
- View all license or permit requests.
- View items that they received.
- View their existing cases.
- View business and child business profiles.
- View business contact information such as names, addresses, and other contact information.
- View publications, such as government pamphlets and newsletters about services.
- View notifications such as government notifications and new contact approvals.

For information on how to customize the Government Service Portal, see Customize the Government Service Portal. For information on how to customize the Government Service Portal using Guided Setup, see Configure Public Sector Digital Services Core foundational data using guided setup.

Reviewer Service Portal


Enable merit reviewers to track, score, and monitor grant proposals via a dedicated Reviewer Service portal.

In the Reviewer Service Portal, External Reviewers can access assigned Merit Review Tasks (MRTs) and related proposals, score each MRT based on several attributes with a 5 point scale, and, if necessary, decline specific MRTs by providing a valid reason such as a conflict of interest or other concerns. The score is auto-calculated based on the scoring rubric's attributes. Requests for new merit reviews tasks appear as a notification in the Reviewer Service Portal.

The Reviewer Service Portal experience begins on the portal homepage, where merit reviewers can view the merit review tasks that are assigned to the case, view all ongoing merit review activities with the associated actions, and perform actions on the pending and assigned tasks.

This example shows the default home page for a merit reviewer using the Public Sector Digital Services Reviewer Service Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

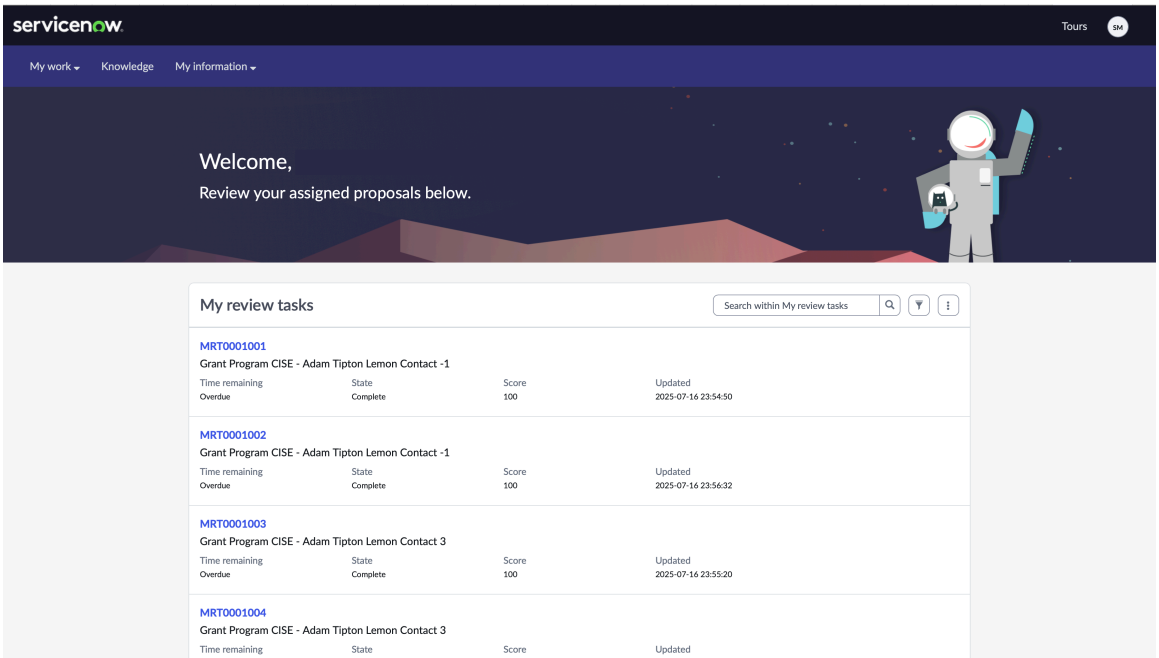

Merit reviewers can do the following tasks in the Reviewer Service Portal:

- View and manage a list of review tasks for grant proposals.
- View grant programs or proposals that they are participating in.
- View high-level information from the record page of the grant program by selecting the grant program number.
- View details of the listed review tasks such as time remaining, status, score, and flags.
- View or reference the scoring rubric by selecting the KB article.
- View the grant program announcement page.
- Review proposals and assign scores based on their assessment or flag any reviews.
- Provide comments for rationale, strengths, or concerns about their evaluation of the proposal.
- Submit or decline a review along with justifications.

For more information on how to use the Reviewer Service Portal, see Using the Reviewer Service Portal in Public Sector Digital Services.


Grants Management Portal

Constituents and business contacts can find, apply for, and track the status of their grant applications using the Grants Management Portal.

The Grants Management Portal experience begins on the portal homepage for constituents. Agencies usually customize their homepages to be viewed by logged-in users and users who aren't logged in. For example, a logged-in user might see different information on the home page than a user who isn’t logged in.

This example shows the default home page for a registered user of the Public Sector Digital Services Grants Management Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

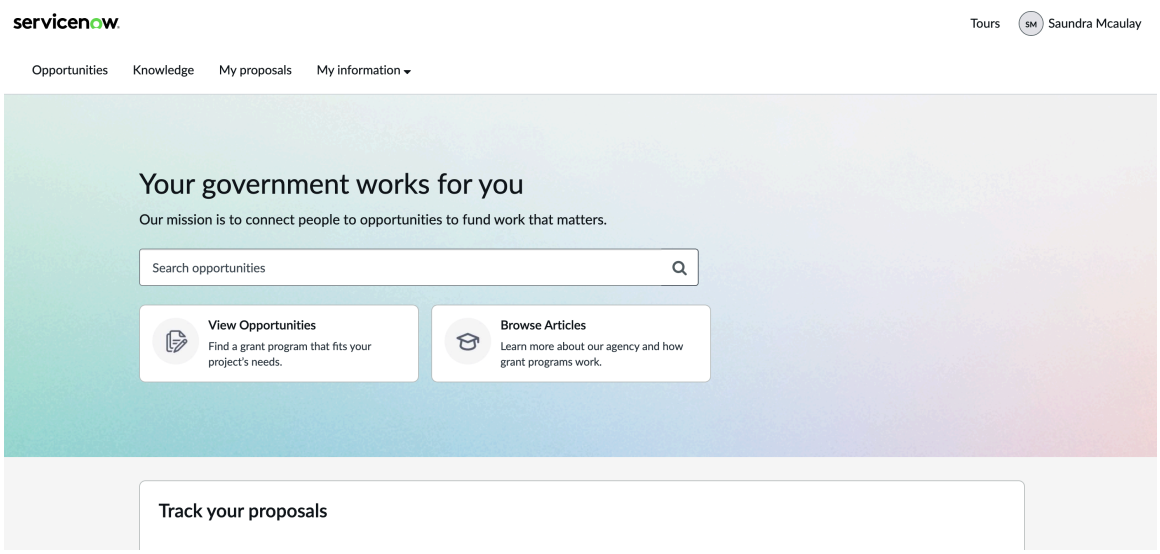

Note:
Administrators can customize Grants Management Portal homepages in Service Portal, so homepage appearance might differ across government agencies.

From the landing page, a constituent can:

- Search for grant opportunities.
- View information regarding each grant program, such as a synopsis, eligibility summary, description, program contacts, resources, milestones, award and budget information, and other related information.
- Submit proposals for grant opportunities and monitor the status of their existing proposals.
- Review and download the results letter and merit review summary of their submitted grant proposals, and accept or decline their award within the Results tab.
- View all Knowledge Base articles related to grants.

For more information on how to use the Grants Portal, see Using the Grants Management Portal in Public Sector Digital Services.

Playbooks and solutions

Public Sector Digital Services provides agents across government agencies with a tailored workspace experience to work on cases created by constituents, businesses, and agencies.

Investigative Case Management

The Public Sector Investigative Case Management (ICM) solutions workspace provides a single location for investigators to organize assets related to an investigation. Investigators and supervisors can use ICM to initiate and manage investigative cases, view the full context of an investigation, and get relevant recommendations.

Grants Management

Use Grants Management for Public Sector Digital Services to set up and award grants, and screen proposals for them. The Grants Application Workflow in the Public Sector Digital Services (PSDS) Grants Management Playbook provides a structured process for managing grant applications from submission for the pre-award phase.

Playbooks

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A playbook provides government service agents with step-by-step guidance through the life cycle of a government service case. Use Playbooks to fulfill requests for license and permits, government records and other public information, or non-emergency service requests, and to review applications for grants or the social benefits programs your agency offers. The workflows that are associated with a specific type of case and the activities that need to be completed to resolve cases of this type are detailed in the playbook. Playbooks also help your agents to visualize the entire life cycle of a workflow.

The following applications are available with Public Sector Digital Services that enable you to use playbooks:

- Grants Management
- Social Benefits Playbook
- License and Permit Playbook
- Information Request Playbook
- Service Request Playbook

To learn more about playbooks, see Playbooks for Public Sector Digital Services.

CSM Configurable Workspace

Your government service agents have one stop for constituent interactions, the CSM Configurable Workspace for Public Sector Digital Services.

Multiple tabs enable agents to manage several cases at once. Agents and managers have ongoing visibility into the status of issues assigned to different agents across the agency. The workspace dynamically displays related contextual information based on the current state. Agents can also set compact mode and dark mode to optimize their experience and productivity.

Public Sector Digital Services playbooks are setup on and are accessed through the CSM Configurable Workspace to provide step-by-step guidance to agents for resolving specific types of government service cases, including service requests, information requests, license and permit, and social benefits cases.

To learn more about CSM Configurable Workspace, see Explore CSM Configurable Workspace.

Mobile Agent

Your government agents can use the Mobile Agent to create, update, and monitor non-emergency requests on a mobile device. You can also get an overview of your case load, including your new and active service request cases.

The Mobile Agent is currently only supported by the Service Request Playbook.

To learn more about the Mobile Agent application, see Mobile Agent experience for Public Sector Digital Services.

Advanced Work Assignment

Use the Advanced Work Assignment (AWA) application to automatically route and assign public sector work items, such as non-emergency requests, to the best-equipped agents, based on their availability, capacity, and skills.


To learn more about Advanced Work Assignment, see Automatically route service requests using Advanced Work Assignment.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbooks for Public Sector Digital Services


A playbook provides government service agents with step-by-step guidance through the life cycle of a public service request case. Use Playbooks to fulfill requests for licenses and permits, government records and other public information, or non-emergency service requests.

A playbook takes a workflow and breaks it into multiple stages or lanes. Each stage in a playbook includes one or more activities, or steps, for you to complete. Stages can also include automated activities, such as auto-sending an email to a customer when a stage or activity is complete.

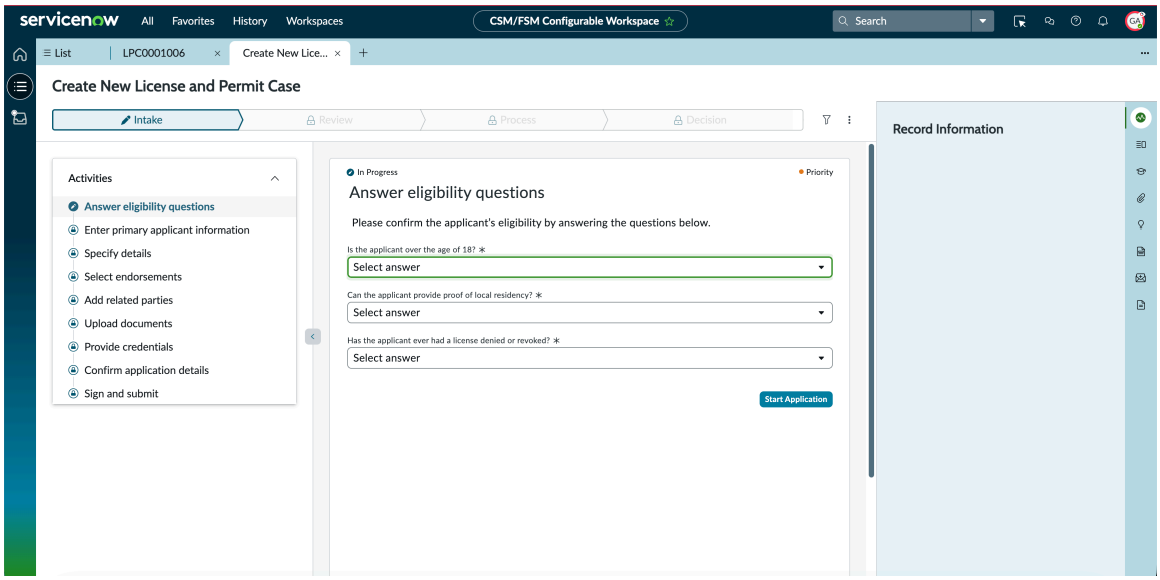

By using a playbook, you can visualize the entire life cycle of the public service case workflow. With a playbook, you can:

- View the playbook stages and activities.
- Select an activity and perform the work to complete that activity.
- Mark an activity as complete and move to the next activity or stage.
- Complete the stages and activities to resolve the case.

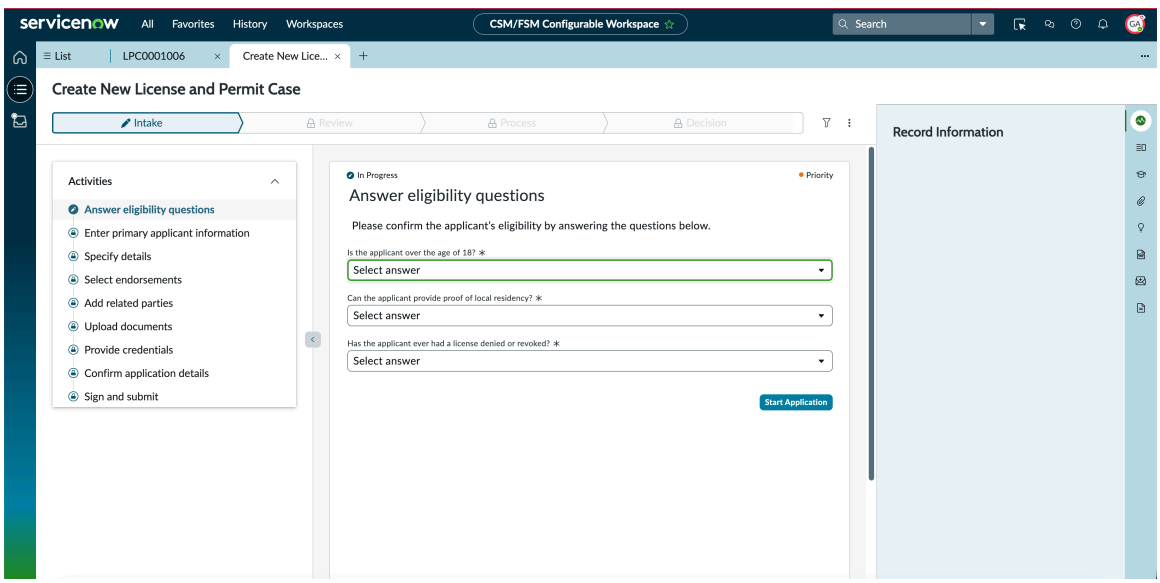

The following applications are available with Public Sector Digital Services that enable you to create and use playbooks:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Social Benefits Playbook

Provides an end-to-end workflow for handling applications for social benefit programs submitted by public sector end users.

License and Permit Playbook

Provides an end-to-end workflow for handling license and permit requests submitted by public sector end users.

Information Request Playbook

Provides an end-to-end workflow for handling public record and information requests submitted by public sector end users.

Service Request Playbook


Provides an end-to-end workflow for handling non-emergency service requests submitted by public sector end users.

The corresponding playbook for each case type automatically appears in the **Playbook** tab when an agent creates a public service request case in the CSM Configurable Workspace, or when a constituent puts in a request through the Government Service Portal.

To learn more about playbooks, see Using Playbooks and Solutions for Public Sector Digital Services.

Exploring the Social Benefits Playbook


The Social Benefits Playbook provides an end-to-end workflow for handling applications for social benefit programs offered by your government agency and submitted by public sector end users.

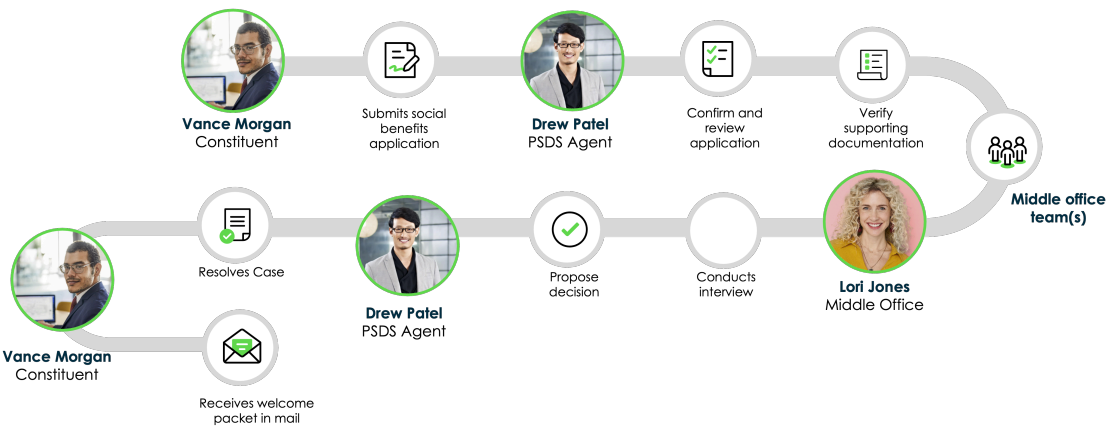

Exploring the License and Permit Playbook


The License and Permit Playbook provides an end-to-end workflow for handling requests for the license and permit that your agency offers, submitted by public sector end users.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

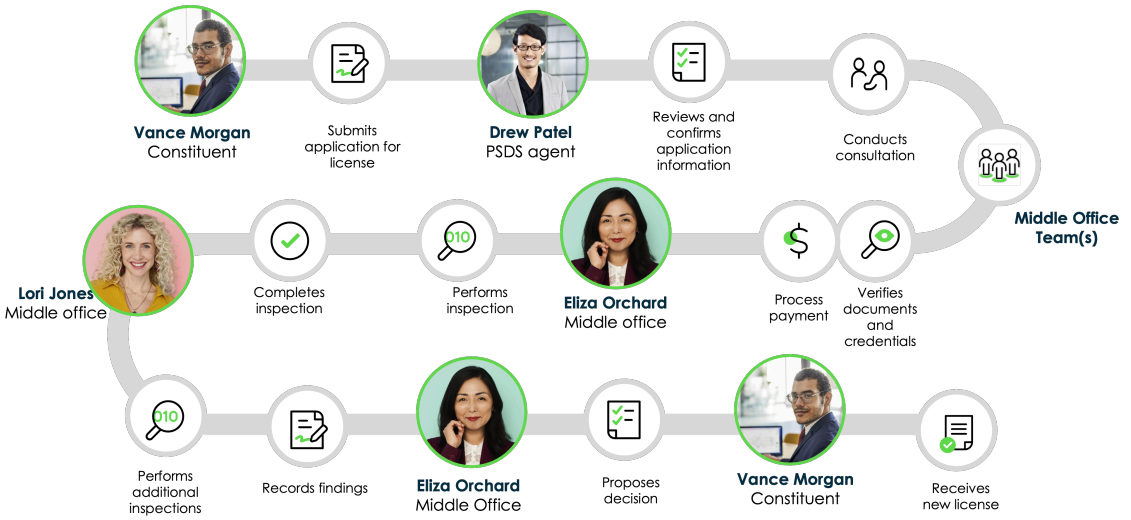

Exploring the Information Request Playbook


The Information Request Playbook provides an end-to-end workflow for handling public record and information requests submitted by public sector end users under the Freedom of Information Act (FOIA).

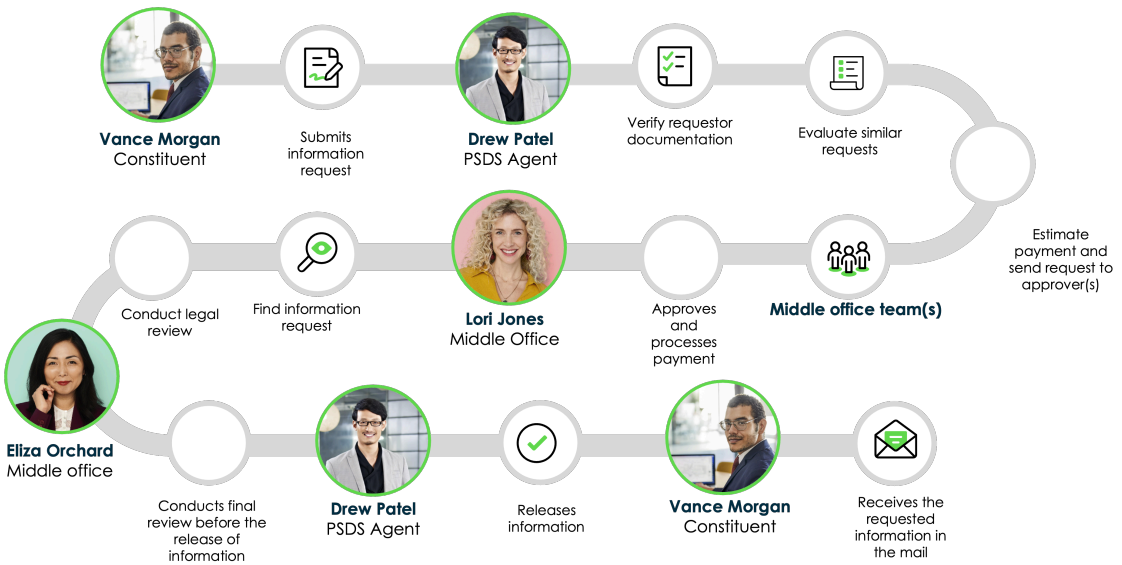

Exploring the Service Request Playbook

The Service Request Playbook provides an end-to-end workflow for handling non-emergency service requests submitted by public sector end users.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

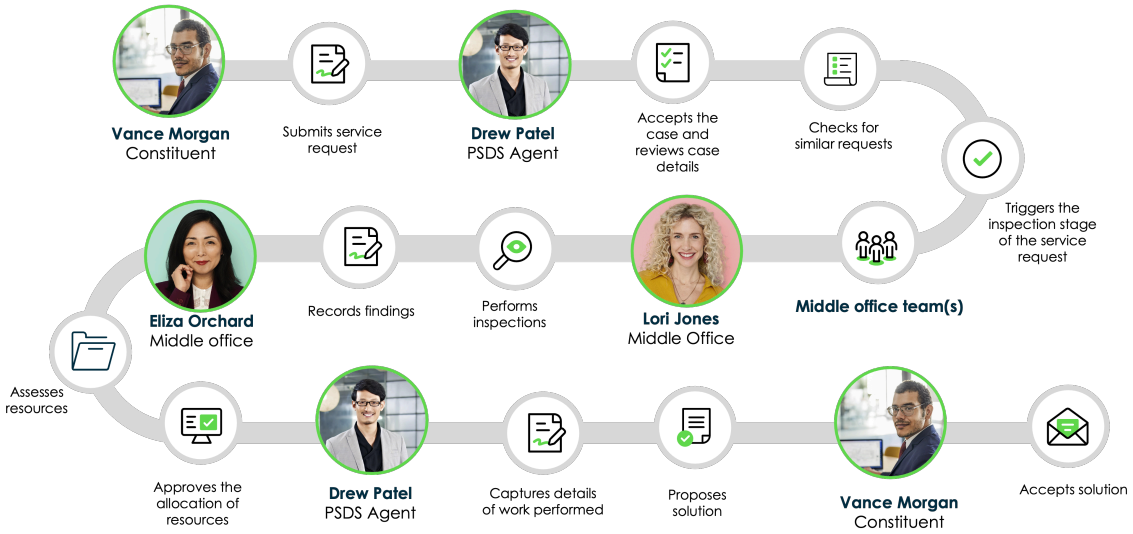

Case management for Public Sector Digital Services

Manage constituent requests, applications, and issues by creating cases, routing cases to agents and groups, and working toward resolution. With case management, you can provide your government service agents with the tools they need to evaluate cases, communicate with constituents, answer questions, and resolve issues.

Getting to know the case management process

Case management refers to the processes and activities designed to evaluate and address constituent issues, requests, and applications while managing effective communication. Case management enables you as a government service agency to engage with constituents, categorize and route cases, assign work to government service agents, and manage cases through resolution and reporting. Case management starts with case creation from an interaction, as constituents reach out through a number of communication channels including email, phone, chat, and the Government Service Portal.

The following diagram shows the case management process.

Use the following features with the Public Sector Digital Services application to manage the cases for your constituents:

- Case workflows
- Case types
- Service definitions
- Playbooks

Case workflows

A case workflow is a series of steps and tasks that are involved in closing a case. By using a case workflow, you can automate systems to simplify your processes, track task completion, and accelerate case resolution..

To learn more about case workflows, see Life cycle of a Public Service case.

Case types

A case type is a collection of data and processes that are needed to resolve a specific type of issue. For example, case types are needed when a government agency has different processes

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

for supporting constituents across multiple departments, agency locations, or service types. By using a case type, you can separate these processes through case applications that support each process.

To learn more about case types, see Government Service Case Types.

Service definitions

A service definition refers to a specific type of service request that your agents can offer to constituents for a case type. Service definitions establish a connection between the products, services, and case types so agents and constituents can quickly access the relevant case types.

To learn more about the service definitions, see Service Definitions.

Playbooks

Playbooks provide agents with a visual guide, including step-by-step guidance for the various tasks that the agents can use to resolve the specific type of service case. A playbook helps to improve agent productivity and the constituent experience by digitizing and automating complex agency service processes.

To learn more about playbooks, see Playbooks for Public Sector Digital Services.

Service Exchange

Service Bridge for Public Sector Digital Services (PSDS) allows agencies to connect multiple ServiceNow instances to provide support and service experiences across the Public Sector ecosystem, enabling coordination between multiple government service agencies and their constituents.

To learn more about Service Bridge for PSDS, see Service Exchange for Public Sector Digital Services.

Service Exchange for Public Sector Digital Services

Connect multiple ServiceNow instances to provide support and service experiences across the Public Sector ecosystem, enabling coordination between multiple government service agencies and their constituents using Service Bridge for Public Sector Digital Services (PSDS).

Enable agency to agency communication and coordination across multiple ServiceNow instances using Service Bridge for Public Sector Digital Services (PSDS). Agencies can coordinate across the ServiceNow® Public Sector Digital Services ecosystem, facilitating cross-agency case management, real-time coordination with dynamic task management, secure inter-agency data sharing, and streamlined approval workflows for license and permits, social benefits, and grants funding distribution.

Public Sector Digital Services Overview

Whether you are a government agency provider communicating with other agencies, or an agency connecting with their constituents, learn how you can establish an integration between multiple types of instances with Service Exchange. This integration allows agency providers to receive and fulfill service requests in their own instances, share data, route tasks in real-time, and more. Learn how you can use Service Exchange for inter-agency data sharing, constituent support, and service catalog management.

- Enterprise users can collaborate with service providers and partners through bi-directional workflows.
- Service Exchange enables streamlined onboarding, and provides a remote service catalog that can be updated in real-time.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A provider instance belongs to the government agency who provides Service Bridge to other agencies and partners. As a government agency provider, you can:

- Author, publish, and update remote service catalogs from your instance for your constituents, business contacts, channels, or agency partners to generate service requests on their instances that can be fulfilled in your instance.
- Integrate your instance and tasks with the other instances in your Public Sector ecosystem.
- Send cases to your constituent's ServiceNow instance via Provider Task
- Receive and fulfill service requests on your instance pushed remotely from your constituents', business partners', channels', or agency partners' ServiceNow® instance(s).
- Access data synced in real-time between the provider instance and the consumer instance to track updates to government case records



Agencies can connect:

- Within the agency across multiple departments
- With businesses or constituents
- With suppliers
- With implementation partners
- With other agencies

A consumer instance

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Exchange for Public Sector Digital Services Key Features

Remote Catalog	Keeps the development of shared catalogs between agencies with the workflows & integrations in the providers instances while providing constituents with native catalog items in their instances.	Other agencies can avoid creating their own catalogs, and can utilize the original agency's remote catalog, leads to reduced costs and decreasing errors as well as increasing customer experience. Additionally increasing the efficiency and productivity at original agency as well as at consumer.
Remote Choice	Provides direct access to provider data in real time during the submission of a Remote Catalog item.	Removes the need to replicate foundation data into the consumer instance. Having the right information at the right time reduces the chances of errors and reduces costs.
Remote Task	A sustainable replacement for custom eBonding. Collaborate effortlessly across the ServiceNow ecosystem. Native alternative to traditional E-Bonding. Enables task to task integration.	Avoids the need to build error-prone integrations. Enhances collaboration and communication, while enhancing service quality.
Proactive Case	A case initiates an agency Provider Task through a flow on the agency provider's instance that can be checked proactively on the consumer instance. There is a Proactive Case flow behind to sync.	Simplifies and increases automation ratio for alerting processes or notification processes. Improves the service delivery quality and streamlines tasks assignments.
Scratchpad	Scratchpad allows variables to be shared “ad hoc” between instances through Remote Tasks or Provider Tasks.	Simplifies data sync between agency and consumer instances and reduces adoption efforts. Quick data entry and retrieval, leading to reduced time spend by capturing data and updating directly in scratchpad.
Authorized User	Enables user level role based access control of Remote Record Producers in the constituent instance.	Avoids mismatch possibilities due to adoption of user level role based access control. Reduces compliance risks by reducing access errors through data mismatch.
Provider Task (record producer)	Enables agency providers to be transparent and collaborative with their consumers that use	Simplifies data sync between the instances and avoids data mismatches between

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Exchange for Public Sector Digital Services Key Features (continued)

	ServiceNow by syncing relevant tasks, like cases, to their constituents as Provider tasks.	the cases in the different instances
Configuration Revisions	The configurations of remote record producers, remote task definitions, and foundation data sync offerings can be updated to create new revisions that can be entitled to constituents. New revisions of entitlements with updated functionality can be deployed to compatible consumers without impacting consumers who have not upgraded their Service Bridge applications.	New revisions of Service Bridge entitlements that offer updated functionality can be developed and deployed to compatible consumers without negatively impacting consumers who have not yet updated their application. The agency provider delivers an improved customer experience with improved efficiency and scalability.
Mismatch Version Support	Providers and consumers can run different versions of the Service Bridge applications (within N-2) without impacting their ability to exchange data.	This feature eliminates the need for agency providers to coordinate Service Bridge applications updates with their consumers and allows providers to adopt new features while supporting consumers who have yet to upgrade. Service Bridge supportability and scalability are improved, and the agency provider is able to deliver an improved customer experience.
Consumer Pre-Flows	Constituents in the consumer instance can control if Remote Catalog Item request data should be synced to the provider. A flow can be associated with a Service Bridge Remote Record Producer (RRP) and run consumer-defined processes, such as approvals, before the request/task is synchronized to their provider.	Consumer Pre-Flows will enable Service Bridge providers to improve their service for current consumers and expand to additional customers for whom this feature is a requirement.
Consumer Variable Sets	A Service Bridge consumer administrator can now add additional variables to a Remote Catalog Item/RRP that they can use in managing the request content and flow.	Allowing this additional consumer control of Service Bridge RRP requests will enhance Service Bridge useability, elevate the customer experience, and driver higher adoption rates.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Exchange for Public Sector Digital Services Key Features (continued)

Remote Catalog Item Client Scripts	A provider will be able to include catalog client scripts that will be synchronized to the consumer's instance with a Remote Catalog item. The consumer administrator will review and approve each script when activating the catalog item in their instance.	Allow providers to control the completeness and correctness of catalog requests from the consumer, enabling more efficient service and improved consumer satisfaction; and will lead to increased adoption of Service Bridge.

Key capabilities

The main capabilities of Service Exchange include:

- Onboarding: Quickly onboard agency partners or constituents that use ServiceNow with a simplified registration process.
- Authorized Users: Manage and control access at the Remote Catalog item level to meet security and compliance requirements.
- Remote Catalog: Update shared agency service catalogs in minutes as new items are introduced.
- Remote Choice: Ensure up-to-date field options in downstream agency remote catalogs by retrieving real-time data from the provider's ServiceNow instance.
- Remote Task: Help increase automation with seamless multi-party and multi-instance workflows across the ServiceNow ecosystem.
- Provider Tasks: Enable all providers of services using Service Exchange to be transparent and collaborative with their partner agencies who use ServiceNow by syncing relevant tasks like cases, to consumers as Provider Tasks.
- Transform Framework: Transform inbound and outbound remote task data for easy process transformation between ServiceNow instances.

Policy as Code Engine (PaCE) and the Social Benefits Playbook in Public Sector Digital Services

As a Public Sector Digital Services process owner or admin, you can create and maintain the rules that drive how eligibility and benefits are determined in the Social Benefits Playbook using Policy as Code Engine (PaCE. PaCE is a powerful, low-code rules engine capable of processing rules in seconds. The rule-sets created within this rules engine are called policies.

You can administrate the full life cycle of policies using PaCE in applications by searching, reviewing, and updating existing policies, and creating policies as required. Policies in the applications are powered by PaCE. For more information on PaCE and how it fits in with the Social Benefits Playbook, see Understanding Policy as Code Engine (PaCE) and the Social Benefits Playbook.

Exploring Analytics and insights for Public Sector Digital Services

Use the Performance Analytics applications for Public Sector Digital Services to report your constituent service performance and effectiveness. You can use the predefined key performance indicators (KPIs) and preconfigured role-based dashboards for monitoring your service processes. These analytics enable you to align your organizational goals across all roles, from executive to manager to agent.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Performance Analytics dashboards

By using the preconfigured Performance Analytics dashboards, you can provide your government service managers with deep insights into how they can visualize the data over time, analyze service delivery processes, and identify areas of improvement.

The following example shows a Performance Analytics dashboard with citizen service trends and how efficient government cases were handled that month.

Public Sector Digital Services Constituent Services dashboard

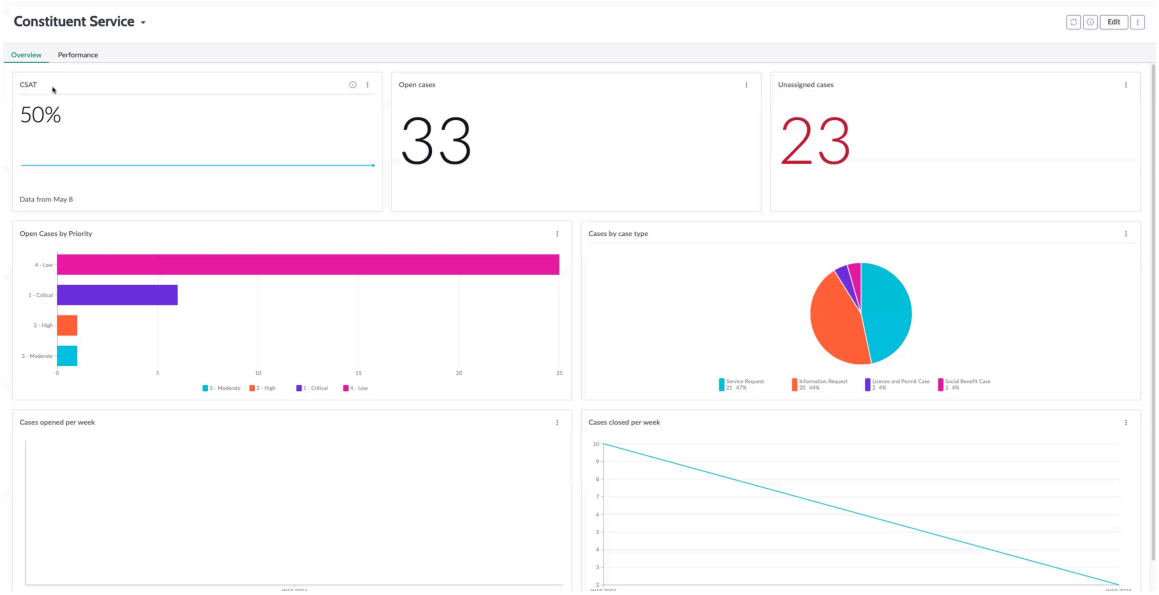

To learn more about the Performance Analytics solutions, see Analytics and Reporting Solutions for Public Sector Digital Services.

Configuring Public Sector Digital Services

Set up Public Sector Digital Services to enable government agents and service managers to provide government services to constituents, businesses, and other agencies.

Set up your environment	Configure agent workspaces	Enable communication channels
Plan and set up your PSDS environment, import your foundation data, configure access and case management	Configure your agent workspaces, including the CSM Configurable Workspace, Playbooks, Service Bridge, case routing, and advanced case management features.	Set up communication channels, including voice, email, web, and messaging.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Implement intelligence	Set up self-service	Extend capabilities
		
Set up Intelligence features to automate routine tasks and provide recommended content to agents, such as Now Assist.	Create self-service portals for constituents that are integrated with knowledge, communities, service catalogs, and chatbots.	Set up additional PSDS features to extend the capabilities of your environment.

Other configuration tasks

In addition to installing the public sector application and playbooks, you can configure other features for public sector use:

ServiceNow® Virtual Agent

Virtual Agent, which is included with a public sector subscription, provides end-user assistance through automated conversations in chat channels.

The Public Sector Digital Services Core application offers several prebuilt public sector components (topic blocks) that conversation designers can use to create Virtual Agent conversations.

The Service Request Playbook application provides a prebuilt Virtual Agent conversation topic, Create a service request, to help constituents submit non-emergency service requests.

For details on configuring Virtual Agent for public sector use, see Configure Virtual Agent for Public Sector Digital Services.

Service definitions

A service definition enables you to map a public service, information service, or license and permit request service to the list of services your agency offers for resolving that request.

As an admin, you can create service definitions that connect the services your agency offers to the services being requested by a constituent or business. When you create a service definition, you can configure the case management processes, such as the case types, for executing those services.

For more information, see Service definitions for Public Sector Digital Services.

Relabel menu items in CSM Configurable Workspace after upgrade

After you upgrade your instance to a new release, certain menus and menu items in the CSM Configurable Workspace might not be labeled appropriately for public sector use. You can relabel the following items for public sector use by changing them in the UX list categories for Customer and Service Organizations.

For details, see Relabel CSM Configurable Workspace items after upgrade.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Set up your environment in Public Sector Digital Services

Begin your journey by preparing your Public Sector Digital Services environment with data models, product data, user management, and case management tools to go live.

Getting started



Activate the Public Sector Digital Services core application, and import your foundation data.

Customer data



Create and manage data for internal users, such as managers, agents, and support groups.

User management



Create and manage data for internal users, such as managers, agents, and support groups.

Data models



Create and manage data models for Public Sector Digital Services.

Product data



Configure product data including product models, sold products, install base items, and installed products.

Getting started with Public Sector Digital Services

Getting started.

Activating plugins and foundation data

Task	Description
Activate Public Sector Core	As an admin, activate the Public Sector Digital Services Core plugin. The PSDS Core application provides data models, workflows, and experiences that enable the development of public sector customized applications, which deliver digital services to the government constituents. This plugin includes demo data and activates related plugins. For information on the plugins activated with Public Sector Digital Services Core, see Plugins installed with Public Sector Digital Services Core.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Activating plugins and foundation data (continued)

Task	Description
Plugins installed with Public Sector Digital Services Core	Review the list of plugins that are activated after installing and activating the Public Sector Digital Services Core application.
Configure foundation data	Import customer information including names, addresses, and phone numbers; accounts, contacts, consumers, users, groups, group members, product models, and assets. Assign roles to groups or to individual users. Create service contracts and entitlements. Create customer relationships, asset relationships, and account teams.

Install and configure the Public Sector Digital Services Core application

Install the Public Sector Digital Services Core application and configure various features used in the application.

As admins, perform the following administration tasks to install the Public Sector Digital Services Core application and configure key features. After the Public Sector Digital Services Core application is installed, admins configure public service offerings that define services available for request and the agencies that provide them.

Install tasks for Public Sector Digital Services Core

Task	
Install Public Sector Digital Services Core	Install Public Sector Digital Services Core (sn_gsm) from the ServiceNow® Store. It provides these key features: • Government Service Portal: Used by constituents and businesses to find, track, and request government services. • Agency Services Portal: Used by admins and managers to manage internal and external agency locations. • CSM Configurable Workspace: Used by agency agents, government agents, and government service managers to interact with and assist constituents, businesses, and contributors who are authorized to represent or assist constituents and businesses. This workspace requires configuration for public sector use.
Review and assign roles to public sector users	Assign public sector roles to users or groups that have been configured in the ServiceNow AI Platform®. For additional role information, see Roles installed with Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Install tasks for Public Sector Digital Services Core (continued)

Task	
Configure Public Sector Digital Services Core foundational data using guided setup	Use guided setup to customize the Government Service Portal used by constituents, businesses, and agencies; configure the CSM Configurable Workspace for agents; and set up other features for public sector use.
Optionally configure Public Sector Digital Services Core without guided setup	Customize the government service portal and configure the CSM Configurable Workspace for agents.
Configure Virtual Agent for Public Sector Digital Services	Set up Virtual Agent so that conversation designers (topic authors) can create and modify chatbot conversations for public sector use cases. Also enable your end users to run Virtual Agent in the Government Service Portal and get help with self-service tasks.
Configure a service for constituent, business, or agency	Define the type of public service offered, the service taxonomy, and agency that offers the service.

Install Public Sector Digital Services Core

You can install the Public Sector Digital Services Core application (sn_gsm) if you have an admin role. The application includes demo data.

Before you begin

- Confirm that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Review the Public Sector Digital Services Core application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

  The Public Sector Digital Services Core application requires a subscription.

Role required: admin

About this task

For more information, see Components and Roles installed with Public Sector Digital Services Core.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Public Sector Digital Services Core application (sn_gsm) by using the filter criteria and search bar.

   You can search for the application by its name or ID. If you can't find the application, you might have to request it from the ServiceNow Store.

   In the list next to the **Install** button, the versions available to you are displayed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.

4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are the sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
6. Select **Install**.

What to do next

Use guided setup to configure the Public Sector Digital Services Core application. If you're not using guided setup, you can customize the Government Service Portal and configure the CSM Configurable Workspace for public sector use by following the optional configuration steps for Public Sector Digital Services Core.

Plugins installed with Public Sector Digital Services Core

These plugins are installed with Public Sector Digital Services Core, if they are not already active.

Note:
The Application Files table lists the components that are installed with this application. For instructions on how to access this table, see Find components installed with an application.

Plugins installed with Public Sector Digital Services Core

The following plugins are activated when you enable the Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)/(sn_gsm) plugin. For more information on the plugins installed with other Public Sector Digital Services Core applications, including Playbooks, see Plugins installed with Public Sector Digital Services Applications.

Plugin	Description
UI Components for Customer Portals (com.sn_ciwf_ui_cmpnt)	Provides a library of configurable components that offer better reusability, performance, and upgrade scalability for customer service portals.
Business Location (sn_bus_loc)	Enables support for businesses that interact with customers through physical channels such as stores, branches, franchises, and dealerships. Business locations can also support other service organizations.
Agency Support Model (com.sn_agency_support_model)	Provides support for agency services to connect constituents, businesses, and agencies on a single public sector vertical platform. Supports a 360-degree view of agency activity in agent workspaces.
Customer Service Case Types (com.snc.csm_case_types)	Enables agency customers to manage complex case processes by defining new case types. A case type represents an individual

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	business process and is a collection of diverse inputs and tasks that an agent performs to resolve constituent requests.
Customer Service Portal (com.glide.service-portal.customer-portal)	Supports business-to-business (B2B) organizations to support their customers. Provides out of the box self-service capabilities for customers to search information or request assistance from a service agent.
Customer Service Install Base Management (com.snc.install_base)	Enables customers to capture the current state of their install base and establish the relationship to any downstream entities that might impact their functioning.
Service Applicant Information (com.sn_svc_appl_info)	Enables customers to capture additional information entered during the case creation/ application process. Includes a data model and corresponding custom UIs to facilitate storing new applicant information, their associated financial information, and other constituent/business contact data.
Service Applicant Program Management (com.sn_svc_appl_pgm_mg)	The Service Applicant Program Management application, in partnership with Strategic Portfolio Management, empowers organizations to quickly design, configure, and launch applicant-facing programs, such as grants.
Service Request Criteria (sn_req_criteria)	Allows government service agents to view only relevant service definitions while creating a case. Service definitions can be filtered using user criteria and entity criteria which shows only relevant service definitions for agents and constituents. Admins can create new customer criteria for constituents, accounts. Constituents can see relevant service definitions in the customer portal based on customer criteria setup by admins.

Public Sector Digital Services properties

Use system properties to customize the Public Sector Digital Services application.

These properties control settings for several different features, including communication, contact relationships, and access to playbook and application data. You must have the admin role to configure these properties.

You can also access Public Sector Digital Services properties using the system property [sys_properties] table. Start by entering **sys_properties.list** in the application navigator and selecting **Enter**. You can then filter the properties by application.

For more information on the properties that are installed with Public Sector Digital Services, see Properties installed with Public Sector Digital Services

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure Public Sector Digital Services foundational data and workflows

With the Public Sector Digital Services Core application, you can import or create constituent information including names, addresses, and phone numbers; account and financial details; services contracts and items received; and service entitlements and contracts. You can also assign roles to users and create user relationships.

Foundation data includes the data that you must configure to support your constituents, contacts, applicants,and households, including information about:

- Constituents and Applicants (external users)
- Applicant and Household relationships
- Users (internal users such as agents and employees)
- User roles
- Service contracts and entitlements
- Service Definitions
- Install Base Items

Configure Public Sector Digital Services Core foundational data using guided setup

Walk through the guided setup processes to configure Public Sector Digital Services foundational data.

Before you begin

Install the Public Sector Digital Services Core application.

Role required: admin

About this task


The Public Sector Digital Services Core application is built on the Customer Service Management application. As part of the guided setup for the Public Sector Digital Services Core application, you can also use guided setup for Customer Service Management to configure foundation data and workflows.

To create data, such as adding new accounts and contacts, you can use the Public Sector Digital Services application.

Procedure

1. Navigate to **All** > **Constituent Service** > **Administration** > **Guided Setup**.
   The Welcome to Public Sector Digital Services Guided setup page displays.
2. Review the **Getting Started** and *Public Sector Digital Services* **Pre-setup Checklist** sections, which give information on the setup process and the various requirements to consider before implementing Public Sector.
3. Select **Get Started** to begin the configuration.
   The guided setup reopens with a page of different categories of Public Sector Digital Services features that you can configure.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

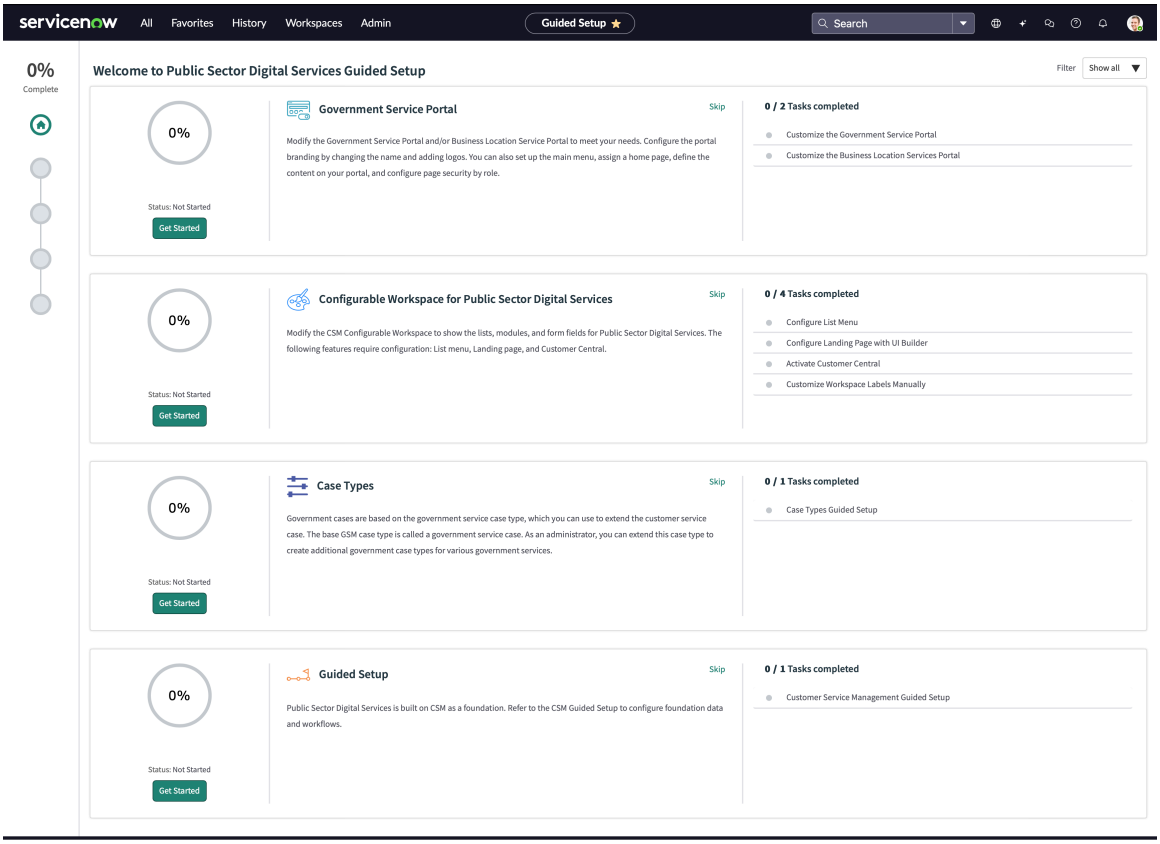

4. In the Guided Setup category, select **Get Started**, then select the Foundation Data category and select *Get Started*.
5. To perform a task, select **Configure**.

Foundation Data configuration tasks

Task	Description
Import Accounts	In the business-to-business (B2B) model, an account is a supported external customer. Import and verify existing account data.
Import Contacts (B2B)	A contact is a user who is an employee of an account. Import and verify existing contact data.
Import Users	A user is an individual who can access your instance. Import and verify existing user data.
Import Groups	A group is a set of users who share a common purpose. Import and verify existing group data.
Import Group Members	The users associated with a group are listed as group members. Import and verify existing group member data.
Assign Roles	Roles control access to features and capabilities. The Public Sector Digital Services application provides two types of roles:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Task	Description
	○ Internal roles for agents and managers ○ External roles for constituents, business partners, and etc Assign the necessary roles to internal and external users. For more information, see Assign roles to Public Sector Digital Services users.
Import Product Models	A product is a type of good or service that your agency provides and supports. Product models identify different types of products, such as a service.
Import Sold Products	Sold products are services and components that have been provided to an account, constituent, or business partner. Importing sold products provides an overview of the complete services and components provided to an account, constituent, or business partner.
Create product model and catalog items relationships	Enable self-service for constituents to request services on products by creating relationships between product models and catalog items.
Import Install Base Items	Install base items represent the instances that have been configured for a constituent. Each install base item references the configuration item record for the constituent.
Create Service Contracts	A service contract contains information about the type of support that is provided to a constituent. It can also include multiple service entitlements and service-level agreements (SLAs).
Create Entitlements	An entitlement defines the type of support that a constituent receives as well as the supported communication channels. Entitlements are counted and tracked using two types of units: cases and hours.
Create Account Teams and User Groups	Account teams are made up of employees who fulfill specific jobs or roles for a particular account. Create these roles, or responsibility definitions, and then assign them to employees and contacts. For more information, see .

What to do next

After you have completed the foundation setup tasks, you can set up your agent workspace with other Public Sector applications, such as Playbooks or the Performance Analytics Content Pack.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configuring Public Sector Digital Services customer data

Customer data constitutes the data linked to a case using associated entities such as Accounts, Contacts, Constituents, Household, Products, and Service Contracts. This information provides the government service agent the information necessary to resolve constituent issues.

The following list is a list of key entities in the Public Sector Digital Services foundational data model.

Constituent

A constituent is a customer in the business-to-consumer (B2C) business model.

Contacts

A contact is an employee of an account and can be associated with only one account. Contacts can have multiple assets and service contracts, can have one or various roles associated with them, and has a user ID and can log in to the Government Service Portal, as well as view and work from the consumer instance in Service Bridge for Public Sector Digital Services (PSDS).

An employee of a company is an example of a contact.

A contact record stores information about a contact, such as the name, phone number, and email address. Contact information is stored in the Contact [customer_contact] table.

Applicants

In the Social Benefits, License and Permits, and Grants Management space, an applicant is a user that applies for a grant, license and permit, or social benefit using the Government Service Portal.

Households

A household is a group of constituents who live at the same address and share products and services. A household can have a designated head of household and multiple current members. The head of household has access to all cases and information for the other household members.

Household information is stored in the Household table, and also includes the relationships between household members.

For more information on households in Public Sector, see Configure households in Public Sector Digital Services.

Configure households in Public Sector Digital Services

The household entity represents a group of constituents that usually share a common address and use services as a group Service Model Foundation uses the household form to store details about a constituent household, including its members, their relationships, and any cases, entitlements, or contracts associated with them.

A household is made up of constituents who have been added as members of that household.

Note:
A household has an address and constituents have their own addresses. These addresses don't need to be the same to add a constituent or user as a member to a household.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Support complex constituent/household relationships. Resolve issues related to shared services faster with access to the entire household's account history. Provide easy and secure authorized access to identified persons for streamlined engagement. Assigning a specific agent for handling all issues for a given household.

With the household entity, you can:

- Create households and add constituents as household members.
- Create cases for households and household members.
- Create relationships between household members. These relationships authorize one household member to manage cases on behalf of another member.
- Create relationships between staff members and households or household members that enable the staff members to manage cases for those households and members.
- Track information for households, including sold products, contracts, and entitlements.

Constituents can be modeled into households and exist in relationships with each other (and with specific agents). Each household can have a “Head of Household” who is able to open and manage cases on behalf of the other members of the households Note: Public Sector Digital Services specific responsibilities can be created if standards out-of-the-box responsibilities (i.e., Authorized Representative) do not fit the use case.

A household can have one member designated as the head of household. A constituent who is added as the head of household is automatically added as a member of the household.

The head of household has access to all of the cases and information for the household and the other household members. The head of household can also see:

- The sold products for the household.
- The sold products and install base items for household members.

Households can have multiple members. These members can be either constituents or constituent users. constituents can also belong to multiple households.

Membership in a household is defined by the Start Date and End Date on the Household Member form. A household member is considered to be a current member if:

- The Start Date field is empty or is filled in with today's date.
- The Start Date field is filled in with a past date and the End Date field is empty or is filled in with today's date or a future date.

Only one record with current membership dates is allowed for each constituent in a household. A constituent can leave and rejoin a household multiple times. This information is recorded using the start and end dates. As members are added or removed from a household, the member history is retained. You can find this information in the following related lists on the Household form.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Current Members: the constituents currently in the household.
- All Members: current and past members of a household. This list provides a history of the household. Members can appear multiple times in this list.

On the Household form, you can also find information about household cases and products in the following related lists:

- Cases: the cases that have been created for all of the members within a household
- Sold Products: the products owned by the household. These products can be owned or shared by multiple household members.

The following types of relationships can be created for households and household members. These relationships are included in the following related lists on the Household form:

- Member Relationships: relationships that have been established between household members. These relationships are created using the Authorized Representative responsibility. Household members that have an Authorized Representative relationship with another household member can act on behalf of that member and can manage cases and information for that member.
- Household Team: relationships that have been established between an agent and a household. These relationships are created using the Relationship Manager responsibility. Agents that have a Relationship Manager relationship with a household can manage all of the cases for that household.

Create or update a household in Public Sector Digital Services

Create or update a household.

Before you begin

Role required: sn_customerservice.svc_location_manager, sn_customerservice_manager, admin

About this task

A household is made up of a group of consumers who live at a common address and share products and services. A household can have a designated head of household and multiple current members. The head of household has access to all the cases and information for the other household members.

A user with the administrator role can create a household. This user can also delete a household. When a household is deleted, the system removes its references and associations—including members, sold products, cases, and work orders—but doesn't delete the associated entities.

Service Model Foundation uses the household form to store details about a consumer household, including its members, their relationships, and any cases, entitlements, or contracts associated with them.

Procedure

1. Navigate to **All** > **Constituent Services** > **Customer** > **Households**.
2. Select **New** on the Households list.
3. On the form, fill in the fields.
   For more information on the fields on the Household form, see Household form.
4. Select **Submit**.

Result

The household is added to the Households list. You can add constituents to the household entity, as well as create and manage cases for an entire household.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Related topics

Add constituents to a household in Public Sector Digital Services

Create a relationship between household members in Public Sector Digital Services

Create and manage cases for a constituent or household in Public Sector Digital Services

Add constituents to a household in Public Sector Digital Services

Add constituents as members of a household.

Before you begin

Role required: sn_customerservice.svc_location_manager, sn_customerservice_manager, admin

About this task

You can add existing constituents from the Consumer table to a household.

- A household can have multiple consumers.
- A constituent can belong to multiple households. One household can be designated as the primary household for that constituent.

Household member records are added to the Household Member table. When a constituent is added to a household, the constituent is assigned as a unique household member number that begins with the prefix HM.

The Household form includes the following related lists for household members:

- Current Members: Constituents that belong to the household as of the current date.
- All Members: Current members and past members. The government service manager or admin can indicate that a constituent no longer belongs to the household by adding a date to the **End Date** field. A constituent that has left a household can be added back to that household.

Procedure

1. Navigate to **All** > **Constituent Services** > **Customer** > **Households**.
2. Select a household.
   For information on how to create a household, see Create or update a household in Public Sector Digital Services.
3. In the Current Members related list, select **New**.
4. Add a user from the **Consumer** table in the Constituent field.
   For information on how to add a constituent to the **Consumer** table, see Configure constituents. The **Household** field is automatically updated with the household selected in step 2.
5. **Optional:** If desired, add the date that the constituent was added to the household in the **Start Date** field.
   If the constituent is removed from the household, you can add the **End Date** field.
6. Select **Submit**.
   The constituent is added to the Current Members related list.
   On the Consumer form for this constituent, the household is added to the following related lists:
   - Current Households
   - All Households

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Result
One or more constituents are added to the household entity. You can now create relationships between constituents, as well as create and manage cases for each constituent of the household.

Related topics
- Create a relationship between household members in Public Sector Digital Services
- Create and manage cases for a constituent or household in Public Sector Digital Services

Create a relationship between household members in Public Sector Digital Services

Create a relationship between two constituents who are current members of the same household.

Before you begin
Role required: sn_customerservice.svc_location_manager, sn_customerservice_manager, admin

About this task
Relationships are based on responsibilities. A responsibility definition describes a role or a function that supports a customer or consumer. To create a relationship between two constituents in a household, use the Authorized Representative responsibility.

Procedure
1. Navigate to **All** > **Constituent Services** > **Customer** > **Households**.
2. Select a household.
3. In the Member Relationships related list, select **New**.
   This related list shows the current relationships that exist between constituent in this household. When you select **New**, a new Household Member Relationship is displayed with the **Household** field already filled in.
4. In the **Constituent is** field, select the constituent in the household to fulfill the responsibility on behalf of another constituent within the same household.
5. In the **Responsibility** field, select the **Authorized Representative** responsibility.
6. In the **of Constituent** field, select the constituent who is being represented by the constituent in the **Constituent is** field.
7. In the **Type** field, select the type from the list of related party configurations.
8. In the **Order** field, select the sequence in which you want the records to be displayed.
   By default, it is organized according to business preferences.
9. Select **Submit**.
   The relationship is added to the Member Relationships related list.

Create and manage cases for a constituent or household in Public Sector Digital Services

Staff members with the location agent role can create and manage cases for constituents and households.

Before you begin
Role required: sn_customerservice.svc_location_manager, sn_customerservice_manager, admin

About this task
Staff members at a business location who have the location agent role can create cases for households and constituents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Staff members or internal users who have a relationship with a household (based on the Relationship Manager responsibility) can create cases for that household and its members. Users with relationships to a household are listed in the following locations:

- The Household Team related list on the Household form.
- The Household Team Members list.

Relationship managers can perform the following actions on the cases that they can access:

- Add comments and work notes.
- Add attachments.
- Close cases.

When a constituent case is created or updated, the constituent receives an email notification. If a household is added to a case, the head of household is also notified when a case is created or updated.

Procedure

1. Navigate to **All** > *CSM Configurable Workspace* > **List**
2. Navigate to the related list of the type of case you want to create.
3. Under that related list, select **All** and select **Create New**.
4. Perform one of the following actions.

Option	Description
Add a constituent.	Select a constituent in the **Constituent** field. ○ If the constituent belongs to only one household, the **Household** field is automati cally updated. ○ If the constituent belongs to more than one household, select a household from the households that a constituent belongs to in the **Household** field. ○ If the constituent does not belong to a household, you can leave the **Household** field empty.
Add a household.	Select a household in the **Household** field. ○ If the household only has only one current member, the **Constituent** field is automati cally updated. ○ If the household has multiple current mem bers, select a constituent from the house hold members in the **Constituent** field.

5. Fill in the remaining fields on the Case form.
6. If desired, add other members of the household to the watch list.
   If a user with a Relationship Manager relationship is creating a case for a household or household member, this user is automatically added to the watch list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

7. Select **Submit**.
   The case is added to the **Cases** related list on the Household form.

Public Sector Digital Services User Management

Configure the internal and external users for Public Sector Digital Services to provide the correct access to features, capabilities, and case data. Create relationships that facilitate case management and fulfill roles for specific accounts.

Configure user roles and groups in Public Sector Digital Services

The Public Sector Digital Services application uses roles to provide access to information, identify internal and external users, maintain data security, and establish different types of relationships between users and public sector entities. These roles provide different levels of access to public sector data, to help maintain data security.

Public Sector Digital Services provides many functional and granular roles that you can assign to public sector users.

You can assign roles to users or groups that have been configured in the ServiceNow AI Platform®. A user is an individual who can access your instance, and a group is a set of users who share a common purpose. The users associated with a group are listed as group members. After your users and groups are configured, you can assign roles to them. When you apply roles to groups, their members inherit the applied roles.

For more information about roles, see Roles installed with Public Sector Digital Services.

You can assign roles to users and groups using guided setup, or you can use the following ServiceNow AI Platform user administration features to create users and groups and assign the appropriate public sector roles:

Configuring users, groups, and roles

To	See
Create users and groups	• Create a user. • Create a user group. • Add a user to a group.
Assign roles to users and groups	• Assign a role to a user. • Assign a role to a group.

Assign roles to Public Sector Digital Services users

Roles control access to features, capabilities, and data in the Public Sector Digital Services application.

Before you begin

Role required: admin

About this task

You can assign roles to individual users or groups. Apply roles to groups and the members of those groups inherit those roles.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The Public Sector Digital Services application provides two types of roles: internal roles assigned to internal users such as for government service agents and managers, contributors, managers, and admins, and external roles for constituents, applicants, and business owners, contacts, channels, and partners. These roles are automatically installed with activation of the Public Sector Digital Services Core application.

Internal and External roles for Public Sector Digital Services

Internal Roles	External Roles
Gov-to-business (G2B) • sn_gsm.business_agent • sn_gsm.government_service_manager	**Gov-to-business (G2B) Customer** • sn_gsm.business_contact • sn_gsm.business_contact_admin • sn_gsm.business_case_manager **Gov-to-business (G2B) Partner** • sn_gsm.business_partner • sn_gsm.business_partner_admin • sn_gsm.business_contact
Gov-to-constituent (G2C) • sn_gsm.constituent_agent • sn_gsm.government_service_manager	**Gov-to-constituent (G2C)** • sn_gsm.constituent • sn_gsm.constituent_contributor
Gov-to-Gov (G2G) • sn_gsm.agency_agent • sn_gsm.agency_constituent_agent • sn_gsm.agency_manager • sn_gsm.government_service_manager • sn_gsm.agency_contributor	

Procedure

- You can assign roles to users and groups using guided setup.
- You can also assign roles to users and groups using the *ServiceNow AI Platform* user administration feature.
  - Assign a role to a user
  - Assign a role to a group

Related topics

Roles installed with Public Sector Digital Services

Configure related parties for Items Received

Add related parties to an item received in the Public Sector Digital Services application so that the contacts, businesses, constituents, or agencies can get the correct access level to perform the actions that they need for a case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Role required: admin, sn_gsm.constituent, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, or sn_gsm.service_manager

Procedure

1. Navigate to the CSM Configurable Workspace and select the Lists icon  in the sidebar.
2. Navigate to **Item Received** > **All**.
3. Select the record that you want to add the related parties to.
4. From the Related Parties related list, select **New**.
5. On the form, fill in the fields.

Related Parties Record form

Field	Description
Type	Related party type. The related party type can be a contact, consumer, or a contributor user. You can select from the list of related party configurations for the cases that are provided with the base system: ○ Authorized Business ○ Authorized Contact ○ Authorized Constituent ○ Authorized Household ○ Authorized Agency ○ Authorized User ○ Listed Constituent ○ Listed Agency
Case	Auto-generated case number.
Business, constituent, household, or user	Contact responsible for the case.
Responsibility	Access level to the case information. When you select the related party type, the associated responsibility gets added by default. If the related party type is changed, the responsibility that corresponds with the related party type gets updated accordingly. **Note:** If the related party type is selected but the responsibility field isn't automatically filled in, your contacts don't have access to the sold product (service received) and associated case.

6. Select **Submit**.
   The related parties are added to the case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Result

After a related party is added to the case as an authorized representative with a functional role, the related party can perform the following actions:

- Close a case.
- Create a case for service received (sold product).
- Receive notifications on case updates.
- Update the customer-visible case tasks.
- Add additional comments and attachments.
- Accept or reject a solution.

Configuring product data in Public Sector Digital Services

Configure product data for Public Sector Digital Services including product models, sold products, install base items, and installed products.

Optional configuration steps for Public Sector Digital Services Core

As an admin, you can customize the Government Service Portal and configure the CSM Configurable Workspace for the Public Sector Digital Services Core application without using guided setup.

The Government Service Portal is tailored for public sector use, but you can customize the portal by adding your own branding such as an agency name and logo. You can also configure elements of the workspace to display public sector modules, lists, and fields, and activate other workspace features for your agents, such as Customer Central.

Set a default view for Items Received in the Public Sector Digital Services platform

Customize the default view in the Public Sector Digital Services platform workspace so that the Items Received related list is displayed under a business, constituent, or agency record.

Before you begin

Role required: none

Procedure

1. Navigate to a business, constituent, or agency record in the Public Sector Digital Services platform.
2. Select the list controls icon ( ), and select **View**.
3. Select **PSDS** from the dropdown menu.

Result

The user view is changed, and the Items Received related list is viewable.

Configure Agent Workspaces in Public Sector Digital Services

Configure agent workspaces and boost efficiency by optimizing interfaces, configuring playbooks, setting up case management and routing, and integrating tools for smooth case handling.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbooks and Solutions



Configure playbooks to help guide government agents through the lifecycle of a public service case.

CSM Configurable Workspace



Set up the CSM Configurable Workspace to provide agents with the tools they need to answer constituent questions and resolve requests efficiently.

Case management



Configure your case management tools to optimize case handling.


Case routing and assignment



Use Advanced Work Assignment (AWA) to automatically route cases to the appropriate government service agents in CSM Configurable Workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent workspaces overview

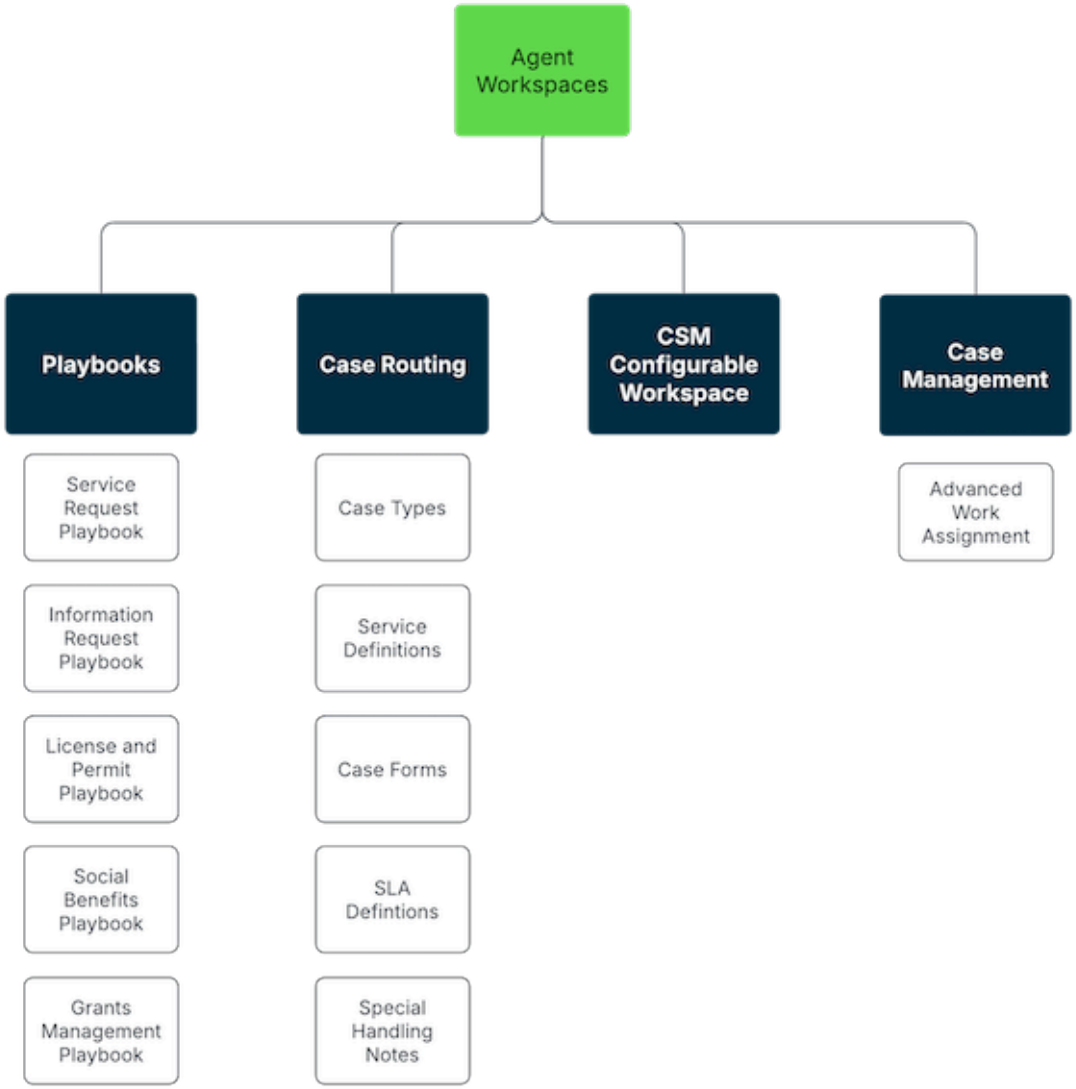

Playbooks

Install one or more playbook applications with Public Sector Digital Services. These tools provide an end-to-end workflow for handling public service requests submitted by consitutuents, enabling agents to resolve cases quickly and efficiently.

CSM Configurable Workspace

Set up the CSM Configurable Workspace and expand the Workspace UI to optimize agent government service processes. This user interface provides agents with the tools they need to answer constituent questions and resolve issues efficiently.

Case routing and assignment

Set up Advanced Work Assignment in the CSM Configurable Workspace to route and assign cases automatically to the appropriate agents based on their availability, capacity, and skills. This setup helps to improve efficiency and response times.

Case management

Configure your case management tools to manage cases efficiently by setting up features that permit you and your constituents to create, resolve, and categorize

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

cases. Define case types for different public services, configure service definitions to link services and case types, and allow accurate tracking and resolution.

Configure Case Management in Public Sector Digital Services

Set up case management features to enable agents and constituents to create cases as needed and work to resolve those cases. Create the necessary case types to handle specific types of public services, issues, and requests. Configure service definitions to create connections between products, services, and case types.

Public Sector Digital Services case types

You can use a public service case, which is based on the Government Service case type, to extend the customer service case from the Customer Service Management application. By using a case type, you can define the processes and data that are needed to resolve your public service requests.

Overview of a case type

A case type represents the processes and data needed to resolve a specific type of constituent request. For example, within Public Sector, government service agents can use case types for different constituent needs such as requests for information, requests for maintenance, social benefits application processing, or managing licenses and permits. You can associate record producers with a certain type of case so that when you submit that record producer through the portal, it creates a case of the correct type. In addition to using service definitions, you can use the case types feature to create and configure the different types of government service cases that your agency handles. For more information on service definitions, see Service definitions for Public Sector Digital Services.

The base Government Service case type is called a public service case, and is an extension of the Customer Service case type from the Customer Service Management application. Each Public Sector Digital Services playbook application comes with its own case type (for example, Information Request Playbook has an Information Request case type that comes by default, which is an extension of the base Government Service case type). The Information Request case type can be extended further if your specific use case goes beyond what it offers.

As an administrator, you can extend from existing base case types that are provided in applications out-of-the-box to create additional case types for various government services that your agency offers, or you can create and configure an entirely new case type that extends the Case table, in order to implement specific case application types, and enabling you to take advantage of prebuilt roles, business rules, and other business logic.

Creating a new case type can include creating a new table that is an extension of an existing case, or creating an entirely new case type. Typically this involves creating new roles, modules, workspaces, and other required entities. For additional information on case types, see Customer Service Case Types

All Public Sector Digital Services applications have a base case type table. Use the base case type table when adding a new case type for that application. For example, if you need a new case type in License and Permit Playbook, extend the License and Permit Base Case table, which is itself an extension of the Government Service base case table and was created to capture more specific information related only to a License and Permit case. However, if there is need for a new case type for which there is no base application in PSDS that works, extend the base PSDS case [sn_govservice_case] table.For more information on the base tables installed with each Public Sector Digital Services application, see Public Sector Digital Services Data Model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You can use both case types and service definitions to define the data and processes that are needed to resolve a government service request. For more information on service definitions in Public Sector Digital Services, see Service definitions for Public Sector Digital Services

When you are evaluating whether you need to create a new case type in Public Sector Digital Services, you should consider the following:

- Should I use a service definition instead of a new case type?
- Does an application already exist that I can use for my use case?
- Which base PSDS case type should I extend when creating the new case type?

Grants Management case types

The Grants Management Case (aka Grants Proposal) is designed as a case type which extends the Government Service Case and functions as the primary transactional entity for receiving Grant Applications/Proposals. When proposals are submitted, they are entered into this dedicated table. A workflow is then initiated, which is presented to users as a Proposal Playbook. This structured process ensures the efficient management and review of grant proposals.

By default, the Grants Management case type includes several key attributes that capture essential details about each proposal. These attributes are:

- Proposed funding start date: The date when the requested grant funding period is intended to begin.
- Proposed funding end date: The date when the requested grant funding period is intended to end.
- Project abstract: A summary of the proposed project.
- Project title: The name or title of the proposed project.
- Detailed narrative: A comprehensive description of the project, outlining objectives, methods, and anticipated outcomes.
- Final score: The score assigned to the proposal following evaluation.
- Allocated budget: The budget amount allocated to the proposal, if approved.
- Rank: The ranking position of the proposal relative to others under consideration.
- Funding status: The status of the proposal's funding, which may include the following values: Undecided, Pending proposal, Propose award, Propose decline, Awarded, Declined, and Ineligible.

Case type tasks for administrators

You can configure a case type by creating a table for the new case type that extends the government service base case table. Then, you can set up a series of processes and components for that case type.

- To get an overview of this process, see the Government Service Case Types Guided Setup.
- For more details on how to configure case types using Guided Setup, see Configuring customer service case types .

An agent can then use this custom case type to create a case to resolve a constituent or business request. .

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case Types plugin

The Customer Service Case Types plugin (com.snc.csm_case_types) is activated when you enable the Public Sector Digital Services Core plugin (sn_gsm).

Activating this plugin adds the Case Types module to the application navigator. You can use this module to create and manage case types, as well as extend the Government Service base case type.

For more information on the plugins that are installed with the Public Sector Digital Services Core application, see Components and Roles installed with Public Sector Digital Services Core.

Case Types Guided Setup

Activating the Customer Service Case Types plugin adds the Case Types section to the Public Sector Digital Services Core Guided Setup.

Navigate to **All** > **Constituent Service** > **Administration** > **Guided Setup** and use the tasks in this section to create and configure a case type.

You can configure several different processes and components for a Government Service case type by using guided setup, including the roles, access control lists (ACLs), notifications, actions, and record producers.

To create and configure a case type, do the following tasks.

- Create a table for the new case type that extends the base Case table (sn_gsm_government_service_case).
- Configure the UI actions, UI policies, and client scripts for the new case type.
- Configure the views and view rules, roles and access controls (ACLs), business rules, and more for the new case type.
- Set up the processes for the case type, including the record producers, state flows, and special handling notes.
- Create a case type definition record for the new case type and add it to the Case Type table (sn_case_type).
- Configure the Get Case Types flow and modify the conditions that determine the visibility for a case type.

For more information on using Guided Setup for Public Sector Digital Services, see Configure Public Sector Digital Services Core foundational data using guided setup.

Government Service case type applications

The following table lists the applications available from the ServiceNow Store that use the Government Service case type and its extensions.

Government Service case type applications

Application	Description
Grants Management (sn_gsm_grnt_mgmt)	Provides an end-to-end workflow for handling applications for grants submitted by public sector end users.
Social Benefits Playbook	Provides an end-to-end workflow for handling applications for one or more social benefit

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service case type applications (continued)

Application	Description
(sn_gsm_soc_bnfts)	programs submitted by public sector end users.
License and Permit Playbook (sn_gsm_license_permit)	Playbook that provides step-by-step guidance through the life cycle of license or permit request case. This playbook uses the license and permit request case type to capture the details of a request for new license.
Information Request Playbook (sn_gsm_info_req)	Playbook that provides step-by-step guidance through the life cycle of an information request case. This playbook uses the information request case type to capture the details of a requests for various types of federal, state, and local public records that fall outside of nine exemptions.
Service Request Playbook (sn_gsm_srvc_req)	Playbook that provides step-by-step guidance through the life cycle of a service request case. This playbook uses the service request case type to capture the details of the requests for the various types of community maintenance. For more information, see Life cycle of a Public Service case. The Service Request case table [sn_gsm_service_request_case] is installed with Service Request Playbook.

Review the Service Request Playbook, Information Request Playbook, License and Permit Playbook, Social Benefits playbook, or Grants Management application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Public Service case stages

The government service case type moves through the stages that are listed in the following table.

Public service request case stages

Stage	Description
Intake	Default stage for a new case.
Review	Stage when the state is updated from Draft to Open because the case is assigned and has been accepted by the agent named in the **Assigned to** field.
Process	Stage when the state is updated from Open to Work In Progress.
Decision	Stage when the state is updated from Work In Progress to Resolved.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Service Case states

The government case type moves through the states that are listed in the following table. For more information, see Life cycle of a Public Service case.

Public service request case states

State	Description
Draft	Default state for a new case.
New	Case that moves from Draft to New when the user selects **Submit**.
Open	Case that moves from New to Open when it's assigned and has been accepted by the agent in the **Assigned to** field.
Work in Progress	Case that moves from Open to Work in Progress when the agent selects **Start Work**.
Awaiting Info	Case that moves from Work in Progress to Awaiting Info when the agent selects **Request Info**.
Resolved	Case that moves to the Resolved state when the agent selects **Propose Solution**.
Closed	Case that moves to the Closed state when the requester selects **Accept Solution** or **Close Case**.
Cancelled	Case that is moved to the Cancelled state. This can happen through automatic timeout, or if the requester selects **Cancel**.

Configuring Service Exchange for Public Sector Digital Services

Whether you're a government agency provider communicating with other agencies, or an agency provider connecting with their constituents, you can establish an integration between multiple types of instances with Service Exchange for Public Sector Digital Services.

Install Service Exchange for Public Sector Digital Services

If you have the admin role, you can install the Service Bridge for PSDS (sn_sb_psds) application, which enables you to use Service Exchange for Providers.

About this task

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Service Exchange for PSDS application (sn_sb_psds) by using the filter criteria and search bar.

   You can search for the application by its name or ID. If you can't find the application, you might have to request it from the ServiceNow Store.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

3. In the application installation dialog, review the application dependencies.

   This listing indicates, for each dependent plugin and application if it's being installed, is already installed, or must be installed. If any plugins or applications must be installed, you must install them before you can install Service Exchange for PSDS.

4. If demo data is available and you want to install it, click **Load demo data**.
   Demo data contains the sample records that describe the application features for common use cases. Load demo data when you first install the application on a development or test instance. If you don't load the demo data during installation, it's unavailable to load later.
5. Select **Install**.

Configure Service Exchange for Public Sector Digital Services

To set up and configure the Service Exchange for Public Sector Digital Services application, follow these steps.

Setting up Service Bridge for Providers

Task	Link
Install the Service Exchange for Public Sector Digital Services application.	See Install Service Exchange for Public Sector Digital Services.
Set up the Government Service Portal, the consumer-facing portal for Public Sector Digital Services.	See Customize the Government Service Portal.
Set up a new provider record.	1. Navigate to **User Administration** > **Companies**and select the company record. 2. Add a user or contact with the sn_sb_pro.consumer role. a. To add one or more users to a company on the provider instance, navigate to **User Administration** > **Companies**and select the company record. b. Under the Users related list, select **New**. c. On the form, fill in the fields with the user information, and select **Submit**. d. Once the user record is created, navigate to the Roles related list and select **Edit**. e. Select the roles you wish to add to the user using the arrows, and select **Save**. **Note:** A user or contact with the sn_sb_pro.consumer role must be associated with the company before the company can be associated with a provider record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Setting up Service Bridge for Providers (continued)

Task	Link
	3. Navigate to **All** > **Service Bridge Provider** > **Provider** 4. Enter a name for the provider, and enter the company associated with. **Note:** To create a new company record, select [magnifying glass] to open the Companies related list, and select **New**. On the form, fill in the fields. Select **Submit** to save and associate the Company record to the Provider record. See Set up a Service Exchange provider record. **Note:** If a new Company record has not yet been created, navigate to **User Administration** > **Companies** and select **New**. Enter the Company details, then select **Submit**.
Set up a Service Bridge connection between a Provider and a Consumer.	See Connect a provider instance to a consumer instance.
Assign Service Exchange roles for providers.	See User roles for providers.
Create catalog personas.	See Create catalog personas.
Create remote choice definitions.	See Create remote choice definitions in Service Exchange for Providers
Create remote catalog items.	See Create remote catalogs in Service Exchange for providers.
Create remote task definitions.	See Create a remote task definition in Service Exchange for Providers.
Create transforms.	See Create a transform in Service Exchange.
Update Authorized Users settings.	See Update settings for authorized users.

Install and Configure Service Exchange for Public Sector Digital Services

To set up and configure the Service Bridge for PSDS application, follow these steps.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Setting up Service Bridge for Providers

Task	Link
Install the Service Exchange for PSDS application.	See Install Service Exchange for Public Sector Digital Services.
Set up the Government Service Portal, the consumer-facing portal for Public Sector Digital Services.	See Customize the Government Service Portal.
Set up a new provider record.	See Set up a Service Exchange provider record. **Note:** If a new Company record has not yet been created, navigate to **User Administration** > **Companies** and select **New**. Enter the Company details, then select **Submit**.
Set up a Service Bridge connection between a Provider and a Consumer.	See Connect a provider instance to a consumer instance.
Assign Service Exchange roles for providers.	See User roles for providers.
Create catalog personas.	See Create catalog personas.
Create remote choice definitions.	See Create remote choice definitions in Service Exchange for Providers
Create remote catalog items.	See Create remote catalogs in Service Exchange for providers.
Create remote task definitions.	See Create a remote task definition in Service Exchange for Providers.
Create transforms.	See Create a transform in Service Exchange.
Update Authorized Users settings.	See Update settings for authorized users.

Create remote service catalog items in Service Exchange for Providers for Public Sector Digital Services

As a government agency provider, you can create remote catalogs to automate the task fulfillment process for constituents that are using the Government Service Portal. By using remote catalogs, agency providers can maintain the development of shared service catalogs on their instances and provide consumers with native catalog items in their instances remotely.

About this task

Remote record producers in Service Exchange for Providers are service request catalog items that are remotely published to consumer instances, and contain the variables that determine the information that a consumer can or must provide to submit a request. They enable your consumer to request provider services through their service catalog by auto-generating a Provider Task record on the provider's instance and triggering a Create Case, Create Incident, or Create Change Request fulfillment task when a request is submitted.

By using remote catalogs, agency providers can maintain the development of shared service catalogs on their instances, and provide constituents with native catalog items in their instances

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

remotely. The Remote Catalog is maintained on the Provider's instance and made available selectively through Authorized Users.

Before you begin

Role required: admin

Note:
Ensure that the catalog scope is set to Global.

Procedure

1. Log into the provider instance and navigate to **All** > **Service Bridge Provider** > **Administration** > **Remote Catalog Items**.
2. Select **New** to create a new catalog item.
3. On the form, fill in the fields.

Remote Record Producer New Record form

Field	Description
Name	Name of the remote record producer catalog item.
Application	This is a read only field and is set by default based on the application scope.
State	Shows the status of the remote record producer. When you create a remote record producer, this field is set to the **Draft** state. **Note:** This field is automatically updated when you Publish, Archive, or Retire a remote record producer.
Table name	Table name is Provider Task. This is a read only field.
Flow	Choose one of the default Service Exchange flows provided or create your own flow if required.
Active	This is a read only field and is enabled based on the Publish, Retire, Archive, or Delete actions.
Persona	Catalog personas that you want to assign to this record producer.
Compatibility	This field is populated by default. It shows the Service Exchange version that is being used by the provider. If the consumer is using a compatible Service Exchange version, data can be synced between the provider and consumer instances. But if the consumer is not using a compatible version, any new entitlements cannot be activated until the corresponding Service Exchange version is upgraded.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Short Description	Short description for the record producer.
Description	Detailed description for the record producer.

4. Select **Submit**.

Result
The remote catalog item is now created, and will create a provider task in the provider instance. For more information on how to configure remote provider task definitions, see Create remote task definitions in Service Exchange for Providers in Public Sector Digital Services.

For more information on record producers in Service Exchange, see Remote record producers in Service Exchange

Create remote task definitions in Service Exchange for Providers in Public Sector Digital Services

As a government agency provider, you can create remote task definitions that trigger the assignment of remote task(s) to your constituent. Remote tasks originate in the agency provider instance (where they auto-create an associated government case record), and are pushed to your constituent through the Government Service Portal, enabling both provider and consumer to keep case records and details in sync.

Before you begin
Role required: admin

Procedure
1. Navigate to **All** > **Service Bridge Provider** > **Administration** > **Remote Task Definitions**.
2. Click **New**.
3. On the form, fill in the fields.

Remote Task Definition form

Field	Description
Name	Name of the remote task definition record.
Application	This is a read only field and is set by default based on the application scope.
State	Shows the status of the remote task definition. When you create a remote task definition, this field is set to the **Draft** state. **Note:** This field is automatically updated when you Publish, Archive, or Retire a remote task definition.
Provider table	Any task table that you select from the list. For example, you can choose a case table or an incident table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Consumer table	Any task table that you select from the list. For example, you can choose a case table or an incident table.
Compatibility	This field is populated by default. It shows the Service Exchange version that is being used by the provider. If the consumer is using a compatible Service Exchange version, data can be synced between the provider and consumer instances. But if the consumer is not using a compatible version, any new remote task definitions cannot be activated until the corresponding Service Exchange version is upgraded.
Maintain SysID	If this field is checked, then the unique identifier, SysID, associated with the parent that created the remote task will be used and assigned to the parent task created for the remote task on the consumer instance.
Send attachments	If this is selected, if an attachment is added on the parent record, it is sent to the remote task.
Copy attachment to parent	If an attachment is included with a remote task, a copy is sent to the parent record.
Short description	Brief information about this remote task definition.
Description	More detailed information about this remote task definition.

4. Click **Submit**.
5. Open this new Remote task definition record.
6. On the **Inbound fields** related tab, click **New**.
7. On the form, fill in the fields.
   The inbound fields enable you to receive data from the consumer's instance when a remote task is created or updated.

> **Note:**
> If the inbound field values are updated, the updated information is shown in a work note on the parent record.

Inbound field form

Field	Description
Field label	Field label that appears on the remote task form.
Field name	Field name that is used in the remote task flow and script.
Max length	Maximum length of the source field name.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Sync when	Enables you to specify when a target field on the remote task's parent record is directly updated. You can select: ○ **Insert:** Updates the target field on the remote task's parent record only when the remote task is initially inserted. ○ **Insert or Update**: Updates the target field on the remote task's parent record every time the remote task is updated. ○ **Never**: The inbound field never updates a target field on the remote task's parent record directly. For example, you can use this field for state mapping where a flow is used to convert the incoming value before updating the target field. **Note:** Irrespective of the option you select here, whenever an inbound field is updated, the changes are reflected in a worknote on parent record.
Source Mapping tab	This tab is not displayed if you have selected the **Virtual** check box to define a virtual field mapping.
Source table (read-only)	The Consumer table that you selected while creating the remote task definition.
Source field	Field from the source table that is sent to another ServiceNow instance. Source fields allow for Dot-walking to data in related tables, which is useful when reference data is not available between ServiceNow instances. For example, you can create multiple inbound mappings for change incidents (CIs) to include the name, class, IP address, and asset tag.
Target Mapping tab	Displayed only in the following conditions: ○ Sync when: You select **Insert** or **Insert or update**. ○ Virtual: You select this check box to enable virtual field mapping.
Target table (read-only)	The Provider table that you selected while creating the remote task definition.
Target field	Field from the target table that is sent to another ServiceNow instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: If you are defining a virtual field mapping, the field you select in the target table is not present in the source table.
Active	This field is enabled by default.
Virtual	Select this check box to enable virtual inbound field mapping. A virtual field is a field that is present in the target table but does not exist in the source table. When a source table doesn't contain a field that exists on a target table, the field is configured as a virtual field. The values specified for the virtual field are passed from the source instance to the target instance. The consumer can create a remote task to sync data and update the value of the virtual field in the associated target task record. The target field can be updated either by using the Virtual Inbound option described in the Create a transform in Service Exchange or by using the *updateVirtualField* API.

8. Click **Submit**.
9. On the **Outbound fields** related tab, click **New**.
10. On the form, fill in the fields.
The outbound fields enable you to send data to the consumer's instance when a remote task is created or updated.

Outbound field form

Field	Description
Field label	Name of the field label that appears on the remote task form.
Field name	Field name that is used in the remote task flow and script.
Max length	Maximum length of the field name.
Sync when suggestion	Enables you (the provider) to suggest to the consumer when a target field on the remote task's parent record should be directly updated. The consumer can change this setting before activating the definition

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	○ **Insert:** Updates the target field on the remote task's parent record only when the remote task is initially inserted. ○ **Insert or Update**: Updates the target field on the remote task's parent record every time the remote task is updated. ○ **Never**: The inbound field never updates a target field on the remote task's parent record directly. For example, you can use this field for state mapping where a flow is used to convert the incoming value before updating the target field.
Source Mapping tab	This tab is not displayed if you have selected the **Virtual** check box to define a virtual field mapping.
Source table (read-only)	The Provider table that you selected while creating the remote task definition.
Source field	Field from the source table that is sent to another ServiceNow instance. Source fields allow for Dot-walking to data in related tables, which is useful when reference data is not available between ServiceNow instances. For example, you can create multiple inbound mappings for change incidents (CIs) to include the name, class, IP address, and asset tag.
Target Mapping tab	Displayed only in the following conditions: ○ Sync when: You select **Insert** or **Insert or update**. ○ Virtual: You select this check box to enable virtual field mapping.
Target table (read-only)	The Consumer table that you selected while creating the remote task definition.
Target field	Field from the target table that is sent to another ServiceNow instance. **Note:** If you are defining a virtual field mapping, the field you select in the target table is not present in the source table.
Active	This field is enabled by default.
Virtual	Select this check box to enable virtual inbound field mapping. A virtual field is a field that is present in the target table but does not exist in the source table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	When a source table doesn't contain a field that exists on a target table, the field is configured as a virtual field. The values specified for the virtual field are passed from the source instance to the target instance. The target field can be updated either by using the Virtual Outbound option described in the Create a transform in Service Exchange or by using the *updateVirtualField API*.

11. Click **Submit**.
12. On the **Consumer criteria** related tab, click **New**.
13. On the form, fill in the fields.
    Consumer criteria enable you to manage which consumers can use these remote task definitions.

    Consumer criteria form

Field	Description
Consumer condition	Customer company or account that you want this remote task definition to be entitled to.
Remote task definition	Name of this remote task definition record. This name is auto-filled.

    For more details on consumer criteria, see Creating entitlements in Service Exchange for Providers.
14. Click **Publish**.

    Remote task variables are automatically created when you publish a remote task definition. These variables are the data variables for the inbound fields displayed and can be accessed on the remote tasks.

Result

A remote task definition record is created on your instance. This record is also synchronized with your customer's instance and is now pending activation on your consumer's instance. If the **Auto activate remote task definition** field has been enabled by the consumer, the remote task definition is automatically activated on your consumer's instance.

Configuring Service Exchange for Consumers for Public Sector Digital Services

You can do the following configuration tasks to customize your Service Bridge for consumers instance, the Government Service Portal.

Related topics

Activate remote catalog item entitlements for Service Exchange Consumers

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Activate remote catalog item entitlements for Service Exchange Consumers

Create an entitlement for a remote catalog item/record producer so that the associated service will be displayed in the constituent(s) Government Service Portal catalog for use. You can entitle content explicitly to a single constituent, or to multiple constituents in designated groups.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Service Bridge Consumer** > **Provider Connections**.
2. Selecting the record number in the **Number** column to open the Provider connection record.
3. In the **Remote record producers** related table, select the remote record producer (RRP) you want to activate.
4. On the Remote record producer page, select **Activate** to activate the entitlement.
5. **Optional:** Select the Remote task definition tab and select a remote task definition that you want to activate.
   For information on how to utilize remote task definitions to create task assignments between constituent and agency provider instances, see Create remote task definitions in Service Exchange for Providers in Public Sector Digital Services.
6. In the Remote task definition page, select **Activate** to activate the entitlement.

Result
The remote record producer is now added to the configured catalog and is visible on the consumer instance, the Government Service Portal.

Set up a Service Exchange connection between a Provider and a Consumer

Establish an instance-to-instance integration between a provider and a consumer using Service Exchange for Public Sector Digital Services.

Before you begin
Role required: admin

A provider record must have been created. See Set up a Service Exchange provider record.

A business or account must exist for the consumer in the provider's instance, and a user or contact with the sn_sb_pro.consumer role must be associated with the company. A business or account must exist for the provider in the consumer's instance. If this is a production instance, the user must have a valid email address to receive the registration email.

Run the **Key Management** > **Health (Diagnostics)** to ensure that the Key Management Framework health check has passed. Your administrator must have the sn_kmf.admin and sn_kmf.cryptographic_manager roles to access the health diagnostics. If your administrator does not have access, follow the instructions in Assign Key Management Framework roles to grant the required roles.

About this task
Before proceeding, the provider should have requested the contact details of an admin to set as the main point of contact on their registration record. This designated contact person will receive an email either from the provider's instance or directly from the provider's admin, containing a registration link. Selecting on this link will generate a Provider Connection record in your consumer instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Service Bridge Provider** > **Consumer Registrations** and select **New**.
2. On the form, fill in the fields:
   - Select the Company associated with the consumer instance being registered.
   - Select the contact details associated with the Company you have selected.

     Note:
     This contact must be an admin user in the consumer instance, otherwise the registration process cannot be completed. On the provider instance, only a Service Bridge Consumer role is required.

   - Select the **Lock** icon on the URL field and enter the URL of the consumer ServiceNow instance.
3. Select **Save**.
   An email is generated and sent to the Consumer Contact specified during registration if email sending is enabled. If not, the admin must either copy the link from the work notes and manually send it to the consumer admin. The Consumer Contact must follow the steps listed in the Connect to a provider to complete the registration process on the consumer instance.
4. Select the **Connect to Provider** link sent in the provider's registration email or follow the link given to you directly by the provider's admin.
   This link will generate the Provider connection record.

   Note:
   The consumer admin completing the registration process must be the named contact on the provider's registration task or an admin in the provider's instance. Registration will fail during the OAUTH authentication step if attempted by another user.

5. Navigate to **All** > **Service Bridge Consumer** > **Provider Connections**.
6. On the Provider Connection form in the consumer instance, select the name of the Company that the provider is associated with and select **Save**.
   The Provider Connection record is displayed.
7. Select **Connect to Provider** in the Provider connection record page.
8. Select **Authenticate** when the Service Exchange registration message appears.
   The OAuth authentication page appears.
9. Select **Allow** and then select **Submit** to proceed with the registration.
   You are redirected to the Registration task where you can view the status. When registration is completed, a connection is established between the provider and the consumer instances, and the registration task State is set to **Closed Complete** on the provider's instance.

Service definitions for Public Sector Digital Services

Service definitions are records used to store the details about a service provided to end users. By using a service definition, you can connect a public service with a case type to extend the types of services that can be requested, and the types of cases that can be created to support those services.

You can also configure the support types for those services.

Overview of a service definition

In addition to case types, you can use a service definition to create a customized process for connecting a requester with the service needed to resolve their claim. A service definition

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

enables you to map a public service, information service, or license and permit service to the list of services your agency offers for resolving that request. When you create a service definition, you can configure the case management processes, such as the case types, for executing those services.

In addition to case types, you can also use service definitions to create a customized process. Service definitions are configurations that sit on top of a specific case type that provide a unique request and fulfillment process. Use service definitions when adding a new use case within a domain that already has a case type and is for an existing persona. In this case, service definitions allow for faster development of new use cases.

Service definitions enable you to do the following tasks:

- Configure the support types for services so that applicable services are displayed based on the service requested by the constituent or business.
- Create the case types that support the requested services.
- Automatically select a case type that is based on the service or information type that a constituent or business is requesting.

With a service definition, you establish connections between the public services that are requested and those that are offered. By associating the relevant public services that are offered for the services requested, you can use a service definition to simply the service requests that are based on the constituent's context.

Service definitions are available with the Customer Service Case Types plugin (com.snc.csm_case_types) that is automatically activated when you enable the Public Sector Digital Services Core plugin.

For more information on how to create a service definition, see Configure a service definition for Playbooks in Public Sector Digital Services.

Service definition tasks for administrators

The following main components are needed to create a service definition:

- Service definition record created for the new service.
- New view and view rule created for the new service on the case type table.
- New flow created for the new service which is triggered on the creation of the new record on the case type table. Flows are only needed for more complex use cases, such as ones with multiple tasks or sub-tasks.
- New record producer for requester to create via service catalog. Only use record producers if you want an end-user to create the request.

Service definitions

The following are the main components needed to create a service definition: For additional more information on Service definitions, see Service definitions for Public Sector Digital Services.

You can do the following tasks:

- Define the available services.
  - Define the details for each public service that is offered.
  - Associate a playbook with a service.
  - Associate a service catalog item with a service definition so that constituents or businesses can request this service directly.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Associate the relevant public services that are offered with each request.
- Associate different services with different case types (This task automates the case type selection for the agents by the service that they select).

Associate an agency location to a Public Service definition

Associate your government service agency locations with a service definition using the Public Sector Digital Services (PSDS) application. With this association, your government service agency staff can address constituent requests for documents, records, or services that are offered at a particular agency location, and can raise a case on behalf of a constituent or business.

Before you begin
Role required: admin

About this task
An agency location can have multiple public services associated with it. This can include 311 service or maintenance requests, federal or state public records requests, or requests for license and permit services. For example, a specific agency location can offer an application for food stamps or medical assistance, but not an application for a CDL license or a commercial fishing license. A public service-to-agency-location criteria association can be added to each existing service definition in the Service Organizations offering Service [service_organizations_offering_service] table.

Procedure
1. Navigate to **All** > **Customer Service** > **Administration** > **Service Definition**.
2. Select a service definition by selecting the number.
3. In the Service Organizations offering Service related list, select **New**.
4. On the form, fill in the fields.

Agency Locations offering Public Service form

Field	Data type	Description
Service Organizations/ Agency Location criteria	Reference	Criteria to define the agency locations that provide the service.
Service definition	Reference	Service that this specific agency location provides. **Note:** The **Service definition** field is automatically filled in with the name of the selected service definition.
Active	True/False	Check box to activate or deactivate the agency location criteria.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Data type	Description
		By default, the active field is set to **True**. **Note:** Only one active criterion is enabled per table to be associated to a service definition.

5. Select **Submit**.
   The agency locations criteria are added to the Agency Locations offering Public Service related list.

Set up the CSM Configurable Workspace for Public Sector Digital Services

Modify the CSM Configurable Workspace to show the lists, modules, and form fields for Public Sector Digital Services.

Playbooks depend on having a workspace set up for your fulfillers (i.e., agents and managers) to utilize. For Public Sector Digital Services, the modification of the CSM Configurable Workspace is required to make fields, forms, etc. relevant to PSDS.

Public Sector Digital Services provides the following workspaces:

- CSM Configurable Workspace
- CSM Agent Workspace

These workspaces can be modified as required through the UI Builder. Certain features in the CSM Configurable Workspace require configuration for use with Public Sector Digital Services:

- List Menu
- Public Sector landing page
- Customer Central

Certain features, such as auto-reflow, which restructures Configurable Workspace pages vertically when you zoom in, are available on the page-level automatically. However, administrators can disable auto-reflow for selected experiences, pages, or for the entire Configurable Workspace. For information on how to disable this feature, see .

Note:
You can use guided setup to configure these configurable workspace features. For details, see Configure Public Sector Digital Services Core using guided setup.

Configure the List Menu for Public Sector Digital Services

Add public sector-related menu options to the List Menu in the CSM Configurable Workspace.


Before you begin
Role required: admin

About this task
To configure the List Menu, you can follow this procedure or use guided setup for the Public Sector Digital Services Core application.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure


1. Navigate to **All** > **System Definition** > **Tables**.
2. In the Tables [sys_db_object] table, select the **Search** icon next to the **Label** column and under the column heading, enter UX `List Menu Configuration`.

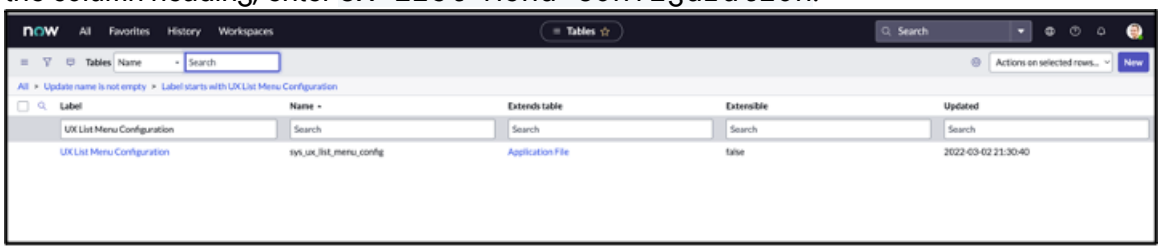

3. In the UX List Menu Configuration List table, go to **Related Links** and select **Show List.**

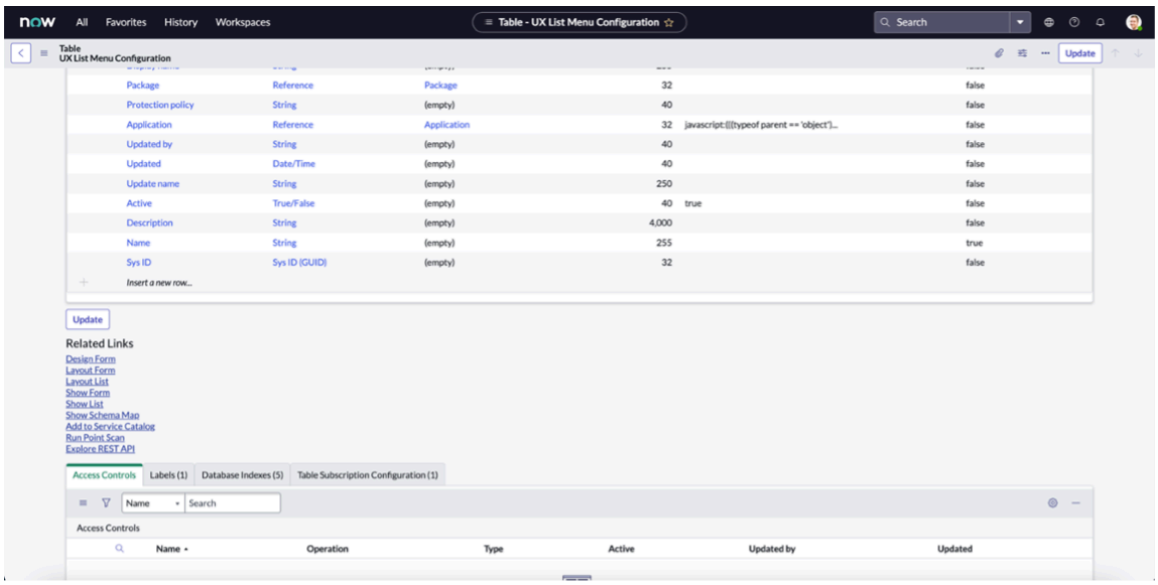

4. **Optional:** From the Context menu, select **Create Favorite** to bookmark the UX List Menu Configurations table so that you can quickly access it if you must make changes later.

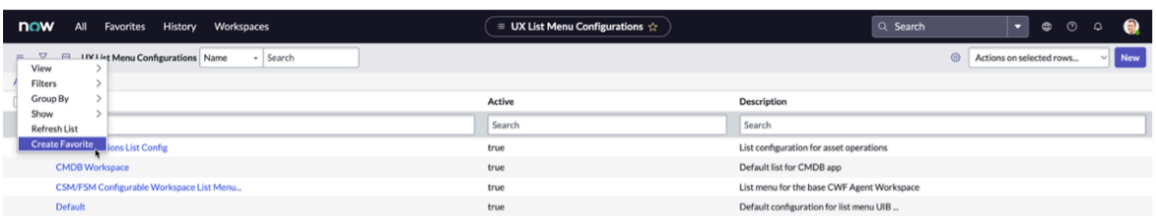


(Optional)

5. Remove the categories that are not applicable to Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Select the **CSM/FSM Configurable Workspace List Menu** record and go to the **UX List Categories** tab.

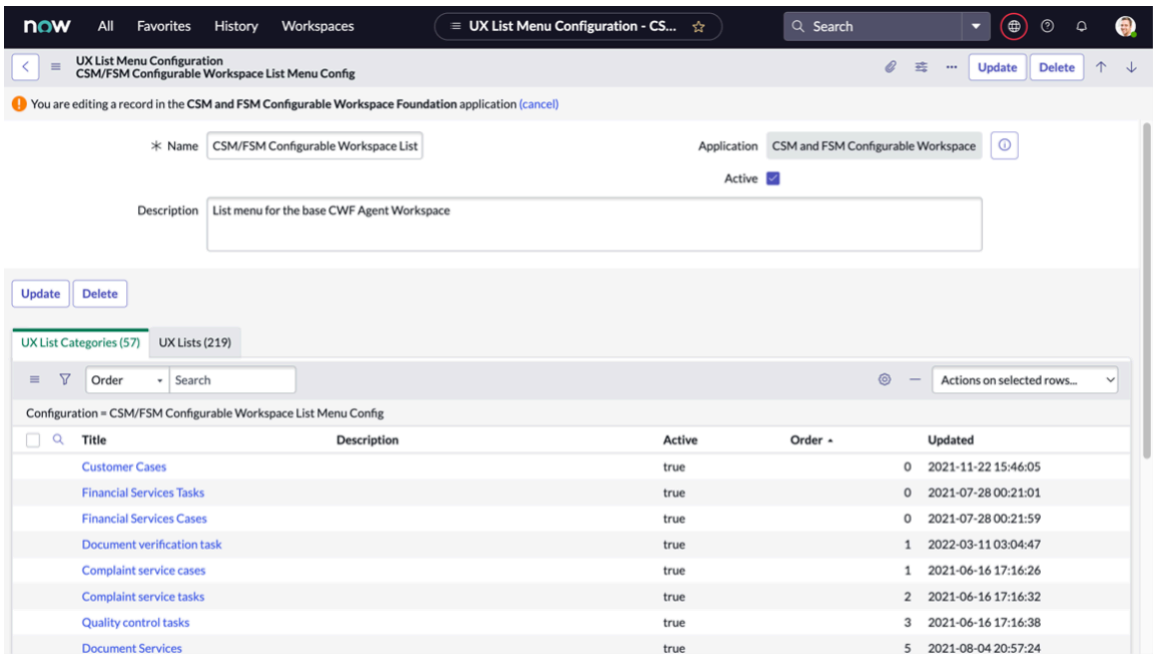

b. For each of the following categories, select the category record and change the Active value to false:

Note:
If the following message is displayed, select **here** to edit the page.



- Cases
- Major Issue Management
- Tasks
- Service Level Agreements (SLAs)
- Incidents
- Problems
- Change
- Requests
- Catalog Tasks
- CMDB
- Conversation Monitoring

What to do next

Configure the Public Sector landing page using UI Builder.

Configure the Public Sector landing page with UI Builder


Use the UI Builder to change certain fields in the Public Sector landing page of the CSM Configurable Workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Before you begin
Role required: admin

About this task
The Customer Service Management (CSM) landing page gives agents an overview of their new, assigned, and high-priority cases, plus the cases assigned to their groups. Replace certain fields in the landing page with fields relevant to Public Sector Digital Services. You can also add or change other fields as needed. For more information on using UI Builder to modify pages, see Work with pages.

Procedure
1. Navigate to **All** and in the filter, enter **UI Builder**.
2. Select **UI Builder**.
3. Navigate to the Customer Service Management (CSM) landing page:
   a. In the list of **My experiences**, select the **CSM/FSM Configurable Workspace**.
   b. In **UI Builder**, navigate to **Page** > **Landing Page** and select **CSM Landing Page**.

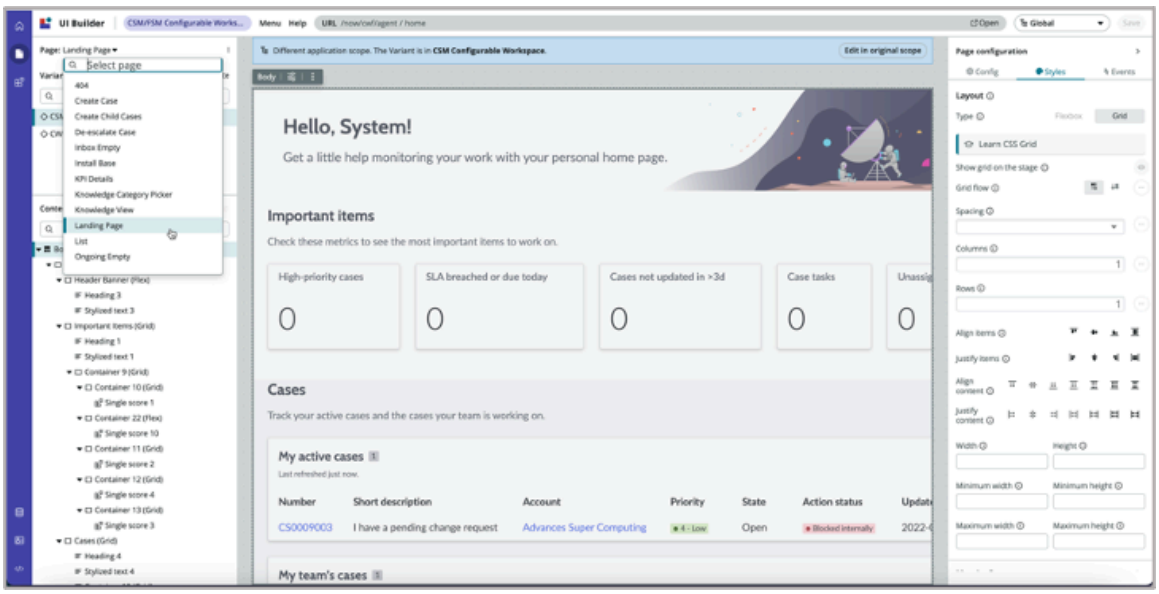


   c. In the message displayed at the top of the page, select **Edit in original scope**.

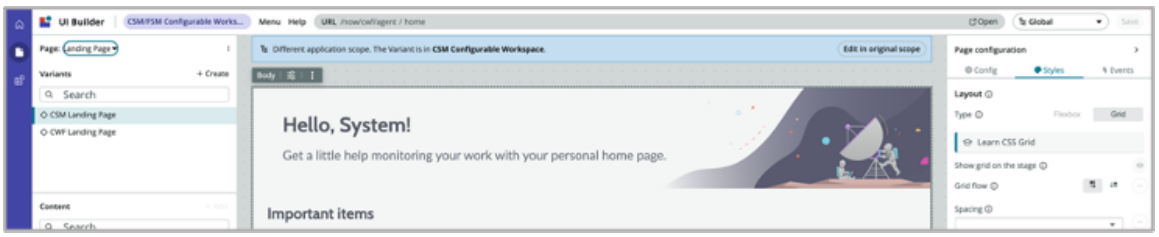


4. In the Customer Service Management (CSM) landing page, select the **My active cases** component and in the **Config** tab of the Configuration pane, delete the **account** field from the **Columns**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

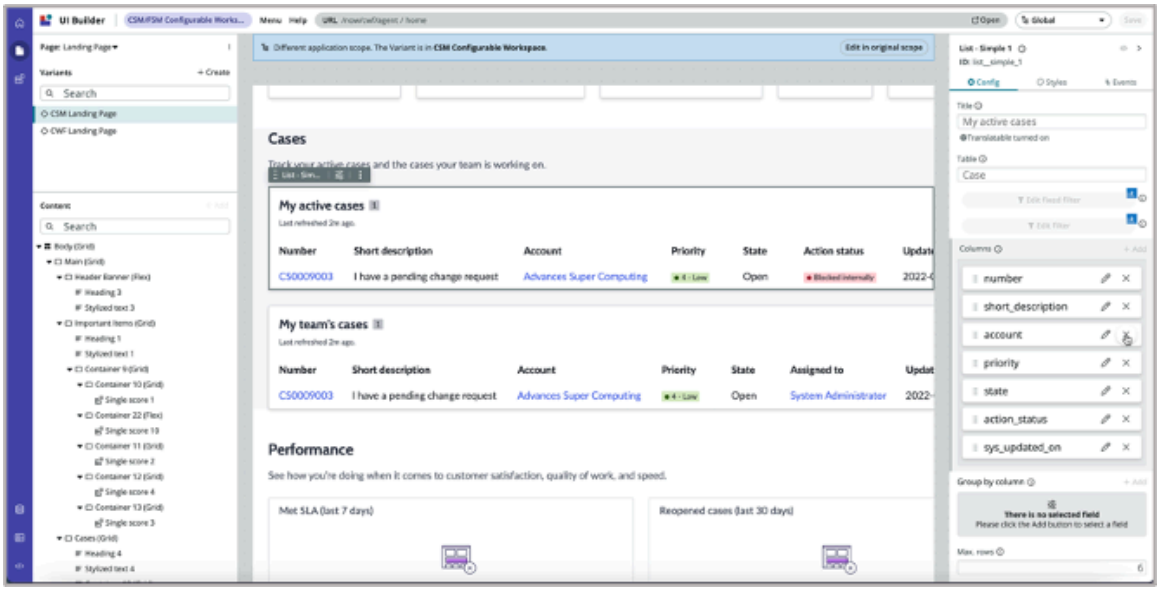


5. Add the **Constituent** field:

a. In the Configuration pane, select **+Add** in the **Columns** list to open the field chooser.

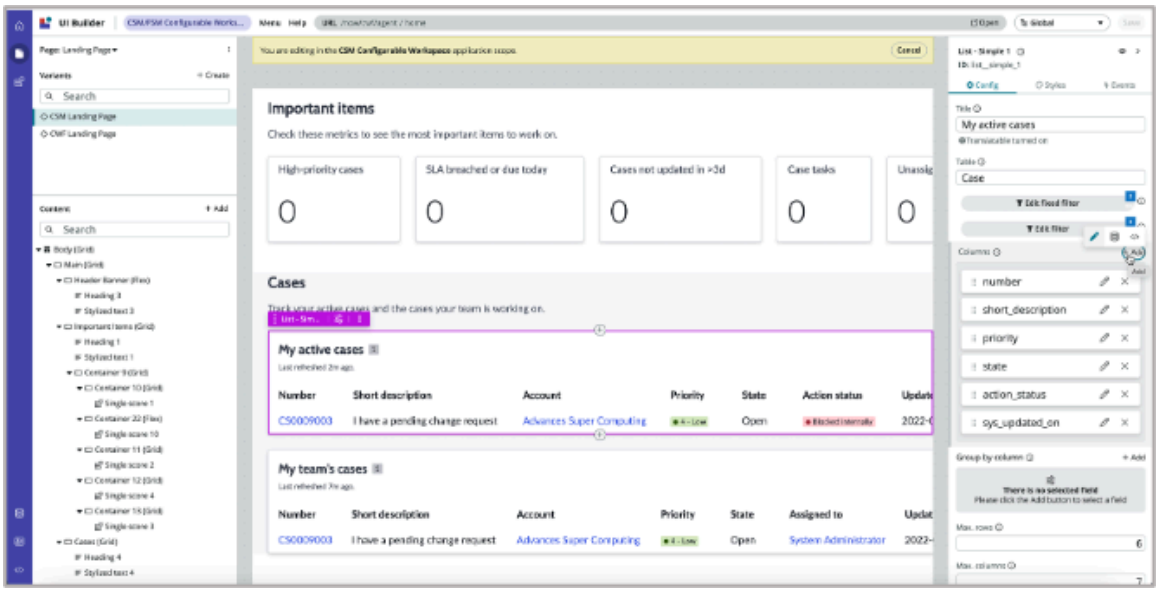


b. In the Choose a field list, select **Consumer** > **Constituent**, then select **OK**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

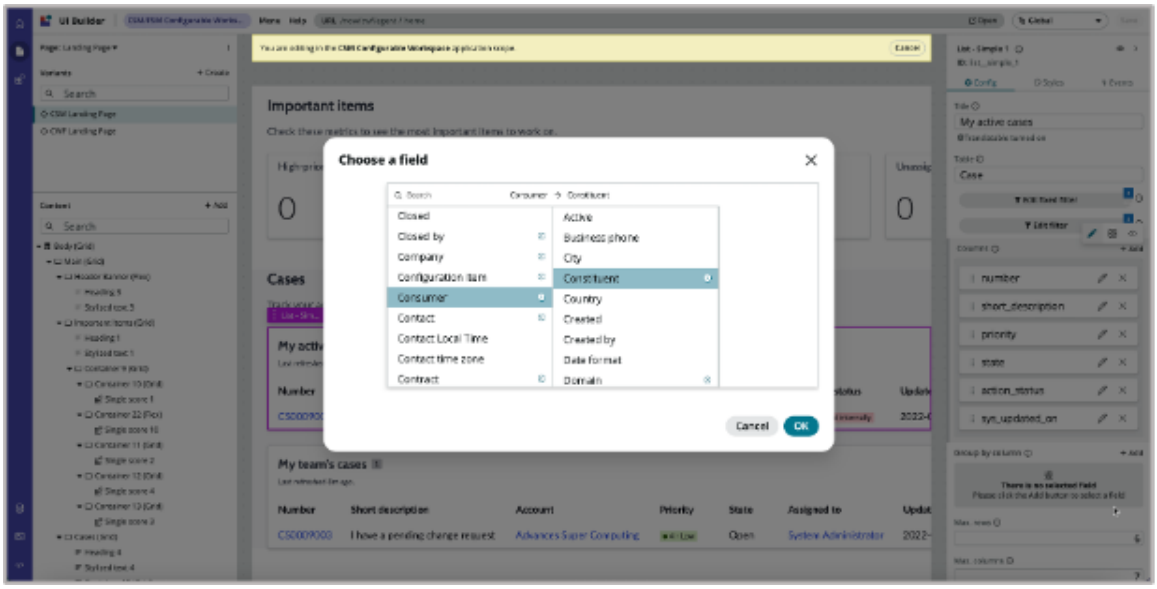

c. In the Configuration pane, rearrange the columns by moving **consumer.constituent** below **short.description**.

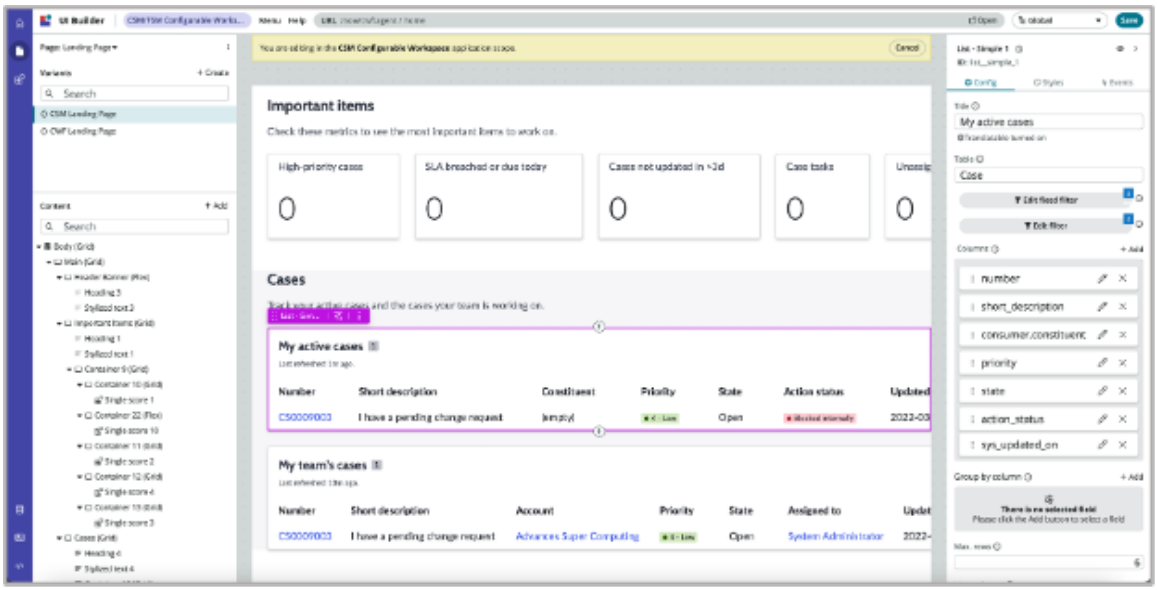

6. Repeat Steps 3 and 4 to change the **My Team's cases** component.
7. Make other page changes as needed.
8. Select **Save** to save the landing page changes.

Activate Customer Central for viewing profile information

Install Customer Central using Customer Service Guided Setup so that agents can have a complete view of constituent, business, or agency information in Public Sector Digital Services.

Before you begin

Role required: admin

About this task

Customer Central displays all the touchpoints that a constituent, business, or agency has with a government center or agency, in the form of information cards. For more information

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

on Customer Central and how it functions with CSM Configurable Workspace, see Customer Central.

Procedure

1. Navigate to **All** > **Customer Service** > **Administration** > **Guided Setup**.
2. In the section **Customer Central - Customer Information for CSM Configurable Workspace**, locate the list of tasks for setting up the configurable workspace.
3. Select **Activate Customer Central** to install the plugin.

   After installation, one of the following tabs is available on the interaction record:

   - The **Constituent Information** tab when the **Constituent** tab is populated.
   - The **Business Information** tab when the **Business** tab is populated.
   - The **Agency Information** tab when the **Agency** tab is populated.

   You can perform other changes to this layout, as needed. For more information, see Configure the Customer Information view using the CSM Configurable Workspace.

Relabel CSM Configurable Workspace items after upgrade

After you upgrade your instance for the first time, you can relabel certain items in the CSM Configurable Workspace for public sector use.

Before you begin
Role required: admin

About this task
Certain menus and menu items in the CSM Configurable Workspace are relabeled for public sector use. However, after upgrading your instance, those items revert to the original labels used for Customer Service Management (CSM). You can relabel the following items for public sector use by changing them in the UX List Categories for Customer and Service Organizations.

Label changes in CSM Configurable Workspace for public sector

CSM label	Change to public sector label
Accounts	Businesses
Consumers	Constituents
Internal Business Location	Internal Agency
External Business Locations	External Agency
Service Organization External Staff	External Staff

Procedure

1. Navigate to **All** > **System Definition** > **Tables**.
2. In the Tables context menu, select **Label** and in the **Search** box enter `*UX list` to search for lists, then select the UX List Category record.
3. In the UX List Category record, scroll down to the Related Links section and select **Show List**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. In UX List Categories, select the **Customer** record.

b. In the UX List Category for Customer form, go to the UX Lists section and select the **Consumers** record.

c. In the **Title** field of the UX List Category for Consumers form, change `Consumers` to `Constituents` and select **Update**.

4. In UX List Categories, select the **Accounts** record.

a. In the **Title** field of the UX List Accounts form, change `Accounts` to `Businesses`.

b. Select **Update**.

5. In UX List Categories, select the **Service Organizations** record.

a. In the **Title** field of the UX List Service Organizations form, change `Service Organizations` to `Agency`.

b. Select **Update**.

6. In the UX List Category Agency form, go to the UX Lists section and do the following:

a. Select the **Internal Business Location** record.

b. In the **Title** field of the UX List Internal Business Location form, change `Internal Business Location` to `Internal Agency`.

c. Select **Update**.

d. Return to the UX Lists section, and repeat steps a through c for the **External Business Location** record.
In the **Title** field, change `External Business Location` to `External Agency`.

e. Return to the UX Lists section and repeat steps a through c for the **Service Organization External Staff** record.
In the **Title** field, change `Service Organization External Staff` to `External Staff`.

Relabel Business Location Services portal (BLSP) items after upgrade

Using Guided Setup, you can optionally modify the "Business Location Details" page in the Business Location Services Portal to be relabeled "Agency Location Details" using Public Sector Digital Services terms during configuration.

Before you begin
Role required: admin


About this task
This script will relabel the "Business Location Details" page within the Business Location Services Portal to "Agency Details". References to "Business Locations" will be changed to "Agencies." The "Install Base" section of the page will be changed to "Items Received." The "Products" section will be removed; there is no equivalent use case of this in Public Sector Digital Services.

Procedure

1. Navigate to **All** > **Constituent Service** > **Administration** > **Guided Setup**.
2. Select **Get Started** to begin configuration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Guided Setup Page

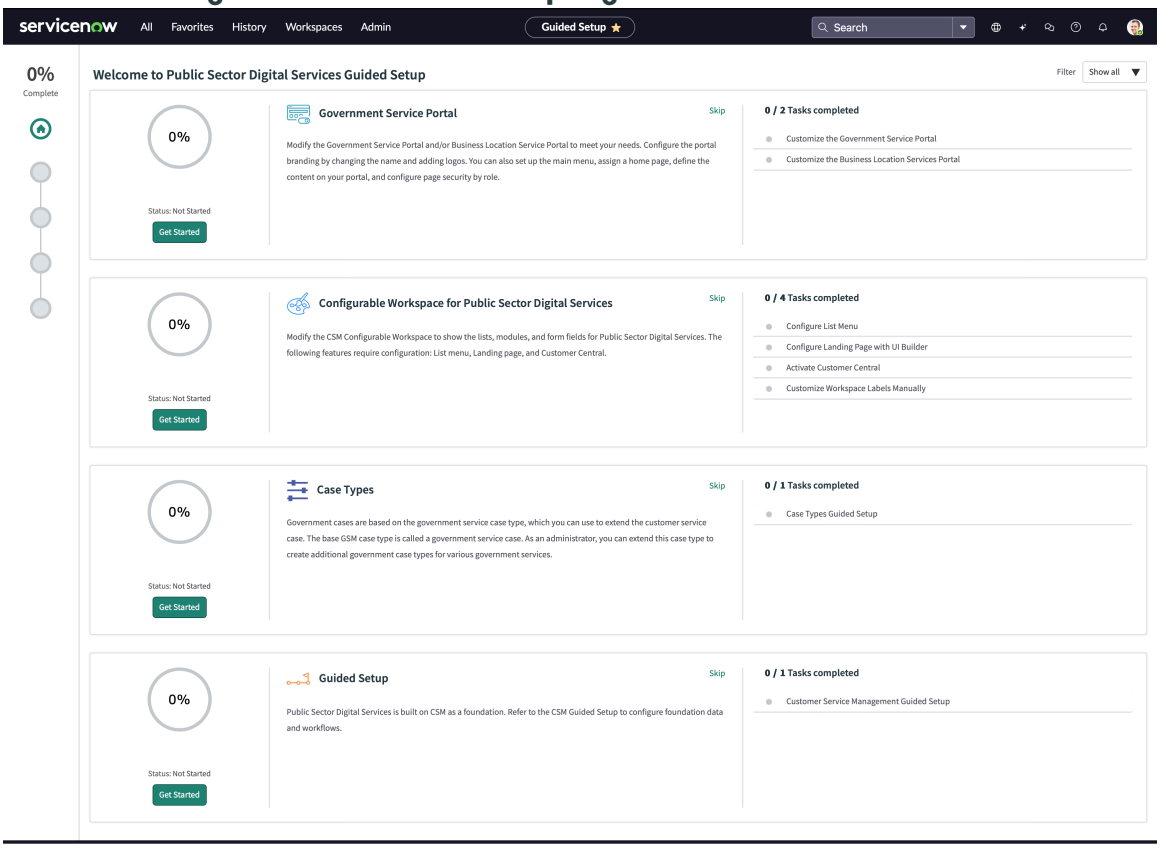

The setup page displays the different categories of configuration tasks to be completed.

3. Select **Get Started** under the Government Service Portal category.
4. Select **Customize the Business Location Services Portal**.
5. Follow the steps to complete the Guided Setup task.

Case Routing in Public Sector Digital Services

Set up Advanced Work Assignment (AWA) to automatically route cases to the appropriate government service agents in CSM Configurable Workspace.

Configure Advanced Work Assignment for Public Sector Digital Services

Use the Advanced Work Assignment (AWA) for Public Sector Digital Services feature to automatically assign work items to agents based on their availability, capacity, and skills. AWA for Public Sector Digital Services pushes work to qualified agents using work item queues, routing conditions, and assignment criteria that you define. Agents see their assignments in their Agent Workspace inbox.

Plugins

The Advanced Work Assignment for Public Sector Digital Services feature is available with the Customer Service plugin (com.sn_customerservice).

To use the chat feature with AWA for Public Sector Digital Services, you must also activate the Agent Chat plugin (com.glide.interaction.awa).

For more information, see Activate related plugins for Advanced Work Assignment.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Inbox layouts

Three chat inbox layouts are included with the Chat service channel.

Chat Layouts and fields on the Chat Service channel

Chat Layout	Included Fields
Default Chat Layout	Short description
Business Contact Chat Layout	Short description, Business, Business Contact, and Case Type
Constituent Chat Layout	Short description, Constituent, Case Type

Two case inbox layouts are included with the Case service channel.

Case Layouts and fields on the Case service channel

Case Layout	Included Fields
Default Case Layout	Short description, Business Contact, Account, Priority, Category
Consumer Case Layout	Short description, Constituent, Case Type

Variable work item sizing

Organizations may like to size cases based on the complexity of the case, time and effort required to complete work. This helps in estimating agent utilization accurately. Advance work assignment currently treats every case as one unit of work. However, sometimes, certain cases may require more work than others. These cases may account for a greater share of an agent's capacity. Work item sizing allows to size the case differently based on the case attributes. For more information, see Service channel capacity and utilization.

Agent affinity

Agent Affinity is an Advanced Work Assignment enhancement that enables you to streamline the routing of work items. Advanced Work Assignment automatically assigns work items based on historical, task-based, or account team affinity. For more information about agent affinity, see Using Agent Affinity.

Related topics

Advanced Work Assignment

Automatically route social benefit requests using Advanced Work Assignment

Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign social benefits requests to designated agents.

The Social Benefits Playbook application provides the following items that are used in AWA to automatically route and assign social benefits requests:

- **Social Benefits Request service channel** - The default service channel for routing incoming public sector social benefits requests to specific government agents. This service channel includes related attributes that define the default conditions for determining the items handled in the channel, work queue associated with agent assignment groups, agent inbox layouts, and more.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **Public Sector Social Benefits Request assignment group** - The default assignment group that identifies the agents handling public sector social benefits requests. Agent assignments are based on agent availability, capacity, and skills.
- **Public Sector Social Benefits Requests queue** - The default queue to which public sector social benefits requests are routed.
- **Inbox layouts** - The default card layouts for social benefits request items displayed in the agent inbox view of CSM Configurable Workspace:
  - Constituent Social Benefits Layout: Includes **Short description**, **Constituent**, and **Case Type** fields.
  - Business Social Benefits Layout: Includes **Short description**, **Business**, **Business Contact**, and **Case Type** fields.

As an admin, you can enable and disable Advanced Work Assignment for Social Benefits Request cases, as well as change the default attributes for the Social Benefits Requests service channel, such as the related assignment group and queue settings. For details, see Configure Social Benefit Requests service channel.

Configure Social Benefit Requests service channel

Change the default Social Benefit Requests service channel attributes in Advanced Work Assignment to control how public sector social benefit requests are routed and assigned to government agents.

Before you begin

- Activate the Advanced Work Assignment plugin (com.glide.awa).
- Activate the Agent Chat plugin (com.glide.interaction.awa).
- Install the Social Benefits Playbook application.

Role required: admin, awa_admin

About this task

You can modify the context and attributes for service channels in AWA. For the Social Benefit Requests service channel, use the Public Sector Requests assignment group to specify the agents handling social benefit requests. You can also add advanced conditions to filter the routing conditions in the Social Benefit Request service channel, or change queue settings, such as assignment rules.

Procedure

Configure the Social Benefit Requests service channel by modifying the default attributes as needed.

Automatically route license and permit requests using Advanced Work Assignment

Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign license/permit requests to designated agents.

The License and Permit Playbook application provides the following items that are used in AWA to automatically route and assign license/permit requests:

- **License and Permit Request service channel** - The default service channel for routing incoming public sector license/permit requests to specific government agents. This service channel includes related attributes that define the default conditions for determining the items

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

handled in the channel, work queue associated with agent assignment groups, agent inbox layouts, and more.

- **Public Sector License and Permit Request assignment group** - The default assignment group that identifies the agents handling public sector license/permit requests. Agent assignments are based on agent availability, capacity, and skills.
- **Public Sector License and Permit Requests queue** - The default queue to which public sector license/permit requests are routed.
- **Inbox layouts** - The default card layouts for license/permit request items displayed in the agent inbox view of CSM Configurable Workspace:
  - Constituent License/Permit Layout: Includes **Short description**, **Constituent**, and **Case Type** fields.
  - Business License/Permit Layout: Includes **Short description**, **Business**, **Business Contact**, and **Case Type** fields.

As an admin, you can enable and disable Advanced Work Assignment for License/Permit Request cases, as well as change the default attributes for the License/Permit Requests service channel, such as the related assignment group and queue settings. For details, see Configure License and Permits Requests service channel.

Configure License and Permits Requests service channel

Change the default License and Permit Requests service channel attributes in Advanced Work Assignment to control how public sector license and permit requests are routed and assigned to government agents.

Before you begin

- Activate the Advanced Work Assignment plugin (com.glide.awa).
- Activate the Agent Chat plugin (com.glide.interaction.awa).
- Install the License and Permit Request Playbook application.

Role required: awa_admin, admin

About this task

You can modify the context and attributes for service channels in AWA. For the License and Permit Requests service channel, use the Public Sector Requests assignment group to specify the agents handling license and permit requests. You can also add advanced conditions to filter the routing conditions in the License and Permit Request service channel, or change queue settings, such as assignment rules.

Procedure

Configure the License and Permits Requests service channel by modifying the default attributes as needed.

Automatically route information requests using Advanced Work Assignment

Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign information requests, such as public records requests, to designated agents.

The Information Request Playbook application provides the following items that are used in AWA to automatically route and assign public sector information requests:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **Information Request service channel** - The default service channel for routing incoming public sector information requests to specific government agents. This service channel includes related attributes that define the default conditions for determining the items handled in the channel, work queue associated with agent assignment groups, agent inbox layouts, and more.
- **Public Sector Information Request assignment group** - The default assignment group that identifies the agents handling public sector information requests. Agent assignments are based on agent availability, capacity, and skills.
- **Public Sector Information Requests queue** - The default queue to which public sector information requests are routed.
- **Inbox layouts** - The default card layouts for information request items displayed in the agent inbox view of CSM Configurable Workspace:
  - Constituent Information Request layout: Includes **Short description**, **Constituent**, and **Service** fields.
  - Business Information Request layout: Includes **Short description**, **Business**, **Business Contact**, and **Service** fields.
  - Generic Information Request layout: Includes **Short description** and **Service** fields.

As an admin, you can enable and disable Advanced Work Assignment for Information Request cases, as well as change the default attributes for the Information Requests service channel, such as the related assignment group and queue settings. For details, see Configure Information Requests service channel.

Configure Information Requests service channel

Change the default Information Requests service channel attributes in Advanced Work Assignment to control how public sector information requests are routed and assigned to government agents.

Before you begin

- Activate the Advanced Work Assignment plugin (com.glide.awa).
- Activate the Agent Chat plugin (com.glide.interaction.awa).
- Install the Information Request Playbook application.

Role required: sn_gsm_info_req.admin, awa_admin, admin

About this task

You can modify the context and attributes for service channels in AWA. For the Information Requests service channel, use the Public Sector Requests assignment group to specify the agents handling information requests. You can also add advanced conditions to filter the routing conditions in the Information Request service channel, or change queue settings, such as assignment rules.

Procedure

Configure the Information Requests service channel by modifying the default attributes as needed.

Automatically route service requests using Advanced Work Assignment

Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign public sector service requests, such as non-emergency requests, to designated agents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The Service Request Playbook application provides the following items that are used in AWA to automatically route and assign public sector service requests:

- **Service Requests service channel** - The default service channel for routing incoming public sector service requests to specific government agents. This service channel includes related attributes that define the default conditions for determining the items handled in the channel, work queue associated with agent assignment groups, agent inbox layouts, and more.
- **Public Sector Requests assignment group** - The default assignment group that identifies the agents handling public sector service requests. Agent assignments are based on agent availability, capacity, and skills.
- **Public Service Requests queue** - The default queue to which public sector service requests are routed.
- **Inbox layouts** - The default card layouts for service request items displayed in the agent inbox view of CSM Configurable Workspace:
  - Constituent Service Request layout: Includes **Short description**, **Constituent**, and **Service** fields.
  - Business Service Request layout: Includes **Short description**, **Business**, **Business Contact**, and **Service** fields.
  - Generate Service Request Layout: Displayed when anonymous users submit service requests. Includes **Short description** and **Service** fields

As an admin, you can enable and disable Advanced Work Assignment for Service Request cases, as well as change the default attributes for the Service Requests service channel, such as the related assignment group and queue settings. For details, see Configure Service Requests service channel.

Configure Service Requests service channel

Change the default Service Requests service channel attributes in Advanced Work Assignment to control how public sector service requests are routed and assigned to government agents.

Before you begin

- Activate the Advanced Work Assignment plugin (com.glide.awa).
- Activate the Agent Chat plugin (com.glide.interaction.awa).
- Install the Service Request Playbook application.

Role required: awa_admin or admin

About this task

You can modify the context and attributes for service channels in AWA. For the Service Requests service channel, use the Public Sector Requests assignment group to specify the agents handling service requests. You can also add advanced conditions to filter the routing conditions in the Service Request service channel, or change queue settings, such as assignment rules.

Procedure

Configure the Service Requests service channel by modifying the default attributes as needed.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Install and configure playbooks and solutions in Public Sector Digital Services

Install one or more applications available for use with Public Sector Digital Services. You can then configure the features available for submitting requests and routing requests to agents and other entities.

The following applications are available with Public Sector Digital Services that enable you to create and use playbooks and other solutions as an end-to-end workflow for handling constituent applications and requests. For more information on installing and configuring each application, see the corresponding pages below.

Solutions

Grants Management  Handle applications for grants submitted by public sector users.	

Playbooks

Social Benefits Playbook  Handle applications for social benefit programs.	**License and Permit Playbook**  Handle license and permit requests.	**Information Request Playbook**  Handle public record and information requests.
	Service Request Playbook  Handle non-emergency service requests.	

Configuring Grants Management

Install the Grants Management application, which enables users to submit and track grants management requests and provides government agents with a predefined process for handling

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

and resolving these requests. You can then configure the features available for submitting requests and routing requests to agents.

As a user with the admin role, complete the following configuration tasks to set up Grants Management, after you install the Public Sector Digital Services Core application.

Configuration tasks for Grants Management

Task	Description
Install Grants Management for Public Sector Digital Services	Install Grants Management from the ServiceNow® Store.
Configure Restricted Caller Access (RCA) for Document Templates	Allow secure, controlled access for generating results letters.
Assign user personas, roles, groups, and responsibilities in Grants Management	Assign roles to members of your grants organization Grants Management application so that your users can have delegated access to Grants Management features, capabilities, and data.
Configure PaCE Eligibility Framework Engine for use with Grants Management	Configure the eligibility framework engine, powered by PaCE, to allow agents to confirm whether an applicant is eligible for the specific grant being requested.
Configure the Reviewer Service Portal	Configure the Grants Management Reviewer Service Portal for merit reviewers to track, score, and review grants proposals.
Set up a grant program in Grants Management	Set up and configure the details of a new grant program using Grants Management.
Create a test grant program and grant proposal	Verify the newly-configured grant program setup and grant proposal playbooks are working as expected by creating a new grant program and test grant proposal using the Grants Management.

Key capabilities that support the Grants Management Workflows

The main ServiceNow capabilities that are leveraged to support the Grants Management workflows are:

- Document Management/Processor: Manage internal docs with version control, security, & workflow integration. Request and verify docs from applicants.
- Playbooks: Provide a visual, step-by-step guide for applicants and agents to complete key processes.
- Policy as Code Engine (PaCE): Streamline the creation, maintenance, and use of screening criteria with a low-code rules engine.
- Configurable Portal Widgets: Use pre-built UI components for easy portal set up and modification.
- Smart Assessment: Improve the creation and maintenance of application questions.
- Decision Trees: Provide a structured, step-by-step approach for pre-screening potential applicants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Install Grants Management for Public Sector Digital Services

You can install the Grants Management application (com.sn.gsm_grants) if you have the admin role.The application includes demo data and installs related ServiceNow® Store applications and plug-ins if they aren't already installed.

Before you begin

- Confirm that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Certain features in the Grants Management application are available based on your ServiceNow entitlements and may require installation of other ServiceNow applications and activation of specific plug-ins.

  Note:
  Install the Playbooks for Customer Service Management application to enable the playbook experience.

- Review the Grants Management Playbook application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Grants Management application (sn_gsm_grnt_mgmt) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   In the list next to the **Install** button, the versions available to you are displayed.
3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.
4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are the sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
6. Select **Install**.

Configure Grants Management

Configure the foundational details of Grants Management.

Configure Restricted Caller Access (RCA) for Document Templates

Allow secure, controlled access for generating results letters.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Role required: admin

Note:

Set the application scope to **Document Templates** by selecting the application picker () in the Unified Navigation bar, then **Application Scope** > **Document Templates**. The default scope is Global.

Procedure

1. Navigate to **All** > **System Applications** > **Application Restricted Caller Access**.
2. Select **New**.
3. On the form, fill in the fields with the following information.

Document Template Restricted Caller Access Privilege form

Field	Entry
Source Scope	Grants Management Playbook
Source Type	Script Include
Source	GrantManagementUtilImpl
Status	Allowed
Target Scope	Document Templates
Target Type	Table
Target	Table: HTML Template
Operation	Read

4. Select **Submit**.
5. Select **New**.
6. On the form, fill in the fields with the following information.

Document Template Restricted Caller Access Privilege form

Field	Entry
Source Scope	Grants Management Playbook
Source Type	Script Include
Source	GrantManagementUtilImpl
Status	Allowed
Target Scope	Document Templates
Target Type	Script Include
Target	Script Include: HtmlTemplateUtils
Operation	Execute API

7. Select **Submit**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Result
RCA access for Document Templates has now been configured.

What to do next
You can now set up the grant program.

Assign user personas, roles, groups, and responsibilities in Grants Management

By default, Grants Management comes with roles, personas, and responsibilities that can be assigned to existing users on the platform.

Assigning user roles

Assign roles to members of your grants organization Grants Management application so that your users can have delegated access to Grants Management features, capabilities, and data.

There are a few guidelines when assigning roles to users:

- Determine the roles who would be working on the grant cases for the agency, and what user would do what. For more information on the roles available in Grants Management and to determine which makes sense for each user, see Grants Management roles and Grants Management Personas
- Create as many users as needed in your organization.

Role required: admin

To assign roles to a user within an organization:

1. Make sure a user record has been created within the organization. Navigate to **All** > **User Administration** > **Users** to create a user record, or open an existing user record.
2. In the **Roles** related list, select **Edit**.
3. In the **Collection** list, select the desired roles, and then select **Add**
4. Select **Save**.
5. Repeat as many times as needed until all desired users are added to and associated with the organization and have the desired role.

You can also create user groups and assign roles to them. Users assigned to the group inherit the roles.

Using assignment groups to create organizational teams

There are a few guidelines for creating groups:

- Create one group for administrators and assign the admin role to this group only.
- Create as many groups as needed in your organization. Assign the necessary users to those groups, and then assign the necessary role to those groups if you haven't already. You can create groups first, assign a role to the group, and add users, or you can add user roles individually and then add them to the group. All users in a group will inherit the group role.

To delegate access to grants programs and create organizational teams, you can create assignment groups. This is different from creating internal program teams within a grant program in Grants Management. These are responsibilities that are assigned at the grant program level within the playbook, and adding a user to either of these grant program-level groups do not affect roles at the user and agency level. For information on how to create an internal program team and external reviewer group, see Add members to a Grant Program internal program team and Add external reviewer groups in Grants Management.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To create a user assignment group:

1. Navigate to **All** > **User Administration** > **Group** to create group record.
2. Select a group **Name**.
3. In the **Group Members** related list, select **Edit**.
4. Select one or more names in the **Collection** list.
5. Select **Add** and **Save**.
6. Repeat as many times as needed until all desired users are added to the group.
7. In the **Roles** related list, select **Edit**.
8. Add the desired roles to the group.
9. Select **Save**.

For more information on the roles available in Grants Management and to determine which makes sense for each user, see Grants Management roles and Grants Management Personas

Internal Program Team Responsibilities

The following is a list of all internal program team responsibilities that are provided with the Grants Management application by default. You can assign these using the dropdown menus in the Internal Program team activity of the playbook. For information on creating internal program teams, see Add members to a Grant Program internal program team

Program team responsibilities are different than user roles; responsibilities are tied to the grant program only and determined at the grant program case level. These can only be assigned once a program has been created. A user can have multiple responsibilities across grant programs, per program, and a user's responsibility within a program does not affect a user role.

The following is a list of all internal program team responsibilities that are provided with the Grants Management application by default.

- Approver
- Collaborator
- Observer
- Program Lead
- Program Co-lead

Grants Management Personas

Understand the key personas involved in Grants Management and their responsibilities in supporting grants.

Understanding Grants Management personas

Grants Management supports collaboration between multiple personas, each playing a distinct role in managing, delivering, and consuming services. Understanding these roles helps administrators assign the right access, responsibilities, and tools within the framework.

Grants Management supports access based on predefined personas that reflect the type of work users perform within an agency. These personas can be assigned and tailored to match your agency's needs. A persona role may contain several roles within. The roles within are automatically added to the user when the persona role is added.

Grants Management models this flexibility through:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Personas and Roles

Defined at the user level. Delegates access for the user across the entire agency.

Responsibilities

Defined according to each grant program, at the grant program level only. Delegates access for the user according to the specific grant program. A user can be a point of contact for a grants program, part of the internal program team, or part of the external merit reviewer team. All of these are added at the grant program level, through activities in the program setup playbook.

The combination of user roles and responsibilities determines what a user can do within each grants agency, and within each grant program.

Grants Management user personas

A persona role is pre-configured role in the application that is made up of multiple granular roles, and are designed to correspond to common job titles for members of an agency. Each persona role represents a different way a user interacts with an agency.. The following table contains the persona roles included with the Grants Management, and a description of each persona as it may pertain to an agency. For more information on the roles installed with Grants Management, including the roles contained in each persona, see Grants Management roles.

Grants Management user personas

Persona	Description	Agency Example
Admin [admin], [sn_gsm_grnt_mgmt.grant_admin]	An administrator is a certified ServiceNow system administrator of the agency. An administrator doesn't use the application directly, but supports configuration of the agency and its instances, hierarchy management, assignment of member roles and responsibilities (including related-party configurations), as well as general data management.	A system administrator sets up the agency's Servicenow environment, and manages all instances. A Grant Program admin has access to all grant programs within an agency, and can create, edit, or remove grant programs.
Grant Program Director [sn_svc_appl_pgm_mg.grant_program_director] [pps_resource]	The Grant Program Director provides oversight and final approval for program setup and funding decisions. They ensure the program aligns with agency goals, compliance requirements, and available funding. The Grant Program Director serves as the senior authority responsible for the strategic oversight and governance of the grant program. This role involves approving final program configurations, ensuring compliance with organizational policies,	Review and approve program configuration before publication. Approve or decline funding recommendations submitted by the Program Manager. Provide strategic direction and ensure program compliance. Oversee program performance and outcomes.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management user personas (continued)

Persona	Description	Agency Example
	and making key decisions regarding program direction and resource allocation. The Director reviews and authorizes the publication of opportunities, working closely with the Grant Program Manager to verify that all requirements and standards are met. Additionally, the Director provides guidance on complex issues, helps resolve escalations, and maintains accountability for the program's overall success.	
Grant Program Manager [sn_svc_appl_pgm_mg.grant_program_manager] [pps_resource]	The Grant Program Manager is the primary owner of the grant program, and is responsible for overseeing the full lifecycle of a grant program, from initial definition through announcement, application configuration, and final publication. hey design, configure, and maintain the program throughout its lifecycle. This includes defining eligibility criteria, review frameworks, budget structures, milestones, and required documentation. They also oversee application intake, screening, evaluation, and funding recommendations.	Define program details, eligibility rules, milestones, and budget parameters. Configure application forms, screening logic, and review workflows. Assign reviewers and manage merit review tasks. Monitor evaluation progress and consolidate scoring. Build funding proposals and submit recommendations for approval. Communicate with applicants as needed throughout the process. They are focused on compliance, success, and transparency, and are handling everything from document management, monitoring, reporting and understanding outcomes of a grant program. This role involves setting up program parameters, managing timelines and budgets, selecting review frameworks, and forming implementation teams. The manager ensures that all information and requirements are correctly configured and communicated, facilitating a transparent and efficient application process. Additionally, the Grant Program Manager coordinates with key stakeholders, reviews

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management user personas (continued)

Persona	Description	Agency Example
		program setups, and seeks necessary approvals before publishing opportunities.
Merit (External) Reviewer [sn_gsm_grnt_mgmt.external_reviewer]	Merit Reviewers are subject matter experts (SMEs) assigned to evaluate proposals based on predefined scoring rubrics. They may be internal staff, external partners, or community reviewers depending on the program. These users are added to the grant program's external reviewer team using the activity in the playbook.	A merit reviewer is brought in to conduct merit reviews using structured scoring rubrics that have been pre-defined by the grant agency. The reviewer will evaluate proposals for technical quality, feasibility, and alignment with program goals, and submit scores, comments, and recommendations within assigned deadlines. They may participate in panel discussions if required.
Applicant [sn_customerservice.customer] or [sn_gsm.business_contact]	The Grant Applicant represents an organization or business seeking funding through the grant program. This persona is responsible for preparing and submitting the application, including providing detailed organizational information, responding to eligibility screening, and assembling required documents such as budget plans and proposal narratives. They must be registered users on the portal. **Note:** The applicant must be a registered user in the Grants Management Applicant Portal, and must have either the `sn_customerservice.customer` or `sn_gsm.business_contact` roles.	An applicant seeking funding will work through the Grant Applicant Portal, where they will carefully review program requirements, adhere to compliance mandates, and ensure all conditions are met before they submit their application. Their role often involves collaborating internally to gather necessary data and signatures, as well as acting as the main point of contact for communications with the Grant Program Manager.
Grant Program Writer	A grant program viewer can edit grant programs that they are assigned to.	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management user personas (continued)

Persona	Description	Agency Example
Grant Program Viewer	A grant program viewer can view grant programs that they are assigned to.	

Configure read/write access roles for the Grants Management internal program team

In a Grant Program, certain access is granted to each Internal Program Team user on a case-by-case basis. As an admin, you can delegate read/write access to users within internal teams by mapping specific roles to read/write access.

About this task


By default, users with the Observer and Approver roles within a grant program have read-only access to the grant program. Users with the Program Lead, Co-Lead, and Collaborator roles have read and write access to the entire grant program. To update the access configurations for the aforementioned personas:

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Grant Program** > **All**.
2. Open the Grant Program Record for which you want to configure read/write access roles.
3. Select the context menu, then select **Configure** > **Form Layout**.
4. Select and add **Read Resource Roles** and **Write Resource Roles** to the program information form.
5. Select **Save**.
6. Select the lock icon to add roles to the Read or Write access fields.

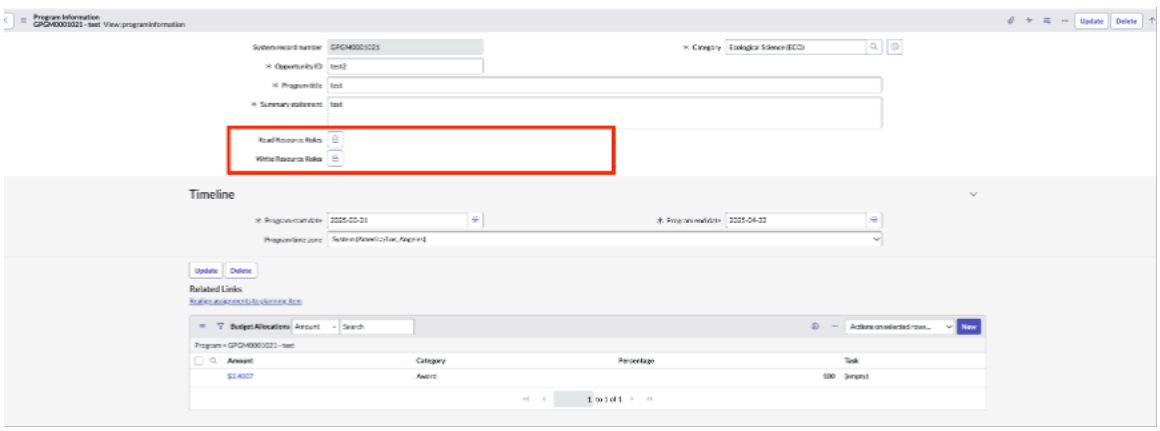

7. Add roles under the **Read Resource Roles** field to grant read access to those roles, and roles under the **Write Resource Roles** fields to grant write access to those roles.
8. Select **Update**.
   Users with these roles now have read access to program or read/write access to the grant program.

Toggle character count display for form fields in Grants Management


Toggle the character count for form fields in the Grants Management to display the remaining number of characters available in the text field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin


Procedure

1. Navigate to **All** > **System Properties** > **UI Properties**.
2. Select **Character counter for text area (journal and multi line text fields)**.

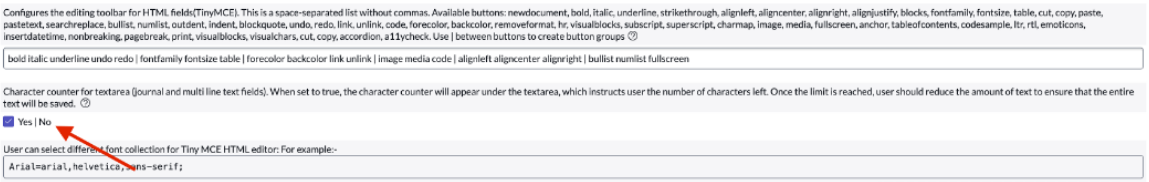

When this property is set to true, the character counter will appear under the text area, displaying the remaining number of characters available in the text field. Once the character limit is reached, the entire text may not be saved.

3. Navigate to a playbook form activity and verify that the character counter is visible.

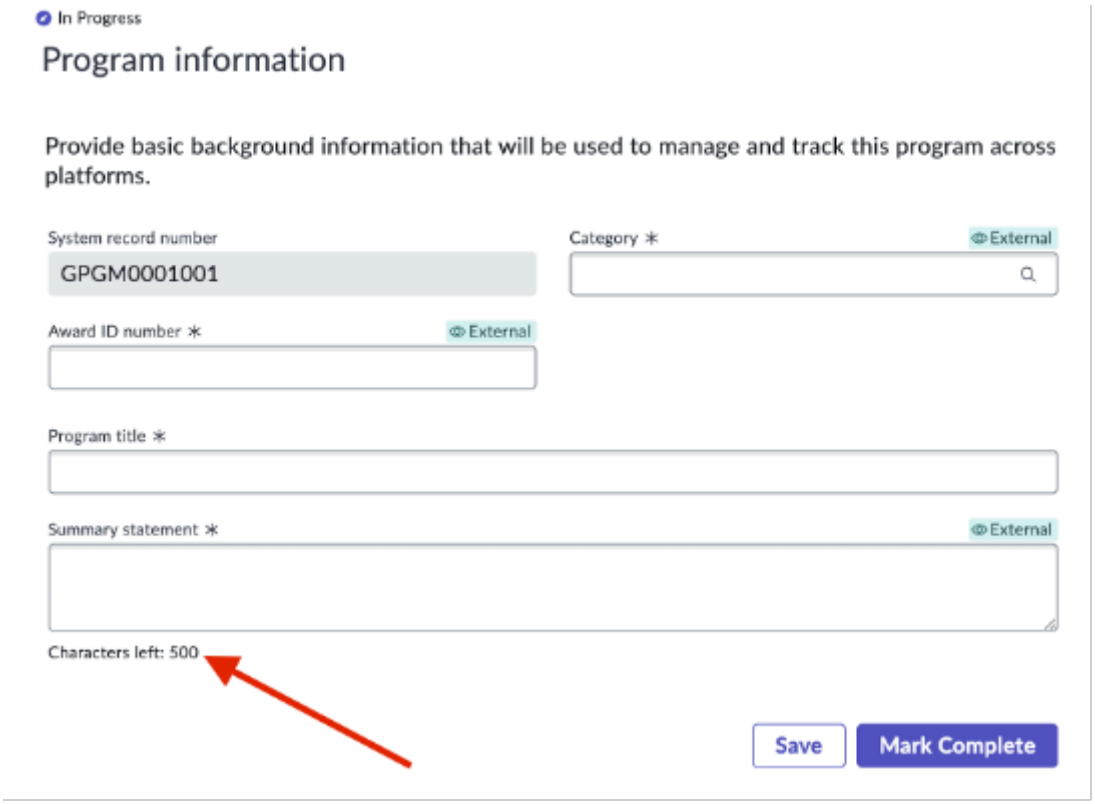

The character count is visible under the text area.

Configure a retention policy for grant cases in Grants Management

Set up an Archive Rule to automatically purge active grant cases and their associated data after a set period of time.

Before you begin
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **System Archiving** > **Archive Rules**.
2. Select the **Archive Grant Cases after 3 years** record.
   A retention rule that checks for cases created 3 years ago AND are Closed is enabled by default.
3. Modify the conditions you wish to change based on your agency's retention rule requirements. You can add an additional condition, such as adding a condition to ignore Records being Audited, to the retention rule using any of the fields from the Grant Case table.
4. Under Related links, select **Recalculate Archive Estimate** to calculate archive estimate of the records before running the rule.
   The estimate will populate in the Record Estimate field.
5. Run the Archive Rule by selecting **Run Archive Now**.

Result

All cases that match your retention criteria are now purged from the primary table to an archive table.

Configure a currency in Grants Management

Grants Management currently only supports single-currency mode.

About this task

Without this configuration, if a grant applicant uses a different currency from the program it applies to, and it will result in incorrect currency calculation like budget calculation.

Before you begin

Role required: admin

> **Note:**
> This may have configuration implications across all ServiceNow applications in your instance. Verify the RCA settings of other applications after completing this procedure.

Procedure

1. Navigate to **All**, and in the navigation filter, enter `sys_properties.list`.
2. Under the Name column, search for the `glide.i18n.single_currency` record, and select the record to open it.
3. Set the value to **true**.
4. Navigate to **All**, and in the navigation filter, enter `sys_properties.list`.
5. Under the Name column, search for **glide.i18n.single_currency.code**, and select the property record to open it.
6. In the Value field, enter the three-letter ISO currency code for the target currency.
   For example, to set the currency to USD, enter USD.
7. Navigate to **All**, and in the navigation filter, enter `sys_properties.list`.
8. Search for `glide.system.locale`, and open the property record.
9. Set the value the desired locale for the currency.
   The value is in the format `Language.Country`, where the Language is an ISO 639 language code, and Country is an ISO 3166 language code. To set the locale to the US, enter `en.US`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

10. Navigate to **All** > **System Localization** > **Currencies**.
11. Open the record of each currency that you wish to deselect, and unselect the checkbox for **Active**.

Configure export application functionality in Grants Management

Configure the export to PDF functionality so that grants program can export grants proposals directly to PDF.

About this task

The export application function generates a PDF format of the confirm application details involving the information from all the sections from the intake stage in sectional formatting.

PDF export functionality uses the Document Templates table and a script to generate a PDF. However, these reside in different scopes, requiring RCA records to be created and manually allowed.

Before you begin

Role required: admin

Verify that the scope is set to **Document Templates**.

Note:
This may have configuration implications across all ServiceNow applications in your instance. Verify the RCA settings of other applications after completing this procedure.

Procedure

1. Navigate to **System Application** > **Application Restricted Caller Access Privileges**
2. Open the **Read** operation record and change the value of Status field to **Allowed**.
3. In the Confirm Application Details activity, select **Export**.
4. Open the **Execute API** operation record and change the value of Status field to **Allowed**.

Result

The export PDF functionality should appear in the Confirm Application Details activity of the playbook.

What to do next

The data that shows up in the exported PDF is generated based on a pre-configured document template. This configuration can be modified to add/delete fields, change formatting of the document, and more.

Configure PaCE Eligibility Framework Engine for use with Grants Management

Configure the eligibility framework engine, powered by PaCE, to allow agents to confirm whether an applicant is eligible for the specific grant being requested.

Configure pre-eligibility questions in Grants Management

The Grants Management Program Setup enables grant program managers to use decision trees to define a series of pre-eligibility questions to check if the applicants qualify for the program.

Before you begin

Role required: sn_svc_appl_pgm_mg.grant_program_manager, sn_gsm_grnt_mgmt.grant_admin, admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The Grants Management incorporates the use of pre-eligibility criteria, a series of questions that may be posed to an applicant to determine whether they are eligible to apply for a grant. The purpose is to deflect proposals in which the applicant is not eligible to obtain a grant.

The Eligibility & Screening activity allows the user to either select an existing decision tree or create a new decision tree with a series of pre-eligibility questions to check if the applicants qualify for the program. Note: there can only be one decision tree per Grant Program.

You can configure the pre-eligibility questionnaire in one of two ways:

- By navigating directly to the **Decision Tree (ga_decision_tree)** table and following steps to create a new decision tree
- Through the **Eligibility and screening** activity during the Grant Program creation process, where you are provided with the option to either:
  - Select a decision tree that an admin has already created by selecting the search icon in the Decision tree field, or
  - Create a new decision tree by selecting **Open the Decision Trees list**. Here, you can configure a new decision tree and define the associated pre-eligibility questions.

To configure the Pre-Eligibility questions for a new Grant Program using a decision tree:


Procedure

1. Set the scope to **Grants Management Playbook**.
2. In the Decision Tree (ga_decision_tree) table, select **New** to open a new Decision Tree record form where you can define the details of your decision tree.
3. On the form, fill in the fields.
4. Unselect the checkbox next to **Show a dismiss button**.
5. Select **Submit** to create the decision tree record.
6. Select **Open in Builder** to open the Decision Tree builder, where you can add questions, define branching logic, and set eligibility criteria.
7. Select the **New** node and enter the Node name, then select the relevant reference table. Enter `PreEligibility` as the Node name, and select Grants Management Case as the reference table.
8. Select **Add question** and enter the desired Question.
9. Select **Choice** in the Type of answer field, and provide options `Yes` and `No`.
10. Select **Save and Close**.
11. Select the **+** icon below the Pre-Eligibility node to add a new path and node.
12. Select **New Path** to define a branching path from the Pre-Eligibility node. This will be the Eligible Path.
13. Select **Submit** to save the new decision tree.
14. Set the Path name to **Eligible Path**.
15. Define the conditions by selecting the questions and entering their answers.
16. Select **Save and close** to save the path configuration.
17. Select **Add node** under the Eligible Path, then select **Propose a guidance as an outcome**, then select **Continue**.
18. Set the Node name to **Eligible**, and set the guidance as **Grants Pre-Eligibility**.
19. Select the check box next to **Eligible**, then select **Save and close**.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

20. Set the Guidance for **Non-Eligible Path** and enter the Node name as **Not Eligible**.
21. Select **Grants Pre-Eligibility** under Guidance, and unselect the checkbox for **Eligible**.
22. Select **Save and Close**.
23. Select **Activate** to publish the decision tree for use within the Grant Program.

Result

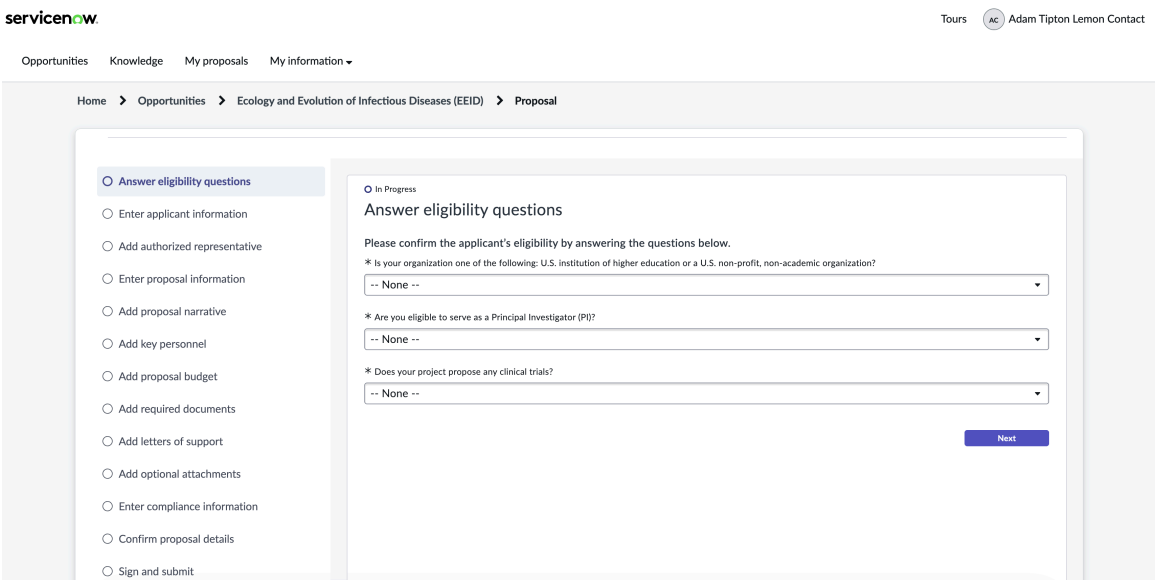


When applicants proceed to answer eligibility questions, they are presented with the questionnaire that you have just created using the decision tree. Based on their responses:

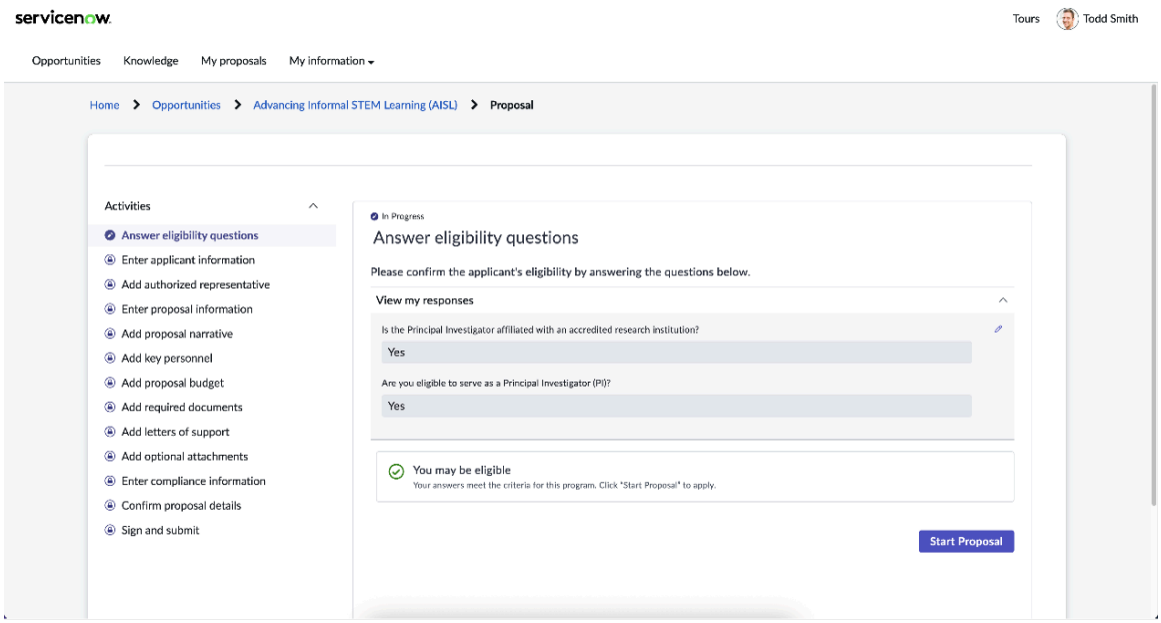

- If eligible, they will see a success message and the option to proceed with their proposal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

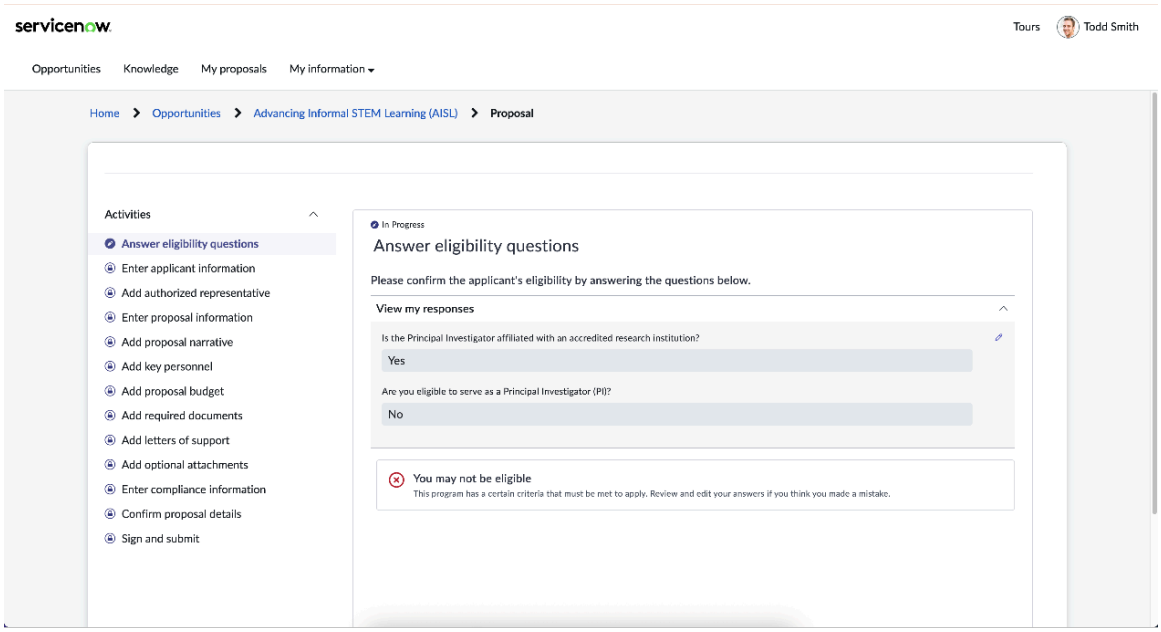

If not eligible, a message will indicate that they may not be eligible and suggest reviewing their answer.


Configure Eligibility Rules Engine Policies in Grants Management

Use the Grants Management Eligibility Rules Engine, powered by Policy as Code Engine (PaCE), to manage the life cycle of a policy and create, update, review, and execute policies.

Agencies administering grants management programs must ensure that applicants meet certain eligibility conditions before receiving a grant. With the Grants Management Eligibility Framework, agencies can apply a low code approach to eligibility rule creation and management. This enables agencies to manage a variety of rules, from simple to complex, across multiple programs and with ease.

Define and manage your eligibility rules engine policies in a single management console, the Policy Management Home in CSM Configurable Workspace. In the Policy Home of the CSM Configurable Workspace, you can create, remove, and update the policies used for determining eligibility for an application routed through the Grants Management workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

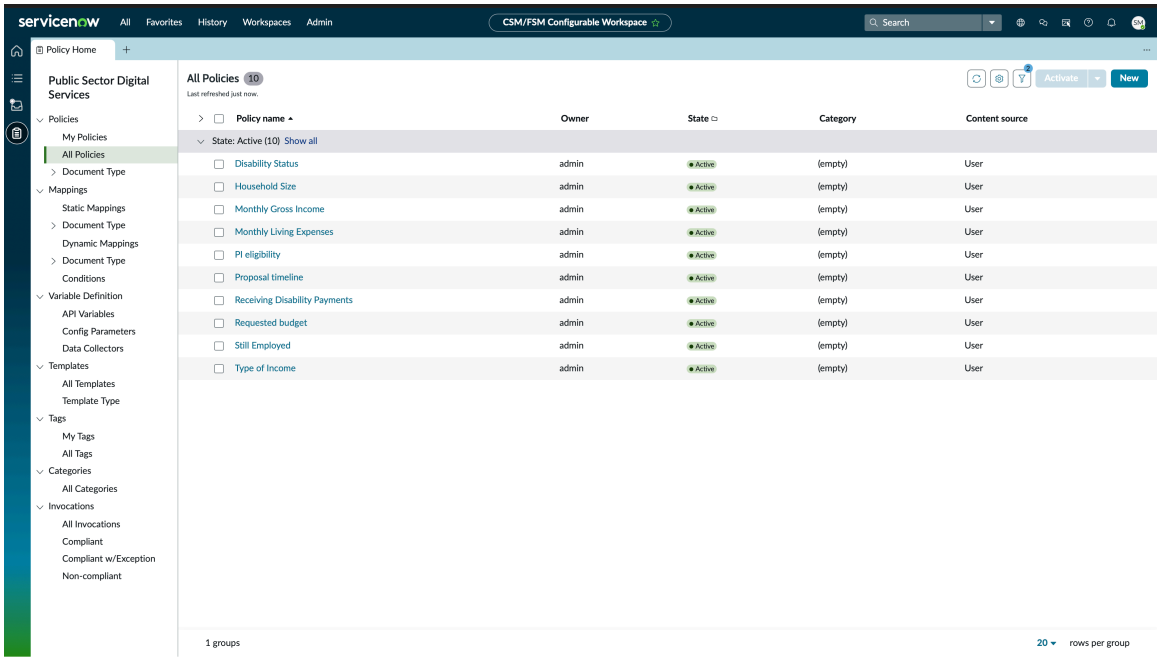

PaCE is a scalable workspace that allows you to set up the foundational elements of the Public Sector Eligibility Framework, use data collectors to create complex policies, save policies as a template to make future policy creation easier, and use config parameters to create reusable policies that can be applied across multiple grant programs.

Here, you can:

- Create policies.
- Review existing policies.
- Assess and implement changes to each policy.
- Determine if a policy should be used as the template for another policy.
- Understand why a policy may not be working as expected.

You can create any number of policies, which can be updated as required.

Create a case API Variable for a PaCE policy in Grants Management

Create a case API variable to transfer the information collected from the case to the PaCE eligibility rules engine. This will be used when creating a policy and referencing fields on the case.

About this task

An API Variable is a variable that enables you to pass the value to the policy whenever the policy is invoked. Specify a value for this API Variable when calling the API, otherwise the policy is not executed and no decision is reached.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Workspaces** > *`CSM Configurable Workspace`*.
2. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
3. Select the **API Variables** list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Select **Add** to create an API variable.
5. On the form, fill in the fields with the following information.

UI parameter element mapping form

Field	Value
Label	Case Reference
Name	case_reference
Type	Reference
Description	Case Reference
Table	Grants Table
Match Criteria	Select first match

6. Select **Save**.

Result
An API variable is created, and will pass the value to the policy whenever the policy is invoked, after which the policy is executed and a decision is reached.

What to do next
Create a data collector for a PaCE policy.

Related topics
Create a case data collector for a PaCE policy in Grants Management

Create a case data collector for a PaCE policy in Grants Management

Create a data collector within PaCE to use a set of data within a policy.

About this task
Data collectors collect input process data from within your organization or from a provided external data source to provide an output that can be used in the policy logic to make a decision. This will be used when creating a policy and referencing fields that must be calculated or cannot be dot walked from the case. You can define and manage data collectors by creating, editing, updating, and activating them to your policy builder.

Before you begin
Role required: admin

Procedure
1. Navigate to **All** > **Workspaces** > *CSM Configurable Workspace*.
2. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
3. In the Variable Definition list, select the **Data Collectors** list.
4. Select **New** to create a data collector.
5. Enter the name of the data collector and a description, then select **Save**.
6. Select **Save**.
7. Select the **Versions (1)** related list, and select **Draft-V0.1**.
8. Select the **Build** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

9. Under Define Variables, select **Add** to add an input variable.
10. On the form, fill in the fields with the following information.

Define Variables input form

Field	Value
Label	Label of the input variable.
Name	The name of the output variable used within the data collector script.
Type	The input variable data type. This can be reference, string, int.
Description	The description of what this input variable is used for.
Table	Table referenced for the input variable

11. Under Define Variables, select the Output tab, then select **Add** to add an output variable.
12. On the form, fill in the fields with the following information.

Define Variables input form

Field	Value
Label	The label of the output variable
Name	The name of the output variable used within the data collector script
Type	The data type of the output variable. This can be reference, integer, string/
Description	This is the description of the output variable.

13. Under Data collector script, enter the following code snippet:

```
(function(inputs, outputs) {
    var totalGrossIncome = 0;

    var incomeDetailsGr = new
 GlideRecord("sn_svc_appl_info_income_details");
    incomeDetailsGr.addQuery("case_record",
 inputs.case.sys_id);
    incomeDetailsGr.query();
    //Loop through each income details record for the case
    while (incomeDetailsGr.next()) {
        var tempPaymentFrequency =
 incomeDetailsGr.getValue("payment_frequency");

        if(tempPaymentFrequency == "every_2_weeks")
          totalGrossIncome += incomeDetailsGr.amount * 2;
        else if(tempPaymentFrequency == "weekly")
          totalGrossIncome += incomeDetailsGr.amount * 4;
        else if(tempPaymentFrequency == "once_a_year")
          totalGrossIncome += incomeDetailsGr.amount/12;
        else
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
            totalGrossIncome += incomeDetailsGr.amount;
    }

    outputs.total_gross_income = totalGrossIncome;
})(inputs, outputs);
```

14. Select **Save**, then select **Publish**.
15. Select the checkbox next to **Activate this data collector** and then select **Publish**.

Result
A data collector for a policy version is now created.

What to do next
Create an eligibility policy using PaCE

Create an eligibility policy in Grants Management using PaCE

Create an eligibility policy using Grants Management Eligibility Rules Engine to model eligibility rules that can be used to evaluate grants cases.

About this task
Use Policy as Code Engine (PaCE) policies to build out the logic that will determine eligibility and grants. Policies can be saved as templates to quick-start future policy creation. You can create a policy from scratch using Policy Management, and define the logic for that policy using the Policy Builder tool. Policy logic is a set of conditions that is used for determining whether or not an applicant is eligible for one or more of the grant programs offered by your agency. You can set conditions for the policy using the condition fields.

Before you begin
Role required: admin

Procedure
1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Select **All Policies** > **New**.
3. Select **New blank policy** to start from a blank policy, or select from the existing policy templates.
4. Select **Create**.
5. On the **Create New Policy** form, fill in the fields.

Create New Policy form

Field	Description
Policy name	The name of the policy. **Note:** The policy name must be unique, and is used as the identifier of the policy.
Category	Enables you to group and manage policies more efficiently.
Created	Date and time when the policy was created. Auto-populated.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Updated	Date and time when the policy was updated. Auto-populated.
Description	Additional details for this policy.

6. Select **Save**.
   The newly created policy contains the following tabs:

Tab name	Description
Details	Displays the details of the policy, including policy name, category, date created, and a description.
Policy builder	When you create a policy, a draft policy version is created, and must be published before it is current and can be used. Each policy version contains version metadata, a policy script, and variable input definitions, all of which can be modified. Under the **Policy builder** tab, you can: ○ Edit a policy version. **Note:** Published policies cannot be edited. To edit a published policy, select **Create a copy**. ○ View version details ○ Create a new version ○ Switch from low-code to the code editor ○ Save the policy as a template ○ Compare versions ○ Duplicate policy versions For more details, see Manage PaCE policy versions. **Note:** You must publish a policy version to make it current before it can be used.
Version management	Displays previous versions of the policy. You can also create a new version of the policy.
Mappings	Enables you to define the grant model to which the policy is to be mapped.
Executions	Enables you to review the execution activity for the policy.

7. Select **Policy Builder** > **Data Sources** > **Data Collectors**, then select **Add**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

8. In the search box, enter `Test Data Collector`, select it, then select **Next**.
9. In the **Details** tab, add a label in the label field.
10. Select the **Inputs** tab, and in the Case field, select the data pill picker icon (), then select **API variables >** > **Case Reference** > **Inputs** > **Save**.
    This data collector will now be executed when the policy is executed. You can access the output variables by selecting a data pill picker in any if/else condition and selecting data pill picker > Data collectors > Test data collector > Total Monthly Gross Income.
11. To set qualifier conditions for the policy, select **New condition set** and enter the following information:

If statement fields

Field	Description
Condition description	Case constituent is empty.
Source	**API variables** > **Case Reference** > **Constituent**
Operator	is empty
Value	Value to enter text. Select the Data picker icon to concatenate multiple text strings with multiple data pills to select a variable for the log. **Note:** If your Source is choice, you will be unable to select multiple data pills.

Then statement fields

Field	Description
Decision	Non-Compliant
Output type	Result
Data	This case does not have a constituent.

12. Add a dependent condition by selecting **Add else**, then fill in the fields with the following information.

Else statement fields

Field	Description
Decision	Compliant
Output type	Info
Data	This case has a constituent.

13. Select **Publish**.
14. Do one of the following.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- To publish this eligibility policy for immediate use evaluating Grants applications:

  a. Select **Publish**.

  b. Select **Activate this policy** then select **Publish without testing**.

  c. Verify that the state of the policy has changed to **Current**.

  Your eligibility policy is now published and can be used to evaluate any active grants cases. Verify the policy appears in the Policy Home by navigating to **Policy Home** in the CSM Configurable Workspace sidebar, and selecting**Policies** > **All Policies**.

- To save this policy as a template for future use:

  a. Select **Save as Template** > **New Template**.

  b. On the form, fill in the fields.

Policy Template form	Description
Name	Primary Applicant
Template Type	Data Source
Description	Predefined data source for applicant information

  c. Select **Save**

  Your policy template has been created, and can be used to quick-start future policy creation. For more information on creating PaCE policy templates, see . For more information on creating a new PaCE policy from a template, see Create a PaCE Eligibility Policy from a template.

  .

Result

An eligibility policy is now created, and is ready to be mapped to one of more grant models of the Grants Management. See Map an PaCE eligibility policy to a grant model using Grants Management Eligibility Framework for information on how to map the published policy to a specific grant.

Map an PaCE eligibility policy to a grant model using Grants Management Eligibility Framework

For a eligibility policy to be invoked correctly, it must be mapped to an existing grant model. Map a published eligibility policy to one or more of the grant types that your agency offers.

Before you begin

Role required: admin

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Select **Mappings** > **Static Mappings** > **New**.
3. Select the grant model that you want to map to from the dropdown.
   Objects available for mapping are displayed.
4. Select the policy that you want to map the grant model to.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Result
The newly created mapping is valid and active, and the mapping input is added to the list of policy mappings.

Configure PaCE Restricted Caller Access Privileges (RCA)

Define cross-scope access to an application, application resource (such as an access control role, a business rule, a UI action, or a script include), or event. You can use a requested RCA to grant store apps access to protected resources in the ServiceNow AI Platform.

Before you begin
Note:
This may have configuration implications across all ServiceNow applications in your instance. Verify the RCA settings of other applications after completing this procedure.

Role required: admin

Procedure
1. In the PaCE workspace, navigate to **All** > **Policies** > **My Policies**.
2. Select **New** > **New blank policy**.
3. Enter a Policy name, then select **Save**.
4. Navigate to **System Application** > **Application Restricted Caller Access Privileges**
5. In Application column filter, enter `=Policy as Code Engine`.
6. In the Source Scope column filter, enter `=Service Applicant Program Management`, and run the filter.
7. Open each record and change the value of Status field to **Allowed**.
8. Select **Submit**.

Configure the Smart Assessment Engine for Grants Management

Create a new Smart Assessment template, which would show up in the compliance assessment field in the proposal playbook. The Smart assessment template is used to collect compliance information from applicants during proposal submission.

Before you begin
Role required: admin, sn_smart_asmt.assessment_reader, sn_smart_asmt.template_manager, sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

Verify your scope is set to **Global**.

About this task
The Smart Assessment Engine (SAE) streamlines and automates assessment processes, and supports various assessment types.


You can create assessment templates for grants compliance, and add instructions, questions, and reference information by using the template designer in the Smart Assessment Engine application. Smart assessments can help you to evaluate various situations, aspects, or records.

Procedure
1. Navigate to **All** > **Smart Assessment Engine** > **Administration** > **Template Categories**.
2. Select **New** to create a template category.
3. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

In the Category role field, enter `sn_smart_asmt.template_manager`. In the Assessment Targets field, select **Grants Management Case**.

4. Select **Add section** in the Questions tab, then fill in the details for the section and select **Save**.
5. Select **Add question** to add a Single Select Dropdown Question, then.
6. After adding all the questions, select **Publish**.
7. Select **Submit**.
8. Navigate to **Workspaces** > **Assessment Workspace**
9. Select **New Template**, and on the form, fill in the fields.
   In the Assessment targets field, enter **Grants Management Case**.
10. Navigate to the **Questions** tab and select **Add section**.

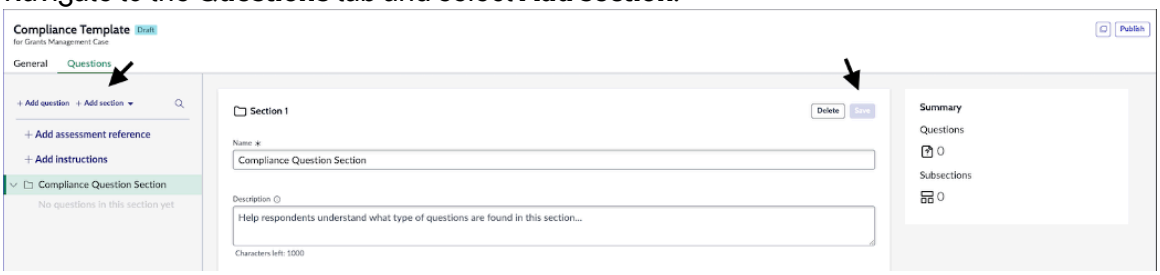

11. On the form, fill in the details for the section, then select **Save**.
12. Select **Add question**, and add a Single Select Drop-down Question of your choice.
    Repeat until you have added all of your desired questions.
13. Select **Publish**.

Result

The template is now published, and can be selected in the **Compliance Assessment**activity of the Grants Setup Playbook. It is used to collect compliance information from applicants during proposal submission.

Configure the Reviewer Service Portal

Configure the Grants Management Reviewer Service Portal for merit reviewers to track, score, and review grants proposals.

Before you begin

Role required: admin

Procedure

Navigate to **All** > **Service Portal** > **Service Portal Configuration**.
Some of the components that you can customize include:

- Branding: Configure the portal branding to give the reviewer service portal its own look and feel. The Coral Theme is available for the reviewer service portal.
- Menus: Update the base system menu or add a new one. For details, see Configure the portal header menu.
- Home page: Update the default home page by updating the widget configuration or assign a custom home page. For details, see Assign a homepage to the portal.
- Widgets: Use configurable portal widgets to define the content in your portal. For details, see Configurable Portal widget library.
- Header: Update the program header configurations according to your agency's needs. For details, see Configure a custom program record header in the Reviewer Service Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- List pages: Browse, search & filter through records of cases, products, orders, and others. For details, see Add and configure the Portal Data List widget
- Roles: Configure page security by role to either set up pages to be public (no login required) or to filter them by user role.
- Knowledge base: Configure a knowledge base to house the merit review framework for users in the portal to view the associated knowledge articles. For details, see Configure the Merit Review Scoring Framework for a Grant Program in the Reviewer Service Portal.

Configure a custom program record header in the Reviewer Service Portal

As an admin, you can configure the custom widget that renders the Program header displayed to the merit reviewer persona in the Reviewer Service Portal.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **System Extension Points** > **Scripted Extension Points**.
2. Select `sn_gsm.StandardTicketExtension`.
3. Select **Create implementation** from the Related Links list.
4. On the form, fill in the fields.

   Ensure that **handle** is marked **true** for the when you want the implementation to be shown. Set the fields that you want to return by using the process() command.

5. Select **Update**.

Set up a grant program in Grants Management

Set up and configure the details of a new grant program using Grants Management.

Create a Grants Program results letter template

As an agent or Grants Program manager, you can leverage templates to compose letters informing applicants of the result, choosing from Award, Rejection (ineligible), and Rejection (decline). These letters are displayed to applicants on the Grants Management Portal, once a decision has been communicated.

About this task
You can create and define several results letter or document templates that are used to notify applicants about the final status of their grants proposals, and record the outcome. The applicant is then notified and can access and view their results letter and merit review summaries on the applicant portal, and decline or accept the award notice if their proposal is approved.

Before you begin
Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

Procedure

1. Navigate to **All** > **CSM Configurable Workspace** > **Lists**.
2. Select **Grant Programs** > **My grant programs** and select a grant program.
3. Navigate to the Decision activity, and select create letter.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure Restricted Caller Access for a results letter

Once the Grant Program Manager is ready to release the results letters for the applicants, the letters can be configured using Restricted Caller Access.

Before you begin

Role required: admin

Verify that the scope is set to **Document Templates**.

Procedure

1. Navigate to **System Application** > **Application Restricted Caller Access Privileges**
2. Select **New**.
3. On the form, fill in the fields with the following information.

Source Scope	Grants Management Playbook
Source Type	Script Include
Source	Script Include: GrantManagementUtilImpl
Status	Allowed
Target Scope	Document Templates
Target Type	Table
Target	Table: HTML Template
Operation	Read

4. Select **Submit**.
5. Select **New**.
6. On the form, fill in the fields with the following information.

Source Scope	Grants Management Playbook
Source Type	Script Include
Source	Script Include: Script Include: GrantManagementUtilImpl
Status	Allowed
Target Scope	Document Templates
Target Type	Script Include
Target	Script Include: HtmlTemplateUtils
Operation	Execute API

Configure the Merit Review Scoring Framework for a Grant Program in the Reviewer Service Portal

Define the scoring framework that a merit reviewer should follow as they review and score grant program proposals in the Reviewer Service portal. You can also select which knowledge bases or frameworks are displayed in to a merit reviewer in the Reviewer Service portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Service Portal** > **Portals**.
2. Select the portal for which you want to display the desired merit review framework.
   Select the Reviewer Service Portal. For information on how to create a merit review framework, see Create a custom Merit Review scoring framework for a Grant Program in the Reviewer Service Portal.
3. Select the desired scoring framework.
4. Add a scoring rubric.
   A rubric is a Knowledge Article which needs to be added to this program so that the evaluators/reviewers know how to judge the proposals.
5. In the Knowledge Bases related list, select **Edit**.
6. On the Edit Members form, move the desired knowledge bases from the available items in the **Collection** column to the **Knowledge Bases List** column.
7. Select **Save**.

Related topics

Create a knowledge base

Create a custom Merit Review scoring framework for a Grant Program in the Reviewer Service Portal

Start scoring grant proposals based on your agency's preferences by creating a custom scoring framework.

About this task
Scoring frameworks provide a structured method to evaluate and prioritize initiatives, projects, and demands based on predefined criteria. This allows merit reviewers to score applications based on the consistent criteria.

Before you begin
Role required: admin, sn_svc_appl_pgm_mg.scoring_framework_writer, sn_svc_appl_pgm_mg.scoring_framework_attribute_writer

Ensure the scope is set to **Service Applicant Program Management**.

Procedure

1. Navigate to **All** > **Strategic Planning** > **Scoring Frameworks**.
2. Select **New**.
3. Enter a name of your scoring framework in the **Name** field.
4. Enter the details of your scoring framework in the **Description** field.
5. Select the checkbox next to **Active** to make the framework available for use with the Reviewer service portal.
6. Select **Submit**.

What to do next
Create a merit review scoring framework attribute

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create merit review scoring framework attributes for a Grant Program in the Reviewer Service Portal

Add attributes within your scoring framework.

About this task

The following attribute types can be added to a scoring framework:

- Choice: For attributes with predefined values (such as high, medium, or low)
- Decimal: For attributes with number ranges and min/max values
- Integer: For attributes with number ranges and min/max values
- String: For the weighted calculation of all attributes

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Strategic Planning** > **Scoring Frameworks**.
2. From the Scoring Frameworks list, select a framework for which you want to add the Scoring Framework Attributes.
3. Select **New**, from the Scoring Framework Attributes related list.
4. On the form, fill in the fields.

Scoring Framework Attribute form

Field	Description
Label	Name that defines the scoring Framework.
Type	Type of the label, such as integer, choice, star, and so on.
Description	Details of the Scoring Framework.

Tip:
If you want to add a choice type scoring attribute, you must have selected Decimal or Integer in the **Type** field, and Choice in the **Display type** field.

To add a choice-list attribute:

a. In the Choices related list, select **New**.

5. Select **Submit**.
6. Repeat this procedure until all Scoring Framework Attributes have been added.

Note:
Every scoring framework can only have one final score. Select the checkbox for the final score attribute for only one attribute.

What to do next

Create a final score attribute for the merit review scoring framework

Create a final score attribute for the merit review scoring framework

Add attributes within your scoring framework.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Strategic Planning** > **Scoring Frameworks**.
2. From the Scoring Frameworks list, select a framework for which you want to add the final score attribute.
3. Select **New**, from the Scoring Framework Attributes related list.
4. On the form, fill in the fields.

Scoring Framework Attribute form

Field	Description
Label	Name that defines your Scoring Framework's final score. **Enter Final Score**.
Type	Type of the label, such as choice, decimal, integer, or string.
Description	Details of the Scoring Framework attribute.

5. Select the **Final score** option to mark this attribute as the final score attribute of your Scoring Framework.
6. Select the **Active** option to mark this attribute available for use with your Scoring Framework.
7. Select the **Calculated Value** tab and add a formula to derive the value of the final score attribute
   This formula should be based only on the scoring attributes of your scoring framework.
8. Select **Update**.

What to do next
Configure a merit review scoring rubric for a grants proposal

Configure a merit review scoring rubric for a grants proposal

Create a knowledge article containing information on how merit reviewers are to score the proposals, known as a rubric.

About this task
There are three ways of creating knowledge articles.

- **Self-Service** > **Knowledge** > **Create an Article**
- **Knowledge** > **Articles** > **Create New**
- From the **Knowledge Management homepage**, select the **More** icon (⋮), then select **Create Article**.

Before you begin
Role required: admin

Procedure

1. On the **Create New article** page, select a knowledge base.
   The list of article templates to select in the next step is filtered according to the article templates available for the selected knowledge base.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

2. Select an article template, then select **Next**.
   The Knowledge form is displayed based on the article template selected. Common templates include:
   - **FAQ**: For Q&A-style articles.
   - **How-To**: For step-by-step instructions.
   - **Landing Page**: Overview page linking to related articles.
   - **KCS Article**: For known issues and workarounds.
3. On the Knowledge form, fill in the fields.
   For more information on the Knowledge form fields, see Create a knowledge article.
4. Select **Submit** to save the draft.

Result
An ownership group reviews and approves the article. Once approved, it can be published immediately or on the scheduled date.

Note:
If no ownership group is assigned, the article automatically goes to the knowledge administrator and knowledge manager for approval.

All knowledge articles are available for selection under both the Rubric section of the Merit Review activity, as well as the Article number section of the Resources and support activity, once the Knowledge article resource type is selected.

Install and configure the Social Benefits Playbook application

Install the Social Benefits Playbook application, which enables public sector end users to submit and track social benefit requests and provides government agents with a pre-defined process for handling and resolving these requests. You can then configure the features available for submitting requests and routing requests to agents.

As a user with the admin role, complete the following configuration tasks to set up the Social Benefits Playbook, after you install the Public Sector Digital Services Core application.

Configuration tasks for Social Benefits Playbook

Task	Description
Install Social Benefits Playbook for Public Sector Digital Services	Install Social Benefits Playbook (app-psds-social-benefits) from the ServiceNow® Store.
Assign user personas, roles, groups, and responsibilities in Social Benefits Playbook	
Configure a Social Benefits Playbook Product Model	
Configure approver groups for benefit eligibility determination in Social Benefits Playbook	
Configure Playbook	
Configure the benefit summary for a social benefits program in Social Benefits Playbook	
Automatically route social benefit requests using Advanced Work Assignment	Use the ServiceNow Advanced Work Assignment (AWA) application to route and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configuration tasks for Social Benefits Playbook (continued)

Task	Description
	assign social benefit requests to designated agents.
Configure the eligibility pre-screener	
Configure Eligibility Rules Engine in Social Benefits Playbook	Configure the eligibility framework engine to allow agents to confirm whether an applicant is eligible for the specific social benefits requested.
Configure disclaimers, terms and conditions, or other point-in-time content for a social benefit program in Social Benefits Playbook	
Create a test benefits program and case using the Social Benefits Playbook	Verify the newly-configured playbook is working as expected by creating a new social benefits program and case using the Social Benefits Playbook.

Install Social Benefits Playbook for Public Sector Digital Services

You can install the Social Benefits Playbook application (app-psds-social-benefits) if you have the admin role.The application includes demo data and installs related ServiceNow® Store applications and plugins if they aren't already installed.

Before you begin

- Confirm that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Certain features in the Social Benefits Playbook application are available based on your ServiceNow entitlements and may require installation of other ServiceNow applications and activation of specific plugins.

> **Note:**
> Install the Playbooks for Customer Service Management application to enable the playbook experience.

- Review the Social Benefits Playbook application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin

About this task

The Social Benefits [sn_gsm_social_benefits_case] table is installed with Social Benefits Playbook.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Social Benefits Playbook application (sn_gsm_soc_bnfts) using the filter criteria and search bar.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

In the list next to the **Install** button, the versions available to you are displayed.

3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.

4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are the sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
6. Select **Install**.

Assign user personas, roles, groups, and responsibilities in Social Benefits Playbook

By default, the Social Benefits Playbook application comes with roles, personas, and responsibilities that can be assigned to existing users on the platform.

Assigning user roles

Assign roles to members of your benefits agency Social Benefits Playbook application so that your users can have delegated access to Social Benefits Playbook features, capabilities, and data.

There are a few guidelines when assigning roles to users:

- Determine the roles who would be working on the benefit cases for the agency, and what user would do what. For more information on the roles available in Social Benefits Playbook and to determine which makes sense for each user, see Social Benefits Playbook roles and #unique_153
- Create as many users as needed in your organization.

Role required: admin

To assign roles to a user within an organization:

1. Make sure a user record has been created within the organization. Navigate to **All** > **User Administration** > **Users** to create a user record, or open an existing user record.
2. In the **Roles** related list, select **Edit**.
3. In the **Collection** list, select the desired roles, and then select **Add**
4. Select **Save**.
5. Repeat as many times as needed until all desired users are added to and associated with the organization and have the desired role.

You can also create user groups and assign roles to them. Users assigned to the group inherit the roles.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using assignment groups to create organizational teams

There are a few guidelines for creating groups:

- Create one group for administrators and assign the admin role to this group only.
- Create as many groups as needed in your agency. Assign the necessary users to those groups, and then assign the necessary role to those groups if you haven't already. You can create groups first, assign a role to the group, and add users, or you can add user roles individually and then add them to the group. All users in a group will inherit the group role.

To delegate access to benefit programs and create organizational teams, you can create assignment groups.

To create a user assignment group:

1. Navigate to **All** > **User Administration** > **Group** to create group record.
2. Select a group **Name**.
3. In the **Group Members** related list, select **Edit**.
4. Select one or more names in the **Collection** list.
5. Select **Add** and **Save**.
6. Repeat as many times as needed until all desired users are added to the group.
7. In the **Roles** related list, select **Edit**.
8. Add the desired roles to the group.
9. Select **Save**.

For more information on the roles available in Social Benefits Playbook and to determine which makes sense for each user, see Social Benefits Playbook roles and #unique_153.

Configure approver groups for benefit eligibility determination in Social Benefits Playbook

Configure an approval user group for the Propose Decision Activity, so that the constituent's eligibility determination can be routed to the appropriate people for final approval.

At the Propose Decision Activity, case agents need to decide whether to grant or deny benefits. An approver group needs to be configured, so that this decision can be routed to supervisors for review and approval. Create a scripted extension point to create an approver group for the Propose Decision Activity in the Social Benefits Playbook. Once the case agent makes a benefit decision during this activity, the case will be routed to the individuals in the approver group for review and approval.

Create a scripted extension point for an approver group

Create a scripted extension point to create an approver group for the Propose Decision Activity in the Social Benefits Playbook.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Scripted Extension Points**.
2. In the **API Name** column, select `sn_gsm_soc_bnfts.SocialBenefitsConfig`.
3. Select the **Create implementation** related link.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

An alert banner that reads **New script include created and registered as an extension point instance** should appear.

4. Select **Update**.

Add users to an approver group

Add users to approver group for the Propose Decision Activity in the Social Benefits Playbook.

Before you begin
Role required: admin

About this task
A user record must have already been created.

Procedure

1. Navigate to **All** > **System Security** > **Groups**.
2. Select the **Social Benefits – Propose Decision** group.
3. Select the **Group Members** tab, then select **Edit**.
4. Add the desired users to the Group Members List and select **Save**.
   Make sure a user record has been created within the organization; navigate to **All** > **User Administration** > **Users** to create a user record.
5. Select **Update**.

Result
An approver group has been created and can be used in the Propose Decision activity of the Social Benefits Playbook. You can edit this group at any time by removing or adding new users to the group Users list.

Configure a Social Benefits Playbook Product Model

Set up one or more product models to model the various social benefit programs your agency may choose to provide, so that your agency can define and manage all its benefit programs.

Product models are used to model social benefit programs, such as nutrition assistance, temporary financial assistance, unemployment insurance, vocational training, and more. Product Models help in defining the benefit, linking services, creating workflows, and generating reports.

Configure product model form for the Social Benefits Playbook

Configure the product model form.

Before you begin
Role required: admin

Application scope from Global to Social Benefits Playbook.

Procedure

1. In the Unified Navigation bar, enter `sn_ent_social_benefit_model.do`, and select **Enter**.
2. Select the Additional actions icon, then select **Configure** > **Form Layout**,
3. On the modal pop-up, select **Not Now**.
4. Select **Edit this section in Expanded Model and Asset Classes**.
5. Add the following fields to the form:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Applicant Type
- Benefit Frequency
- Benefit Type
- Cost
- Customer Visible
- Reporting Frequency
- Requires Interview

6. Remove the following fields from the form:
   - Asset Tracking Strategy
   - Asset Tracking Unit
   - Life Cycle Stage
   - Life Cycle Stage Status
   - Model Categories
7. Select **Save**.
8. Navigate to **All** > > .

Define the Social Benefits product model in Social Benefits Playbook

Define the attributes of a nutrition assistance benefit program.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > > .
2. On the form, fill in the fields.

Product Model Form Field	Description
Name	Name of the benefit program
Status	Status of the benefit program
Short Description	Brief description of the benefit program.
Applicant type	Type of applicant that can submit for the benefit program. Individual,
Benefit Frequency	How often the benefit will be sent out to recipients.
Benefit Type	The amount of the benefit to be paid out at the above frequency.
Cost	The amount of the benefit to be paid out at the above frequency. As an admin, you can create a benefit flow that enables adjustments to be made based on household size, disability payments, and household expenses. For more information, see .

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Product Model Form Field	Description
Customer Visible	Whether this benefit program will be visible on the constituent-facing benefits portal.
Reporting frequency	How often the benefit?
Requires Interview	Whether the benefit case requires an interview to verify benefits.

3. Select **Submit**.

Configure Playbook

Set up an end-to-end playbook, from intake on portal all the way to decision stage.

Social benefit applications are characterized by significant complexity due to intricate eligibility criteria and extensive documentation requirements. Playbooks and Playbooks on Portal capabilities can be leveraged by agencies to provide guided application processes from end to end.

Configure the Playbook Process for a social benefit program in Social Benefits Playbook

Set up an end-to-end playbook, from intake on portal all the way to decision stage, using the default Social Benefits Playbook playbook as a template.

About this task

Create variant(s) of the default Social Benefits Playbook process, tailoring the default playbook flow to meet customer needs. Duplicate the default playbook flow to create a new instance of the playbook.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Process Automation** > **Workflow Studio**.
   Workflow Studio opens in a new window.
2. In the Processes list, select **Social Benefits Playbook**.
3. Select the **More actions** icon () and select **Duplicate**.
4. Update the Label field to the name of the Social Benefit program you are duplicating the playbook for.
   For example, for a Nutrition Assistance benefit program, enter **Nutrition Assistance**.
5. Enter a brief description of the benefit program to a brief description of the benefit program.
   For example, for a Nutrition Assistance benefit program, you may enter `Manage applications for the nutrition assistance benefit program`.
6. Select **Duplicate**.
7. Once the playbook has been created, select **Board view** to open a view of the Playbook's stages and activities.
8. Review the playbook's stages and activities and make changes as needed.
   By default, the Social Benefits Playbook Packaged Application has four stages: Intake, Review, Process, and Decision. All intake activities are available for constituents to complete on the Government Service Portal.
9. Select the More Actions icon (three dots down icon) next to each activity, then select **Configure subflow in Flow Designer**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

10. Review the subflows that power each activity, and make changes as needed.
    A subflow is a sequence of reusable actions and data inputs. Each default playbook activity in the Social Benefits Playbook Packaged Application has a default corresponding subflow.
11. Select **Activate** once you have made any changes.

Configure the playbook record generator for a social benefit program in Social Benefits Playbook

Configure the record generator for a benefit program.

About this task
Playbooks require a record to be created or updated before a process can start.

Before you begin
Role required: admin

Procedure
1. Navigate to **All** > **Record Generators**.
2. Select **New**.
3. On the form, fill in the fields.

Record Generator form field	Description
Table	Social Benefit Case
Process Definition	Enter the name of the social benefit program. For example, for a Nutrition Assistance benefit program, enter **Nutrition Assistance**.
Create Record Activity Nam	
Create Record Form View	recordgenerator
Template Fields: Product	Enter the name of the social benefit program. For example, for a Nutrition Assistance benefit program, enter **Nutrition Assistance**.
Template Fields: Service	Enter the service being provided for the social benefit program. For example, for a Nutrition Assistance benefit program, enter **Apply for Nutrition Assistance**.

4. Select **Submit**.

Result
A new record generator has been created. This will capture details of.

Create a catalog item for a social benefit program

Create a playbook content item so that users can navigate to the Nutrition Assistance application from the service catalog on the Government Service Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task
Playbooks require a record to be created or updated before a process can start.

Before you begin
Role required: admin

Procedure
1. Navigate to **All** > **Playbook Experience** > **Playbook Content Items**.
2. Select **New**.
3. On the form, fill in the fields.

Playbook Content Item form field	Description
Name	
Catalogs	
Category	
Short Description	
Table	Social Benefit Case
Playbook Experience	
Playbook Experience Record Generator	Enter `sn_gsm_social_benefits_case`.
Portal Page	
Title	

4. Select **Submit**.
5. Select the newly created content item.
6. In the **Available For** related list, select **Edit...**.
7. Select **SNC External** in the Collection list, then select **>** to add it to the Available For list.
8. Select **Save**.
9. In the **Not Available For** related list, select **Edit...**.
10. Select **SNC External** in the Collection list, then select **<** to remove it from the Not Available For list.
11. Select **Save**, then select **Update**.

Result
A catalog item has been created and can now be accessed by constituents using the Government Service Portal once it is published. To verify that the content item was created, navigate to the Government Service Portal and select **Services** > **Social Benefits** and verify the playbook content item displays in the catalog.

What to do next
Update the service definition for this playbook duplicate to include the record generator for this social benefit program by navigating to **All** > **Customer Service** > **Administration** > **Service Definitions**, and entering `sn_gsm_social_benefits_case` in the record generator field. For more information on how to create and update service definitions for social benefits, see .

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure the benefit summary for a social benefits program in Social Benefits Playbook

Set up a benefit summary for a social benefits program using flows in Workflow Studio

Duplicate and configure a benefit summary flow

Duplicate the flow.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > *Workflow Studio*, and select **Flows**.
2. Select and open the **Social Benefits – Benefit Summary Calculation – TEMPLATE** flow.
3. Select the More actions icon (...) button and then select **Copy flow**.
4. Update the **New flow name** field to reflect the calculation for a particular product model/ benefit.
   For example, for a nutrition assistance program, enter **Nutrition Assistance – Benefit Summary Calculation**.
5. Select **Social Benefits Playbook** in the application dropdown.
6. Select **Copy**.
   The flow is now copied. Next, create an expense flow variable to set and retrieve expense values throughout the flow.
7. Select the **More actions** icon (...), then select **Flow Variables**.
8. Select the plus (grey plus with circle) icon.
9. On the Flow Variables form, fill in the fields.

Flow Variables form fields	Description
Label	expenseTotal
Name	expensetotal
Type	Floating Point Number

10. Select **Save**.

Result

The flow has been duplicated and configured.

What to do next

Build a benefit summary for a nutrition assistance program Leverage reusable actions and flow variables to develop a benefit summary calculation. For more information on how to do this, see .

Create flow variables

Create flow variables.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > *Workflow Studio*, and select **Flows**.
2. Select and open the **Social Benefits – Benefit Summary Calculation – TEMPLATE** flow.
3. Select the More actions icon (...) button and then select **Copy flow**.
4. Update the **New flow name** field to reflect the calculation for a particular product model/ benefit.
   For example, for a nutrition assistance program, enter **Nutrition Assistance – Benefit Summary Calculation**.
5. Select **Social Benefits Playbook** in the application dropdown.
6. Select **Copy**.
   The flow is now copied. Next, create an expense flow variable to set and retrieve expense values throughout the flow.
7. Select the **More actions** icon (...), then select **Flow Variables**.
8. Select the plus (grey plus with circle) icon.
9. On the Flow Variables form, fill in the fields.

Flow Variables form fields	Description
Label	expenseTotal
Name	expensetotal
Type	Floating Point Number

10. Select **Save**.

Result
The flow has been duplicated and configured.

What to do next
Build a benefit summary for a nutrition assistance program Leverage reusable actions and flow variables to develop a benefit summary calculation. For more information on how to do this, see .

Configure Eligibility Rules Engine in Social Benefits Playbook

The eligibility criteria in Social Benefits Playbook allows an agent to confirm whether an applicant is eligible for the benefit program being requested.

This section provides information for setting up PaCE (Policy as Code Engine) and using it within the Social Benefits Playbook. Eligibility policies are established by defining, testing, and publishing eligibility policies in the policy management home, mapping published policies to one or more benefit type(s), and updating existing policies as laws and regulations change.

The eligibility criteria in the Social Benefits Playbook allow an agent to confirm whether an applicant is eligible for the specific benefit program requested. The playbooks use eligibility criteria, a series of questions posed to an applicant, to determine whether they are eligible to apply for a benefit program. Using a set eligibility criterion for the Playbooks may aid in deflecting applications in which the applicant is not eligible or qualified to obtain a benefit.

Eligibility criteria are established by performing the following three activities:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Creating a checklist template for the benefit program class
- Adding the eligibility checklist to the benefit program record producer
- Mapping it to the respective benefit program class

If the applicant fulfills all the eligibility criteria, then the agent can proceed in creating a case for the applicant. If the applicant does not fulfill at least one of the eligibility criteria, an agent cannot proceed in creating a case for the applicant.

Configure the Preliminary Verification Checklist UI in Social Benefits Playbook

Configure the preliminary verification checklist to determine if an applicant is eligible to begin an application for one or more social benefits.

About this task

Create a pre-screener so constituents can be provided with an understanding of their potential eligibility, before they begin the application.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **System Definition** > **Decision Tables**.
2. Select the **Social Benefits Preliminary Verification** table by selecting the label.
3. Select **Create Draft**.
4. Under Inputs, enter one or more labels for your desired verification questions, and select **String** as Type.

   By default, inputs are provided. Customers and implementors have the flexibility to add and remove inputs as needed.

5. Add the necessary filter conditions using the condition builder.
   These conditions determine the outcome of the policy.
6. Select **Add condition column** for the input.
7. On the dialog pop up, verify that the Default operator is set to **is**.
8. Select **Done**.
9. Add a condition column for each input above by selecting the **Add** () icon.
10. Use the dropdown to set what combination of answers will yield an approval or denial.
11. Select **Save**.
    more steps
12. At the modal pop-up, select **Publish**.

Result

The questions are shown on the first page of the Government Service Portal intake page.

Define Eligibility Questions in Social Benefits Playbook

Configure the eligibility criteria questions for users beginning an application for social benefits.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Service Catalog** > **Catalog Variables** > **Variables Sets**.
2. In the Variable Set list view, select **New**.
3. Select **Single-Row Variable Set**.
4. Enter the desired title and internal name and select **Submit**.
5. In the list, locate and open the newly created Variable Set.
6. In the **Variables** related list, select **New** to create a variable for each eligibility question.
7. Select **Yes/No** as the variable type.
8. Repeat steps 6-7 until a variable is created for each eligibility question.
9. Create a variable with the name **Eligible**, and enter **Yes/No** in the Question field.
10. Select **Yes/No** as the variable type.
11. In the **Catalog UI Policies** related list, select **New**.
12. Enter a short description for the policy.
13. Navigate to the **When to Apply** tab.
14. Add a catalog condition to the UI policy for each eligibility question, and set the condition to **is Yes**.
15. Navigate to the **Script** tab, and add the following scripts to the True and False conditions.
16. Select **Submit**.
17. Navigate to#**All** > **Service Catalog** > **Catalog Definition** > **Record Producers**.
18. Locate the License/Permit Record Producer and open the record.
19. Navigate to the **Variable Sets** tab and then select **Edit**.
20. Locate the Variable Set created for the eligibility criteria and move it to the variable sets list by selecting the right arrow button.
21. Select **Save**.

Result

The eligibility criteria questions are now defined and can be used to determine if a constituent is eligible to begin a social benefits application.


Configure Eligibility Rules Engine Policies in Social Benefits Playbook

Use the Social Benefits Playbook Eligibility Rules Engine, powered by Policy as Code Engine (PaCE), to manage the life cycle of a policy and create, update, review, and execute policies.

Agencies administering social benefit programs must ensure that applicants meet certain eligibility conditions before receiving benefits. With the Social Benefits Playbook Eligibility Framework, agencies can apply a low code approach to eligibility rule creation and management. This enables agencies to manage a variety of rules, from simple to complex, across multiple programs and with ease.

Define and manage your eligibility rules engine policies in a single management console, the Policy Management Home in CSM Configurable Workspace. In the Policy Home of the CSM Configurable Workspace, you can create, remove, and update the policies used for determining eligibility for an application routed through the Social Benefits Playbook.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

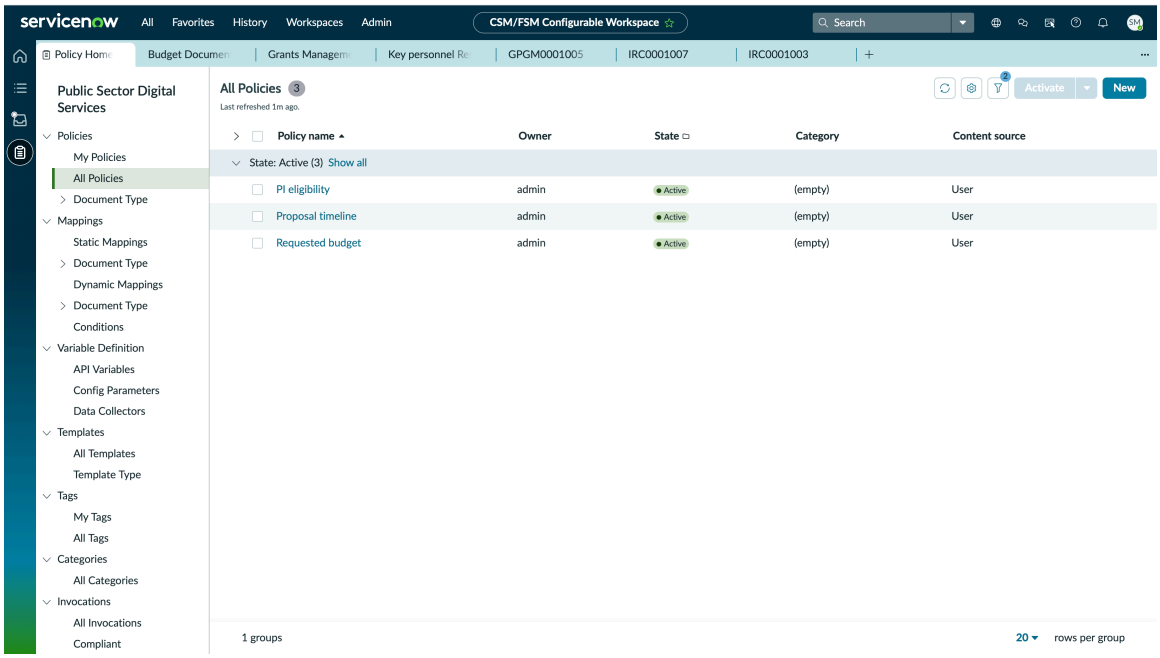

PaCE is a scalable workspace that allows you to set up the foundational elements of the Public Sector Eligibility Framework, use data collectors to create complex policies, save policies as a template to make future policy creation easier, and use config parameters to create reusable policies that can be applied across multiple benefit programs.

Here, you can:

- Create policies.
- Review existing policies.
- Assess and implement changes to each policy.
- Determine if a policy should be used as the template for another policy.
- Understand why a policy may not be working as expected.

You can create any number of policies, which can be updated as required.

Create an eligibility policy using the Social Benefits Playbook Policy as Code Engine (PaCE) Eligibility Rules Engine

Create an eligibility policy using Social Benefits Playbook Eligibility Rules Engine to model eligibility rules that can be used to evaluate social benefit cases.

About this task

Use Policy as Code Engine (PaCE) policies to build out the logic that will determine eligibility and benefits. Policies can be saved as templates to quick-start future policy creation. You can create a policy from scratch using Policy Management, and define the logic for that policy using the Policy Builder tool. Policy logic is a set of conditions that is used for determining whether or not an applicant is eligible for one or more of the social benefit programs offered by your agency. You can set conditions for the policy using the condition fields.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Select **All Policies** > **New**.
3. Select **New blank policy** to start from a blank policy, or select from the existing policy templates.
4. Select **Create**.
5. On the **Create New Policy** form, fill in the fields.

Create New Policy form

Field	Description
Policy name	The name of the policy. **Note:** The policy name must be unique, and is used as the identifier of the policy.
Category	Enables you to group and manage policies more efficiently.
Created	Date and time when the policy was created. Auto-populated.
Updated	Date and time when the policy was updated. Auto-populated.
Description	Additional details for this policy.

6. Select **Save**.
   The newly created policy contains the following tabs:

Tab name	Description
Details	Displays the details of the policy, including policy name, category, date created, and a description.
Policy builder	When you create a policy, a draft policy version is created, and must be published before it is current and can be used. Each policy version contains version metadata, a policy script, and variable input definitions, all of which can be modified. Under the **Policy builder** tab, you can: ○ Edit a policy version. **Note:** Published policies cannot be edited. To edit a published policy, select **Create a copy**. ○ View version details ○ Create a new version

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Tab name	Description
	○ Switch from low-code to the code editor ○ Save the policy as a template ○ Compare versions ○ Duplicate policy versions For more details, see Manage PaCE policy versions. **Note:** You must publish a policy version to make it current before it can be used.
Version management	Displays previous versions of the policy. You can also create a new version of the policy.
Mappings	Enables you to define the benefit model to which the policy is to be mapped.
Executions	Enables you to review the execution activity for the policy.

7. Select **Policy Builder** > **Record References**, then select **Add** to add variables for the policy.
8. On the **Record Reference** form, fill in the fields.

Record Reference Field	Description
Label	
Name	
Table	

9. To set qualifier conditions for the policy, select **New condition set**.

If and else if statement fields

Field	Description
Condition description	Description of the field.
Source	Variable you want to source for the condition.
Operator	List of operators to filter the source for the condition. The list changes depending on the source selected.
Value	Value to enter text. Select the Data picker icon to concatenate multiple text strings with multiple data pills to select a variable for the log. **Note:** If your Source is choice, you will be unable to select multiple data pills.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

10. **Optional:** Add a dependent condition by selecting **or** or **and** next to the condition.

Then and else statement fields

Field	Description
Decision	Decision to determine if the policy is **Compliant** or **Non-compliant**.
Log level	Level of the log.
Log message	Log message field to enter text or select the Data picker icon to concatenate multiple text strings with multiple data pills to select a variable for the log.
Output type	Output type of the log. You can select the plus icon to add multiple output types or the minus icon to delete the output type.
Data	Data field to enter text. Select the Data picker icon to concatenate multiple text strings with multiple data pills to select a variable for the log.

11. Select **Save**.
12. Do one of the following.
    - To publish this eligibility policy for immediate use evaluating social benefits applications:
      a. Select **Publish**.
      b. Select **Activate this policy** then select **Publish without testing**.
      c. Verify that the state of the policy has changed to **Current**.

      Your eligibility policy is now published and can be used to evaluate any active Social Benefits cases. Verify the policy appears in the Policy Home by navigating to **Policy Home** in the CSM Configurable Workspace sidebar, and selecting**Policies** > **All Policies**.
    - To save this policy as a template for future use:
      a. Select **Save as Template** > **New Template**.
      b. On the form, fill in the fields.

Policy Template form	Description
Name	Primary Applicant
Template Type	Data Source
Description	Predefined data source for applicant information

      c. Select **Save**

      Your policy template has been created, and can be used to quick-start future policy creation. For more information on creating PaCE policy templates, see Create an eligibility

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

policy template. For more information on creating a new PaCE policy from a template, see Create a PaCE Eligibility Policy from a template.

.

Result

An eligibility policy is now created, and is ready to be mapped to one of more benefits models of the Social Benefits Playbook. See Map an PaCE eligibility policy to a benefit model using Social Benefits Playbook Eligibility Framework for information on how to map the published policy to a specific benefit.

Create an eligibility policy template

Create eligibility policy templates for the Social Benefits Playbook policy forms that you use frequently.

About this task

You can save some policies as templates to quick start the creation of other policies.

Before you begin

Role required: admin

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Navigate to **Templates** > **All Templates**.
3. Select **New**.
4. In the Create New Template form, fill in the fields.

Create New Template form

Field	Description
Name	Name of the policy template.
Template type	Template type organized by category. Template types enable you to select a category, if you have multiple types of policy templates. You can create a template type by following these steps: **a.** Navigate to **Templates** > **Template Type**. **b.** Select **New**. **c.** Fill in the **Name** and **Description** field. **d.** Select **Save**. The type can be selected from the **Template type** field.
Description	Additional details for this template.
Is low code	Select this check box if the policy template will be written in low-code.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: You can switch to the code editor from low-code when you create the conditions, but you'll be unable to switch back to low-code.
Updated	Date and time when the policy template was updated.
Updated by	User who updated the policy template.
Created	Date and time when the policy template was created.

5. Select **Save**.
   New templates are inactive by default. Select the inactive filter box on the new policy page to view the inactive template.
6. Select the **Template Builder** tab and fill in the conditions in the Policy logic section, then select **Save**.
   For more information about the parameters and condition fields, see Passing parameters to PaCE policies and Policy logic condition fields.

What to do next
Before you activate your template, you can create a policy to test the template.

1. Navigate to **Policies** > **My Policies**.
2. Select **New**.
3. Select **Preview** to verify the information is correct.
4. Select **Save**.
5. Select the template that you wish to create a policy with, then select **Create**.
6. Fill in the fields, then select **Save**.
7. Select the new draft of the policy and select the **Test Playground** tab to test the policy.
8. Navigate back to **Templates** > **All Templates**. Select the template that you tested, then **Activate**.

Note:
Updating a template won't affect policies created previously with that template.

Activate a Pace policy template

Before you begin
Role required: admin

Procedure
1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Select **Templates** > **All Templates**.
3. Select the desired template.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Select **Activate**.
5. On the **Activate Template** pop-up modal, select **Activate**.

Create a PaCE Eligibility Policy from a template

Use an existing policy template created to quick-start the creation of a new eligibility policy with a similar set of data sources.

About this task

Use an existing policy template created to quick-start the creation of a new eligibility policy with a similar set of data sources.

Before you begin

Ensure the template is activated before. For more information on activating a policy template, see Activate a Pace policy template.

Role required: admin

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home** and select **All Policies**.
2. Select **New**.
3. Select the desired template.
4. Update the policy details with the details of the policy you are creating.
5. Select the **Policy Builder** tab.
6. On the **If** form, fill in the fields.
7. On the **Or** form, fill in the fields.
8. On the **Then** form, fill in the fields.
9. Select **Add else**, and fill in the fields.
10. Select **Save**.
11. Select **Publish**, and on the pop-up modal, select the checkbox for **Activate this Policy**, then **Publish without testing** to confirm activation of the policy.

Result

The policy is now activated and can be used to evaluate eligibility for any open Social Benefits case. A version of the policy should appear in the Version Management tab, as will any subsequent updates to the policy. You can publish any version of the policy at any time. For more information on PaCE policy version control, see Manage PaCE policy versions.

Map an PaCE eligibility policy to a benefit model using Social Benefits Playbook Eligibility Framework

For a eligibility policy to be invoked correctly, it must be mapped to an existing benefit model. Map a published eligibility policy to one or more of the social benefit types that your agency offers.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Select **Mappings** > **Static Mappings** > **New**.
3. Select the social benefit model that you wish to map to from the dropdown.
   Objects available for mapping are displayed.
4. Select the policy that you wish to map the social benefit model to.

Result

The newly created mapping is valid and active, and the mapping input is added to the list of policy mappings.

Update an eligibility policy in the Social Benefits Eligibility Framework Engine

Update an eligibility policy in the Social Benefits Eligibility Framework Engine.

Before you begin

Role required: admin

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home**.
2. Select **All Policies**, and select the policy name.
3. Do one of the following, depending on what information you want to update.

Update a policy logic in the Social Benefits Eligibility Framework Engine

Make changes to the policy logic in the Social Benefits Eligibility Framework Engine. The Policy Builder tab allows an admin to test new logic parameters through the test playground.

Before you begin

Role required: admin

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home** and select **All Policies**.
2. Select the policy name, and select the **Policy Builder** tab.
3. Select **Create a copy** to create a new version of the existing policy that can be updated accordingly.
   A new draft is created that changes can be appended to.
4. Update the value or condition you wish to change, or add a new piece of logic to the eligibility policy.
5. Select the Test Playground icon  in the contextual side panel to test the policy.
6. Select the parameters of the policy logic and select **Run Test**.
7. Review the Output log to ensure there are no issues or errors introduced by the new parameters.
8. Select **Publish**.
9. Select **Publish** again, if prompted.
   The previous version of the policy is archived, and the newly published version is made the current production version.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Update policy mapping in the Social Benefits Eligibility Framework Engine

You can edit the mapping settings that map a policy to a benefit model.

Before you begin
Role required: admin

Procedure

1. From the CSM Configurable Workspace sidebar, navigate to the **Policy Home** and select **All Policies**.
2. Select the policy name for the policy that you want to update, and select the **Mappings** tab.
3. Select the Mapping ID in the Input field.
4. In the displayed mapping input form, edit the desired details, and select **Save**.
5. **Optional:** Select **Add** to add a new benefit model to the list of mappings for the policy.

Configure disclaimers, terms and conditions, or other point-in-time content for a social benefit program in Social Benefits Playbook

Establish point-in-time content, such as disclaimers, which are crucial for the Social Benefits Playbook Sign and Submit Playbook Activity.

About this task
Create point in time content, such as disclaimers, so that you can provide constituents an opportunity to make attestations before signing the form. Disclaimer information is stored in the 'Point in time content' table (sn_svc_appl_info_pitc).

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Constituent Service** > **Point in Time Content**.
2. Select **New**.
3. On the form, fill in the fields.

Title	Disclaimer for [Social Benefit Program Name]
Table	Social Benefit Case
Field Name	Disclaimer
Product	Social Benefit Program Name
Service Definition	Social Benefit Program service definition
Content	I understand that by signing this application under penalty of perjury (making false statements), that: ○ I read or had read to me, the information in this application and my answers to the questions in this application. ○ My answers to the questions are true and complete to the best of my knowledge.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

	○ Any answers I may give throughout the application process will be true and complete to the best of my knowledge. ○ I read, or had read to me, the Program Rules and Penalties. ○ I understand that giving false or misleading statements or misrepresenting, hiding, or withholding facts to establish eligibility is fraud and that I may be penalized under federal law if I provide false or untrue information. Fraud can cause a criminal case to be filed against me, and/or I may be barred for a period (or life) from receiving benefits and cash assistance. ○ I understand that identity information for household members applying for benefits may be shared with the appropriate government agencies as federal law requires.

4. Right select the header to open the context menu, then select **Save**.
5. Select **Publish**, then select **Update**.

Result
To test a playbook, see Using Social Benefits Playbook

Configure automatic cancellation for draft cases in Social Benefits Playbook

An admin can configure auto-cancellation of Social Benefits Playbook cases that remain in the draft state for longer than a set period of time. The number of days that the case can remain in the draft state before it is canceled can be configured by an admin. The default value is five days.

About this task

Before you begin
Role required: admin

Procedure
1. Navigate to **All** > **System UI** > **Script Includes** and search for the `SocialBenefitsConstants` record.
2. Select the record to open it.
3. **Optional:** Switch to the Social Benefits Playbook application to edit the record, if prompted.
4. Locate the `SocialBenefitsConstants.SOCIAL_BENEFITS_MODELS_ARRAY = [` function in the script.
5. Open a separate tab in your instance.
6. In the navigation bar, enter `cmdb_model.list` to display a list of all product models in Public Sector Digital Services playbooks.
7. Right-click on the name of the desired product model record in the Social Benefits Playbook, and in the context menu, select **Copy sys_id**.
   For example, to close all draft applications submitted for Unemployment Insurance, right click the Unemployment Insurance record and copy the sys_id.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

8. Paste the copied sys_id(s) into the `SocialBenefitsConstants.SOCIAL_BENEFITS_MODELS_ARRAY = [` function, adding more as needed.
9. Right click on the top menu bar, and in the context menu, select **Save**.
10. **Optional:** Navigate to **All** > **System Properties** > **All** and search for the `sn_gsm_soc_bnfts.sb_cancel_draft_state` record.
11. **Optional:** Switch to the Social Benefits Playbook application to edit the record, if prompted.
12. **Optional:** Change the number in the **Value** field to set the number of days that a case can remain in the draft state before cancellation, and select **Update**.

Result

The Social Benefits Playbook is now configured to auto-cancel any draft cases that have remained in the draft state for more than X number of days.

Install and configure the License and Permit Playbook application

Install the License and Permit Playbook application, which enables public sector end users to submit and track license and permit requests and provides government agents with a pre-defined process for handling and resolving these requests. You can then configure the features available for submitting requests and routing requests to agents.

As a user with the admin role, complete the following configuration tasks to set up the License and Permit Playbook, after you install the Public Sector Digital Services Core application.

Configuration tasks for License and Permit Playbook

Task	Description
Install License and Permit Playbook for Public Sector Digital Services	Install License and Permit Playbook (com.sn_public_sector_digital_services_core) from the ServiceNow® Store.
Configure service definition catalog items for License and Permit Playbook application	The Services Offered and Services Received tables have been migrated into the Service Definition table. All Services Offered data must be converted into individual Service Definitions. For more information, see Services Offered and Services Received Migration Guidance.
Enable public sector end users to create a License or Permit request using Virtual Agent	Use Virtual Agent Designer to publish the pre-built conversation topic, **Start a License/ Permit Application**, which enables end users to submit a license or permit request using the Virtual Agent chatbot. For more information, see Configure Virtual Agent for License and Permit Playbook.
Automatically route license and permit requests using Advanced Work Assignment	Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign license and permit requests to designated agents.
Configure License and Permit Eligibility Framework in License and Permit Playbook	Configure the pre-eligibility criteria to allow agents to confirm whether an applicant is eligible for the specific license or permit requested.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configuration tasks for License and Permit Playbook (continued)

Task	Description
Configure decision tables for License and Permit Playbook	Use decisions tables to simplify the pricing configuration of a license or permit request that depends on multiple factors. Decision tables provide a single point where you can create, view, and modify pricing and dependent attributes.
Create Document Templates for License and Permit Playbook	Use the Document Templates application to generate templates for various types of Licenses and Permits issued through the License and Permit Playbook.

Install License and Permit Playbook for Public Sector Digital Services

You can install the License and Permit Playbook application (sn_gsm_lic_prmt) if you have the admin role.The application includes demo data and installs related ServiceNow® Store applications and plug-ins if they aren't already installed.

Before you begin

- Confirm that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Certain features in the License and Permit Playbook application are available based on your ServiceNow entitlements and may require installation of other ServiceNow applications and activation of specific plug-ins.

  Note:
  Install the Playbooks for Customer Service Management application to enable the playbook experience.

- Review the License and Permit Playbook application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin

About this task

The License and Permit Request [sn_gsm_license_permit_case] table is installed with License and Permit Playbook.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the License and Permit Playbook application (sn_gsm_lic_prmt) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   In the list next to the **Install** button, the versions available to you are displayed.
3. Select a version from the list and select **Install**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

In the Review Installation Details dialog box, any dependencies installed with your application are listed.

4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are the sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
6. Select **Install**.

Configure Virtual Agent for License and Permit Playbook

The License and Permit Playbook includes Virtual Agent (VA) capabilities. Virtual Agent functionality allows constituents to serve themselves by engaging with a messaging interface, featuring pre-built conversations powered by artificial intelligence. Constituents can utilize the Virtual Agent to initiate new license/permit applications, access existing applications, check application status, and more.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Agent Chat** > **GSP Chat**, and set the status to **Active**.
2. Navigate to **All** > **Virtual Agent**.
3. Duplicate the **Prompt License/Permit**, **Update License/Permit Case**, and **Create License Permit Case** topic blocks.
4. Set the duplicated versions of the **Prompt License/Permit**, **Update License/Permit Case**, and **Create License Permit Case** topic blocks to **Active**.
5. Set the **Start a License Permit License Permit Application** topic block to active.
6. Open the duplicated version of the **Prompt License/Permit** topic block, and select the **License/Permit Products** component.
7. Modify the node name to the preferred text.
8. Select the script icon to open the editor.
9. Modify the table name to the preferred case type within the script.
10. Select **Save**.

Extend the License and Permit Base Case

As an admin, you can further extend the License and Permit install base case to define specific license/permit items received classes.

About this task
Licenses and permits are modeled as products, and for approved applications, the license or permit instances are generated and recorded in specific install base item extensions, referred to as Items Received. An admin may need to extend the base case in License and Permit Playbook to implement specific license and permit case application types with varying eligibility and application questions and combinations that may cause the License and Permit Case (sn_gsm_license_permit_case) table to extend beyond the 1000 column limit.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Select License and Permit Playbook as the application scope when prompted.

Role required: admin

Procedure

1. Review the legacy permit application's attributes and pre-determine the attributes to be created on the extended case type.
2. Navigate to **All** > **System Definition** > **Tables** and select **New**.
3. Enter the name of the license or permit for which new cases will be created.

   Note:
   The value in the Name field will be auto-populated based on the value entered in the Label field.

4. Select the License and Permit Case value in the Extends table field.
5. Select **Application Access** and ensure the **Can read**, **Can create**, **Can update** and **Can delete** checkboxes are selected.
6. Select **Save** in the record header context menu.
7. Select **New** under the Columns tab to add additional fields relevant to the license/permit application.
8. Enter a value in the Column label field, and select options for the other column-level attributes.
9. On the form, fill in the fields, adding new columns for each question you wish to list on the license/permit application.

   For example, application questions on a commercial fishing permit would include a vessel name, the vessel's length, the boat registration number, the vessel's home port, etc.

   Note:
   Complex inputs such as lists of information can be captured in a JSON field in the case type extension, or in custom defined tables that reference to the case type extension.

10. Select **Update**.

Configure service definition catalog items for License and Permit Playbook application

Create a service definition for use with the License and Permit Playbook in Public Sector Digital Services.

Before you begin

Service definitions are records used to store details about a service that is available to end customers. You can create service definitions for each license/permit service offered by your government agency.

Important:
After upgrade to Public Sector Digital Services v8.0, you will now be required to create a Service Definition for every previous Service Offered record. The deprecation of Services Offered means that Service Definitions now must be created for every Service that your agency offers. For more information, see Services Offered and Services Received Migration Guidance.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Service Catalog** > **Catalog Definitions** > **Maintain Categories** > **Licenses/ Permits**.
2. Select **Permits** or **Licenses**, depending on which category you wish to add a catalog item to.
3. **Optional:** Switch to the Public Sector Digital Services Core application, if prompted.
4. Under the Catalog item related list, select **New**.
5. On the form, fill in the fields.

Public Services Service Catalog form

Field	Description
Name	Name of the public service.
Catalog	Product category that the service falls under. If blank, select Government Service.
Category	Indicates the type of public service. If blank, select either **Permits** or **Licenses**, depending on which category you wish to add a catalog item to.
Application	Application scope of the service. If blank, select License and Permit Playbook.
Status	Status of the public service. Mapped in the active field as: ○ Available = true ○ Not available = false
Short description	Short description of the public service.
Description	Description of the public service.

6. Select **Submit**.
   Your catalog item is created and ready for use by constituents submitting cases through the Government Service Portal, or agents creating a case from scratch in the CSM Configurable Workspace.

Configure License and Permit Eligibility Framework in License and Permit Playbook

The eligibility criteria in License and Permit Playbook allows an agent to confirm whether an applicant is eligible for the specific license or permit requested.

The License and Permit Playbook uses eligibility criteria, a series of questions posed to an applicant, to determine whether they are eligible to apply for a license or permit. Using a set eligibility criteria for applications routed through the License and Permit Playbook may aid in deflecting applications in which the applicant is not eligible to obtain a license or permit.

Pre-Eligibility criteria is established by performing the following activities:

1. Creating a Pre-Eligibility Decision Table. For more information, see Create a Pre-Eligibility Decision Table in License and Permit Playbook.
2. Updating the Public Sector Digital Services Pre-Eligibility Configuration decision table

For each new License & Permit product, a new pre-eligibility decision table must be created.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If the applicant fulfills all the eligibility criteria, then the agent can proceed in creating a case for the applicant. If the applicant does not fulfill at least one of the eligibility criteria, an agent cannot proceed in creating a case for the applicant.

Configure decision tables for License and Permit Playbook

Use decision tables to simplify the pricing configuration of a license or permit request that depends on multiple factors. Decision tables provide a single point where you can create, view, and modify pricing and dependent attributes.

In decision tables, each factor is a decision input. For example, if your agency is setting the price of a fishing permit, these inputs might include the location where the permit is being requested, the type of fish (one or multiple) that a fishing permit is being requested for, and the size of the fishing boat. Using a decision table can allow agents to present pricing and endorsements in a straightforward manner, even when it depends on multiple factors.

Create a Pre-Eligibility Decision Table in License and Permit Playbook

The License and Permit Playbook incorporates the use of pre-eligibility criteria, a series of questions that may be posed to an applicant to determine whether they are eligible to apply for a license/permit. This aims to deflect applications in which the applicant is not eligible to obtain a license/permit.

About this task

The Pre-Eligibility Configuration decision table is used to map pre-eligibility questions to a license/permit type.

Before you begin

Role required: admin

About this task

Pre-eligibility criteria is established by performing the following activities:

- Configuring a new pre-eligibility decision table
- Update the Public Sector Digital Services Pre-Eligibility Configuration decision table

Procedure

1. To configure a new pre-eligibility decision table, Navigate to **All** > **Workflow Studio**.
2. Select **New**.
3. Select **Decision Table**.
4. On the form, fill in the fields with the following information:

Field	Entry
Decision Table	Drivers License Pre-Eligibility
Application	License and Permit Playbook
Accessible from	All Application Scopes
Draft Authoring	Selected

5. Select **Build decision table**.
6. Select **Add an input**.
7. On the form, fill in the fields with the following information:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Entry
Label	applicant_over_age_18
Type	String

8. Repeat steps 6-7 for all pre-eligibility questions that you wish to configure to appear on the first activity of the playbook.
9. Select **Add condition column**.

   Condition columns are conditions that are compared against the input values to determine the results of a decision table.
10. On the form, fill in the fields with the following information:

Field	Entry
Condition Column Label	applicant_over_age_18
Input	applicant_over_age_18
Default Operator	**is**

Note:

By default, the operator is set to **is**, meaning an equal comparison of the values provided by the end user against the inputs configured in step 12 below. Other operators can be used depending on how the eligibility will be determined against the given input.

11. Select **Done**.
12. Select the field below the newly created condition column, and enter the value **Yes** or **No** depending on the expected response for eligibility.
13. Select the icon and select **Add condition column**.
14. Repeat steps 10-13 for all input values that determine an applicant's eligibility.
15. Select the icon and select **Add result column**.
16. On the form, fill in the fields with the following information:

Field	Entry
Result Column Label	Eligibility
Result Type	True/False

17. Select **Done**.
18. Set the Eligibility result field to be **True** if all conditions are met, and select **OK**.
19. Select **Save**, then select **Publish**.
20. Select **Publish** in the prompt.
    The status of your decision table should now be set to **Active**.
21. To update the Public Sector Digital Services pre-eligibility configuration decision table, navigate to **All** > **Workflow Studio**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

22. Select **Decision tables** > **Public Sector Digital Services Pre-Eligibility Configuration**.
23. Select **Create Draft** to edit the table.
24. Select the icon to add a new decision row.

    This decision row maps the extended License & Permit case table with its corresponding Product Model, as well as the eligibility decision table that was created above.

25. On the form, fill in the fields with the following information:

Field	Entry	Description
Table	**sn_gsm_drivers_license_case** (or the name of the License & Permit Table that was extended from the base case)	The column name (not the column label) for the associated pre eligibility question that exists on the license and permit case table or extended table.
Product Model	Drivers License	Product model for the particular license/permit.
Description	Confirm the applicant's eligibility by answering the questions below.	The description that displays at the top of the pre-eligibility activity in the playbook.
Form Header		Shows a form header above the eligibility questions. Leave this field empty.
Error Header	Not eligible	Error header in the first playbook activity stating that the applicant is not eligible after clicking "Start Application".
Error Message	Each license/permit has certain criteria that must be met to apply. Review your answers to ensure accuracy.	Error message in the first playbook activity stating that the applicant is not eligible after clicking "Start Application".
Help URL	Link to a ServiceNow® Page	Presents a **Learn more** link within the error message if the applicant is found to be ineligible. The value in this field will be a link to a ServiceNow® page.
Eligibility	Drivers License Pre-Eligibility	The eligibility decision table created in the previous section for this particular product model. For example, Drivers License Pre-Eligibility.

26. Select **Save**, then select **Publish**.
27. Select **Publish** in the prompt.
    The status of your decision table should be set to **Active**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a pricing configuration decision table for the License and Permit Playbook

The License and Permit Playbook uses decision tables to configure pricing.

About this task

In the License and Permit Playbook, pricing is established by the following:

1. Determining the application endorsements on which fees will be based. For more information on adding pricing endorsement fields, see Add an endorsement field to a pricing configuration decision table in License and Permit Playbook.
2. Creating a decision table to capture the logic used to determine the fees charged.
3. Associating the newly created decision table to the license/permit cases. For information on how to associate a decision table with a license/permit case, see Associate a decision table with a License & Permit case type.

Each license/permit case references a specific decision table for pricing, which defines pricing based on the license/permit type and selected endorsements, and is unique to each extended License Permit Case Table.

Before you begin

Role required: admin

Procedure

1. Identify which table fields in the License and Permit record will affect the fee associated with the license or permit request.
   For example, each type of fish under the fishing permit record has a different fee associated with it. These are examples of table fields that affect the total fee associated with the permit request.
2. Navigate to **All** > **System Definition** > **Decision Tables**.
3. Select **New**.
4. Enter a name for the decision table, and ensure the application is set to License and Permit Playbook and that the table is accessible from **All Application Scopes**.
5. **Optional:** Enter a description.
6. Select **Build decision table**.
7. Select **Add** to add an input.
8. Create an input with **Case** as the label, **Reference** as the type, and **License & Permit case Extended Table** as the reference table.
9. Select **Add result column** to add the pricing column.
10. Set the column label to **Price**, and set the result type to **Currency**.
11. Select **Done**.
12. Select **Add condition column**.
13. Set the condition column label to **field**, the input to **Case**, and set the Data to evaluate to **Field**.
14. Select the dropdown menu under Field, and select the field that is associated with pricing.
15. Select **Done**.
16. Select **Add New Decision Row**.
17. Select the new table cell that was added under the Field label column and ensure the operator selected is **is**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If the field type is choice, the input value cannot be “None”. Select the appropriate choice input from the dropdown menu. If the field type is true/false, the input value should be **true**.

18. Select the new table cell that was added under the Price column, and enter the price associated with the field value.
    If the field type is **choice**, repeat steps 15-17 for each option of the choice.
19. **Optional:** Select the plus icon that appears below Results, and choose **Add Condition Column** to add another pricing field.
    Repeat until all pricing fields or other endorsement fields are added. For more information on endorsements, see Pricing endorsements in License and Permit Playbook.
20. Select **Save** to save the decision table, then select **Publish**.

Result

The decision table is now created and can be associated with the License and Permit case type. For more information on how to do this, see Associate a decision table with a License & Permit case type.

As an admin, you can use a price adjustment definition to add adjustments to field prices based on the conditions of fields that are not price fields, such as residency status of the constituent for the location they are requesting in. For more information on how to add price adjustment definitions, see Add a price adjustment definition to a decision table in License and Permit Playbook.

Pricing endorsements in License and Permit Playbook

Pricing endorsements are selections made on an application that affect which fees are charged by a government agency to process and issue a license/permit.

Applicants can customize their permit by selecting one or more permit endorsements. Each endorsement represents a subtype of the main permit model, and are stored as fields in a License Permit extended table. Each endorsement maps to a specific fee in the Decision Table for Pricing.

Example of Endorsements for an Extended License Permit Case Type

An applicant can select as many endorsements as desired. Driver’s license endorsements are special permissions added to a driver’s license that allow the holder to operate specific types of vehicles or carry out specific driving-related tasks not covered under the standard license. The following table contains some examples of endorsements that can be added to the pricing decision table of a driver's license permit request case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Endorsement	Description	Price (Can be set from Decision Table)
Hazardous Materials	Allows transport of hazardous materials	$5
Tank Vehicles	Permits operation of tank trucks carrying liquid or gas.	$5
Passenger Transport	Allows transportation of passengers	$5
School Bus	Allows operation of a school bus	$5
Double/Triple Trailers	Authorizes towing of double or triple trailers	$5
HazMat and Tank Vehicles	Combines both tank vehicles and hazardous materials endorsements	$5

Add an endorsement field to a pricing configuration decision table in License and Permit Playbook

Pricing endorsements are selections made on an application that affect which fees are charged by a government agency to process and issue a license/permit. As an admin, you can add one or more pricing endorsements to an existing pricing configuration decision table.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **System Definition** > **Tables**, and select the pricing decision table.
2. Select **New** to create a new field/column.
3. On the form, fill in the fields.
   In the **Type** field, enter **True/False**.
4. Select **Save**.

Result

The pricing endorsement is now created, and can be added as a condition in the pricing decision table.

Add a price adjustment definition to a decision table in License and Permit Playbook

As an admin, you can use a price adjustment definition in the License and Permit Playbook to add adjustments to field prices based on the conditions of fields that are not price fields, such as the residency status of the constituent for the location they are requesting the permit or license in.

Before you begin

Role required: admin

About this task

A base amount can be entered and saved for each license/permit option, and can be modified from its current value to a new value based on one or more control conditions. A price adjustment definition consists of only one price field, and as an admin, you can create multiple.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **System Definition** > **Decision Tables**, and open a decision table that has been associated with a License and Permit case type.
   For information on how to associate a decision table with the case type, see Associate a decision table with a License & Permit case type.
   You should be brought to Workflow Studio.
2. Select **Add condition column**.
3. Set the Input to **case**, and set Data to evaluate to **Field**.
4. Under Field, select the field that controls the pricing for the price adjustment in question.
5. Enter the name of the aforementioned field in the condition column label, and select **Done**.
6. Repeat steps 4-6 for all price control fields.
7. Select **Add new decision row**.
8. Select the newly added cell under any of the price control columns to add control conditions.
9. Specify the control condition for that field.
   If the field type is a choice, the input value cannot be “None”. Select the appropriate condition from the dropdown.
10. Repeat steps 11-12 to add conditions for other control fields.
11. *If the price field where the adjustment applies is set to choice, enter the price choice affected.If the price field where the adjustment applies is not choice, set the value to true.*
12. Enter the adjustment price in the newly-added cell under the Price column, the price when those control conditions apply.
    If the price field is a Boolean, the value of the price field has to be set to **true**. If the price field is a choice, the value of the price field cannot be set to **none**. Enter the value of the adjustment price in the field.
13. Select **Save**, then **Close**.

Associate a decision table with a License & Permit case type

After you configure a pricing configuration decision table, associate it with the License & Permit case type to append pricing configurations to that case type table.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **System Definition** > **Decision Tables**.
   You should be brought to Workflow Studio.
2. Locate the pricing configuration decision table for the License and Permit case type, and right-click.
3. In the context menu, select **Copy sys_id**.
4. Open the **Public Sector Digital Service Endorsements Configuration** decision table and select **Create Draft**.
5. Select **Add new decision row** to add an entry for the pricing decision table.
6. On the form, fill in the fields with the following information:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Entry	Description
Table	Child Table of License Permit	
Product Model	Product model for the particular license/permit.	
Endorsements Price Config Decision Table Sys Id	Paste the Sys Id of newly created pricing decision table.	
Endorsements Fields	Table Fields used as endorsements (separated by comma)	Shows a form header above the eligibility questions. Leave this field empty.
Benefit Summary Field	benefit_summary	This field is a column in License Permit Table that stores the endorsements and it's pricing in JSON format.
Endorsements Description	Description of the endorsement options available with the license/ permit request.	This text will be displayed to the user in the **Select endorsements** playbook activity.
Fees Description	Description of the fee options associated with the license/ permit request.	This text will be displayed to the user in the **Select endorsements** playbook activity.
Options Text	Text to be displayed for Options.	This text will be displayed to the user in the **Select endorsements** playbook activity.
Fees Text	Text to be displayed for Fees.	This text will be displayed to the user in the **Select endorsements** playbook activity.

7. Select **Save**, then **Publish**.
8. Select **Publish** when prompted.

Result
The decision table is now associated with the License & Permit case type.

Create Document Templates for License and Permit Playbook

With the ServiceNow Document Templates application, you can create HTML and PDF document templates to generate standard letters or documents. You can automate and simplify the process of filling, signing, and reviewing a document online. Use the Document Templates application to generate templates for various types of Licenses and Permits that will be issued to applicants through the License and Permit Playbook.

About this task
By default, the License and Permit Playbook comes with a standard License and Permit document template, used for generating standard license or permit documents to be issued to

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

the applicant via the Government Service Portal. Use the following steps to generate additional document templates for custom license and permit class types that fall outside of the standard, default template.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Document Templates** > **All Document Templates**.
2. Select **New**.
3. Select **PDF Document Template**.
4. On the form, fill in the fields:

PDF Template form

Field	Description
Name	Name of the PDF document template.
Table	Determines where the documents are attached. Select License and Permit Case [sn_gsm_license_permit_case] to map the generated PDF to the case. Select License and Permit Install Base Item [sn_gsm_license_permit_install_base_item] to map the generated PDF fields to the Item Received.
Category	Document category in which the template is added. For License and Permit Playbook, select License and Permit.
Application	Scope of the application in which the document template is created.
State	Current state of the document template. ○ **Draft**: Indicates that the document template is not yet published. ○ **Editing**: Indicates that the document template is being edited after it has been published. ○ **Published**: Indicates that the document template can be consumed by services and cases.
User criteria	Audience criteria for this document. For example, you can create a permit intended for only Canadian residents. **Note:** When defining conditions like case sensitivity or null values, see API GlideFilter - Scoped, Global.
Start date	Date starting which the PDF document template is valid. **Start date** helps in maintaining multiple versions of same template. **Note:** Start date must be before the end date.
End date	Date until which the PDF document template is valid. **End date** helps in maintaining multiple versions of same template.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	By default, if values in **Start date** and **End date** are blank, it is implied that the template will always be valid. If you specify an end date, you must also specify a start date.
Template date format	Format in which you want the date to appear when an agent previews the document, or generates the attachment, or initiates document tasks for participants. **Note:** ○ When signing using a ServiceNow application or the AdobeSign application: If no value is selected in **Template date format**, the value specified in the **template_date_format** system property is considered. If both **Template date format** and **template_date_format** system property are empty, the value in the Date format field from agent's user profile is considered. ○ When signing using the DocuSign application: The date format selected in Signing settings in the DocuSign application is considered over **Template date format** in the configured PDF template in a ServiceNow instance.
Template language	Language in which dynamic tokens are translated when an agent previews the document, or generates the attachment, or initiates document tasks for participants. **Note:** ○ Template language is a mandatory field. The default language is none. ○ Translation feature is available only when the language plug-ins are installed on the instance.
Signing type	Option to specify the application that is used for signing or filling the document. For example, ServiceNow Sign, DocuSign or AdobeSign. **Note:** Signing types are available only when respective integration plug-ins are installed.
Attachment type	Option to upload a new document or select a document from ServiceNow Managed Documents.
Document	Option to upload the attachment of a fillable PDF for further customization. **Note:** This field appears when **Upload new document** is selected in **Attachment type**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Document revision	Option to select a document from ServiceNow Managed Documents. **Note:** This field appears when **Select from document revision** is selected in **Attachment type**.
Active	Option for enabling the PDF document template for use.
Acknowledgment text	Text that prompts the user to select a check box when submitting a filled document.
Source template	Source template from which you created a copy of current template.

5. Select **Update**.

   You must map the newly created Document Template to the corresponding Install Base Item/Items Received extension table you wish to generate the license/permit in. This is accomplished by using Document Template Mapping in Decision Tables. By default, the default License and Permit Document Template, mapped to the License and Permit Install Base table, is used to generate a standard license/permit PDF document.

6. **Optional:** Select the **Parse PDF** related link to automatically parse information and fields from the PDF, and store that information in the PDF Mapping table for reuse.

   Note:
   Parse PDF appears only for an editable PDF.

   Using **Parse PDF** will allow each PDF field to be mapped to its corresponding Mapping Field in the License and Permit install base table.

7. **Optional:** In the **PDF Template Mappings** related list, define additional PDF field mappings.

   Note:
   The **PDF Template Mappings** related list is only available for an editable PDF. See Define a PDF field mapping for more information.

8. Navigate to **Decision Management** > **Decision Builder**.
9. Open the **Document Template Mapping** table.
10. On the form, fill in the fields to add additional decision rows to configure additional Document Templates.

Document Template Mapping form

Field	Description
Document Template Category	Use this field to have multiple templates for a single Install Base Item Table. For example, you may enter **License and Permit** as the Document Template Category to map Document Templates that are different from the default template to the License and Permit category.
Table Name	Select the table that should map to the document template. For a license/permit that is to be issued to an applicant at the end of the application process,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	select the License and Permit install base item table (sn_gsm_license_permit_install_base_item).
Document Template	Indicate what Document Template will be used for the document template category and table name. Select the Document Template that was created in steps 3-5.
isPdfTemplate	Select **(value = true)** if the Document Template selected is a PDF template. Select **(value = false)** if the Document Template selected is an HTML template.

11. Select **Submit** or **Save**.
12. **Optional:** Open the **Install Base Item Table Mapping** table.
13. **Optional:** On the form, fill in the fields to configure the table in which an install base item (the license/permit that is to be issued to an applicant at the end of the application process) should be created.

    (Optional) By default, this is the License and Permit case table (sn_gsm_license_permit_case).

Install Base Item Table Mapping form

Field	Description
Table Name	Select the case table where the License and Permit request will be created. By default, this is the License and Permit case table (sn_gsm_license_permit_case).
Document Template	Indicate what Document Template will be used for the document template category and table name. Select the Document Template that was created in steps 3-5.

14. **Optional:** Select **Submit** or **Save**.

Result
After the agent makes a decision in the **Propose decision** activity of the License and Permit Playbook, the PDF generated by the Document Template is created. An agent will be able to view the generated PDFin the **Create License/Permit** activity in the **Decision** stage, and the applicant will be able to view the PDF in the portal.

Define a Product Model for License and Permit Playbook

A product model record is required in a license/permit case application.

Before you begin
Role required: admin

About this task
For a license/permit case, a product model is used to represent a specific type of license/permit. Having a specific product model can help support multiple aspects of the permitting process implementation, such as defining the product, associating multiple services with it, delivering specific product instances, enabling additional workflows, etc.

Additional fields to describe the permit product can be added if required. For example, for a drivers license, you may add a choice field for license class with choices A, B, or C, then create three records, one per class. For a commercial fishing permit, you may add a field that captures whether or not a boat inspection is required before the permit can be granted.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If there are multiple types of permits with unrelated fields, you can extend specific product model classes from the permit model base class. For example, if your agency offers bird taxidermy and wildlife import/export permits out of the same organization, consider whether you need specific permit model classes that would help define different attributes on each permit product.

Procedure

1. Navigate to **All** > **Constituent Service** > **Products** > **Permit Models**.
2. Select **New**.
3. Select **Form Header** > **Configure** > **Form Layout**.
4. Select **Edit this section in Expanded Model and Asset Classes**.
5. Select the checkbox next to the **Cost** and **Customer Visible** fields.
   These fields must be set to true in order for the constituent or businesses contact to determine their pre-eligibility.
6. Add any additional fields to collect additional information from the user for the permit model. For example, for a commercial fishing permit, you may add a field that captures whether or not a boat inspection is required before the permit can be granted.
7. On the Configuring Permit model form, fill in the fields.
8. Select **Submit**.

Configuring Playbooks-on-portal for a custom case type

As an admin, you can configure the playbooks-on-portal experience for a custom case type that extends the base License and Permit case.

Before you begin

Role required: admin

About this task

Admins can create variants of the License & Permit Playbook process to use for a custom case type.

Procedure

1. Duplicate the playbook process by navigating to **All** > **Process Automation** > **Workflow Studio**.
2. In the Playbooks list, select the **Licenses/Permits Playbook**.
3. Select the More Actions (...) menu and select **Duplicate**.
4. Fill in the **Label** field with the desired name for the playbook and add a description.
   The trigger type should be **Record Create**.
5. Select **Duplicate**.
6. Modify the playbook for the particular license use case, then select **Activate**.
7. Navigate to **All** > **Record Generators**.
8. Select **New**.
9. On the form, fill in the fields with the following:

Field	Entry
Table	License and Permit Case, or the extended License and Permit table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Entry
	This is the table the record generator will trigger for.
Process Definition	Name of the playbook created in the previous section.
Create Record Activity Name	Answer Eligibility Questions. This is the first activity in the Playbook.
Create Record Form View	LicensePermitRecordGenerator
Template Fields: Product	Drivers License
Template Fields: Service	Driver's license – New Request

10. Select **Submit**.
11. Navigate to **All** > **Customer Service** > **Administration** > **Service Definitions**.
12. Select **Drivers License – New Request** service definition.
13. Select the search icon next to the Playbook record generator.
14. Select the magnifying glass icon to open the list of playbook record generators, and select the previously-created playbook record generator for the extended case type.
15. In a new window, navigate to **All** > **Playbook Experience** > **Playbook Content Items**.
16. Select **New**.
17. On the form, fill in the fields with the following information:

Field	Entry
Name	Driver license application
Catalogs	Government Services
Category	Licenses
Short Description	Application for an individual to obtain permission to legally operate a motor vehicle on any road, freeway, or other way accessible to the public.
Table	Select the **License and Permit Case (OR the extended table created** table.
Playbook Experience	CSM Configurable Workspace
Playbook Experience Record Generator	Previously-created Record Generator
Portal Page	GSM Intake
Title	Drivers License Application

18. Select **Submit**.
19. Select the newly created Playbook Content Item.
20. Select **Edit** in the **Available For** related list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

21. Select **SNC External** from the Collections dropdown, and add it to the Available List.
22. Select **Save**.
23. Select the **Not Available For** related list, then select **Edit**.
24. Select **SNC External** and add it to the collection.
25. Select **Save**.
26. Verify the playbook content item you created displays under **Services** > **Licenses/Permits** on the Government Service Portal.

Install and configure the Information Request Playbook application

Install the Information Request Playbook application, which enables public sector end users to submit and track public record requests and provides government agents with a pre-defined process for handling and resolving these requests. You can then configure the features available for submitting requests and routing requests to agents.

As a user with the admin role, complete the following configuration tasks to set up the Information Request Playbook, after you install the Public Sector Digital Services Core application.

Configuration Tasks for Information Request Playbook

Task	Description
Install Information Request Playbook for Public Sector Digital Services	Install Information Request Playbook (com.sn_public_sector_digital_services_core) from the ServiceNow® Store.
Assign user personas, roles, and groups in Information Request Playbook	Configure personas and roles.
Automatically route service requests using Advanced Work Assignment	Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign public sector information requests to designated agents.
Configure Restricted Caller Access (RCA) privilege settings	You can use a requested RCA to grant store apps access to protected resources in the ServiceNow AI Platform® without the need to wait for the next family release. If you have the system admin or application admin role, you can review requested RCAs and approve and deny them.
#unique_189	Create a legal, review, or final review assignment agent group for the final review steps of an Information Request.
Configure the Manage documents activity UI in Information Request Playbook	Create documents, search for documents with the auto-complete name lookup, and link or unlink existing documents to a case, all from one modal within the playbook.
Configure Similar Request Documents UI in Information Request Playbook	Search documents from similar cases, preview multiple sets of documents at one time, and link or unlink documents to or from the case from one modal, without having to leave the playbook.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configuration Tasks for Information Request Playbook (continued)

Task	Description
	Configure the documents related list.
Configure Mobile Agent for Information Request Playbook	(Optional) Install the Customer Service Mobile and Information Request Playbook plugins to enable agents to view and track information requests on the Mobile Agent.
Create a test information request case using the Information Request Playbook	Verify the newly-configured playbook is working as expected by creating and resolving a new information request case using the Information Request Playbook.

Install Information Request Playbook for Public Sector Digital Services

You can install the Information Request Playbook application (sn_gsm_info_req) if you have the admin role.The application includes demo data and installs related ServiceNow® Store applications and plugins if they aren't already installed.

Before you begin

- Confirm that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Certain features in the Information Request Playbook application are available based on your ServiceNow entitlements and may require installation of other ServiceNow applications and activation of specific plugins.

> **Note:**
> Install the Playbooks for Customer Service Management application to enable the playbook experience.

- Review the Information Request Playbook application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin

About this task

The Information Request [sn_gsm_information_request] table is installed with Information Request Playbook.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Information Request Playbook application (sn_gsm_info_req) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   In the list next to the **Install** button, the versions available to you are displayed.
3. Select a version from the list and select **Install**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

In the Review Installation Details dialog box, any dependencies installed with your application are listed.

4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are the sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
6. Select **Install**.

Assign user personas, roles, and groups in Information Request Playbook

By default, the Information Request Playbook application comes with roles, personas, and responsibilities that can be assigned to existing users on the platform.

Assigning user roles

Assign roles to members of your records agency Social Benefits Playbook application so that your users can have delegated access to Social Benefits Playbook features, capabilities, and data.

There are a few guidelines when assigning roles to users:

- Determine the roles who would be working on the benefit cases for the agency, and what user would do what. For more information on the roles available in Social Benefits Playbook and to determine which makes sense for each user, see Grants Management roles and Grants Management Personas
- Create as many users as needed in your organization.

Role required: admin

To assign roles to a user within an organization:

1. Make sure a user record has been created within the organization. Navigate to **All** > **User Administration** > **Users** to create a user record, or open an existing user record.
2. In the **Roles** related list, select **Edit**.
3. In the **Collection** list, select the desired roles, and then select **Add**
4. Select **Save**.
5. Repeat as many times as needed until all desired users are added to and associated with the organization and have the desired role.

You can also create user groups and assign roles to them. Users assigned to the group inherit the roles.

Using assignment groups to create organizational teams

There are a few guidelines for creating groups:

- Create one group for administrators and assign the admin role to this group only.
- Create as many groups as needed in your agency. For example, create an case agent group for each supervisory agent team, and a larger case agents group for the case agents for the entire organization, and a group for all the supervisory agents with their manager. Assign the necessary users to those groups, and then assign the necessary role to those groups if you

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

haven't already. You can create groups first, assign a role to the group, and add users, or you can add user roles individually and then add them to the group. All users in a group will inherit the group role.

To delegate access to benefit programs and create organizational teams, you can create assignment groups.

To create a user assignment group:

1. Navigate to **All** > **User Administration** > **Group** to create group record.
2. Select a group **Name**.
3. In the **Group Members** related list, select **Edit**.
4. Select one or more names in the **Collection** list.
5. Select **Add** and **Save**.
6. Repeat as many times as needed until all desired users are added to the group.
7. In the **Roles** related list, select **Edit**.
8. Add the desired roles to the group.
9. Select **Save**.

For more information on the roles available in Social Benefits Playbook and to determine which makes sense for each user, see Social Benefits Playbook roles and #unique_153.

Configure Restricted Caller Access (RCA) privilege settings

Define cross-scope access to an application, application resource (such as an access control role, a business rule, a UI action, or a script include), or event. You can use a requested RCA to grant store apps access to protected resources in the ServiceNow AI Platform without the need to wait for the next family release.

About this task

If you have the system admin or application admin role, you can review requested RCAs and approve and deny them. You can even use these settings to allow or deny requests for access.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Case Types** > **Manage Case Types**.
2. Validate there is a record for Information Request and the short description is 'Manage requests for FOIA/public records.
3. Create a case from a list in Workspace and validate the fields are populated correctly.

Configure the Manage documents activity UI in Information Request Playbook

Configure the Manage Documents activity UI in Information Request Playbook to allow agents to view, link, or unlink documents to an information request case.

Before you begin

This task requires the Document Management [com.snc.platform_document_management] plugin to be active on your instance. If Document Management [com.snc.platform_document_management] is not active on your instance, see Activate a plugin for instructions.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Process Automation** > *Workflow Studio*.
2. Select **Information Request**.
3. Under Intake, select **Add Activity**.
4. Select **Playbooks for Customer Service Management** > **Manage Documents List**.
5. Select the edit button, and rename the action to **Manage Documents**.
6. Under When to Start, select **Immediately**.
7. Select **View All Properties** to set the trigger and edit other configurations.
8. In the top right corner of the screen, select the Advanced button to toggle it on.
   The Experience tab should now display.
9. Select **Automation**.
10. Under Record, select **Trigger- Information Request** > **Information Request Record**.
11. Under Conditions, select **State Is New**, then select Done.
12. Select Experience.
13. Under Associated table, select **Information Request**, and under Associated Record, select **Trigger- Information Request** > **Information Request Record**.
14. Under Title, select **This Activity** > **Label**.
15. Select **Done**, then **Activate**.

Result

The Manage Documents UI activity is now configured, and the modal should now display when you open a new or existing Information Request Playbook.

Configure Similar Request Documents UI in Information Request Playbook

The Similar Request Documents Activity UI uses the name and description of existing information request cases to display a list of documents associated with the current case, providing helpful information the documents used to resolve similar information requests in Information Request Playbook.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Process Automation** > *Workflow Studio*.
2. Select **Information Request**.
3. Under Intake, select **Add Activity**.
4. Select**Playbooks for Customer Service Management** > **Similar Documents**.
5. Select the edit button, and rename **Similar Documents** to **Similar Request Documents**.
6. Under When to Start, select **Immediately**.
7. Select **View All Properties** to set the trigger and edit other configurations.
8. In the top right corner of the screen, select the Advanced button to toggle it on.
   The Experience tab should now display.
9. Select **Automation**.
10. Under Record, select **Trigger- Information Request** > **Information Request Record**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

11. Under Conditions, select **State Is New**.
12. Select the Experience tab.
13. Under Associated table, select **Information Request**, and under Associated Record, select **Trigger- Information Request** > **Information Request Record**.
14. Under Related Record Encoded Query, enter**state=3**.
15. Under Title, select **This Activity** > **Label**.
16. Select **Done**, then **Activate**.

Result

The Similar Documents UI activity is now configured, and the modal should now display when you open a new or existing Information Request Playbook.

Install and configure the Service Request Playbook application

Install the Service Request Playbook application, which enables public sector users to submit and track non-emergency service requests, and provides government agents with a process for handling these requests. You can then configure the features available for submitting requests and routing requests to agents.

As a user with the admin role, complete the following configuration tasks to set up the Service Request Playbook, after you install the Public Sector Digital Services Core application.

Configuration tasks for Service Request Playbook

Task	Description
Install Service Request Playbook application	Install Service Request Playbook (com.sn_public_sector_digital_services_core) from the ServiceNow® Store.
Automatically route service requests using Advanced Work Assignment	Use the ServiceNow Advanced Work Assignment (AWA) application to route and assign public sector service requests to designated agents.
Configure Engagement Messenger for Playbooks	Configure certain Engagement Messenger settings that enable public sector end users to create and track non-emergency service requests from Engagement Messenger.
Enable public sector end users to create a service request using Virtual Agent	Use Virtual Agent Designer to publish the prebuilt conversation topic, **Create a Service Request**, which enables end users to submit a service request using the Virtual Agent chatbot.
Configure the Similar Records Activity UI in Service Request Playbook	View a list of similar requests by location, without having to search for the requests or leave the playbook.
Configure Mobile Agent for Service Request Playbook	(Optional) Install the Customer Service Mobile and Service Request Playbook plugins to enable government service agents to track non-emergency service requests on the Mobile Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Install Service Request Playbook for Public Sector Digital Services

If you have the admin role, you can install the Service Request Playbook application (sn_gsm_srvc_req).The application includes demo data and installs any related ServiceNow® Store applications and plugins that aren't already installed.

Before you begin

- Confirm that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Certain features in the Service Request Playbook application are available based on your ServiceNow entitlements and might require installation of other ServiceNow applications and activation of specific plugins.

> **Note:**
> Install the Playbooks for Customer Service Management application to enable the playbook experience.

- Review the Service Request Playbook application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin

About this task

The Service Request [sn_gsm_service_request_case] table is installed with Service Request Playbook.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Service Request Playbook application (sn_gsm_srvc_req) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you can't find the application, you might have to request it from the ServiceNow Store.

   In the list next to the **Install** button, the available versions are displayed.
3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.
4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are the sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
6. Select **Install**.

Configure a service definition for Playbooks in Public Sector Digital Services

Create a service definition for use with Playbooks in Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin

About this task
Service definitions are records used to store details about a service that is available to end customers. You can create service definitions for each public service offered by your government agency.

After upgrade to Public Sector Digital Services v8.0, Services Offered, an extension of Product Model, will no longer be used to model government services. Services Received, an extension of Sold Product, will no longer be used to model the government services that have been granted/delivered to constituents. The Service Definition table will be used to model all public services offered by governments. The following fields from the Service Offered table will be removed and replaced with Service Model fields:

- Type
- Status
- Number
- Period Start Date
- Period End Date
- Jurisdiction
- Category
- Subcategory
- Payment source

Important:
When upgrading to Vancouver, any data in the Services Offered and Services Received tables will need to be manually migrated into the Service Definition table. You can do so by creating a Service Definition for each entry in the Services Offered table. Services Offered and Services Received data will not be accessible within the application until this step is completed. This is an optional task for previous releases.

Procedure
1. Navigate to **All** > **Customer Service** > **Administration** > **Service Definitions**.
2. Select **New**.
3. Enter the details for the Service Definition.

Service definition form

Field	Description
Name	Name of the service definition.
ID	System-generated unique identifier for the service definition.
Table	Table associated with the service definition. Select a case or task table based on the service.
Customer service type	Select a service type for the service definition.
Playbook record generator	Select a playbook record generator.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Service Organizations offering Service	Service that the service organizations provide.
Order	The order in which the case type appears in the interceptor.
Active	Check box to activate or deactivate the service organization criteria.
Description	Description of the service definition.

4. Select **Submit** or **Update**.
5. Select the new Service Definition Record.
6. In the Default Table Values field, select **Service Definition**.
7. Select the search icon , and select the new Service definition in the choice menu.
8. Select **Submit**.
   The service definition is now created and can be used with any of the playbooks in Public Sector Digital Services.

Configure a custom playbook in Service Request Playbook

Custom playbooks and service definitions enable you to customize the default Service Request Playbook user experience to interact with your desired agency workflows. After creating a service definition, you can associate a playbook with the definition.

Before you begin
Role required: admin

About this task
Before starting this procedure, you must create a service definition to associate your playbook with. For more information on how to create a service definition, see Configure a service definition for Playbooks in Public Sector Digital Services.

When the agent selects **Create Case** on the case type selector screen, the system displays the new case record and launches the playbook associated with the service in a tab on the record page.

Note:
This is an optional task.

Procedure
1. Navigate to **All** > **Process Automation** > *`Workflow Studio`*.
2. Select **Create a New Process**, fill in the details of the playbook, and select **Select a trigger**.
3. Select a trigger type from the dropdown menu.
   Your trigger type is the service definition you recently created.
4. Select **Go to Designer**.
   Workflow Studio is now opened.
5. Select **Activate** after creating the process to your specifications.
   The playbook is now published to run when triggered.
6. Navigate to **All** > **System UI** > **UI Policies**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You are taken to edit the UI of the Playbook Record Generator, which is the initial form an agent sees when they are creating a case.

7. Select **New**.
8. Select **Service Request** in the **Table** dropdown menu, and enter a short description describing your new UI policy.
9. Add the necessary conditions under the **When to Apply** and **Script**tabs,and select **Submit**. Your UI policy and playbook are now created.

Configure the Similar Records Activity UI in Service Request Playbook

The Similar Records Activity UI uses the name and description of existing cases to display a list of cases associated with the current case, allowing an agent to determine whether the current case is a duplicate of an existing case. Similar records can also provide helpful information about a current case.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Process Automation** > *Workflow Studio*.
2. Select **Service Request**.
3. Under Intake, select **Add Activity**.
4. Select**Playbooks for Customer Service Management** > **Similar Records**
5. Under When to Start, select **With Previous** from the dropdown.
6. Select **View all properties**, then **Automation**.
7. Select the arrow next to Record, and select **Trigger- Service Request** > **Service Request Record**.
8. Under Conditions, select **Stage** > **is not** > **Intake**.
9. Toggle **Advanced** in the top right corner of the screen.
10. Select **Experience**, and set the associated table to "Service Request".
11. Set the associated record to **Trigger- Service Request** > **Service Request Record**
12. **Optional:** To set parameters for.
13. Set the title to **This activity** > **Label**.
14. Select **Done**, then select **Activate**.

Result
The Similar Records UI activity is now configured, and the modal should now display when you open a new or existing Service Request Playbook.

Configure agent tools in Public Sector Digital Services

Configure other agent tools such as Mobile Agent.


Configuring Guided Decisions for Public Sector Digital Services

Create structured troubleshooting processes for your agents through the ServiceNow® Guided Decisions Experience application. Help your agents solve complex issues in a consistent way.

The Guided Decisions Experience application is a tool for authoring and running decision tree flows. A decision tree walks an agent through a troubleshooting process based

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

on a record context. The process asks a series of questions and the agent provides the answers. Based on those answers, the agent receives guidance on the next steps to take in the resolution process. Agents can resolve complex issues faster and more efficiently. .

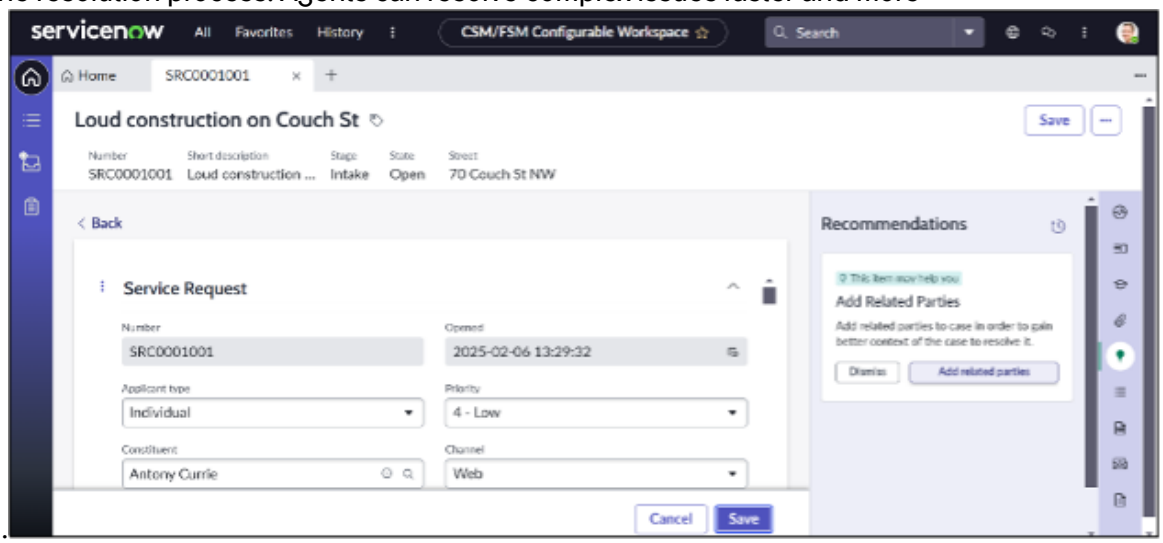

Guided Decisions is a decision authoring and execution capability within the scope of the Public Sector Digital Services application. A guided decision guides Public Sector Digital Service agents and managers through a troubleshooting process based on the context of the case they are working on. It asks them questions based on previous answers and gives guidance on the next step in the resolution process. Guided decisions consist of decision trees. A decision tree is a multi-step process consisting of questions, answers, and guidance. Decision trees contain nodes representing one or more questions and the associated decision or guidance paths. Based on the answers, each decision tree leads to an outcome, which can be guidance, a follow-up question, or another decision tree. Public Sector Digital Service agents interact with decision trees as part of a playbook within a case. The playbook containing the guided decision is displayed in the case based on the conditions set up. Public Sector Digital Service agents work through the guided decision, and complete actions suggested in the guidance. To read more about guided decisions, visit the Docs Site for Configuring Guided Decisions.

Recommend prioritized next best actions to agents

- Recommend both guidance and guided decision trees as next best actions to agents
- Dynamically rank next best actions based on frequency and priority of recommendations
- Quickly develop and deploy new guidance via configuration

Scenarios for using decision trees

Rapidly construct and deploy guided decision trees. Improve the admin experience with an easy, intuitive, non-technical builder interface Reduce build time by rapidly constructing, validating and testing guided decision trees Drive better decisions by passing contextual info seamlessly from decision tree into guidances. Decision trees can help agents resolve the following types of customer issues:

- Troubleshoot a faulty device, such as a laptop that doesn't work. Use a decision tree to find the cause and provide a fix for the customer.
- Review a refund request. Use a decision tree to determine whether the customer is eligible for a refund, which can include checking for exceptions and creating tasks.
- Reset a customer's password. Use a decision tree to walk the agent through the process, such as verifying the customer's identity, trying other options, and, if needed, resetting the password.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Guided Decisions features

- Reuse values in a decision tree by linking inputs in question and guidance nodes. You can also link inputs of a child tree to a parent tree.
- Link an activated decision tree to your current decision tree to reuse other decision trees and reduce effort in creating new ones. The linked decision tree acts as a child tree to the current decision tree.
- Enable users to edit their responses in the previous question nodes or a guidance node.

  In a nested decision tree, users can navigate back to the previous node of a parent tree from a child tree.

Guided Decisions experiences

The Guided Decisions Experience application provides two different experiences for creating and editing decision trees: through the Decision Tree Builder or the Core UI.

Setting up the Guided Decisions Experience application

As an admin, set up the Guided Decisions Experience application to enable users to create and run decision trees.

Creating and using decision trees

Users with the decision tree author role (decision_tree_author) create decision trees. After creating a decision tree, the decision tree is implemented by adding it to a recommended action, playbook, or Service Portal. master.

Agents interact with decision trees as part of a Recommended Actions or as part of a playbook within a record, such as a case.

Customers and end-users interact with decision trees on Service Portal.

For guided decisions that are added to playbooks, agents can work through the decision trees and complete actions suggested in the guidance as part of a playbook stage or activity. How the agent interacts with the decision tree depends on the playbook configuration. master.

Request apps from the ServiceNow Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Configure Mobile Agent for Public Sector Digital Services

Configure Mobile Agent for the Information Request and Service Request Playbooks.

Configure Mobile Agent for Information Request Playbook

Install the Customer Service Mobile and Information Request Playbook plugins to enable government agents to track public record information requests on the Mobile Agent. You can then configure the roles.

As an admin, complete the following configuration tasks to set up the Mobile Agent application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Admin Tasks for Mobile Agent app configuration

Task	Description
Install Information Request Playbook application	Install Information Request Playbook (com.sn_public_sector_digital_services_core) from the ServiceNow® Store.
Activate the Customer Service Mobile plugin (com.sn_csm_mobile)	You can activate the Customer Service Mobile plugin (com.sn_csm_mobile) using the Customer Service Management guided setup.
Configure public sector roles and permissions for Mobile Agent app	Configure user roles in order for government agents to access the Mobile Agent app. This step is mandatory for any government agent to be able to work from the app.

Once the Customer Service Management mobile application is activated and configured, agents can download the ServiceNow Mobile Agent on their mobile devices and access ServiceNow instances.

Configure Mobile Agent for Service Request Playbook

Install the Customer Service Mobile and Service Request Playbook plugins to enable government service agents to track non-emergency service requests on the Mobile Agent. You can then configure the roles.

As a user with the admin role, complete the following configuration tasks to set up the Mobile Agent application.

Admin Tasks for Mobile Agent app configuration

Task	Description
Install Service Request Playbook application	Install Service Request Playbook (sn_gsm) from the ServiceNow® Store.
Activate the Customer Service Mobile plugin (com.sn_csm_mobile)	You can activate the Customer Service Mobile plugin (com.sn_csm_mobile) using the Customer Service Management guided setup.
(Optional) Activate Field Service Management plugin (com.snc.work_management)	Install the Field Service Management plugin to view the work orders related list. For more information, see Integration with Field Service Management.
Configure public sector roles and permissions for Mobile Agent app	Configure user roles in order for government service agents to access the Mobile Agent app. This step is mandatory for any government service agent to be able to work from the app.

Once the Customer Service Management mobile application is activated and configured, agents can download the ServiceNow Mobile Agent on their mobile devices and access ServiceNow instances.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure public sector roles and permissions for Mobile Agent app

Configure user roles for government service agents to access the Mobile Agent app. This step is mandatory for any government service agent to be able to work from the app.

Before you begin

Role required: admin

Procedure

1. In the navigation filter, enter **sys_sg_applet_launcher.list** to open the Applet Launchers [sys_sg_applet_launcher] table.
2. From the Launcher screens table, select the **Cases** record.
   The Required Roles record should contain only the Customer Service Agent (sn_customerservice_agent) role.
3. **Optional:** If prompted, switch from the Global application to the Customer Service Mobile application.
4. Select the edit icon ( ) under Required Roles and add the following roles:
   - sn_gsm.agency_manager
   - sn_gsm.government_service_manager
   - sn_gsm.constituent_agent
   - sn_gsm.business_agent
   - sn_gsm.agency_constituent_agent
   - sn_gsm.agency_agent
5. Select **Done** to save the roles.
   Agents with the above roles can now log in to the Mobile Agent and work on Service Request cases assigned to them.

Configure communication channels in Public Sector Digital Services

Configure communication channels such as chat, email, phone, virtual agent, and engagement messenger.

Virtual Agent	Engagement Messenger
	
Set up Virtual Agent to use the predefined Virtual Agent topics (chatbot conversations) designed to help constituents complete common self-service tasks.	Set up Engagement Messenger to enable your users to find the information or service that they need from third-party web applications.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure Virtual Agent for Public Sector Digital Services

Set up ServiceNow® Virtual Agent so that conversation designers (topic authors) can create and modify automated conversations for public sector use cases. Virtual Agent for Public Sector Digital Services also helps your constituents complete common self-service tasks on the Government Service Portal with predefined Government Service Virtual Agent topics (chatbot conversations).

Note:
The Virtual Agent plugin (com.glide.cs.chatbot) must be activated.

What to do before building Virtual Agent topics for public sector use cases

As admins or topic authors (users with the virtual_agent_admin role), you can do the following with Virtual Agent:

- Use prebuilt conversations and topic blocks (components that run subflows or common functions in a conversation). Prebuilt conversations and topic blocks are available with the Virtual Agent platform, Customer Service Virtual Agent Conversations plugin (com.sn_csm.virtualagent), and Service Request Playbook application. Prebuilt Public Sector topic blocks are available with the Public Sector Digital Services Core application.
- Build your own custom, public sector conversation topics. You can duplicate prebuilt topics and topic blocks and then customize them as needed.

Before you or your topic authors (users with the virtual_agent_admin role) create or modify Virtual Agent conversations, meet the following prerequisites for working with prebuilt topics and topic blocks in Virtual Agent Designer:

- Activate the Glide Virtual Agent plugin (com.glide.cs.chatbot) to access platform topics and topic blocks and run Virtual Agent Designer.
- Activate the Customer Service Virtual Agent plugin (com.sn_csm.virtualagent) to access prebuilt Customer Service Management conversations and topic blocks.
- Become familiar with Virtual Agent Designer to create and update conversation topics.
- Install Public Sector Digital Services Core application to access public sector topic blocks that can be used in public sector conversations.
- Install Service Request Playbook for Public Sector Digital Services to access the prebuilt topic, **Create a Service Request**.
- Install License and Permit Playbook for Public Sector Digital Services to access the prebuilt topic, **Start a License/Permit Application**.

Configure Virtual Agent conversations for public sector users

As admins or topic authors (users with the virtual_agent_admin role), you can deploy prebuilt conversation topics to your end users, such as the **Create a Service Request** topic provided with the Service Request Playbook application, as well as custom conversation topics that you create.

These blocks are subflows that run conversational elements or common tasks in a conversation, such as adding or retrieving records. Topic blocks enable topic authors to add standard functions to Virtual Agent conversations, simplifying conversation design and maintenance.

1. Configure Agent Chat in the Government Service Portal.
   a. Navigate to **All** >**Service Portal** >**Agent Chat**.
   b. Locate **GSP Chat**, and select the check box to set the record to **Active**.
2. In Virtual Agent Designer, search for the corresponding topic block.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- For Service Request Playbook requests, search for and select **Create a Service Request**.
- For License and Permit Playbook requests, search for and select **Start a License/Permit Application**. For more information, see Configure Virtual Agent for License and Permit Playbook.

3. Select **Publish** to set the topic block to Active and make it available to your end users. For more information on creating and publishing Virtual Agent topics, see Publish a Virtual Agent topic.

For more information on working with topics in Virtual Agent Designer, see Getting Started with Virtual Agent Designer.

Example Virtual Agent topics

The Public Sector Digital Services Core application provides several base system topic blocks that you can use in public sector conversations:

- Prompt Service for Constituent – Asks constituents to select a type of government service.
- Create Public Sector Additional Members – Prompts constituents to add other persons who have an authorized interest in an issue or case.

Prompt Service for Constituent topic block

Use this topic block in a conversation to ask constituents to select a service from a list of available government services, for example permits or licenses. Activate the Customer Service Virtual Agent Conversations (com.sn_csm.virtualagent) plugin to use this topic block.

Create Public Sector Additional Members topic block

Use this topic block to let your constituents specify other people, such as family members or other authorized individuals, who can view a case or issue. Activate the Customer Service Virtual Agent Conversations (com.sn_csm.virtualagent) plugin to use this topic block.

When you use this topic block in a conversation, you specify the input parameters from the originating (calling) topic to the topic block.

Public Sector Additional Members input parameters

Parameter	Description
case_id	Sys_id of the public sector case record created.
case_type	Extension of the base public sector service.

To learn more about topic blocks and how to use them in Virtual Agent conversations, see Maximizing code reuse with topic blocks

Configure Engagement Messenger for Playbooks

Configure certain Engagement Messenger settings to enable public sector end users to create and track requests. With Engagement Messenger, public sector users can access self-service and chat features from third-party web applications outside of the ServiceNow environment.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Create an Engagement Messenger module. For more information on implementing Engagement Messenger, see Set up Engagement Messenger.
- Be familiar with customizing the Engagement Messenger module. For details, see Customize the feature configuration of Engagement Messenger.
- Activate the Agent Chat plugin (com.glide.interaction.awa).
- Activate the Virtual Agent plugin (com.glide.cs.chatbot), which requires a subscription.
- Activate the Customer Service Virtual Agent Conversations plugin (com.sn_csm.virtualagent), which requires a subscription.

Configure Engagement Messenger for Service Request Playbook

Configure Engagement Messenger settings for creating and tracking non-emergency service requests.

Before you begin

Role required: sn_csm_ec.ec_admin or admin

About this task

Public sector end users can create and track service requests in Engagement Messenger. They can choose from a catalog of pre-packaged service requests that are provided with the Service Request Playbook application. If Virtual Agent is implemented, they can use the pre-built Virtual Agent conversation, Create a Service Request, to submit and update non-emergency service requests from Engagement Messenger. You must enable the Government Service Catalog and this pre-built Virtual Agent conversation in Engagement Messenger.

Procedure

1. In Engagement Messenger, navigate to **All** > **Engagement Messenger** > **Modules**.
2. Customize the Catalog feature to use the Government Service Catalog, which provides the pre-packaged, non-emergency services that users can select from when creating a service request.
   a. From the **Features** section, open the **Catalog** feature.
   b. Select **Edit** to search for and then add the Government Service Catalog.
3. Customize the Chat feature by enabling the pre-built Virtual Agent conversation for creating a service request.
   a. From the **Features** section, open the **Chat** feature.
   b. Under **Reference chat**, find and select the **Create a Service Request** conversation topic.
4. Select **Update**.

Implement intelligence in Public Sector Digital Services

Integrate intelligence features to automate routine tasks and provide relevant content.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist for Public Sector Digital Services (PSDS)



Use Now Assist for PSDS to enhance user productivity and efficiency through conversation and proactive experiences using generative AI.

Now Assist for Public Sector Digital Services (PSDS)

Use the Public Sector Digital Services to boost productivity and efficiency with generative AI. This tool enhances user interactions by summarizing case information, generating resolution notes, and providing chat summaries. It also helps you quickly understand chat and case context, enabling faster and more accurate customer resolutions.

Configure AI Agents for Public Sector Digital Services

Configure the Now Assist AI Agents to execute use cases and complete tasks autonomously in Public Sector Digital Services.

Before you begin

Role required: admin, sn_aia_trigger_configuration

About this task


To get started with AI Agents, you must have the sn_gsm_ai_agents plugin installed, as well as the Now Assist panel and AI Search enabled on your instance.

Procedure

1. Ensure that the Now Assist Panel and AI Search module are both enabled.
   For instructions on how to enable the Now Assist panel and on how to set up AI Search, see Configure Now Assist for Public Sector Digital Services (PSDS) and Enabling and configuring AI Search with Now Assist for PSDS.
2. Navigate to **All** > **AI Search** > **Indexed Sources.**.
3. Locate the Information Request Table and select the record.
4. Select **Index All Tables** to start the indexing process.
5. Select **Indexing History** once it is completed to ensure the Keyword Ingestion State has changed from Indexing to Indexed.
6. Select **Publish** to publish the search source for the Information Request table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

7. Create a KB article that will contain the criteria for determining whether a fee waiver request should be approved or rejected.

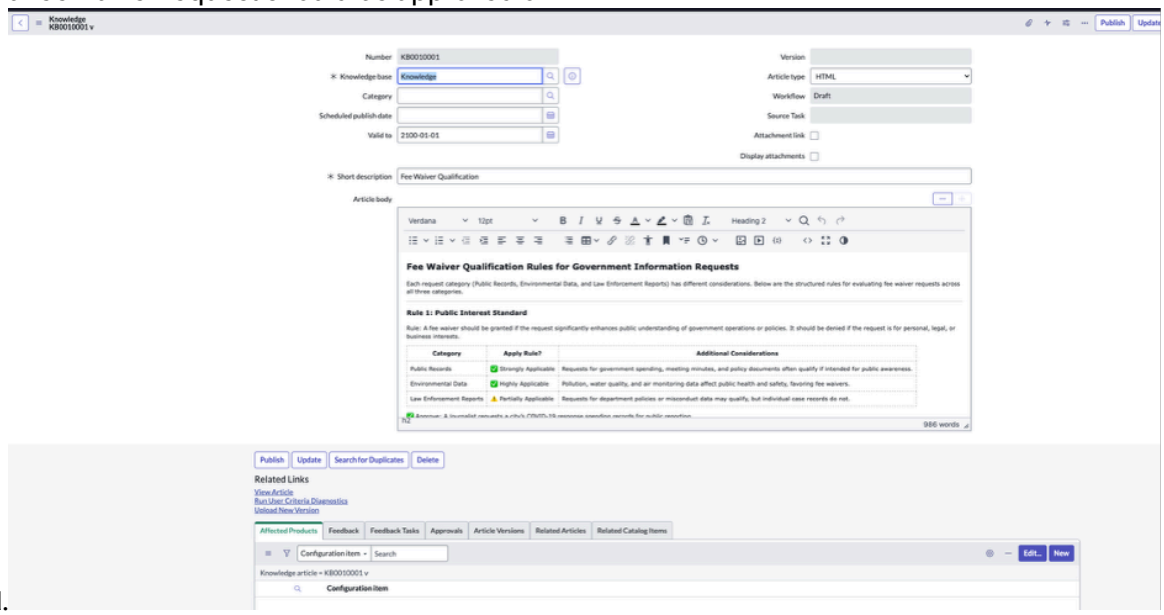

   The KB article must have a unique name and number.
8. Navigate to **All** > **AI Agent Studio** > **Create and Manage**.
9. Select **Information Request Playbook Fee Estimation Agent**.
10. Select **Define trigger**, and select **Information Request Fee Estimation and Review Trigger**.
11. Set the trigger to **Active**, and select **Save**, then **Continue**.

    Note:
    By default, the trigger is set to active.

12. Set Display to **Active**, then select **Save and Test**.

Result
The agentic workflow is now active. On this page, you can run a one-time test of the AI agent or agentic workflow to see how it thinks through the given task.

Set up constituent self-service in Public Sector Digital Services

Creating a self-service portal such as the Government Service Portal helps constituents submit requests independently. You can integrate features like knowledge bases, chatbots, and appointment booking for easy access to information.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Portal	Service catalog
	
Set up the Government Service Portals to provide information and support to your constituents.	Create service catalogs to provide your customers with self-service opportunities to request items such as service and product offerings.

Government Service Portal

Create and enable self-service portals for your customers to support their needs efficiently. Integrate these portals with knowledge bases, communities, service catalogs, and chatbots. Additionally, provide features like walk-up experiences and appointment booking to enhance their self-service options.

Service Catalog

Use the Service Catalog application to create and customize service catalogs so that your constituents can request items such as services and public records, or submit applications for grants or various social benefit programs. Additionally, you can standardize request fulfillment to maintain the accuracy and availability of the items in the catalogs.

Customize the Government Service Portal

Modify the Government Service Portal to meet your needs, for example to set the portal branding.

Before you begin

You can customize the Government Service Portal by following this procedure or by using guided setup for Public Sector Digital Services Core application.

Role required: admin

Procedure

Navigate to **All** > **Service Portal** > **Service Portal Configuration**.

Some of the components that you can customize include:

- **Branding**: Configure the portal branding to give your Government Service Portal its own look and feel. For example, you can give your portal a name and add your logo.
- **Menus**: Configure the portal header menu to set up the main menu, one of the main navigation controls for your users.
- **Homepage**: Assign a homepage to the portal.
- **Widgets**: Use Service Portal widgets to define the content in your portal.
- **Roles**: Configure page security by role to either set up pages to be public (no login required) or to filter them by user role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure the service catalog for a constituent, business, or agency

Configure the Public Sector Digital Services service catalog so that you can define the type of public service being offered, the service taxonomy, and which agency offers the service. These services are displayed on the Government Service Portal.

About this task

For more information on creating and maintaining service catalogs, see Service Catalog.

Before you begin

Note:
Determine which fields contain sensitive information and how to encrypt them to protect sensitive data.

Role required: admin

Procedure

1. Navigate to **All** > **Service Catalog** > **Catalog Definitions** > **Maintain Categories**.
2. Select **New** or open the catalog item to be edited.
3. On the form, fill in the fields.

Public Services Service Catalog form

Field	Description
Name	Name of the public service.
Catalog	Product category that the service falls under. If empty, select **Government Service**.
Category	Indicates the type of public service.
Application	Application scope of the service. Select from the following options: ○ Public Sector Digital Services Core ○ License and Permit Playbook ○ Information Request Playbook ○ Service Request Playbook
Status	Status of the public service. Mapped in the active field as: ○ Available = true ○ Not Available = false
Short description	Short description of the public service.
Description	Description of the public service.

4. Select **Submit** or **Update**.

Configure the Grants Management Portal

As an admin, you can configure various elements of the Grants Management Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

You can customize the Grants Management Portal by following these procedures or by using guided setup for Public Sector Digital Services Core application.

Before you begin

Role required: admin

Procedure

Navigate to **All** > **Service Portal** > **Service Portal Configuration**.

Some of the components that you can customize include:

- **Branding**: Configure the portal branding to give the Grants Management Portal its own look and feel. For example, you can give your portal a name and add your logo.
- **Menus**: Configure the portal header menu to set up the main menu, one of the main navigation controls for your users.
- **Homepage**: Assign a homepage to the portal.
- **Widgets**: Use Service Portal widgets to define the content in your portal.
- **Roles**: Configure page security by role to either set up pages to be public (no login required) or to filter them by user role.

Approve registration for a new business contact or organization in Grants Management Portal

As an admin, you can approve or reject the registration of a new business contact or organization, submitted through the Grants Management Portal.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Self Service** > **My approvals**.
2. Select **Requested Approvals**, where you'll find the organization registration that has requested to be added.
3. Select the record to open the detail view, where you can see the business information and approval fields.
4. You can choose to **Approve** or **Reject** registration for the business contact or organization. Your selection will be reflected in the **State** field.

Extend capabilities of Public Sector Digital Services

Extend the capabilities of Public Sector Digital Services.

Install the Performance Analytics and Reporting Solution for Public Sector Digital Services

Install the Performance Analytics and Reporting Solution for Public Sector Digital Services

Install the content pack for the Public Sector Digital Services Platform Analytics Solution from the ServiceNow Store.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- Activate the full, subscription version of Performance Analytics on the instance where you are activating this Platform Analytics Solution. You can activate Performance Analytics on a non-production instance without purchasing a subscription. For more information, see Activate your Performance Analytics subscription.
- Install Public Sector Digital Services Core from the ServiceNow Store.

Role required: admin

Procedure

1. Navigate to **All** > **System Applications** > **All Applications** > **ServiceNow Store**.
2. Browse for Performance Analytics Content Pack for Public Sector Digital Services and verify that you have the necessary valid entitlements.

   You need a HI account and permission to request applications for the instances under consideration. The HI account and the instance need to be part of the same company. For more information, see Install a ServiceNow Product on the ServiceNow Store.
3. Search for `Performance Analytics Content Pack for Public Sector Digital Services`.
4. Install the application.

Domain separation and Public Sector Digital Services

Domain separation is not supported for Public Sector Digital Services. Domain separation enables you to separate data, processes, and administrative tasks into logical groupings called domains. You can control several aspects of this separation, including which users can see and access data.

Support level: No support

- The domain field may exist on data tables but there is no business logic to manage the data.
- This level is not considered domain-separated.

For more information on support levels, see Application support for domain separation.

Related topics

Domain separation for service providers

Integrating Public Sector Digital Services with other applications

Extend the capabilities of Public Sector Digital Services and connect with other departments to assist with case resolution by integrating with other applications.

Public Sector Digital Services provides integrations with the following applications:

Field Service Management

Financial Services OperationsDocument Processor

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Integrating the Public Sector Digital Services application with the Field Service Management application enables you to create and view all work orders and appointments related to your case, depending on the business needs.

Integrating Public Sector Digital Services with the Financial Services OperationsDocument Processor

Integration with Field Service Management

The Public Sector Digital Services integration with the ServiceNow® Field Service Management application enables you to view work order and work order task information from a public sector case.

Integrating the Public Sector Digital Services application with the Field Service Management application enables you to create and view all work orders and appointments related to your case, depending on the business needs.

The Field Service Management application users can view the constituent, household, business, and contacts on work orders and work order tasks in the Field Service Management application.

Product use rights included with this application

With the integration with Field Service Management, Public Sector Digital Services agents can create and view all work orders and appointments related to their cases.

Field Service Management field agents can view relevant Public Sector Digital Services data from work orders with the right roles.

External users with the snc_external and other relevant Public Sector Digital Services and Customer Service Management (CSM) roles can view all case-related work orders and appointments related to their accounts.

Configuring the integration with Field Service Management

To configure the Public Sector Digital Services application integration with the Field Service Management application, complete these steps:

1. Activate the Customer Service with Field Service Management plugin. (com.snc.csm_fsm_integration).
2. Add UI actions to the PSDS case type tables where needed. Depending on your experience, you can also add some actions to relevant playbooks.
3. Add the Work orders related list to the PSDS case type tables for all relevant views on Classic UI and or Workspace.
4. If you're an FSM field agent, you can view the relevant PSDS customer data from the work orders by being assigned with the right customer data viewer roles.

> **Note:**
> An administrator must assign the appropriate PSDS customer data viewer roles to FSM field agents so that they can view the relevant PSDS customer data from work orders. For more information on roles, see Roles installed with Public Sector Digital Services.

Using Public Sector Digital Services

Learn how public sector agencies help constituents and businesses with digital services and resolve their issues.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

G



Guide grants agencies through the lifecycle of creating and publishing a grant program and accepting proposals.

Playbooks



Guide government agents through the lifecycle of a license and permit, social benefit program, government record, public information, or non-emergency service request case.

Government Service Portal




Report issues, request public records, search for information, and seek assistance from a government service agent— all within a customizable interface.

CSM Configurable Workspace



Set up CSM Configurable Workspace and expand the Workspace UI to optimize agent government service processes.

Portals




A one-stop shop to manage and submit public service requests, or applications.

Virtual Agent



Use Virtual Agent to create chatbot conversations tailored to public sector use cases.

Mobile Agent



Enable the development of public sector applications for the delivery of digital services to constituents, such as benefits, licenses, and service requests.

Now Assist



Use Now Assist for PSDS to enhance user productivity and efficiency through proactive experiences using generative AI.

Using Self-Service Portals in Public Sector Digital Services

Use Portals to submit requests for licenses and permits, government records and public information, non-emergency services, or to submit applications for social benefits or grants opportunities.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using the Government Service Portal in Public Sector Digital Services


By using the Government Service Portal, constituents and businesses can report issues, access and view the status of existing service requests, and request public records. You can also search for information about a question or issue, view and update their contact information, and request assistance from a government service agent— all within a customizable interface.

Using the Government Service Portal as a constituent

The Government Service Portal experience begins on the portal home page for constituents. Agencies usually customize their home pages to be viewed by registered users, and users who aren't registered. For example, registered users may see different information on the home page than the users who aren’t logged in.

This example shows an example default home page for a registered user of the Public Sector Digital Services Government Service Portal.

Government Service Portal default home page (Constituent view)

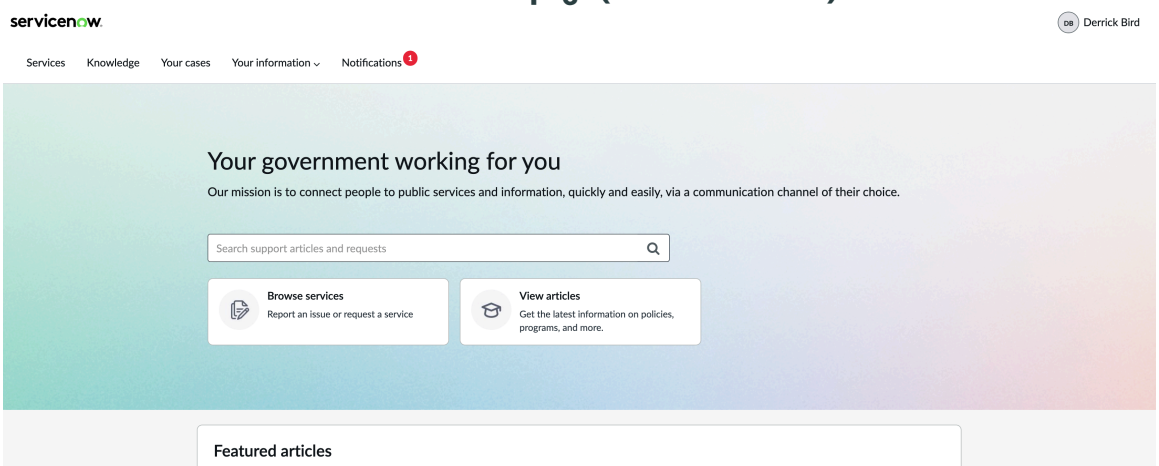

Constituents on the Government Service default home page can select the following communication options:

1. Browse and request services or information, track cases, view received services, and report issues.
2. Get the latest information on policies and programs by searching and viewing articles.
3. Discuss issues with neighbors and share perspectives by asking the community.
4. View your recent services and see the popular services on the site.

Note:
Administrators can customize Government Service Portal home pages in Service Portal, so home pages may differ visually across government agencies. For more information on customization, see Customize the Government Service Portal.

The following table lists what constituents can access through the home page.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Portal home page for registered constituents

UI component	Description
Knowledge	Access the Knowledge home page and search or view a list of the top-rated or most viewed knowledge base articles.
Services	Find all available services in the catalog. They can search through the service catalog or view a list of the recently used or most popular catalog items.
Your Cases	Find all cases submitted under the constituent name.
Your Information	Access quick links to view, update, or add personal information: • Businesses (agent experience only) • Contacts (agent experience only) • Publications
Notifications	See notifications for resolved cases, cases awaiting information, publications, and approvals.
Tours	View additional guidance on how the Public Sector Digital Services application works. An administrator determines whether tours appear on pages.
Live Chat	Chat with a virtual agent or a government service agent. For more information on using Virtual Agent to get help, see Get help with Public Service requests using Virtual Agent.
Engagement Messenger	Use Engagement Messenger to submit service requests from a third-party web application outside of the ServiceNow environment. For more information, see Configure Engagement Messenger for Playbooks.
Profile menu	Access a profile photo, view the profile, or log out.
Search	Search the portal by either entering a keyword to use type-ahead search, or enter one or more words to view all search results.
Most viewed articles	View a list of the most viewed articles.
Featured articles	View featured community content.
Most useful articles	View the most useful knowledge articles by the usage count of the articles.

Unregistered constituents can do the following tasks in the Government Service Portal:

- Register as a new user, create a login, and create a user profile.
- Search for information, browse knowledge articles, and engage with the community.
- Get help using Virtual Agent.
- Request services such as street repair, trash removal, building inspections, and other public maintenance.
- Request information and public records from local, state, and federal public agencies.

After registering and logging in to the Government Service Portal, constituents can:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- View the services that they received.
- View information records that they requested.
- View all license or permit requests.
- View constituent profiles (includes household information, such as names, addresses, and other constituent information).
- View existing cases.
- View publications and notifications including government pamphlets and newsletters about services as well as government notifications.

For more information on the services that are offered in the Government Service Portal service catalog, see Government Service Portal service catalog.

Using the Government Service Portal as a business

The Government Service Portal enables businesses to access their cases and service information as well as report issues. Business or business contacts can use the Government Service Portal to view their submitted cases, and raise requests by using the service request catalog.

Business contacts have the same functionality as a constituent user, with a few additional permissions. In addition to the constituent user tasks, business contacts can do the following tasks in the Government Service Portal:

- Register a new business.
- Request services that are related to licenses, benefits, permits, and service requests.
- View the services that they received.
- View information records that they requested.
- View all license or permit requests.
- View items that they received.
- View their existing cases.
- View business and child business profiles.
- View business contact information such as names, addresses, and other contact information.
- View publications, such as government pamphlets and newsletters about services.
- View notifications such as government notifications and new contact approvals.

Customizing the Government Service Portal

To customize this portal, navigate to **Service Portal** > **Portals** and select Government Service. See Service Portal for more information about creating a custom interface.

Register for the Government Service Portal as a constituent, business contact, or user

Register for the Public Sector Digital Services Government Service Portal so that you can search for information, request assistance from a government service agent, apply for a grant, license, or permit, or track the status of your request.

Before you begin
Role required: none

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to the Government Service Portal.
2. In the portal header, select **Register**.

> **Note:**
> Public Sector Digital Services does not support configuring of external user self-registration.

3. Select whether you want to register as a **Constituent**, a **Business contact**, or a **Business**.
4. Fill in the fields on the registration form.
   Your email address must be unique. If you enter an address that is already in the system, you receive an error message. Try again with a different email address.
5. Select the **Security Code** check box, complete the CAPTCHA validation, and select **Verify**.
6. When prompted to agree to the privacy policy and to the community terms and conditions, select the agree check box.
7. Select **Sign Up**.
   A verification email is sent to the email address that you provided.
8. Select the link in the email to verify your email address.

Result
Your registration is complete. You can now log in to the Government Service Portal.

Self-register a business account in the Public Sector Digital Services government service portal

As a business owner, you can self-register your business on the government service portal to gain access and to create a business profile.

Before you begin
Role required: none

Procedure

1. Go to the Government Service Portal page and select **Register** in the portal header.
2. When prompted, select **A new business**.
3. On the form, fill in the fields.
   For more information on the business registration fields and the information that is collected when you sign up as a new business, see Business Profile form.
4. Select the **Security Code** check box, complete the CAPTCHA validation, and select **Verify**.
5. Agree to the privacy policy and to the community terms and conditions by selecting the check box.
6. Select **Register**.
   Your request is routed to an administrator, who can approve or deny the registration request. If the registration request is approved, you receive an email prompting you to set a user ID and password for login to the government service portal. If the registration request is denied, you're notified by email.

View or update a constituent profile in the government service portal

As a registered constituent, view your profile, update your information, and change your password directly on the Public Sector Digital Services government service portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: sn_gsm.constituent

Procedure

1. Log in to the government service portal.
2. Select your user name in the portal header and select **Profile**.
3. To update the personal information in your profile, including your name, contact information, and address, do the following steps:
   a. Select the field that you want.
   b. In the pop-up window, enter the new information.
   c. Select **Save**.
   For more information on the fields, see Constituent Profile form.
4. To change your password, select **Change Password**.
   The **Change Password** link appears on the government service portal profile only when the Self Service Password Reset plugin (com.snc.password_reset) is activated by an admin.
5. In the Change Password pop-up window, fill in the fields and select **Update**.
6. To manage your email notification preferences, select **Notification Preferences** and check the options that you want or clear the options that you don't want.
   Your preferences are automatically saved.

Track your cases from the Government Service Portal in Public Sector Digital Services

Track your service request, information request, or license/permit request cases in the Government Service Portal by viewing a list of your cases and selecting the ones that you want to see more details about. Here, you can respond to an agent's inquiry, view a response, or see if there are any next steps required to resolve the case.

Before you begin
Role required: sn_gsm.constituent

About this task
Selecting a case opens a form with the following sections:

- A record of activity on the case, including added attachments or any interactions between the requester and the license and permit request case agent.
- Tasks or actions that must be taken on the user's part, such as accepting or rejecting a case outcome.
- The case details, including contact information, the case number, and the case's stage and status.
- Any attached files.

Procedure

1. In the Government Service Portal portal header, navigate to **Your Cases**.
   The following table lists the case categories that are visible:

Your Cases Category list

Category	Description
All Cases	List of all cases.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Category	Description
Action Needed	Cases in the Resolved state that are awaiting a constituent response.
Your Cases	Cases that haven't yet been submitted for resolution.
Your Requests	Cases that have been submitted for resolution and are awaiting an agent response.
Your Service Requests	All service request cases that a user has access to. The Service Requests list shows the following fields: ○ Service Request Number ○ Short Description ○ Constituent, Business, or Business Contact ○ State ○ Reported on
Your Information Requests	All information request cases that a user has access to. The Information Requests list shows the following fields: ○ Information Request Number ○ Short Description ○ Constituent, Business, or Business Contact ○ State ○ Reported on
Your Licenses/Permits	All license and permit request cases that a user has access to. The License and Permit Requests list shows the following fields: ○ License and Permit Request Number ○ Short Description ○ Consumer, Business, or Business contact ○ State ○ Reported on

2. In your list of cases, select the case number that you want to view more information about.
3. **Optional:** If you want to add a message for an agent, enter the message, and select **Post**. Your message becomes part of the case conversation. All responses from the agent are also included in the conversation, and you can see responses from other agents here.

Submit a social benefits application in the Public Sector Digital Services Government Service Portal

Submit an application for one or more social benefit programs offered by a government agency using the Government Service Portal in Public Sector Digital Services.

Before you begin

Role required: none

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

As a constituent, you can use the Public Sector Digital Services playbooks on service portals experience in the Government Service Portal to apply for one or more social benefit programs offered by an agency that serves you. You can apply for more than one program using information from the primary application, and see if you are eligible for any additional programs based on the information you provide, depending on what the agency offers. You can also use the portal to view the status of existing applications, view your constituent benefits summary card, as well as add details, upload documents, or update your profile and contact information.

Before you begin

Role required: none

Procedure

1. Navigate to the Government Service Portal.
2. Navigate to **Services** > **Social Benefits**.
3. Select the social benefits program you would like to submit an application for.
4. On the Answer eligibility questions activity card, confirm the primary applicant's eligibility using the eligibility questions, and select **Check Eligibility**.
   The benefits card will display possible eligibility for each of the social benefits offered by the agency. An agent will review the details of your case to make a final determination.
5. If the applicant is deemed eligible for the benefit associated with the application currently open, select **Start Application**.
   If the applicant is not eligible for the benefit associated with the application currently open, the application cannot move forward. The benefits card displays other social benefit programs the applicant may be eligible for, in addition to or instead of the benefit associated with the application currently open.
6. **Optional:** If you are submitting this application on behalf of another constituent or for a business contact, select the checkbox for **I am requesting on behalf of someone else**.
7. On the form, fill in the fields with the primary applicant's personal and financial information, including SSN, demographic information, location, and contact information.
8. **Optional:** Select the checkbox to indicate that the applicant would prefer to be contacted via SMS.
9. Select the next activity.
10. **Optional:** Add any people who would also be receiving benefits along with the primary applicant.
    You may add more than one. Related people may include spouses, children, dependents, household members, or any person who may be receiving benefits along with the primary applicant.
11. Select the next activity.
12. **Optional:** If anyone in the applicant's household has a source of income, select **Yes**, and on the form, fill in the fields.
    If no one in the applicant's household has a source of income, select **No**.
13. **Optional:** If anyone in the applicant's household has any pre-tax contributions on any of their current income, select **Yes**, and enter any pre-tax contributions that affect income for the applicant's household.
    If no one in the applicant's household has any pre-tax contributions, select **No**.
14. Select the next activity.
15. **Optional:** If anyone in the applicant's household has any expenses or financial commitments, select **Yes**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If no one in the applicant's household has any expenses or financial commitments, select **No**

16. **Optional:** On the form, fill in the fields, doing so for each expense item.
    You may add more than one. Select **Add Item** to add multiple expenses to the list.
17. Select the next activity.
18. If anyone in the applicant's household has any financial accounts, assets, or resources, select **Yes**, and on the form, fill in the fields.
    You may add more than one. Select **Add Item** to add multiple expenses to the list. If no one in the applicant's household has any financial accounts, assets, or resources, select **No**.
19. Select the next activity.
20. Upload any supporting documents that verify the identity of the applicant and any related parties, or provide additional context for their request.
21. Select the next activity.
22. On the form, select the options that best describe the applicant's criminal history, communication preferences, and accessibility needs.
23. Select the next activity.
24. Review the application in its entirety and correct any errors before submitting the application, and select **Mark Complete**.
    Select the pencil icon to navigate back to an activity that needs to be corrected.
25. Select the checkbox to acknowledge you have read and agree with the disclosures, and enter your signature.
    If an admin has configured e-signature, you have the option of drawing or typing a signature.
26. Select **Submit**.
    Your request is now routed to a Social Benefits case agent, who will process your application. You're now taken to the case page, where you can review or update the details of your request. After your request has been fulfilled, you must return to the portal to verify information, confirm an interview date, or upload any additional documents needed to fulfill your request. You can access pending approvals and tasks on the Notifications tab.
27. **Optional:** Select **Apply Now** to use information from the current application to apply for other social benefits programs that the primary applicant may be eligible for.
    You may apply for more than one. Each new application opens in a new browser tab. The option to create an appended case expires after a specified amount of time.
28. **Optional:** Select **Skip** to skip this activity.
    The case state of the additional benefit application changes to "Not submitted". A new case can no longer be created and appended to the primary application.
29. Select **Mark Complete** once the desired applications are submitted.
    The case is moved to the **Review** stage, where an agent will review the details of your request.

Creating a government service request with Public Sector Digital Services

You can create a case about a community question or issue from the Government Service Portal in Public Sector Digital Services. The Government Service Portal supports submissions by both registered and anonymous users.

Before you begin

Role required: none.

About this task

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Constituents can use the Government Service Portal to request services and report issues in their community. They can also use the portal to view the status of existing service requests, as well as update their contact information.

Constituents can submit their non-emergency requests through the Government Service Portal self-service experience, through Virtual Agent, or using Engagement Messenger. For more information on using Virtual Agent with Public Sector Digital Services, see Get help with Public Service requests using Virtual Agent.

Create a service request as a registered user

Create a service request as a registered user in the Public Sector Digital Services application.

Before you begin

Role required: constituent, business_contact, business_partner

About this task

As a constituent, you can use the Government Service Portal to request services and report issues in their community. You can also use the portal to view the status of existing service requests, as well as update their contact information.

As a constituent, you can submit non-emergency requests through the Government Service Portal self-service experience, through Virtual Agent, or by using Engagement Messenger. For more information on using Virtual Agent with Public Sector Digital Services, see Get help with Public Service requests using Virtual Agent.

Procedure

1. Navigate to the Government Service Portal.
2. Select **Services** > **Service Requests** to expand the list of Service Requests categories that are offered by Public Sector Digital Services, and select the category that you want.
3. Select the Service Request issue that you want to report.
   For more information on the services that are offered in the Government Service Portal, see Government Service Portal service catalog.
4. On the form, fill in the fields.

Create Case form

Field	Description
Location Type	Location type of the service request. The choices are: ○ **Address** ○ **Intersection**
Street Address	Address for this case, if **Address** is selected as the location type.
First Cross Street/Second Cross Street	Cross-streets for the case, if **Intersection** is selected as the location type.
Short Description	Brief description of the question, issue, or problem.
Details	Detailed description of the question, issue, or problem.
Contact Information	Contact information for the business or individual who reported this case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. Add any attachments.
6. Select **Submit**.

Result

The case is created, assigned a case number, and is now viewable in the **Your Cases** list in the Government Service Portal. For information on how to track the case as it moves through the various stages, see Track the status of a public service request from the Government Service Portal.

Create a service request as a public user

Create a service request as a public user in the Public Sector Digital Services application. You can submit a service request anonymously without logging in to the application.

Before you begin

Role required: none

About this task

Note:
To allow public users to submit service requests, certain settings must be configured by an administrator. For more information on how an administrator might configure these settings, see Unauthenticated users cannot submit catalog items on Service Portal.

Organizations usually customize their landing pages, and anonymous users may see different information than users who are logged in.

Procedure

1. Navigate to the Government Service Portal.
2. On the portal header, select **Services**.
3. Expand the list of Service Requests categories offered by Public Sector Digital Services by selecting **Service Requests**, and select the category that you want.
4. Select the Service Request issue that you want to report.
5. On the form, fill in the fields.

Create Case form

Field	Description
Location Type	Location type of the service request. The choices are: ○ **Address** ○ **Intersection**
Street Address	The address for this case, if **Address** is selected as the location type.
First Cross Street/Second Cross Street	The cross-streets for the case, if **Intersection** is selected as the location type.
Short Description	Brief description of the question, issue, or problem.
Details	Detailed description of the question, issue, or problem.
Contact Information	Option to report this case as a business or as an individual.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
You may choose to leave the Contact Information fields blank, or you may add your email to receive updates on the case status. Adding attachments isn't supported as a public user.

6. Select the Security Code check box, complete the CAPTCHA validation, and select **Submit**. You're taken back to the service request catalog, where you can submit another service request or register for an account.

Note:
If you didn't provide any contact information, you can't track the status of this request or see the details of the case after you select **Submit**. If you would like to check the status of this request after your submit it, you must register for an account. For instructions, see Register for the Government Service Portal as a constituent, business contact, or user.

Create an information request with Public Sector Digital Services

Create a case requesting public records from federal or state public agencies from the Government Service Portal in Public Sector Digital Services.

Before you begin
Role required: constituent, business_contact, business_partner

About this task
As a constituent, you can use the Government Service Portal to request and obtain copies of public records maintained by government agencies. For example, you can request access to state or local public records such as inspection reports, financial reports, corporate and property records, adoption records, and birth, death, or marriage certificates. You can also use the portal to view the status of existing information requests, as well as add details, upload documents, or update your contact information.

Users can submit a request for any public record, so long as it does not fall under one of nine exemptions:

1. Exemption One: Classified national defense and foreign relations information.
2. Exemption Two: Internal agency personnel rules and practices.
3. Exemption Three: Information that is prohibited from disclosure by another federal law.
4. Exemption Four: Trade secrets and commercial or financial information obtained from a person that is privileged or confidential.
5. Exemption Five: Inter-agency or intra-agency memoranda or letters that are protected by legal privileges.
6. Exemption Six: Personnel, medical, financial, and similar files the disclosure of which would constitute a clearly unwarranted invasion of personal privacy.
7. Exemption Seven: Certain types of information compiled for law enforcement purposes.
8. Exemption Eight: Records that are contained in or related to examination, operating, or condition reports prepared by, on behalf of, or for the use of any agency responsible for the regulation or supervision of financial institutions.
9. Exemption Nine: Geological and geophysical information and data, including maps, concerning wells.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to the Government Service Portal.
2. Navigate to **Services** > **Information Requests**.
3. Select the desired type of information request.
   You can choose between a FOIA request (federal) or a Public Records request (state).
4. Fill in your contact information.
   If you're requesting information for someone else, select the **Requesting on behalf of someone else** check box.
5. Fill in the request details.
6. Fill in the fee details.
7. Request a fee waiver by selecting the **Fee Waiver** check box.
   You may qualify for a fee waiver if you're making a request on behalf of a non-profit or educational institution.
8. **Optional:** If you need to request expedited processing, select the **Expedite Processing** check box.
9. **Optional:** Add any attachments, such as documentation required to verify your identity. Required attachments vary by request.
10. Select **Submit**.
    You're now taken to the case page, where you can review or update the details of your request. On this page, you can view the exemption checklist, which is a list of categories of information that are not available due to regulatory reasons. After your request has been fulfilled, you must return to the portal to accept or reject the fee estimate for fulfilling your request. You can access pending fee approvals on the **Notifications** tab.

Create a license or permit request in the Public Sector Digital Services Government Service Portal

Request a license or permit from a government agency using the Government Service Portal.

About this task

With Public Sector Digital Services playbooks on service portals, you get step-by-step guidance through the case flow process and the contextual information you need to complete each stage of the flow and its associated activities. The portal will also allow you the opportunity to see how pricing and fees change based on your selections.

Before you begin

Role required: none

About this task

As a constituent, you can use the Government Service Portal to request a permit or license. You can also use the portal to view the status of existing license and permitting requests, as well as add details, upload documents, or update your profile and contact information.

Before you begin

Role required: none

Procedure

1. Navigate to the Government Service Portal.
2. Navigate to **Services** > **License & Permits**.
3. Select **Request License/Permit**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. If prompted, confirm eligibility.
5. On the form, fill in your contact information and the request information.
   If the name to appear on the permit differs from that of the requester, enter that name here.
6. **Optional:** If you are submitting this application on behalf of another constituent or for a business contact, select the checkbox for **I am requesting on behalf of someone else**.
7. **Optional:** In the Individual Type dropdown, select **Constituent**or **Business**.
8. **Optional:** Enter the name of the constituent or business you are submitting the application on behalf of.
9. **Optional:** Add any additional related parties.
   Related parties may include business partners, managers, or any business contact who may need access to this license/permit. They must be contacts already registered and associated with your business.
10. **Optional:** Upload any documents that verifies the identity of the requester and the related party, or provides additional context for your request.
    Required documentation varies by request.
11. **Optional:** Select any add-ons, such as permit endorsements.
    You may add more than one. The pricing of the license or permit varies with each selection or combination of selections. If you are fee exempt, select the **Request Fee Waiver** checkbox to claim an exemption.
12. Review the fees associated with your choices.
    The fee total changes dynamically based on the options selected.
13. Select the checkbox to acknowledge the Commercial Affidavit and DDR Affidavit.
14. Enter your signature.
    If an admin has configured e-signature, you have the option of drawing or typing a signature.
15. Add any attachments.
16. Select **Submit**.

Result

Your request is now routed to a License and Permit agent, who will process your request. You're now taken to the case page, where you can review or update the details of your request. After your request has been fulfilled, you must return to the portal to accept or reject the fee estimate for fulfilling your request, as well as upload any identification or supporting documents needed to fulfill your request. You can access pending approvals and tasks on the Notifications tab.

Related constituents and business contacts added to the license/permit application are now able to view the case details in the Government Service Portal.

Create and submit License or Permit request applications on behalf of others

In the Government Service Portal, constituents can create license/permit requests on behalf of someone else, and add multiple parties (constituents, business contacts) to the watchlist.

Before you begin

Role required: none

Procedure

1. Navigate to the Government Service Portal.
2. Navigate to **Services** > **License & Permits**.
3. Select **Request License/Permit**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. If prompted, confirm eligibility.
5. On the form, fill in your contact information and the request information.
   If the name to appear on the permit differs from that of the requester, enter that name here.
6. Select the checkbox for **I am requesting on behalf of someone else**.
7. In the Individual Type dropdown, select **Constituent** or **Business**.
8. Enter the name of the constituent or business you are submitting the application on behalf of.
9. **Optional:** Add any additional related parties.
   Related parties may include business partners, managers, or any business contact who may need access to this license/permit. They must be contacts already registered and associated with your business.
10. **Optional:** Upload any documents that verifies the identity of the requester and the related party, or provides additional context for your request.
    Required documentation varies by request.
11. **Optional:** Select any add-ons, such as permit endorsements.
    You may add more than one. The pricing of the license or permit varies with each selection or combination of selections.
12. Review the fees associated with your choices.
    The fee total changes dynamically based on the options selected. If you are fee exempt, select the **Request Fee Waiver** checkbox to claim an exemption.
13. Select the checkbox to acknowledge the Commercial Affidavit and DDR Affidavit.
14. Enter your signature.
    If an admin has configured e-signature, you have the option of drawing or typing a signature.
15. Add any attachments.
16. Select **Submit**.

Result

Your request is now routed to a License and Permit agent, who will process your request. You're now taken to the case page, where you can review or update the details of your request. After your request has been fulfilled, you must return to the portal to accept or reject the fee estimate for fulfilling your request, as well as upload any identification or supporting documents needed to fulfill your request. You can access pending approvals and tasks on the Notifications tab.

The constituent for which you were acting as a proxy, as well as any related constituents and business contacts added to the license/permit application, is now able to view the case details in the Government Service Portal.

Track the status of a public service request from the Government Service Portal

Monitor the status of a case that you submitted through the Government Service Portal in Public Sector Digital Services. On the case page, you can see when the case was created, when it was last updated, and whether it’s awaiting a response from you or from an agent.

Before you begin

Role required: constituent, business_contact, business_partner

Procedure

1. Navigate to the Government Service Portal.
2. In the Government Service Portal header, select **Your Cases**.
   The following table lists the case categories that are visible:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Your Cases Category list

Category	Description
All Cases	List of all cases.
Action Needed	Cases in the Resolved state that are awaiting a constituent response.
Your Cases	Cases that haven't yet been submitted for resolution.
Your Requests	Cases that have been submitted for resolution and are awaiting an agent response.
Your Service Requests	All service request cases that a user has access to. The Service Requests list shows the following fields: ○ Service Request Number ○ Short Description ○ Constituent ○ Business ○ Business Contact ○ State ○ Reported on

3. Under **Your Cases**, select the case number that you want.
The following table describes the fields that are displayed:

Government Service Portal Case Fields

Fields	Description
Timeline	Visual display that shows when the case was created and when it was last updated.
State	Current status of the case for the given stage. For a detailed explanation of each case state, see Government Service Portal Case states.
Constituent, Business, or Business Contact	Contact information for the reporting party.
Service	Type of service being requested.
Stage	Phase through which a case moves. For a detailed explanation of each case stage, see Government Service Case type.
Location Type	Option that indicates whether the location of the issue is an address or intersection.
Address or Cross Streets	Address or cross streets where the issue is located.
Related tabs	Additional case information, activity, or comments. The Related tabs show the following fields:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Fields	Description
	○ Activity ○ Attachments ○ Related Tasks You can add attachments or comments here.

Manage your government service cases from the Government Service Portal

Create, accept, assign, escalate, de-escalate, cancel a case, and even more actions for various government services all from the Government Service Portal.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

Procedure

1. Navigate to the Government Service Portal.
2. Do one of the following actions that are related to your case:

Service Request Case Actions

Action	Description
Create Case	Creates a case and associates the new case with the originating case. The new case appears in the Related Cases related list. This action displays the Select Case Type pop-up window where you can select the type of case to create.
Accept	Accepts an assigned case. This action is performed by the logged-in user.
Assign to me	Assigns the case to the logged-in user. This action is available if the case is unassigned and the logged-in user has the correct role.
Compose Email	Opens an email window in a new sub-tab on the **Case** tab. ○ The **To** field displays the customer's email address. ○ The **Subject** field displays the case number and issue. This action is available from the **More UI Actions** menu.
Escalate Case	Escalates the case, which highlights the case and raises awareness about a customer or issue.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Action	Description
	This action is available if the logged-in user has the correct role.
De-escalate Case	De-escalates a case. This action is available if a case has been escalated and the logged-in user has the correct role.
Report Knowledge Gap	Opens a knowledge feedback task in a new sub-tab for the case. After being saved, the task appears in the Knowledge Gaps related list. This action is available from the More UI Actions menu.
Propose Solution	Enables the agent to propose a solution for a case.
Record Time	Records the time worked for the case or case tasks. Selecting **Record Time** opens a Time Worked form with the **Task** and **User** fields already populated. This action is available from the More UI Actions menu.
Create Work Order	Creates a work order for the case. After a work order is created, it appears in the Work Orders related list. The case number is also referenced on the work order. This action is available from the More UI Actions menu.
Close Case	Closes a case. This action is available after a resolution code and any information related to the closure is provided in the Resolution notes field.
Open case	Changes the state of a case from Awaiting Info to Open.
Submit application	Saves the application and moves the state of the case from Draft to New. This action is available when the state of a case is Draft.
Request Info	Requests information about a case or case task from the constituent, business, or agency.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Action	Description
	This action is available when the state of a case is not Draft, Resolved, Closed, or Cancelled.
Start Work	Begins work on an open case. This action is available to the agent who is assigned to the task when the state of a case is Open.
Cancel	Updates the state of the case to Cancelled. This action is available when the state of a case is not Resolved, Closed, or Cancelled.

These actions are inherited by the case types that are created by extending the service case type.

The actions in the following table are available with the cases when the corresponding plugins are activated.

Actions available with corresponding case plugins

Plugin	Action
Service Management	○ Create Incident ○ Create Standard Change ○ Create Problem
Major Case Management	Shows all major case actions.
Special Handling Notes	Shows any special handling notes for the case.
Case Action Status	Indicates the current action state.

Email notifications for the Service Request Case Type

Email notifications are automatically triggered by both the Government Service Portal and Service Request Playbook in Public Sector Digital Services. Notifications can result from an agent action, a response needed from an agent, constituent, or business contact, or from an update on a case status.

Email notifications in the Service Request Playbook are automatically sent to the constituent, business, agency, or contributor watchlist, when an agent performs one of the following case activities:

- Opens a case for a constituent
- Comments on a constituent's case
- Moves the case to another stage
- Provides a resolution for a constituent's case
- Closes a constituent's case

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Cancels a constituent's case
- Requests more information on the unresolved case

Email notifications are automatically sent to the assigned agent when:

- A case is assigned to the agent.
- A case needs attention or requires an agent response.
- Case work notes or comments are updated.
- A case task is assigned.
- There's new activity on the case.
- The proposed solution is rejected.
- There's a service level agreement (SLA) warning or breach.

Business contacts, contributors, other agents, and other constituents that are added to the case watchlist should receive all email notifications that are also received by the constituent who submitted the request.

For agents, email notifications in the Government Service Portal or Service Request Playbook can also be triggered by certain SLAs. For more information on SLAs for agents, see Service level agreements for government service cases.

Service level agreements for government service cases

A service level agreement (SLA) is a record that you use to guarantee a specific time that a service or information must be provided by, or that an agent must finish a task must by. The Public Sector Digital Services application uses SLAs with government service request cases.

You can attach an SLA to a service request in the Government Service Portal or to a service request in the Service Request Playbook. You can configure an SLA to start, pause, or stop depending on any government service case attributes that you or someone else assigned to the SLA.

An SLA is automatically associated to a case when the case is created or updated depending on the conditions that have been set up in the SLA definition. The specific record that gets attached to a case is the Task SLA record, which tracks the SLAs for that particular case. The Task SLA table [task_sla] stores the Task SLA records. For more information on SLA definitions, see Service Level Agreement (SLA) definition.

An SLA sends notifications at certain events that are defined in the workflow. For information on defining SLA workflow events, see Create an SLA definition.

By default, SLA notifications are triggered and sent to the assigned agent on the following occasions:

- A Service Request case is in the Intake stage for more than two days.
- A Service Request case is in the Review stage for more than eight days.
- A Service Request case is in Processing stage for more than eight days.
- A Service Request case is in the Decision stage for more than two days.
- A constituent's comment or query hasn't been responded to for two days.
- An SLA is at 50 percent of the duration that is specified in the SLA definition.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- An SLA is at 75 percent of the duration that is specified in the SLA definition. A notification is sent to the agent and agent manager.
- An SLA is breached. A notification is sent to the agent and agent manager.

An SLA's timer pauses when the case is awaiting information from the constituent who had a comment or query. The timer is canceled if the state of the case changes to **Closed** or **Cancelled**.

To learn more about SLAs, see Service Level Management concepts.

Get help with Public Service requests using Virtual Agent

Public sector users can get assistance completing or updating their requests for various public services by using a pre-built Virtual Agent chatbot conversation. Users can run this Virtual Agent conversation from the Government Service Portal or from Engagement Messenger. Virtual Agent is currently supported by Service Request Playbook and License and Permit Playbook.

Note:
Requires Glide Virtual Agent (com.glide.cs.chatbot) plugin.

Get help with service requests using Virtual Agent

Public sector end users can get assistance completing or updating non-emergency service requests by using a pre-built Virtual Agent chatbot conversation. End users can run this Virtual Agent conversation from the Government Service Portal or from Engagement Messenger.

Before you begin
Role required: constituent, business_contact, business_partner

About this task
The information (user inputs and bot responses) exchanged during the Virtual Agent conversation, Create a Service Request, enables the chatbot to assist users with non-emergency service requests.

Procedure

1. Navigate to the Government Service Portal or to the Engagement Messenger module if implemented.
2. Click **Chat**.
3. Select **Show me everything**.
4. Create or update a non-emergency service request by selecting **Create a Service Request**.

   Virtual Agent asks the user whether this is a new request or an update to an existing request.
   - For new requests, the bot displays categories of non-emergency services that the user can choose from.
     - If the user needs a service that isn't offered, the user can enter a short description of the issue and continue working with the bot to create a service request.
     - If the issue requires a location to be specified, the bot prompts the user to enter the address or intersection of the issue.
   - For existing requests, the bot displays the list of cases for service requests submitted by the user and then prompts the user to update the case by adding an image or comment about the case.

   The bot creates or updates the case for the service request. The user can continue working on a different issue with the bot or indicate that no further help is needed, which ends the Virtual Agent conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Get help with license and permit requests using Virtual Agent

Public sector users can get assistance completing or updating their requests for license and permit services by using a pre-built Virtual Agent chatbot conversation. Users can run this Virtual Agent conversation from the Government Service Portal or from Engagement Messenger.

Before you begin

Role required: constituent, business_contact, business_partner

About this task

The information (user inputs and bot responses) exchanged during the Virtual Agent conversation, Create a Service Request, enables the chatbot to assist users with non-emergency service requests.

Procedure

1. Navigate to the Government Service Portal or to the Engagement Messenger module if implemented.
2. Click **Chat**.
3. Select **Show me everything**.
4. Create or update a license or permit request by selecting **Start a License/Permit Application**.

   Virtual Agent asks the user whether this is a new request or an update to an existing request.

   - For new requests, the bot displays categories of license and permit services that the user can choose from.
     - If the user needs a service that isn't offered, the user can enter a short description of the issue and continue working with the bot to create a request.
     - If the issue requires a location to be specified, the bot prompts the user to enter the address.
   - For existing requests, the bot displays the list of license and permit requests submitted by the user, and then prompts the user to update the case with an image, comment, file, or additional information.

   The bot creates or updates the case for the license and permit request. The user can continue working on a different issue with the bot or indicate that no further help is needed, which ends the Virtual Agent conversation.

Using the Grants Management Portal in Public Sector Digital Services


As an applicant, you can use the Grants Management Portal to search and view available grant programs. You can apply to grant opportunities and track the progress and status of your application and accept or decline awards.

Whether you're a business contact or a constituent, you can use the Grants Management Portal to:

- Search for and view grant opportunities.
- Apply for grant programs.
- Browse and view featured KB articles that contain relevant resources about the grant process.
- Track the status of your proposal.
- View recently viewed grant programs.
- Acknowledge or decline grant awards.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Workflow steps

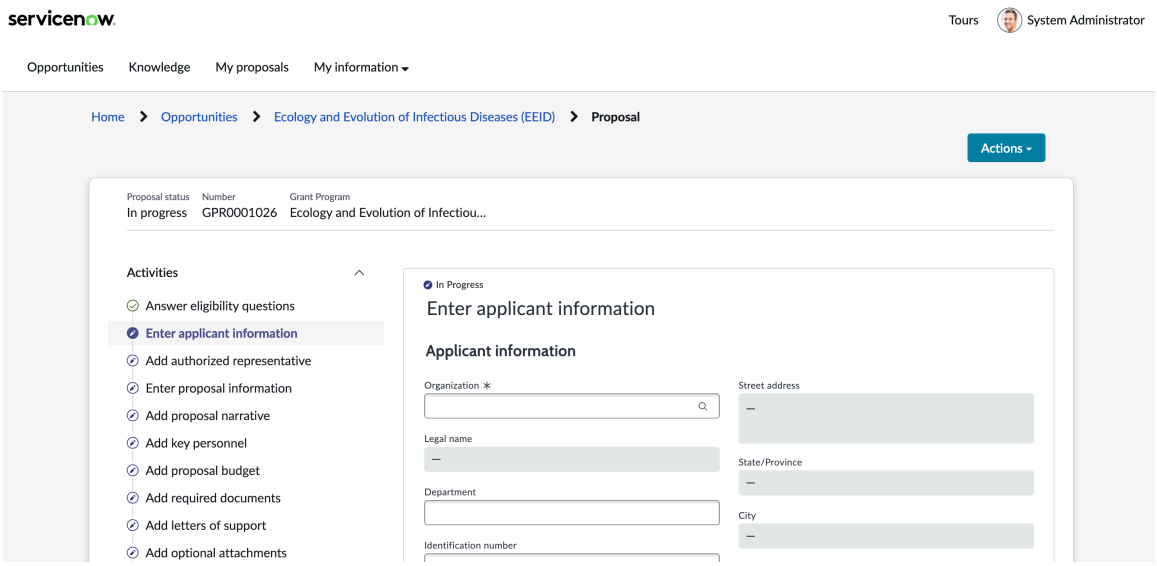

Let's see how a constituent would apply for a grant from the Grants Management portal, which uses Playbooks for Portals. The constituent does the following actions:

1. Selects which grant program catalog item they wish to submit a proposal for.
2. Enters basic information about themselves in a catalog item on one of the portals to open a new case.
3. Adds the details about their application.
4. Uploads the required documents that are needed to process their application.
5. Reviews and edits all the data before submitting the application.
6. Saves all changes and submits the case.

When the customer submits the case, the status of the case changes from **Draft** to **New**.

Apply for a grant using the Grants Management Portal in the Grants Management

As an applicant, complete the Grants Program intake as your first step in submitting a grant proposal. You can access grants programs through Grants Management Portal.

Before you begin

Role required: business contact

About this task

In this stage, an applicant initiates a case for a proposal under a specific Grant Program. Each program is configured by the Grant Program Manager, who defines a set of eligibility rules. Applicants are required to respond to these questions as part of the application process.

Procedure

1. In the Grants Management Portal, navigate to **View Opportunities** > **All**, and select the grants program the applicant wishes to apply for.
2. Select **Apply Now**.
3. Confirm the applicant's eligibility by answering the eligibility questions.

   If the applicant is ineligible, a message stating, "You may not be eligible" is displayed. Applicants have the option to review and update their answers.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Select **Start Application** to create a case for the grants proposal.
5. Enter the details of the applicant and the organization that is submitting the proposal, then select **Mark Complete**.
6. **Optional:** Add an authorized representative to act as a signatory for your organization.

   (Optional) Business contact can add an existing contact by in the **Individual** field. Existing business contacts can only be added if they are already associated with the business/ organization. You can create new contacts by adding their details in the form. This will create a new business contact, which can be approved by an admin in a later stage of the application. You can add multiple representatives to the application, or you may leave this section blank.
7. Enter the Proposal information and select **Mark Complete**.

Field	Description
Project Title	Enter title for the proposed project.
Project Abstract	Provide a summary of the project's abstract.
Proposed Funding Start Date	Select the intended start date for funding from the calendar input.
Proposed Funding End Date	Select the anticipated end date for the funding period. This date must be chronologically later the start date.

8. Add at least one project goal.
   A detailed narrative can be entered in the text, or provided via a file upload.
9. Create a deliverable.
10. Add the required key personnel to the application.
11. Provide information about the budget that will be used for your project, including allocations and relevant documents.
    Input the total budget required under the requested budget total field. The amount entered cannot exceed the limit set by the Grant Program Manager. Allocate budget for each category under Cumulative budget totals. The sum of the category amounts must match the total requested budget total. Once the cumulative category amounts match the requested budget total, the total budget allocated will appear in green.
12. Upload any other required documents.
13. Upload any letters of intent, memoranda of understanding, or other relevant documents that demonstrate partnerships or collaborations for your project.
14. Add any optional attachments to provide further context of the proposed project, such as appendixes, images, and extended data.
    You may leave this section blank.
15. Review the application in its entirety and correct any errors before submitting the application. You can edit any information from previous activities by selecting on the pencil icon next to each activity. You can export the application details to a PDF format using the **Export** button.
16. Sign off on the grants proposal.
    The applicant's signature can be either typed or drawn. The terms and conditions can be modified and adjusted as well.
17. Select **Submit** to route it to the agent and move it to the **Screening** stage.
    The case is moved to the **Review** stage, and the **Intake** stage is marked complete.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

View the results letter of a grant program proposal


As an applicant in the Grants Management Portal, you can view the results letter (and the merit review summary, where applicable) of your submitted grants applications.

Before you begin

Role required: business contact

Procedure

1. In the Grants Management Portal, navigate to **My Proposals** > **Submitted**.
2. Select the Grant Program you wish to accept or decline the award for.
3. Navigate to the **Results** tab, where you can review the results of the grant proposal set forth by the agency.
4. Select the PDF file to view the results letter, and the merit review summary, where applicable.

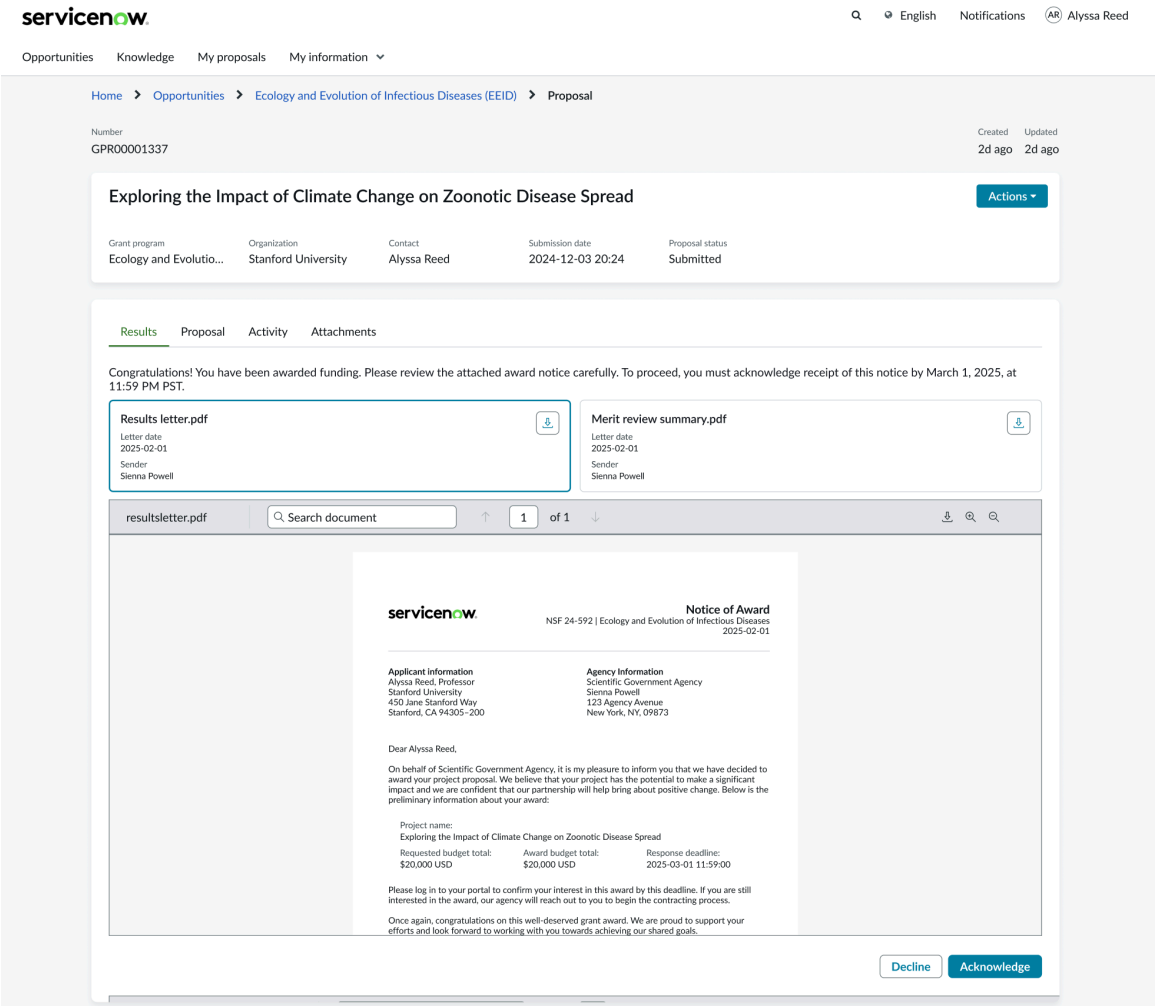

Here, you have the option to either decline or acknowledge the award by the date provided.

Accept or decline a grant award

As an applicant in the Grants Management Portal, you can review the terms of your grant award and choose to accept or decline the award.

Before you begin

Role required: business contact

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. In the Grants Management Portal, navigate to **My Proposals** > **Submitted**.
2. Select the Grant Program you wish to accept or decline the award for.
3. Navigate to the **Results** tab, where you can review the results of the grant proposal set forth by the agency.
4. Select **Acknowledge** to accept the grant award, or **Decline** to decline it.

Using the Reviewer Service Portal


The Reviewer Service portal is accessible by merit reviewers to review their assigned merit review tasks. Reviewers can review the grant proposal information available in various tabs in the portal and score the proposal. The scores are based on the review framework and rubric selected by the grants program manager during program setup.

The reviewer service portal is available to external agents or reviewers for viewing their merit review tasks and scoring the grant proposals. Scores generated are based on the review framework and scoring rubric selected by the grants program manager during program setup. From the reviewer service portal, the merit reviewers can either submit scores or decline to review by providing appropriate reasons. The grants program manager is notified of the merit reviewer decisions in the Grants Management portal.

External Reviewer Landing Page

The Grants Management experience begins on the Reviewer service portal landing page for external. Grants organizations may customize their landing pages with branding colors or other display changes, but the components may remain the same.


The following is an example of how the default landing page appears on the Reviewer service portal workspace for an external reviewer.

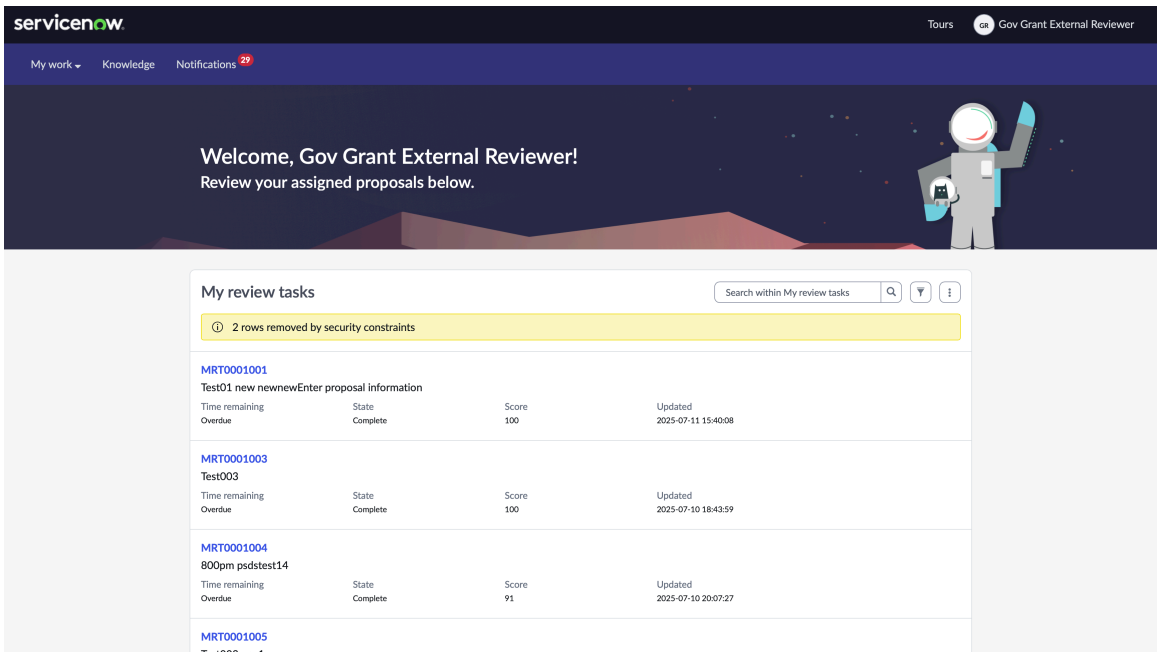

Here, you can view all assigned review tasks under the **My Review Tasks** section. Merit reviewers can do the following tasks in the Reviewer Service Portal:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- View and manage a list of review tasks for grant proposals.
- View grant programs or proposals that they are participating in.
- View the grant program announcement page.

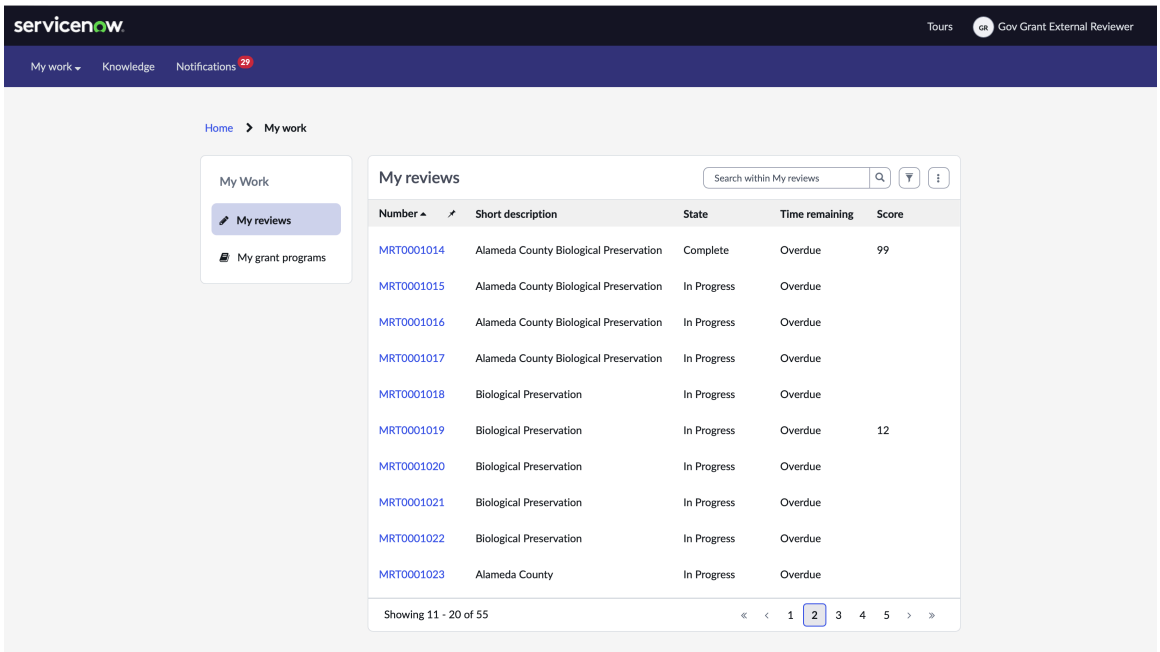


My grants program page

For external reviewers, the my grants program record page aims to be a one-stop shop. Within the My reviews page, you can view all your assigned Merit Review Tasks (MRTs) for which you serve as a reviewer.

From the **My Work** tab, select **My reviews**. You can view the list of Merit Review Tasks assigned to Gov Grant External Reviewer, as well as:

- View high-level information from the record page of the grant program by selecting the grant program number.
- View details of the listed review tasks such as time remaining, status, score, and flags.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

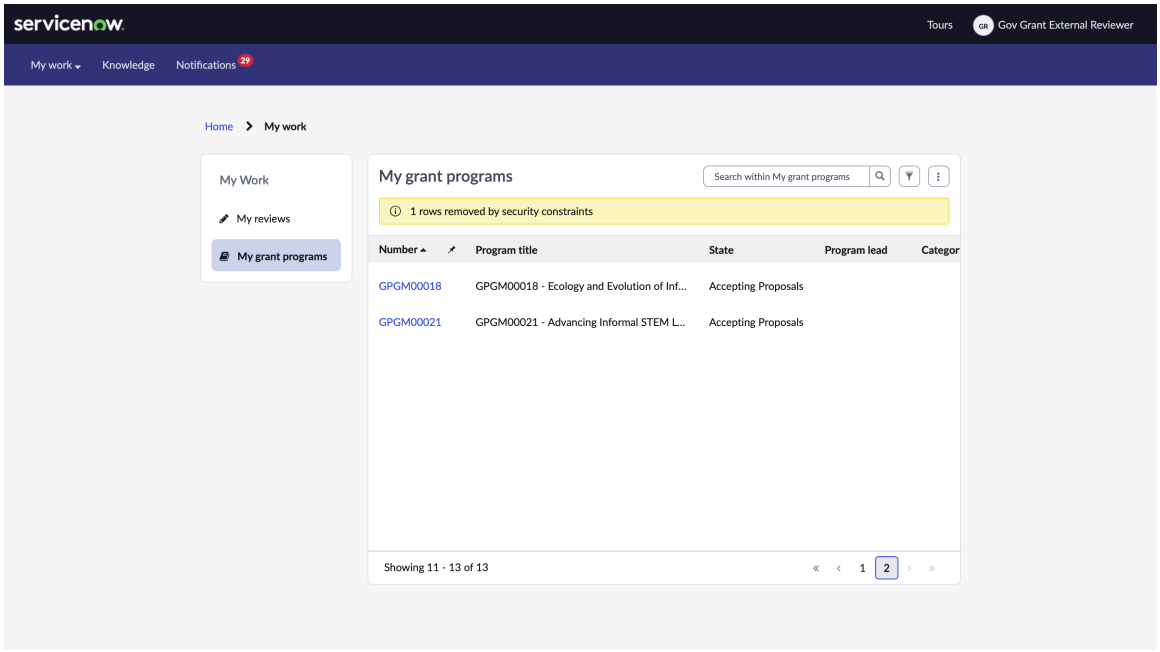

Merit Review Task Page


Users can select any Merit Review Tasks (MRTs) from the list and score each MRT that is currently in the “In Progress” state based on several attributes and assign a score out of 5. If necessary, users can also decline specific MRTs by providing a valid reason, such as a conflict of interest or other concerns. Additionally, users can view all the details associated with each task.

- View or reference the scoring rubric by selecting the KB article.
- Review proposals and assign scores based on their assessment or flag any reviews.
- Provide comments for rationale, strengths, or concerns about their evaluation of the proposal.
- Submit or decline a review along with justifications.

Merit Review Task Tabs


You can review the proposal by navigating through the following tabs: Proposal Information, Budget, Supplemental Materials, Compliance, and Activity.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

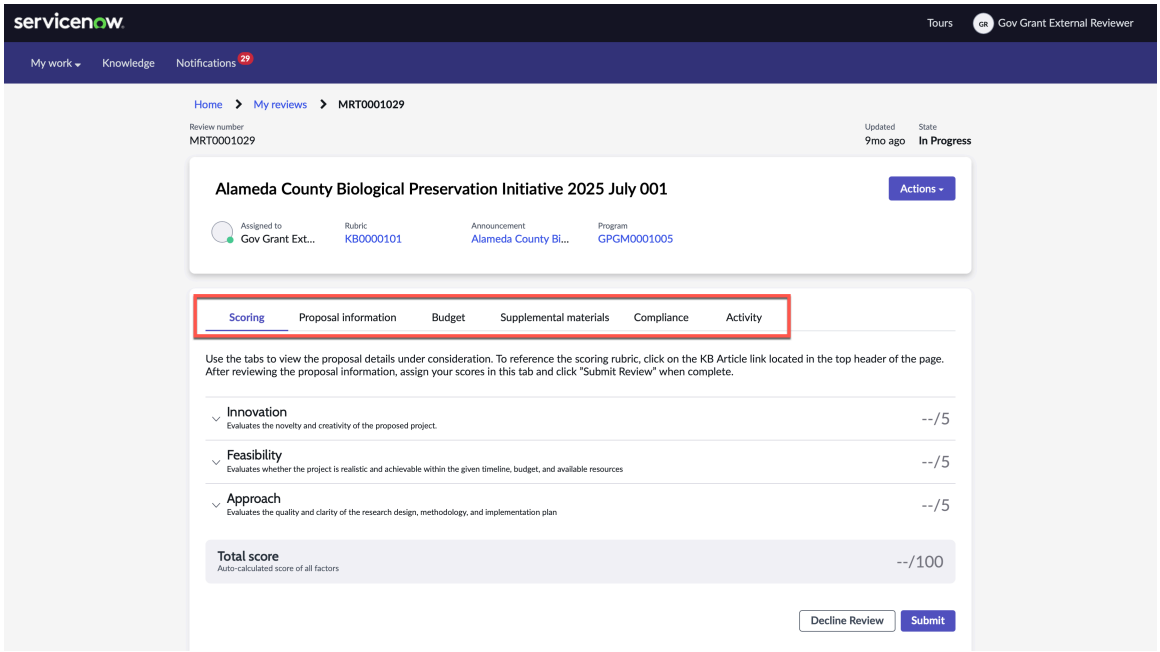

Scoring


By default, no scores are displayed in this tab. For each evaluation category—Innovation, Feasibility, and Approach—you can assign a score out of 5. Additionally, you can provide input for the Rationale Summary, as well as identify Strengths and Concerns. Once your input is complete, you have the option to Save or Reset your changes.

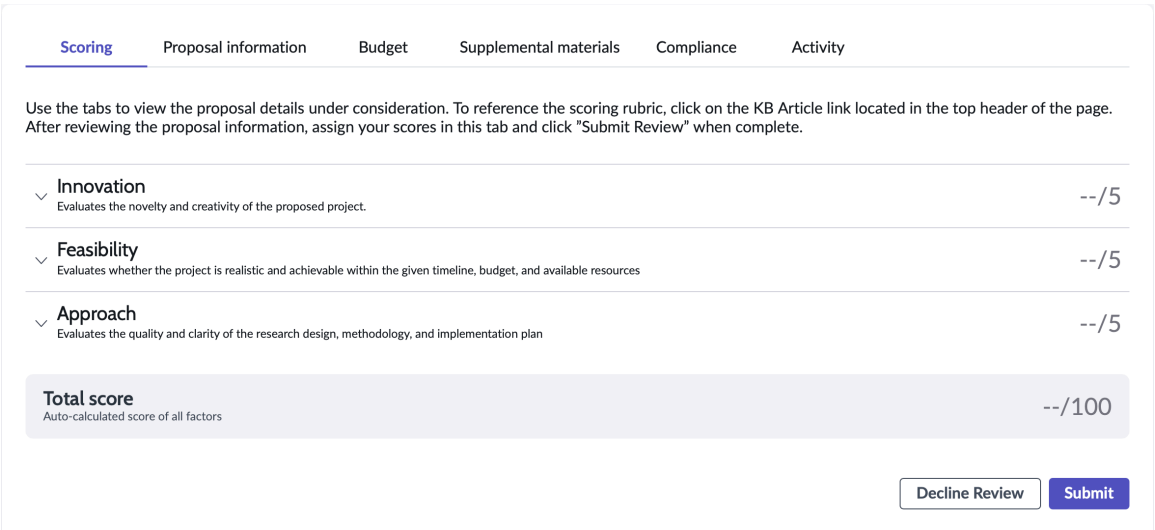

Proposal Information


This section provides detailed insights into the proposal, including the Proposal Overview, Narrative, Key Personnel, and Required Documents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

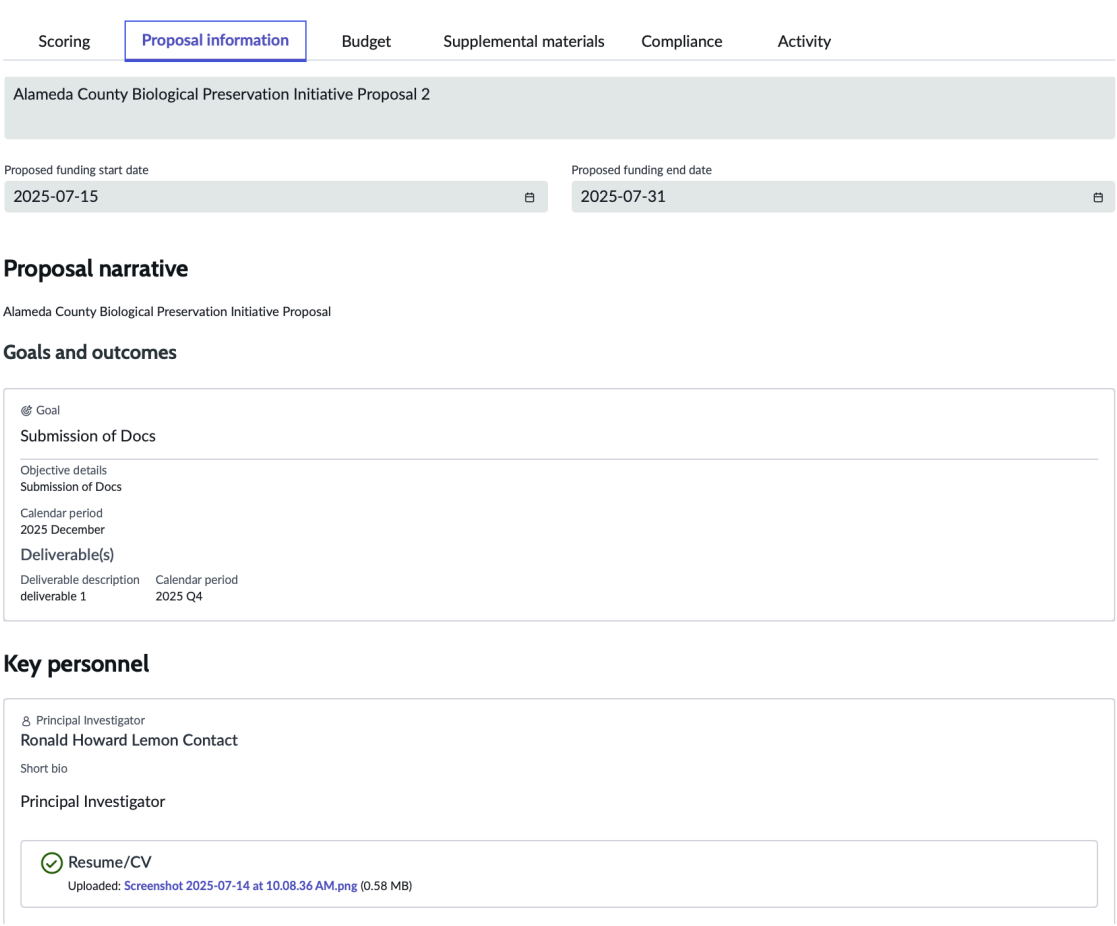

Budget


This tab provides a detailed breakdown of the financial aspects of the proposal, including cumulative budget subtotals and access to all relevant budget documents.

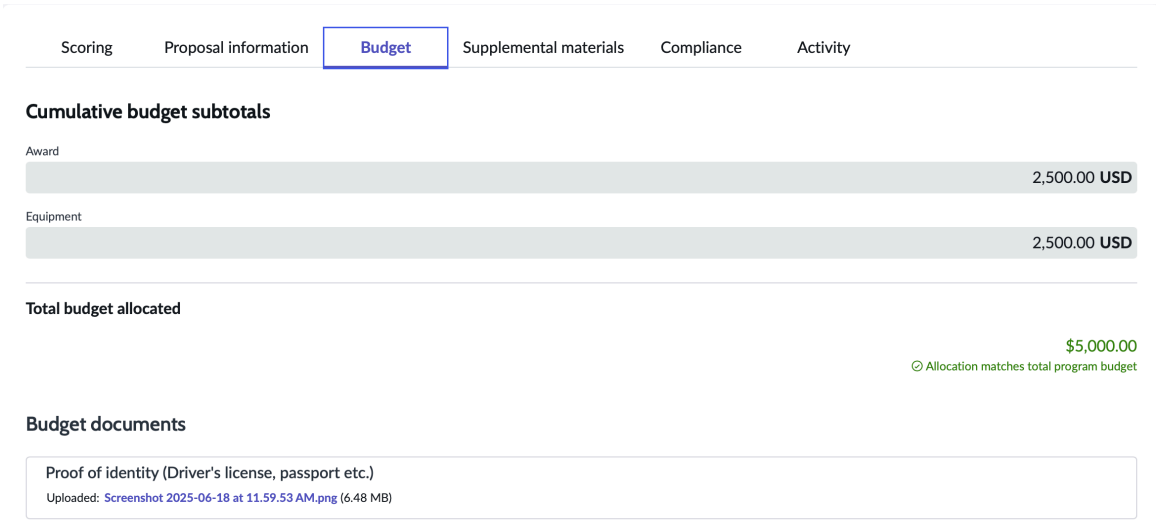

Supplemental Materials


This section includes additional supporting documents, such as Letters of Support and optional attachments.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

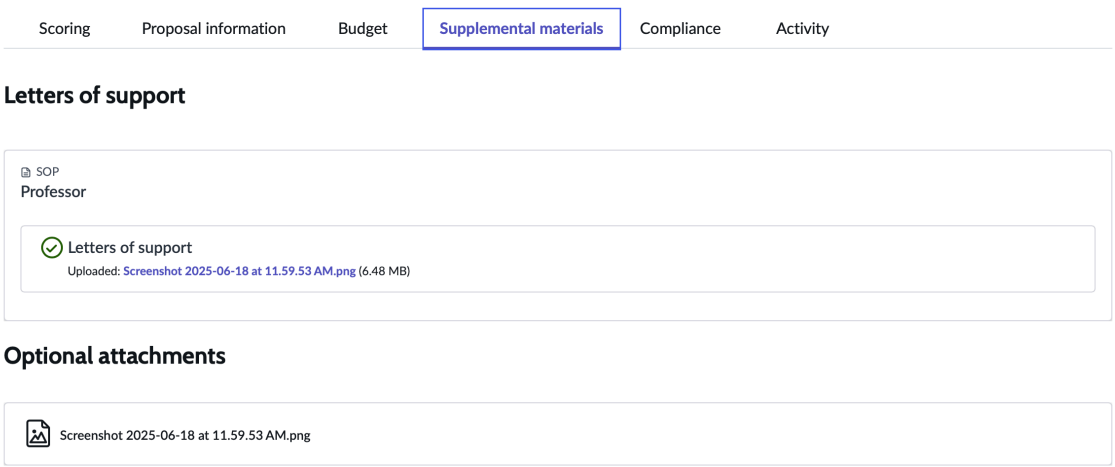

Compliance

This tab contains the compliance questionnaire along with the corresponding responses.

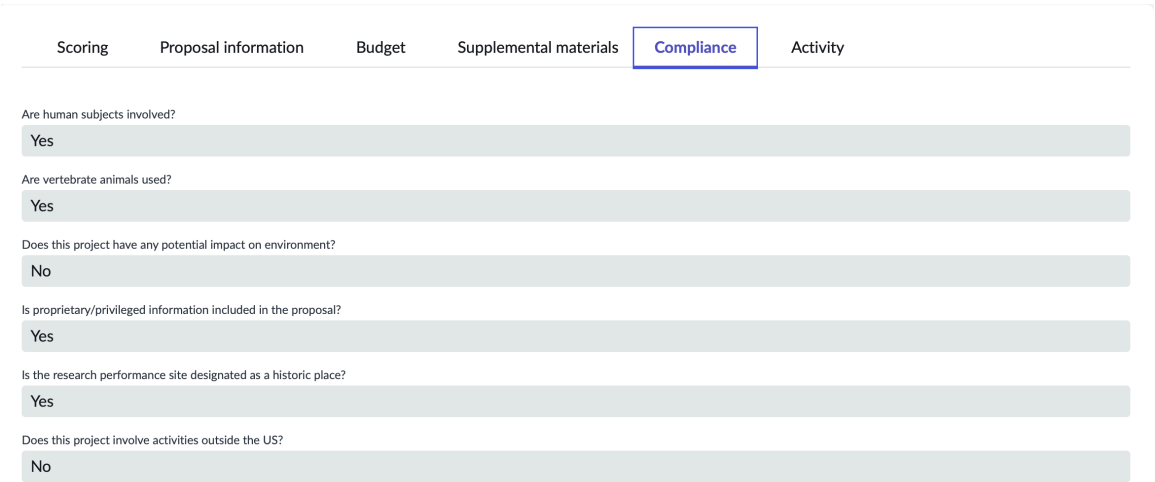

Activity

This tab allows you to track all actions, updates, and changes made throughout the merit review process.

Review and score a grant proposal using the Reviewer Service Portal

As a Merit Reviewer, you can review grant proposals for feasibility, impact, and alignment with the grant program's goals. Reviewers can then score proposals as part of the evaluation stage of the Public Sector Digital Services Grants Management using the Reviewer Service portal.

Before you begin

Role required: external_reviewer

About this task

Reviewers can then score proposals as part of the evaluation stage of the Public Sector Digital Services Grants Management using the Reviewer Service portal.


You can either select Submit or Decline Review for a particular Merit Review Task. When you click Submit, a modal will appear where you can confirm by clicking Submit again, and the state will automatically change from “In Progress” to “Complete”.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

When you select Decline Review, a modal pops up where you can decline specific MRTs by providing a valid reason, such as a conflict of interest or other concerns. The state then changes to Declined, and the view returns to the default scoring screen with no scores.

Procedure

1. Log in to the Reviewer Service Portal.
   All review tasks appear under **My review tasks** along with the state of the task, score, and the last updated date.
   - To view your review tasks, navigate to **My work** > **My reviews**.
   - To view review tasks for a specific grant program that you are participating in, navigate to **My work** > **My grant programs**.
2. Select a review expand the categories under the **Scoring** tab.
   Scoring is the default tab that appears. Select other tabs to view information about the grant proposal.

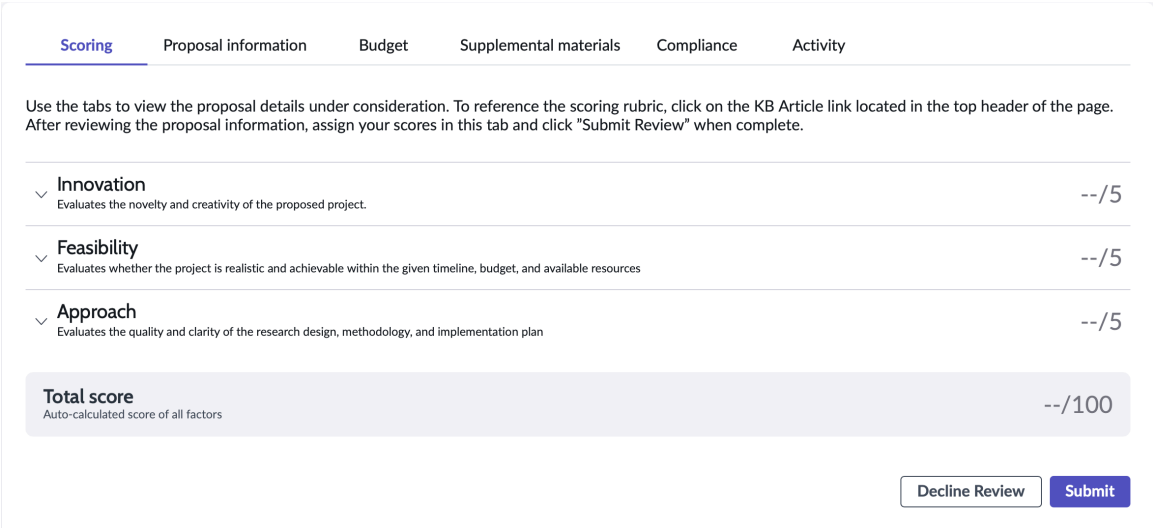

3. Select a score from the drop-down and provide comments for rationale, strengths, and concerns for each of the categories and select **Save**.
   For more information about the scoring rubric, select the KB article listed under **Rubric**.
4. Select **Submit** to complete the review or select **Decline review** and provide a reason.
   The evaluation is successfully complete and the status of the review task is updated to **Complete**, along with the score, triggering a notification to the grants program manager.

Result

The proposal is now routed to the grants program manager for further evaluation, and they are able to approve or decline the proposal.

Using the Business Location Service Portal in Public Sector Digital Services

You can use the Business (Agency) Location Service Portal (BLSP), available with the Public Sector Digital Services application, as a one-stop shop to manage internal and external agency locations.

As a user with the sn_customerservice.svc_location_manager, sn_customerservice.svc_location_manager_contributor, or admin role, you can use the Business (Agency) Location Service Portal page to:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Get a 360° view of an agency location.
- Add and manage agency members.
- Submit cases against agency locations, or public services at a service organization.
- Access Knowledge Base articles and engage with the community.

From the Business Location Service Portal, you can access and use the following features:

Business Location Service Portal

UI component	Description
Support	Click **Support** to create a customer case.
Knowledge	Clicking **Knowledge** on the header takes you to the kb_home page. You can search the Knowledge Base or view a list of top-rated or most viewed Knowledge Base articles.
Cases	View the list of cases.
Your Information	Navigate to agency locations, services received, and install base items.
Profile menu	Click your profile photo to either view your profile or log out.
Search	Enables you to search support articles and requests. Enter a search term and click **Search** to view the search results.
Browse Services	Click **Browse Services** to report an issue or request a service. Use the service to register a member at an external agency location.
View Articles	Explore the knowledge base to get the information.
Ask the community	Provides access to the Community homepage. You can use the community to ask questions and get answers, connect with people who share similar expertise, and join forums and participate in discussions.
Agency Locations	Get the 360° view of the agency location. Use the feature to: • Add a member to an agency location. • Report cases on behalf of an agency location. • Report cases against services received from a specific agency location. • Report cases against public services offered at a particular agency location.
Featured Articles	View featured community content.
Most Viewed articles	View a list of the most viewed articles.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Depending on the configuration set by your administrator, you can perform the following tasks from the Agency Location Service Portal:

- Register and assign staff members to an agency location
- Report cases on behalf of an agency location
- Report cases against services received from a specific agency location
- Report cases against public services offered at a particular agency location
- Access knowledge base articles and frequently asked questions

Using Playbooks and Solutions for Public Sector Digital Services

A playbook provides government service agents with step-by-step guidance through the life cycle of a public service request case. Use Playbooks to fulfill requests for license and permits, government records and other public information, or non-emergency service requests.

A playbook takes a workflow and breaks it into multiple stages or lanes. Each stage in a playbook includes one or more activities, or steps, for you to complete. Stages can also include automated activities, such as auto-sending an email to a customer when a stage or activity is complete. When using a playbook, you can:

- View the playbook stages and activities.
- Select an activity and perform the work to complete that activity.
- Mark an activity as complete and move to the next activity or stage.
- Complete the stages and activities to resolve the case.


The following applications are available with Public Sector Digital Services that enable you to create and use playbooks:

- Grants Management
- Social Benefits Playbook
- License and Permit Playbook
- Information Request Playbook
- Service Request Playbook

The corresponding playbook for each case type automatically appears in the **Playbook** tab when you create an public service request case as an agent in the CSM Configurable Workspace, or when a constituent puts in a request through the Government Service Portal.

The workflows for a type of case and the activities that you need to resolve these cases are in the playbook. By using a playbook, you can visualize the entire life cycle of the public service case workflow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

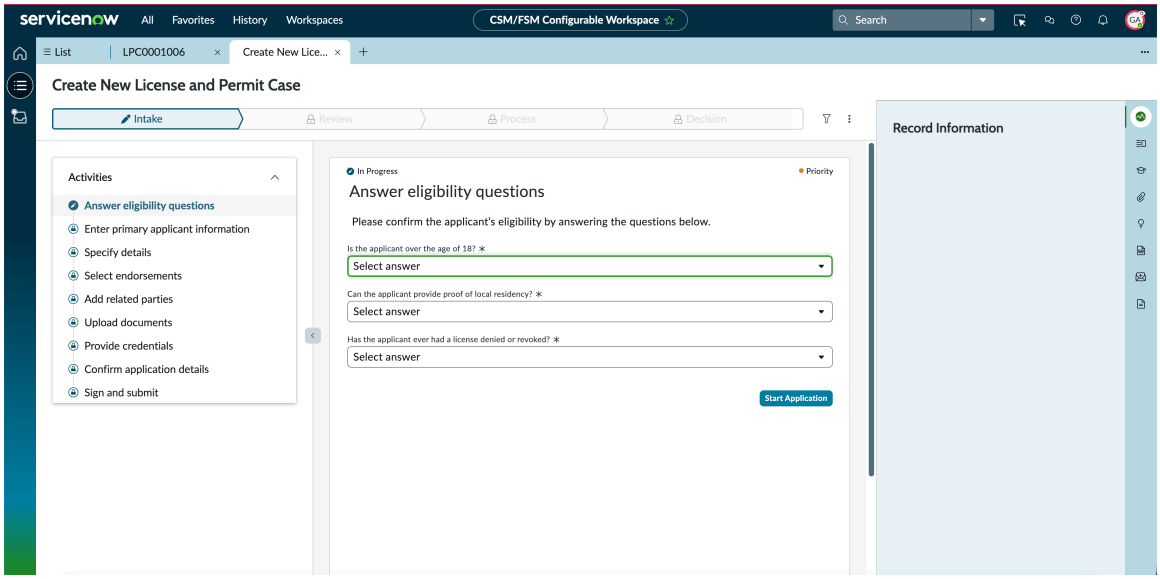

Playbook stages

Each playbook contains four stages (Intake, Review, Process, and Decision) and several activities in each stage. Below is a diagram illustrating the base playbook workflow. This workflow can be modified to match a specific public service request use case, depending on what your agency offers.

The base Playbook workflow stages are listed in the following table.

Playbook stages

Task	Description
Intake	Guides you through the record creation process by capturing the details of the request and assigning it to the right agent.
Review	Acts as a checkpoint for duplicate cases and provides you with an opportunity to review the case details.
Process	Guides you through the activities for request fulfillment.
Decision	Captures and communicates the decision and any supporting information to the constituent and any other agents or involved parties.

Playbook layout

A playbook is made up of several areas, including the playbook life cycle, the playbook work area, and the contextual side panel. The activity view determines how the stages and activities appear in the playbook.


The default activity view for Playbooks in Public Sector Digital Services is the process-based experience view. This view, which is shown in the following example, shows constituent or business information and case task information at the forefront of the playbook work area as you work on it.

The process-based playbook layout shows the following features:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- A horizontal stage picker that gives the agent a complete view of the entire process and where they currently are in that process. Agents can use the stage picker to track their overall progress as they work on cases.
- Record information on the left side of the page, such as the contact information that is always available.
- Related records in the contextual side panel supported by the dynamic related records component.

Playbook layout with the Process-based Experience

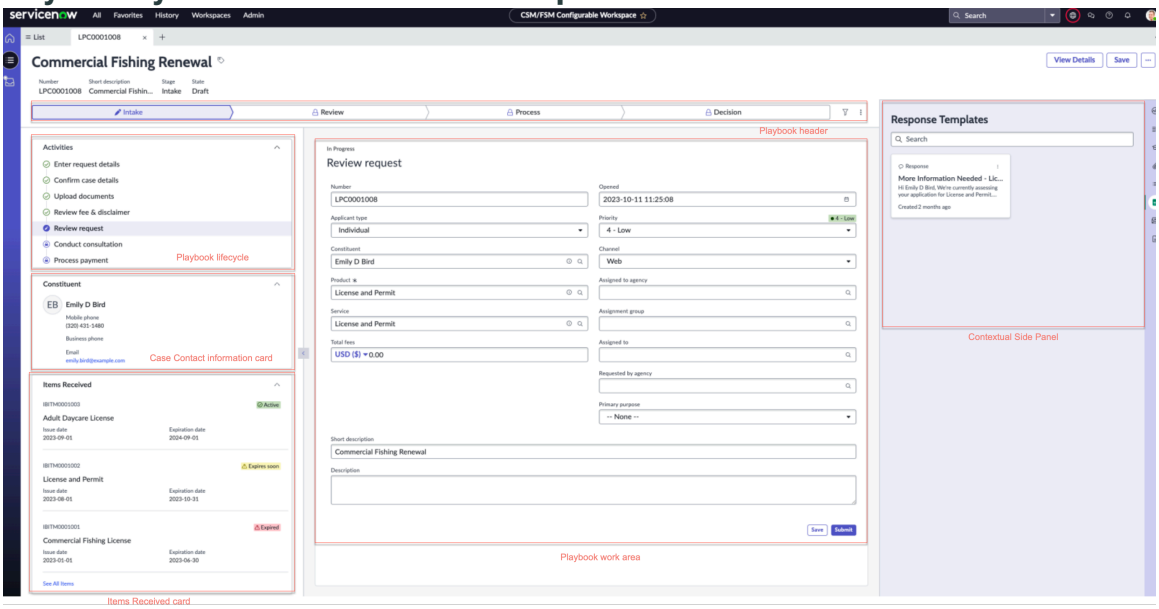

The following table shows the components shown in the Playbook workspace.

Playbook components

Playbook area	Description
Playbook header	• Appears at the top of the playbook. • Shows the title of the playbook and a horizontal stage picker that displays progress through the playbook stages. • Includes a filter that you can use to filter the activities by the assigned user or the activity status. • Includes the Playbook Actions menu that you can use to select the playbook-level and activity-level actions.
Playbook Lifecycle	• Appears in a panel on the left side of the playbook. • Displays a list of the activities for each stage. • With the horizontal stage layout, you can expand or collapse the entire list of activities for the current stage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook components (continued)

Playbook area	Description
Playbook work area	• Appears in the middle of the playbook. • Displays the card for the current activity.

Contextual side panel	• Appears on the right side of the playbook.
	• Includes the tabs that you can use to display the following types of information:
	  ○ Case or case task activity stream.
	  ○ Ribbon information such as the case overview, customer details, timeline, and service level agreements (SLAs).
	  ○ Dynamic related records. For more information, see Dynamic related records.

Case Information Contact Card	• Contact information for the constituent or business that submitted the request. • Appears in a panel on the left side of the playbook.
Service Request Map Card	• *`Service Request Playbook`* **only** • New component of the process-based playbook layout. • Appears after the intake stage, if the sn-geo-map plugin is installed, and Google API key is configured.
Items Received Card	• *`License and Permit Playbook`* **only** • Appears on the left side of the playbook. • Shows licenses/permits that are active, expired, and expiring soon, and the time remaining on each one.

Public Sector Digital Services Playbooks

The Public Sector Digital Services platform includes the following playbooks:

Social Benefits Playbook

The Social Benefits Playbook application provides an end-to-end workflow for handling requests for social benefits submitted by public sector end users. The application includes the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Packaged playbook that deploys out of the box case types, playbooks, business logic, SLAs, notifications and more to automate workflow to orchestrate the process and help agents resolve requests faster and efficiently.
- Customizable catalog of pre-built social benefit options that constituents and businesses can choose from on the Government Service Portal.
- Extendable data model through service definitions.

License and Permit Playbook

The License and Permit Playbook application provides an end-to-end workflow for handling license and permit requests submitted by public sector end users. The application includes the following:

- Packaged playbook that deploys out of the box case types, playbooks, business logic, SLAs, notifications and more to automate workflow to orchestrate the process and help agents resolve requests faster and efficiently.
- Customizable catalog of pre-built license and permit request options that constituents and businesses can choose from on the Government Service Portal.
- Extendable data model through service definitions.

Information Request Playbook

The Information Request Playbook application provides an end-to-end workflow for handling public record and information requests submitted by public sector end users. The application includes the following:

- Service catalog of pre-built, information request options that constituents and businesses can choose from on the Government Service Portal.
- Automated workflow process that agents use to resolve information requests faster and efficiently.
- If using Advanced Work Assignment, an Information Request service channel that admins can use to automatically route information requests to designated agents.

Service Request Playbook

The Service Request Playbook application provides an end-to-end workflow for handling non-emergency service requests submitted by public sector end users. The application includes the following:

- Service catalog of pre-built, non-emergency request options that constituents and businesses can choose from on the Government Service Portal.
- Automated workflow process that agents use to resolve non-emergency service requests faster and efficiently.
- If using Advanced Work Assignment, a Service Request service channel that admins can use to automatically route non-emergency service requests to designated agents.
- Pre-built Virtual Agent conversation topic that enables constituents and businesses to use Virtual Agent to submit non-emergency service requests.

For more information on installing and configuring Playbooks for Public Sector Digital Services, see Configuring Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using Grants Management


Use Grants Management for Public Sector Digital Services to set up and award grants, and screen proposals for them.

The Grants Application Workflow in the Public Sector Digital Services (PSDS) Grants Management Playbook provides a structured process for managing grant applications from submission for the pre-award phase. It begins with application intake, where applicants submit required forms and eligibility is verified. The review and evaluation phase involves initial screening, technical assessments, and scoring to determine funding recommendations. Once selections are made, agencies proceed with award decisions and notifications, followed by grant agreement execution, where terms, reporting requirements, and disbursement schedules are established. Grants are financial funding provided to individuals or organizations for a particular purpose, usually to fund initiatives that serve the public good.

Grants Management Landing Page

The Grants Management experience begins on the Grants Management landing page for grants agents and grants program managers. Grants organizations may customize their landing pages with branding colors or other display changes, but the components may remain the same.

The following is an example of how the default landing page appears in the CSM Configurable Workspace Grants Management workspace for a grant agents or grant program manager.

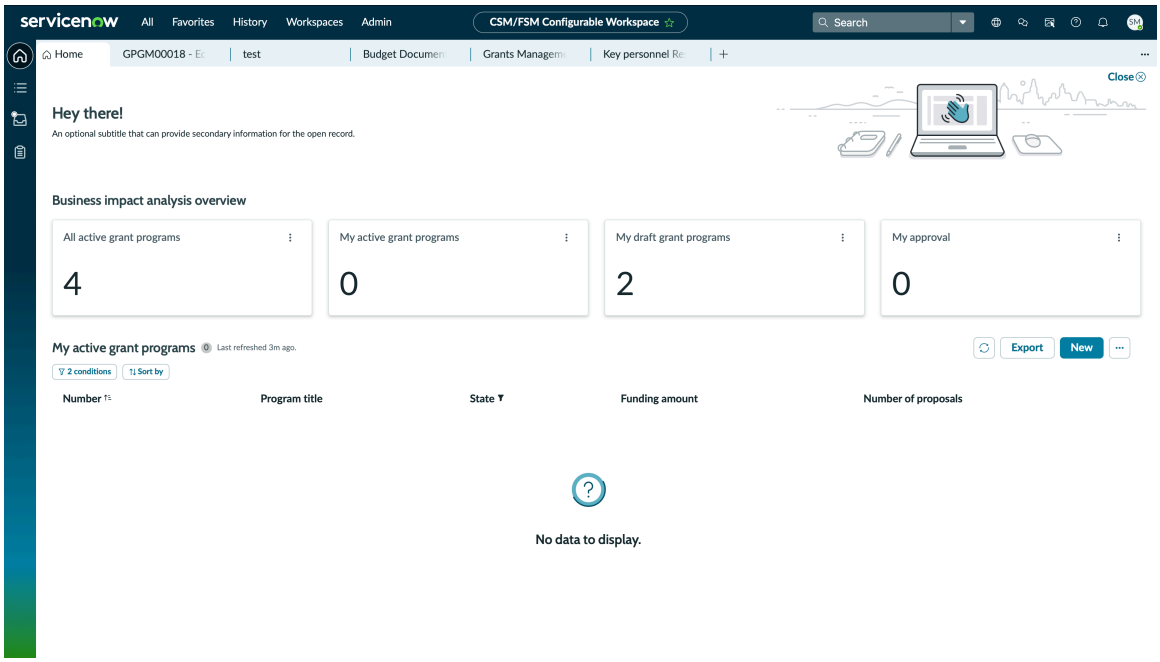


Here, you can see your workload at a glance, showing active cases, shared cases, upcoming deadlines and events, recent activity, and pending tasks. You can customize this view to your preferences, sorting cases and tasks with custom filters. You can create a grant program directly from this view, or you can navigate to the Lists menu to create it from there.

Grants Management Program Setup Playbook

This is the first step in creating a grant program for applicants to submit to.

The process begins with program definition, where agencies establish milestones, internal program team members, eligibility criteria, budgets, and key performance metrics. Next, agencies configure the application process, defining required forms, terms and conditions, required budget categories, and review teams. Once the grant program is configured, it is reviewed, approved, and then published.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

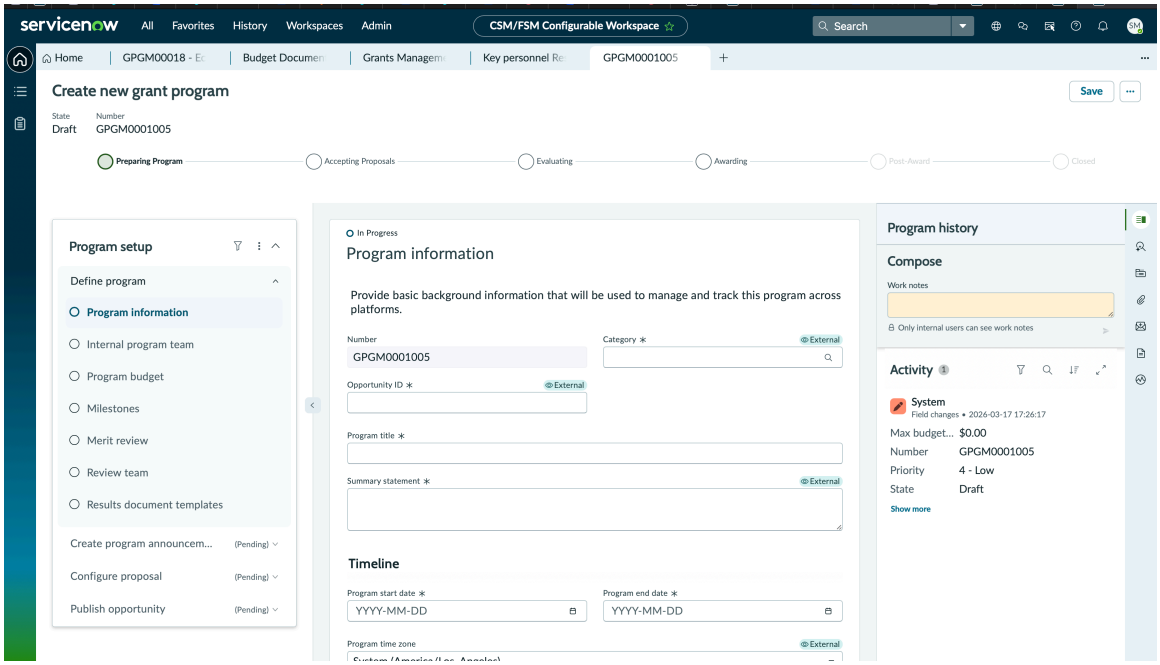


This playbook contains four stages, and several activities in each stage. It guides the program manager through the process of creating a grants program, from defining key details, to creating the announcement, to defining budget and milestones, to defining eligibility, to publishing it to the agency's Grants Management Portal. For more information on using the PSP to create a GP, see Using the Grant Program Setup Playbook in Grants Management.

Once you create a Grant program using the ProgramSetupPlaybook, you can view the details on the program information record page.

Grants Management Program Record page

Once you create a grant program, you can see every case detail (narrative, evidence, entities, tasks, and case team) organized into a single grant program record, even before you publish the opportunity to the portal for applicants to submit. And you publish the opportunity, the state will display as **Accepting Proposals** in this view, and you may see all active proposals for the grant program by selecting the **Proposal** tab, and edit some program details by selecting the corresponding tabs.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

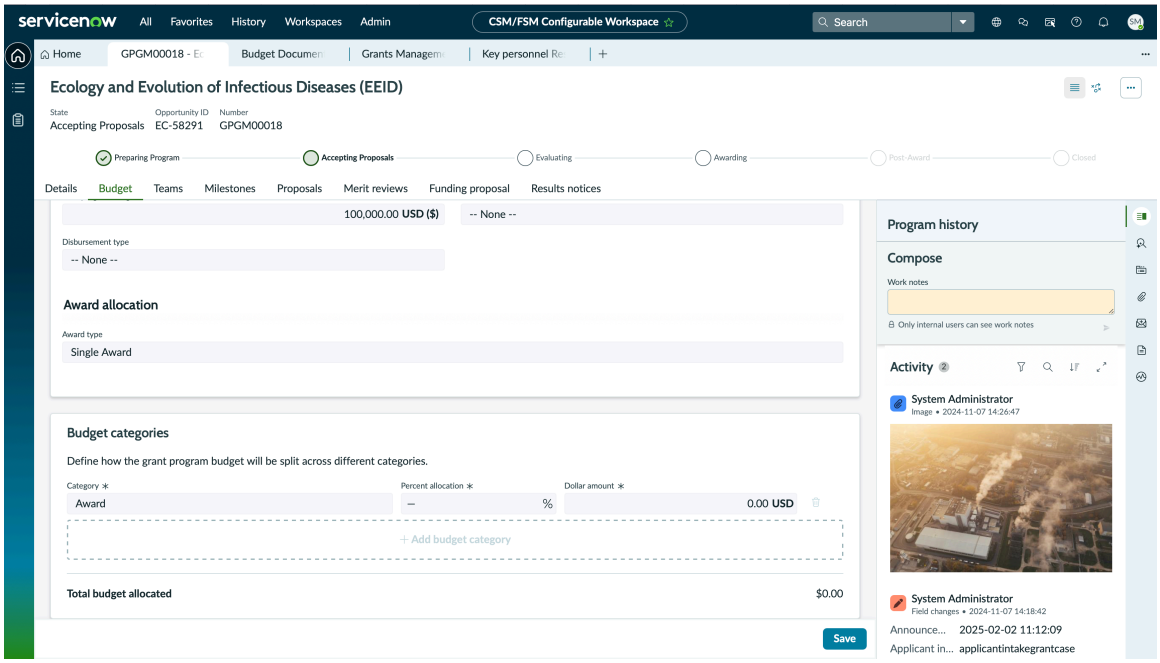


For grants managers and agents, the grants program information record page aims to be a one-stop shop.

Grants Management Application Intake

For applicants, the application intake experience happens entirely on the Grants Management Portal, separate from the grants program manager/agent view. This feature improves self-service with a Grants Management Portal that simplifies finding, applying for, and tracking grants. Reduce applicant effort with guided intake, including save, resume, and export functionality . Increase agent productivity with tools to make screening submissions easy. This is where applicants will submit proposals for a grant program that was published by a GPM using the setup step. They can then be screened in the agent portion of the intake and screening feature. With a guided intake setup, including save, resume, and export functionality, Grants Management Intake aims to simplify the process of finding, applying for, and tracking grants for applicants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

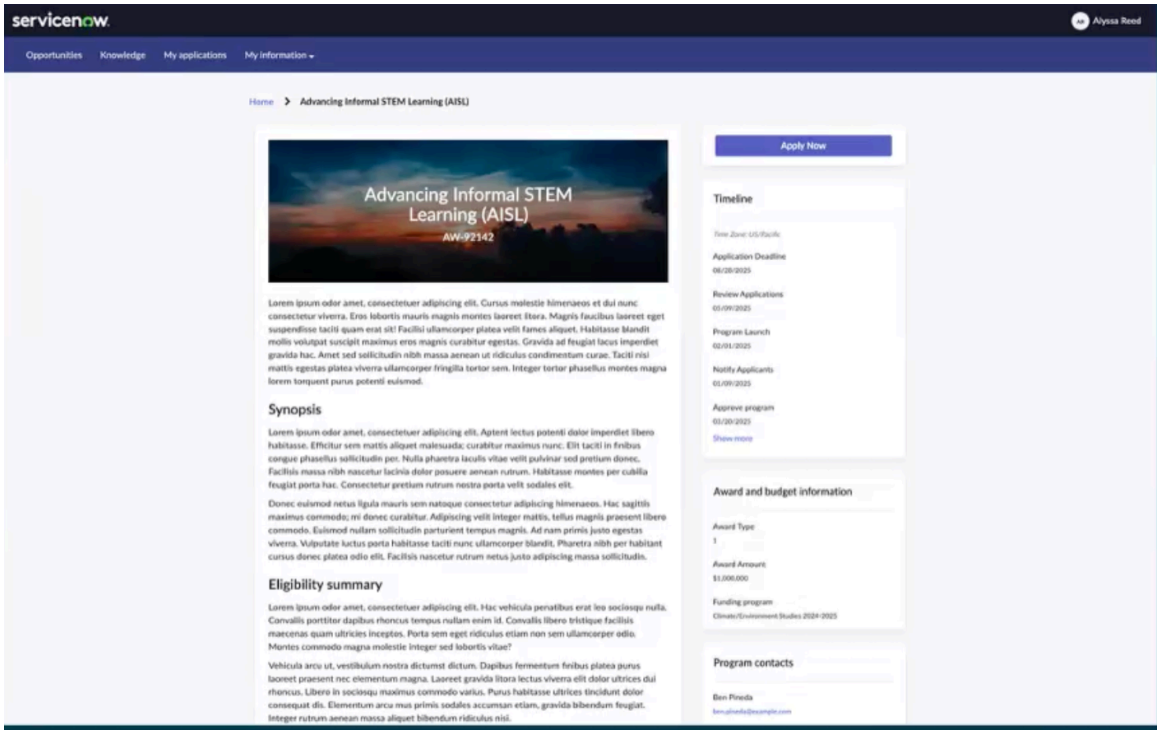

An applicant submitting a proposal is the first stage of the grants proposal playbook. The playbook is in the screen stage by the time it arrives to the agent. An agent cannot submit an application on behalf of an agent.

For more information on how applicants can use the Grants Management to view grants opportunities, submit applications, and view results, see Using the Grants Management Portal.

Grants Management Application Screening

For grants program directors and case agents, the application screening feature, stage two of the grants proposal playbook, provides visibility across all proposal and submission details related to the grant program, once an applicant submits a proposal for an active grant program created by the grant program manager. Tools for agents to streamline the screening of submissions. The Grants Proposal Workflow in Public Sector Digital Services Grants Management provides a structured process for managing grant proposals from submission for the pre-award phase.

Using the Grants Management Screening feature, managers can:

- Review the proposal
- confirming eligibility
- approving new contacts
- verifying documents submitted by the applicants


The screening stage of the proposal playbook in the CSM/FSM Configurable Workspace contains the following key steps in the application review process: Screening: Entails reviewing the proposal, confirming eligibility, approving new contacts, and verifying documents.

For more information on how grants managers can use the Application Screening feature, and Screen a grant proposal application in the Grants Management Grants Proposal Playbook.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management Merit Review

For External reviewers, the Merit Review experience happens on the reviewer service portal, separate from the grants program manager/agent view. Allows external reviewers to review, all within a dedicated portal.

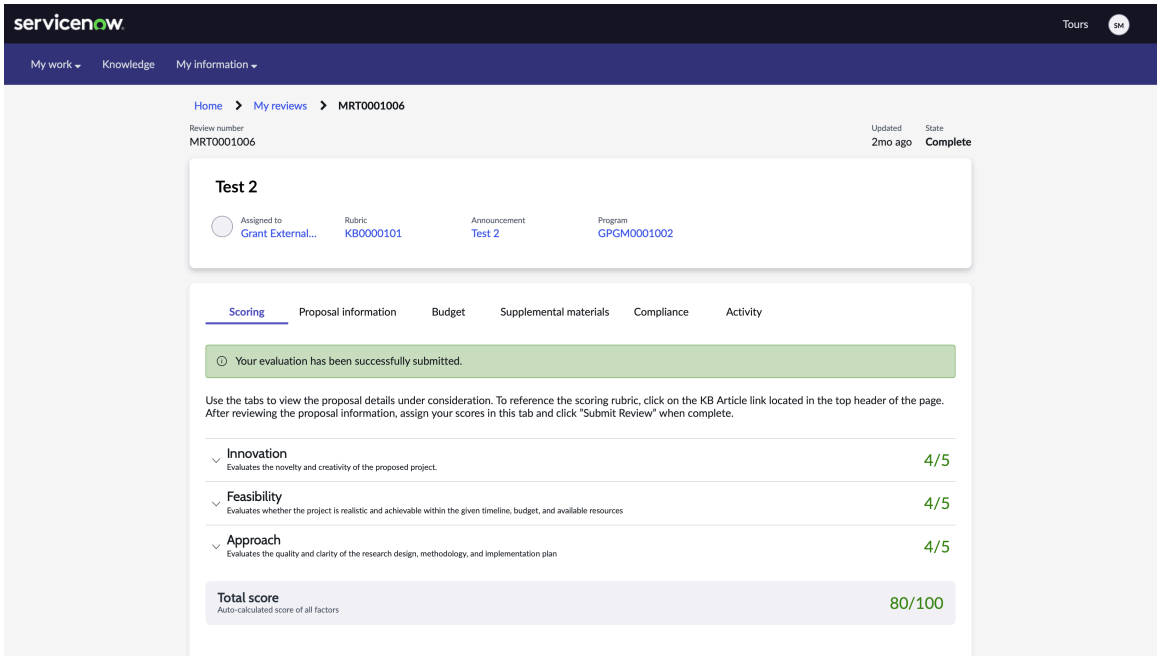

For more information on using the Reviewer Service Portal as an external merit reviewer, see Using the Reviewer Service Portal.

Using the Grant Program Setup Playbook in Grants Management


Design and configure a grant program before accepting applications from applicants or their liaisons. With Grants Management Program Setup, agencies can establish milestones, internal program team members, eligibility criteria, budgets, and key performance metrics, and grants program managers et up and manage grant programs with guided steps, defining merit review due dates, review framework, scoring rubric, and internal review teams.

Grants Management is a packaged application, with playbooks and workflows built in to support an agency's grant portfolio at multiple levels. The grants workflow is split into two parts: Grants Management Program Set Up, and Grants Management Application Intake and Screening.

The Grant Program Set-Up workflow is designed to support the comprehensive process of establishing a Grant Program. This workflow is divided into four distinct stages, each intended to guide the Grant Program Manager through both internal and external program configuration requirements.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Define Program

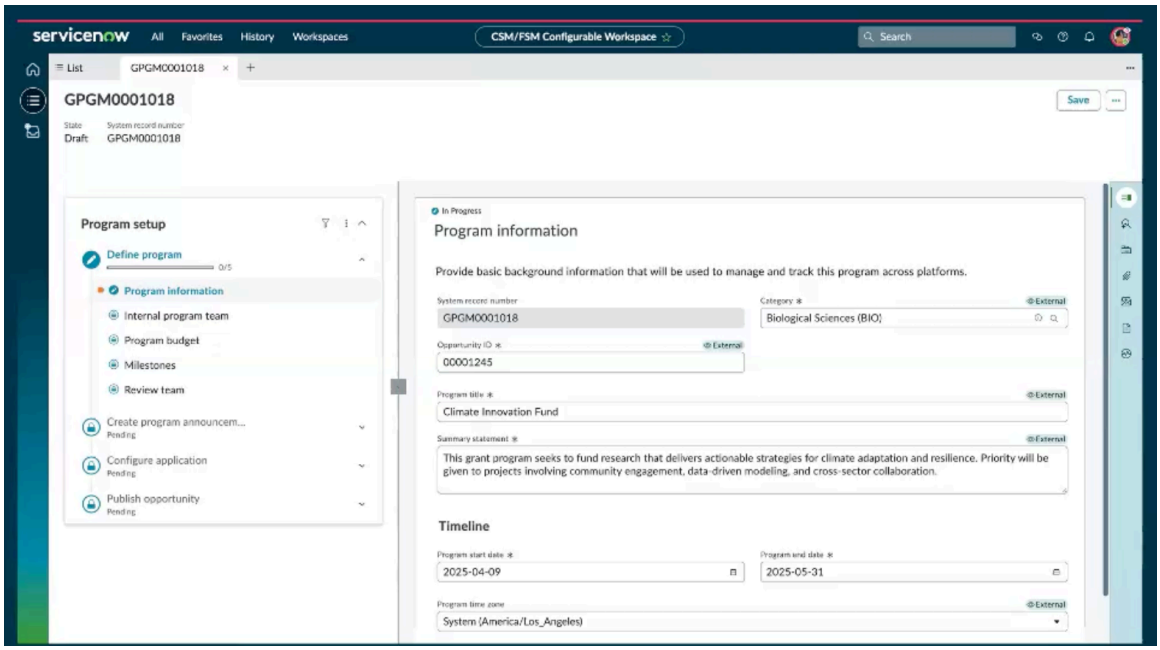

The initial stage, Define Program, enables multiple activities to be conducted simultaneously, streamlining the process of establishing program parameters. Key tasks during this phase include setting internal timelines, determining the program budget, identifying milestones, selecting merit review frameworks, forming teams, and preparing letter templates. Implementors may also have additional steps unique to their organization's needs and can freely add, modify, or remove activities to ensure their Grant Programs are fully configured according to specific requirements.

Program Announcement

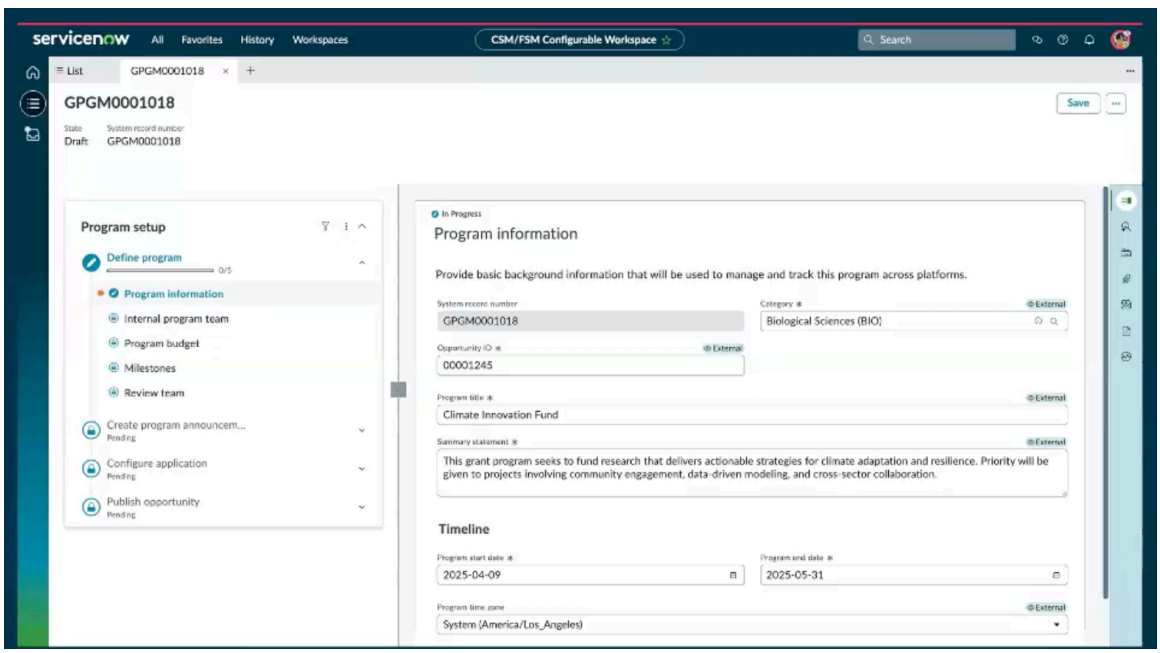


During the Program Announcement stage, all necessary configurations for the announcement page on the portal are completed. This involves entering essential details about the program, specifying points of contact, and providing relevant resources. The information configured in this

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


step becomes accessible to applicants when they view the catalog item for the Grant Program, ensuring transparency and clarity about the opportunity.

Configure Application

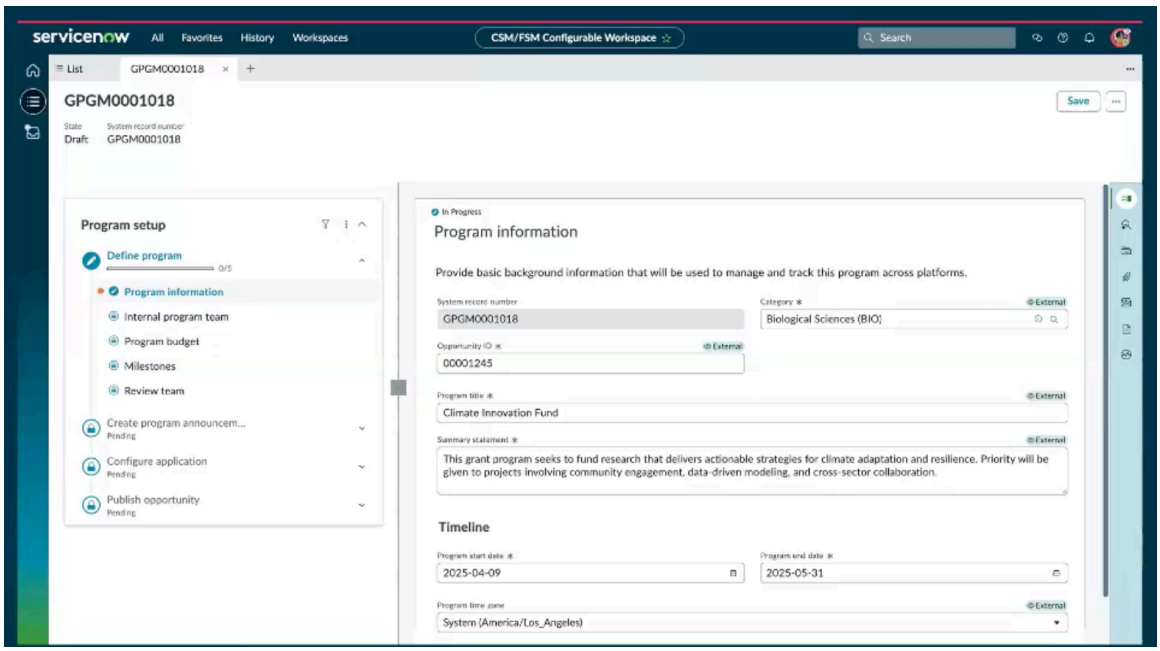

The Configure Application stage addresses the setup of application steps. Application requirements may vary depending on the individual Grant Program, so it is important to carefully define and configure elements such as the applicant information form, eligibility screening criteria, budget requirements, proposal narrative format and requirements, compliance mandates, and the terms and conditions to be presented for signature. Each Grant Program should tailor these configurations to align with its specific objectives and regulatory needs.

Publish Opportunity

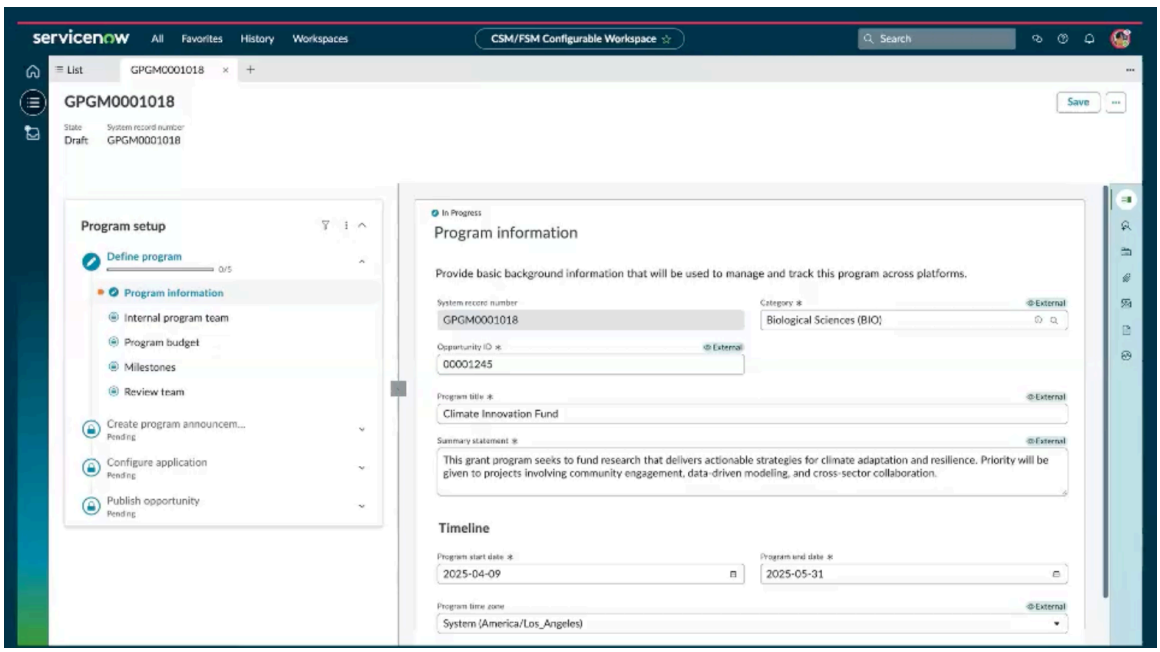


The final stage, Publish Opportunity, involves a thorough review of all preceding setup steps. At this point, a preview of the program announcement is presented to the Grant Program Manager

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

for verification. Following the review, approval is requested from the Grant Program Director. Once approval is granted and all steps have been validated, the program can be published in accordance with the established timelines.

Set up a Grant Program in Grants Management

Design and configure a grant program before accepting applications from applicants or their liaisons. With Grants Management Program Setup, grants program managers can set up and manage grant programs with guided steps.

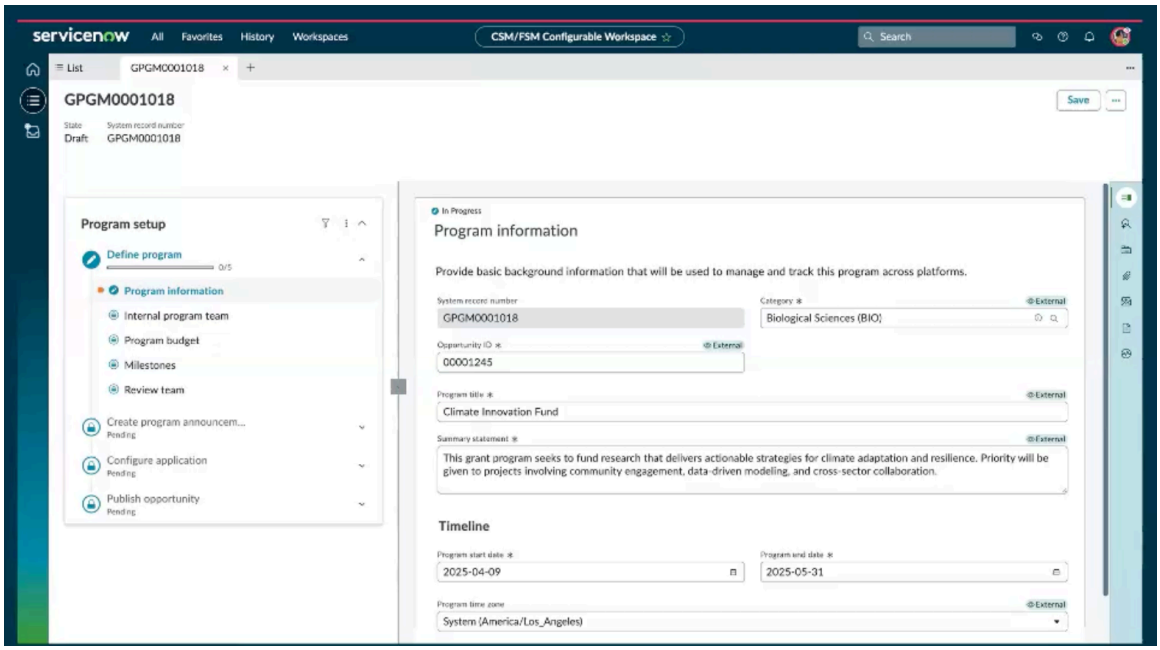

Define key details regarding the grant program. Agencies establish milestones, internal program team members, eligibility criteria, budgets, and key performance metrics. Grants program managers define merit review due dates, review framework, scoring rubric, and the internal review team.

Make it effortless for Grant Program Managers to create, publish and manage grant programs. Minimize errors with a guided process including built-in business logic. Protect sensitive information with role-based access management.

Grants Management is a packaged application, with playbooks and workflows built in to support an agency's grant portfolio at multiple levels.

The workflows for a type of case and the activities that you must complete to resolve these cases are outlined in the playbook. By using a playbook, you can visualize the entire life cycle of the Grants Management setup workflow.

Playbook stages

Task	Description
Intake	Define key details regarding the grant program. Applicants submit required forms and eligibility is verified.
Screen	Build the program announcement. Acts as a checkpoint for eligibility verification and provides you with an opportunity to review the grant details.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A grant announcement is a formal solicitation issued by a funding organization. It details the objectives, eligibility criteria, funding amounts, and application procedures for a specific funding opportunity. Grants Management Program Setup Playbook walks grants program managers through the process of creating and building out a grant program announcement.

Grants Management Program Set Up allows you to set up and manage grant programs with guided steps to create, publish, and, manage different grant programs under your agency, making sure to protect sensitive information with role-based access management.

Like other Public Sector Digital Services playbooks, this playbook contains four stages, and several activities in each stage. However, since this playbook is designed specifically for grant program managers create net new grant programs, it guides the program manager through the process of creating a grants program, from defining key details, to defining budget and milestones, to publishing it to the agency's Grants Portal.

Each grant program creates a product model record.

Grants Management Program Setup stages are listed in the following table.

Playbook stages


Task	Description
Define program	Define key details regarding the grant program. Agencies link the grant program to a funding program, establish milestones, internal program team members, eligibility criteria, budgets, and key performance metrics. Grants program managers define merit review due dates, review framework, scoring rubric, and the internal review team.
Create program announcement	Build the program announcement. Define the required forms, terms and conditions, required budget categories, and external-facing point of contact. Provides you with an opportunity to review the grant details.
Configure application	A grants program manager puts together an application, which includes eligibility and screening criteria, the collection of applicant information data, budget limitations, and other crucial information.
Publish opportunity	Define announcement removal and proposal close dates and publish the program announcement to the Grants Management Portal.

Create a grant program using Grants Management program setup for Public Sector Digital Services

Use the Public Sector Digital Services Grants Management program setup to either create a new grant program, or create one from an existing configuration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

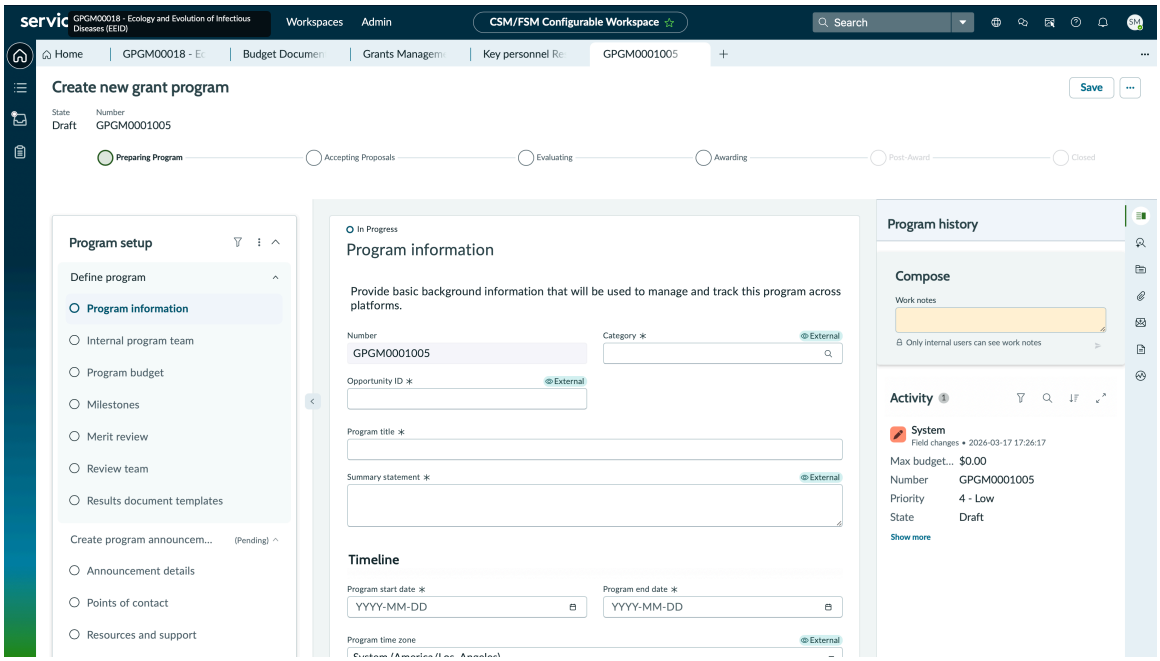

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > *CSM Configurable Workspace*.
2. Navigate to **Lists** > **Grant Programs** > **All** and select **New**.
   Here, you have the option to create a program from the default template, or start by copying data and configurations from an existing grant program.
   - To create a grant program without using any pre-existing configurations, choose **New**.
   - To copy data and configurations from a pre-existing grant program, choose **Create a new program from an existing program**. Choose the existing grant program from the drop-down menu and select **Continue**.

     You can determine which fields are copied over to the new grant program record, as well as fields in related records, including default fields. You can add or remove fields.

   A new grant program is created within the Grant Program table (sn_svc_appl_pgm_mg_grant_program), and the playbook is moved to the **Define Program** stage. A product model record, service definition record, and draft playbook content item have been automatically created for the grant program.
3. Select **Save**.
4. On the **Grant Program** form, fill in the details of the grant program.

Grant program information form

Program information form fields	Description
Category	Category of the grant
Opportunity ID:	ID of the grant program
Program title:	Title of the grant program

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Program information form fields	Description
Summary statement:	A summary of the grant program to be displayed to applicants.
Program start date	The start date of the program. Present and future dates are allowed.
Program end date	The end date of the program. Present and future dates are allowed.


5. Select **Mark Complete** to move to the next activity.

Add members to a Grant Program internal program team

Add members of the Internal Grant Program team who will be responsible for administering this program. Designate a program approver, lead and co-lead, collaborators, and observers.

About this task

The Internal Team plays a crucial role in supporting the Grant Program Manager throughout the lifecycle of the grant program. This group is responsible for assisting with the development and configuration of program parameters, managing internal processes, and ensuring that all compliance and operational requirements are met. Members collaborate to provide expertise across areas such as budgeting, timelines, proposal evaluations, and documentation, enabling a streamlined and transparent grant management process, and can be sub-classified as approver, observer, program lead, program co-lead, or other.

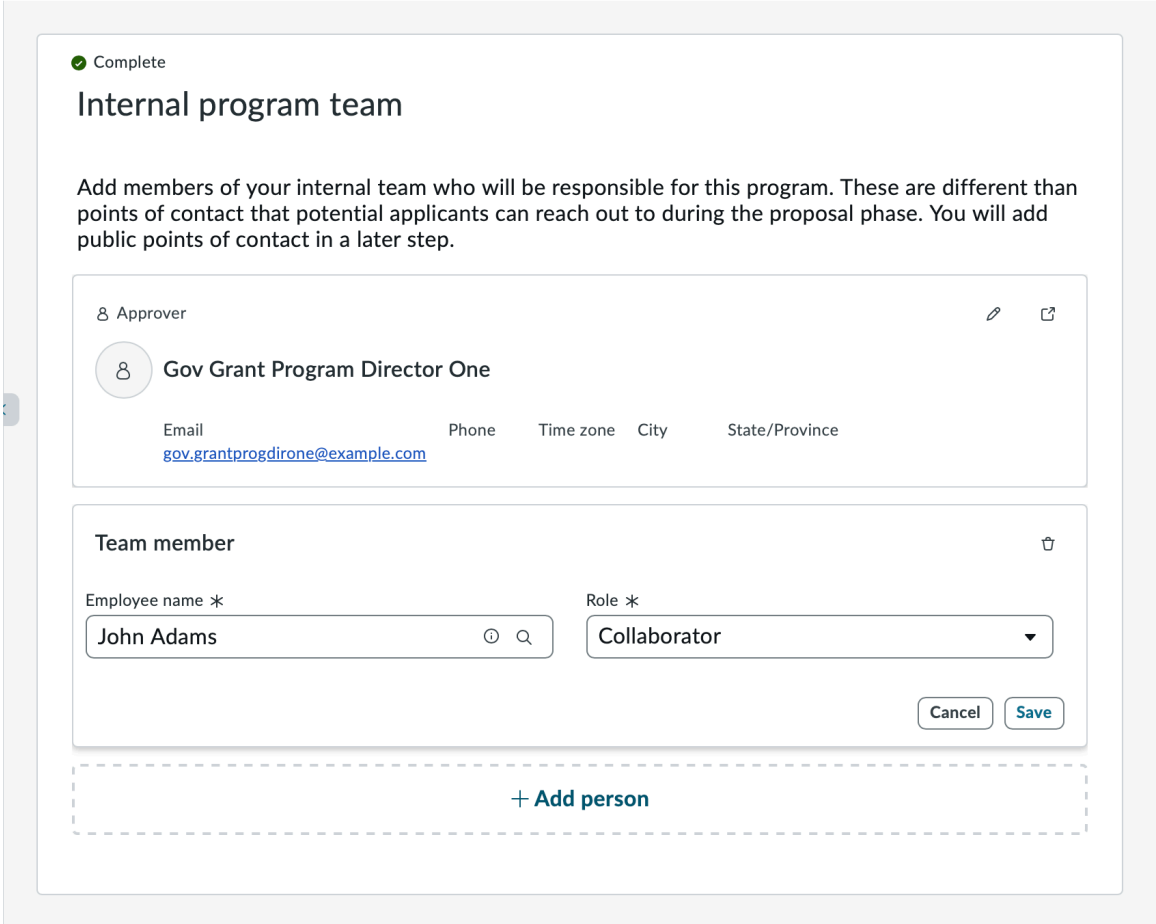

These are different than points of contact that potential applicants can reach out to during the proposal phase.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To add public-facing points of contact that potential applicants can reach out to, see Add points of contact to a Grant Program.

Before you begin

Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director, sn_svc_appl_pgm_mg.grant_program_manager, or sn_svc_appl_pgm_mg-grant_program_director

To add a user as an Internal Team Member, an Employee Profile must be created.

- Approvers review and decide on approvals triggered by the “Complete Approval” activity and “Funding Proposal” process. Each Grant Program can only have one approver. To add a user as an Approver, the user must have the following role: **sn_svc_appl_pgm_mg.grant_program_director**

Note:
All Internal Team Members must have the pps_resource role; The pps_resource role is essential for users to be managed within the Strategic Portfolio Management (SPM) application. Only users assigned this role can be included in resource plans and capacity planning.

Procedure

1. Open the grant program record for which you want to configure the internal program team members.
2. Select the **Internal Program team** activity.
3. In the **Employee name** field, enter the name of the employee you want to add as an internal program team member.
   These members are different than points of contact that potential applicants can reach out to during the grant proposal phase. You add public points of contact in a later step, using existing contacts from the **Employee name** drop-down list.

   Note:


   Only grant directors appear in the employee name.

4. Select the role responsibility that the user will play within the grant program.
   By default, you can assign the following role responsibilities to users within the internal program team. These internal team member personas have been identified as generic roles across government grant spaces. For more information on how to customize these, see Configure custom internal program team roles.

   To add members to this team, a user record must already have been created within the grants organization. This does not modify roles at a user level. For more information on user roles and responsibilities, see Assign user personas, roles, groups, and responsibilities in Grants Management.

5. Select **Save**.
6. Repeat these steps until you have added all the users and their respective responsibilities to the internal program team list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

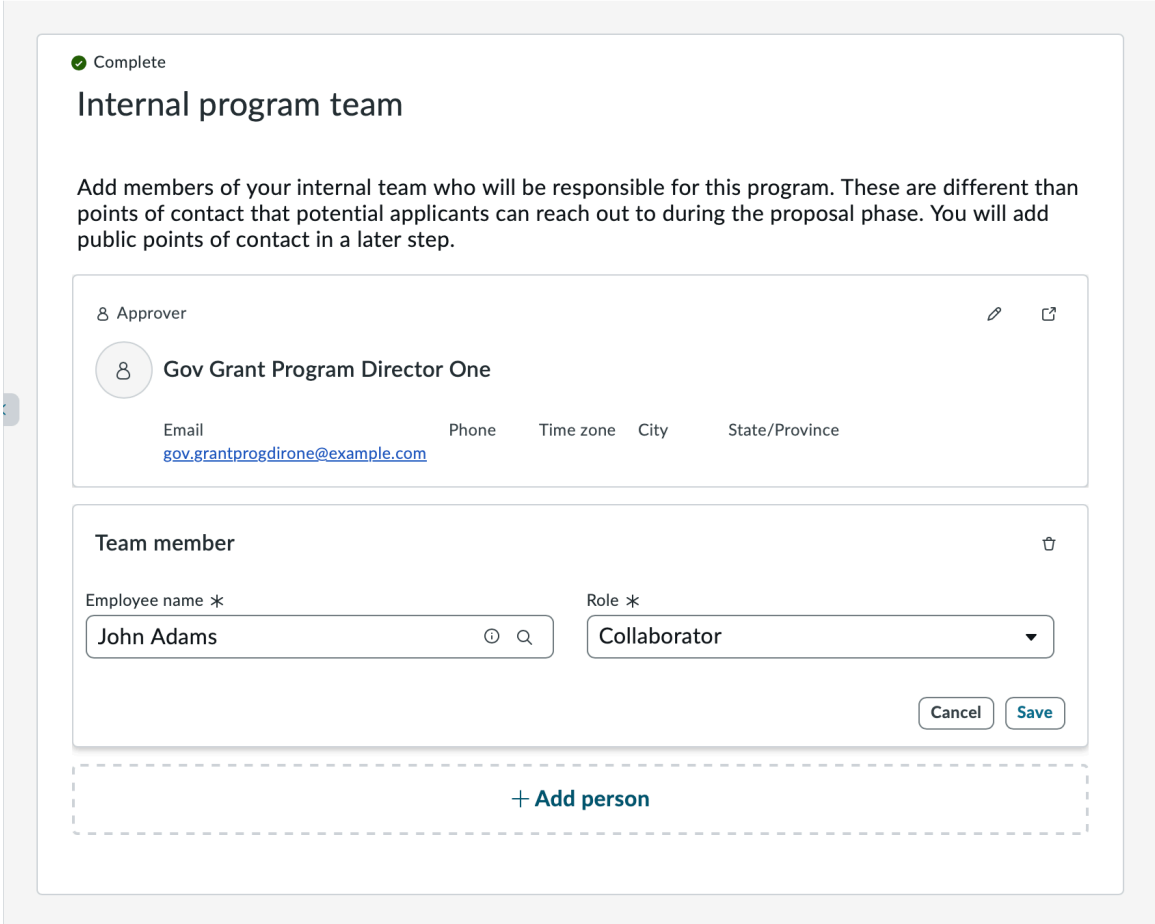

7. Select **Mark Complete**.

Result

Whenever a user is added in the **Internal Program Team activity**, a new record is created in the sn_plng_att_core_resource_assignment table with the user's name in the resource field, the selected role in the role field, and the grant program name in the planning item field. In the user_has_resource table, if a record for that user and role already exists, no new record is created; otherwise, a new record is added.

The internal program team for this grant program has now been established. In a later step, the user with the approver responsibility will approve the grant program when it needs to be published.

To verify the assignments of internal program team members, you can go to the sn_plng_att_core_resource_assignment table and verify the record. The "Planning Item" (planning_item) field should reference the Grant Program ID, and the "User" (user_resource) field should be populated as the user you are trying to add to the team. Every time a user is added as part of this activity, a record is created in the User Resource Role table for the specified role.

What to do next

Establish the Grant Program budget, budget categories, and more.

Configure custom internal program team roles


By default, five internal program team personas are included as part of the Grants Management application: Approver, Collaborator, Observer, Program Co-lead, and Program Lead. Set up new roles in the internal program team activity.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin

Procedure

1. From the navigation menu, search and open **Resource Roles** and select **New**.
2. Enter the name of the internal program team role you want to add, specify the hourly rate, and select **Submit**.
3. From the navigation menu, search for and select **Client scripts**, and open the **NameRoleView Field labels/attributes** record.
4. In the **Messages** field, enter the name of the role that was added, and add a line in the script to include the option.

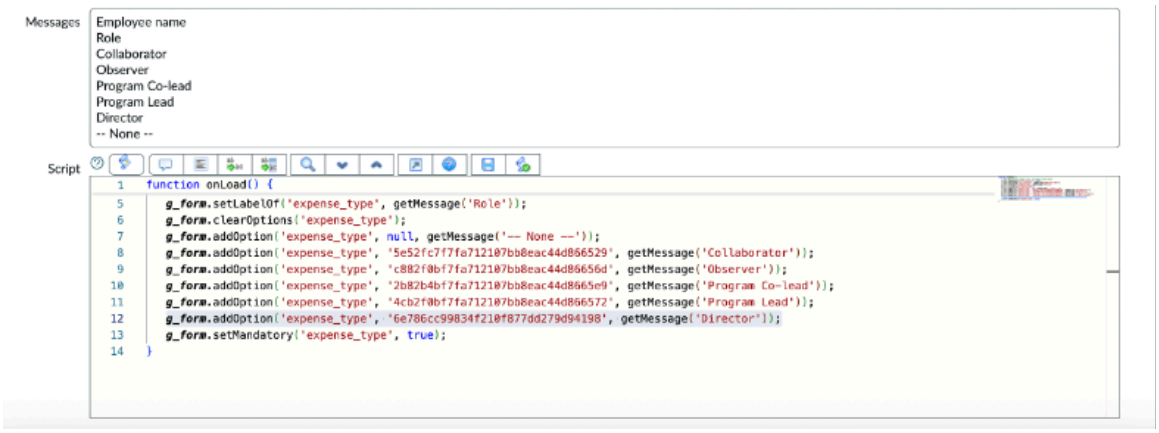

Result
The new role will appear in the dropdown to be selected during the internal program team activity. To configure read/write access for these roles, see Configure read/write access roles for the Grants Management internal program team.

Set up the Merit Review

Link an already established review framework to your Grant Program. For competitive grants, this is the merit review framework that Grant Merit Reviewers will use during their review process.

About this task
This playbook step enables you to link an already established review framework to your Grant Program. For competitive grants, this is the merit review framework that Grant Merit Reviewers will use during their review process.

Before you begin
Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

Note:
Requires framework to already be done. For info on how to create this see Configure the Merit Review Scoring Framework for a Grant Program in the Reviewer Service Portal.

Procedure

1. Enter the date you want the proposal reviewed and the scores submitted by the Grant Merit Reviewer in the **Review task due date** field.
2. Select the scoring framework you would like the Grant Merit Reviewer to use during their review of the proposal(s) in the **Review framework** field.
   To create a scoring framework:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Choose **open the frameworks list**.

b. Choose **New** and enter the name and description.

c. Choose **Submit** and choose the new framework in the **Review framework** field.

3. Select the KB number of the scoring framework in the **Rubric** field.
4. Select **Mark Complete**.
5. Define the users who will review and score the proposals for this program, then choose **Mark Complete** to move to the next activity.

   You can update reviewer groups throughout the duration of the program as needed. For more information on how to configure external reviewer groups, see Add external reviewer groups in Grants Management.

Add external reviewer groups in Grants Management

Add the people who will review and score the proposals for this program.

Before you begin

Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

Note:
Reviewer teams can be updated throughout the duration of the program as needed.

About this task

The Review Team activity allows the assignment of one or multiple groups who will review the grant applications to a Grant Program. At this stage, the Grant Program Manager selects the relevant groups, and each group can then be assigned to a single proposal during the intake/screening phase.

Note:
Whenever a Review Group member is added, the users in that group are assigned to evaluate and score merit review tasks during the evaluation stage of the Proposal Playbook. If no specific Review Group is selected, all available Review Groups will appear in the **Conduct Merit Review** activity. Otherwise, only the selected Review Group will be shown.

Procedure

1. In the Review team activity, select **Add group**.
2. Select the group.
   A merit review group must already have been configured for them to show up in this step. For more information on configuring external review groups, see .
3. Select **Save**, then select **Mark Complete**.

Set up a results letter using a template in Grants Management

Select which letter templates you want to use to notify applicants of their results for their proposals submitted for this program. These templates will be sent out once the final decisions have been made. The templates include an acceptance letter, a rejection letter, an ineligible letter, and a merit review summary.

Before you begin

Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

Note:
Requires it to already be created. For info on how to create see Create a Grants Program results letter template

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **CSM Configurable Workspace** > **Lists**.
2. Select **Grant Programs** > **My grant programs** and select a grant program.
3. Select which results letter templates should be used to notify applicants of their results for this program.

   Choose a letter template for Acceptance, Rejection, and Ineligible letters, and the Merit review summary. By default, the Grants Management Workspace provides generic results letter templates that can be modified to fit your organization's needs.

   You can choose the use the same template for multiple letter types.
4. Select **Mark Complete**.

What to do next

Set up the grants program announcement details

Set up the grants program announcement details

Build the program announcement. Define the required forms, terms and conditions, required budget categories, and external-facing point of contact. Provides you with an opportunity to review the grant details.

Configure the announcement details with information that should be displayed on the program opportunity announcement page that is shown to prospective applicants. You must provide a banner image, grant synopsis, eligibility summary, and grant description.

Note:
The information entered in the Define program activity also appears in the program announcement.

Add points of contact to a Grant Program

Add members of your internal program team to a points of contact list to allow them to be contacted by grant seekers. This list is displayed on the grants program announcement page.

About this task

The Points of Contact (POC) activity allows a Grant Program Manager to define members of the internal program team who can be contacted by grant seekers. These team members' names and contact details will be published on the Portal and visible to applicants. This ensures that grant seekers have visibility into the appropriate internal team members for communication and inquiries.

Adding a person will create a resource assignment record where the resource (user_resource) field is a reference to a user (sys_user) record. The resource role reference will be added to the points of contact list.

A new record is created in the sn_plng_att_core_resource_assignment table with the user's name in the resource field, point of contact role in the role field, and the grant program name in the planning item field. In the user_has_resource table, if a record for that user and point of contact role already exists, no new record is created; otherwise, a new record is added.

To ensure a user can be added as a point of contact, make sure the user has the **pps_resource** role and an employee profile (sn_employee_profile) record. For information on how to create an employee profile, see.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Points of contact can only be added from the internal team list record. To add members to the internal team list record, see Add members to a Grant Program internal program team.

Before you begin
Role required: admin, sn_svc_appl_pgm_mg.grant_program_manager

Procedure
1. Navigate to **All** > **CSM Configurable Workspace** > **List**.
2. Select **Grant Programs** > **My grant programs**.
3. Navigate to **All** > **User Resource Roles**.
4. Add a record for the desired user and set the resource role to **Point of contact**.
5. Verify the user appears in the point of contact resource_role record, as well as in the proposal playbook activity.

What to do next
Configure program resources.

Configure program resources

Add links, knowledge articles, or documents that provide supplemental information about this program, its sponsoring agency, impact, or any other details that may help grant seekers better understand this opportunity.

Before you begin
Role required: admin, sn_svc_appl_pgm_mg.grant_program_manager

About this task
The **Create program announcement** stage continues with the **Resources and support** activity, which allows a Grant Program Manager to add any resources for applicants to have access to the necessary supporting materials. Grants program managers can add links, knowledge articles, or documents, and can order these resources in order of importance. A minimum of one resource is required to complete this activity. You may skip the activity if there are no supplemental resources to add.

Procedure
1. Navigate to the **Create program announcement** stage of the Grants setup playbook.
2. Select **Add Resource**, and use the dropdown to add links, knowledge articles, or documents that provide supplemental information about this program, its sponsoring agency, impact, or any other details that may help grant seekers better understand this opportunity.
3. Select **Save**, and repeat the process until all supplemental information has been added.
4. Select **Mark Complete**.

Result
The program announcement as it will appear on the grants portal is now configured.

What to do next
.

Publish a grant program opportunity to the Grants Management Portal in Grants Management

Define announcement removal and proposal close dates and publish the program announcement to the Grants Management Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: grant program admin, director, manager

About this task

Procedure

1. Preview the published announcement, ensuring that all of the details are correct, then select **Mark Complete**.
2. Preview the proposal content as it will be viewed by applicants on the portal, then select **Mark Complete**.
3. Submit a request to the internal program team or the grant program director to review and approve the grant proposal and choose **Mark Complete** to move to the next activity.
   Based on the configured approval groups and roles in the Internal Program Team activity during program set-up, the approval request will go to the designated approver.
4. Select one of the following actions to complete the review:
   - **Request Approval**- Submit a request to the designated internal program team approver or the grant program director to review and approve the grant proposal. You can publish the grant program only after it's approved by the internal program team or the grant program director.
   - **Skip approval**- Move to the next activity without requesting an approval from the internal program team approver or the grant program director.

   For more information on how to approve a pending grants program as a designated approver, see Approve publishing of a grant opportunity.

   Once the approval is complete, you may either publish the grant program immediately, or schedule the date that you want the program to be displayed live.
5. Select one of the following options.
6. Configure the following details:

Announcement removal date	The date on which the grant or the catalog item is removed from the announcement page.
Proposal close date	The date when the proposal is closed.

7. Select **Publish** to create the grant catalog item and publish the grant to the Grants Management Portal either immediately, or on the scheduled date.
8. Select one of the following actions to complete the review:
   - **Request Approval**- Submit a request to the internal program team or the grant program director to review and approve the grant proposal. You can publish the grant program only after it's approved by the internal program team or the grant program director.
   - **Skip approval**- Move to the next activity without requesting an approval from the internal program team or the grant program director.
9. Either publish the grant program immediately, or schedule the date that you want the program to be displayed live.
   Configure the following details:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **Announcement removal date**- The date on which the grant or the catalog item is removed from the announcement page.
- **Proposal close date**- The date when the proposal is closed.

10. Create the grant catalog item and publish the grant to the Grant Management portal by choosing **Publish**.

Result
Your grant program has been published (or scheduled to be published) and ready to begin the application process.

What to do next
Once the grant program is published, applicants can begin submitting proposals for the program through the Grants Management Portal. For more information on how to view and manage all the grant proposals submitted for your grant program, see .

Approve publishing of a grant opportunity

As the designated approver of an internal program team, you can approve a grant program that is pending publishing to the grant management portal for applicants to view.

Before you begin
Role required: gmp director?

In order to do this, you need to be added as an approver in the internal program team in the program setup. For more information on how to create an interrnal program team and designate an approver, see Add members to a Grant Program internal program team

Procedure

1. Navigate to **All** > **CSM Configurable Workspace**.
2. Select the alert icon on the banner.
3. Select the approval notification for the pending grant program.
4. Select **Approve**.

Result
The grant program is now approved and is rerouted back to the Grant Program Manager, who will set it to be published to the Grants Management Portal. For more information on publishing a grant program to the portal, see Publish a grant program opportunity to the Grants Management Portal in Grants Management.

Using the Grants Proposal Management Playbook in Grants Management

using it.

Grants Management Proposal Management includes Application Intake, Proposal Screening, Merit Review Scoring, and Final Decisions. It is designed to systematically manage the life cycle of grant applications submitted by organizations through the portal. This workflow is divided into four stages, each with specific objectives and activities that guide the application from initiation to final decision.

Grants Proposal Management Playbook stages

A grant proposal is the formal submission prepared by an individual, non-profit, or organization seeking funding for a specific project or initiative. The Grants Management workflow provides agents with a playbook that guides them step-by-step through reviewing, scoring, and deciding

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

on proposals submitted by individuals to a specific grant program that is has been made available. Grants "proposal" and grants "application" are used interchangeably.

Playbook stages

Task	Description
Intake	Define key details regarding the grant program. Applicants submit required forms and eligibility is verified.
Screen	Build the program announcement. Acts as a checkpoint for eligibility verification and provides you with an opportunity to review the grant details.

Screen a grant proposal application in the Grants Management Grants Proposal Playbook

You can use the Grants Proposal playbook to review information provided by the applicant along with other relevant documents.

Image of Screening Activity.

The Screening stage of the grants proposal playbook consists of two tasks: checking eligibility and verifying uploaded documents.

Image of screening activity.

As the grants program manager or the grants program director, you can review the proposal details and the required documents from the proposal. After verifying the documents, you can assign the proposal to yourself, and either reject the proposal or move it to the Evaluation stage. The case details entered by the constituent in the intake stage are displayed to the agent in an accordion view for a comprehensive review experience.

In this stage, as the grants program manager or the grants program director, you can review the proposal details and the required documents from the proposal. After verifying the documents, you can assign the proposal to yourself, and either reject the proposal or move it to the Evaluation stage. The case details entered by the constituent in the intake stage are displayed to the agent for a comprehensive review experience.

Related topics

- Check eligibility of an applicant
- Verify and screen documents uploaded to grant proposal application by an applicant

Check eligibility of an applicant

Check eligibility of an applicant submitting through the Portal using the predefined eligibility rules created with Policy as Code Engine (PaCE).

Before you begin

Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

About this task

Image of check eligibility screen.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Review the information collected during the intake stage, and confirm that the information is complete and correct.

   If the agent is selecting the case from an unassigned queue, they will see the option to **Assign to Me**, which will update the case state from **New** to **Screening**. If the case is auto-assigned, they will see the option to **Mark Complete**.

2. Correct any errors before submitting the application, and select **Mark Complete**.
   Select the pencil icon to navigate back to an Intake stage activity that needs to be corrected.
   If the proposal needs to be rejected, select **Reject Application** to update the case state from **New** to **Screening Failed**, moving it directly to Decision.
3. To check eligibility using the predefined eligibility rules created with Policy as Code Engine (PaCE), navigate to , and select **Check Eligibility**.
   PaCE triggers an eligibility response for the Grant Program Manager to decide whether or not the proposal should continue for further review. Based on the provided responses, the system determines whether the applicant meets the eligibility criteria and classifies them as eligible or ineligible. The results are consolidated and displayed in this step for the agent to review.
4. Review the results of the eligibility screening, and select **Mark Complete** if there are no changes to be made.

Verify and screen documents uploaded to grant proposal application by an applicant

Verify all documents the applicant has uploaded with the submitted proposal.

Before you begin

Role required: sn_gsm_grnt_mgmt.program_manager, sn_gsm_grnt_mgmt.grant_director

About this task

Image of verify documents activity.

Review and verify the files and supporting documentation attached to the application. Here, you can flag documents for further verification, request additional documents, or close the case by moving it directly to Decision.

Procedure

1. Select each document in the **Requires verification** list to verify that the document has all the required details, then select the checkmark.
   Selecting the checkmark moves the verified documents into the **Verified** section.
2. If the document does not meet the requirements set forth by the application guidelines, select the flag icon to flags the document.
   Flagging the document enables the Grant Program Manager to request and notify the applicant that the documentation needs their attention. If the document is flagged, it moves to the **Flagged** section.
3. Select **Mark as Complete** once all documents have been verified and any flagged documents have been resolved.
4. Once all documents have been verified, select **Move to Evaluation**.

> **Note:**
> If the Grant Program Manager does not select the check mark next to each document, the playbook will not proceed to the next step, and an error appears at the top of the Verify documents activity. Ensure all documents have been reviewed and marked as verified before proceeding to the next activity.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Result
The playbook is now moved to the **Evaluation** stage, where Grant Program Manager can select the Merit Reviewer Group and release the merit review tasks.

Propose a Decision for a grant proposal application in the Grants Management Grant Proposal Playbook

Complete the Decision stage as your last step in managing a grant proposal using the Grants Management.

Before you begin
Role required: Admin

About this task
Decision consists of two tasks: Create results documents and Record outcome. In the Decision stage, the grants program manager creates letters or document templates that are used to inform applicants of their proposal status, and applicants can view their results and acknowledge or decline the awarded grant.

Procedure
1. Navigate to **All** > **CSM Configurable Workspace**.
2. Navigate to **Lists** > **Grant proposals** and select **My grant proposals**.
3. Select the grant proposal and navigate to **Decision**.
4. In the **Create results letter** task, select the **Results letter** tab and enter the details such as dates, response deadline, and the decision reason.
   The results letters that are selected by the grants program manager during the setup stage are updated and ready to send.
5. Update the merit review summary by selecting the **Merit review summary** tab.
   Only if a proposal is declined or awarded, the **Merit review summary** is available.
6. Update the selected document templates by selecting **Update document**.
7. Select **Mark complete**.
   The results letters are created and completed and the playbook automatically advances to the **Record outcome** task. The grant proposal moves from the Draft state to the Ready state for release.
8. In the **Record outcome** task, view the list of all the proposals for the grant program along with the task numbers for each of the grant proposal records in the **Result notices** tab by selecting **view program record**.
9. Select **Release Results**.
   You can only release the results if all the grant proposals are in the Ready for release state. The tasks move from the Ready for release state to the Closed state, and an email is triggered to the applicant about the results. The applicant can view the results by logging in to the applicant portal and either acknowledging or declining the award before the deadline.

   In the **Record outcome** task, the resolution code is auto-populated based on the award status such as:

   - Ineligible
   - Declined by agency
   - No response by applicant
   - Award acknowledged
   - Award declined by applicant

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The outcome of the grant proposal is recorded and closed.

10. Enter the resolution notes and select **Close**.

Using Social Benefits Playbook

If you're a social benefits case agent or manager, you can use the Social Benefits Playbook for Public Sector Digital Services to manage and resolve requests for social benefits.

The Social Benefits Playbook automatically appears in the **Playbook** tab when you create a social benefits request case by using the CSM Configurable Workspace. A playbook takes a workflow and breaks it into multiple stages or lanes. Each stage in a playbook includes one or more activities, or steps, for you to complete. Stages can also include automated activities, such as auto-sending an email to a customer when a stage or activity is complete. When using a playbook, you can:

- View the playbook stages and activities.
- Select an activity and perform the work to complete that activity.
- Mark an activity as complete and move to the next activity or stage.
- Complete the stages and activities to resolve the case.

The workflows for a type of case and the activities that you need to resolve these cases are in the playbook. By using a playbook, you can visualize the entire life cycle of the information request workflow.

Playbook stages

Like other Public Sector Digital Services playbooks, this playbook contains four stages (Intake, Review, Process, and Decision) and several activities in each stage. Below is a diagram illustrating the base Social Benefits Playbook workflow. This workflow can be modified by an admin to match a specific social benefits use case.

The Social Benefits Playbook stages are listed in the following table.

Playbook stages


Task	Description
Intake	Guides you through the record creation process by capturing the details of the social benefits request and assigning it to the right agent.
Review	Acts as a checkpoint for eligibility verification and provides you with an opportunity to review the case details.
Process	Guides you through the activities for social benefits request fulfillment.
Decision	Captures and communicates the decision and next steps to the constituent and any other agents or involved parties.

Playbook layout

The following figure shows the components that you can see in the Social Benefits Playbook workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook layout with the Process-based Experience view

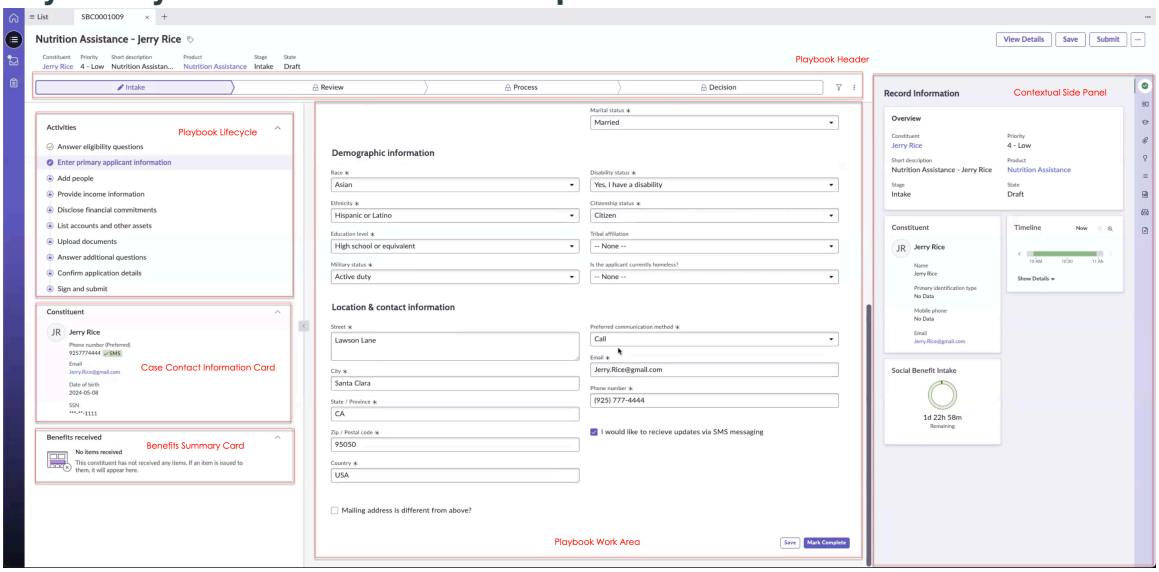

Playbook components

Playbook area	Description
Playbook header	• Appears at the top of the playbook. • Shows the title of the playbook and a horizontal stage picker that displays progress through the playbook stages. • Includes a filter that you can use to filter the activities by the assigned user or the activity status. • Includes the Playbook Actions menu that you can use to select the playbook-level and activity-level actions.
Playbook Life-cycle	• Appears in a panel on the left side of the playbook. • Displays a list of the activities for each stage. • With the horizontal stage layout, you can expand or collapse the entire list of activities for the current stage.
Playbook work area	• Appears in the middle of the playbook. • Displays the card for the current activity.
Contextual side panel	• Appears on the right side of the playbook. • Includes the tabs that you can use to display the following types of information:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook components (continued)


Playbook area	Description
	○ Case or case task activity stream. ○ Ribbon information such as the case overview, customer details, timeline, and service level agreements (SLAs). ○ Dynamic related records. For more information, see Dynamic related records.
Case Information Contact Card	• Contact information for the constituent or business that submitted the request. • Appears in a panel on the left side of the playbook. • Displays the preferred communication method indicated by the applicant. • Allows an agent to start an email draft directly from the playbook workspace by selecting the applicant's email address. • Displays the identity type provided by the applicant, either SSN, Driver's License, Medicare, or State Identification number.
Items Received Card	• Appears on the left side of the playbook. • Shows licenses/permits that are active, expired, and expiring soon, and the time remaining on each one.
PaCE policy card	• Appears in the contextual side panel during the Propose decision activity of Process stage. • Provides agents additional insight into eligibility criteria via a link to a corresponding KB article containing the full text of the policy.

Using the Social Benefits Playbook Eligibility Rules Engine (PaCE)

Define and manage rules to determine eligibility and calculate benefits.

The Social Benefits Playbook uses an Eligibility Rules Engine, a series of pre-defined policies that are associated to a specific benefit, to determine whether they are eligible to apply for one or more social benefit programs that your agency offers. These policies are a set of pre-defined rules and logic that determines whether a constituent will receive benefits or not. Using a set eligibility rules criteria for Social Benefits Playbook may aid in deflecting applications for which the applicant is not eligible for a specific social benefit program. These policies can be updated as rules and regulations surrounding these social benefit programs change. The policies in Social Benefits Playbook Eligibility Rules Engine are powered by Policy as Code Engine (PaCE).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

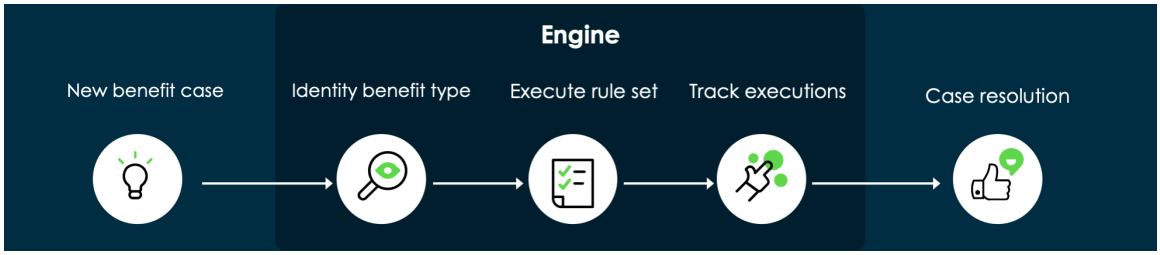

A PaCE policy is a set of pre-defined rules and logic that determines the desired behavior of an application or a service. When invoked, the rules in the policy are applied on the provided input, and a decision is reached. In PSDS, a PaCE policy represents a set of eligibility criteria that must be satisfied for a constituent to receive benefits. When invoked, the rules in the policy are applied to the case, and an auto-calculated eligibility recommendation is provided to the agent. For more information on understanding PaCE within the Social Benefits Playbook, see Understanding Policy as Code Engine (PaCE) and the Social Benefits Playbook.

You can use the eligibility rules engine to manage the life cycle of a policy and create, update, review, and execute policies. With the eligibility rules engine, you can:

- Evaluate any changes to ensure they meet your organization's policy management requirements.
- Create a policy, modify policy information, or copy a policy and its version to a new policy.
- Create a new policy version by copying an existing policy version and modifying it.
- View and define mapping information for any policy.
- Review executed policy activity and execution history for policies and policy versions.
- Use tags and categories to manage your policies more efficiently.

If the applicant fulfills all the criteria set forth by the eligibility rules engine policies, then the applicant can proceed with their application, or the agent can proceed in creating a case for the applicant. Case information must satisfy the conditions of each pre-defined policy for a constituent's request to be deemed 'eligible.' If the information from the case is found to be non-compliant with one or more policies, and the applicant does not fulfill at least one of the eligibility criteria, neither an agent nor an applicant can proceed in creating a case for the social benefit program, and their request will be labeled as "not eligible."

The Social Benefits Playbook Eligibility Framework:

- Allows governments to design an eligibility system and institute updates as laws and regulations change
- Reduces manual effort from agents by providing auto-calculated eligibility recommendations
- Allows governments to render consistent and accurate benefit decisions

Workflow

Understanding Policy as Code Engine (PaCE) and the Social Benefits Playbook

PaCE enables you to manage, administer, and audit eligibility rules (policies) from a centralized location.

Policy as Code Engine (PaCE) is a powerful, low code rules engine capable of processing rules in seconds. This engine allows process owners and admins to create and maintain the rules that drive eligibility determination and benefits. The rule-sets created within this rules engine are called policies.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A PaCE policy is a set of pre-defined rules and logic that determines the desired behavior of an application or a service. When invoked, the rules in the policy are applied on the provided input, and a decision is reached. This decision-making is the main function of PaCE and helps determine if a policy is compliant or non-compliant. The decision is then relayed to the software calling service or application, so that it can act on it to enforce a desired behavior.

With PaCE, admins and process owners can:

- Create a policy to build out the logic determining eligibility and benefits.
- Use templates to pre-define logic and data sources, quick-starting policy creation
- Map policies to one or more benefit types
- Pilot new policies using a test playground
- Audit policy executions with built-in reporting of decisions, statuses, and processing times.

PaCE also allows a full life cycle management of policies, reuse of existing policies, Testing and validation of policies, and central automation of compliance, audits, and regulatory processes. Policy developers can view and understand an existing policy, make and assess changes, and decide if a policy can be used as a baseline for another policy. They can also use PaCE before debugging to understand how the policy should work, and why it is not working as expected.

PaCE can be used to:

- Make decisions (compliant or non-compliant) based on a change in the application or service.
- Automate execution of policies.
- Standardize policies so that they can be shared and reused within a service and across services.
- Collect evidence and proof of compliance for audit purposes. This feature can be used by internal auditors to automate the process of collecting evidence for governance and risk requirements.

The Social Benefits Playbook Eligibility Rules Engine, powered by PaCE, evaluates case data against pre-defined eligibility rules for faster decision-making.

Resolving a social benefits case using Social Benefits Playbook

You can use playbooks to create cases and to complete the tasks and activities that are needed to resolve specific types of cases.

Note:
Verify that the Social Benefits Playbook application, which is separate from the Public Sector Digital Services Core application, has been installed and configured. For instructions, see Install and configure the Social Benefits Playbook application.

By default, the following stages are available to you as a government service agent in the Social Benefits Playbook in the CSM Configurable Workspace.

- Intake
- Review
- Processing
- Decision

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Case Stages in Social Benefits Playbook

The Social Benefits Playbook experience starts with the **Intake** stage. This stage is the default playbook stage for a new social benefits request case.

Use this playbook stage to gather and confirm information about the applicant, the social benefit program being applied for, and whether the applicant is eligible for this type of social benefit program. You can also request additional information from the applicant at this stage, upload additional documents, add additional beneficiaries, and schedule a interview, if needed.

If the case was submitted by a constituent through the Government Service Portal, the constituent will be able to upload documents, review proposed benefits, and respond to interview requests before the case continues. At the end of the Intake stage, agents must review and verify the information provided before proceeding.

The playbook continues with the **Review** stage. In this stage, agents must review and verify the information provided, verify supporting documents and credentials (and flag any for follow-up), check for duplicate requests, and set up any interviews needed for social benefit program approval. You can move the case to the next stage when all documents have been verified and there are no pending case tasks.

The playbook continues with the **Process** stage. In this stage, the agent proposes their decision. The case might then be routed to a higher-tier agent, who can assess the entire application, create any additional case tasks, request or perform additional interviews, add or request additional information, or simply approve or deny based on the information provided. Once requests for any additional information and any open case tasks are complete and all agents have reached a decision, the case is moved to the **Decision** stage.

The final stage of the Social Benefits Playbook is the **Decision** stage, where the status of the decision is relayed to the constituent. The status of the social benefit application is changed to **Granted**, and the social benefit program can be routed to the constituent. A notification is sent to the applicant via the Government Service Portal, letting them know that their application has been has approved.

Complete the Intake stage in Social Benefits Playbook

Complete the Intake stage as your first step in resolving a case using the Social Benefits Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **Social Benefits** > **All**.
2. Select **New** to create a case.
3. Select **Create Case**.
   The Social Benefits Playbook opens and initiates the first activity for collecting the request details and determining eligibility for the social benefits offered by your agency.
4. On the Answer eligibility questions activity card, confirm the applicant's eligibility using the eligibility questions, and select **Check Eligibility**.
   The benefits card will display possible eligibility for each of the social benefits offered by the agency. An agent can review the details of the case to make a final determination.
5. If the applicant is eligible for the benefit associated with the application currently open, select **Start Application**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If the applicant is not eligible for the benefit associated with the application currently open, the application cannot move forward. The benefits card displays other social benefit programs the applicant may be eligible for, in addition to or instead of the benefit associated with the application currently open.

6. On the form, fill in the fields with the primary applicant's personal and financial information, including SSN, demographic information, location, and contact information.
7. **Optional:** Select the checkbox if the customer has indicated that they would prefer to be contacted via SMS.
8. Select **Mark Complete** to continue to the next activity.
9. **Optional:** Add any people who would also be receiving benefits along with the primary applicant.
   You may add more than one. Related people may include spouses, dependents, children, household members, or any person who may be receiving benefits along with the primary applicant.
10. Select **Mark Complete** to move to the next activity.
11. **Optional:** If anyone in the applicant's household has a source of income, select **Yes**, and on the form, fill in the fields.
    If no one in the applicant's household has a source of income, select **No**.
12. **Optional:** If anyone in the applicant's household has any pre-tax contributions on any of their current income, select **Yes**, and enter any pre-tax contributions that affect income for the applicant's household.
    If no one in the applicant's household has any pre-tax contributions, select **No**.
13. Select **Mark Complete** to move to the next activity.
14. **Optional:** If anyone in the applicant's household has any expenses or financial commitments, select **Yes**.
    If no one in the applicant's household has any expenses or financial commitments, select **No**
15. **Optional:** On the form, fill in the fields, doing so for each expense item.
    You may add more than one. Select **Add Item** to add multiple expenses to the list.
16. Select **Mark Complete** to move to the next activity.
17. If anyone in the applicant's household has any financial accounts, assets, or resources, select **Yes**, and on the form, fill in the fields.
    You may add more than one. Select **Add Item** to add multiple expenses to the list. If no one in the applicant's household has any financial accounts, assets, or resources, select **No**.
18. Select **Mark Complete** to move to the next activity.
19. Upload any supporting documents that verify the identity of the applicant and any related parties, or provide additional context for their request.
    A case is created with the information the agent has provided on the applicant thus far, and is now routed back to the applicant via the Government Service Portal. There, they can upload any applicable identity documents, credentials, or supporting documentation required for their application. The case continues once the applicant has uploaded these documents. Required documentation varies by request.
20. Once the applicant has uploaded supporting documentation via the Government Service Portal, review the attachment(s) and select **Mark Complete** to move to the next activity.
21. On the form, select the options that best describe the applicant's criminal history, communication preferences, and accessibility needs.
22. Select **Mark Complete** to move to the next activity.
23. Review the application in its entirety and correct any errors before submitting the application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

24. Select **Request Signature** to request a signature from the constituent via the **Sign and Submit** activity on the Government Service Portal.
    If the constituent does not respond, you may move this application directly to the **Decision** stage, where the case can be closed.
    Once the constituent has completed the **Sign and Submit** activity via the Government Service Portal, the case is automatically moved to the next activity.
25. **Optional:** Select **Apply Now** to use information from the current application to apply for other social benefits programs that the applicant may be eligible for.
    You may apply for more than one. Each new application opens in a new browser tab. The option to create an appended case expires after a specified amount of time.
    A child Social Benefits case is appended to the case of the original benefit application, and the benefit card updates based on the status of the new application.
26. **Optional:** Select **Skip** to skip this activity.
    The case state of the additional benefit application changes to "Not submitted". A new case can no longer be created and appended to the primary application.
27. Select **Mark Complete** once the desired applications are submitted.
    The case is moved to the **Review** stage, and the **Intake** stage is marked complete.

Complete the Review stage in Social Benefits Playbook

Complete the Review stage as your second step in resolving a case using the Social Benefits Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Review the information collected during the intake stage, and confirm that the information is complete and correct.

   If the agent is selecting the case from an unassigned queue, they will see the option to **Assign to Me**. If the case is auto-assigned, they will see the option to **Mark Complete**.
2. Correct any errors before submitting the application, and select **Mark Complete**.
   Select the pencil icon to navigate back to an Intake stage activity that needs to be corrected.
3. Verify there are no duplicate benefit applications for the primary applicant, and select **Mark Complete**.
4. Review and verify the files and supporting documentation attached to the application.
   Here, you can flag documents for further verification, request additional documents, or close the case by moving it directly to Decision.
5. Select **Mark as Complete** once all documents have been verified and any flagged documents have been resolved.
6. Select a date and time in the dropdown menu to recommend an interview slot if an interview is required to process the application, and select **Request Interview**
   The interview is now routed to the applicant, who can accept, reject, or respond to the interview request via the Government Service Portal. The case continues once the applicant has responded to the request. If an interview is not required, select **Skip**.
7. Select **Move to Process** once the interview is complete.

Result

The case is now moved to the **Process** stage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Complete the Process stage in Social Benefits Playbook

Complete the Process stage as your third step in resolving a case using the Social Benefits Playbook.

Before you begin
Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Review the auto-calculated eligibility assessment and the benefit summary card, which uses application information as an input to provide guidance on the benefit amount for which an applicant may qualify.
   This engine utilizes information such as the total household income, assets owned, expenses, etc. as inputs into the calculation.
2. Select **Grant** or **Deny** in the Proposed Decision dropdown to propose a decision for the applicant's social benefits case.
3. Enter a justification for the proposed decision in the description box, then select **Propose Decision**.
   The case is now routed to an approval agent. The Process stage will complete automatically once the decision is approved.

Result
The Process stage is complete and the case is moved to the Decision stage.

Complete the Decision stage in Social Benefits Playbook

Complete the Decision stage as your last step in resolving a case using the Social Benefits Playbook.

Before you begin
Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Enter the resolution code and cause.
2. Enter resolution notes outlining the case decision for the applicant, or other users on the case watch-list.
3. Select the checkbox for **Add resolution notes to comments** if these notes are to be shown to the applicant.
4. Select **Close** to close and resolve the case.
   A notification is sent to the applicant that lets them know that the request is completed.

Add a beneficiary to a social benefits application in Social Benefits Playbook

As an agent, you can add multiple beneficiaries to an existing request for social benefits. Applicants, or the representatives of an applicant, can also add additional beneficiaries to an application through the Government Service Portal. Beneficiaries are people that share the household or are related to the applicant who will benefit from the assistance being provided.

Before you begin
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **Social Benefits** > **All**.
2. Select **New** to create a case.
3. Select **Create Case**.
4. On the Answer eligibility questions activity card, confirm the applicant's eligibility using the eligibility questions, and select **Check Eligibility**.
5. If the applicant is eligible for the benefit associated with the application currently open, select **Start Application**.
6. On the form, fill in the fields with the primary applicant's personal and financial information, including SSN, demographic information, location, and contact information, and select **Mark Complete** to continue to the next activity.
7. Add any people who would also be receiving benefits along with the primary applicant. You may add more than one. Related people may include spouses, dependents, children, household members, or any person who may be receiving benefits along with the primary applicant.
8. Select **Mark Complete**.

Using License and Permit Playbook

If you're an license and permits case agent or manager, you can use the License and Permit Playbook for Public Sector Digital Services to manage and resolve requests for licenses and permits.

A playbook provides you with step-by-step guidance through the life cycle of a license and permits request case.

The License and Permit Playbook automatically appears in the **Playbook** tab when you create an license and permit request case by using the CSM Configurable Workspace.
A playbook takes a workflow and breaks it into multiple stages or lanes. Each stage in a playbook includes one or more activities, or steps, for you to complete. Stages can also include automated activities, such as auto-sending an email to a customer when a stage or activity is complete.
When using a playbook, you can:

- View the playbook stages and activities.
- Select an activity and perform the work to complete that activity.
- Mark an activity as complete and move to the next activity or stage.
- Complete the stages and activities to resolve the case.

The workflows for a type of case and the activities that you need to resolve these cases are in the playbook. By using a playbook, you can visualize the entire life cycle of the information request workflow.

Playbook stages

Like other PSDS playbooks, this playbook contains four stages (i.e., Intake, Review, Process, and Decision) and several activities in each stage. Below is a diagram illustrating the base License & Permit playbook workflow. This workflow can be modified to match a specific license/permit use case.

The License and Permit Playbook stages are listed in the following table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook stages

Task	Description
Intake	Guides you through the record creation process by capturing the details of the license and permit request and assigning it to the right agent.
Review	Acts as a checkpoint for duplicate cases and provides you with an opportunity to review the case details.
Process	Guides you through the activities for the license and permit request fulfillment.
Decision	Captures and communicates the documents and information to the constituent and any other agents or involved parties.

Playbook layout

A playbook is made up of several areas, including the playbook life cycle, the playbook work area, and the contextual side panel. The activity view determines how the stages and activities appear in the playbook.


The default activity view for the License and Permit Playbook is the Process-based experience view. This view, which is shown in the following example, shows constituent or business information and case task information at the forefront of the playbook work area as you work on it.

The process-based playbook layout shows the following features:

- A horizontal stage picker that gives the agent a complete view of the entire process and where they currently are in that process. Agents can use the stage picker to track their overall progress as they work on cases.
- Record information on the left side of the page, such as the contact information that is always available.
- Related records in the contextual side panel supported by the dynamic related records component.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook layout with the Process-based Experience view

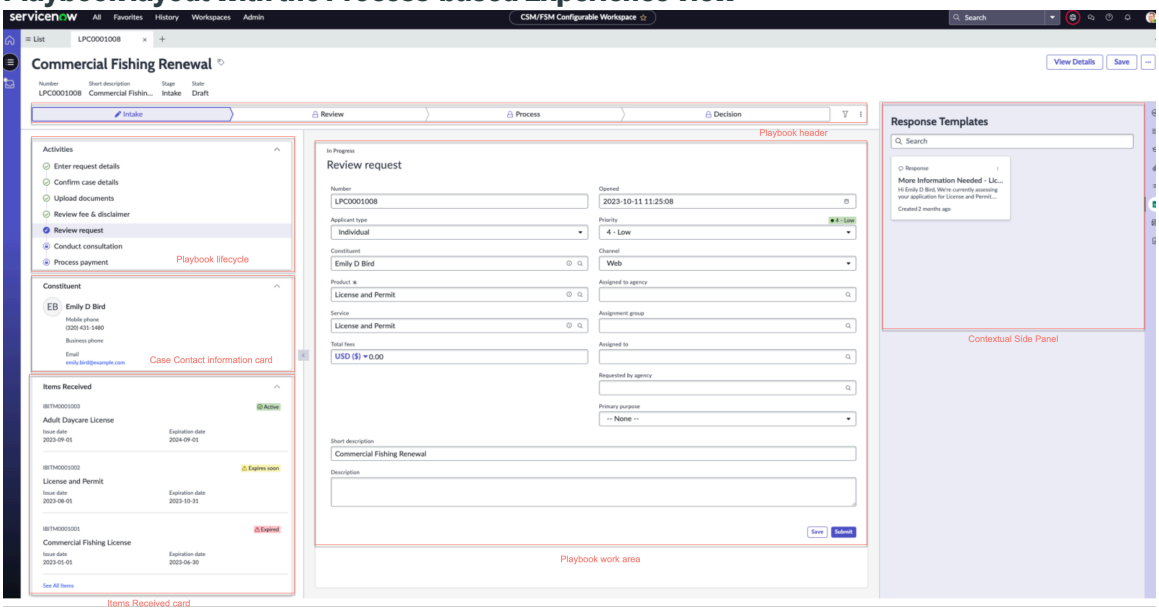

The following table shows the components that you can see in the License and Permit Playbook workspace.

Playbook components

Playbook area	Description
Playbook header	• Appears at the top of the playbook. • Shows the title of the playbook and a horizontal stage picker that displays progress through the playbook stages. • Includes a filter that you can use to filter the activities by the assigned user or the activity status. • Includes the Playbook Actions menu that you can use to select the playbook-level and activity-level actions.
Playbook Lifecycle	• Appears in a panel on the left side of the playbook. • Displays a list of the activities for each stage. • With the horizontal stage layout, you can expand or collapse the entire list of activities for the current stage.
Playbook work area	• Appears in the middle of the playbook. • Displays the card for the current activity.
Contextual side panel	• Appears on the right side of the playbook. • Includes the tabs that you can use to display the following types of information:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook components (continued)

Playbook area	Description
	○ Case or case task activity stream. ○ Ribbon information such as the case overview, customer details, timeline, and service level agreements (SLAs). ○ Dynamic related records. For more information, see Dynamic related records.
Case Information Contact Card	• Contact information for the constituent or business that submitted the request. • Appears in a panel on the left side of the playbook.
Items Received Card	• Appears on the left side of the playbook. • Shows licenses/permits that are active, expired, and expiring soon, and the time remaining on each one.

Resolving a license and permit case using License and Permit Playbook

You can use playbooks to create cases and to complete the tasks and activities that are needed to resolve specific types of cases.

Note:
Verify that the License and Permit Playbook application, which is separate from the Public Sector Digital Services Core application, has been installed and configured. For instructions, see Install and configure the License and Permit Playbook application.

By default, the following stages are available to you as a government service agent in the License and Permit Playbook in the CSM Configurable Workspace.

- Intake
- Review
- Processing
- Decision

Case Stages in License and Permit Playbook

The License and Permit Playbook experience starts with the **Intake** stage. This stage is the default playbook stage for a new license and permit request case.

Use this playbook stage to gather and confirm information about the requester, the license or permit being requested, whether the requester is eligible for this type of license or permit, and whether they are exempt from the fees associated with the license or permit. You can also request additional information from the requester at this stage, upload additional documents, add additional comments, add related parties, and schedule a consultation through the work notes.

If the case was submitted by a constituent through the Government Service Portal, the constituent will be able to upload documents, and review the fees and disclaimers associated

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

with the license or permit application before the case continues. At the end of the Intake stage, agents must enter details about the payment that was processed or waived.

The playbook continues with the **Review** stage. In this stage, you can do the initial troubleshooting on the case, verify supporting documents and credentials, and set up any inspections needed for license or permit approval. You can move the case to the next stage when details are provided in the work notes on the inspections (open work orders or work performed during) or verifying documents.

The playbook continues with the **Process** stage. In this stage, the case might be routed to a higher-tier agent, who can assess the entire request for the license or permit, approve a fee exemption, create case tasks, request or perform additional inspections, and add or request additional information.

Once requests for any additional information and any open case tasks are complete, the case is moved to the **Propose Decision** activity. Additional information may be solicited from the requester at any time during this stage. After the decision, often made by a higher-tier agent, is proposed, it is routed to the original agent, who may request or perform their own additional inspections, and add or request more information. This agent then has the option of confirming or vetoing the decision proposal of the other agent.

The final stage of the License and Permit Playbook is the **Decision** stage. At the Decision stage, the status of the license or permit is changed to **Granted**, and the license or permit can be generated and routed to the constituent. A notification is sent to the requester that lets them know that license or permit approval has been has obtained and the requested license or permit has been digitally generated within the playbook, and delivered via the Government Service Portal.

The requester can then either accept or reject the license or permit. If the requester accepts the outcome, the case is automatically closed. If the requester rejects the solution, the case is reopened, and the agent must propose another outcome. A request for a license or permit may also be conditionally approved, or denied. The agent can specify why in the work notes.

Complete the Intake stage in License and Permit Playbook

Complete the Intake stage as your first step in resolving a case using the License and Permit Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **License & Permit Requests** > **All**.
2. Select **New** to create a case.
3. Select **General License/Permit** under the Service dropdown, and **New License/Permit Request** under the Case Type dropdown.
4. Select **Create Case**.
   The License and Permit Playbook opens and initiates the first activity for collecting the request details.
5. On the Enter Application Details activity card, confirm the applicant's eligibility and select **Continue**.
6. On the form, fill in the fields with the requester's contact information and details of the request.
7. Under Representation, select the checkbox for **Requesting on behalf of someone else**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

8. Enter the name of the constituent or business that the requester is submitting the application on behalf of, and select **Save**.

   Note:
   All license/permit co-applicants must have a business contact account associated with your business to be included on a license/permit application. Each contact can create an account by registering on the Government Service Portal, or a government service agent can create a business contact record for them. For information on how agents can create a business contact record from information entered in a License and Permit application, see Create a business contact account from license or permit application data.

9. **Optional:** Select any add-ons, such as permit endorsements.
   You may add more than one. The pricing of the license or permit varies with each selection or combination of selections.
10. Review the fees associated with the requester's choices.
    The fee total changes dynamically based on the options selected. If the constituent or requester is fee exempt, select the **Fee Waiver** checkbox and enter a justification to claim an exemption for them.
11. Select **Submit** to move to the next activity.
12. Add any additional related parties.
    Related parties may include business partners, managers, or any business contact who may need access to this license/permit. They must be contacts already registered on the Government Service Portal and associated with your business.
13. Select **Mark Complete** to move to the **Upload Documents** activity.
14. Upload any documents that verifies the identity of the requester and the related party, or provides additional context for your request.
    A case is created with the license or permit request information and all related parties, and is now routed to the constituent via the Government Service Portal, where they can upload any applicable identity documents, credentials, or supporting documentation required for this license/permit request. The case continues once the constituent has uploaded these documents. Required documentation varies by request.
15. Once the constituent has uploaded supporting documentation, review the attachment(s) and select **Mark Complete** to move to the **Review Fees & Disclaimer** activity.
    The case is again routed to the constituent via the Government Service Portal, where they can upload fee waiver justification documents, if applicable, or other supporting documentation required for this license/permit request. The case continues once the constituent has uploaded these documents and acknowledged the fees and disclaimers.
16. Once the constituent has acknowledged the fees and disclaimers, the case is moved to the queue, where it can be picked up by another agent in your agency, who will review the request and provide appointment options for the license or permit consultation.
17. Select **Mark Complete** to acknowledge that you have reviewed the request.
18. Enter available times in the work notes.
19. Select **Schedule Consultation**
    The case is again routed to the constituent via the Government Service Portal, where they can accept or reject the times proposed for an interview consultation or inspection.
20. After the consultation, enter any relevant notes about the case in the work notes and select **Mark Complete** to move to the next activity.
21. Payment.
22. Select **Move to Review**.
    The case is moved to the **Review** stage, and the **Intake** stage is marked complete.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Complete the Review stage in License and Permit Playbook

Complete the Review stage as your second step in resolving a case using the License and Permit Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Review the files attached to the case, and confirm that the requester has included the required documents to validate their identity by selecting the boxes associated with the document type.
2. Select **Mark as Complete**.
3. Select any exemptions that apply to the case, and select **Mark as Complete**.
   If no exemptions apply to the case, select **No exemption code(s) applicable**.
4. Do one of the following actions depending on whether you have similar or linked completed requests.
5. Estimate the fees associated with this request by using the fee estimator.
   The fee estimator can only be run once.
6. Enter details on the fee estimate in the work notes, then select **Request Fee Approval**.
   If the requester qualifies for a fee waiver, enter that information here. The fee estimate is now sent to billing to be approved. Once the fee estimate has been approved, mark the step as complete.
7. Select **Send for Requester Approval** to send the fee estimate to the requester.

   This activity will automatically be marked complete once the requester has approved the fee, and the case will be moved to the Process Payment activity.
8. Verify the payment has been sent, and select **Move to Process**.
   The Review stage is now complete and the case is moved to the Process stage.

Complete the Process stage in License and Permit Playbook

Complete the Process stage as your third step in resolving a case using the License and Permit Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Upload the documents needed to fill this request by selecting **New Document** or **Link Document**.
2. Move to the next activity by selecting **Prepare for Review**.
3. Enter any additional work notes or details needed for legal review, and then select **Send for Legal Review**.
   A case task is now created and assigned to the Legal Review assignment group for approval. If the uploaded documents are rejected during the legal review, you may need to make changes and request a review again or move the case directly to the Decision stage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. After the legal review is complete, select **Mark as Complete**.
   The case is moved to the Final Review Pre-release activity, where the documents and details of the request are reviewed by the Final Review Team assignment group.
5. After the documents have been approved by the Final Review Team, select **Move to Decision**.
   The Process stage is complete and the case is moved to the Decision stage.

Complete the Decision stage in License and Permit Playbook

Complete the Decision stage as your last step in resolving a case using the License and Permit Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Enter any work notes for the customer or other users on the case watch-list, and then select **Release** to release the information to the requester.
2. **Optional:** If the requester has opted to be notified by mail, in the work notes, verify that the notice has been sent by mail and select **Mark as Complete**.
3. **Optional:** If the requester has opted to be notified by phone, in the work notes, verify that the notice has been sent by phone and select **Mark as Complete**.
4. Review the resolution code and resolution notes, and select **Propose solution**.
   All case tasks must be closed before an agent can propose a solution to the case.
   A notification is sent to the constituent that lets them know that the request is completed. The constituent can either accept or reject the proposal. If the constituent accepts the proposal, the case is automatically closed. If the constituent rejects the solution, the case is reopened, and the agent must propose another outcome.

Track license and permit requests using License and Permit Playbook

Track all the license and permit requests that are assigned to you or other agents in your government agency by using the License and Permit Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager, sn_gsm_lic_prmt.case_task_agent, sn_gsm_lic_prmt.case_task_agent, sn_gsm_lic_prmt.government_service_manager

About this task

When you select a case, a form opens with the following sections:

- A record of activity on the case, including added attachments or any interactions between the requester and the license and permit request case agent.
- Tasks or actions that need to be taken on the user's part, such as accepting or rejecting a case outcome.
- The case details, including contact information, the case number, and the case's stage and status.
- Any attached files.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Open the License and Permit Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **License and Permit Requests** list and select **All**.
3. In the License and Permit Requests section, select a list that is described in the following table.

License and Permit Request Lists

List	Description
All	All license and permit request cases that the agent has access to.
My Cases	All license and permit request cases assigned to the agent.
My Open	Open cases assigned to the license and permit request case agent.
Unassigned for my group	Cases that belong to any of the license and permit request case agent's groups but haven't been assigned to an agent.

Create a License and Permit request on behalf of a constituent or business

Government service agents can create requests on behalf of constituents or business from the Government Service Portal. Constituents can also create and submit license/permit requests on behalf of someone else through the Government Service Portal.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **License & Permit Requests** > **All**.
2. Select **New** to create a case.
3. Select **General License/Permit** under the Service dropdown, and **New License/Permit Request** under the Case Type dropdown.
4. Select **Create Case**.
   The License and Permit Playbook opens and initiates the first activity for collecting the request details.
5. On the **Enter Application Details** activity card, confirm the applicant's eligibility and select **Continue**.
6. On the form, fill in the fields with the requester's contact information and details of the request.
7. Under Representation, select the check box for **Requesting on behalf of someone else**.
8. Enter the name of the constituent or business that the requester is submitting the application on behalf of, and select **Save**.

Note:
All license/permit co-applicants must have a business contact account associated with your business to be included on a license/permit application. Each contact can create an account by registering on the Government Service Portal, or a government service agent can create a business contact record for them. For information on how agents can create a business contact record from information entered in a License and Permit application, see Create a business contact account from license or permit application data.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

9. **Optional:** Select any add-ons, such as permit endorsements.
   You may add more than one. The pricing of the license or permit varies with each selection or combination of selections.
10. Review the fees associated with the requester's choices.
    The fee total changes dynamically based on the options selected. If the constituent or requester is fee exempt, select the **Fee Waiver** check box and enter a justification to claim an exemption for them.
11. Select **Submit** to move to the next activity.
12. Add any additional related parties.
    Related parties may include business partners, managers, or any business contact who may need access to this license/permit. They must be contacts already registered on the Government Service Portal and associated with your business.
13. Select **Mark Complete**.

Result

A case is created with the license or permit request information and all related parties, and is now routed to the constituent via the Government Service Portal. In the Government Service Portal, agents can upload any applicable identity documents, credentials, or supporting documentation required for this license/permit request. The case continues once the constituent has uploaded these documents.

Using the contextual side panel in License and Permit Playbook

The contextual side panel provides you with the tools that can help you to research and resolve problems about your cases.

The contextual side panel in the CSM Configurable Workspace gives you access to information that can help you resolve license and permit request cases.

It includes a column of icons that you can select to access different types of information.

The following table shows you the tabs that you should see on the contextual side panel in the License and Permit Playbook.

Contextual side panel tabs

Field	Description
Record information icon 	Relevant information about a record. In License and Permit Playbook, the ribbon displays the record information, constituent details, the case timeline, and the active and inactive service level agreements (SLAs). For more information on how to view information about the ribbon in playbooks, see Viewing the ribbon information in License and Permit Playbook.
Activity stream icon	Ability for you to communicate with requesters and make internal notes about the work that is done on a record.
Attachments icon ()	Ability for you to attach knowledge base content to a response to the requester in the activity stream.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Contextual side panel tabs (continued)

Field	Description
Dynamic Related Records icon ( )	Related records in the contextual side panel that dynamically change based on the context of the current record or playbook activity.
Email template icon ( )	Reusable content for the subject line and message body of email notifications.
Template icon ( )	Standard content that is related to resolving the issue. To create a template, select the template icon Create.

Use response templates in License and Permit Playbook

Respond to cases by using the response templates in the contextual side panel in CSM Configurable Workspace. Good templates save you time by eliminating repetitive work. Response templates replace the static text with details from the license/permit application.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, or sn_gsm.service_manager, sn_gsm.case_task_agent

About this task

Selecting the response templates icon shows the reusable messages that you can copy and paste into cases and case tasks.

In License and Permit Playbook,Response Templates replace the static text with details from the license/permit application, such as:

- Constituent or Business Contact Name
- License/permit application Number
- License/permit application submission date
- Short description
- Address Information
- Assigned to

For information on how to create response templates, see Create or modify a response template.

Procedure

1. In the CSM Configurable Workspace, open an information request task.
2. In the contextual side panel, select the response templates icon to display a list of the available templates.
3. In the Response Templates side panel, search for a template.
4. Select a template and then select **Copy** to copy the template to the clipboard.
   Paste the template text into the **Work notes** field or the **Additional comments** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using the activity stream in License and Permit Playbook

You can access the activity stream in the contextual side panel in CSM Configurable Workspace after you create an license and permit request record using the License and Permit Playbook. The activity stream enables you to communicate with requesters and make internal notes about the work that is done on a record, making it easier to relay and track information.

Using the activity stream

You can use an activity stream to communicate with requesters and track information on a record. The activity stream updates when the current activity in the playbook is updated.

You can access the activity stream by selecting the activity stream icon ( ) in the contextual side panel.

Agent tasks in the activity stream

The following table lists the tasks that you can do in the activity stream.

Agent tasks

Task	Description
View posts for the case or case task	Current activity in the playbook work area that determines the information that is displayed in the activity stream. Scroll through the posts in the Activity section to view the case or task information. At the top of the activity stream, select **Case** or **Task** to switch views.
Add work notes or comments	In the Compose section: 1. Select the **Work notes** or **Comments** activity. 2. Add the information to the text field. 3. Select **Post Work Notes** or **Post Comments**. The post is added to the Activity section. Internal work notes are private and are only visible to other agents. External comments are visible to agents and requesters.
Filter or search posts	At the top of the Activity section, select the filter icon ( ) to display the filter selections: • **Post types:** Select the types of posts to view, such as the work notes or attachments. • **Field changes:** Select the fields that you want to view the posts for in only those fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent tasks (continued)

Task	Description
	• **Flagged:** Enable this button to view the posts that have been flagged as important. • **Filter sets**: Select two or more filters in this list. Search all activity posts by selecting the search icon ( ).
Sort posts	Sort the posts by the newest to the oldest or the oldest to the newest posts by selecting the sort icon ( )
Expand and collapse posts	Expand and collapse posts by selecting the more options icon (•••): • **Expand all posts**: Expands the posts to view additional details. • **Collapse all posts**: Returns the posts to their previous state.

Viewing the dynamic related records in License and Permit Playbook

You can view the dynamic related records in the playbook contextual side panel in CSM Configurable Workspace. These records dynamically change based on the current record or playbook activity.

Using related records in License and Permit Playbook

You can view, search, and sort the records in the **Related Records** tab in the contextual side panel after you create an license and permit request record.

The **Related Records** tab displays the related records that dynamically change based on the context of the current record or playbook activity. The records that are displayed in the **Related Records** tab depend on the following settings:

- The related record contexts and definitions that have been configured for a record or playbook activity.
- The agent's access permissions to data.

Different related records appear based on each playbook stage and step. At the Intake and Review stages, the agent should see similar Closed License/Permit Requests, so they can compare the outcome of similar requests. At the Process and Decision stages, agents should see any Open Case Tasks that are preventing the case from moving to the next step, or being resolved and closed.

Types of related records

The related records appear in the list as a read-only card. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list. Depending on the related record configuration for the source record or playbook activity, you can see the following types of related records:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- SLAs
- Escalations
- Blocked By
- Open Case Tasks
- Similar License/Permit Requests
- Emails
- Draft Emails
- Documents
- Approvals
- Knowledge Gaps
- Install Base
- Attached Knowledge
- Requests
- Interactions
- Related Cases
- Special Handling Notes
- Appointments
- Related Parties

Customizing the related records view

The following table lists the customization options for the related records view.

Customizing the Related records view

Task	Description
View the related records in the contextual side panel	Related Records icon (☰) that you can select to view the Related Records list. Related records appear as a card format in the list. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list.
Select the type of related record to view	Filter at the top of the Related Records list where you can select the type of related records to view. You can also use the filter to see the current selection. For more information, see Customize the related records view in Service Request Playbook.
Search the related records list	Search field at the top of the Related Records list to perform a text search. Records that match the search text are highlighted. For more information, see Customize the related records view in Service Request Playbook.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customizing the Related records view (continued)

Task	Description
Open a related record in a subtab	Card in the Related Records list that you can use to open the record in a subtab under the parent record. In the subtab, you can view the record details and perform the available actions.
Open the related record list in a list view in a subtab	List view icon ( ) to display the related records in a list view in a subtab under the parent record.
Create a new record for the selected related list	New record for the record type that is currently selected in the Related Records list. This action opens a new record form in a subtab under the parent record.

Viewing the ribbon information in License and Permit Playbook

You can view the information about the ribbon in the contextual side panel in CSM Configurable Workspace. The ribbon displays the important information about the case, such as the information request record information, constituent contact details, and the case timeline.

Select the record information icon ( ) in the contextual side panel to view the information about the ribbon.

You can see the information about the fields in the contextual side panel in the following table.

Contextual Side Panel Ribbon fields

Field	Definition
Record Information	Case record number, short description, stage, state.
Requester Overview Card	Details about the constituent and contact for the case.
Timeline	Chronological summary of the case activities, including the case state changes and interactions between the agent and the constituent/business. You can also see how much time that the agent and user spent on the case.
SLAs	Active service level agreements (SLAs) for the case, including the time remaining, the SLA state, and any breaches.

Add Multiple Parties to a record in License and Permit Playbook

As a government agent, you can add other business contacts or constituents to a license or permit application.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Open the License and Permit Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **License and Permit Requests** list and select **All**.
3. Open the License or Permit Request case you wish to add multiple related parties to.

   Note:
   Related parties can only be edited if the case is in the **Intake** or **Review** stage.

4. Navigate to the **Add related parties** activity in the Intake stage of License and Permit Playbook.
5. Select **Add Related Party**.
6. Select the Type and Responsibility of the related party in the dropdown, then enter their contact name in the Contact field to look up existing contacts that match this name.

   Note:
   All license/permit co-applicants must have a business contact account to be included on a license/permit application. Each contact can create an account by registering on the Government Service Portal, or a government service agent can create a business contact record for them. For information on how agents can create a business contact record from information entered in a License and Permit application, see Create a business contact account from license or permit application data.

7. Select **Save**.
8. Repeat steps 5-7 to add as many related parties as needed.
9. Select **Mark as Complete**.

Create a business contact account from license or permit application data

Use the contact information for related parties entered on a license or permit application to create business contact accounts.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Navigate to the CSM Configurable Workspace and select **Interactions** > **All**.
2. Select the interaction number to open an existing interaction record, or select the new icon New to create an interaction.
3. Select the interaction type and assign the interaction to a user.
4. **Optional:** Enter a short description of the interaction.
5. Select **Save**.
6. Select **Create Business** and fill in the fields.
7. Select **Submit**.

Manage a business contact or related party from an Application

Additional business contacts can be edited or removed by a government service agent before a license or permit case reaches the Process stage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Open the License and Permit Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **License and Permit Requests** list and select **All**.
3. Open the License or Permit Request case that you want to remove a business contact from.

   Note:
   Related parties can only be edited if the case is in the **Intake** or **Review** stage.

4. Navigate to the **Add related parties** activity in the Intake stage of License and Permit Playbook.
5. Select the delete icon next to the business contact you want to delete, or the edit icon next to the business contact you want to edit.
6. Select **Save** once you’re finished editing the related party information.
7. Select **Mark Complete** to save the activity.

Using Information Request Playbook

If you're an information request case agent or manager, you can use the Information Request Playbook for Public Sector Digital Services to manage and resolve requests for information and public records.

A playbook provides you with step-by-step guidance through the life cycle of an information request case.

The Information Request Playbook automatically appears in the **Playbook** tab when you create an information request case by using the CSM Configurable Workspace.
A playbook takes a workflow and breaks it into multiple stages or lanes. Each stage in a playbook includes one or more activities, or steps, for you to complete. Stages can also include automated activities, such as auto-sending an email to a customer when a stage or activity is complete.
When using a playbook, you can:

- View the playbook stages and activities.
- Select an activity and perform the work to complete that activity.
- Mark an activity as complete and move to the next activity or stage.
- Complete the stages and activities to resolve the case.

The workflows for a type of case and the activities that you need to resolve these cases are in the playbook. By using a playbook, you can visualize the entire life cycle of the information request workflow.

Playbook stages

The Information Request Playbook stages are listed in the following table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook stages

Task	Description
Intake	Guides you through the record creation process by capturing the details of the information request and assigning it to the right agent.
Review	Acts as a checkpoint for duplicate cases and provides you with an opportunity to review the case details to verify that the issue is valid and needs to be resolved.
Process	Guides you through the activities for the information request fulfillment.
Decision	Captures and communicates the documents and information to the constituent and any other agents or involved parties.

Playbook layout

A playbook is made up of several areas, including the playbook life cycle, the playbook work area, and the contextual side panel. The activity view determines how the stages and activities appear in the playbook.

The default activity view for the Information Request Playbook is the Process-based experience view. This view, which is shown in the following example, shows constituent or business information and case task information at the forefront of the playbook work area as you work on it.

The process-based playbook layout shows the following features:

- A horizontal stage picker that gives the agent a complete view of the entire process and where they currently are in that process. Agents can use the stage picker to track their overall progress as they work on cases.
- Record information on the left side of the page, such as the contact information that is always available.
- Related records in the contextual side panel supported by the dynamic related records component.

Playbook layout with the Process-based experience view

The following table shows the components that you can see in the Information Request Playbook workspace.

Playbook components

Playbook area	Description
Playbook header	• Appears at the top of the playbook. • Shows the title of the playbook and a horizontal stage picker that displays progress through the playbook stages.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook components (continued)

Playbook area	Description
	• Includes a filter that you can use to filter the activities by the assigned user or the activity status. • Includes the Playbook Actions menu that you can use to select the playbook-level and activity-level actions.
Playbook Lifecycle	• Appears in a panel on the left side of the playbook. • Displays a list of the activities for each stage. • With the horizontal stage layout, you can expand or collapse the entire list of activities for the current stage.
Playbook work area	• Appears in the middle of the playbook. • Displays the card for the current activity.

Contextual side panel	• Appears on the right side of the playbook.
	• Includes the tabs that you can use to display the following types of information:
	  ○ Case or case task activity stream.
	  ○ Ribbon information such as the case overview, customer details, timeline, and service level agreements (SLAs).
	  ○ Dynamic related records. For more information, see Dynamic related records.

Constituent or Business Card	• Contact information for the constituent or business that submitted the request. • Appears in a panel on the left side of the playbook.

Note:
Verify that the Information Request Playbook application, which is separate from the Public Sector Digital Services Core application, has been installed and configured. For instructions, see Install and configure the Information Request Playbook application.

By default, the following stages are available to you as an information request case agent in the Information Request Playbook in the CSM Configurable Workspace.

- Intake
- Review
- Processing
- Decision

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Stages in an Information Request Playbook

The Information Request Playbook experience starts with the Intake stage. This stage is the default playbook stage for a new information request case. Use this playbook stage to gather information about the requester, the documents being requested, and any exemption categories that the request falls into. You can also request additional information from the requester.

The playbook continues with the Review stage. In this stage, you can do the initial troubleshooting on the case, evaluate similar or duplicate requests, and determine whether the information requested can be released and if a fee needs to be charged. You can move the case to the next stage when the requester accepts the fee, or if a fee waiver is submitted and approved.

The playbook continues with the Process stage. In this stage, you can assess resources, request a fee approval, create case tasks, and add or request new information before the case resolution begins. The case status changes to Work in Progress once the fee payment is processed or waived. The case is then sent for legal review. After legal review is complete, the case is moved to the Decision stage. You may solicit additional information from the requester at any time during this stage.

The final stage of the Information Request Playbook is the Decision stage. At the Decision stage, the status of the case is updated from Review in Progress to Ready for Decision after the case has passed legal review. A notification is sent to the requester that lets them know that case approval has been has obtained and the requested documents have been uploaded. The requester can then either accept or reject the document. If the requester accepts the documents, the case is automatically closed. If the requester rejects the solution, the case is reopened, and the agent must propose another outcome.

Create an information request record using Information Request Playbook

Create an information request record in the Public Sector Digital Services application by using an Information Request Playbook activity. By using a playbook, you can have an efficient, streamlined way to create and resolve an information request.

Before you begin

Note:
Before you start this procedure, verify that the Information Request Playbook application, which is separate from Public Sector Digital Services Core, is installed and enabled in the CSM Configurable Workspace. For instructions, see Install Information Request Playbook for Public Sector Digital Services.

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

About this task

If a constituent hasn't submitted a case on their own, you can start an IR case using details you have.

If a playbook is configured to use a record generator, you can create a record by using a playbook activity. If a case is already associated with a playbook, a new information request case type is opened in a new tab, with Playbook as the default tab. Creating a record from a list or form, or from an activity in another playbook, opens the Information Request Playbook and initiates the first activity. This activity, the first step of the Intake stage, guides you through the record creation process.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **Information Requests** > **All**.
2. Select **New**.
   The Information Request Playbook opens and initiates the first activity for collecting the request details, which is the Intake stage.
3. On the Enter Request Details activity card, fill in the information.
4. Select **Save**.
   A case is created with the information request information. The case number is added to the tab and the first activity in the Intake stage is marked as complete. The second activity in this stage is highlighted as the current activity.

Intake information request case details using Information Request Playbook

Complete the Intake stage as your first step in resolving a case using the Information Request Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **Information Requests** > **All**.
2. Select **New**.
   The Information Request Playbook opens and initiates the first activity for collecting the request details.
3. On the Enter Request Details activity card, fill in the information.
4. Select **Save**.
   A case is created with the information request information. The case number is added to the tab and the first activity in the Intake stage is marked as complete. The second activity in this stage is highlighted as the current activity. If you have enabled the Similar Request documents UI activity, this will display as the second activity. For more information, see Configure Similar Request Documents UI in Information Request Playbook.
5. **Optional:** Select a related document to link it to the request, and select **Next**.
6. Review the details of the case and make updates if needed.
7. Select **Submit**.
8. Select **Assign to me**.
9. Select **Move to review**.
   The Intake stage is now complete and the case is moved to the Review stage.

Add multiple parties to a record in Information Request Playbook

As a government agent, you can add other business contacts or constituents to an information request application.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Open the Information Request Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **Information Requests** list and select **All**.
3. Open the Information Request case you wish to add multiple related parties to.

   Note:
   Related parties can only be edited if the case is in the **Intake** or **Review** stage.

4. Navigate to the **Add related parties** activity in the Intake stage of Information Request Playbook.
5. Select **Add Related Party**.
6. Select the Type and Responsibility of the related party in the dropdown, then enter their contact name in the Contact field to look up existing contacts that match this name.

   Note:
   All information request co-applicants must be registered on the Government Service Portal to be included on a information request application. Each co-applicant can create an account by registering on the Government Service Portal, or a government service agent can create a business contact account for them. For information on how agents can create a business contact record from information entered in an Information Request application, see Create a business record in CSM Configurable Workspace.

7. Select **Save**.
8. Repeat steps 5-7 to add as many related parties as needed.
9. Select **Mark as Complete**.

Review details of an information request case using Information Request Playbook

Complete the Review stage as your second step in resolving a case using the Information Request Playbook.

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Verify uploaded documents in Information Request Playbook

Review documents.

Before you begin
Role required: admin

About this task
Several types of documents can be requested from the requester to be added in order to proceed with an information request case.

Procedure

1. In the contextual side panel, select the attachments icon (paperclip icon) to view all attached documents.
2. Select an attachment to view the document.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. Review the files attached to the case, and confirm that the requester has included the required documents to validate their identity by selecting the boxes associated with the document type. For example, if the requester uploaded their ID or passport to verify their identity, select the checkbox next to **Personal identification, such as passport or driver's license**.
4. Document your verification work in the work notes.
5. Once you have reviewed and verified all files attached to the case, select **Mark as Complete**.

Review a case for exemptions using Information Request Playbook

Review a case for exemptions.

About this task
Several exemptions may apply to an information request case. .

Before you begin
Role required: admin

Procedure
1. Select any exemptions that apply to the case, and select **Mark as Complete**.
2. If no exemptions apply to the case, select **No exemption code(s) applicable**, then select **Mark as Complete**.

Evaluate an information request case for similar requests

Evaluate similar requests

About this task
Reviews all cases in the org for similar cases. Browse through the 3 similar closed requests at the top of the page. Documents from similar closed requests are populated based on the case's short description and description.

Before you begin
Role required: admin

Procedure
1. Do one of the following actions depending on whether you have similar or linked completed requests.

2. Once you have reviewed, select Mark complete.

> **Note:**
> It may take some time before the next activity loads. If it hasn't loaded within 30 seconds, reload the web page.

Estimate, review, and collect fees for an information request case using Information Request Playbook

In this step, you will estimate and collect fees.

Estimate fees needed for an information request case

Use the fee estimator to estimate the fees associated with this request.

Before you begin
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Enter the following inputs into the fee estimator:
   - How much time is needed for the request
   - How many people are needed for this request
   - How many pages are needed for this request

   Note:
   The fee estimator can only be run once.

2. Select **Next**.
3. Review the calculated output.
4. Use the calculated output as the estimated fee for the case, and enter details on the fee estimate in the work notes.
   a. Select **Add to Case**, noting that the Estimated fees field has been updated.
   b. Enter the Fees calculated in Work notes.

   If the requester qualifies for a fee waiver, enter that information here.
5. Select **Request Fee Approval**.
   The fee estimate is now sent to billing to be approved. A billing group must already created for it to be routed to them in this step. For information on .

   For more information on how to approve a fee estimate as an approve, see . Once the fee estimate has been approved by the approver, mark the step as complete.
6. Select **Send for Requester Approval** to send the fee estimate to the requester.

   This activity will automatically be marked complete once the requester has approved the fee, and the case will be moved to the **Process Payment** activity.

Document a completed payment for an information request case in Information Request Playbook

Verify and document that payment has been sent by the requester in the Process payment activity of the playbook.

About this task
Estimate fees in the last step, send to requester. This is what they will pay.

Before you begin
Role required: admin

Procedure

Verify the payment has been sent, and select **Move to Process**.

Result
The Review stage is now complete and the case is moved to the Process stage, where the requested documents can be processed and reviewed by several teams before they can be routed to the requester.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Process requested documents using the Information Request Playbook

Complete the Process stage as your third step in resolving a case using the Information Request Playbook.

In this stage, you will uploaded and send for review the documents requested by the requester.

Upload documents requested by an individual or business contact in Social Benefits Playbook

Upload the documents.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Upload the documents needed to fill this request by selecting **New Document** or **Link Document**.
2. Move to the next activity by selecting **Prepare for Review**.

Send requested documents for legal or final review in Social Benefits Playbook

Request approval.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Enter any additional work notes or details needed for legal review, and then select **Send for Legal Review**.
   A case task is now created and assigned to the Legal Review assignment group for approval. If the uploaded documents are rejected during the legal review, you may need to make changes and request a review again or move the case directly to the Decision stage.

   Note:
   A legal review group must already have been created. For more information on how to configure legal assignment groups for use with Information Request Playbook, see #unique_189.

2. After the documents have been approved by the legal review group, document the work done in the work notes, then select **Send for Final Review**.
   The case is moved to the Final Review activity, where the documents and details of the request are reviewed by the Final Review Team assignment group.

   Note:
   A final review group must already have been created. For more information on how to configure review assignment groups for use with Information Request Playbook, see #unique_189.

3. After the documents have been approved by the Final Review Team, document the work done in the work notes and select **Move to Decision**.
   The documents are now approved to be released to the requester, and the case is moved to the **Decision** stage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next
Complete the Decision stage, where the documents will be released to the requester.


Redact sensitive data from a requested document in Information Request Playbook

As a legal reviewer, you can redact sensitive data from PDF documents by either searching keywords or selecting text in Information Request Playbook.

About this task
Agents can:

- Redact manually by selecting text to be highlighted for redaction.
- Redact via keyword using Search and Redact.

Before you begin
Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

Procedure
1. Open the Information Request Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **Information Requests** list and select **All**.
3. Select the case that contains the PDF you wish to redact information from.
4. Navigate to the **Legal Review** activity in the **Process** stage.
5. Under the Related Documents card, select the PDF you wish to redact information from.
6. Select the Redact PDF  icon.
7. To redact using the highlight functionality: select Highlight.
8. Drag the cursor to form a box over the text you wish to redact.
   A green box will display over the selected text.
9. Select **Apply Redactions** to redact the highlighted text.
10. Confirm your selection when prompted.
11. To redact using the Search and Redact functionality: enter a keyword you wish to redact, and select Search to parse the document for this keyword.
12. Select **Apply Redactions** to redact every instance of this keyword.
13. Confirm your selection when prompted.
14. Repeat steps 13-14 to redact multiple keywords.
15. Select **Save Changes** to save the redacted version of the PDF.
    Previous versions of the document (which may contain different redacted text) are available and can be accessed by a government employee.

Result
The information is now permanently redacted from the PDF.

Release documents to the requester in Information Request Playbook

Complete the Decision stage as your last step to release documents to the requester.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.relationship_agent, sn_gsm.government_service_manager, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, sn_gsm.agency_manager, sn_gsm.agency_agent

Procedure

1. Enter any work notes for the customer or other users on the case watch-list, and then select **Release** to release the information to the requester.
2. **Optional:** If the requester has opted to be notified by mail, in the work notes, verify that the notice has been sent by mail and select **Mark as Complete**.
3. **Optional:** If the requester has opted to be notified by phone, in the work notes, verify that the notice has been sent by phone and select **Mark as Complete**.
4. Review the resolution code and resolution notes, and select **Propose solution**.
   All case tasks must be closed before an agent can propose a solution to the case.
   A notification is sent to the constituent that lets them know that the request is completed. The constituent can either accept or reject the proposal. If the constituent accepts the proposal, the case is automatically closed. If the constituent rejects the solution, the case is reopened, and the agent must propose another outcome.

Track information request cases using the Information Request Playbook

Track all the information requests that are assigned to you or other agents in your government agency by using the Information Request Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

About this task

When you select a case, a form opens with the following sections:

- A conversation of the interaction between the requester and the information request case agent.
- The action that needs to be taken on the user's part, such as accepting or rejecting a case outcome.
- The case details, including the case number and status.
- Any attached files.

Procedure

1. Open the Information Request Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **Information Requests** list and select **All**.
3. In the Information Requests section, select a list that is described in the following table.

Information Request Lists

List	Description
All	All information request cases that the agent has access to.
My Cases	All information request cases assigned to the agent.
My Open	Open cases assigned to the information request case agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

List	Description
Unassigned for my group	Cases that belong to any of the information request case agent's groups but haven't been assigned to an agent.

For a detailed description of the fields under each list, see Information Request case form.

Using the contextual side panel in Information Request Playbook

The contextual side panel provides you with the tools that can help you to research and resolve problems about your cases.

The contextual side panel in the CSM Configurable Workspace gives you access to information that can help you resolve information request cases.

It includes a column of icons that you can select to access different types of information.

The following table shows you the tabs that you should see on the contextual side panel in the Information Request Playbook.

Contextual side panel tabs

Field	Description
Record information icon 	Relevant information about a record. In Service Request Playbook, the ribbon displays the record information, constituent details, the case timeline, and the active and inactive service level agreements (SLAs). For more information on how to view information about the ribbon in playbooks, see Viewing the ribbon information in Information Request Playbook.
Agent assist icon ()	List of search results with the content that is related to the record that you are viewing. The content may include knowledge articles, recommended actions, or other records. For more information, see Agent assist Overview.
Attachments icon ()	Ability for you to attach knowledge base content to a response to the requester in the activity stream.
Template icon ()	Standard content that is related to resolving the issue. To create a template, select the template icon  .
Response template icon ()	Reusable messages that you can copy and paste into the cases and case tasks. For more information on using and creating response templates, see Use response templates in Information Request Playbook.
Dynamic Related Records icon ()	Related records in the contextual side panel that dynamically change based on the context of the current record or playbook activity.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Contextual side panel tabs (continued)

Field	Description
Activity stream icon	Ability for you to communicate with requesters and make internal notes about the work that is done on a record.

Use response templates in Information Request Playbook

Respond to cases by using the response templates in the contextual side panel in CSM Configurable Workspace. Good templates save you time by eliminating repetitive work.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, or sn_gsm.service_manager

About this task

Selecting the response templates icon shows the reusable messages that you can copy and paste into cases and case tasks. For information on how to create response templates, see Create or modify a response template.

Procedure

1. In the CSM Configurable Workspace, open an information request task.
2. In the contextual side panel, select the response templates icon to display a list of the available templates.
3. In the Response Templates side panel, search for a template.
4. Select a template and then select **Copy** to copy the template to the clipboard.
   Paste the template text into the **Work notes** field or the **Additional comments** field.

Using the activity stream in Information Request Playbook

You can access the activity stream in the contextual side panel in CSM Configurable Workspace after you create an information request record using the Information Request Playbook. The activity stream enables you to communicate with requesters and make internal notes about the work that is done on a record, making it easier to relay and track information.

Using the activity stream

You can use an activity stream to communicate with requesters and track information on a record. The activity stream updates when the current activity in the playbook is updated.

You can access the activity stream by selecting the activity stream icon ( ) in the contextual side panel.

Agent tasks in the activity stream

The following table lists the tasks that you can do in the activity stream.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent tasks

Task	Description
View posts for the case or case task	Current activity in the playbook work area that determines the information that is displayed in the activity stream. Scroll through the posts in the Activity section to view the case or task information. At the top of the activity stream, select **Case** or **Task** to switch views.
Add work notes or comments	In the Compose section: 1. Select the **Work notes** or **Comments** activity. 2. Add the information to the text field. 3. Select **Post Work Notes** or **Post Comments**. The post is added to the Activity section. Internal work notes are private and are only visible to other agents. External comments are visible to agents and requesters.
Filter or search posts	At the top of the Activity section, select the filter icon ( ) to display the filter selections: • **Post types:** Select the types of posts to view, such as the work notes or attachments. • **Field changes:** Select the fields that you want to view the posts for in only those fields. • **Flagged:** Enable this button to view the posts that have been flagged as important. • **Filter sets**: Select two or more filters in this list. Search all activity posts by selecting the search icon ( ).
Sort posts	Sort the posts by the newest to the oldest or the oldest to the newest posts by selecting the sort icon ( )
Expand and collapse posts	Expand and collapse posts by selecting the more options icon (•••):

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent tasks (continued)

Task	Description
	• **Expand all posts**: Expands the posts to view additional details. • **Collapse all posts**: Returns the posts to their previous state.

Viewing the dynamic related records in Information Request Playbook

You can view the dynamic related records in the playbook contextual side panel in CSM Configurable Workspace. These records dynamically change based on the current record or playbook activity.

Using related records in Information Request Playbook

You can view, search, and sort the records in the **Related Records** tab in the contextual side panel after you create an information request record.

The **Related Records** tab displays the related records that dynamically change based on the context of the current record or playbook activity. The records that are displayed in the **Related Records** tab depend on the following settings:

- The related record contexts and definitions that have been configured for a record or playbook activity.
- The agent's access permissions to data.

Types of related records

The related records appear in the list as a read-only card. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list. Depending on the related record configuration for the source record or playbook activity, you can see the following types of related records:

- Similar Information Requests
- Open Case Tasks
- Related Work Orders
- Blocked Tasks
- Emails
- Approvals
- SLAs
- Escalations for the case

Customizing the related records view

The following table lists the customization options for the related records view.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customizing the Related records view

Task	Description
View the related records in the contextual side panel	Related Records icon ( ) that you can select to view the Related Records list. Related records appear as a card format in the list. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list.
Select the type of related record to view	Filter at the top of the Related Records list where you can select the type of related records to view. You can also use the filter to see the current selection. For more information, see Customize the related records view in Service Request Playbook.
Search the related records list	Search field at the top of the Related Records list to perform a text search. Records that match the search text are highlighted. For more information, see Customize the related records view in Service Request Playbook.
Open a related record in a subtab	Card in the Related Records list that you can use to open the record in a subtab under the parent record. In the subtab, you can view the record details and perform the available actions.
Open the related record list in a list view in a subtab	List view icon ( ) to display the related records in a list view in a subtab under the parent record.
Create a new record for the selected related list	New record for the record type that is currently selected in the Related Records list. This action opens a new record form in a subtab under the parent record.

Viewing the ribbon information in Information Request Playbook

You can view the information about the ribbon in the contextual side panel in CSM Configurable Workspace. The ribbon displays the important information about the case, such as the information request record information, constituent contact details, and the case timeline.

Select the record information icon ( ) in the contextual side panel to view the information about the ribbon.

You can see the information about the fields in the contextual side panel in the following table.

Contextual Side Panel Ribbon fields

Field	Definition
Record Information	Fields, case record number, short description, stage, state, and address.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Contextual Side Panel Ribbon fields (continued)

Field	Definition
Requester Overview Card	Details about the constituent and contact for the case.
Timeline	Chronological summary of the case activities, including the case state changes and interactions between the agent and the customer. You can also see how much time that the agent and customer spent on the case.
SLAs	Active service level agreements (SLAs) for the case, including the time remaining, the SLA state, and any breaches.

Using Service Request Playbook

If you're a government service agent or manager, you can use the Service Request Playbook for Public Sector Digital Services to manage and resolve requests for services like park maintenance, broken stop signs, or other types of community issues.

A playbook provides a step-by-step guidance through the life cycle of a government service case.

The Service Request Playbook automatically appears in the **Playbook** tab when you open or create a service request case in the CSM Configurable Workspace.
A playbook takes a workflow and breaks it into multiple stages or lanes. Each stage in a playbook includes one or more activities, or steps, for you to complete. Stages can also include automated activities, such as auto-sending an email to a constituent when a stage or activity is complete, or auto-sending a work order to a field service agent. When using a playbook, you can:

- View the playbook stages and activities.
- Select an activity and perform the work to complete that activity.
- Mark an activity as complete and move to the next activity or stage.
- Complete the stages and activities to resolve the case.

The workflows that are associated with a specific type of case and the activities that must be completed to resolve this type of case are detailed in the playbook. Playbooks also help you to visualize the entire lifecycle of the service request workflows by displaying your progress through the playbook in the header.

Playbook stages

The Service Request Playbook has four stages, listed in the following table.

Playbook stages

Task	Description
Intake	Guides you through the record creation process by capturing the details of the service request and assigning it to the right agent.
Review	Acts as a checkpoint for duplicate cases and provides you with an opportunity to review the case details to verify that the issue is valid and needs to be resolved.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook stages (continued)

Task	Description
Process	Guides you through the activities for case resolution.
Decision	Captures and communicates the decision that you made on the service request to the constituent and any other agents or involved parties.

Playbook layout


A playbook is made up of several areas, including the playbook life cycle, the playbook work area, and the contextual side panel. The activity view determines how the stages and activities appear in the playbook.

The default activity view for the Service Request Playbook is the Process-based experience view. This view, which is shown in the following example, shows constituent or business information and case task information at the forefront of the playbook work area as you work on it.

The process-based playbook layout shows the following features:

- A horizontal stage picker that gives the agent a complete view of the entire process and where they currently are in that process. Agents can use the stage picker to track their overall progress as they work on cases.
- Record information on the left side of the page, such as the contact information that is always available.
- Related records in the contextual side panel supported by the dynamic related records component.

Playbook layout with the Process-based experience view

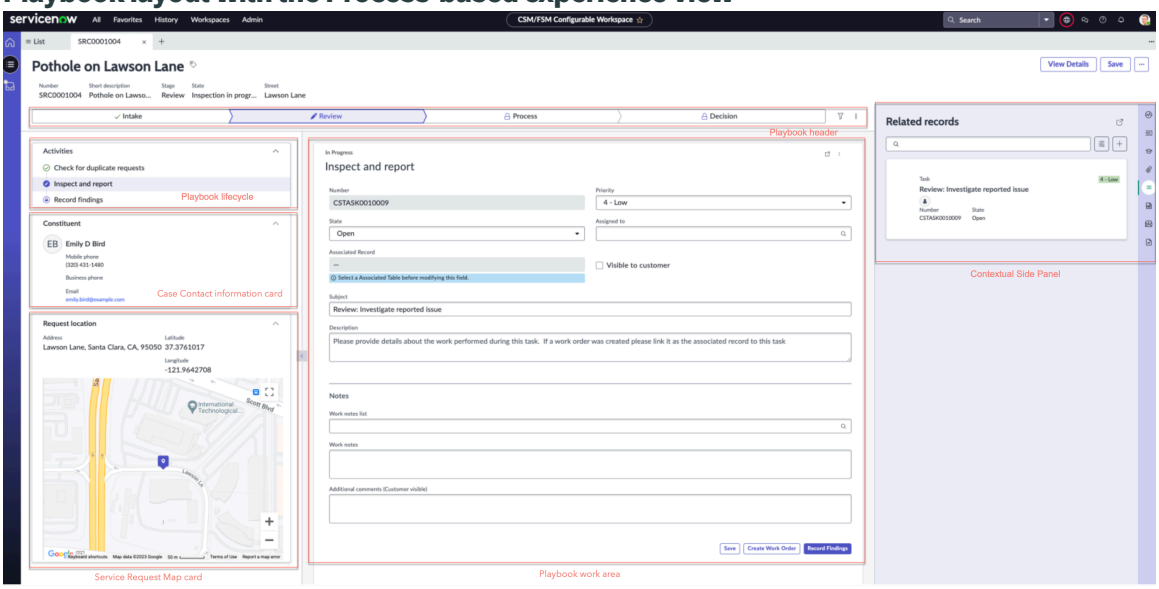

The following table shows the components that you can see in the Service Request Playbook process-based workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Playbook components

Playbook area	Description
Playbook header	• Appears at the top of the playbook. • Shows the title of the playbook and a horizontal stage picker that displays progress through the playbook stages. • Includes a filter that you can use to filter the activities by the assigned user or the activity status. • Includes the Playbook Actions menu that you can use to select the playbook-level and activity-level actions.
Playbook Lifecycle	• Appears in a panel on the left side of the playbook. • Displays a list of the activities for each stage. • With the horizontal stage layout, you can expand or collapse the entire list of activities for the current stage.
Playbook work area	• Appears in the middle of the playbook. • Displays the card for the current activity.

Contextual side panel	• Appears on the right side of the playbook.
	• Includes the tabs that you can use to display the following types of information:
	  ○ Case or case task activity stream.
	  ○ Ribbon information such as the case overview, customer details, timeline, and service level agreements (SLAs).
	  ○ Dynamic related records. For more information, see Dynamic related records.

Constituent or Business Card	• Contact information for the constituent or business that submitted the request. • Appears in a panel on the left side of the playbook.
Service Request Map Card	• New component of the process-based playbook layout. • Appears after the intake stage, if the sn-geo-map plugin is installed, and Google API key is configured.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a service request record using Service Request Playbook

Create a service request record in the Public Sector Digital Services application by using a Service Request Playbook activity. By using a playbook, you can have an efficient, streamlined way to create and resolve a service request.

Before you begin

Note:
Before starting this procedure, verify that the Service Request Playbook application, which is separate from Public Sector Digital Services Core, has been installed and enabled in the CSM Configurable Workspace. For instructions, see Install Service Request Playbook for Public Sector Digital Services.

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

About this task

If a playbook is configured to use the record generator feature, you can create a record using a playbook activity. If a case is already associated with a playbook, a new service request case type is opened in a new tab, with Playbook as the default tab. Creating a record from a list or form, or from an activity in another playbook, opens the Service Request playbook and initiates the first activity. This activity, the first step of the intake stage, guides you through the record creation process.

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **Service Requests** > **All**.
2. Select **New**.
   The Service Request Playbook opens and initiates the first activity for collecting the request details, which is the Intake stage.
3. On each activity card, fill in the information.
   Select Skip to bypass an intake activity.
4. Select **Save**.
   A case is created with the service request information. The case number is added to the tab and the first activity in the Intake stage is marked as complete. The second activity in this stage is highlighted as the current activity.

What to do next

Continue using the playbook stages and activities to resolve the constituent's issue and complete the case.

Resolving a service request case by using playbooks in Public Sector Digital Services

You can use playbooks to create cases and to complete the tasks and activities that are needed to resolve specific types of cases.

Note:
Verify that the Service Request Playbook application, which is separate from the Public Sector Digital Services Core application, has been installed and configured. For instructions, see Install and configure the Service Request Playbook application.

By default, the following stages are available to you as a government service agent in the Service Request Playbook in the CSM Configurable Workspace.

- Intake
- Review

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Processing
- Decision

Stages in a Service Request Playbook

The Service Request Playbook experience starts with the Intake stage. This stage is the default playbook stage for a new service request case. Use this playbook stage to gather information about the requester and the complaint for the service request case. You can also request additional information from the requester.

The playbook continues with the Review stage. In this stage, you can do the initial troubleshooting on the case, check for similar or duplicate case requests, and determine what services need to be rendered and if a field service agent needs to be dispatched. For more information on the Public Sector Digital Services integration with Field Service Management, see Integration with Field Service Management.

The playbook continues with the Process stage. In this stage, you can assess resources, request resource approval, create case tasks, and add or request new information before case resolution begins. If a field service agent needs to be dispatched to the service request location, you can create a work order during the process stage. The case status changes to Work in Progress after the field service agent begins work on the service request case. After work has been completed, the case is moved to the Decision stage.

The final stage of the Service Request Playbook is the Decision stage. At the Decision stage, the state of the case is updated from Work in Progress to Ready for Decision after an agent sends in a decision. A notification is sent to the requester that lets them know that a decision has been reached. The requester can then either accept or reject the solution. If the requester accepts the solution, the case is automatically closed. If the requester rejects the solution, the case is reopened, and the agent must propose another solution.

Complete the Intake Stage in Service Request Playbook

Complete the intake stage as your first step in resolving a case using the Service Request Playbook.

Before you begin

Role required: admin, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

Procedure

1. In the CSM Configurable Workspace, navigate to **Lists** > **Service Request case list** > **All**.
2. Select **New**.
   The Service Request playbook opens and initiates the first activity for collecting the request details
3. On the Enter Request Details activity card, fill in the information.
4. Select **Save**.
   A case is created with the service request information. The case number is added to the tab and the first activity in the Intake stage is marked as complete. The second activity in this stage is highlighted as the current activity. If you have enabled the Similar Records UI activity, this will display as the second activity. For more information, see Configure the Similar Records Activity UI in Service Request Playbook.
5. Review the similar records that are displayed in the Similar Records Activity UI, and determine whether any of them are a duplicate of the current case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- If the current case is a duplicate of any of the cases displayed in the Similar Records UI, select **Mark as Primary Case**, then select **Move to Decision**.
- If the current case is not a duplicate of any of the cases displayed in the Similar Records UI, select **Existing Case Check Done** to move to the next activity.

6. Review the details of the case and make updates if needed.
7. Select **Submit**.
8. Select **Move to review**.
   The Intake stage is now complete and the case is moved to the Review stage.

Complete the Review Stage in Service Request Playbook

Complete the review stage as your second step in resolving a case using the Service Request Playbook.

Before you begin

Role required: admin, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

Procedure

1. In the contextual side panel, check for duplicate cases using the Related records feature in the contextual side panel.
2. Do one of the following actions depending on whether or not you have duplicate cases.

3. Fill in the Inspect and report case form.
   For more information on how Public Sector Digital Services integrates with Field Service Management, see Integration with Field Service Management.
4. Do one of the following actions depending on whether a field service agent must be dispatched to the service request location.

5. Fill in the Record findings case form.
6. Verify if any open case tasks need to be closed, and then select **Move to process**.
   The Review stage is now complete and the case is moved to the Process stage.

Complete the Process Stage in Service Request Playbook

Complete the process stage as your third step in resolving a case using the Service Request Playbook.

Before you begin

Role required: admin, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

Procedure

1. Fill in the Assess resources case form.
2. Do one of the following actions depending on whether a resource approval is required to proceed.

3. Fill in the Perform work case form.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Do one of the following actions depending on whether a field service agent must be dispatched to the service request location.

5. Verify that everything is correct and that you've added all your comments.
6. Select **Move to decision**, and confirm again when prompted.
   The Process Stage is complete and the case is moved to the Decision stage.

Complete the Decision Stage in Service Request Playbook

Complete the decision stage as your last step in resolving a case using the Service Request Playbook.

Before you begin

Role required: admin, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

Procedure

1. Fill in the Resolve case form.
2. Select **Propose solution**.
   All case tasks must be closed before an agent can propose a solution to the case.
   A notification is sent to the constituent that lets them know that a decision has been reached. The constituent can either accept or reject the solution. If the constituent accepts the solution, the case is automatically closed. If the constituent rejects the solution, the case is reopened, and the agent must propose another solution.

Using the contextual side panel in Service Request Playbook

The contextual side panel provides you with the tools that can help you to research and resolve problems about your cases.

The contextual side panel in the CSM Configurable Workspace gives you access to information that can help you resolve government service cases.

It includes a column of icons that you can select to access different types of information.

The following table shows you the tabs that you should see on the contextual side panel in the Service Request Playbook.

Contextual side panel tabs

Field	Description
Record information icon	Relevant information about a record. In Service Request Playbook, the ribbon displays the record information, constituent details, the case timeline, and the active and inactive service level agreements (SLAs). For more information on how to view information about the ribbon in playbooks, see View the ribbon information in Service Request Playbook.
Agent assist icon ( )	List of search results with the content that is related to the record that you are viewing. The content may include knowledge articles,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Contextual side panel tabs (continued)

Field	Description
	recommended actions, or other records. For more information, see Agent assist Overview.
Attachments icon ( )	Ability for you to attach knowledge base content to a response to the requester in the activity stream.
Template icon ( )	Standard content that is related to resolving the issue. To create a template, select the template icon Create.
Response template icon ( )	Reusable messages that you can copy and paste into the cases and case tasks. For more information on using and creating response templates, see Use response templates in Service Request Playbook.
Dynamic Related Records icon ( )	Related records in the contextual side panel that dynamically change based on the context of the current record or playbook activity.
Activity stream icon	Ability for you to communicate with requesters and make internal notes about the work that is done on a record.

Use response templates in Service Request Playbook

Respond to cases by using the response templates in the contextual side panel in CSM Configurable Workspace. Good templates save you time by eliminating repetitive work.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, or sn_gsm.service_manager

About this task

Selecting the response templates icon shows the reusable messages that you can copy and paste into cases and case tasks. For information on how to create response templates, see Create or modify a response template.

Procedure

1. In the CSM Configurable Workspace, open a service request task.
2. In the contextual side panel, select the response templates icon to display a list of the available templates.
3. In the Response Templates side panel, search for a template.
4. Select a template and then select **Copy** to copy the template to the clipboard.
   Paste the template text into the **Work notes** field or the **Additional comments** field.

Using the activity stream in Service Request Playbook

You can access the activity stream in the contextual side panel in CSM Configurable Workspace after you create a service request record. The activity stream enables you to communicate with

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

constituents and make internal notes about the work that is done on a record, making it easier to relay and track the information.

Using the activity stream

You can use an activity stream to communicate with constituents and track the information on a record. The activity stream updates when the current activity in the playbook is updated.

You can access the activity stream by selecting the activity stream icon ( ) in the contextual side panel.

Agent tasks in the activity stream

The following table lists the tasks that you can do in the activity stream.

Agent tasks

Task	Description
View posts for the case or case task	Current activity in the playbook work area that determines the information that is displayed in the activity stream. Scroll through the posts in the Activity section to view the case or task information. Select **Case** or **Task** at the top of the activity stream to switch views.
Add work notes or comments	In the Compose section: 1. Select the **Work notes** or **Comments** activity. 2. Add the information to the text field. 3. Select **Post Work Notes** or **Post Comments**. The post is added to the Activity section. Internal work notes are private and are only visible to other agents. External comments are visible to agents and requesters.
Filter or search posts	Select the filter icon ( ) at the top of the Activity section to display the filter selections: • **Post types:** Select the types of posts to view, such as the work notes or attachments. • **Field changes:** Select the fields that you want to view the posts for in only those fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent tasks (continued)

Task	Description
	• **Flagged:** Enable this button to view the posts that have been flagged as important. • **Filter sets**: Select two or more filters in this list. Select the search icon ( ) to search all activity posts.
Sort posts	Select the sort icon ( ) to sort the posts by the newest to the oldest or the oldest to the newest posts.
Expand and collapse posts	Select the more options icon (•••) to expand and collapse posts: • **Expand all posts**: Expands the posts to view additional details. • **Collapse all posts**: Returns the posts to their previous state.

Viewing the dynamic related records in Service Request Playbook

You can view the dynamic related records in the playbook contextual side panel in CSM Configurable Workspace. These records dynamically change based on the current record or playbook activity.

Using related records in Service Request Playbook

You can view, search, and sort the records in the **Related Records** tab in the contextual side panel after you create a service request record. For details on how to create a record, see Create a service request record using playbooks in Public Sector Digital Services.

The **Related Records** tab displays the related records that dynamically change based on the context of the current record or playbook activity. The records that are displayed in the **Related Records** tab depend on the following settings:

- The related record contexts and definitions that have been configured for a record or playbook activity.
- The agent's access permissions to data.

Types of related records

The related records appear in the list as a read-only card. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list. Depending on the related record configuration for the source record or playbook activity, you can see the following types of related records:

- Similar Service Requests
- Open Case Tasks
- Related Work Orders

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Blocked Tasks
- Emails
- Approvals
- SLAs
- Escalations for the case or customer

Default related records

The following table shows the default related records that are based on each playbook step.

Default related records

Stage	Playbook Activity	Default related record
Intake	All activities	Similar Service Requests
Review	Check similar requests	Similar Service Requests
Review	• Inspect and report • Record findings	Open Case Tasks
Process	• Assess resources • Perform work	Open Case Tasks
Process	Approve resources	Approvals
Decision	All activities	Open Case Tasks

You can search the Related Records list by entering the text in the search field or by filtering the list to display the records of a specific type. You can expand a card to show a more detailed view or open the list in a subtab. If you have the create permission, you can also create new related records of the selected type.

Customizing the related records view

The following table lists the customization options for the related records view.

Customizing the Related records view

Task	Description
View the related records in the contextual side panel	Related Records icon (☰) that you can select to view the Related Records list. Related records appear as a card format in the list. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customizing the Related records view (continued)

Task	Description
Select the type of related record to view	Filter at the top of the Related Records list where you can select the type of related records to view. You can also use the filter to see the current selection. For more information, see Customize the related records view in Service Request Playbook.
Search the related records list	Search field at the top of the Related Records list to perform a text search. Records that match the search text are highlighted. For more information, see Customize the related records view in Service Request Playbook.
Open a related record in a subtab	Card in the Related Records list that you can use to open the record in a subtab under the parent record. In the subtab, you can view the record details and perform the available actions.
Open the related record list in a list view in a subtab	List view icon () to display the related records in a list view in a subtab under the parent record.
Create a new record for the selected related list	New record for the record type that is currently selected in the Related Records list. This action opens a new record form in a subtab under the parent record.

View the ribbon information in Service Request Playbook

You can view the information about the ribbon in the contextual side panel in CSM Configurable Workspace. The ribbon displays the important information about the case, such as the service record information, constituent contact details, and the case timeline.

Select the record information icon () in the contextual side panel to view the information about the ribbon.

You can see the information about the fields in the contextual side panel in the following table.

Contextual Side Panel Ribbon fields

Field	Definition
Record Information	Fields, case record number, short description, stage, state, and address.
Requester Overview Card	Details about the constituent and contact for the case.
Timeline	Chronological summary of the case activities, including the case state changes and interactions between the agent and the customer. You can also see how much time that the agent and customer spent on the case.
SLAs	Active service level agreements (SLAs) for the case, including the time remaining, the SLA state, and any breaches.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customize the related records view in Service Request Playbook

You can customize the related records view in Service Request Playbook.

The following table lists the customization options for the related records view.

Customizing the Related records view

Task	Description
View the related records in the contextual side panel	Related Records icon ( ) that you can select to view the Related Records list. Related records appear as a card format in the list. The initial set of records that display in the list is determined by the record type that you select in the filter at the top of the list.
Select the type of related record to view	Filter at the top of the Related Records list where you can select the type of related records to view. You can also use the filter to see the current selection. **1.** Select the filter icon ( ). **2.** Select a record type from the menu. The menu includes the related lists that have been configured for the parent record.
Search the related records list	Search field at the top of the Related Records list to perform a text search. Records that match the search text are highlighted. **1.** In the search field at the top of the Related Records list, enter the search text. **2.** Select the search icon ( ). **Note:** The search field is grayed out if search is not available for the selected type of related records.
Open a related record in a subtab	Card in the Related Records list that you can use to open the record in a subtab under the parent record. In the subtab, you can view the record details and perform available actions.
Open the related record list in a list view in a subtab	Display the related records in a list view in a subtab under the parent record by selecting the subtab icon ( ).
Create a new record for the selected related list	New record for the record type that is currently selected in the Related Records list. This action opens a new record form in a subtab under the parent record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customizing the Related records view (continued)

Task	Description
	1. Select the create record icon (+) at the top of the Related Records list. 2. Fill in the fields on the record form and select **Save**.

Track government service requests using Service Request Playbook

Track all the service requests that are assigned to you or other agents in your government agency by using the Service Request Playbook.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, and sn_gsm.service_manager

About this task

When you select a case, a form opens with the following sections:

- A conversation of the interaction between the user and the government service agent.
- The action that needs to be taken on the user's part, such as accepting or rejecting a solution.
- The case details, including the case number and status.
- Any attached files.

Procedure

1. Open the Service Request Playbook by navigating to Lists in the CSM Configurable Workspace.
2. Navigate to the **Service Requests** list and click **All**.
3. In the Service Requests section, select a list that is described in the following table:

Service Request Lists

List	Description
All	All service request cases that the agent has access to.
My Cases	All service request cases that are assigned to the agent.
My Open	Open cases that are assigned to the government service agent.
Unassigned for my group	Cases that belong to any of the government service agent's groups but haven't been assigned to an agent.

You can see the following fields under each list:

- Number
- Short description
- Action status
- Service
- Constituent
- Business
- Business contact

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- State
- Address type
- Reported on
- Assigned to agency
- Assigned to

For a detailed description of these fields, see Government Service Case form.

Using the CSM Configurable Workspace for Public Sector Digital Services

Set up CSM Configurable Workspace for your agents and expand the Workspace UI so they can engage with customers, answer questions, create cases, and resolve issues.

Government service agents can complete most tasks in CSM Configurable Workspace. For more information on how to set up the CSM Configurable Workspace, see Set up the CSM Configurable Workspace for Public Sector Digital Services.

The tables below describe some of the basic tasks that agents can perform in CSM Configurable Workspace.

Agent tasks

Task	Description	Details
Use playbooks	Use the step-by-step guidance provided by playbooks to complete tasks and resolve cases.	Using Playbooks
Create a specific type of case	Create a case for a specific type of constituent request.	Creating and resolving case tasks
Use Knowledge to assist with cases	Search for knowledge articles and attach them to cases or open articles in sub-tabs for easier reading. Report a knowledge gap if you can't find relevant articles and, if permission is enabled, create articles directly from cases.	Search for knowledge articles Open a knowledge article Report a knowledge gap Create a knowledge article
Use response templates	Quickly respond to customers using different types of predefined information.	Use response templates in Service Request Playbook

Creating and resolving case tasks as a government service agent in CSM Configurable Workspace

Service request case tasks in Public Sector Digital Services are automatically created and assigned to agents as each service request case moves through its life cycle. Government service agents can view and complete these case tasks (or even create their own tasks) in the CSM Configurable Workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

View existing service request case tasks in CSM Configurable Workspace

View a list of the case tasks that are associated with a service request case, regardless of whether the case task was created automatically or manually, in the CSM Configurable Workspace.

Before you begin

Role required: sn_gsm.agency_manager, sn_gsm.government_service_manager, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, or sn_gsm.agency_agent

Procedure

1. From the Lists menu in the CSM Configurable Workspace sidebar, navigate to **Service Requests** > **All**.
2. Open the service request case by selecting the case number.
3. In the Related List header, open the Tasks related list by selecting **Case Tasks**.
   All the tasks that are associated with this service request case are displayed.

What to do next

To view a list of every service request case task that has been assigned to an agent in your agency, navigate to **Lists** > **Government Service Case Tasks** > **All**.

Create a service request case task in CSM Configurable Workspace

Manually create case tasks from information that you gathered from a service request case in CSM Configurable Workspace.

Before you begin

Role required: sn_gsm.agency_manager, sn_gsm.government_service_manager, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, or sn_gsm.agency_agent

About this task

When an agent creates a service request case task, the system uses information from the service request case to automatically fill in the fields on the Case Task form. Agents can use auto-filled information, as well as the data collected from the end user, to create service request case tasks. After the agent creates and saves a case task, it appears in the Case Tasks related list on the Service Request Case form.

Procedure

1. Open the case.
2. From the Case Tasks related list, select **New**.
3. On the form, fill in the fields.
   For more information on the fields, see Service Request Case Task form.
4. Select **Save**.

Resolve a service request case task in CSM Configurable Workspace

Resolve a service request case in CSM Configurable Workspace. After all information has been added to the comments or work notes of a service request case task, you can mark the case task as resolved.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Role required: sn_gsm.agency_manager, sn_gsm.government_service_manager, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, or sn_gsm.agency_agent

Procedure

1. Navigate to the Lists menu in the CSM Configurable Workspace sidebar.
2. From the Lists menu in CSM Configurable Workspace, navigate to **Service Requests** > **All**.
3. Open the service request case by selecting the case number.
4. From the Tasks related list, select the task number.
5. Add any additional work notes or comments.
   The case task can't be resolved without added work notes or comments.
6. Select **Save**.
7. Select **Close**.

Create a business record in CSM Configurable Workspace

If you're a government service agent, create a business record in CSM Configurable Workspace directly from a service request, interaction, or case when an incident is reported by a constituent, business, or business contact.

Before you begin

Role required: sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_agent, sn_gsm.relationship_agent, or sn_gsm.service_manager

Procedure

1. Navigate to the CSM Configurable Workspace and select **Interactions** > **All**.
2. Select the interaction number to open an existing interaction record, or select the new icon New to create an interaction.
3. Select the interaction type and assign the interaction to a user.
4. **Optional:** Enter a short description of the interaction.
5. Select **Save**.
6. Select **Create Business** and fill in the fields.
   For more information on the fields, see Business Profile form.
7. Select **Submit**.
   The business is now linked to the interaction, and a new tab opens with the business details.

Using Virtual Agent for Public Sector Digital Services

As an admin, you can use Virtual Agent to create chatbot conversations tailored to public sector use cases.

With Virtual Agent for Public Sector Digital Services, which is available by subscription, you can build conversation topics that assist your constituents with self-service tasks. For example, you can create Virtual Agent topics that enable constituents to submit government service cases or help them find relevant information on government regulations or benefits.

As admins or topic authors, you can build your own custom, public sector conversation topics. Or, you can use pre-built conversations that are available with the Virtual Agent platform and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customer Service Virtual Agent Conversations plugin (com.sn_csm.virtualagent) and modify them for public sector use cases.

When you're creating or modifying topics, you can also use pre-built components called topic blocks. These blocks are subflows that run conversational elements or common tasks in a conversation, such as adding or retrieving records. Pre-built topic blocks are included with the Virtual Agent platform and Customer Service conversations. Topic blocks enable topic authors to quickly add standard functions to Virtual Agent conversations, simplifying conversation design and maintenance.

The Public Sector Digital Services Core application provides several topic blocks that you can use in public sector conversations:

- Prompt Service for Constituent – Asks constituents to select a type of government service.
- Create Public Sector Additional Members – Prompts constituents to add other persons who have an authorized interest in an issue or case.

To learn more about topic blocks and how to use them in Virtual Agent conversations, see Maximizing code reuse with topic blocks.

Before building Virtual Agent topics for public sector use cases

Before creating Virtual Agent conversations, review the following prerequisites and the basic process for working with pre-built topics and topic blocks in Virtual Agent Designer.

- Activate the Customer Service Virtual Agent Conversations plugin (com.sn_csm.virtualagent) to access pre-built Customer Service conversations and topic blocks.
- Determine the public sector use cases for topics to be created.
- In Virtual Agent Designer:
  - Preview (test) pre-built topics and topic blocks, such as the public sector blocks, to see how they work. Use the **Type** filter to sort the list of items, such as topic blocks, in the Topics page.
  - If you want to use a pre-built topic or topic block, duplicate and publish it.
  - Add the appropriate copies of topic blocks, such as the public sector topic blocks, to the originating (calling) topic. To learn more about adding topic blocks to a conversation, see Add a reusable topic block to a calling topic or topic block

> **Note:**
> You can use both public sector topic blocks in a conversation.

Prompt Service for Constituent topic block

Use this topic block in a conversation to ask constituents to select a service from a list of available government services, for example permits or licenses. Activate the Customer Service Virtual Agent Conversations (com.sn_csm.virtualagent) plugin to use this topic block.

Example of prompt for services

Create Public Sector Additional Members topic block

Use this topic block to let your constituents specify other people, such as family members or other authorized individuals, who can view a case or issue. Activate the Customer Service Virtual Agent Conversations (com.sn_csm.virtualagent) plugin to use this topic block.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example prompts for adding members to a government service case

When you use this topic block in a conversation, you specify the input parameters from the originating (calling) topic to the topic block.

Public Sector Additional Members input parameters

Parameter	Description
case_id	sys_id of the public sector case record created.
case_type	Extension of the base public sector service.

Mobile Agent experience for Public Sector Digital Services

If you're a government agent, you can use the Mobile Agent app on your mobile device to create, update, and monitor the status of non-emergency service requests in the Public Sector Digital Services application. You can also get an overview of your case load, including your new and active cases.

Use the Mobile Agent to review your case details and complete your case tasks. With a government service agent role, you can use the app to do the following tasks:

- Get a quick overview of your case load.
- Add comments or work notes to cases.
- Review your case details, activity stream, and related information, such as the service level agreements (SLAs), case tasks, and related cases.
- Edit case information.
- Complete case tasks.

The following video highlights some of the capabilities of the ServiceNow® Mobile Agent app. Introduction to ServiceNow mobile apps.

Note:
To use the Mobile Agent, the required plugins must be enabled by an administrator. If you're an administrator, see Configure Mobile Agent for Service Request Playbook to get the information on configuring the Mobile Agent. For instructions on how to get started with the app after an administrator configures these settings, see Get started with the Customer Service mobile application.


Mobile Agent homepage

When you open the Mobile Agent and log in, an applet launcher is displayed with all the applets that are configured to that launcher.

The following example shows the homepage of the Mobile Agent, which displays an overview of cases.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Mobile Agent applet launcher for agents

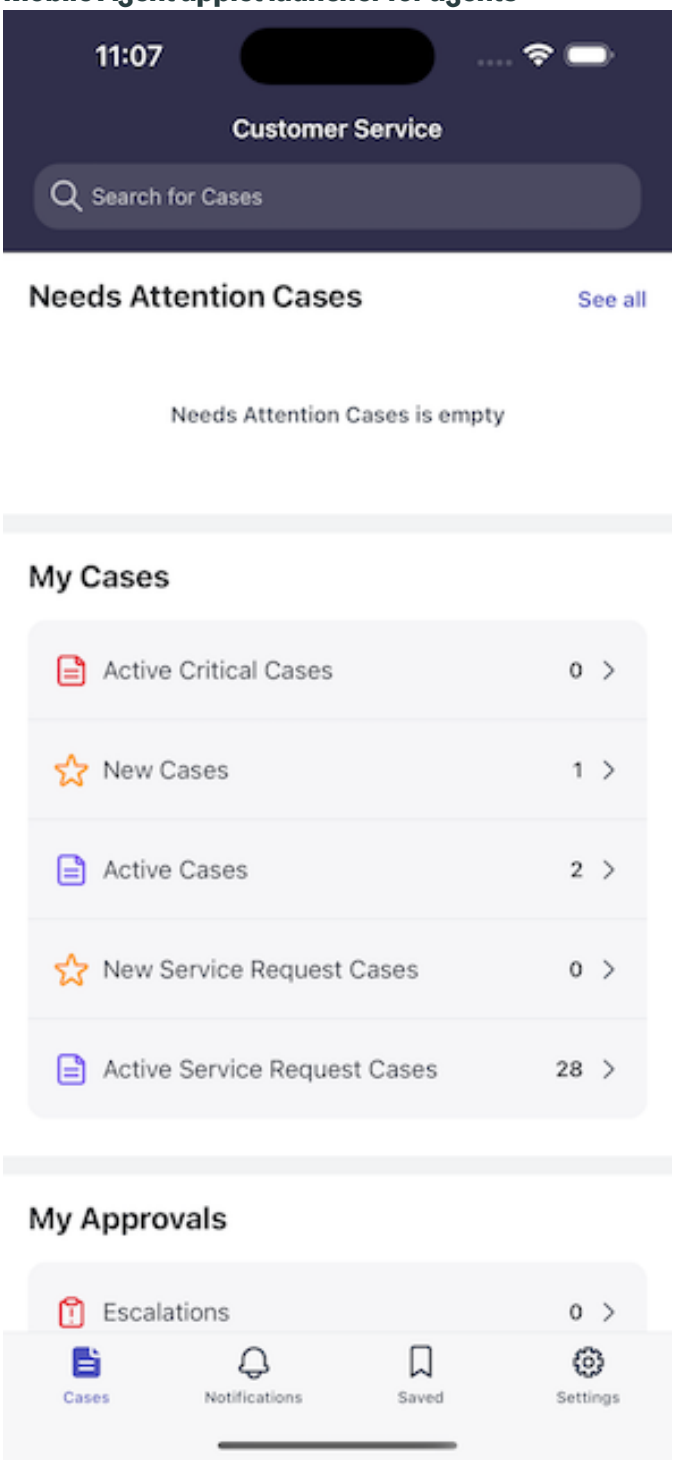

The applet launcher includes all the applets that you need to address or resolve service request cases. You have access to the following applets:

New Service Request Cases	All service request cases that are assigned to you in the **New** state.
Active Service Request Cases	All service request cases that you have access to but haven't been resolved or cancelled, including the cases in the **Open**, **Awaiting Info**, and **Resolved** states.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

New Information Request Cases	All service request cases that are assigned to you in the **New** state.
Active Information Request Cases	All information request cases that you have access to but haven't been resolved or cancelled, including the cases in the **Open**, **Awaiting Info**, and **Resolved** states.


To launch an applet, select it in the app.

Applets and cards

Each applet on the applet launcher screen displays the records that correspond to the applet function. The Active Service Requests applet, for example, when tapped, displays a list of all the active service request case records.

The following example shows a service request card view with a list of all active service request case records.

Mobile Agent Service Request Case card list

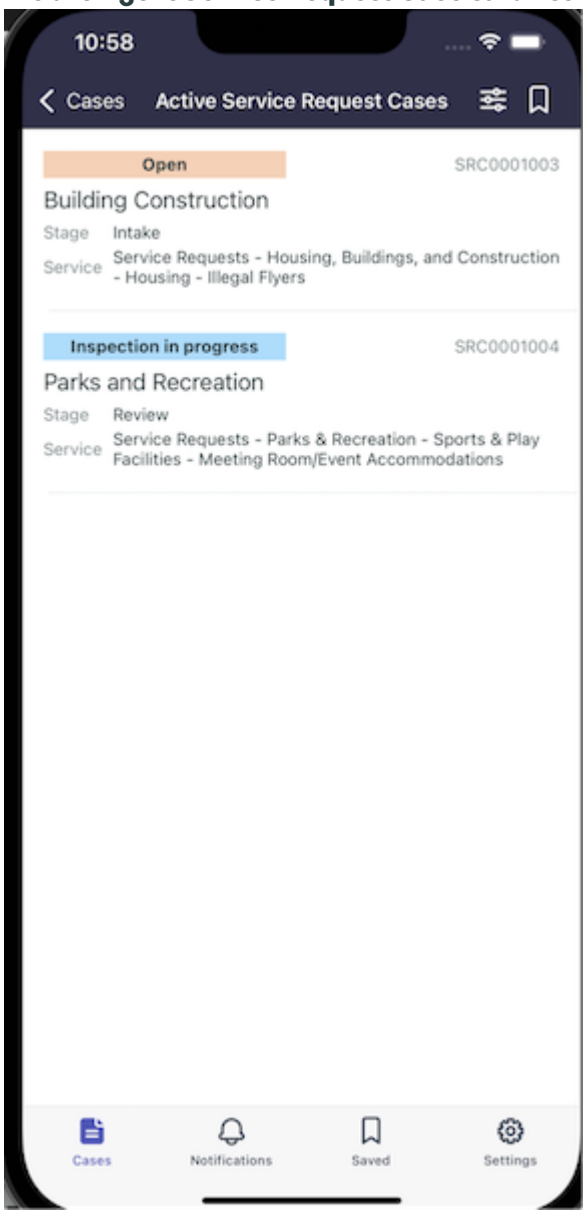

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The cases in the list are displayed as cards, and the state of the case is displayed at the top of the card. For more information on the case states, see Life cycle of a Public Service case.

Select a card to see the case record details. For example, you can see the case activity, related lists, and case escalations, if any.


You can narrow down or sort the list of cases by using the filter icon ( ).

Service Request case cards in the Mobile Agent app

The case cards in the Mobile Agent app display information that is similar to what you would see if you were viewing a case in the CSM Configurable Workspace. For a full list of service request case fields and their descriptions, see Service Request case form.

The following example shows the case details card view. In this view, you can see the case number, case opened date, application type, priority, constituent, channel, primary purpose, and which agency is assigned to the case.

Mobile Agent service request case detail card

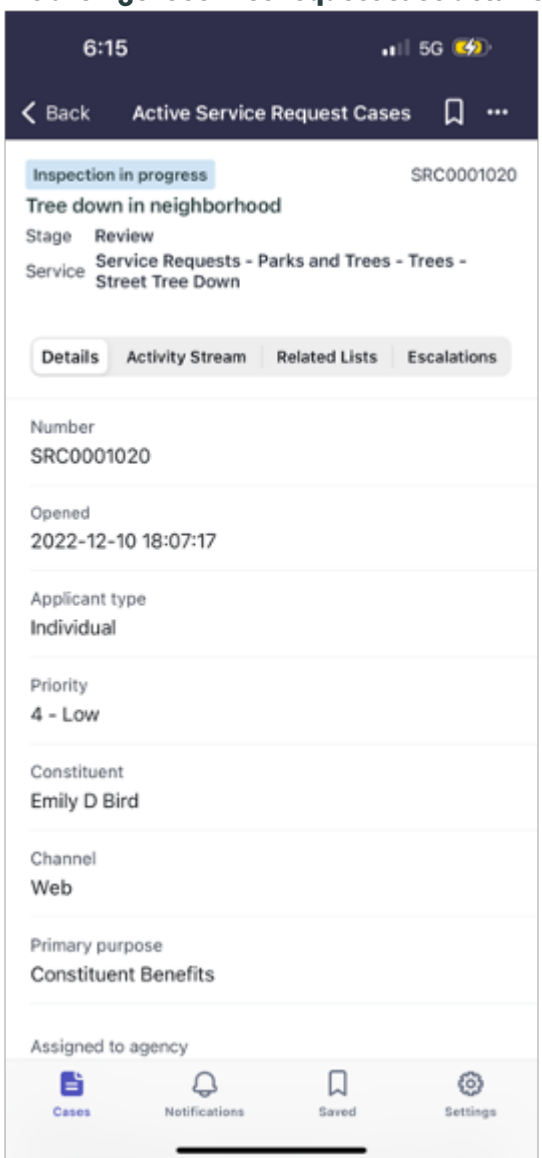


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

As an agent, you can take several actions on service request cases in the Mobile Agent app from within the case cards. In the case detail view, you can select the More Actions icon ( ) to see a list of actions, and select the back button to return to the record list. These actions include:

- Editing the case.
- Closing the case.
- Requesting more information from the constituent or contact.
- Moving the case to review.
- Moving the case directly to a decision.
- Adding comments.
- Escalating the case.

The following example shows the list of actions that you can take for a service request case.

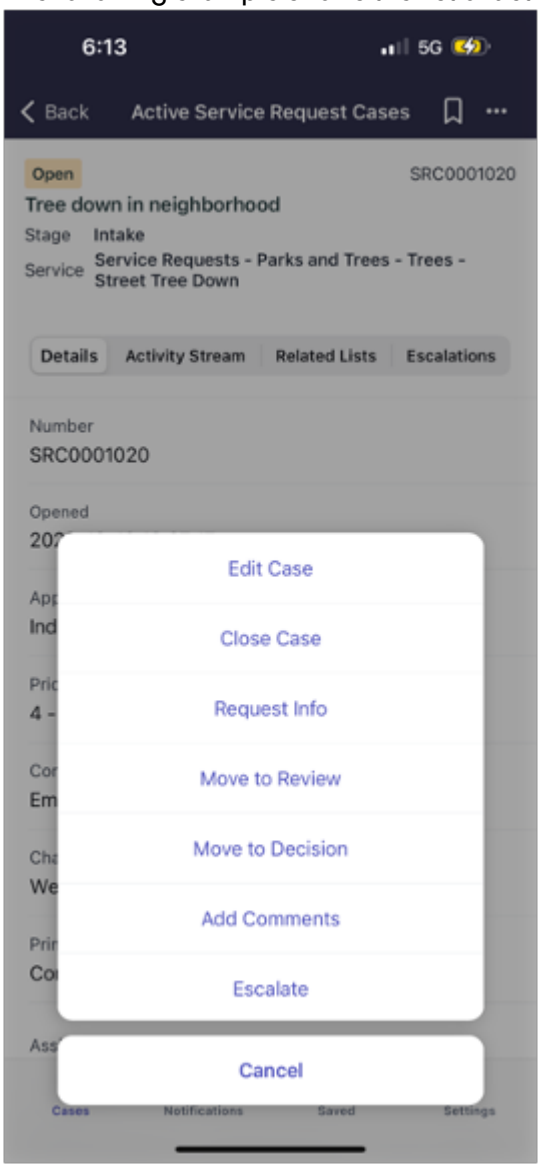

For more information on the agent tasks in the Mobile Agent app, see Using the Mobile Agent to perform agent tasks.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Information Request case cards in the Mobile Agent

The case cards in the Mobile Agent display information that is similar to what you would see if you were viewing a case in the CSM Configurable Workspace. For a full list of information request case fields and their descriptions, see Information Request case form.

The following example shows the case details card view. In this view, you can see the case number, case opened date, application type, priority, contact, channel, primary purpose, and which agency is assigned to the case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Mobile Agent information request case detail card

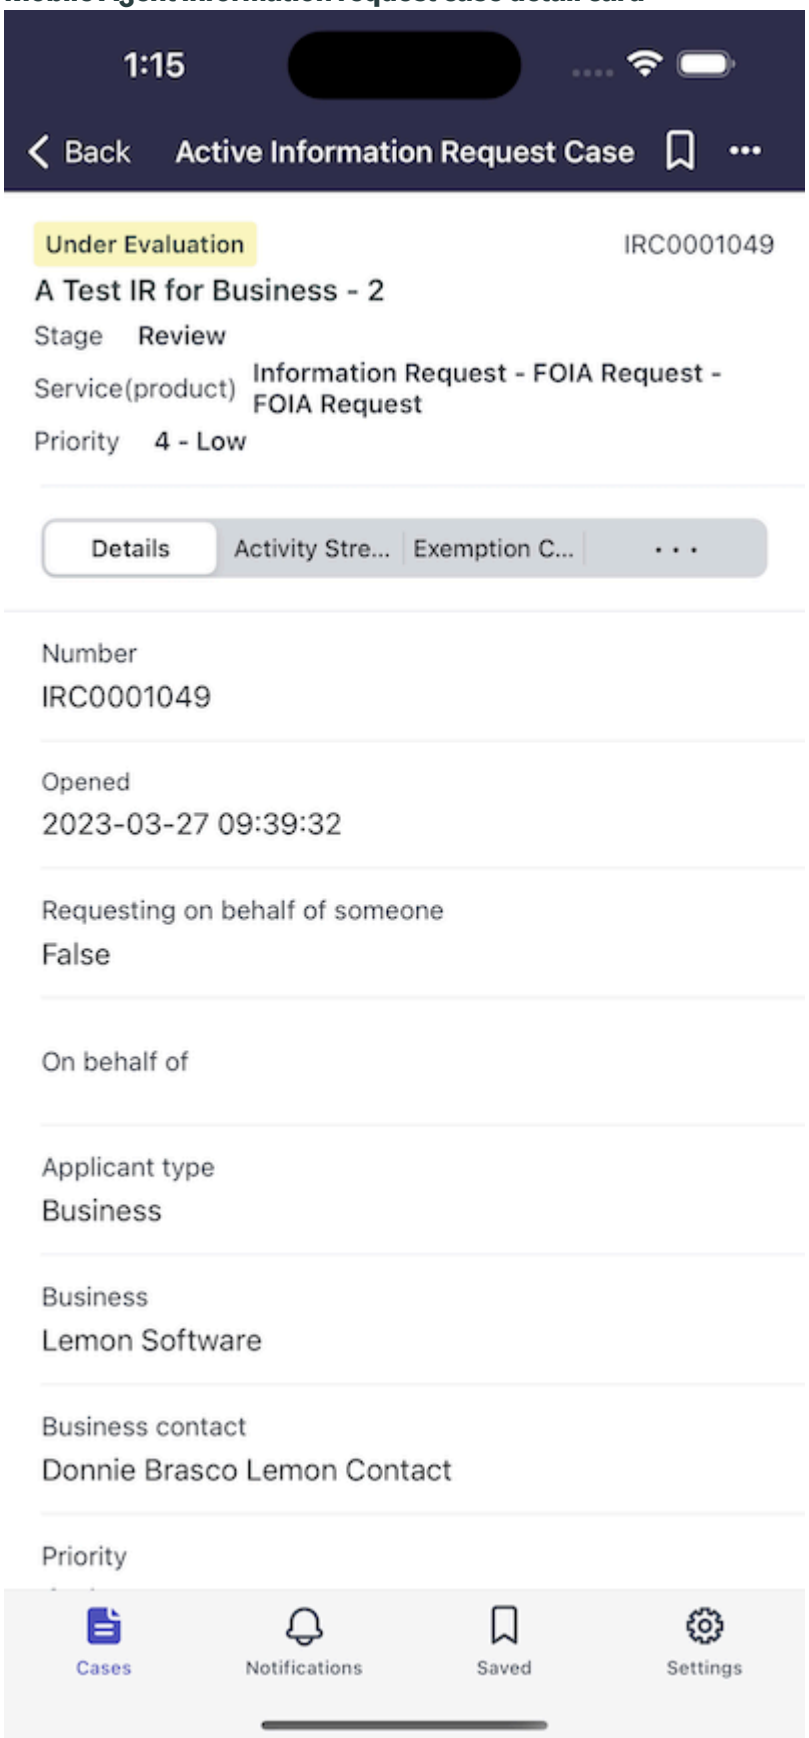


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

As an agent, you can take several actions on information request cases in the Mobile Agent from within the case cards. In the case detail view, you can select the More Actions icon (...) to see a list of actions, and select the back button to return to the record list. These actions include:

- Editing the case.
- Closing the case.
- Requesting more information from the requester.
- Requesting fee approvals.
- Evaluating similar information requests.
- Moving the case directly to a decision.
- Adding comments.
- Escalating the case.

The following example shows a list of actions that you can take for an information request case.

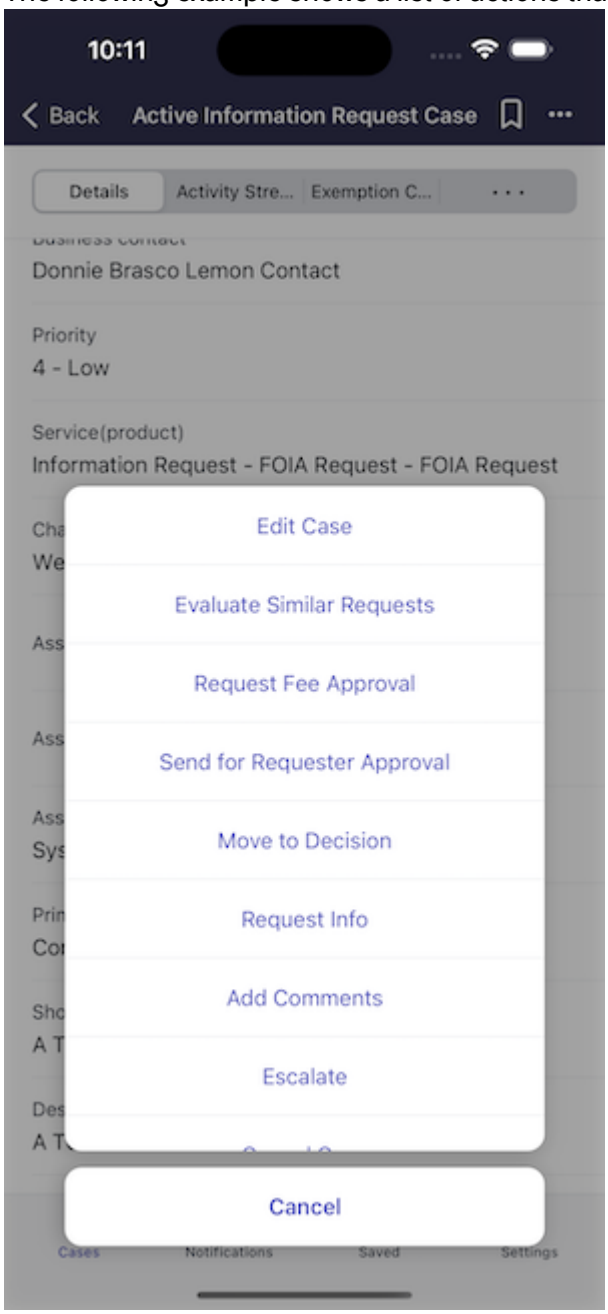

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For more information on the agent tasks in the Mobile Agent, see Using the Mobile Agent to perform agent tasks.

Navigation bar

The navigation bar appears at the bottom of the mobile application screen. This bar includes the following tabs:

Cases

Displays the main case page. Use this applet launcher to access the case management functionality.

Saved

Displays the saved cases or case lists.

Settings

Manages settings for the mobile application.

Related lists in the Mobile Agent

You can access the related lists that are listed in the following table from within the case details.

Related lists in the Mobile Agent app

Related list	Description
Work Orders	List of work orders that were created for this case. You must install the Field Service Management plugin (com.snc.work_management) to view the work orders.
Case Tasks	Displays a list of case tasks. You can view the following information for the case tasks in this list: • State • Number • Subject • Assigned to • Priority
SLAs	Displays a list of the service level agreements (SLAs) for a case. The following information for SLAs is included in this related list: • Task • SLA Stage • SLA Definition • Actual Elapsed Percentage • Actual Elapsed Time

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Related lists in the Mobile Agent app (continued)

Related list	Description
Blocked Tasks	List of blocking tasks that have been created for this case. A blocking task is something that prevents you from making progress toward a case resolution.
Related Parties	List of related parties, such as the contacts or constituents that were added to the case.
Related Cases	Displays a list of the related cases for a case. You can view the following information for the related cases that are included in this list: • Case number • State • Short description • Contact Select a related or child case to view the additional details on the Case form.
Attached Knowledge	Knowledge articles that were attached as a proposed solution to the case.
Documents	List of attached documents for the case.

Using the Mobile Agent to perform agent tasks

If you're a government service agent, you can manage your cases and receive real-time updates on your mobile device with the Mobile Agent.

With the Mobile Agent, you can perform routine actions and approvals from your mobile device anytime and anywhere. The following table describes the tasks that you can perform with the Mobile Agent

whether you're triaging a service request case, or fulfilling an information request.

Government service agent tasks

Agent task	Steps
View a case	View the details of a case and determine if you need to make any changes or take any actions. **1.** In the bottom navigation bar, select **Cases**. **2.** Select **New** to create a case or select **Active** to see a list of the active service request cases. **3.** Select a case to view its details. **4.** Determine if you need to make any changes or take other actions. If so, perform any of the tasks in this table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government service agent tasks (continued)

Agent task	Steps
	For details on viewing a case in the Mobile Agent, see Track government service requests with the Mobile Agent app.
Edit a case	1. From the Service Requests list, open a case. 2. Tap the More actions icon () and select **Edit Case**. For details on the case fields, see Service Request case form.
Add comments to a case	1. From the Service Requests list, open a case. 2. Tap the More actions icon () and select **Add Comments**. 3. In the**Work Notes** or **Additional Comments** fields, add your work notes or comments about the case. You can also add comments through the activity stream related list. For more information, see Using the activity stream in the Mobile Agent.
Propose a solution for a case	1. Tap the More actions icon () and select **Propose Solution**. 2. In the **Resolution Code** and **Resolution Notes** fields, add the code and notes that you propose as a solution to resolve the case and then select **Submit**.
Request more information	1. Tap the More actions icon () and select **Request Info**. 2. In the **Additional Comments** field, add more comments about the request.
Escalate a case	1. Tap the More actions icon () and select **Escalate**. 2. In the **Escalations** dialog box, fill in the details of the escalation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government service agent tasks (continued)

Agent task	Steps
View escalations	1. From the applet launcher, select the **Escalations** applet. 2. View a list of escalations for that case, if any.
Close a case	1. Tap the More actions icon () and select **Close Case**. 2. In the **Resolution Code** and **Resolution Notes** fields, enter the code and your notes about how the case was resolved.

Information request agent tasks

Agent task	Steps
View a case	View the details of a case and determine if you need to make any changes or take any actions. 1. In the bottom navigation bar, select **Cases**. 2. Select **New** to create a case or select **Active** to see a list of the active service request cases. 3. Select a case to view its details. 4. Determine if you need to make any changes or take other actions. If so, perform any of the tasks in this table. For details on viewing a case in the Mobile Agent, see Track information requests with the Mobile Agent.
Edit a case	1. From the Information Requests list, open a case. 2. Tap the More actions icon () and select **Edit Case**. For details on the case fields, see Information Request case form.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information request agent tasks (continued)

Agent task	Steps
Add comments to a case	1. From the Information Requests list, open a case. 2. Tap the More actions icon (⋯) and select **Add Comments**. 3. In the **Work Notes** or **Additional Comments** fields, add your work notes or comments about the case. You can also add comments through the activity stream related list. For more information, see Using the activity stream in the Mobile Agent.
Propose a solution for a case	1. Tap the More actions icon (⋯) and select **Propose Solution**. 2. In the **Resolution Code** and **Resolution Notes** fields, add the code and notes that you propose as a solution to resolve the case and then select **Submit**.
Request more information	1. Tap the More actions icon (⋯) and select **Request Info**. 2. In the **Additional Comments** field, add more comments about the request.
Escalate a case	1. Tap the More actions icon (⋯) and select **Escalate**. 2. In the **Escalations** dialog box, fill in the details of the escalation.
View escalations	1. From the applet launcher, select the **Escalations** applet. 2. View a list of escalations for that case, if any.
Evaluate similar requests	1. Tap the More actions icon (⋯) and select **Evaluate similar requests**. 2. In the **Escalations** dialog box, fill in the details of the escalation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information request agent tasks (continued)

Agent task	Steps
Send for Requester Approval	1. Tap the More actions icon (⋯) and select **Send for Requester Approval**. 2. In the **Send for Requester Approval** dialog box, fill in the details of the escalation.
Request Fee Approval	1. Tap the More actions icon (⋯) and select **Request Fee Approval**. 2. In the **Escalations** dialog box, fill in the details of the escalation.
View Exemption Checklist	1. From the applet launcher, select the **Exception Checklist** applet. 2. Review the list of exemptions under the Freedom of Information Act (FOIA) or Public Records Act, and select one or more exemptions if applicable.
Close a case	1. Tap the More actions icon (⋯) and select **Close Case**. 2. In the **Resolution Code** and **Resolution Notes** fields, enter the code and your notes about how the case was resolved.
Cancel a case	Tap the More actions icon (⋯) and select **Cancel Case**.

Using the activity stream in the Mobile Agent

If you're a government service agent, you can access the activity stream from within the case card in the Mobile Agent. You can also communicate with requesters and make internal notes about the work on a record, which means that you can relay and track information more efficiently.


Using the activity stream

As an agent, you can use the activity stream to communicate with constituents and track the information on a record. You can access the activity stream by selecting the activity stream related list.

The following example shows the activity information view for a record in the Mobile Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Mobile Agent activity stream

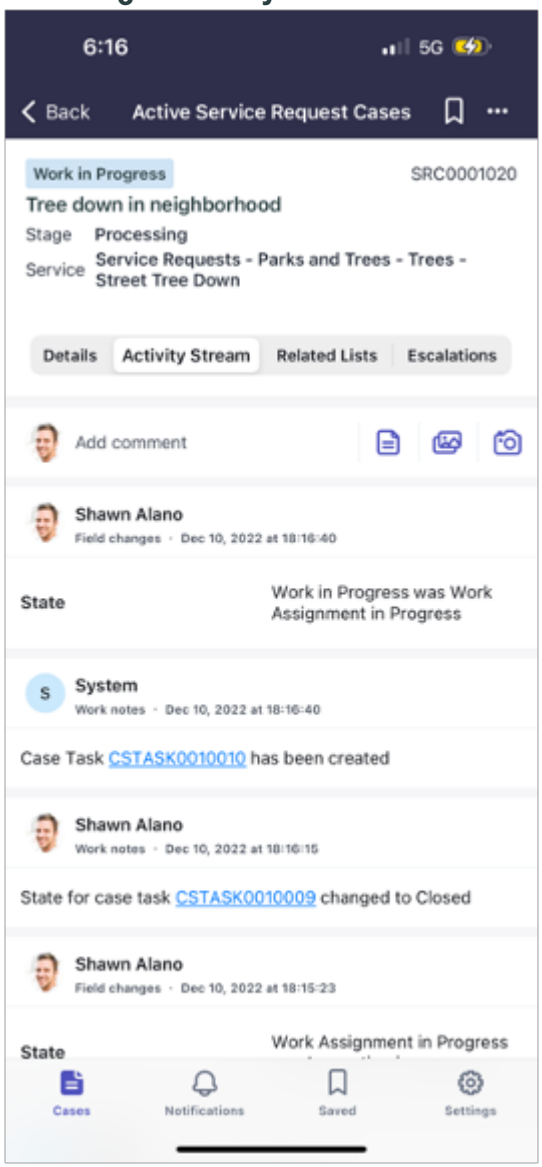

Agent tasks in the mobile activity stream

The following table lists the tasks that you can do in the activity stream in the Mobile Agent.

Agent tasks

Task	Description
View comments, attachments, or case tasks for the case	Scroll through the Activity Stream section to view all comments, attachments, and case tasks that are associated with the service or information request case.
Add work notes or comments	1. Select **Add comment**. 2. In the Compose section, add the information to the text field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent tasks (continued)

Task	Description
	3. (Optional) Select the check box to make the comment or work note publicly visible. **4.** Select **Post**. The post is added to the Activity section. Internal work notes are private and are only visible to other agents. External comments are visible to agents and requesters.
Add photos or attachments	• Select the document icon ( ) to attach a document to the case. • Select the camera icon to take a photo to attach to the case. • Select the gallery icon ( ) to attach an existing photo to the case.

Track government service requests with the Mobile Agent app

Track and view the details of all the service requests that are assigned to you by using the ServiceNow Mobile Agent app.

Before you begin

Role required: sn_gsm.agency_manager, sn_gsm.government_service_manager, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, or sn_gsm.agency_agent

About this task

When you select a case in the Mobile Agent application, a form opens with the following sections:

- The case details, including the case number, priority, and status.
- A record of the interaction between the user and the government service agent.
- The action that must be taken on the user's part, such as accepting or rejecting a solution.
- Any attached files.

Procedure

1. Open the ServiceNow Mobile Agent app.
2. Under **My Cases**, select one of the applets in the following table.

Service Request Applet List

Applet	Description
New Service Request Cases	All service request cases that the agent has access to in the **New** state.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Applet	Description
Active Service Request Cases	All service request cases that the agent has access to that have not yet been resolved or canceled. These cases could be in the **Open**, **Awaiting Info**, or **Resolved** states.

3. Select the service request case that you want to see more details for.
   For a detailed description of the service request case fields, see Service Request case form.

Track information requests with the Mobile Agent

Track and view the details of all the information requests that are assigned to you by using the Mobile Agent on your mobile device.

Before you begin

Role required: sn_gsm.agency_manager, sn_gsm.government_service_manager, sn_gsm.constituent_agent, sn_gsm.business_agent, sn_gsm.agency_constituent_agent, or sn_gsm.agency_agent

About this task

When you select a case in the Mobile Agent app, a form opens with the following sections:

- The case details, including the case number, priority, and status.
- A record of the interaction between the user and the information request case agent.
- The action that must be taken on the user's part, such as accepting or rejecting a case outcome.
- Any attached files.

Procedure

1. Open the ServiceNow Mobile Agent.
2. Under **My Cases**, select one of the applets in the following table.

Information Request Applet List

Applet	Description
New Information Request Cases	All information request cases that the agent has access to in the **New** state.
Active Information Request Cases	All information request cases that the agent has access to that aren't resolved or canceled. These cases could be in the **Open**, **Awaiting Info**, or **Resolved** states.

3. Select the information request case that you want to see more details for.
   For a detailed description of the information request case fields, see Information Request case form.

Using Service Exchange for Public Sector Digital Services

As a government service agency provider, learn how to use Service Bridge to receive and fulfill service requests from the service catalog from your provider instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

As an agency provider, you can author and publish remote catalogs from your instance for consumers to generate service requests that can be fulfilled in your instance. You can also integrate your tasks with your consumer's tasks, sending them back and forth for fulfillment, as well as send cases to your consumer's instance via Provider Task.

Service Bridge service requests are initiated from the constituent's ServiceNow instance, viewed through the Government Service Portal. The agency provider's agent fulfills these requests in their ServiceNow agency provider instance. The data in the request then synchronizes the agent and customer instances so that they both can track its progress.

Using Service Exchange for consumers

As a constituent using a Service Exchange for consumers instance, you can:

- Review remote catalog items entitled to you from your local catalog and send requests to your agency provider for fulfillment.
- Bidirectionally integrate your tasks with your agency provider's tasks.
- Receive proactive tasks from providers for transparency and collaboration.

Using Service Exchange for providers

As a provider, learn how to use Service Exchange to fulfill requests from the service catalog, and track order fulfillment from your agency provider instance.

As a provider, you can:

- Author and publish remote service catalogs for your consumers on their instances.
- Integrate your instance with your consumer's instance.
- Receive and fulfill service requests on your instance from your constituent's ServiceNow instance.

As a provider, you must first create and publish the remote service catalog and remote task definitions that your constituents can use for creating a remote task. You entitle these definitions to your constituents, who can adjust the mappings and field data rules, or simply activate the definition. Your constituents can apply a trigger on the definition or manually create a remote task for you, the provider, based on an active definition.

Remote Catalog items are ordered from the consumer instance, and create provider tasks in both the provider and consumer instance. The provider agent fulfills these provider tasks in their ServiceNow instance. The data in these tasks is synchronized between instances so that they both can track the progress.

The process for agency providers to create a remote catalog is as follows:

1. Create a remote record producer in a remote catalog. For information on how to do this, see Create a remote record producers in a remote catalog in Service Exchange for Providers.
2. Create variables for remote record producers. For information on how to do this, Create variables for remote record producers in Service Exchange for Providers.
3. Associate flows to the record producers.

Remote tasks enable you to assign and synchronize the task's data on separate instances so that you can quickly fulfill the service requests from your constituents. Some examples of the consumer requests are as follows:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. Request help for issues that your constituents are having.
2. Request to assign the existing tasks to you so that you can support your constituent's issues.

For information on how to create a remote task definition that triggers the assignment of a remote task, see Create a remote task definition in Service Exchange for Providers.

Service Exchange request fulfillment process

1. The constituent selects a Service Bridge related item from the service catalog.
2. The consumer provides the information in the Service Exchange request form and selects **Submit**. When the consumer places the request, the Task View appears on the portal. Within the view, the constituent can add comments that are replicated in the agency provider's instance.
3. In the constituent's instance, a single tracking task type, the Provider Task, is generated, regardless of the service.
4. The Provider Task is replicated on the agency provider's instance, triggering a flow that triggers the parent task.
5. The state of the task in the constituent's instance is set to **Received**.
6. In the agency provider's instance, an agent takes ownership of the parent task by selecting **Assign to me**.
7. After an agent takes ownership of the task, the state of the Provider Task in the constituent's instance is updated to **Work in Progress**. When the agent posts a comment on the agency provider's instance, the comment is replicated in the constituent's instance. Comments that the constituent posts are replicated in the provider's instance.
8. After the agent resolves the request, sets a resolution code, and selects **Propose solution**, the state of the Provider Task in the consumer's instance is updated to **Resolved**. The Actions menu displays the following options, Accept, Reject, or Cancel.
9. If the consumer accepts the resolution, the state of the provider task on the constituent's instance, and the state of the request on the agency provider's instance, are both updated to **Closed**.

Use Cases

- Licensing Example: A state uses both provider and consumer instances of Service Exchange. Users in the consumer instance need to access specific content or complete tasks in the provider instance. With Remote Content Items, users can click on a catalog item in the consumer instance, which opens a new tab and logs them into the provider instance to complete the task seamlessly.
- Integration Example: Users clicking on a catalog item in the consumer instance, which opens a new tab and logs them into the provider instance to complete the task. This ensures that users can perform tasks across different instances without any interruptions.

Using Document Processor

The Public Sector Digital Services integration with the Financial Services Operations Document Processor enables other Public Sector applications to collect and verify documents that are used in workflows across the Public Sector workspace.

You can submit documents for verification and track document uploads, helping to improve efficiency of document-based workflows in Public Sector.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

This application is automatically installed when you install the following Public Sector Digital Services playbooks and applications:

- Grants Management
- Social Benefits Playbook
- License and Permit Playbook

An admin can use Document Templates to create HTML and PDF document templates, which can be used to generate standard letters or documents. The templates can be used to automate and simplify the process of filling out, signing, and reviewing documents online. For more information, see Document Templates.

Admins can also integrate documents with 3rd party e-signature providers like DocuSign and Adobe Sign. For more information, see Document Template integration with Docusign or Document Template integration with AdobeSign.

The Document Processor plugin is the foundation for document activities, installed automatically when you install the above plugins or applications. All document activities, components, and flows created by Public Sector Digital Services are part of the Service Applicant Information plugin. For more information on the Service Applicant Information plugin, see Plugins installed with Public Sector Digital Services Core.

Analytics and Reporting Solutions for Public Sector Digital Services

Platform Analytics Solutions contain prepackaged Platform Analytics content for use with other ServiceNow AI Platform products. This Platform Analytics Solution provides KPIs and benchmarks to measure the government services provided to constituents.

Required roles

The following roles and tasks are associated with this Solution:


- ServiceNow AI Platform administrator (admin): Install and activate this Analytics and Reporting Solution and make any necessary changes to system properties.
- Platform Analytics administrator (pa_admin): Review the indicators, breakdowns, widgets, and dashboards. Set up and start data collection. Share the dashboards with appropriate stakeholders.

Constituent Service dashboard


Use this dashboard to monitor the health of citizen services, gain insights on how efficiently government cases are handled, and assess the overall performance of services offered.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Constituent Service Dashboard Overview tab

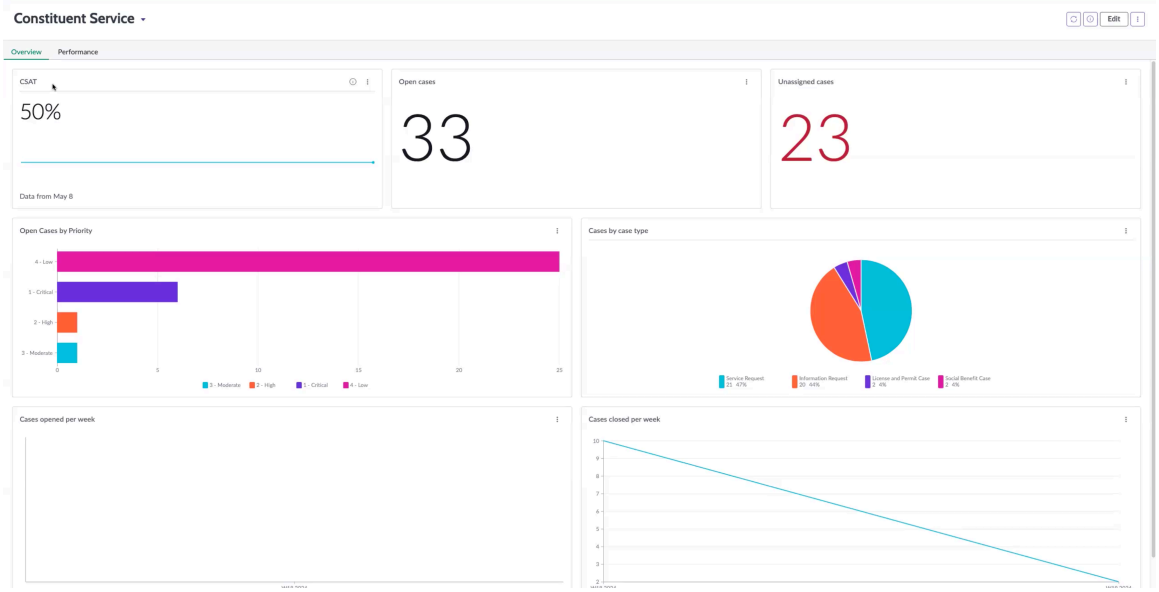

Constituent Service Dashboard Performance tab

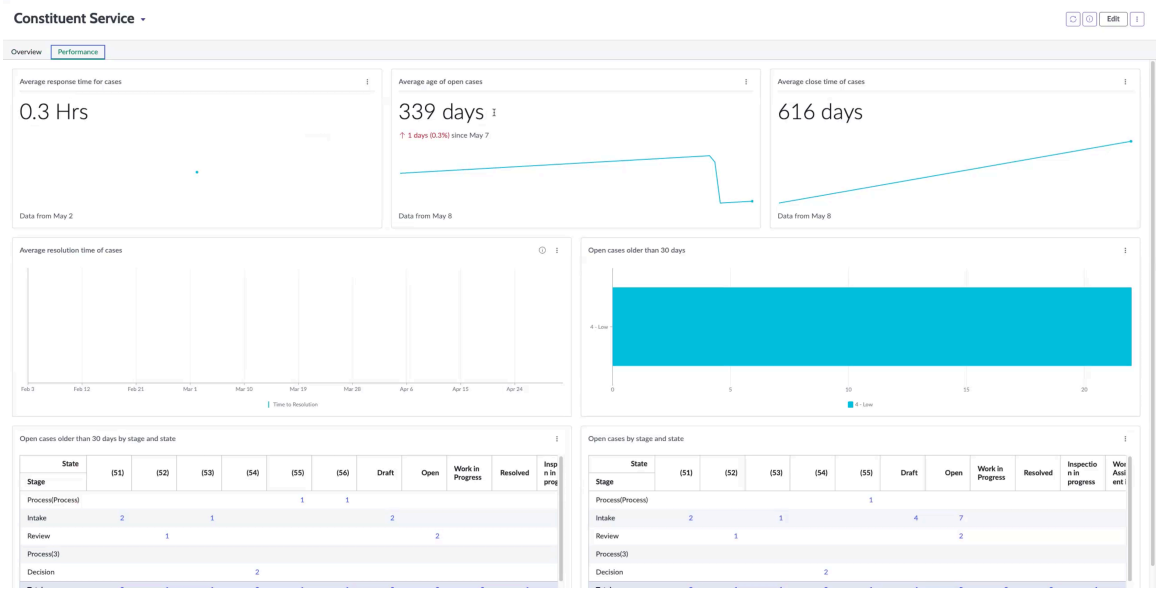

Required ServiceNow AI Platform roles

- sn_gsm.constituent_agent, required to view the dashboard widgets and data.
- sn_gsm.constituent_admin, required to edit the dashboard.

Access the Constituent Service dashboard

To open the dashboard, navigate to **All** > **Platform Analytics** > **Library** > **Dashboards**.

Use cases

For examples of how different people in your organization would use this dashboard, see these use cases.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Constituent Services Dashboard Use cases

User	Dashboard use
Admin or agent	Creates and monitors cases from constituents to accelerate case resolution and increase customer satisfaction. Does the following: • Tracks cases that have been open for a period of time. • Monitors the number of cases for a certain type of service type. • Reviews the average closing time of cases for each service type. • Drills down into details of cases for specific service types.
Government service manager	Monitors the health of government services. Tracks case resolution to drive improvements in service delivery processes and agent performance.

Indicators

Average response time for cases

Average hours for agents to respond to a new government case. This score is calculated by using this formula: [[GSM-Summed duration of FirstResponseTime]] / [[GSM-Number of Responded Cases]]

GSM-Number of Open Cases

Number of open cases created daily.

GSM-CSAT

Customer satisfaction score based on survey results. The score is calculated by using this formula: [[GSM_Number of satisfied customers (CSAT)]]/[[GSM_Number of CSAT survey respondents]]*100.

GSM-Average close time of cases

Average number of days to close cases. This score is calculated by using this formula: [[GSM-Summed duration of closed cases]] / [[GSM-Number of closed cases]] / 24.

GSM-Average age of open cases

Average number of days that cases remain open. The score is calculated by using this formula: [[GSM-Summed age of open cases]] / [[GSM-Number of Open Cases]] / 24.

Average resolution time of cases

Average number of days to resolve cases. The score is calculated using this formula: [[GSM_Summed duration of resolved cases]] / [[GSM_Number of resolved cases]] / 24

GSM-Case Average Response Time

Average length of time for an agent to respond to a case. The score is calculated using this formula: [[GSM-Summed duration of FirstResponseTime]]/[[GSM-Number of Responded Cases]].

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GSM_Number of resolved cases

Daily count of government cases resolved. The goal for this indicator is to maximize the count.

GSM-Number of closed cases

Daily count of closed cases.

GSM-Number of Responded Cases

Daily count of cases to which agents responded.

The following indicators are not shown directly on the dashboard but are used in calculating formulas:


- GSM-Summed duration of closed cases (hours)
- GSM-Summed duration of FirstResponseTime (hours)
- GSM-Summed age of open cases
- GSM-Summed duration of resolved cases (hours)

Breakdowns

- GSM-Account
- GSM-Age
- GSM-AssignedTo
- GSM-AssignmentGroup
- GSM-Category
- GSM-Channel
- GSM-Contact
- GSM-Priority
- GSM-Product
- GSM-State




Data visualizations

Constituent Services Dashboard Data visualizations

Title	Type	Source table	Description
Open cases older than 30 days by stage and state	 Pivot	Government Service Case [sn_gsm_government_service_case]	Detailed summary of open cases older than one month, arranged by stage and state.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Constituent Services Dashboard Data visualizations (continued)


Title	Type	Source table	Description
Open cases	 Score	Government Service Case [sn_gsm_government_service_case]	Total number of unresolved government cases in the system.
Cases opened per week	 Line	Government Service Case [sn_gsm_government_service_case]	Weekly trend of new government cases opened.
Open cases older than 30 days	Horizontal bar	Government Service Case [sn_gsm_government_service_case]	Distribution of government open cases older than 30 days.
Unassigned cases	 Score	Government Service Case [sn_gsm_government_service_case]	Total number of government cases not yet assigned to agents.
Cases by case type	Pie	Government Service Case [sn_gsm_government_service_case]	Percentage of government cases by case type.
Open cases by stage and state	 Pivot	Government Service Case [sn_gsm_government_service_case]	Detailed summary of open government cases, arranged by stage and state.
Cases closed per week	 Line	Government Service Case [sn_gsm_government_service_case] Line	Weekly trend in government cases closed by agents.
Open Cases by Priority	Horizontal bar	Government Service Case [sn_gsm_government_service_case]	Distribution of unassigned government cases by priority.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Services Performance Overview dashboard

Use the Public Services Performance Overview dashboard to assess key performance indicators and data visualizations on public services offered to and requested by constituents, businesses, and agencies.

Public Services Performance Overview - Overview tab

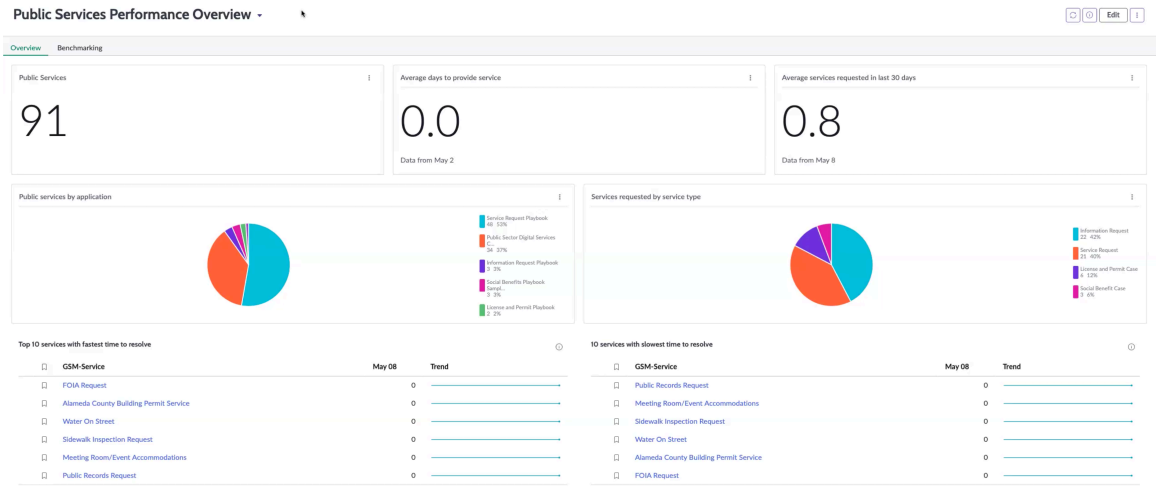

Public Services Performance Overview - Benchmarking tab



Required ServiceNow AI Platform roles

- sn_gsm.service_offered_viewer, required to view the dashboard widgets and data.
- sn_gsm.service_offered_admin, required to edit the dashboard.

Access the Public Services Performance Overview dashboard

To open the dashboard, navigate to **All** > **Platform Analytics** > **Library** > **Dashboards** > **Public Services Performance Overview**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use cases

For examples of how different people in your organization would use this dashboard, see these use cases.

Public Services Performance Overview dashboard Use cases

User	Dashboard use
Admin	Reviews benchmarking information to track the public services offered to and requested by constituents, businesses, and agencies.
Government service manager, service viewer,and owner	Monitors the public services offered to and requested by constituents, businesses, and agencies. Does the following: • Observes short and long-term trends and patterns in service delivery. • Identifies opportunities to improve case resolution, agent performance, and the service experience.

Indicators

GSM-Government Case Count for Services requested

Daily number of government services requested by constituents, businesses, and agencies.

GSM-Average of Government Case for Services requested

Daily average of government cases for services requested by constituents, businesses, and agencies. The average is calculated by using this formula: [[GSM-Government Case Count for Services requested]]/30.

GSM-Average resolution duration of Government Cases

Average number of days to resolve government cases.

GSM-Average number of services provided each week by service type

Average count of government services requested each work, by type of service. The count is calculated by using this formula: [[GSM-Average days to provide services by service type]]/7.

GSM-Average resolution duration of Government Cases in last 365 days

Average number of days to resolve government cases in the last 12 months.

GSM-Avg number of services requested each week by service type

Average count of government services requested weekly by service type. The count is calculated by using this formula: [[GSM-Count of services requested each week by service type]]/7.

GSM-Count of services requested each week by service type

Average number of government services requested each week, by service type. Measured daily.

GSM-Average days to provide services by service type

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Count of government services provided each week by type of service. Measured daily.

GSM-Government Services with fastest/slowest time to resolve




Government services that have the quickest and slowest resolution times.

Breakdowns

- GSM-AssignmentGroup
- GSM-Government.ServiceOffered.Type
- GSM-Product
- GSM-State

Data visualizations

Public Services Performance Overview dashboard Data visualizations

Title	Type	Source table	Description
Top 10 services requested in the last 30 days		Government Service Case [sn_gsm_government_service_case]	Top 10 requested services over a 30-day (monthly) period.
Top 10 services with most open cases in last 7 days		Government Service Case [sn_gsm_government_service_case]	Top 10 requested services over a seven-day (weekly) period.
Top 10 services requested in the last 6 months		Government Service Case [sn_gsm_government_service_case]	Top 10 requested services over a 6-month period.
Services requested by service type	 Pie chart	Government Service Case [sn_gsm_government_service_case]	Distribution (percentage) of government services requested by constituents, businesses, and agencies.
Public Services		Service Definition [sn_case_type_selection]	Total number of all government services available in the system.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Services Performance Overview dashboard Data visualizations (continued)

Title	Type	Source table	Description
Public Services by application	 Pie chart	Service Definition [sn_case_type_selection]	Distribution (percentage) of government services available in the system.

Public Sector Digital Services reference

Reference topics provide additional information about Public Sector Digital Services.

Reference information	Links to topics
Public Sector Digital Services lists and forms	• Public Sector Digital Services Core Case Forms • Public Sector Digital Services Core Profile Forms
Components installed with Public Sector Digital Services applications	• Components and Roles installed with Public Sector Digital Services Core • Roles installed with Public Sector Digital Services • Persona-based Roles in Public Sector Digital Services • Plugins installed with Public Sector Digital Services Core • Properties installed with Public Sector Digital Services
Data Model and catalog topics	• Public Sector Digital Services Data Model • Public Sector Digital Services Core Role Relationships • Government Service Portal service catalog

Public Sector Digital Services Data Model

Learn about the Public Sector Digital Services application by viewing data model and role relationship diagrams. These diagrams show the relationships between the tables and roles within the application and provide an overall picture of how the Public Sector Digital Services application operates.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Data model

The flexibility of the Public Sector Digital Services platform provides you with data models that you can extend and leverage to fit your needs.


Public Sector Digital Services Core Data Model

Public Sector Digital Services Core application provides a framework to enable institutions to organize and manage their data effectively to meet their business needs. This section introduces Public Sector Digital Services Core and explains its purpose and key data design components.

Use the enhanced install base data model to provide authorized users with additional roles to access (read or update) cases, agency location items, and all install base items.

The following logical diagram shows the tables and their relationships that build the Public Sector Digital Services Core data model.

Public Sector Digital Services Core Data Model

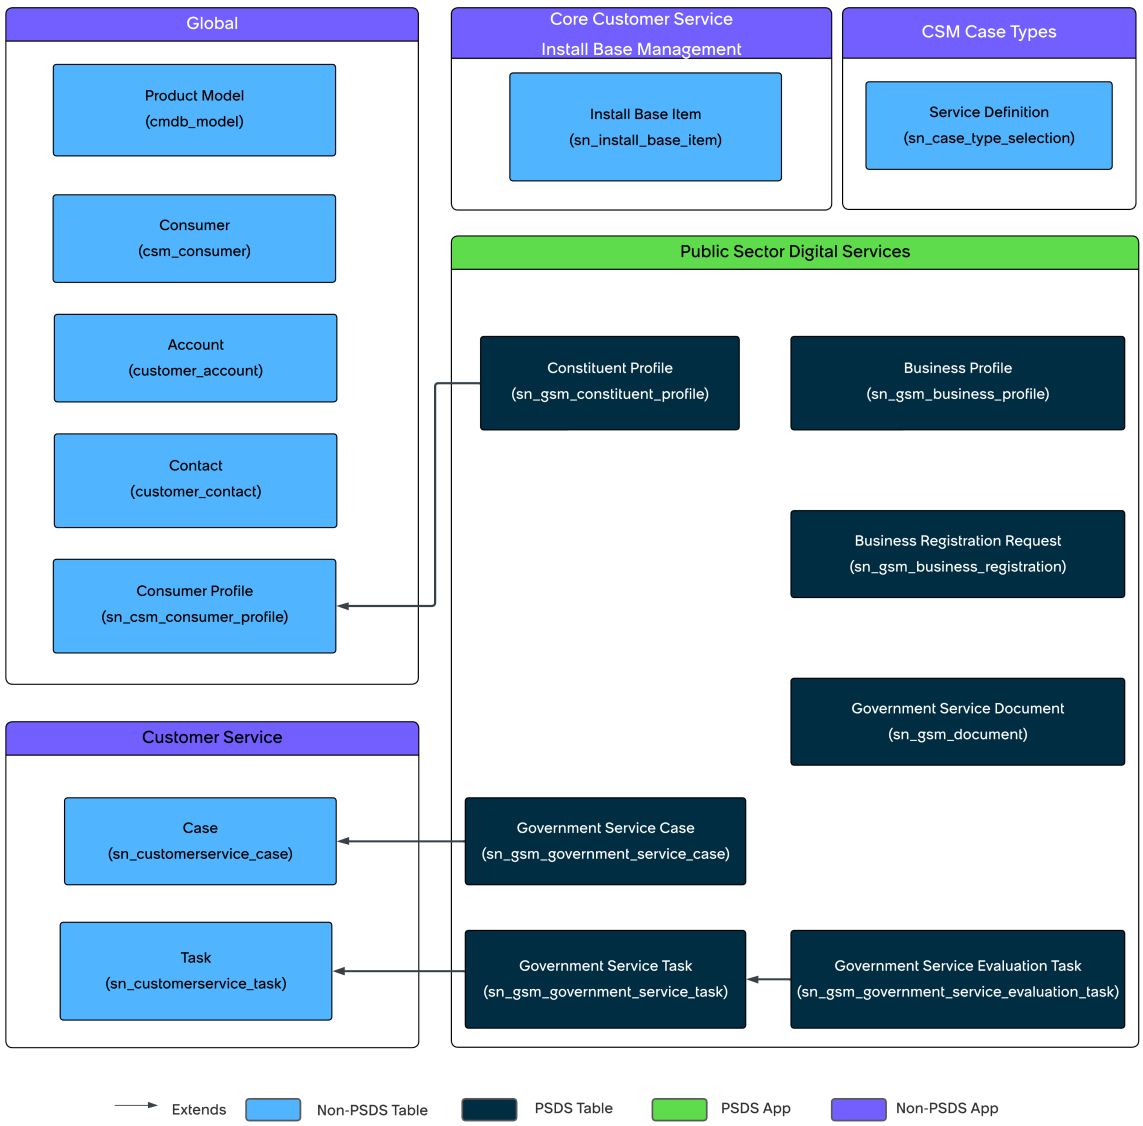

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Tables and Flows installed with Public Sector Digital Services Core

This section describes the tables and flows installed with the Public Sector Digital Services Core application and shows how they store and manage information.

Public Sector Digital Services Core tables installed

Public Sector Digital Services Core tables

Table	Description	Extends Table
Government Service Case [sn_gsm_government_service_case]	Contains records of individual cases related to government services, tracking requests, interactions, and resolutions for constituents seeking assistance from government agencies.	Customer Service Case (sn_customerservice_case)
Government Service Task [sn_gsm_government_service_task]	Contains tasks associated with government service cases, outlining specific actions to be performed, their status, and assigned personnel.	Customer Service Task (sn_customerservice_task)
Constituent Profile [sn_gsm_constituent_profile]	Contains detailed profiles of constituents, including personal information, contact details, and engagement history with government services.	Consumer Profile (sn_csm_consumer_profile)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Core tables (continued)

Table	Description	Extends Table
Business Profile [sn_gsm_business_profile]	Contains profiles of businesses interacting with government agencies, documenting registration information, contact details, and service engagements.	N/A
Business Registration Request [sn_gsm_business_registration]	Contains information about new business registration requests.	N/A
Government Service Document [sn_gsm_document]	Contains information about service documents.	Documents (ds_document)
Government Service Evaluation Task [sn_gsm_government_service_evaluation_task]	Contains information about service evaluation tasks.	Government Service Task (sn_gsm_government_service_task)

Flows installed

Public Sector Digital Services Core flows

Flow	Description
Create blocked by record if Case Task is associated with government case [create_blocked_by_record_if_case_task_is_associated_with_government_case]	Creates a blocked by record if the Case Task is associated with a government case.
Create blocked by record if Government case needs customer information [create_blocked_by_record_if_case_needs_customer_information]	Creates a blocked by record if the Government case needs more customer information.
Resolve blocked by record if Case Task is closed and associated with Government Case [resolve_blocked_by_record_if_case_task_is_closed_and_associated_with_government_case]	Removes the blocked by record for the associated Government case if the Government case is resolved.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Core flows (continued)


Flow	Description
Resolve blocked by record if user information is provided for Government case [resolve_blocked_by_record_if_user_information_is_provided_for_govt_case]	Removes the blocked by record if the case task is closed.

Public Sector Digital Services Service Request Playbook Data Model

This section outlines the Service Request Playbook data model and the tables installed with the Service Request application.

The following logical diagram shows the tables and their relationships within the Service Request data model.

Service Request Data Model

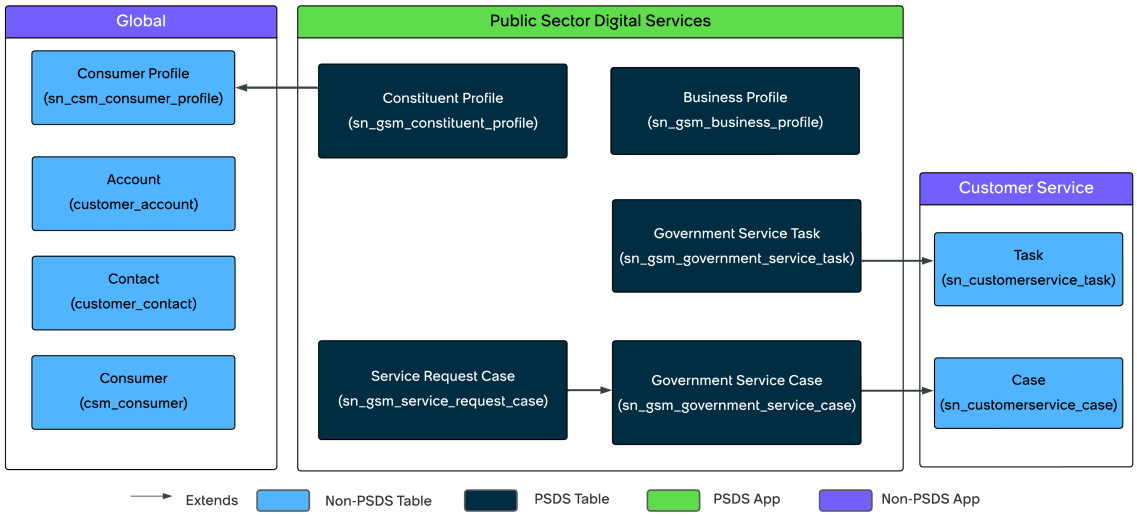

Tables installed with Service Request Playbook

This section describes the tables installed with the Service Request Playbook application and shows how they store and manage information.

Service Request tables installed

Public Sector Digital Services Service Request Playbook tables

Table	Description	Extends Table
Service Request [sn_gsm_service_request_case]	Contains records of individual cases related to government services, tracking requests, interactions, and	Government Service Case [sn_gsm_government_service_case]

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Service Request Playbook tables (continued)

Table	Description	Extends Table
	resolutions for constituents seeking assistance from government agencies.	
Government Service Case [sn_gsm_government_service_case]	Contains records of individual cases related to government services, tracking requests, interactions, and resolutions for constituents seeking assistance from government agencies.	Customer Service Case (sn_customerservice_case)
Government Service Task [sn_gsm_government_service_task]	Contains tasks associated with government service cases, outlining specific actions to be performed, their status, and assigned personnel.	Customer Service Task (sn_customerservice_task)
Constituent Profile [sn_gsm_constituent_profile]	Contains detailed profiles of constituents, including personal information, contact details, and engagement history with	Consumer Profile (sn_csm_consumer_profile)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Service Request Playbook tables (continued)

Table	Description	Extends Table
	government services.	
Business Profile [sn_gsm_business_profile]	Contains profiles of businesses interacting with government agencies, documenting registration information, contact details, and service engagements.	N/A
Business Registration Request [sn_gsm_business_registration]	Contains information about new business registration requests.	N/A
Government Service Document [sn_gsm_document]	Contains information about service documents.	Documents (ds_document)
Government Service Evaluation Task [sn_gsm_government_service_evaluation_task]	Contains information about service evaluation tasks.	Government Service Task (sn_gsm_government_service_task)


Public Sector Digital Services Information Request Playbook Data Model

This section outlines the Information Request data model and the tables installed with the Information Request application.

The following logical diagram shows the tables and their relationships within the Information Request data model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Request Data Model

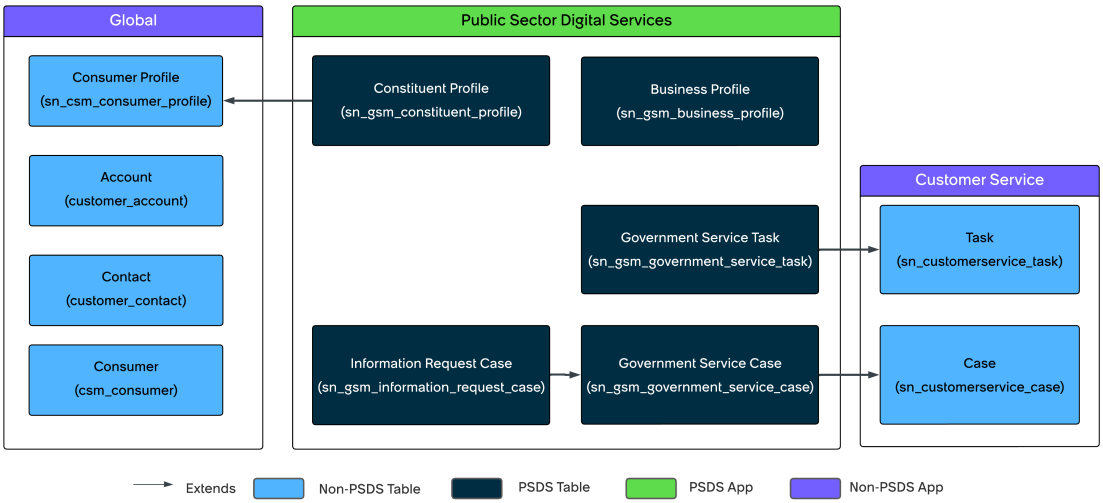

Tables and Flows installed with Information Request Playbook

This section describes the tables installed with the Information Request Playbook application and shows how they store and manage information.

Information Request tables installed

Public Sector Digital Services Information Request tables

Table	Description	Extends Table
Information Request [sn_gsm_information_request_case]	Contains records of individual cases related to government services, tracking requests, interactions, and resolutions for constituents seeking assistance from government agencies.	Government Service Case [sn_gsm_government_service_case]
Government Service Case [sn_gsm_government_service_case]	Contains records of individual cases related to government services, tracking	Customer Service Case (sn_customerservice_case)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Information Request tables (continued)

Table	Description	Extends Table
	requests, interactions, and resolutions for constituents seeking assistance from government agencies.	
Government Service Task [sn_gsm_government_service_task]	Contains tasks associated with government service cases, outlining specific actions to be performed, their status, and assigned personnel.	Customer Service Task (sn_customerservice_task)
Constituent Profile [sn_gsm_constituent_profile]	Contains detailed profiles of constituents, including personal information, contact details, and engagement history with government services.	Consumer Profile (sn_csm_consumer_profile)
Business Profile [sn_gsm_business_profile]	Contains profiles of businesses interacting with government agencies, documenting registration information, contact details, and service engagements.	N/A

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Information Request tables (continued)

Table	Description	Extends Table
Business Registration Request [sn_gsm_business_registration]	Contains information about new business registration requests.	N/A
Government Service Document [sn_gsm_document]	Contains information about service documents.	Documents (ds_document)
Government Service Evaluation Task [sn_gsm_government_service_evaluation_task]	Contains information about service evaluation tasks.	Government Service Task (sn_gsm_government_service_task)


Public Sector Digital Services License and Permit Playbook Data Model

This section outlines the License and Permit data model and the tables installed with the License and Permit application.

The following logical diagram shows the tables and their relationships within the License and Permit data model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

License and Permit Data Model

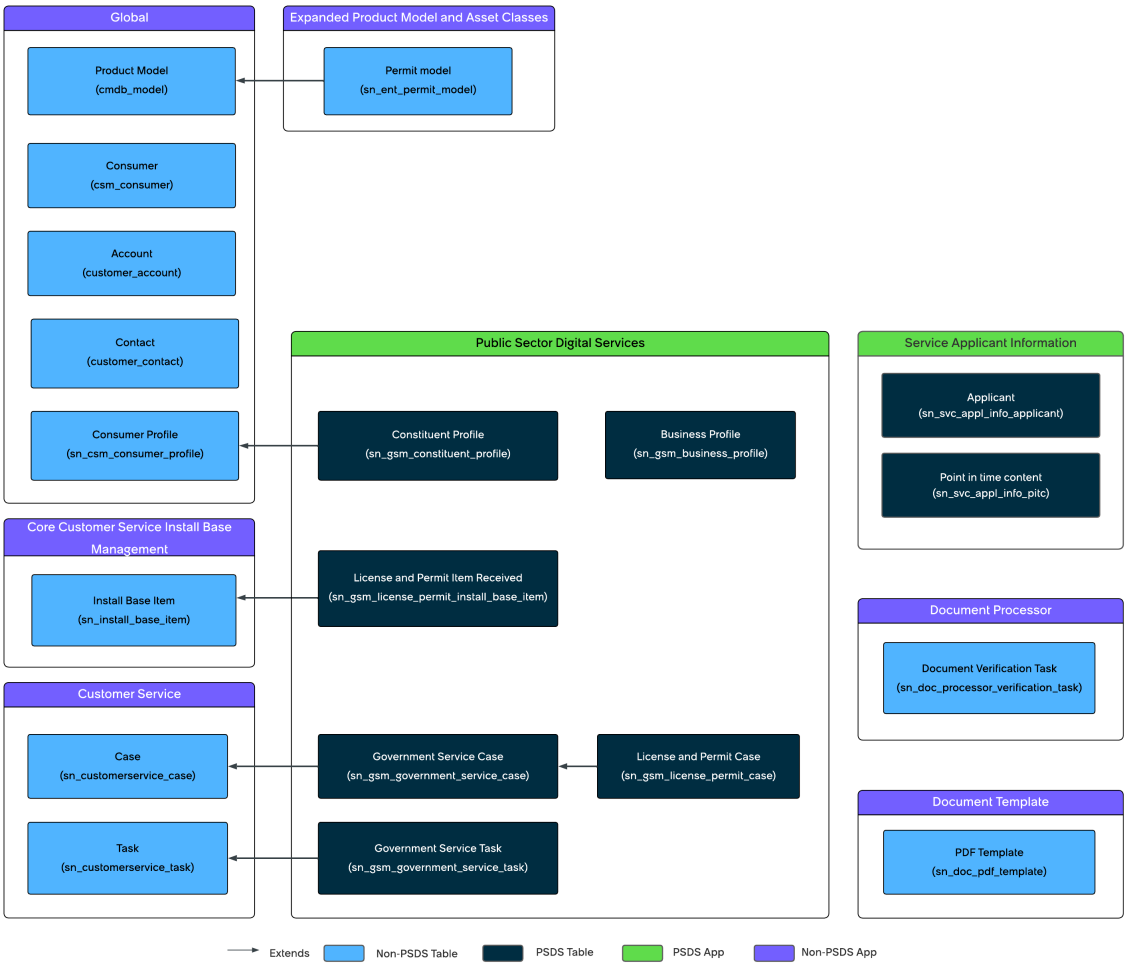

Tables installed with License and Permit Playbook

This section describes the tables installed with the License and Permit Playbook application and shows how they store and manage information.

License and Permit tables installed

Public Sector Digital Services License and Permit tables

Table	Description	Extends Table
License and Permit Case [sn_gsm_license_permit_case]	Contains cases related to applications for licenses and permits, tracking application status, required documentation, and approval steps.	Government Service Case (sn_gsm_government_service_case)
Government Service Case [sn_gsm_government_service_case]	Contains records of	Customer Service Case (sn_customerservice_case)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services License and Permit tables (continued)

Table	Description	Extends Table
	individual cases related to government services, tracking requests, interactions, and resolutions for constituents seeking assistance from government agencies.	
Government Service Task [sn_gsm_government_service_task]	Contains tasks associated with government service cases, outlining specific actions to be performed, their status, and assigned personnel.	Customer Service Task (sn_customerservice_task)
Constituent Profile [sn_gsm_constituent_profile]	Contains detailed profiles of constituents, including personal information, contact details, and engagement history with government services.	Consumer Profile (sn_csm_consumer_profile)
Business Profile [sn_gsm_business_profile]	Contains profiles of businesses interacting with government agencies, documenting registration information, contact details, and service engagements.	N/A

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services License and Permit tables (continued)

Table	Description	Extends Table
Business Registration Request [sn_gsm_business_registration]	Contains information about new business registration requests.	N/A
Government Service Document [sn_gsm_document]	Contains information about service documents.	Documents (ds_document)
Government Service Evaluation Task [sn_gsm_government_service_evaluation_task]	Contains information about service evaluation tasks.	Government Service Task (sn_gsm_government_service_task)
License and Permit Item Received [sn_gsm_license_permit_install_base_item]	Contains the details of license and permit items that have been issued or received, including item identifiers, issuance dates, and recipient information.	Install Base Item (sn_install_base_item)


Public Sector Digital Services Social Benefits Data Model

This section outlines the Social Benefits data model and the tables installed with the Social Benefits application.

The following logical diagram shows the tables and their relationships within the Social Benefits data model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Social Benefits Data Model

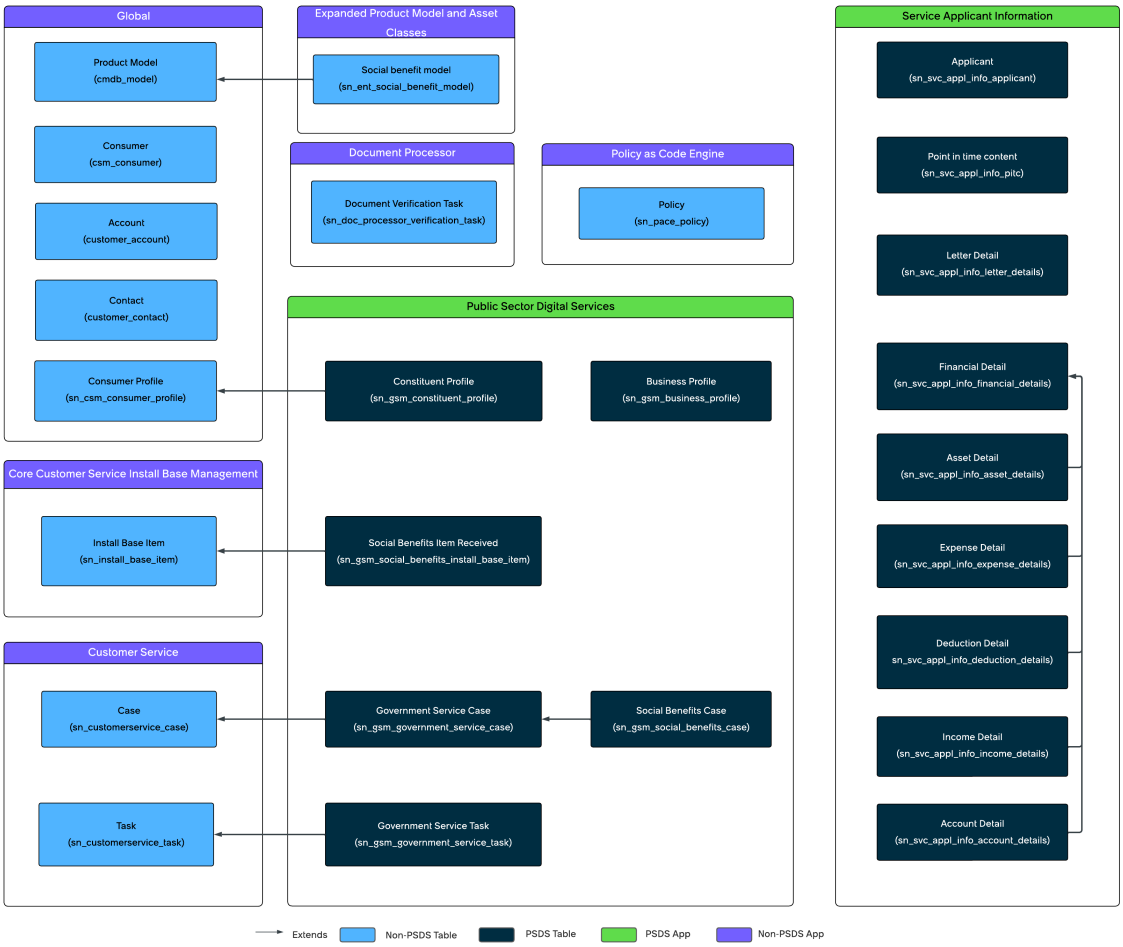

Tables installed with Social Benefits Playbook

This section describes the tables installed with the Social Benefits Playbook application and shows how they store and manage information.

Social Benefits tables installed

Public Sector Digital Services Social Benefits tables

Table	Description	Extends Table
Social Benefits Case [sn_gsm_social_benefits_case]	Contains cases involving social benefit applications or claims, capturing information about eligibility, application process, and benefit disbursement.	Government Service Case (sn_gsm_government_service_case)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Social Benefits tables (continued)

Table	Description	Extends Table
Government Service Case [sn_gsm_government_service_case]	Contains records of individual cases related to government services, tracking requests, interactions, and resolutions for constituents seeking assistance from government agencies.	Customer Service Case (sn_customerservice_case)
Government Service Task [sn_gsm_government_service_task]	Contains tasks associated with government service cases, outlining specific actions to be performed, their status, and assigned personnel.	Customer Service Task (sn_customerservice_task)
Constituent Profile [sn_gsm_constituent_profile]	Contains detailed profiles of constituents, including personal information, contact details, and engagement history with government services.	Consumer Profile (sn_csm_consumer_profile)
Business Profile [sn_gsm_business_profile]	Contains profiles of businesses interacting with government agencies,	N/A

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Social Benefits tables (continued)

Table	Description	Extends Table
	documenting registration information, contact details, and service engagements.	
Business Registration Request [sn_gsm_business_registration]	Contains information about new business registration requests.	N/A
Government Service Document [sn_gsm_document]	Contains information about service documents.	Documents (ds_document)
Government Service Evaluation Task [sn_gsm_government_service_evaluation_task]	Contains information about service evaluation tasks.	Government Service Task (sn_gsm_government_service_task)
Social Benefits Item Received [sn_gsm_social_benefits_install_base_item]	Tracks individual social benefit items received by constituents, noting benefit type, amount, and date of issuance.	Install Base Item (sn_install_base_item)


Public Sector Digital Services Grants Management Data Model

This section outlines the Grants Management data model and the tables installed with the Grants Management application.

The following logical diagram shows the tables and their relationships within the Grants Management data model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management Data Model

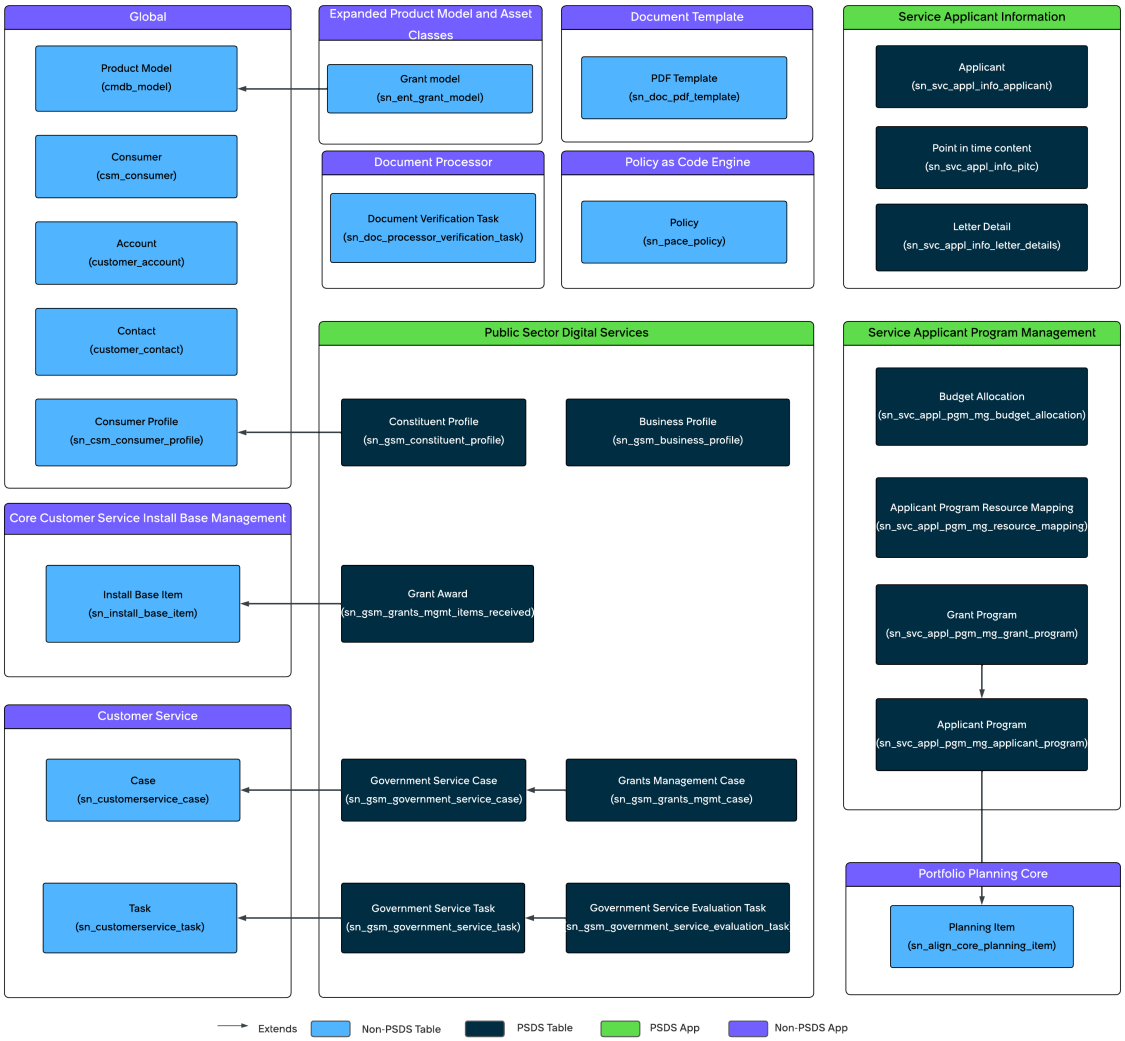

Tables installed with Grants Management

This section describes the tables installed with the Grants Management application and shows how they store and manage information.

Grants Management tables installed

Public Sector Digital Services Grants Management tables

Table	Description	Extends Table
Grants Management Case [sn_gsm_grants_mgmt_case]	Contains cases associated with grant management, including application details, review status, and decision outcomes.	Government Service Case (sn_gsm_government_service_case)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Grants Management tables (continued)

Table	Description	Extends Table
Government Service Case [sn_gsm_government_service_case]	Contains records of individual cases related to government services, tracking requests, interactions, and resolutions for constituents seeking assistance from government agencies.	Customer Service Case (sn_customerservice_case)
Government Service Task [sn_gsm_government_service_task]	Contains tasks associated with government service cases, outlining specific actions to be performed, their status, and assigned personnel.	Customer Service Task (sn_customerservice_task)
Constituent Profile [sn_gsm_constituent_profile]	Contains detailed profiles of constituents, including personal information, contact details, and engagement history with government services.	Consumer Profile (sn_csm_consumer_profile)
Business Profile [sn_gsm_business_profile]	Contains profiles of businesses interacting with government	N/A

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Grants Management tables (continued)

Table	Description	Extends Table
	agencies, documenting registration information, contact details, and service engagements.	
Business Registration Request [sn_gsm_business_registration]	Contains information about new business registration requests.	N/A
Government Service Document [sn_gsm_document]	Contains information about service documents.	Documents (ds_document)
Government Service Evaluation Task [sn_gsm_government_service_evaluation_task]	Contains information about service evaluation tasks.	Government Service Task (sn_gsm_government_service_task)
Grant Award [sn_gsm_grants_mgmt_items _received]	Tracks individual social benefit items received by constituents, noting benefit type, amount, and date of issuance.	Install Base Item (sn_install_base_item)


Service Applicant Data Model

This section outlines the Service Applicant data model and the Service Applicant Information and Service Applicant Program Management tables that are installed.

The following logical diagram shows the tables and their relationships that build the Service Applicant Information and Service Applicant Program Management data model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Digital Services Service Applicant Data Model

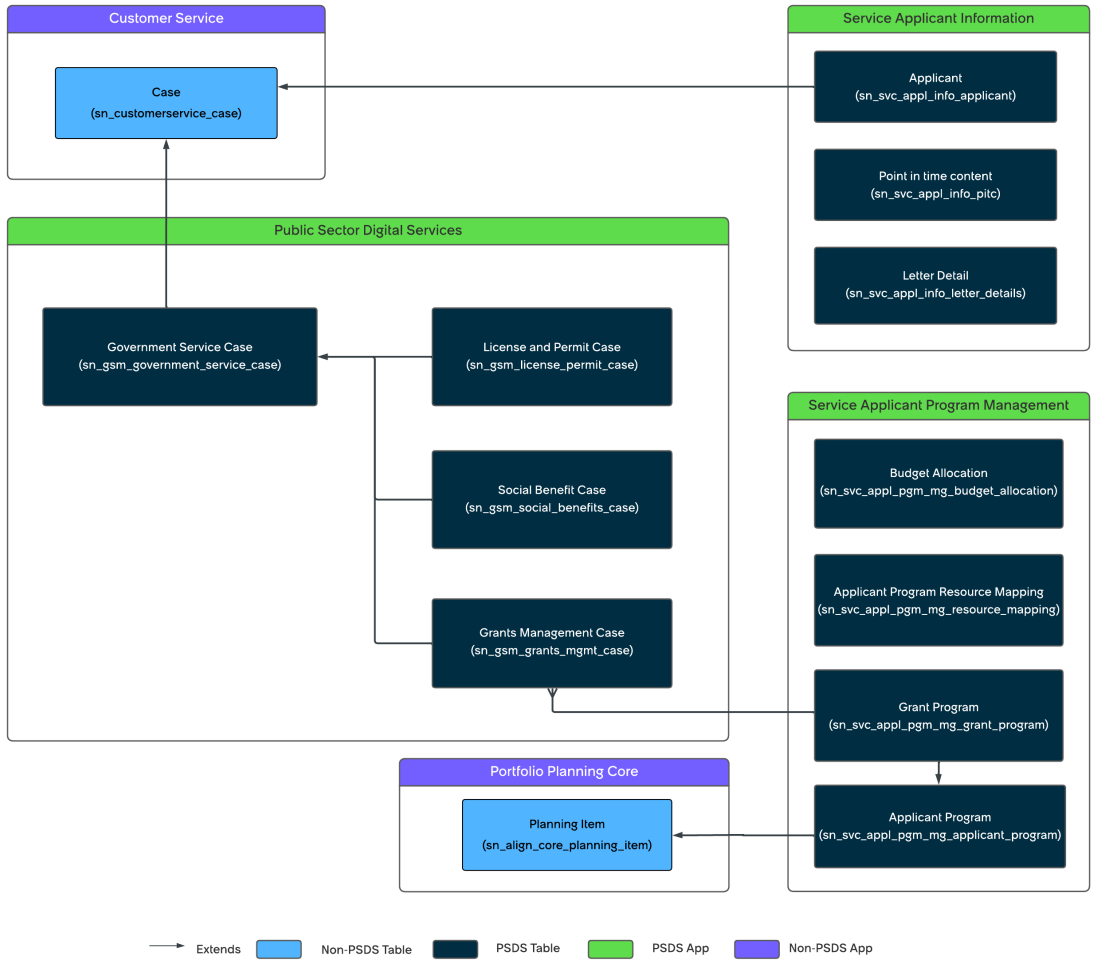

Tables installed with Service Applicant Information Plugin

This section describes the tables installed with the Service Applicant Information plugin and shows how they store and manage information. The Service Applicant Information plugin tables focus on capturing detailed applicant data for eligibility assessments, and enable the addition of any supplementary applicants (either constituents or business contacts) to a case or application.

Service Applicant Information Plugin tables installed

Table	Description	Extends Table
Applicant (sn_svc_appl_info_applicant)	Contains applicant profile information and relationships to cases or applications.	N/A
Point in time content (sn_svc_appl_info_pitc)	Contains applicant information captured at specific moments, preserving historical records for audits, appeals, and compliance requirements.	N/A
Letter Detail (sn_svc_appl_info_letter_details)	Contains details about correspondence and official	N/A

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Applicant Information Plugin tables installed (continued)

Table	Description	Extends Table
	communications related to applicants.	

Tables installed with Service Applicant Program Management Plugin

This section describes the tables installed with the Service Applicant Program Management plugin and shows how they store and manage information.

Service Applicant Program Management Tables


Table	Description	Extends Table
Budget Allocation (sn_svc_appl_pgm_mg_budget_allocation)	Contains budget assignments and fund tracking for programs, including allocation amounts, spending categories, and allocation percentage.	N/A
Applicant Program Resource Mapping (sn_svc_appl_pgm_mg_resource_mapping)	Contains mappings between resources and any records. The resource can be a link, a document, or a knowledge article.	N/A
Grant Program (sn_svc_appl_pgm_mg_grant_program)	Contains grant-specific program details, including award amounts, award type, and total program budget.	Applicant Program (sn_svc_appl_pgm_mg_applicant_program)
Applicant Program (sn_svc_appl_pgm_mg_applicant_program)	Contains program definitions for applicant-facing initiatives, including descriptions, objectives, eligibility criteria, and application configurations.	Planning Item (sn_align_core_planning_item)

Public Sector Digital Services Core Role Relationships

The following diagram shows the core role relationships within the Public Sector Digital Services application. Use this diagram to understand how each role is related to the other roles within the application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core role relationships

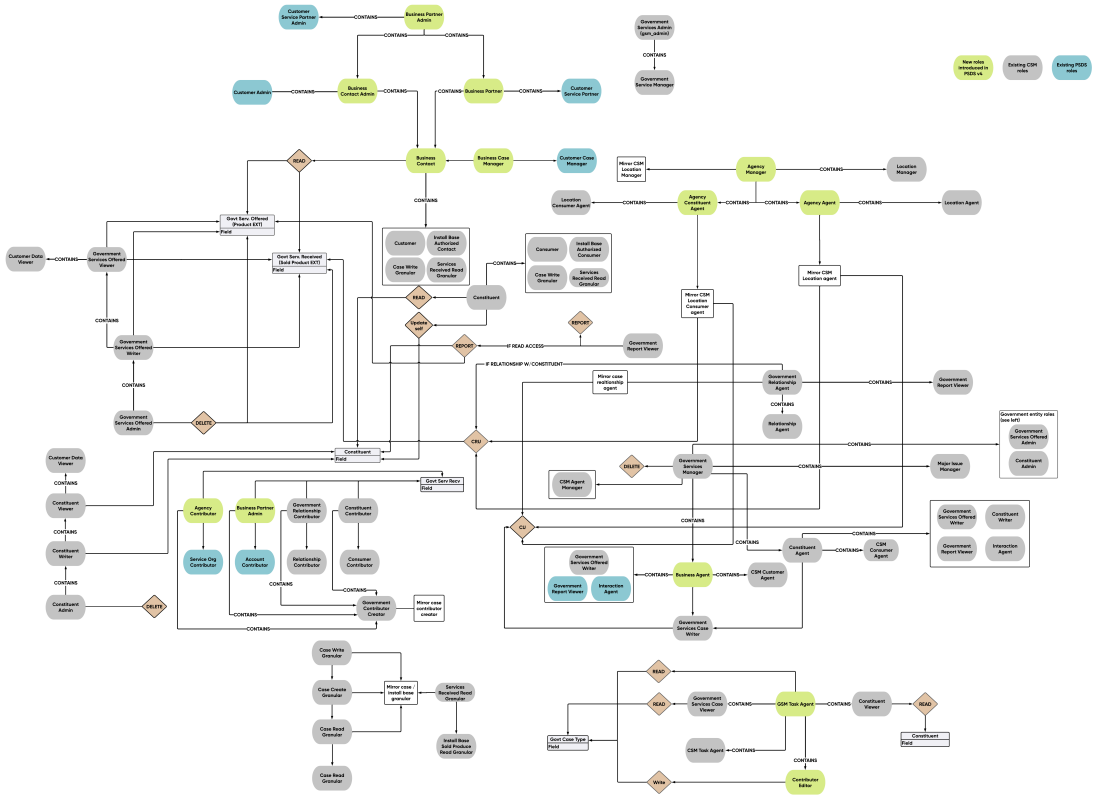

Components and Roles installed with Public Sector Digital Services Core

Several types of components such as tables, user roles, and flows are installed when you activate the Public Sector Digital Services Core plugin.

The following plugins are activated when you enable the Public Sector Digital Services Core plugin (sn_gsm):

- UI Components for Customer Portals (com.sn_ciwf_ui_cmpnt)
- Agency Support Model (com.sn_agency_support_model)
- Customer Service Case Types (com.snc.csm_case_types)
- Customer Service Portal (com.glide.service-portal.customer-portal)
- Customer Service Install Base Management (com.snc.install_base)

Note:
The Application Files table lists the components that are installed with this application. For instructions on how to access this table, see Find components installed with an application.

Demo data is available for this feature.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
For information about the roles installed when you activate the Public Sector Digital Services Core plugin, as well as other Public Sector Digital Services applications, see Roles installed with Public Sector Digital Services.

Roles installed with Public Sector Digital Services


The Public Sector Digital Services application uses roles to provide access to information, identify internal and external users, maintain data security, and establish different types of relationships between users.

Persona-based Roles in Public Sector Digital Services

Roles and personas help you to understand the different roles involved in Public Sector Digital Services.

Public Sector Digital Services supports users with the following basic job functions (personas). Personas are defined as the individual roles that perform different tasks in Public Sector Digital Services.

The following graphic shows the most common personas used throughout Public Sector Digital Services.

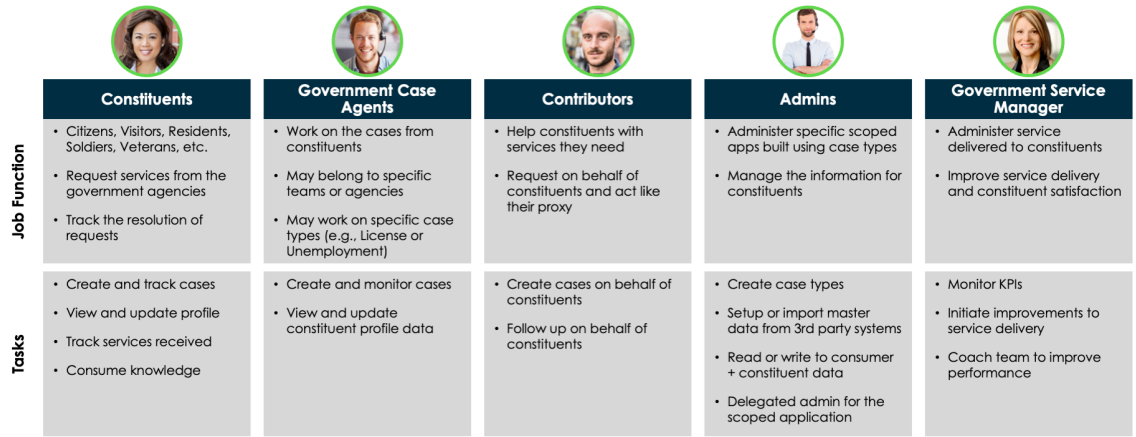

Public Sector Personas

Job function	Description
Constituents	End user, such as citizens, visitors, residents, soldiers, veterans, etc. Constituents can: • Request services from government agencies. • Track resolution of requests.
Government case agents	Staff member of an agency, such as a constituent agent, business agent, agency agent, that delivers services to constituents or other agencies, and can requests services from other agencies. Agents can:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Personas (continued)

Job function	Description
	• Works on government service cases for all constituents. Can read, write, and update all government service cases and profile records. • Can belong to specific teams or agencies. • Can work on specific case types (for example Licenses or Unemployment).
Contributors	Business stakeholder or requester for constituents: • Help constituents or businesses with services that they need. • Submits requests on behalf of constituents and acts as proxy.
Admins	System administrator, who has access to all system features, functions, and data, regardless of security restraints. Admins can: • Administers specific scoped apps built using different case types. • Manages the information for constituents.
Business stakeholder	End user, such as business owner, business channel, or business partner. Business stakeholders can: • Request services from government agencies. • Track resolution of requests.
Business contact	An end user that is employed by a business. Business contacts can: • Request services from the government agencies • Register and create a login • Create and monitor cases • Track the resolution of requests and all services received
Government service agency manager	Manager or leader of an agency that provides constituent and business services. Manages agents supporting constituent services: • Administers services delivered to constituents, business stakeholders, and agency. • Can read, write, update, and delete all government service cases. • Can read, write, update, and delete all constituent, business, and agency records. • Manages staff of agency and can override agent actions. • Tracks the resolution of requests and improves service delivery and constituent satisfaction.

Core Roles

Note:
These roles are also included with the Service Request Playbook.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Constituent roles

Role title [name]	Description	Contains roles
constituent [sn_gsm.constituent]	Enables constituents to request services and manage their information, government service cases, and services received.	sn_install_base.sold_product_authorized_consumer • sn_gsm.service_received_read_granular • sn_customerservice.consumer • sn_gsm.case_write_granular
constituent_agent [sn_gsm.constituent_agent]	Enables agents to perform the following actions: • Read, write, and update government service cases for all constituents. • Read, write, and update constituent records.	• sn_gsm.report_viewer • sn_gsm.case_writer • sn_gsm.service_offered_writer • sn_customerservice.consumer_agent • sn_gsm.constituent_writer • interaction_agent
constituent_contributor [sn_gsm.constituent_contributor]	Enables users to request services and raise government service cases on behalf of any constituent.	• sn_customerservice.consumer_contributor • sn_gsm.contributor_creator • sn_customerservice.case_authorized_contributor
constituent_admin [sn_gsm.constituent_admin]	Provides agents with admin access and enables them to create, read, update, and delete constituent records.	sn_gsm.constituent_writer
constituent_writer [sn_gsm.constituent_writer]	Provides agents with access to create, read, and update	sn_gsm.constituent_viewer

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Constituent roles (continued)

Role title [name]	Description	Contains roles
	constituent records.	
constituent_viewer [sn_gsm.constituent_viewer]	Provides agents with read-only access to constituent records.	sn_customerservice.customer_data_viewer

Core Business roles

Role title [name]	Description	Contains roles
business_contact [sn_gsm.business_contact]	Enables business stakeholders to request services and manage information, government service cases, and services received.	• sn_customerservice.customer • sn_install_base.sold_product_authorized_consum • sn_gsm.service_received_read_granular • sn_gsm.case_write_granular
business_contact_admin [sn_gsm.business_contact_admin]	Provides a business stakeholder with admin access to a business account. This role has access to all the data within the business account.	• sn_customerservice.customer_admin • sn_gsm.business_contact
business_case_manager [sn_gsm.business_case_manager]	Enables a business stakeholder to manage government service cases for a business account and associated child accounts. This role can perform the	• sn_customerservice.customer_case_manager • sn_gsm.business_contact

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Business roles (continued)

Role title [name]	Description	Contains roles
	following actions: • Create a case on behalf of another business contact. • View a list of cases belonging to the business. • Edit cases belonging to the business.	
business_contributor [sn_gsm.business_contributor]	Enables business stakeholders to request services and raise government service cases on behalf of any business.	• sn_customerservice.relationship_contributor • sn_gsm.contributor_creator • sn_customerservice.case_authorized_contributor
business_partner [sn_gsm.business_partner]	Enables business partners to create, view, and edit government service cases from their own account or from a business account that they are associated with.	• sn_customerservice.partner • sn_gsm.business_contact
business_partner_admin [sn_gsm.business_partner_admin]	Provides a business stakeholder with admin access to a partner account. This	• sn_customerservice.partner_admin • sn_gsm.business_partner • sn_gsm.business_contact • sn_gsm.business_contact_admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Business roles (continued)

Role title [name]	Description	Contains roles
	user can access all the data within the partner account and the government service cases created by the partners.	
business_agent [sn_gsm.business_agent]	Enables agents to perform the following actions: • Read, write, and update government service cases for all business accounts. • Read, write, and update business records.	• sn_gsm.report_viewer • sn_gsm.case_writer • sn_gsm.service_offered_writer • sn_customerservice.consumer_agent • sn_gsm.business_writer • interaction_agent
Social Benefits Business Contributor [sn_gsm_soc_bnfts.business_contributor]	Enables users to request service and raise Social Benefits cases on behalf of any business. This allows business stakeholders to act as a requester on behalf of customers.	• sn_gsm.business_contributor • sn_gsm_soc_bnfts.contributor_creator

Core Agency agent roles

Role title [name]	Description	Contains roles
agency_agent [sn_gsm.agency_agent]	Enables agency agents to create and fulfill government service cases for the	sn_customerservice.svc_location_ag

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Agency agent roles (continued)

Role title [name]	Description	Contains roles
	businesses and business contacts associated with the agency.	
agency_constituent_agent [sn_gsm.agency_constituent_agent]	Enables agency agents to create and fulfill government service cases for constituents and households associated with the agency.	sn_customerservice.svc_location_cor
external_reviewer [sn_gsm_grnt_mgmt.external_reviewer]	Enables users to review and score grant proposals.	• sn_svc_appl_pgm_mg.resource_rol • sn_svc_appl_pgm_mg.milestone_vi • sn_svc_appl_pgm_mg.resource_ma • sn_svc_appl_pgm_mg.scoring_fram • sn_svc_appl_pgm_mg.business_ca • sn_svc_appl_pgm_mg.resource_as • sn_svc_appl_pgm_mg.scoring_fram • sn_svc_appl_pgm_mg.planning_ite
agency_contributor [sn_gsm.agency_contributor]	Enables agency agents to request services and raise government service cases on behalf of the agency.	• sn_customerservice.service_organi • sn_gsm.contributor_creator • sn_customerservice.case_authorize
agency_manager [sn_gsm.agency_manager]	Enables an agency manager to perform the following actions: • Create and update government service cases for constituents, households, business, and business contacts. • Manage data for constituents and households associated with the agencies within the agency hierarchy. • Manage data for businesses and business contacts associated with the agencies within the agency hierarchy.	• sn_customerservice.svc_location_r • sn_gsm.agency_agent • sn_gsm.agency_constituent_agent
agency_manager_contributor [sn_gsm.agency_manager_contributor]	Enables users to create, update, view, and approve cases. Allows them to register	• "sn_gsm.business_contributor • sn_gsm.government_agency_contr • sn_gsm.constituent_contributor

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Agency agent roles (continued)

Role title [name]	Description	Contains roles
	and remove staff across all agencies they manage.	• sn_gsm.government_agency_contr • sn_gsm.agency_manager_core • sn_customerservice.svc_location_r
relationship_manager [sn_gsm.agency_relationship_manager]	Enables users to view cases across all the external agencies where they have location_relationship_manager responsibility.	• sn_bus_loc.location_relationship_r • sn_gsm.agency_manager_contribu
service_manager [sn_gsm.service_manager]	Enables a service manager to perform the following actions: • Manage all work performed by agents working on government service cases. • Read, write, update, and delete all government service cases. • Read, write, update, and delete all constituent, business, and agency records.	• sn_gsm.service_offered_admin • sn_gsm.service_offered_writer • sn_gsm.constituent_agent • sn_gsm.constituent_admin • sn_gsm.business_agent

Core Admin and other roles

Role title [name]	Description	Contains roles
admin [sn_gsm.admin]	Provides a user with delegated admin access to scoped applications created on the Public Sector Digital Services platform.	sn_gsm.service_manager
service_offered_admin [sn_gsm.service_offered_admin]	Provides users with admin access and enables them to create, read, update,	sn_gsm.service_offered_writer

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Admin and other roles (continued)

Role title [name]	Description	Contains roles
	and delete services-offered records and services-received records.	
grant_program_manager sn_gsm_grnt_mgmt.program_manager	Provides users with the program manager role to create grant program records.	• model_manager • sn_gsm.resource_role_writer • sn_gsm.informational_resource_mapping_wrirter • sn_gsm.business_calendar_entry_viewer • sn_gsm.business_agent • sn_gsm.scoring_framework_writer • sn_doc.reader • sn_gsm.resource_assignment_writer • sn_pace.mapping_admin • sn_gsm.milestone_writer • sn_gsm.goal_viewer • sn_gsm.scoring_framework_attribute_writer • sn_gsm.scoring_framework_attribute_writer • sn_gsm.constituent_agent • sn_gsm.planning_item_writer
grant_admin sn_gsm_grnt_mgmt.grant_admin	Provides users with admin access and enables them to create, read, update, and edit grant proposals in the grant setup and proposals playbooks.	• sn_gsm.admin • sn_svc_appl_pgm_mg.grant_program_director
grant_program_director sn_gsm_grnt_mgmt.grant_director	Provides users with the grant program director role, which consists of	• sn_gsm_grnt_mgmt.program_manager • sn_gsm.government_service_manager

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Admin and other roles (continued)

Role title [name]	Description	Contains roles
	the grant program manager and the government service manager roles.	
grant_case_writer sn_gsm_grnt_mgmt.case_writer	Provides users with access to create, read, and update grant management case records.	• sn_gsm_grnt_mgmt.case_viewer • sn_gsm.case_writer • contract_manager
grant_case_viewer sn_gsm_grnt_mgmt.case_viewer	Provides users with read-only access to grant management case records.	• sn_gsm.case_viewer • decision_table_reader • sn_gsm_grnt_mgmt.case_writer
license_permit_admin [sn_gsm_lic_prmt.admin]	Enables users to manage all work performed by agents working on License & Permit cases (constituent and business). Users with this role have the ability to read/write/update/delete all License & Permit cases and constituent/business records.	• sn_gsm_lic_prmt.manager • sn_gsm.admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Admin and other roles (continued)

Role title [name]	Description	Contains roles
social_benefits_admin [sn_gsm_soc_bnfts.admin]	Provides delegated admin access to scoped applications created on the Social Benefits Playbook.	• sn_gsm.admin • sn_gsm_soc_bnfts.manager
service_offered_admin [sn_gsm.service_offered_admin]		
service_offered_writer [sn_gsm.service_offered_writer]	Provides users with access to create, read, and update services-offered records and services-received records.	sn_gsm.service_offered_viewer
service_offered_viewer [sn_gsm.service_offered_viewer]	Provides users with read-only access to services offered records and services-received records.	sn_customerservice.customer_data_viewer
case_writer [sn_gsm.case_writer]	Provides agents with access to create, read, and update government service cases.	sn_gsm.case_viewer
case_viewer [sn_gsm.case_viewer]	Provides agents with read-only access to government service cases.	None

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Core Admin and other roles (continued)

Role title [name]	Description	Contains roles
contributor_creator [sn_gsm.contributor_creator]	Enables agents or business stakeholders to create government service cases and is included in the top-level contributor roles. This role can create cases but cannot view other cases.	None
relationship_agent [sn_gsm.relationship_agent]	Enables agents to work on government service cases for customers that they have relationship with.	• sn_gsm.report_viewer • sn_customerservice.relationship_agent
relationship_contributor [sn_gsm.relationship_contributor]	Enables business stakeholders to raise government service cases on behalf of customers that they have relationship with.	• sn_customerservice.relationship_contributor • sn_gsm.contributor_creator • sn_customerservice.case_authorized_contributor

Granular roles

You can use predefined functional and granular roles installed with Public Sector Digital Services to establish relationships between users and public sector entities. These functional and granular roles provide different levels of access to public sector data, to help maintain data security.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Functional roles: A set of roles required to perform a function or meaningful action that requires access on multiple entities.
- Granular roles: Roles that provide access to cases, services used, and related public sector entities. One or more granular roles can be bundled together as a functional role.

A granular model helps protect data by granting the appropriate level of access to the corresponding public sector entities. With this functionality, each role is associated with a set of privileges or responsibilities that determine users' access to certain information. You can have fine-grained access control by setting granular policies that authorize individuals to access the information needed to work efficiently and effectively, ultimately helping improve the constituent experience.

For example, if you extend the Government Service Case table or other tables in the Public Sector Digital Services app, you must replicate the access control lists for the extended tables. You can assign granular roles to public sector users to control access to those extended tables.

Granular roles

Role title [name]	Description	Contains roles
case_create_granular [sn_gsm.case_create_granular]	Provides constituents or business stakeholders with granular create access to government service cases.	sn_gsm.case_read_granular
case_read_granular [sn_gsm.case_read_granular]	Provides constituents or business stakeholders with granular read access to government service cases.	sn_customerservice.case_read_granular
case_write_granular [sn_gsm.case_write_granular]	Provides constituents or business stakeholders with granular write access to government service cases.	• sn_gsm.case_create_granular • sn_gsm.case_read_granular
service_received_read_granular [sn_gsm.service_received_read_granular]	Provides constituents or business stakeholders	sn_install_base.sold_product_read_granular

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Granular roles (continued)

Role title [name]	Description	Contains roles
	with granular read access to services-received records.	
License & Permits Install base read granular [sn_gsm_lic_prmt.ib_read_granular]	Provides granular read access to issued License and Permits.	• sn_install_base.install_base_read_granular • sn_gsm.business_contact • sn_gsm.constituent

Business Stakeholder Roles

Business Stakeholder for Public Sector Digital Services includes plugins and roles that provide access to business stakeholder features.

Admins with access to Business Stakeholder can provide Business Stakeholder users with the rights to the following actions:

- Create cases on behalf of a business or an agency (service organization)
- View cases, case tasks, and business data.
- Approve requests.

Create cases on behalf of customers

Role	Description	Contains roles	Plugin	User type
Constituent contributor [sn_gsm.constituent_contributor]	Enables users to request services and raise government service cases on behalf of any constituent.	• sn_customerservice.consumer_contributor • sn_gsm.contributor_creator	com.sn_public_sector.digital_services_core	to digital external
Business contributor [sn_gsm.business_contributor]	Enables business stakeholders to request services and raise government service cases on behalf of any business.	• sn_customerservice.relationship_contributor • sn_gsm.contributor_creator	com.sn_public_sector.digital_services_core	to digital external
Relationship contributor [sn_gsm.relationship_contributor]	Enables business stakeholders to raise government service cases on behalf of customers with	• sn_customerservice.relationship_contributor • sn_gsm.contributor_creator	com.sn_public_sector.digital_services_core	to digital external

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create cases on behalf of customers (continued)

Role	Description	Contains roles	Plugin	User type
	which they have a relationship.			

Create cases on behalf of agencies

Role	Description	Contains roles	Plugin	User type
Agency contributor [sn_gsm.agency_contributor]	Enables agency agents to request services and raise government service cases on behalf of the agency.	• sn_customerservice.service_organization_contributor • sn_gsm.contributor_creator	Agency Support Model (com.sn_agency_support_model)	Internal and external

View cases, case tasks, and customer data

Role	Description	Contains roles	Plugin	User type
Case viewer [sn_gsm.case_viewer]	Provides agents with read-only access to government service cases.	None	com.sn_public_sector_digital_services_core	Internal
Constituent viewer [sn_gsm.constituent_viewer]	Provides agents with read-only access to constituent records.	sn_customerservice.customer_data_viewer	com.sn_public_sector_digital_services_core	Internal
Business viewer [sn_gsm.business_viewer]			com.sn_public_sector_digital_services_core	Internal
Services offered viewer [sn_gsm.service_offered_viewer]	Provides users with read-only access to services offered records and services received records.	sn_customerservice.customer_data_viewer	com.sn_public_sector_digital_services_core	Internal
Government services received viewer [sn_gsm.service_received_viewer]	Provides users with read-only access to services received records.		com.sn_public_sector_digital_services_core	Internal

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

View reports and dashboards

Role	Description	Contains roles
report_viewer [sn_gsm.report_viewer]	Enables users to view reports on the Public Sector Digital Services platform.	None
grant_management_report_viewer sn_gsm_grnt_mgmt.report_viewer	Enables users to view reports about the grants management playbooks.	sn_gsm.report_viewer
License & Permit Report Viewer [sn_gsm_lic_prmt.report_viewer]	Enables users to view reports on the Public Sector Digital Services platform.	sn_gsm.report_viewer
social_benefit_report_viewer [sn_gsm_soc_bnfts.report_viewer]	Provides users access to view reports Social Benefits playbook.	sn_gsm.report_viewer
(sn_svc_appl_info.report_viewer)	Provides users the access to view reports on the Service Applicant Information platform.	

Note:
Customers who have purchased a Public Sector Digital Services subscription can provide Business Stakeholder users with rights to actions listed under Business Stakeholder for Customer Service Management.

Roles by Application

Grants Management roles

Role title [name]	Description	Contains roles
grant_admin sn_gsm_grnt_mgmt.grant_admin	Provides users with admin access and enables them to create, read, update, and edit grant proposals in the grant setup and proposals playbooks.	• sn_gsm.admin • sn_svc_appl_pgm_mg.grant_program_
grant_program_director sn_gsm_grnt_mgmt.grant_director	Provides users with the grant program director role, which consists of the grant program manager and the government service manager roles.	• sn_gsm_grnt_mgmt.program_manage • sn_gsm.government_service_manage

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management roles (continued)

Role title [name]	Description	Contains roles
external_reviewer [sn_gsm_grnt_mgmt.external_reviewer]	Enables merit review users to review and score grant proposals from within the Reviewer Service Portal.	• sn_svc_appl_pgm_mg.resource_role_v • sn_svc_appl_pgm_mg.milestone_view • sn_svc_appl_pgm_mg.resource_mapp • sn_svc_appl_pgm_mg.scoring_framew • sn_svc_appl_pgm_mg.business_calen • sn_svc_appl_pgm_mg.resource_assig • sn_svc_appl_pgm_mg.scoring_framew • sn_svc_appl_pgm_mg.planning_item_
grant_case_writer sn_gsm_grnt_mgmt.case_writer	Provides users with access to create, read, and update grant management case records.	• sn_gsm_grnt_mgmt.case_viewer • sn_gsm.case_writer • contract_manager
grant_case_viewer sn_gsm_grnt_mgmt.case_viewer	Provides users with read-only access to grant management case records.	• sn_gsm.case_viewer • decision_table_reader • sn_gsm_grnt_mgmt.case_writer
grant_management_report_viewer sn_gsm_grnt_mgmt.report_viewer	Enables users to view reports about the grants management playbooks.	None
Grant Program Admin (sn_svc_appl_pgm_mg.grant_program_admin)	Provides access to all Grant Programs.	sn_svc_appl_pgm_mg.grant_program_w

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management roles (continued)

Role title [name]	Description	Contains roles
	Note: This role is part of the Service Applicant Program Management application, but is used within Grants Management, which has a dependency on the Service Applicant Program Management application.	
Grant Program Director (sn_svc_appl_pgm_mg.grant_program_director)	Provides access to all Grant Programs. **Note:** This role is part of the Service Applicant Program Management application, but is used within Grants Management, which has a dependency on the Service Applicant Program Management application.	• sn_gsm.government_service_manage • sn_svc_appl_pgm_mg.grant_program_
Grant Program Writer (sn_svc_appl_pgm_mg.grant_program_manager)	Creates or updates Grant Programs if they are a part of.	• sn_gsm.business_agent • sn_svc_appl_pgm_mg.grant_program_ • sn_smart_asmt.assessment_admin • sn_svc_appl_pgm_mg.planning_item_

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grants Management roles (continued)

Role title [name]	Description	Contains roles
	Note: This role is part of the Service Applicant Program Management application, but is used within Grants Management, which has a dependency on the Service Applicant Program Management application.	• sn_svc_appl_pgm_mg.resource_mapp • sn_svc_appl_pgm_mg.scoring_framew • sn_svc_appl_pgm_mg.resource_assig • sn_svc_appl_pgm_mg.milestone_write • sn_svc_appl_pgm_mg.resource_role_v • sn_gsm.goal_viewer • sn_svc_appl_pgm_mg.business_calen • sn_svc_appl_pgm_mg.pace_reader • sn_pace.mapping_admin • sn_svc_appl_pgm_mg.scoring_framew
Grant Program Viewer (sn_svc_appl_pgm_mg.grant_program_writer)	Provides write access to Grant Program records. **Note:** This role is part of the Service Applicant Program Management application, but is used within Grants Management, which has a dependency on the Service Applicant Program Management application.	• sn_svc_appl_pgm_mg.grant_program_ • sn_svc_appl_pgm_mg.planning_item_

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

License and Permit Playbook roles

Role title [name]	Description	Contains roles
License & Permits Install base writer [sn_gsm_lic_prmt.ib_writer]	Provides create, read, and write access to Install base items.	sn_gsm_lic_prmt.ib_writer
License & Permit Constituent Agent [sn_gsm_lic_prmt.constituent_agent]	Enables users to work on License & Permit cases for all constituents. It includes the ability to read/write/update all License & Permit cases and constituent records	• sn_gsm.constituent_agen • sn_gsm_lic_prmt.case_wr • sn_gsm_lic_prmt.report_v • sn_gsm_lic_prmt.ib_viewe • sn_gsm_lic_prmt.manage
License & Permit Agency Manager [sn_gsm_lic_prmt.agency_manager]	Enables users to manage data for agencies in the manager's agency hierarchy.	• sn_gsm.agency_manager • sn_gsm_lic_prmt.agency_ • sn_gsm_lic_prmt.agency_
License & Permit Agency Constituent Agent [sn_gsm_lic_prmt.agency_constituent_agent]	Enables users to manage data for agencies in the constituent agent's agency hierarchy.	• sn_gsm.agency_constitue • contract_manager • decision_table_reader • sn_gsm_lic_prmt.agency_
License & Permit Agency Manager Contributor [sn_gsm_lic_prmt.agency_manager_contributor]	Enables users to create, update, view, and approve cases. They can also register and remove staff across all agencies they manage.	• sn_gsm_lic_prmt.busines • sn_gsm_lic_prmt.agency_ • sn_gsm_lic_prmt.constitu • sn_gsm_lic_prmt.agency_ • sn_gsm_lic_prmt.agency_ • sn_gsm.agency_manager
License & Permits Agency Manager Core [sn_gsm_lic_prmt.agency_manager_core]	Granular role to manage agency staff registrations and staff relationships with businesses, constituents, and households for all the agencies within the hierarchy.	• sn_gsm.agency_manager • contract_manager
License & Permit Agency Relationship Manager [sn_gsm_lic_prmt.agency_relationship_manager]	Enables users to view cases across all the external agencies where they have	• sn_gsm.agency_relationsl • sn_gsm_lic_prmt.agency_

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

License and Permit Playbook roles (continued)

Role title [name]	Description	Contains roles
	location_relationship_manager responsibility.	
License & Permit Case Task Agent [sn_gsm_lic_prmt.case_task_agent]	Provides users the ability to create and fulfill License & Permit cases for the constituents and households in the agent's agency.	• sn_gsm_lic_prmt.contribu • sn_gsm_lic_prmt.case_vie • sn_gsm.case_task_agent
License & Permit Case Viewer [sn_gsm_lic_prmt.case_viewer]	This role provides users read only access to License & Permit case records.	• sn_gsm.case_viewer • decision_table_reader • sn_gsm_lic_prmt.case_wr • sn_gsm_lic_prmt.case_tas
License & Permit Agency Business Agent [sn_gsm_lic_prmt.agency_agent]	Enables users to create and fulfill License & Permit cases for the accounts and contacts in the agent's agency.	• sn_gsm.agency_agent • contract_manager • decision_table_reader • sn_gsm_lic_prmt.agency_
License & Permit Business Agent [sn_gsm_lic_prmt.business_agent]	Provides users the ability to work on license and permit cases for business. It includes the ability to read, write, or update all license and permit cases and business records.	• sn_gsm_lic_prmt.report_v • sn_gsm_lic_prmt.case_wr • sn_gsm.business_agent • sn_gsm_lic_prmt.ib_viewe • sn_gsm_lic_prmt.manage
License & Permits Install base admin [sn_gsm_lic_prmt.ib_admin]	This role provides create,read,write, and delete access to Install base items.	• sn_gsm_lic_prmt.ib_writer • sn_gsm_lic_prmt.manage
License & Permits Case Writer [sn_gsm_lic_prmt.case_writer]	This role provides users access to create, read and update License & Permits case records.	• sn_gsm_lic_prmt.case_vie • sn_gsm.case_writer • contract_manager

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

License and Permit Playbook roles (continued)

Role title [name]	Description	Contains roles
		• sn_gsm_lic_prmt.business • sn_gsm_lic_prmt.constitu
License & Permits Agency Manager Core [sn_gsm_lic_prmt.agency_manager_core]	Granular role to manage agency staff registrations and staff relationships with businesses, constituents, and households for all the agencies within the hierarchy.	• sn_gsm.agency_manager • contract_manager • sn_gsm_lic_prmt.agency_ • sn_gsm_lic_prmt.agency_
License & Permits Contributor Creator [sn_gsm_lic_prmt.contributor_creator]	Enables users to create license and permit cases and is included in the top-level contributor roles. It only allows record creation but does not allow visibilty to a record on its own.	• sn_gsm.contributor_creato • sn_gsm_lic_prmt.agency_ • sn_gsm_lic_prmt.business • sn_gsm_lic_prmt.constitu • sn_gsm_lic_prmt.relations
License & Permit Constituent contributor [sn_gsm_lic_prmt.constituent_contributor]	This role enables users to request for service and raise License & Permit cases on behalf of any constituent. This allow business stakeholders to act as a requestor on of behalf of customers.	• sn_gsm.constituent_contr • sn_gsm_lic_prmt.contribu • sn_gsm_lic_prmt.agency_
License & Permit Business Contributor [sn_gsm_lic_prmt.business_contributor]	This role enables users to request for service and raise License & Permit cases on behalf of any business. This allow business stakeholders to act as a requester on of behalf of customers.	• sn_gsm.business_contribu • sn_gsm_lic_prmt.contribu • sn_gsm_lic_prmt.agency_
License & Permit Relationship Contributor [sn_gsm_lic_prmt.relationship_contributor]	Enables users to raise License & Permit cases on behalf of customers with whom they have relationships. This allows business stakeholder access to act as a requester on behalf of customers.	• sn_gsm.relationship_cont • n_gsm_lic_prmt.contributo
License & Permit Contributor Editor [sn_gsm_lic_prmt.contributor_editor]	Grants restrictive write access to the fields on the License and Permit Case form.	• sn_gsm.contributor_creato • sn_gsm_lic_prmt.case_tas

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

License and Permit Playbook roles (continued)

Role title [name]	Description	Contains roles
License & Permit Agency Contributor [sn_gsm_lic_prmt.agency_contributor]	Enables users to request service and raise License & Permit cases for their service organization (business location). This role is agnostic to internal and external.	• sn_gsm.agency_contribut • sn_gsm_lic_prmt.contribu • sn_gsm_lic_prmt.agency_

Social Benefits Playbook roles

Role title [name]	Description	Contains roles
Social Benefits Case Viewer [sn_gsm_soc_bnfts.case_viewer]	This role provides users read only access to Social Benefits Case records.	• sn_gsm.case_viewer • decision_table_reader
Social Benefits Case Writer [sn_gsm_soc_bnfts.case_writer]	This role provides users access to create, read and update Social Benefits Case records.	• sn_gsm_soc_bnfts.case_viewer • sn_gsm.case_writer • contract_manager
Social Benefits install base admin [sn_gsm_soc_bnfts.ib_admin]	This role provides create,read,write, and delete access to Install base items.	sn_gsm_soc_bnfts.ib_writer
Social Benefits install base read granular [sn_gsm_soc_bnfts.ib_read_granular]	Provides granular read access to issued Social Benefits.	sn_install_base.install_base_read_granu
Social Benefits install base viewer [sn_gsm_soc_bnfts.ib_viewer]	Provides read access to Install base items.	None
Social Benefits install base writer [sn_gsm_soc_bnfts.ib_writer]	Provides create, read and write access to Install base items.	sn_gsm_soc_bnfts.ib_viewer
Social Benefits Constituent Contributor [sn_gsm_soc_bnfts.constituent_contributor]	This role enables users to request service and raise Social Benefits cases on behalf of any constituent. This allows business	• sn_gsm.constituent_contributor • sn_gsm_soc_bnfts.contributor_creator

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Social Benefits Playbook roles (continued)

Role title [name]	Description	Contains roles
	stakeholders to act as a requestor on behalf of customers.	
Social Benefits Contributor Creator [sn_gsm_soc_bnfts.contributor_creator]	Enables users to create Social Benefits cases and is included in the top-level contributor roles. It only allows record creation but does not allow visibility to a record on its own.	• sn_gsm.constituent_contributor • sn_gsm_soc_bnfts.contributor_creator
Social Benefits Contributor Editor [sn_gsm_soc_bnfts.contributor_editor]	Grants restrictive write access to the fields on the Social Benefits Case form.	sn_gsm.contributor_creator
Social Benefits Relationship Contributor [sn_gsm_soc_bnfts.relationship_contributor]	Enables users to raise Social Benefits cases on behalf of customers with whom they have relationships. This allows business stakeholder access to act as a requester on behalf of customers.	• sn_gsm.relationship_contributor • sn_gsm_soc_bnfts.contributor_creator
social_benefits_agency_agent [sn_gsm_soc_bnfts.agency_agent]	Provides users the ability to create and fulfill cases for the accounts and contacts in the agent's agency.	• sn_gsm.agency_agent • decision_table_reader • contract_manager
social_benefits_agency_constituent_agent [sn_gsm_soc_bnfts.agency_constituent_agent]	Provides users the ability to create and fulfill cases for the constituents and households	• decision_table_reader • sn_gsm.agency_constituent_agent • contract_manager

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Social Benefits Playbook roles (continued)

Role title [name]	Description	Contains roles
	in the agent's agency.	
social_benefits_agency_contributor [sn_gsm_soc_bnfts.agency_contributor]	Enables users to request service and raise Social Benefits cases for their agency(business location). This role is agnostic to internal and external.	• sn_gsm.government_agency_contribu • sn_gsm_soc_bnfts.contributor_creator
social_benefits_agency_manager [sn_gsm_soc_bnfts.agency_manager]	Provides users the ability to manage data for agencies in the manager's agency hierarchy.	• sn_gsm_soc_bnfts.agency_agent • sn_gsm_soc_bnfts.agency_manager_c • sn_gsm.agency_manager • sn_gsm_soc_bnfts.agency_constituen
social_benefits_agency_manager_contributor [sn_gsm_soc_bnfts.agency_manager_contributor]	Manage agencies and create a case for a business, household, or constituent at the agency or any child agency.	• sn_gsm_soc_bnfts.agency_contributo • sn_gsm_soc_bnfts.business_contribu • sn_gsm_soc_bnfts.agency_manager_c • sn_gsm_soc_bnfts.constituent_contrib • sn_gsm.agency_manager_contributor
social_benefits_agency_manager_core [sn_gsm_soc_bnfts.agency_manager_core]	Granular role to manage agency staff registrations and staff relationships with businesses, constituents, and households for all the agencies within the hierarchy.	• sn_gsm.agency_manager_core • contract_manager
social_benefits_agency_relationship_manager [sn_gsm_soc_bnfts.agency_relationship_manager]	Manages and monitors all the activities performed by the agencies. It also acts as an internal point of contact for the agencies.	• sn_gsm_soc_bnfts.agency_manager_c • sn_gsm.agency_relationship_manage

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Social Benefits Playbook roles (continued)

Role title [name]	Description	Contains roles
social_benefits_business_agent [sn_gsm_soc_bnfts.business_agent]	Provides users the ability to work on Social Benefits cases for business. It includes the ability to read/write/update all Social Benefits cases and business records.	• sn_gsm_soc_bnfts.case_writer • sn_gsm_soc_bnfts.report_viewer • sn_gsm.business_agent • sn_gsm_soc_bnfts.ib_viewer
Social Benefits Case Task Agent [sn_gsm_soc_bnfts.case_task_agent]	Enables users to work on Social Benefits case tasks.	• sn_gsm_soc_bnfts.case_viewer • sn_gsm_soc_bnfts.contributor_editor • sn_gsm.case_task_agent
Social Benefits Constituent Agent [sn_gsm_soc_bnfts.constituent_agent]	Provides users the ability to work on Social Benefits cases for all constituents. It includes the ability to read/write/update all cases and constituent records	• sn_gsm_soc_bnfts.case_writer • sn_gsm_soc_bnfts.report_viewer • sn_gsm.constituent_agent • sn_gsm_soc_bnfts.ib_viewer
Social Benefits Manager [sn_gsm_soc_bnfts.manager]	Provides users the ability to manage all work performed by agents working on Social Benefits cases (constituent and business). Users with this role have the ability to read/write/update/delete all Social Benefits cases and constituent/business records.	• sn_gsm_soc_bnfts.ib_admin • sn_gsm_soc_bnfts.business_agent • sn_gsm.government_service_manage • sn_gsm_soc_bnfts.constituent_agent • sn_majorissue_mgt.major_issue_mana
Social Benefits Relationship Agent [sn_gsm_soc_bnfts.relationship_agent]	Enables users to work on Social Benefits	• sn_gsm_soc_bnfts.report_viewer • decision_table_reader

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Social Benefits Playbook roles (continued)

Role title [name]	Description	Contains roles
	cases only for customers with whom they have relationships.	• sn_gsm.relationship_agent • contract_manager

Information Request Playbook roles

Role title [name]	Description	Contains roles
Admin sn_gsm_info_req.admin	Provides delegated admin access to scoped applications created on the Information Request Playbook platform.	• sn_gsm_info_req.manager • sn_gsm.admin
Agency Agent sn_gsm_info_req.agency_agent	Provides users the ability to create and fulfill cases for the accounts and contacts in the agent's agency.	sn_gsm.agency_agent
Agency Constituent Agent sn_gsm_info_req.agency_constituent_agent	Provides users the ability to create and fulfill cases for the constituents and households in the agent's agency.	sn_gsm.agency_constituent_agent
Agency Contributor sn_gsm_info_req.agency_contributor	Enables users to request service and raise Information Request cases for their service	• sn_gsm_info_req.contributor_creator • sn_gsm.government_agency_contributor

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Request Playbook roles (continued)

Role title [name]	Description	Contains roles
	organization (business location).	
Agency Manager sn_gsm_info_req.agency_manager	Provides users the ability to manage data for agencies in the manager's agency hierarchy.	• sn_gsm_info_req.agency_constituent_agent • sn_gsm.agency_manager • sn_gsm_info_req.agency_agent
Business Agent sn_gsm_info_req.business_agent	Provides users the ability to work on Information Request cases for business. It includes the ability to read, write, and update all Information Request cases and business records.	• sn_gsm.business_agent • sn_gsm_info_req.case_writer • sn_gsm_info_req.report_viewer
Business Contributor sn_gsm_info_req.business_contributor	Enables users to request for service and raise Information Request cases on behalf of any business. This allow business stakeholders to act as a requester on of behalf of customers.	• sn_gsm_info_req.contributor_creator • sn_gsm.business_contributor

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Request Playbook roles (continued)

Role title [name]	Description	Contains roles
Case Task Agent sn_gsm_info_req.case_task_agent	Enables users to work on Information Request case tasks.	• sn_gsm_info_req.case_viewer • sn_gsm.case_task_agent • sn_gsm_info_req.contributor_editor
Case Viewer sn_gsm_info_req.case_viewer	Provides users read only access to Information Request Case records.	sn_gsm.case_viewer
Case Writer sn_gsm_info_req.case_writer	Provides users access to create read and update Information Request Case records.	• sn_gsm.case_writer • sn_gsm_info_req.case_viewer
Constituent Agent sn_gsm_info_req.constituent_agent	Provides users the ability to work on Information Request cases for all constituents. It includes the ability to read, write, and update all Information Request cases and constituent records.	• sn_gsm_info_req.case_writer • sn_gsm_info_req.report_viewer • sn_gsm.constituent_agent
Constituent Contributor sn_gsm_info_req.constituent_contributor	Enables users to request for service and raise Information Request cases on behalf of any	• sn_gsm_info_req.contributor_creator • sn_gsm.constituent_contributor

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Request Playbook roles (continued)

Role title [name]	Description	Contains roles
	constituent. This allows business stakeholders to act as a requestor on behalf of customers.	
Contributor Creator sn_gsm_info_req.contributor_creator	Enables users to create Information Request cases and is included in the top-level contributor roles. It only allows record creation but does not allow visibility to a record on its own.	sn_gsm.contributor_creator
Contributor Editor sn_gsm_info_req.contributor_editor	Grants restrictive write access to the fields on the Information Request Case form.	sn_gsm.contributor_editor
Request Manager sn_gsm_info_req.manager	Provides users the ability to manage all work performed by agents working on Information Request cases (constituent and business). Users with this role have the ability to read, write,	• sn_majorissue_mgt.major_issue_manager • sn_gsm_info_req.business_agent • sn_gsm.government_service_manager • sn_gsm_info_req.constituent_agent

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Request Playbook roles (continued)

Role title [name]	Description	Contains roles
	update, and delete all Information Request service cases and constituent or business records.	
Relationship Agent sn_gsm_info_req.relationship_agent	Enables users to work on Information Request cases only for customers with whom they have relationships.	• sn_gsm.relationship_agent • sn_gsm_info_req.report_viewer
Relationship Contributor sn_gsm_info_req.relationship_contributor	Enables users to raise Information Request cases on behalf of customers with whom they have relationships. This allows business stakeholder access to act as a requester on behalf of customers.	• sn_gsm.relationship_contributor • sn_gsm_info_req.contributor_creator
Report Viewer sn_gsm_info_req.report_viewer	Provides users access to view reports containing Information Request data.	sn_gsm.report_viewer

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Applicant Program Management roles

Role title [name]	Description	Contains roles
Program Admin (sn_svc_appl_pgm_mg.admin)	Provides delegated admin access to scoped applications created on the Service Applicant Program Management platform	
Grant Program Admin (sn_svc_appl_pgm_mg.grant_program_admin)	Provides access to all Grant Programs.	sn_svc_appl_pgm_mg.grant_progr
Grant Program Director (sn_svc_appl_pgm_mg.grant_program_director)	Provides access to all Grant Programs.	• sn_gsm.government_service_ma • sn_svc_appl_pgm_mg.grant_pro
Grant Program Writer (sn_svc_appl_pgm_mg.grant_program_manager)	Creates or updates Grant Programs if they are a part of.	• sn_gsm.business_agent • sn_svc_appl_pgm_mg.grant_pro • sn_smart_asmt.assessment_adr • sn_svc_appl_pgm_mg.planning_ • sn_svc_appl_pgm_mg.resource_ • sn_svc_appl_pgm_mg.scoring_f • sn_svc_appl_pgm_mg.resource_ • sn_svc_appl_pgm_mg.milestone • sn_svc_appl_pgm_mg.resource_ • sn_gsm.goal_viewer • sn_svc_appl_pgm_mg.business_ • sn_svc_appl_pgm_mg.pace_rea • sn_pace.mapping_admin • sn_svc_appl_pgm_mg.scoring_f
Grant Program Viewer (sn_svc_appl_pgm_mg.grant_program_writer)	Provides write access to Grant Program records.	• sn_svc_appl_pgm_mg.grant_pro • sn_svc_appl_pgm_mg.planning_
Planning Item Writer (sn_svc_appl_pgm_mg.grant_program_viewer)	Provides read access to Grant	sn_svc_appl_pgm_mg.planning_ite

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Applicant Program Management roles (continued)

Role title [name]	Description	Contains roles
	Program records.	
Planning Item Viewer (sn_svc_appl_pgm_mg.planning_item_writer)	Provides write access to Planning Item records.	sn_svc_appl_pgm_mg.planning_it
Budget Allocation Writer (sn_svc_appl_pgm_mg.planning_item_viewer)	Provides read access to Planning Item records.	
(sn_svc_appl_pgm_mg.budget_allocation_writer)	Provides write access to Budget Allocation records.	sn_svc_appl_pgm_mg.budget_allo
(sn_svc_appl_pgm_mg.budget_allocation_viewer)	Provides read access to Budget Allocation records.	
(sn_svc_appl_pgm_mg.milestone_writer)	Provides write access to Milestone records.	sn_svc_appl_pgm_mg.milestone_v
(sn_svc_appl_pgm_mg.milestone_viewer)	Provides read access to Milestone records.	
Resource Assignment Writer (sn_svc_appl_pgm_mg.resource_assignment_writer)	Provides write access to Resource Assignment records.	sn_svc_appl_pgm_mg.resource_as
Resource Assignment Viewer (sn_svc_appl_pgm_mg.resource_assignment_viewer)	Provides read access to Resource Assignment records.	
Informational Resource Mapping Writer (sn_svc_appl_pgm_mg.resource_mapping_writer)	Provides write access to Informational Resource Mapping records.	sn_svc_appl_pgm_mg.resource_m
Informational Resource Mapping Viewer (sn_svc_appl_pgm_mg.resource_mapping_viewer)	Provides read	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Applicant Program Management roles (continued)

Role title [name]	Description	Contains roles
	access to Informational Resource Mapping records.	
Resource Role Writer (sn_svc_appl_pgm_mg.resource_role_writer)	Provides write access to Resource Role records.	sn_svc_appl_pgm_mg.resource_ro
Resource Role Viewer (sn_svc_appl_pgm_mg.resource_role_viewer)	Provides read access to Resource Role records.	
Scoring Framework Writer (sn_svc_appl_pgm_mg.scoring_framework_writer)	Provides write access to Scoring Framework records.	sn_svc_appl_pgm_mg.scoring_fra
Scoring Framework Viewer (sn_svc_appl_pgm_mg.scoring_framework_viewer)	Provides read access to Scoring Framework records.	
Scoring Framework Attribute Writer (sn_svc_appl_pgm_mg.scoring_framework_attribute_writer)	Provides write access to Scoring Framework Attributes records.	sn_svc_appl_pgm_mg.scoring_fra
Scoring Framework Attribute Viewer (sn_svc_appl_pgm_mg.scoring_framework_attribute_viewer)	Provides read access to Scoring Framework Attributes records.	
Business Calendar Entry Viewer (sn_svc_appl_pgm_mg.business_calendar_entry_viewer)	Provides read access to Business Calendar Entry and Business Calendar Entry Name tables.	
Pace Reader (sn_svc_appl_pgm_mg.pace_reader)	Provides read access to PaCE records.	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Applicant Program Management roles (continued)

Role title [name]	Description	Contains roles
Report Viewer (sn_svc_appl_pgm_mg.report_viewer)	Provides users the access to view reports of Program records.	

Roles by Plugin

Service Applicant Plugin roles

Role title [name]	Description	Contains roles
(sn_svc_appl_info.admin)	Provides delegated admin access to scoped applications created on the Service Application Information.	• sn_svc_appl_info.point_in_time_content • sn_svc_appl_info.applicant_admin • sn_svc_appl_info.financial_details_admi
(sn_svc_appl_info.applicant_admin)	Provides create,read,write and delete access to applicant records.	sn_svc_appl_info.applicant_writer
(sn_svc_appl_info.applicant_viewer)	Provides read access to applicant records.	
(sn_svc_appl_info.applicant_writer)	Provides create,read and write access to applicant records.	sn_svc_appl_info.applicant_viewer
(sn_svc_appl_info.financial_details_admin)	Provides create,read,write and delete access to financial details records.	sn_svc_appl_info.financial_details_writer
(sn_svc_appl_info.financial_details_viewer)	Provides read access to financial details records.	
(sn_svc_appl_info.financial_details_writer)	Provides create,read and	sn_svc_appl_info.financial_details_viewer

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Applicant Plugin roles (continued)

Role title [name]	Description	Contains roles
	write access to financial details records.	
(sn_svc_appl_info.point_in_time_content_admin)	Provides create,read, write and delete access to point-in-time content records.	sn_svc_appl_info.point_in_time_content_w
(sn_svc_appl_info.point_in_time_content_viewer)	Provides read access to point-in-time content records.	
(sn_svc_appl_info.point_in_time_content_writer)	Provides create,read and write access to point-in-time content records.	sn_svc_appl_info.point_in_time_content_v
(sn_svc_appl_info.report_viewer)	Provides users the access to view reports on the Service Applicant Information platform.	

Policy as Code Engine (PaCE) Roles

This is used in conjunction with the **Social Benefits Playbook**.

Role	Description	Persona
sn_pace.execution_reader	A read-only user with view-only access. This user can view policies, categories, and executions.	Policy user, internal auditor.
sn_pace.code_reader	Can review PaCE versions, policy code, and run tests.	Internal auditor
sn_pace.code_editor	This user has all the sn_pace_code_reader permissions plus the ability to create PaCE policy versions.	Policy developer
sn_pace.policy_reader	This user has all the sn_pace_code_reader permissions plus the ability to review policy details and mapping information.	Policy user, internal auditor
sn_pace.policy_editor	This user has all the sn_pace_policy_reader and	Policy developer

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Policy as Code Engine (PaCE) Roles
This is used in conjunction with the **Social Benefits Playbook**.

(continued)

Role	Description	Persona
	sn_pace.code_editor permissions plus the ability to create policies and mappings.	
sn_pace.mapping_admin	This user can map policies and edit config parameters for policy mappings.	Mapping admin
sn_pace.admin	This user has the permissions of all the other roles plus the ability to create categories, policies, mappings, and code.	Policy admin
sn_pace.super_admin	This user has all the sn_pace.admin role permissions across all calling services.	Not applicable
Maint role	Internal user who can create default content.	Not applicable

Properties installed with Public Sector Digital Services

Use the system properties that are added with the activation of the Public Sector Digital Services application to configure access control to application data.

These properties are available for Public Sector Digital Services.

Note:
All of these properties are located in the System Properties [sys_properties] table. To access the table, enter `sys_properties.list` in the navigation filter.

Properties installed with Public Sector Digital Services

Property	Description
glide.enforce_security_scope.sn_gsm_info_req	Controls access to playbook data for the Information Request Playbook feature. If this property is set to false, then ACLs from all scopes are considered when granting access to playbook data in the scope master table. This would expose information request playbook data. • Type: Boolean • Default value: true • Location: System Property [/sys_properties_list.do] table

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Properties installed with Public Sector Digital Services (continued)

Property	Description
glide.enforce_security_scope.sn_gsm	Controls how the application data from the Public Sector Digital Services application is accessed. If this property is set to false, access to the application data within the global tables of the Public Sector Digital Services app may be accessible based on the access control lists (ACLs) of those global tables. If this property is set to true, access to data residing in global tables are only evaluated based off the ACLs shipped directly in the Public Sector Digital Services app. Setting this property to false may lead to information disclosure from over permissive ACLs. • Type: boolean • Default value: true • Location: System Property [/sys_properties_list.do] table
glide.enforce_security_scope.sn_gsm_lic_prmt	Determines if only the access control lists (ACLs) within the License and Permit plugin will be used in determining access to the scope, or if ACLs from all scopes will be considered. If this property is set to true, the License and Permit Playbooks data is secured in scope master tables by considering only ACLs from sn_gsm_lic_prmt scope for granting access. If this property is set to false, the License and Permit Playbooks data is exposed in scope master tables by considering the ACLs from all scopes for granting access. For example, the IT Administrator can access License and Permit Playbooks data when this property is set to false. • Type: boolean • Default value: true • Location: System Property [/sys_properties_list.do] table

Plugins installed with Public Sector Digital Services Applications

These plugins are automatically installed with the following Public Sector Digital Services applications, if they are not already active.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The Application Files table lists the components that are installed with this application. For instructions on how to access this table, see Find components installed with an application.

Plugins installed with Public Sector Digital Services Core

The following plugins are activated when you enable the Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)/(sn_gsm) plugin:

Plugin	Description
UI Components for Customer Portals (com.sn_ciwf_ui_cmpnt)	Provides a library of configurable components that offer better reusability, performance, and upgrade scalability for customer service portals.
Business Location (sn_bus_loc)	Enables support for businesses that interact with customers through physical channels such as stores, branches, franchises, and dealerships. Business locations can also support other service organizations.
Agency Support Model (com.sn_agency_support_model)	Provides support for agency services to connect constituents, businesses, and agencies on a single public sector vertical platform. Supports a 360-degree view of agency activity in agent workspaces.
Customer Service Case Types (com.snc.csm_case_types)	Enables agency customers to manage complex case processes by defining new case types. A case type represents an individual business process and is a collection of diverse inputs and tasks that an agent performs to resolve constituent requests.
Customer Service Portal (com.glide.service-portal.customer-portal)	Supports business-to-business (B2B) organizations to support their customers. Provides out of the box self-service capabilities for customers to search information or request assistance from a service agent.
Customer Service Install Base Management (com.snc.install_base)	Enables customers to capture the current state of their install base and establish the relationship to any downstream entities that might impact their functioning.
Service Applicant Information (com.sn_svc_appl_info)	Enables customers to capture additional information entered during the case creation/application process. Includes a data model and corresponding custom UIs to facilitate storing new applicant information, their associated financial information, and other constituent/business contact data.
Service Applicant Program Management (com.sn_svc_appl_pgm_mg)	The Service Applicant Program Management application, in partnership with Strategic Portfolio Management, empowers

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	organizations to quickly design, configure, and launch applicant-facing programs, such as grants.
Service Request Criteria (sn_req_criteria)	Allows government service agents to view only relevant service definitions while creating a case. Service definitions can be filtered using user criteria and entity criteria which shows only relevant service definitions for agents and constituents. Admins can create new customer criteria for constituents, accounts. Constituents can see relevant service definitions in the customer portal based on customer criteria setup by admins.

Plugins installed with Grants Management

The following plugins and applications are installed with the Grants Management (com.sn_gsm_grants) application. The Grants Management application enables government agencies to simplify and streamline grant program set-up, management, application intake, review, and screening using a guided, customizable experience. For a full list of dependencies for Grants Management, see Grants Management App Dependencies.

Plugin	Description
Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)	Provides a standard architecture for provisioning a variety of government services—such as social assistance programs, service requests, licensing/permitting, and so on—with a government data model that supports case types and agency services provided to constituents or their businesses. Includes: • UI Components for Customer Portals (com.sn_ciwf_ui_cmpnt) • Business Location (sn_bus_loc) • Agency Support Model (com.sn_agency_support_model) • Customer Service Case Types (com.snc.csm_case_types) • Customer Service Portal (com.glide.service-portal.customer-portal) • Customer Service Install Base Management (com.snc.install_base) • Service Applicant Information (com.sn_svc_appl_info) • Service Applicant Program Management (com.sn_svc_appl_pgm_mg) • Service Request Criteria (sn_req_criteria)
Playbooks for Customer Service Management (com.sn_csm_playbook)	Foundational plugin that enables customers to create playbooks based on individual

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description

	business needs. Playbooks guide government service agents through sequences of tasks to resolve constituent issues, and helps users to visualize the entire lifecycle of a workflow. This plugin includes:
	• Customer Service Portal (com.glide.service-portal.consumer-portal)
	• Customer Service Case Types (com.snc.csm_case_types)
	  ○ Customer Service Case Types (com.snc.csm_case_types)
	  ○ Customer Service Install Base Management (com.snc.install_base)
	  ○ Agency Support Model (com.sn_agency_support_model)

Goal Framework (com.snc.goal_framework)	Captures grant program goals and deliverables. Enables strategic planning and helps define and construct strategic priorities and associate goals for the organization, in partnership with Strategic Portfolio Management.
Service Applicant Program Management (com.sn_svc_appl_pgrm_mgmt)	The Service Applicant Program Management application, in partnership with Strategic Portfolio Management, empowers organizations to quickly design, configure, and launch applicant-facing programs, such as grants. This solution provides a ready-to-use architecture and guided workflow to streamline the entire setup process. Designed with reusability in mind, this application allows teams to provision multiple applicant programs using a consistent, scalable framework. This plugin includes: • Planning Item Core (com.sn_align_core) • Planning Attributes Core (com.sn_plng_att_core) • Milestones (com.sn_milestones) • Resource Management (com.snc.resource_management) • Portfolio Planning (com.sn_align_ws) • Strategic Planning (com.sn_apw_advanced)
Expanded Model and Asset Classes (com.sn_ent)	Contains all new, out-of-the-box, expanded model classes, asset classes, and model categories defined by ServiceNow. Installation of the Asset Management

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	(com.snc.asset_management) plugin is a prerequisite for this application.
Document Templates (com.sn_doc)	Enables users to create HTML and PDF document templates to generate standard letters or documents,automating and simplifying the process of filling, signing, and reviewing a document online.
Document Processor (com.sn_doc_processor)	Enabling service owners to configure document categories, document types, document rules, and approval rules for document deferments and exceptions.

Plugins installed with Social Benefits Playbook

The following plugins are installed with the Social Benefits Playbook (com.sn_gsm_social_benefits) application:

Plugin	Description
Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)	Provides a standard architecture for provisioning a variety of government services—such as social assistance programs, service requests, licensing/permitting, and so on—with a government data model that supports case types and agency services provided to constituents or their businesses. Includes: • Customer Service Case Types (com.snc.csm_case_types) • Customer Service Install Base Management (com.snc.install_base) • Agency Support Model (com.sn_agency_support_model) • Consumer Service Portal (com.glide.service-portal.consumer-portal) • Signature Pad (com.snc.signaturepad) • UI Components for Customer Portals (sn_ciwf_ui_cmpnt)
Playbooks for Customer Service Management (com.sn_csm_playbook)	Foundational plugin that enables customers to create playbooks based on individual business needs. Playbooks guide government service agents through sequences of tasks to resolve constituent issues, and helps users to visualize the entire lifecycle of a workflow. This plugin includes:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	• Dynamic Related Records for Configurable Workspace (sn_uib_dyn_rel_rec) • Customer Service Management (com.sn_customerservice) • CSM Configurable Workspace Bundle
Service Applicant Information (sn_svc_appl_info)	Extends your application and case intake processes by enabling the collection of detailed applicant data. Designed to support both primary and additional applicants, the plugin provides a flexible data model and user-friendly interfaces to capture and manage key information—including financial details—at the point of entry.
Expanded Model and Asset Classes (com.sn_ent)	Contains all new, out-of-the-box, expanded model classes, asset classes, and model categories defined by ServiceNow. Installation of the Asset Management (com.snc.asset_management) plugin is a prerequisite for this application.
Document Templates (com.sn_doc)	Enables users to create HTML and PDF document templates to generate standard letters or documents,automating and simplifying the process of filling, signing, and reviewing a document online. This plugin includes: • Signature Pad (com.snc.signaturepad) • User Criteria Scoped API (com.glideapp.user_criteria.scoped.api)
Document Processor (com.sn_doc_processor)	Enabling service owners to configure document categories, document types, document rules, and approval rules for document deferments and exceptions.
Policy as Code Engine (com.sn_pace)	Contains the UI components to support the UI functionality of Policy as Code Engine (PaCE), which provides a centralized platform for storing, managing, and using policies, which are pre-defined rule-sets that drive eligibility determination and benefits and can be mapped to one or more social benefit types. This plugin includes the Policy as Code Engine UI (com.sn_pace_builder).

Plugins installed with License and Permit Playbook

The following plugins are installed with the License and Permit Playbook (com.sn_gsm_lic_prmt) application:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)	Provides a standard architecture for provisioning a variety of government services—such as social assistance programs, service requests, licensing/permitting, and so on—with a government data model that supports case types and agency services provided to constituents or their businesses. Includes: • Customer Service Case Types (com.snc.csm_case_types) • Customer Service Install Base Management (com.snc.install_base) • Agency Support Model (com.sn_agency_support_model) • Consumer Service Portal (com.glide.service-portal.consumer-portal) • Signature Pad (com.snc.signaturepad) • UI Components for Customer Portals (sn_ciwf_ui_cmpnt)
Playbooks for Customer Service Management (com.sn_csm_playbook)	Foundational plugin that enables customers to create playbooks based on individual business needs. Playbooks guide government service agents through sequences of tasks to resolve constituent issues, and helps users to visualize the entire lifecycle of a workflow. This plugin includes: • Dynamic Related Records for Configurable Workspace (sn_uib_dyn_rel_rec) • Customer Service Management (com.sn_customerservice) • CSM Configurable Workspace Bundle
Document Templates (com.sn_doc)	Enables users to create HTML and PDF document templates to generate standard letters or documents,automating and simplifying the process of filling, signing, and reviewing a document online. This plugin includes: • Signature Pad (com.snc.signaturepad) • User Criteria Scoped API (com.glideapp.user_criteria.scoped.api)
Expanded Model and Asset Classes (com.sn_ent)	Contains all new, out-of-the-box, expanded model classes, asset classes, and model categories defined by ServiceNow. Installation of the Asset Management

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	(com.snc.asset_management) plugin is a prerequisite for this application.
Service Applicant Information (sn_svc_appl_info)	Extends your application and case intake processes by enabling the collection of detailed applicant data. Designed to support both primary and additional applicants, the plugin provides a flexible data model and user-friendly interfaces to capture and manage key information—including financial details—at the point of entry.
Document Management (com.snc.platform_document_management)	Enables you to manage large numbers of documents efficiently. Provides storage space and a filing system that allows you to easily upload, retrieve and delete documents.

Plugins installed with Information Request Playbook

The following plugins are installed with Information Request Playbook (com.sn_gsm_info_req) application:

Plugin	Description
Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)	Provides a standard architecture for provisioning a variety of government services —such as social assistance programs, service requests, licensing/permitting, and so on— with a government data model that supports case types and agency services provided to constituents or their businesses. Includes: • Customer Service Case Types (com.snc.csm_case_types) • Customer Service Install Base Management (com.snc.install_base) • Agency Support Model (com.sn_agency_support_model) • Consumer Service Portal (com.glide.service-portal.consumer-portal) • Signature Pad (com.snc.signaturepad) • UI Components for Customer Portals (sn_ciwf_ui_cmpnt)
Playbooks for Customer Service Management (com.sn_csm_playbook)	Foundational plugin that enables customers to create playbooks based on individual business needs. Playbooks guide government service agents through sequences of tasks to resolve constituent issues, and helps users to visualize the entire lifecycle of a workflow. This plugin includes:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	• Dynamic Related Records for Configurable Workspace (sn_uib_dyn_rel_rec) • Customer Service Management (com.sn_customerservice) • CSM Configurable Workspace Bundle
Document Management (com.snc.platform_document_management)	Enables you to manage large numbers of documents efficiently. Provides storage space and a filing system that allows you to easily upload, retrieve and delete documents.

Plugins installed with Service Request Playbook

The following plugins are installed with Service Request Playbook (com.sn_gsm_srvc_req) application:

Plugin	Description
Public Sector Digital Services Core (com.sn_public_sector_digital_services_core)	Provides a standard architecture for provisioning a variety of government services—such as social assistance programs, service requests, licensing/permitting, and so on—with a government data model that supports case types and agency services provided to constituents or their businesses. Includes: • Customer Service Case Types (com.snc.csm_case_types) • Customer Service Install Base Management (com.snc.install_base) • Agency Support Model (com.sn_agency_support_model) • Consumer Service Portal (com.glide.service-portal.consumer-portal) • Signature Pad (com.snc.signaturepad) • UI Components for Customer Portals (sn_ciwf_ui_cmpnt)
Playbooks for Customer Service Management (com.sn_csm_playbook)	Foundational plugin that enables customers to create playbooks based on individual business needs. Playbooks guide government service agents through sequences of tasks to resolve constituent issues, and helps users to visualize the entire lifecycle of a workflow. This plugin includes:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugin	Description
	• Dynamic Related Records for Configurable Workspace (sn_uib_dyn_rel_rec) • Customer Service Management (com.sn_customerservice) • CSM Configurable Workspace Bundle

Plugins installed with Now Assist for Public Sector Digital Services (PSDS)

The following plugins are installed with Now Assist for Public Sector Digital Services (PSDS) (com.sn_psds_gen_ai) application:

- Now Assist Platform (com.sn_genai_platform)

Optional Plugins available for Public Sector Digital Services and related apps

- Geo Map (sn_geo_map) for Service Request Playbook

Government Service Portal service catalog

The following services are base system public service catalog items offered in the Government Service Portal.

These services display automatically for registered users. When a user uses one of these catalog items to submit a request, it automatically maps the case to certain pre-built requests. .

For information on how to set up and customize the public services offered by your agency (and displayed in your Government Service Portal service catalog), see Configure the service catalog for a constituent, business, or agency.

A user can go to the service catalog and create a case using the categories and sub-categories outlined in the following table.

Public Service Request Catalog Items

Service Request Catalog Items

Category	Subcategory		Description
Animal	N/A	Aggressive Animal	Report truly aggressive animals as opposed to animals that are merely barking or running at large
		Abused and Neglected Animal	Report an injured, abused, neglected or, otherwise, in danger domestic animal.
		Injured Animal	Report any non-owned animal in the public way, public place, city park, on a pole, electrical wire,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Request Catalog Items (continued)

Category	Subcategory		Description
			or train tracks that is injured or sick.
		Wildlife, Stray or Dead Animal Pickup	Report and request the removal of a dead wild or stray animal from the public right-of-way
Housing, Buildings, and Structures	Housing	Abandoned Vehicle (Private Property)	Report abandoned vehicles on private occupied property, private vacant property and public vacant lots/property.
		Housing Inspection, Animal	Report residential animal problems such as animal feces, too many animals and/or exotic animals on occupied private property.
		Housing Inspection, Fire Protection	Report damaged or lack of proper fire protection equipment (e.g., fire extinguisher, fire escape, smoke alarms) in residential rental property
		Housing Inspection, Vacant Residential Property	Report a residential property which has become open to casual entry by the public and represents a hazard to the community.
		Illegal Flyers	Report illegal flyers posted on private property.
Garbage, Recycling & Graffiti	Garbage	Damaged Garbage Bin Replacement	Submit a request for replacement of a damaged garbage bin
		Public Trash Can Issue	Report overflowing public trash cans to be emptied
		Illegal Dumping	Report report large amounts of trash bags or more, bulk items, or building materials that appeared overnight

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Request Catalog Items (continued)

Category	Subcategory		Description
			or a witnessed act of dumping from a vehicle
		Missed Residential Garbage	Report missed residential garbage collection
	Recycling	Missed Recycling	Report missed residential recycling collection
	Grafitti	Graffiti Removal	Report graffiti on private or public property
Parks and Trees	Parks	Park Cans	Request to have overflowing trash cans and trash around cans removed from Recreation & Parks properties
		Park Maintenance	Request maintenance at within public park or at a park structure (e.g., pavilion or gazebo). Typical park maintenance requests include trash on grounds, basketball replacement, tennis/ basketball court repairs, fences repairs, bench repairs, masonry work, water fountain repairs and other outside water leaks.
	Trees	Street Tree Down	Report a loose or fallen limb from a city street tree that is a hazard to transit or public safety
		Street Tree Inspection	Request an inspection of a City street tree that may need removal or pruning.
		Tree Planting Request	Requests to plant a tree on the City parkway in front of your house.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Request Catalog Items (continued)

Category	Subcategory		Description
		Tree Removal Request	Request to remove a dead or diseased tree on the public way.
Public Safety	N/A	Equipment Noise Complaint	Report excessive noise coming from air conditioners, compressors, generators, or any other piece of industrial or commercial equipment.
		Spills or Dumping in Natural Water Ways	Report pollution into rivers, lakes, canal, or sewers.
		Water Supply Issues	Report issues with water supply or no water to property
Streets and Sidewalks	Streets	Street Cleaning Request	Request for curb to curb sweeping the debris off the street by a street sweeping machine
		Water On Street	Report water that remains on the street due to broken fire hydrants, drains etc.
		Remove Obstruction in the Right of Way (ROW)	Report items such as concrete poles, wood, tools, car parts, etc., that are obstructing the Right of Way (ROW)
		Potholes	Report a pothole (surface level damage to a street or a depression/hollow in a road surface caused by wear or subsidence.)
	Sidewalks	Sidewalk Inspection Request	Report the condition of City sidewalks or accessibility (ADA) ramp issues
Traffic and Parking	Parking	Broken Parking Meter	Report a broken parking meter

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Request Catalog Items (continued)

Category	Subcategory		Description
		Parking Complaint	Report suspected illegal parking
	Traffic	Damaged or Missing 'Do Not Enter' signs	Report maintenance issues to damaged or missing "Do Not Enter" signs.
		Damaged or Missing Stop Signs	Report maintenance issues to damaged or missing "Stop" signs
		Damaged or Missing Street Name Sign	Report a damaged or missing street name sign in need of replacement or repair
		Traffic Signal Out	Report traffic signals and/or pedestrian crosswalk signals that are not working or are flashing
Water & Sewer	Sewer	Sewer Investigation	Report any sewer related issues such as sewer/sanitary manhole cover damage/missing, an odor of sewage with no visual evidence, or maintenance of tree roots in a sewer drain which could cause a backup.
	Water	Sewer Overflow	Report sewer water leaking or overflowing from outside pipes.
		Water Meter Cover Missing or Damaged	Report a missing or damaged water meter cover.
		Water Odor or Bad Taste	Report any unusual smell or taste associated with a dwelling's tap water.
		Open Hydrant	Report water flowing from a hydrant nozzle.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Request Catalog Items

Category	Description
FOIA Request	Submit a request to obtain FOIA information that is not readily available as part of this government agency's normal business services.
Public Request	Submit a request to obtain public information that is not readily available as part of this government agency's normal business services.

License and Permit Request Catalog Items

Category	Description
Request License	Submit an application for a commercial fishing license.

Social Benefits Request Catalog Items

Category	Description
Apply for Nutrition Assistance	Request financial assistance for individuals and families to afford food.
Apply for Unemployment Insurance	Request temporary cash benefits for workers who have become unemployed through no fault of their own and are currently capable of, available for, and actively seeking work.
Request Vocational Rehabilitation Services	Request support for individuals with intellectual and developmental disabilities.

Life cycle of a Public Service case

A public service request case within one of the three Public Sector Digital Services playbook applications can be in one of several states as it progresses through the fulfillment cycle.

Public Service request case stages

A public service request case has four stages:

- Intake
- Review
- Process
- Decision

As a public service request case moves through the stages listed above and toward a resolution, the case status is updated. Stage and status are related to each other as described in the following table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public service request case stages and status

Case Stage	Case Status	Description
	Draft	The case has not yet been submitted, and the public service request case record has not yet been created.
Intake Guides the agent to collect the information needed to create the public service request case.	New	The initial status for a new public service case created through the Government Service Portal or one of the Public Sector Digital Services playbooks. In this state, a government service agent can do one of the following: • **Assign to me**: Assign themselves the case. The state changes to **Open**. • **Accept**: If the case was assigned to the agent by a government service manager, the can agent accept or re-assign the case. If accepted, the state changes to **Open**. • **Update**: Update the case. • **Close Case**: Close the case. • **Delete**: Delete the case. In this state, a constituent can do either of the following: • **Update**: Update the case with additional information. • **Close Case**: Close the case.
	Open	A case changes from **New** to **Open** when a government service agent assigns the case to themselves (**Assign to me**), or accepts a case assigned to them by a government service manager. In this state, the agent can do one of the following: • **Update**: Update the case. • **Request Info**: Request additional information from the constituent. The case state changes to **Awaiting Info**. • **Propose Solution**: Propose a solution for the case. The case state changes to **Resolved**. • **Close Case**: Close the case. • **Delete**: Delete the case.
	Awaiting Info	Additional information has been requested from the constituent. In this state, the constituent can do one of the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public service request case stages and status (continued)

Case Stage	Case Status	Description
		• **Update**: Add the requested information to the case. Once that information has been received, the case moves back to **Open**. • **Close Case**: Close the case.
Review Enables the agent to do initial troubleshooting on the case, check for similar or duplicate case requests, and determine what services need to be rendered.	Open	In this state, the agent can do one of the following: • Check to see if there are similar or duplicate requests. If so, the case can be moved to progress directly. • **Request an Inspection**: If an inspection is requested, the case status moves to **Inspection in Progress**
	Inspection in Progress	Inspection of the service location by a field service agent is in progress. Once complete, the case is moved to **Process**.
	Awaiting Info	If an agent requests more information at any time during the Review stage, the status of the case changes to **Awaiting Info**. In this state, the agent can do one of the following: • **Open Case**: Change the case state back to **Open**. • **Update**: Update the case. • **Close Case**: Close the case. • **Delete**: Delete the case. In this state, the constituent can do one of the following: • **Update**: Add the requested information to the case. Once the constituent updates the case, the state changes to **Open**. • **Close Case**: Close the case.
Process	Work in Progress	The case status changes to **Work in Progress**when the agent selects **Start Work**. A work order is now in progress to solve the public service request.
	Work Assignment in Progress	A work order is in progress, and the government service agent resolves any open case tasks associated with the case.
	Awaiting Info	The case moves to the Awaiting Info state when an agent selects **Request Info** to request more information from the requester. The agent has

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public service request case stages and status (continued)

Case Stage	Case Status	Description
		requested more information during or after work has been done to resolve the case.
Decision Allows the requester to review the agent's decision and either accept or reject.	Ready for Decision	The case is ready for an agent decision.
	Resolved	Once an agent provides a resolution code, enters resolution notes in the **Resolution Information** tab, and selects **Propose Solution**, the case state changes from **Awaiting Info** to **Resolved**. The **Resolution code** and **Resolution notes** fields are mandatory for an agent to propose a solution to the case. In this state, the agent can do one of the following: • **Update**: Update the case • **Close Case**: Close the case. A case cannot be closed by an agent or agent manager when it is in this state. In this state, the constituent can do one of the following: • **Accept Solution**: Accept the solution proposed by the agent. The case state changes to **Closed** and a survey is displayed. • **Reject Solution**: Reject the solution proposed by the agent. The case state changes to **Open**. • **Delete**: Delete the case.
	Closed	After proposing a solution, the agent waits for a constituent response. • If the constituent clicks **Accept Solution**, the case state changes from **Resolved** to **Closed**. • If the constituent clicks **Reject Solution**, the state changes from **Resolved** to **Open**, and the agent must propose another solution. Closing a case as an agent or agent manager requires comments to be added to the **Resolution notes** field. This is not required when a customer closes a case. A case cannot be updated once it is closed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public service request case stages and status (continued)

Case Stage	Case Status	Description
	Cancelled	The public service request is cancelled.

Note:
You can't edit a public service request case when the state of the case is set to **Closed complete** or **Canceled**.

Public Sector Digital Services forms

Use forms to view and update Public Sector Digital Services information.

The form is the user interface where agents do most of their work. Workspace form configurations work without modification in Configurable Workspace, but the configurations may affect the functioning of your Configurable Workspace.

Case forms and profile forms are the two main form types that government service agents and constituents interact with in the Public Sector Digital Services application. Forms and their fields are customizable by an admin, and can be mapped to specific tables to capture a variety of customer information.

Public Sector Digital Services Core Case Forms

Agents can create case forms to display detailed information about questions, requests, and issues that constituents, business stakeholders, or agents have. Constituents, business stakeholders, or agents can also view the form to see the status of their requests and service cases.

A government service agent creates a case to identify a constituent's request or issue and to track the activities related to resolving the issue. An agent also uses a case to track communication to and from the constituent, including the communication channels being used.

Case activities include any action that is taken to resolve an issue. This can include phone calls or emails, knowledge base research, conversations with subject matter experts, and dispatch requests to field service agents, as well as other activities.

From the Case form, an agent can associate and store the related information, such as the constituent or applicant's name, phone number, and company; account information; application details, and any associated service level agreements (SLAs).

There are several key features to a case.

- Communication between an agent and the constituent or applicant, or between an agent and other employees within the organization. Details of all internal and external communication are recorded on the Case form.
- Any additional tasks that result from a case, such as a work order. Tasks are tracked from a related list on the Case form. These tasks may be internal to the organization or they may involve the constituent.
- Information from the case that can be included in the knowledge base and used to help resolve other cases.

There are two different Case form views: a detailed view that is available to agents and agent managers in the Public Sector Digital Services application and a simplified view that is available to constituent from the Government Service Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form

A government service agent creates a case to identify a constituent's request, and to track the activities related to resolving the issue. The Case form captures and displays detailed information about a constituent's issue or request.

Government Service Case form

Field	Description
Number	Auto-generated number for the case. Numbers for cases use the default prefix GOVCS.
Applicant type	Type of applicant: • Individual • Business • Agency
Business	Name of the business. If the business does not exist, the agent can create a business record from the case.
Business contact	Name of the business contact. If the business contact does not exist, the agent can create a business contact record from the case.
Channel	Method by which the constituent initiated contact and the case was opened: • Web (default) • Phone • Email • Chat • Social • Community • Alert • Virtual Agent • In Person
Constituent	Name of the constituent. If the constituent does not exist, the agent can create a constituent record from the case.
Requested by agency	Name of the agency that requested the case.
Assigned to agency	Name of the agency that is assigned with the case.
Service	The requested service indicated in the case.
Opened	Date and time that the case was opened.
Priority	The assigned priority: • 1 — Critical • 2 — High

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (continued)

Field	Description
	• 3 — Moderate • 4 — Low (default)
Assignment group	Assigned government service agent group.
Assigned to	Assigned agent. If a group is selected in the **Assignment group** field, the assigned agent must belong to this group.
Primary purpose	The reason that the constituent created the case: • Constituent Benefits: services that constituents can apply for. • Governance Procedures: other types of cases such as Frauds, Appeals, Investigations, Complaints.
Partner	The name of the partner company.
Partner contact	The name of the partner contact for this case.
Short description	Brief description of the question, request, or issue.
Applicant Information	
Primary identification type	The type of document used as a constituent identification: • Social Security Number • State Identification Number • Driver's License Number • Medicare ID
Identification field	One of the following fields based on the selection in the **Primary Identification type** field: • Social Security Number • State Identification Number • Driver's License Number • Medicare ID
Email	The email address of the requester.
Street	The street name for the primary address.
City	The city for the primary address.
State/ Province	The state or province for the primary address.
ZIP/Postal Code	The ZIP code or postal code for the primary address.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (continued)

Field	Description
Country	The country of the requester.
Application Information	
Reported date	The date that the case was submitted. This field defaults to the case creation date but can be changed.
Decision date	The date that a decision about the case was reached.
Application status	The status of the application: • Approved • Declined
Description	A description about the case status.
Notes	
Watch list	Users who receive notifications about this case when additional comments are added or if the state of a case is changed to **Resolved** or **Closed**. Click the add me icon to add yourself to the watch list.
Work notes list	Internal users who receive a notification about this case when work notes are added. You can only add internal users to the work notes list. Click the add me icon to add yourself to the watch list.
Additional comments (Customer visible)	Comments for the case that are visible to the constituent.
Work notes	Information about how to resolve the case or steps taken to resolve it, if applicable. Internal users who have been added to the Work notes list receive a notification that Case work notes have been added. You can configure the notification, as required. The notes are viewable by the admin, agent, and agent manager.
Contributors	
Contributor Users	When a user with the case task agent role (sn_customerservice.case_task_agent) is assigned to a case task, the user is added to the **Contributor Users** field. If this user is removed from the **Assigned to** field on the Case Task form, and this user is not assigned to any other tasks for the case, the user is also removed from the **Contributor Users** field.
Contributor Groups	When a user with the case task agent role (sn_customerservice.case_task_agent) is assigned to a case task, the user's assignment group is added to the **Contributor Groups** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (continued)

Field	Description
	If the user is removed from the **Assigned to** field on the Case Task form, and no other member of their assignment group is assigned to any other tasks for the case, the assignment group is removed from the **Contributor Groups** field. If a group is removed from the **Assignment group** field on the Case Task form, and the group is not assigned to any other tasks for the case, the assignment group is removed from the **Contributor Groups** field.
Resolution Information	
Resolved by	Agent that the case is assigned to when the case is resolved.
Resolved	Date and time that the case was resolved.
Resolution code	List of the resolution states for the case. This field is mandatory when an agent proposes a solution for a case.
Closed by	Name of the user who closed the case.
Closed	Date and time that the case was closed.
Cause	Details about the cause of the resolution.
Resolution notes	Details about how the case was closed. This field is mandatory if a customer service agent or agent manager closes a case. If a constituent closes a case, it is not mandatory.

Government Service Case form related lists

The Case form includes related lists that store case information and that agents can use to perform case-related tasks. Government agents are able to access a service request case, information request case, or license and permit case and view the following related lists.

Government service case form related lists

Related List	Description
Case Tasks	Tasks that have been created for this case by the government service agent or agent manager. When you create a task or change the state of a task, the information is recorded in the case **Activity** field. When you create a case task, the system generates a task number with a prefix. New and existing case tasks, regardless of state, both use the CSTASK prefix.
Related Parties	A list of related parties, such as contacts or constituents added to the case.
Related Cases	A list of cases created for the same account or contact.
Work Orders	A list of work orders created for this case.
Interactions	A comprehensive list of interactions created between constituents and government service agent for this case. Interactions use the IMS prefix.
SLAs	The service level agreements that are associated with this case.
Draft Emails	Emails that are unsent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government service case form related lists (continued)

Related List	Description
Emails	The case email log. A list of the emails that are sent or received as part of resolving this case. The government service agent or agent manager can send email from within the case, such as updates and inquiries to constituents or other agents or parties. A change in the state of the case triggers an automatic email to be sent to the constituent. Constituent contacts can create and update cases by email as well as receive updates from government service agents.
Blocked Tasks	A list of blocking tasks that have been created for this case. A blocking task is something that prevents the agent from making progress toward case resolution.
Escalations	A list of escalation records that are related to this case.
Attached Knowledge	Knowledge articles attached as a proposed solution to the case.
Knowledge Gaps	Feedback tasks that are created when a knowledge gap is reported.
Appointments	Appointments that the government agent makes with the constituent or others as part of resolving this case. When you create an appointment, an appointment creation message is recorded in the case **Activity** field. The user selected in the **To** field on the appointment form receives an email with the appointment details.

Service Request case form

A government service agent can create a case using the Service Request case form to capture detailed information about questions, requests, and issues that constituents, business stakeholders, or agents have. Constituents, business stakeholders, or agents can also view the form to see the status of their requests and service cases.

A government service agent creates a case to identify a constituent's question or issue and to track the activities related to resolving the issue. An agent also uses a case to track communication to and from the constituent, including the communication channels being used.

Case activities include any action that is taken to resolve an issue. This can include phone calls or emails, knowledge base research, conversations with subject matter experts, and dispatch requests to field service agents, as well as other activities.

From the Case form, an agent can associate and store the related information, such as the constituent's name, phone number, and company; account information; product and asset information; service contract and entitlement details, and any associated service level agreements (SLAs).

There are several key features to a case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Communication between an agent and the constituent or an agent and other employees within the organization. Details of all internal and external communication are recorded on the Case form.
- Any additional tasks that result from a case, such as a work order. Tasks are tracked from a related list on the Case form. These tasks may be internal to the organization or they may involve the constituent.
- Information from the case that can be included in the knowledge base and used to help resolve other cases.

There are two different Case form views: a detailed view that is available to agents and agent managers in the Public Sector Digital Services application and a simplified view that is available to external constituents from the Government Service Portal.

Agent view

The agent view of the Case form includes the following components:

- A timeline that provides a visual display of case activities.
- Referenced entities for the case including account and contact information, product and asset information, service contract and service entitlement details, and any pertinent SLAs. Except for SLAs, this information exists in the system and can be associated with the case by the agent or agent manager.
- All communication about the case, both external and internal. This information is stored in the **Additional comments** field (external communication), the **Work notes** field (internal communication), the **Resolution notes** field. The **Resolution notes** field stores details about the case resolution, and the **Activity** field, which stores all communication in a chronological list.

Agents and managers can view a Case form in the Public Sector Digital Services application by navigating to **Lists** > **Service Requests** and selecting one of the following menu options:

- **All**
- **My Cases**
- **My Open**
- **Unassigned for my group**

From the Case list, click a case number to display the Case form.

Government Service Case form (agent view)

Field	Description
Number	Auto-generated number for the case. Numbers for cases use the default prefix GOVCS.
Opened	Date and time that the case was opened.
Applicant type	Type of applicant: • Individual • Business • Agency

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (agent view) (continued)

Field	Description
Business	Name of the business. If the business does not exist, the agent can create a business record from the case.
Business contact	Name of the business contact. If the business contact does not exist, the agent can create a business contact record from the case.
Constituent	Name of the constituent. If the constituent does not exist, the agent can create a constituent record from the case.
Priority	How quickly the agent should address the service request. Priority ranking is as follows: • 1 — Critical • 2 — High • 3 — Moderate • 4 — Low (default)
Channel	Method by which the constituent initiated contact and the case was opened: • Web (default) • Phone • Email • Chat • Social • Community • Alert • Virtual Agent • In Person
Primary purpose	The reason that the constituent created the case: • **Constituent Benefits**: services that constituents can apply for. • **Governance Procedures**: other types of cases such as Frauds, Appeals, Investigations, Complaints. Defaults to **Constituent Benefits**.
Service	The requested service indicated in the case. By default, this field will show public services with 'Service type' = Service Requests.
Assigned to agency	Name of the agency that is assigned with the case.
Requested by agency	Name of the agency that requested the case.
Assignment group	Assigned government service agent group.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (agent view) (continued)

Field	Description
Assigned to	Agent(s) the case is assigned to. If a group is selected in the **Assignment group** field, the assigned agent must belong to this group.
Service	Requested service that is indicated in the case.
Short description	Brief description of the question, request, or issue. Users can use the related search results to find a list of knowledge base articles with a possible solution.
Request Location	
Address Type	The type of location where the issue is being reported. **Address** or **Intersection**
Street	The address where the issue is located. This field is only required if **Address**is selected as the Address type.
First Cross Street, Second Cross Street	The cross streets where the issue is located. This field is only required if **Intersection**is selected as the Address type.
City	The city where the issue is located.
State/ Province	The state or province where the issue is located.
ZIP/Postal Code	The ZIP code or postal code where the issue is located.
Country	The country where the issue is located.
Latitude, Longitude	The coordinates where the issue is located. This field is required for either address type, and auto-populates based on the address data entered.
Request Details	
Reported date	The date that the case was submitted. This field defaults to the case creation date but can be changed.
Description	A description about the case status.
Applicant Information	
Primary identification type	The type of document used as a constituent identification: • Social Security Number • State Identification Number • Driver's License Number • Medicare ID
Identification field	One of the following fields based on the selection in the **Primary Identification type** field: • Social Security Number • State Identification Number

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (agent view) (continued)

Field	Description
	• Driver's License Number • Medicare ID
Email	The email address of the requester.
Street	The street name for the primary address.
City	The city for the primary address.
State/ Province	The state or province for the primary address.
ZIP/Postal Code	The ZIP code or postal code for the primary address.
Country	The country of the requester.
Notes	
Watch list	Users who receive notifications about this case when additional comments are added or if the state of a case is changed to **Resolved** or **Closed**. Click the add me icon to add yourself to the watch list.
Work notes list	Internal users who receive a notification about this case when work notes are added. You can only add internal users to the work notes list. Click the **add me** icon to add yourself to the watch list.
Additional comments (Constituent visible)	More information about the issue as needed. All users who can view incidents can also see additional comments.
Work notes	Information about how to resolve the case or steps taken to resolve it, if applicable. Internal users who have been added to the Work notes list receive a notification that Case work notes have been added. You can configure the notification, as required. The notes are viewable by the admin, agent, and agent manager.
Contributors	
Contributor Users	When a user with the case task agent role (sn_customerservice.case_task_agent) is assigned to a case task, the user is added to the **Contributor Users** field. If this user is removed from the **Assigned to** field on the Case Task form, and this user is not assigned to any other tasks for the case, the user is also removed from the **Contributor Users** field.
Contributor Groups	When a user with the case task agent role (sn_customerservice.case_task_agent) is assigned to a case task, the user's assignment group is added to the **Contributor Groups** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Government Service Case form (agent view) (continued)

Field	Description
	If the user is removed from the **Assigned to** field on the Case Task form, and no other member of their assignment group is assigned to any other tasks for the case, the assignment group is removed from the **Contributor Groups** field. If a group is removed from the **Assignment group** field on the Case Task form, and the group is not assigned to any other tasks for the case, the assignment group is removed from the **Contributor Groups** field.
Resolution Information	
Resolved by	The agent to whom the case is assigned when the case is resolved.
Resolved	Date and time that the case was resolved.
Closed by	Name of the user who closed the case.
Closed	Date and time that the case was closed.
Resolution code	List of the resolution states for the case. This field is mandatory when an agent proposes a solution for a case. By default, this field is set to **Resources Not Approved**.
Cause	Details about the cause of the resolution.
Resolution notes	Details about how the case was closed. This field is mandatory if a government service agent or agent manager closes a case. If a constituent closes a case, it is not mandatory.
Related Records	
Parent	Associated parent incident that makes the current incident a child incident. **Note:** When the parent incident is resolved, the child incident is also marked as resolved.
Problem	Any related problem record.
Change Request	Any related change request.
Caused by Change	Associated change request that prompted the creation of the incident.

Constituent view

Users with the constituent or business contact role can view Case forms by selecting **Your Cases** in the government service portal header, then selecting the case number from the Case list.

The constituent or business contact view of the Case form includes the following components:

- A process flow formatter that indicates the current state of the case.
- The related entity information, including agency and contact information, pending service case task information, and service request information.
- An **Activity** field that stores all communication for the case in a chronological list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Service Request Case Task form

Service Request case form displays detailed information about a service request cae task.

The Service Request Case Task form displays information about service request case tasks, which are created and assigned to agents to complete the work to resolve service request cases.

The case task form includes the following fields.

Service Request Case Task form

Field	Description
Number	Automatically assigned case task number.
Priority	Assigned priority: • 1 - Critical • 2 - High • 3 - Moderate • 4 - Low (default)
Parent	Case that this case task was created for. This can be a case from the Case table (sn_gsm_government_service_case) or any child tables of the Case table.
State	Current state of the case task: • Open • Awaiting Info • In Progress • Closed
Associated Table	Table associated with this task.
Associated Record	Records that are associated with this task.
Assigned to	Assigned user.
Subject	Subject of the case task.
Description	Description of the work that needs to be done in order to complete the case task.
Work Notes List	Customizable list of agents that can view the work notes.
Work notes (Private)	Free-form private work note text viewable to assigned agents only.
Additional comments	Notes that are visible to the constituent. Agents can use this field to request more information from the constituent.

Information Request case form

A government agent can create a case by using the Information Request case form to capture detailed information about public record requests that constituents, business stakeholders, or

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

other agents have. Constituents, business stakeholders, or agents can also view the form to see the status of their information requests.

Information Service Case form

Field	Description
Number	Auto-generated number for the case. The numbers for the cases use the default prefix GOVCS.
Opened	Date and time that the case was opened.
On Behalf Of	Name of the contact for which the record is being requested on behalf of. This field is required if the **Requesting on behalf of someone** check box is selected.
Applicant type	Type of applicant: • Individual • Business • Agency
Business	Name of the business, if the business is selected as the applicant type. If the business doesn't exist, the agent can create a business record from the case.
Business contact	Name of the business contact. If the business contact doesn't exist, the agent can create a business contact record from the case.
Constituent	Name of the constituent, if the individual is selected as the applicant type. If the constituent doesn't exist, the agent can create a constituent record from the case.
Priority	Assigned priority: • 1 — Critical • 2 — High • 3 — Moderate • 4 — Low (default)
Service	Requested service that is indicated in the case.
Channel	Method by which the constituent initiated contact and the case was opened: • Web (default) • Phone • Email • Chat • Social • Community • Alert • Virtual Agent • In Person

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Service Case form (continued)

Field	Description
Assigned to agency	Name of the agency that is assigned to the case.
Assignment group	Government agent group to which this case is assigned.
Assigned to	Name of the agent that is assigned to this case. If a group is selected in the **Assignment group** field, the assigned agent must belong to this group.
Primary purpose	Reason that the constituent created the case: • Constituent Benefits: Services that constituents can apply for. • Governance Procedures: Other types of cases such as frauds, appeals, investigations, or complaints.
Short description	Brief description of the question, request, or issue.
Applicant Information	
Primary identification type	Type of document that is used as a constituent identification: • Social Security Number • State Identification Number • Driver's License Number • Medicare ID
Preferred communication method	Preferred communication method of the requester: • None • Email • Mail • Call
Identification field	Field that is based on the selection in the **Primary Identification type** field: • Social Security Number • State Identification Number • Driver's License Number • Medicare ID
Email	Email address of the requester.
Street	Street name for the primary address.
City	City for the primary address.
State/Province	State or province for the primary address.
ZIP/Postal Code	ZIP code or postal code for the primary address.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Service Case form (continued)

Field	Description
Country	Country of the requester.
Application Information	
Description	Description about the case status.
Fee waiver	Whether the requester believes the case qualifies for a fee waiver.
Fee waiver justification	Justification for a fee waiver qualification. Certain types of requesters automatically qualify for a fee waiver.
Expedited processing	Whether expedited processing is needed.
Expedited processing justification	Justification for requesting expedited processing.
Requester type	Type of requester: • Representative of the news media • Educational Institution • Non-commercial scientific institution • Commercial use requester • All other requesters
Fees willing to pay	Estimate of the fees that the requester is willing to pay to have this request fulfilled.
Estimated fees	Estimate of the fees required to fulfill this request.
No exemption code applicable	Box that is selected if none of the nine exemptions from the exemption checklist apply to this case.
Notes	
Watch list	Users who receive notifications about this case when additional comments are added or if the state of a case is changed to **Resolved** or **Closed**. Select the add me icon to add yourself to the watch list.
Work notes list	Internal users who receive a notification about this case when work notes are added. You can only add internal users to the work notes list. Select the add me icon to add yourself to the watch list.
Additional comments (Customer visible)	Comments for the case that are visible to the constituent.
Work notes	Information about how to resolve the case or steps taken to resolve it, if applicable.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information Service Case form (continued)

Field	Description
	Internal users who have been added to the Work notes list receive a notification that Case work notes have been added. You can configure the notification, as required. The notes are viewable by the administrator, agent, and agent manager.
Contributors	
Contributor Users	When a user with the case task agent role (sn_customerservice.case_task_agent) is assigned to a case task, the user is added to the **Contributor Users** field. If this user is removed from the **Assigned to** field on the Case Task form, and this user isn't assigned to any other tasks for the case, the user is also removed from the **Contributor Users** field.
Contributor Groups	When a user with the case task agent role (sn_customerservice.case_task_agent) is assigned to a case task, the user's assignment group is added to the **Contributor Groups** field. If the user is removed from the **Assigned to** field on the Case Task form, and no other member of their assignment group is assigned to any other tasks for the case, the assignment group is removed from the **Contributor Groups** field. If a group is removed from the **Assignment group** field on the Case Task form, and the group isn't assigned to any other tasks for the case, the assignment group is removed from the **Contributor Groups** field.
Resolution Information	
Resolved by	Agent that the case is assigned to when the case is resolved.
Resolved	Date and time that the case was resolved.
Resolution code	List of the resolution states for the case. This field is required when an agent proposes a solution for a case.
Closed by	Name of the user who closed the case.
Closed	Date and time that the case was closed.
Cause	Details about the cause of the resolution.
Resolution notes	Details about how the case was closed. This field is required if a customer service agent or agent manager closes a case. If a constituent closes a case, it isn't required.

Information Request Case form related lists

The Case form includes related lists that store case information and that agents can use to perform case-related tasks.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Information request case form related lists

Related List	Description
Related Parties	A list of related parties, such as contacts or constituents added to the case.
Documents	Agents can: • Add documents to the information request without making them visible to the requester • View a list of documents added to the Information Request • View documents approved to be published to the requester • Publish approved documents to the requester To view the Documents related list, you must first install the Document Management plugin.
Escalations	A list of escalation records that are related to this case.
Attached Knowledge	Knowledge articles attached as a proposed solution to the case.
Knowledge Gaps	Feedback tasks that are created when a knowledge gap is reported.
Appointments	Appointments that the information request case agent makes with the constituent or others as part of resolving this case. When you create an appointment, an appointment creation message is recorded in the case **Activity** field. The user selected in the **To** field on the appointment form receives an email with the appointment details.

Public Sector Digital Services Core Profile Forms

Profile forms display detailed information about a constituent, agent, or business. This information is collected on registration for the Government Service Portal.

Business Profile form

Use the Business Profile form in Public Sector Digital Services to capture and display the details about a business. You can add the name and address of the business owner, trademark status, industry information, partner records, or business structure.

The Business Profile form displays detailed information about a business and its contacts. This information is collected on registration for the Government Service Portal.

Business Profile form

Field	Description
Business	
Name	Name of the business.
Email	Primary contact email for the business.
Street	Street address where the business is located.
City	City where the business is located.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Business Profile form (continued)

Field	Description
State/ Province	State or province where the business is located.
Zip / Postal Code	ZIP code of the business address.
Country	Country where the business is located.
Business Phone	Primary contact phone number for the business.
Business Information	
Customer	Customer contact for the business.
Partner	Partner of the business.
Identification Number	Reference number for the business entity.
Tax ID number	Tax ID number.
Business Structure	Details about the structure of the business.
Legal Entity Name	Name of the business owner.
Trademark	Trademark of the business.
Assumed Name	Registered business owner name.
Date of incorporation	Date that the business was incorporated.
Industry	Industry of the business.
Additional Information	
Minority ownership status	Option to indicate that a business is owned by a minority.
Rural based status	Option to indicate that a business is based in a rural area.
Tribal affiliation status	Option to indicate that the business owner is affiliated with a tribe.
Women ownership status	Option to indicate that a business is owned by a woman.
Veteran Ownership Status	Option to indicate that a business is owned by a veteran.
Contact registration information	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Business Profile form (continued)

Field	Description
Business registration code	Registration code. If a request is submitted with a valid registration code, the business account information is automatically detected and added to the business record.
Primary Contact Information	
Primary identification type	Type of primary identification: • Social Security Number • State Identification Number • Drivers License Number • Medicare ID
Identification field	Type of identification. This field appears only when an option is selected from the **Primary identification type** field: • Social Security Number • State Identification Number • Drivers License Number • Medicare ID

Agency Profile form

Use the Agency Profile form in the Public Sector Digital Services application to capture and display the details about an agency and the cases that they're involved in.

The Agency Profile form displays detailed information about an agency and its agents.

Agency Profile form

Field	Description
Number	Auto-generated number for the agency.
Name	Name of the agency.
Manager	Name of the agency manager.
Parent Agency	Name of the parent agency.
Street	Mailing street address of the agency.
City	City in which the agency is located.
State/Province	State or province in which the agency is located.
Zip/Postal Code	ZIP or postal code of the agency.
Website	URL of the agency website.
Email	Primary contact email of the agency.
Phone	Primary contact phone number of the agency.
Identification Number	Auto-generated identification number for the agency.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agency Profile form (continued)

Field	Description
Type	Type that defaults to **Agency**
Subtype	Agency subtype: • Local • County • State • Federal

Constituent Profile form

Use the Constituent Profile form in the Public Sector Digital Services application to display detailed information about a constituent, such as the name and address, date of birth, contact information, and language choice.

The following table describes the detailed information that you can add to the Constituent form.

Agency Service Constituent form

Field	Description
Consumer reference	Reference number for the constituent case.
First name	First name.
Last name	Last name.
Middle name	Middle name.
Number	Phone number of the constituent.
Suffix	Suffix of the constituent name. The suffix may include MD or Jr.
Mobile phone	Mobile phone number for the constituent.
Business phone	Business phone number for the constituent.
Fax	Fax number.
Photo	Photo of the constituent.
Email	Email of the constituent.
Gender	Gender of the constituent.
Date of birth	Date of birth of the constituent.
Country of birth	Country of birth of the constituent.
Age	Age of the constituent.
Identification Information	
Primary identification type	Type of primary identification: • Social Security Number • State Identification Number

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agency Service Constituent form (continued)

Field	Description
	• Drivers License Number • Medicare ID
Identification field	Type of identification. This field appears only when an option is selected from the **Primary identification type** field. • Social Security Number • State Identification Number • Drivers License Number • Medicare ID
Primary correspondence Information	
Primary address type	Type of primary address for the constituent: • Home address • Business address • Mailing address
Street	Street of the constituent.
City	City that the constituent lives in.
State/Province	State in which the constituent lives.
ZIP/Postal code	ZIP code for the address of the constituent.
Latitude	Latitude of the address of the constituent.
Longitude	Longitude of the address of the constituent.
Primary phone number	Primary phone number of the constituent.
Additional information	
Marital status	• Married • Single • Divorced • Widowed • I do not wish to provide this information
Employment status	• Employed • Unemployed • Self employed • I do not wish to provide this information

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agency Service Constituent form (continued)

Field	Description
Race	• American Indian or Alaska Native • Asian • Native Hawaiian or other Pacific Islander • Black or African American • White • I do not wish to provide this information
Ethnicity	• Hispanic or Latino • Not Hispanic or Latino • I do not wish to provide this information
Military status	• Active duty • Veteran • No military duty • I do not wish to provide this information
Disability status	• Yes, I have a disability • No, I do not have a disability • I do not wish to provide this information
Highest education level	• High school or equivalent • Technical or occupational certificate • Associate degree • Some college coursework completed • Bachelor's degree • Master's degree • Doctorate • Professional • Other
Primary language choice	• English • Spanish
Notes	
Notes	Additional notes about the constituent or the case.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public Sector Grants Management reference

Reference tables and forms for configuring and using Grants Management capabilities.

Grants Management App Dependencies

The following is a list of required plugins and app dependencies for Grants Management.

Required Plugins

- com.snc.customerservice.demo
- com.snc.service_organization
- com.snc.csm_contributor_user
- com.snc.household
- com.sn_external_user_register
- com.snc.platform_document_management
- com.snc.signaturepad
- com.snc.financial_planning_pmo

Required App Dependencies

Application	Version
com.snc:app-customer-central	27.2.10
com.snc.npm:devsnc-sn-customer-activity	27.2.10
com.snc.npm:sn-customer-information	21.1.1
com.snc:app-consumer-service-portal	23.8.2
com.snc:app-csm-playbook	5.4.0
com.snc:app-ciwf-ui-component	3.6.0
com.snc:app-business-location	2.1.0
com.snc:app-install-base	3.1.2
com.snc:app-document-templates	27.0.0
com.snc:app-enterprise-content	2.11.0
com.snc:app-doc-verify	1.5.0
com.snc:policy-as-code-engine-ui	3.1.1
com.snc:policy-as-code-engine	3.1.1
com.snc.npm:sn-component-guidance-experience	35.0.1
com.snc:app-guided-decisions-guidance	35.0.1
com.snc:app-guided-decisions	34.0.1
com.snc.npm:sn-guided-action-experience	36.0.1
com.snc.npm:sn-guided-action-playbook-card	31.0.1

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Required App Dependencies (continued)

Application	Version
com.snc.npm:app-guided-decisions-experience	35.0.1
com.snc.npm:sn-next-best-action-list	34.0.1
com.snc:app-recommended-action	35.0.1
com.snc:app-cs-recommended-action	29.0.2
com.snc:app-recommended-action-advanced	10.0.2
com.snc.npm:sn-attach-article-guidance	9.0.0
com.snc:app-common-guidances	8.0.2
com.snc:app-alignment-planner-core	5.5.0
com.snc:app-planning-attributes-core	1.7.0
com.snc:app-goal-framework	4.7.0
com.snc:app-milestones	2.4.0
com.snc:app-alignment-workspace	8.4.0
com.snc:app-alignment-workspace-advanced	4.3.2
com.snc:app-smart-assessment-core	20.0.2
com.snc:sn-smart-assessment-designer	20.0.2
com.snc:sn-smart-assessment-connected	20.0.2

Budget categories in Grants Management

Budget categories.

By default, Grants Management comes with these categories. To configure these and add more, see .

Budget Category	
Administration	
Contractual	
Equipment	
Fringe Benefits	
Indirect Costs	
Materials and Supplies	
Personnel (inc. Salaries and Wages)	
Travel	
Other	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist for Public Sector Digital Services (PSDS)

With the Now Assist for Public Sector Digital Services (PSDS) application, your agents can use generative AI to summarize the details and comment activity of each public service case to get the context of the case.

Get started

Explore	Configure	Use
 Learn more about Now Assist for Public Sector Digital Services (PSDS) .	 Configure the Now Assist for Public Sector Digital Services (PSDS) application.	 Use generative AI capabilities offered by Now Assist for Public Sector Digital Services (PSDS).
	Use Public Sector Digital Services AI agent collection  Use agentic workflows in Public Sector Digital Services.	

Important:

- Not all model providers are available for customers with in-country SKUs, and some Now Assist products/features are currently unavailable for in-country customers. For more information, see the KB1584492 article in the Now Support Knowledge Base. Be sure to check for model provider availability updates in future releases.
- Some Now Assist products/features are currently unavailable for customers in the FedRAMP, NSC DOD IL5, or Australia IRAP-Protected data centers, self-hosted customers, or in other restricted environments. For more information, see the KB0743854 article in the Now Support Knowledge Base . Be sure to check for availability updates in future releases.
- Some Now Assist products/features are currently available only for customers in some regions. Be sure to check for availability updates in future releases.
- Some AI products and skills are not available in Regulated Markets. For more information, see KB2593939: Regulated Markets AI Products/Skills Not Available. Be sure to check for availability updates in future releases.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Troubleshoot and get help

- ServiceNow Community AI & Intelligence
- Search the Known Error Portal for known error articles
- Contact Customer Service and Support

AI limitations

This application uses artificial intelligence (AI) and machine learning, which are rapidly evolving fields of study that generate predictions based on patterns in data. As a result, this application may not always produce accurate, complete, or appropriate information. Furthermore, there is no guarantee that this application has been fully trained or tested for your use case. To mitigate these issues, it is your responsibility to test and evaluate your use of this application for accuracy, harm, and appropriateness for your use case, employ human oversight of output, and refrain from relying solely on AI-generated outputs for decision-making purposes. This is especially important if you choose to deploy this application in areas with consequential impacts such as healthcare, finance, legal, employment, security, or infrastructure. You agree to abide by ServiceNow's AI Acceptable Use Policy, which may be updated by ServiceNow.

Data processing

This application requires data to be transferred from ServiceNow customers' individual instances to a centralized ServiceNow environment, which may be located in a different data center region from the one where your instance is, and potentially to a third-party cloud provider, such as Microsoft Azure. This data is handled per ServiceNow's internal policies and procedures, including our policies available through our CORE Compliance Portal.

Data collection

ServiceNow collects and uses the inputs, outputs, and edits to outputs of this application to develop and improve ServiceNow technologies including ServiceNow models and AI products. In addition, this application will collect case information (for case summarization) and test run information (for test summarization). Customers can opt out of future data collection at any time, as described in the Now Assist Opt-Out page.

For more information, see the Now Assist documentation.

Exploring Now Assist for Public Sector Digital Services (PSDS)

With the Now Assist for Public Sector Digital Services (PSDS) application, your agents can use AI capabilities to perform various tasks on a government service case.

Important:
Some Now Assist products/features are currently available only for customers in some regions. Be sure to check for availability updates in future releases.

Features

The Now Assist for PSDS application includes the following AI features that enable your agents to work through cases.

Government case summarization skill

Condenses comprehensive case records into concise summaries, including the issue and the actions taken, enabling agents to grasp case contexts and respond effectively to inquiries. Generates detailed resolution information for specific government case types, allowing agents to propose solutions to constituents or business contacts and integrate this information into the case record.


The case summarization skill generates a case summary and displays it above the activity stream. The summary includes the information that the agent enters in the following case record fields:

- Short description
- Description
- Work notes

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Additional comments
- Email
- Service level agreement (SLA)

Government case record with case summary

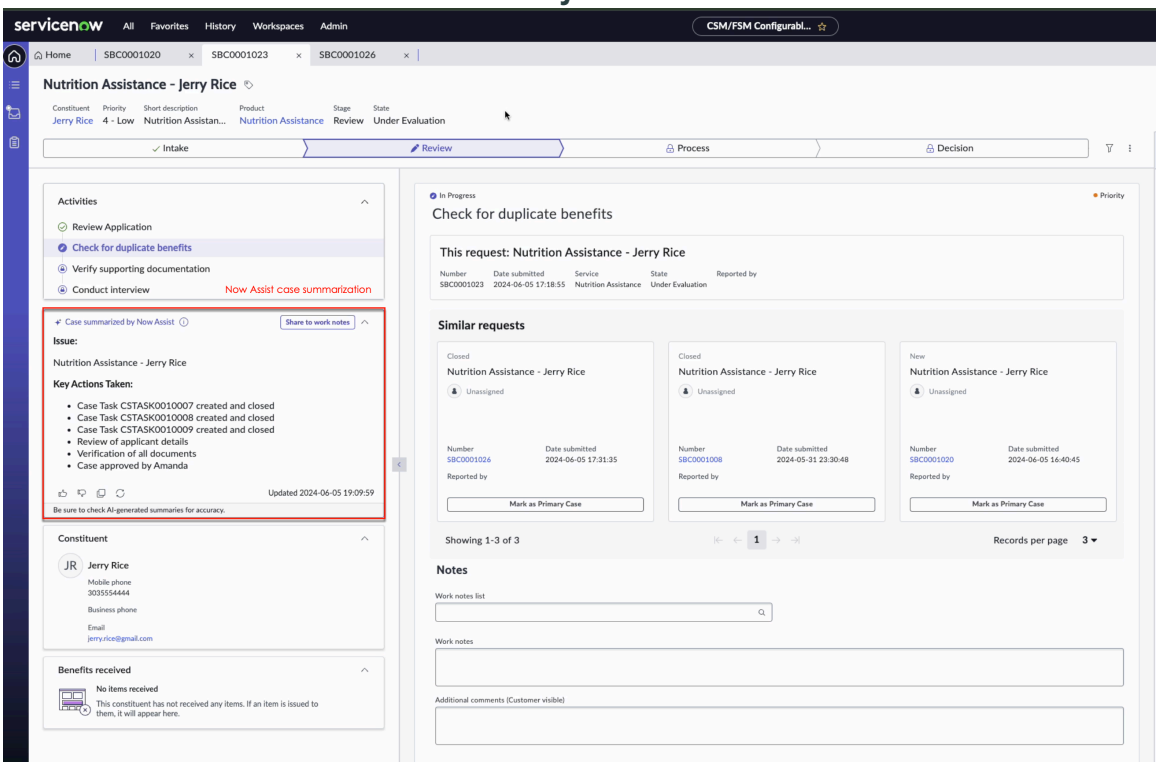

Chat summarization skill

Automatically generate summaries of agent-facing chats, capturing the context of conversations between agents and constituents or virtual agents at different points of the handoff, such as when a Virtual Agent chat history is handed off to a live agent, or when one live agent hands off a chat history with a customer to another live agent. This functionality enables critical information from interactions to be readily accessible for future reference and action.

Now Assist for AI Search

Leverage single-turn capabilities for legislation and policy summarization, providing agents with succinct overviews of complex documents and enhancing the ability to navigate and comprehend extensive legislative materials. This skill provides actionable AI-generated or AI-selected answers in searches, synthesizing and summarizing information from multiple knowledge bases to deliver relevant answers in a conversational format.

Fee waiver AI Agent skill

Determines the fee breakdown for an information request by working to arrive at a subtotal fee estimate, a recommendation for whether a fee waiver request should be approved or rejected, including reasons for any rejection, and a total fee estimate, with the fee waiver, if applicable. This skill works via the Information Request Fee Estimation AI Agent to provide an autonomous decision based on guidelines added in a specific knowledge article. For information on standalone AI agents in Public Sector, see Agentic AI for Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

- Not all model providers are available for customers with in-country SKUs, and some Now Assist products/features are currently unavailable for in-country customers. For more information, see the KB1584492 article in the Now Support Knowledge Base. Be sure to check for model provider availability updates in future releases.
- Some Now Assist products/features are currently unavailable for customers in the FedRAMP, NSC DOD IL5, or Australia IRAP-Protected data centers, self-hosted customers, or in other restricted environments. For more information, see the KB0743854 article in the Now Support Knowledge Base . Be sure to check for availability updates in future releases.
- Some Now Assist products/features are currently available only for customers in some regions. Be sure to check for availability updates in future releases.
- Some AI products and skills are not available in Regulated Markets. For more information, see KB2593939: Regulated Markets AI Products/Skills Not Available. Be sure to check for availability updates in future releases.

Now Assist panel in CSM Configurable Workspace

An agent can use the Now Assist panel in CSM Configurable Workspace. This conversational interface enables an agent to request a case summary and generate the case resolution notes. For more information about the Now Assist panel, see Now Assist panel.

Now Assist in AI Search

The Now Assist in AI Search application uses Now LLM Service to extract actionable Q&A Genius Result answers from the knowledge articles that are found in Service Portal, Virtual Agent, Employee Center, and global searches. By using this application, an agent can improve the customer's experience by retrieving the relevant content from the knowledge base and generating concise answers. For more information, see Now Assist in AI Search.

Sensitive data handling

Personally identifiable information and other sensitive data is masked so that it does not appear in generative AI prompts. Placeholder text is sent with the prompt instead, and that placeholder text is replaced with the original text after the response has been received. This two-way masking ensures that your users see the correct values, but the Now LLM Service is not exposed to any sensitive information. For more information, see Multi-turn catalog ordering.

Troubleshoot and get help

- ServiceNow Community on AI and Intelligence
- Search the Known Error Portal for known error articles
- Contact Customer Service and Support

AI limitations

This application uses artificial intelligence (AI) and machine learning, which are rapidly evolving fields of study that generate predictions based on patterns in data. As a result, this application may not always produce accurate, complete, or appropriate information. Furthermore, there is no guarantee that this application has been fully trained or tested for your use case. To mitigate these issues, it is your responsibility to test and evaluate your use of this application for accuracy, harm, and appropriateness for your use case, employ human oversight of output, and refrain from relying solely on AI-generated outputs for decision-making purposes. This is especially important if you choose to deploy this application in areas with consequential impacts such as healthcare, finance, legal, employment, security, or infrastructure. You agree to abide by ServiceNow's AI Acceptable Use Policy, which may be updated by ServiceNow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Data processing

This application requires data to be transferred from ServiceNow customers' individual instances to a centralized ServiceNow environment, which may be located in a different data center region from the one where your instance is, and potentially to a third-party cloud provider, such as Microsoft Azure. This data is handled per ServiceNow's internal policies and procedures, including our policies available through our CORE Compliance Portal.

Data collection

ServiceNow collects and uses the inputs, outputs, and edits to outputs of this application to develop and improve ServiceNow technologies including ServiceNow models and AI products. In addition, this application will collect case information (for case summarization). Customers can opt out of future data collection at any time, as described in the Now Assist Opt-Out page.

For more information, see the Now Assist documentation.

Related topics

- Now Assist
- Configure Now Assist for Public Sector Digital Services (PSDS)
- Using Now Assist for Public Sector Digital Services (PSDS)
- Exploring Now Assist Admin

Chat summarization in Now Assist for Public Sector Digital Services (PSDS)

Use the chat summarization feature in Now Assist to automatically generate summaries of chat conversations in Virtual Agent. The chat summary enables an agent to quickly gain an understanding of the interaction without reading the entire transcript of the conversation, and saves your requester from having to repeat the same information they provided to the Virtual Agent.

Summarize a chat with Now Assist for Customer Service Management

The chat summarization skill generates a condensed version of the conversation between live agents or between a requester and Virtual Agent. A chat summarization is auto-generated when:


- The conversation ends
- The agent uses the `/summarize` quick action in Agent Chat
- The user selects **Chat Summarization** or enters `summarize chat` in the **Ask Now Assist to** field on the Now Assist panel
- An interaction is transferred from Virtual Agent to a live agent and the conversation is at least six lines long. The chat summarization displays in a summary card in the conversation.

In the playbook Interaction record, Chat Summary and Short Description fields are automatically generated after chat has ended, with the blue box indicating that Now Assist has modified the field value. When the system generates a summary and automatically populates the **Chat summary** field, it also displays an AI icon above the field which indicates that the summary is generated by AI, and displays a banner at the top of the Interaction record. The message in the banner advises the agent to check the summary for accuracy and update the information if it is not accurate.

When a chat summary is generated, it is automatically added to the **Chat summary** field on the Interaction record. An agent can modify and save the information in the **Chat summary** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Chat summarization in Now Assist for PSDS

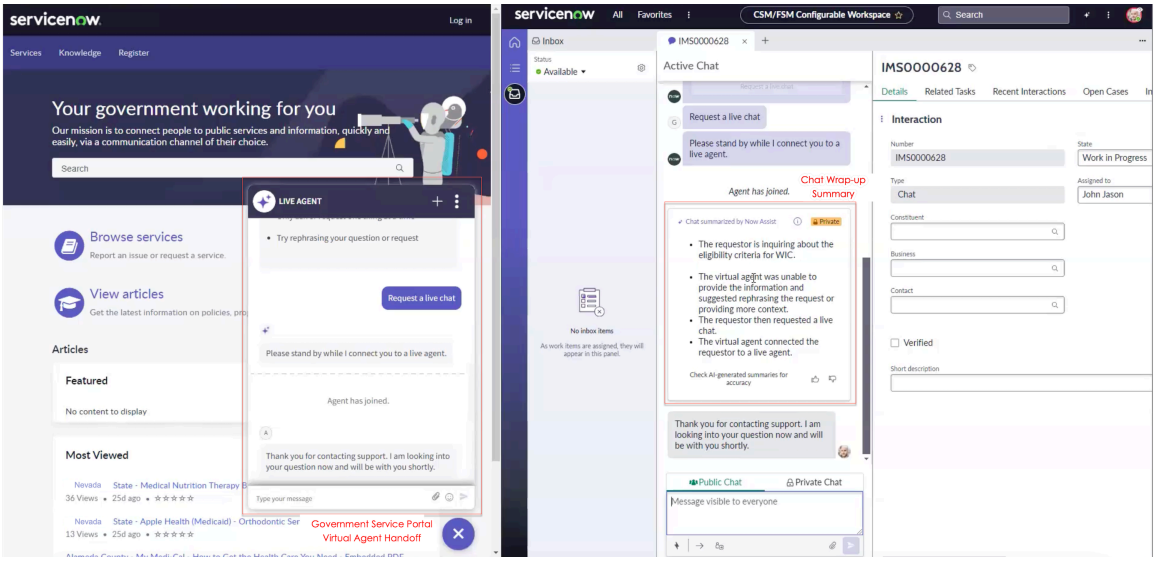


Summarize chat conversations between virtual agents, live agents, and users. This helps future agents understand the context of the conversation, and provides a concise overview of actions taken and resolution steps.

Chat summarizations are generated in these situations:

- When chat interaction is transferred from Virtual Agent to a live agent and the conversation is at least six lines long.
- When the chat conversation ends.
- When the agent uses the /summarize quick action in Agent Chat.
- When the user selects Summarize conversation or enters summarize chat in the Now Assist panel.
- When a live agent transfers an interaction to a different live agent.

AI Search for Now Assist for Public Sector Digital Services (PSDS)


The AI Search index stores data from Platform records, Knowledge Base articles, or external sources, and makes that data available for agents to search in the CSM Configurable Workspace. An admin can configure where the data is pulled from. Search query features use ServiceNow AI Platform technologies to improve the search user experience.

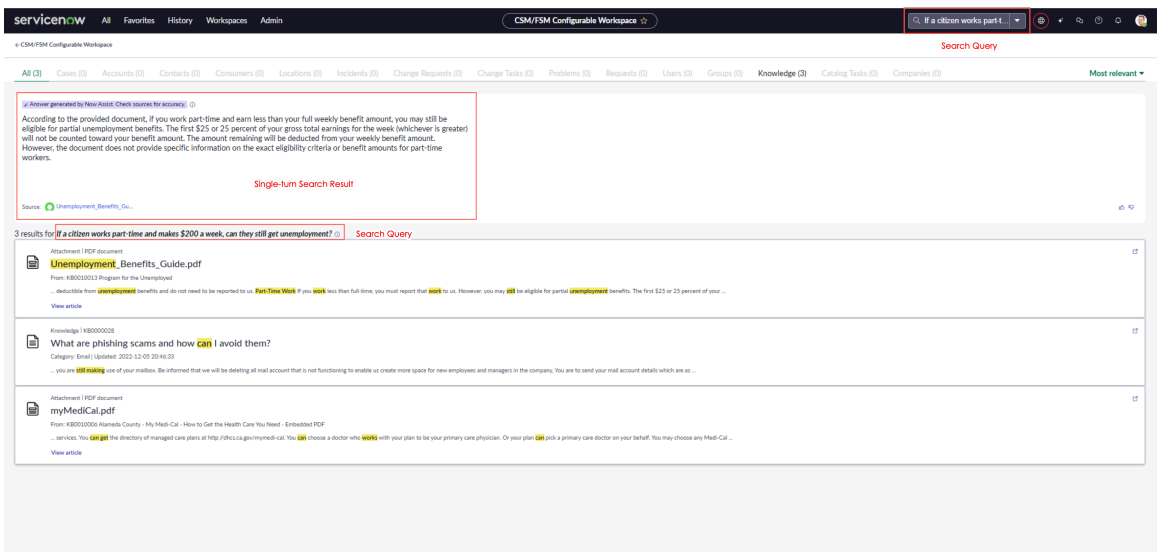

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Watch this video to see how Public Sector Digital Services agents can find answers using AI Search. For information on AI Search see AI Search.

Generative AI Q&A in CSM Configurable Workspace

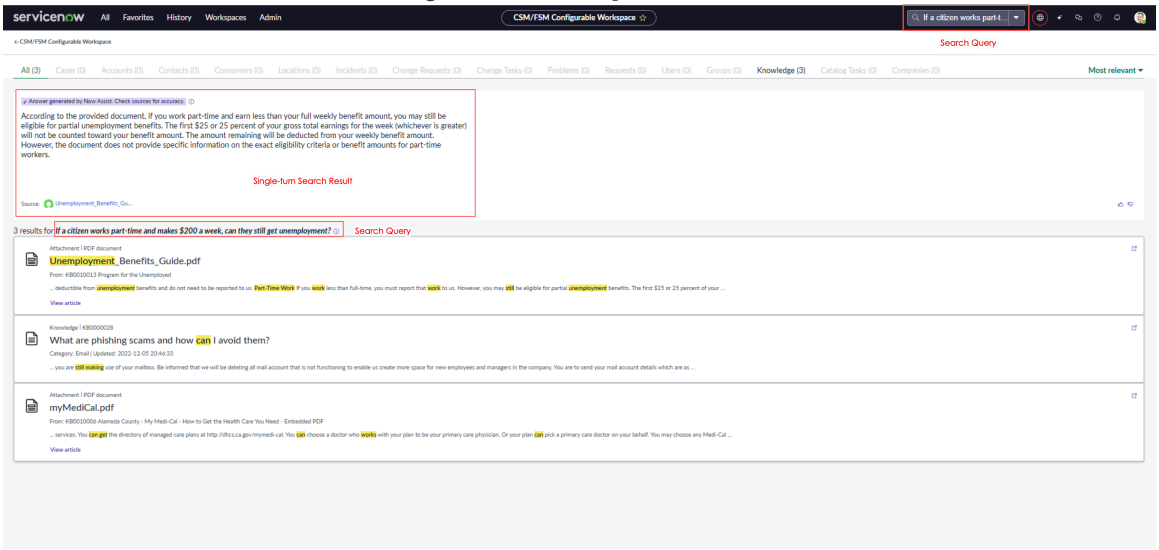

Agentic AI for Public Sector Digital Services

Two Now Assist for Public Sector Digital Services (PSDS) AI Agents are available for use with the **Help Manage Public Information Requests** workflow, as part of the Public Sector Digital Services AI Agent Collection.

AI Agents and agentic workflows are configurable through the AI Agent Studio. The AI Agent Studio is available to administrators as part of Now Assist for Public Sector Digital Services (PSDS). The AI Agent Studio allows admins to configure, test, and manage AI agents using natural language and prebuilt workflows. These agents can automate tasks like fee estimation and information request handling.

The Now Assist AI Agents are entities that mimic human-like intelligence by using large language models (LLMs). AI agents can perform tasks that range from simple automated responses to complex problem solving. By using AI agents, you can help reduce the workloads of your live agents and help increase their productivity.

Public Sector Digital Services has the following Agentic AI workflows and agents:

Help manage public information requests Workflow

Information Request Fee Estimation AI Agent: This AI agent is designed to estimate fees for information request case records. It will analyze past cases with similar requests and use their estimated fees to generate an estimate for the target case, as well as an explanation for its estimation.

Information Request Fee Waiver Review AI Agent: The AI Agent analyzes the user-provided justification for a fee waiver for an information request case, validating it based on a set of predefined rules from an external indexed source (such as a KB article) and recommending whether the request should be approved or denied. The agent will also provide an explanation for its decision.

Configure Now Assist for Public Sector Digital Services (PSDS)

If you have the admin role, you can configure the Now Assist for Public Sector Digital Services (PSDS) application so that your agents and managers can use the generative-AI skills in CSM Configurable Workspace and in Core UI.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use the Now Assist Admin console to configure Now Assist for Public Sector Digital Services (PSDS). This console contains everything that you need to install the available Now Assist plugins and configure generative AI skills. For additional information, see Overview tab in Now Assist Admin.

The following table lists the features and skills that are available for use with Now Assist for Public Sector Digital Services (PSDS) and are accessible through the Now Assist Admin console.

Features and skills available for activation in the Now Assist Admin console

Available Features	Skills
Chat	• Chat summarization • Chat recommendation • Sidebar recommendation
Case	• Government case summarization
Search	• Legislation summarization • Search summarization • Extract Q&A answers from knowledge base articles upon search

Note:

Now LLM Service is currently the only provider for this Now Assist application's skills.

Configure a skill in Now Assist for Public Sector Digital Services (PSDS)

Configure the triggers, settings, and display locations for Now Assist skills to enable GenAI capabilities across the Public Sector Digital Services agent platform.

About this task

Each skill is configured separately, and tailored to support agents across various platforms. The following Now Assist skills are available to be configured for use within Public Sector Digital Services:

Now Assist skill overviews

Skill	Description
Chat Summarization	Generate condensed summaries of conversations between agents or Virtual Agents and highlight key points for quick reference. For more information, seeConfigure Chat summarization.
Case Summarization	Summarize the case details and display this information on the case record, helping the agents to come to speed quickly on cases. For more information, see Configure Case summarization.

The Now Assist Admin console contains everything that you need to install the plugins and configure the generative AI skills. For additional information, see Overview tab in Now Assist Admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

General Configuration Steps

The Now Assist Admin console contains everything that you need to install the plugins and configure generative AI skills. For additional information, see Overview tab in Now Assist Admin.

Each skill has its own configuration process. However, skill activation follows the same guided setup. What configuring steps are required varies depending on the skill.

Common Configuration components:

- **Trigger**: Allows you to configure the circumstances in which a skill is generated. For example, chat summarizations can be configured to generate when the chat handoff is done from a live agent to a live agent.
- **Input**: Configure the data used to create the information generated by the skill.
- **Availability**: customize how and when the skill capability is active and accessible.
- **Access**:determine who can access this skill. By selecting specific roles, you're controlling who can use it. The roles you choose will also be available in the next step, **Select display**.
- **Display:** determine where the skill appears. For example, the case summarization skill can be configured to display on forms and workspaces or in the Now Assist panel.

Saving and activating the configuration setup process is the same across all Now Assist skills.


Before you begin

Role required: sn_nowassist_admin.user, admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure


1. Navigate to **All** > **Now Assist Admin** > **Features** to access the **Features** tab of the Now Assist Admin console.

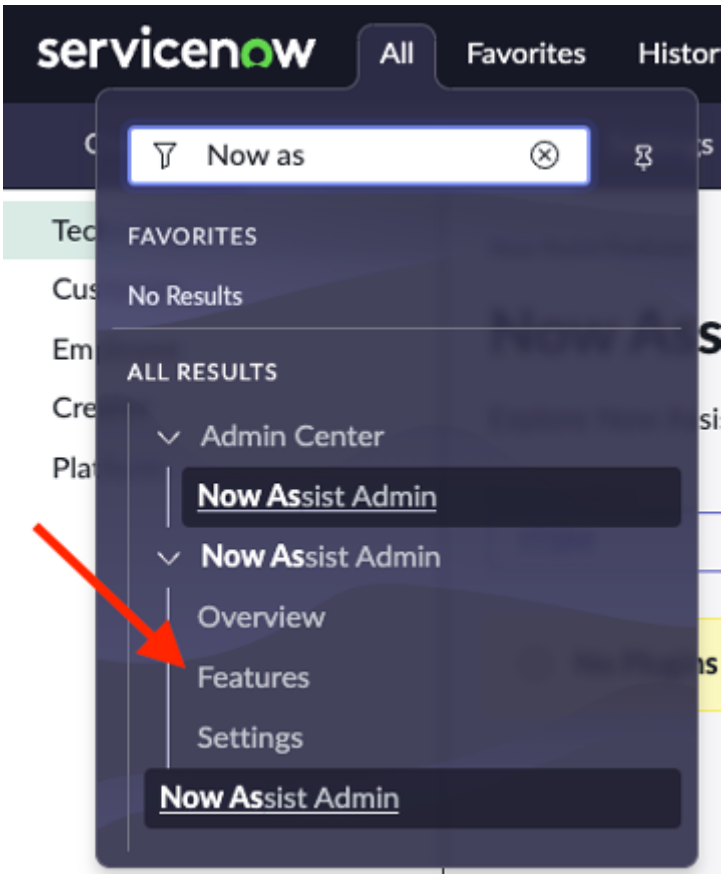

2. Activate and configure the skills for the Now Assist for PSDS.
   The following Now Assist for PSDS skills can be customized:
   - Case Summarization
   - Chat Summarization


   These features are grouped under the **Customer** workflow group. Select **PSDS** in the dropdown to access the skills for Now Assist for Public Sector Digital Services (PSDS). Each feature has its associated skills.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

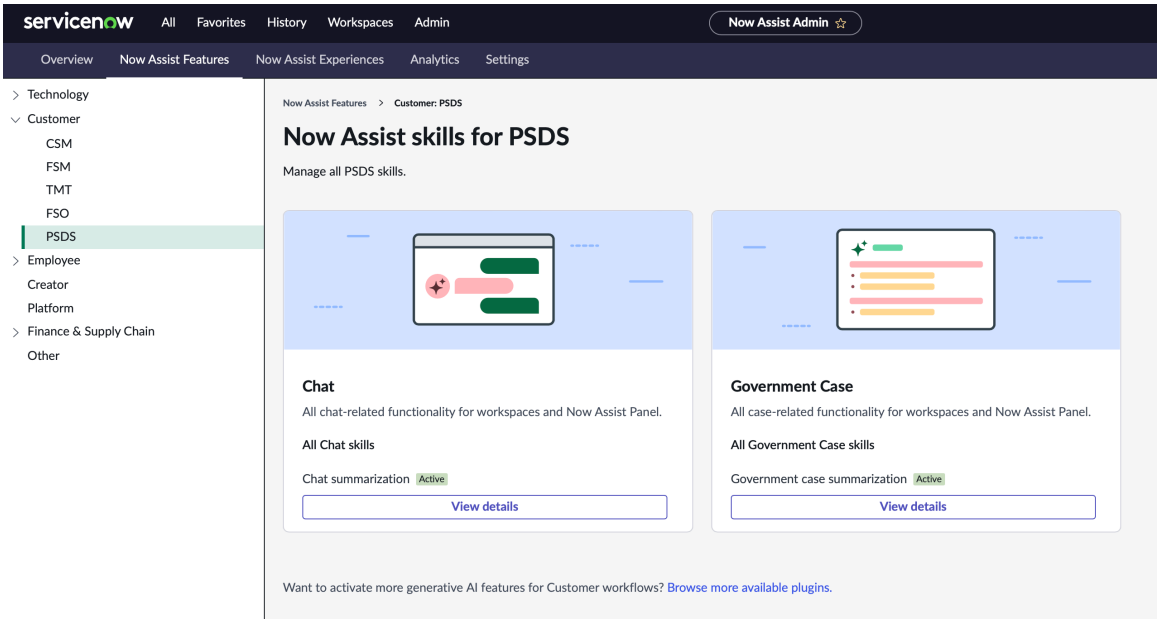

3. On the feature card that is associated with the skill that you would like to activate, select **View details**.


   For the Government case summarization skill, select **View details** under the Government case feature card.

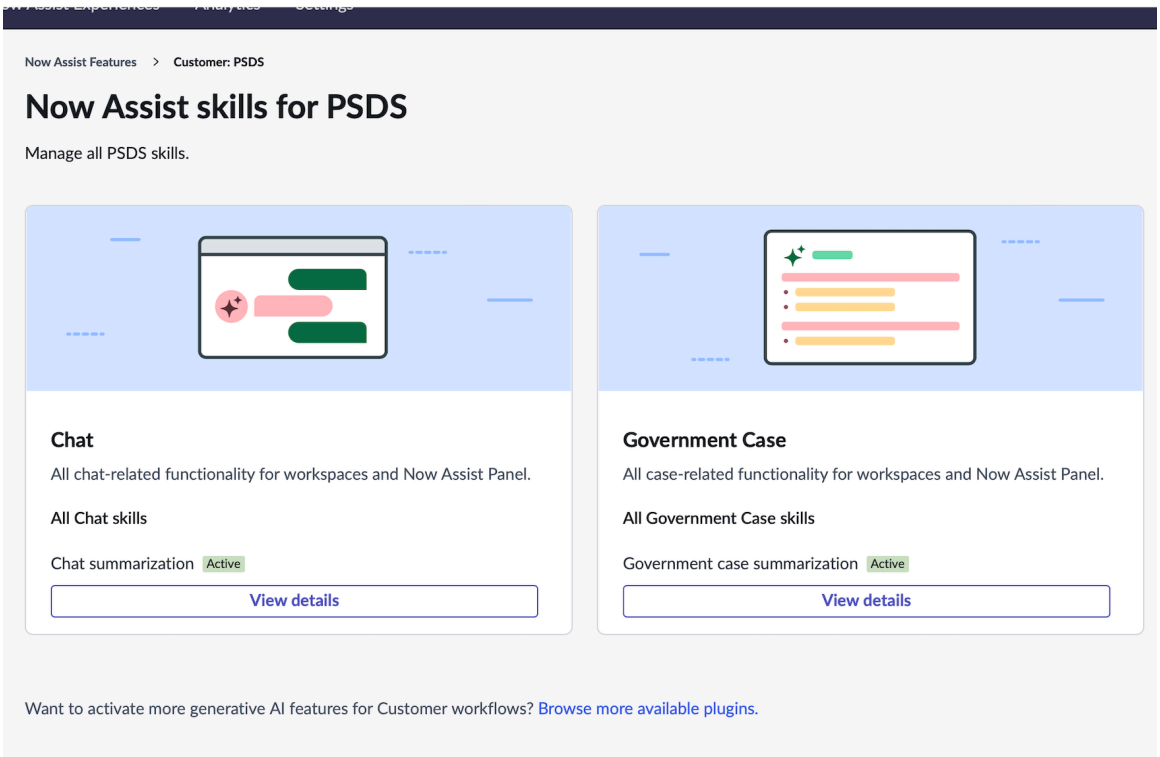

4. In the All available skills section for the desired feature, select **Activate skill**.
5. Select the inputs or triggers for the selected skill.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Define trigger screen for the Chat summarization skill

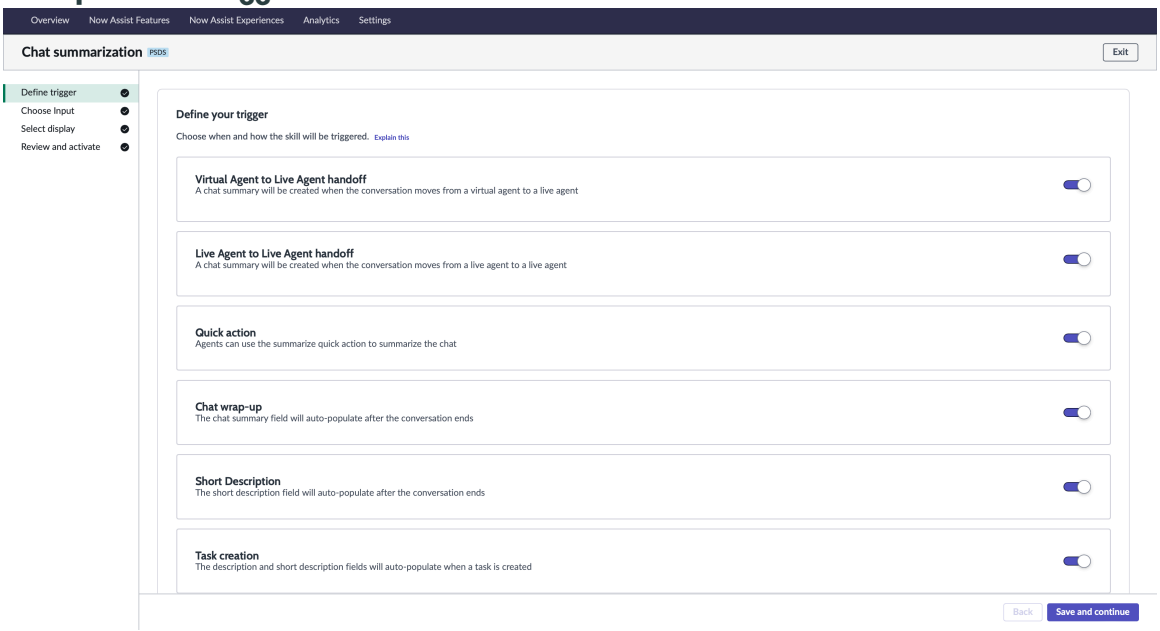

6. After you configure all inputs or triggers for the selected skill, select **Save and continue** to go to the next step.
   You can return to a previous step by using the **Back** button.
7. Define the availability of the skill.

   Note:
   This step applies to the case summarization and resolution notes generation skill. If you're configuring the chat summarization skill, you will see the next step as **Choose input**. You can select the customer-facing portals that you want to use as the source of the input data. The default product portal and portals that are already in use by other products can't be selected.


   You can configure the skill to be always available to users, or you can select conditions that must be met before the skill is available. Selecting **Customize skill availability** displays a condition builder.

8. After you configure the skill availability, select **Save and continue** to go to the next step.
9. Select where you would like to display the skill.
   - **In-product**: When selected, the Now Assist skills are displayed on forms and workspaces. For the skills that appear in-product, select the down arrow to identify the roles that can use the skill.
   - **Now Assist panel**: When selected, Now Assist skills are available in the Now Assist panel. If you don't see this option, you must activate the Now Assist panel. For more information, see Activate the Now Assist panel standard chat. For the skills that appear in the Now Assist panel, select the down arrow to identify the roles that can use the skill.

     Note:
     Selecting **In-product** will allow the case summarization card to show on the process based experience playbook page in the CSM Configurable Workspace. For Government case summarization, select **In-product**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

10. After you configure the display for the selected skill, select **Save and continue** to go to the next step.
11. Review your choices and select **Activate** to complete the configuration.

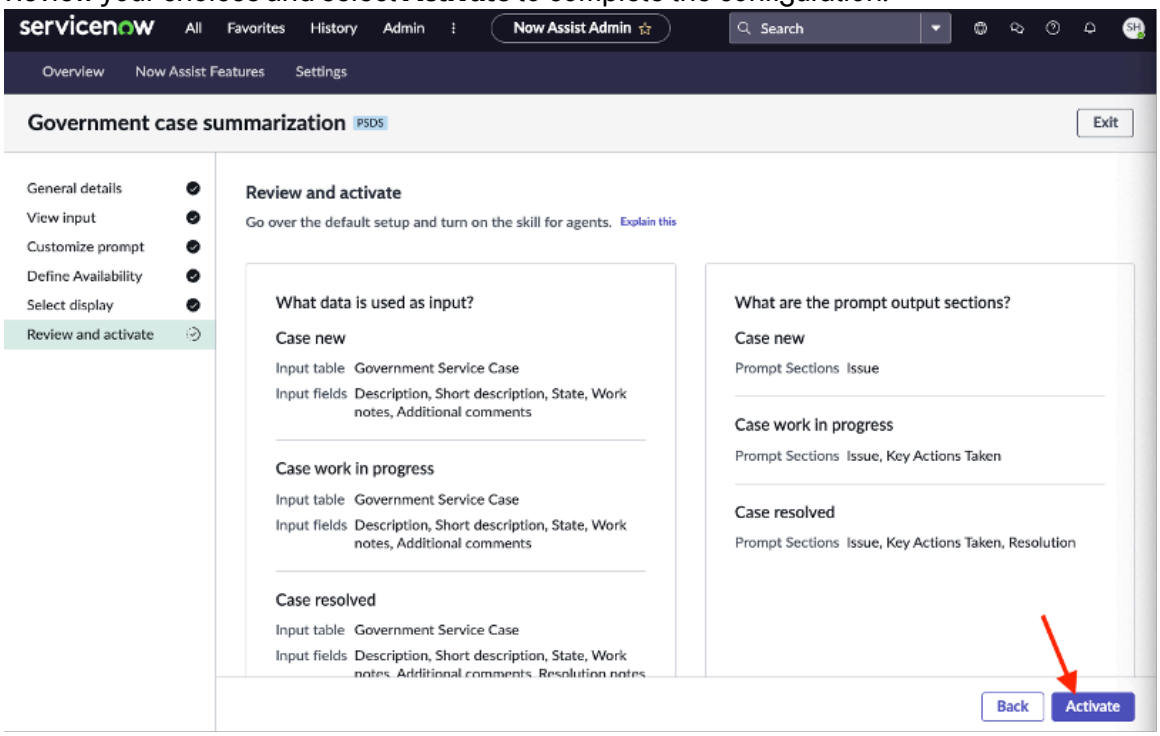

Result
Your skill is configured.

What to do next
You can go back to the Now Assist Features page to configure another skill.

Related topics

- Now Assist
- Configure Now Assist for Public Sector Digital Services (PSDS)
- Using Now Assist for Public Sector Digital Services (PSDS)

Configure chat summarization skill in Now Assist for Public Sector Digital Services (PSDS)

Configure the Now Assist for Public Sector Digital Services (PSDS) skill so that agents can use the generative AI skills in CSM Configurable Workspace and in Public Sector Digital Services Core UI.

Before you begin
Role required: sn_nowassist_admin.user, admin

About this task
Agents can utilize chat summarization, powered by Now LLM, to gain contextual understanding of support issues throughout a chat's lifecycle, even if it involves virtual agent interactions, transfers to live agents, or multiple hand-offs between agents.


In the Now Assist for PSDS Admin Console, admins can:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Define the trigger that determine when a summary is generated (chat handoff, quick action, wrap-up)
- Define where to display (CSM Workspace and/or Now Assist panel)
- Add/remove roles to control who can view the skill

Procedure

1. Navigate to **All** > **Now Assist Admin** > **Features** to access the **Now Assist Features** tab of the Now Assist Admin console.
2. In the dropdown, select **Customer** > **PSDS**.

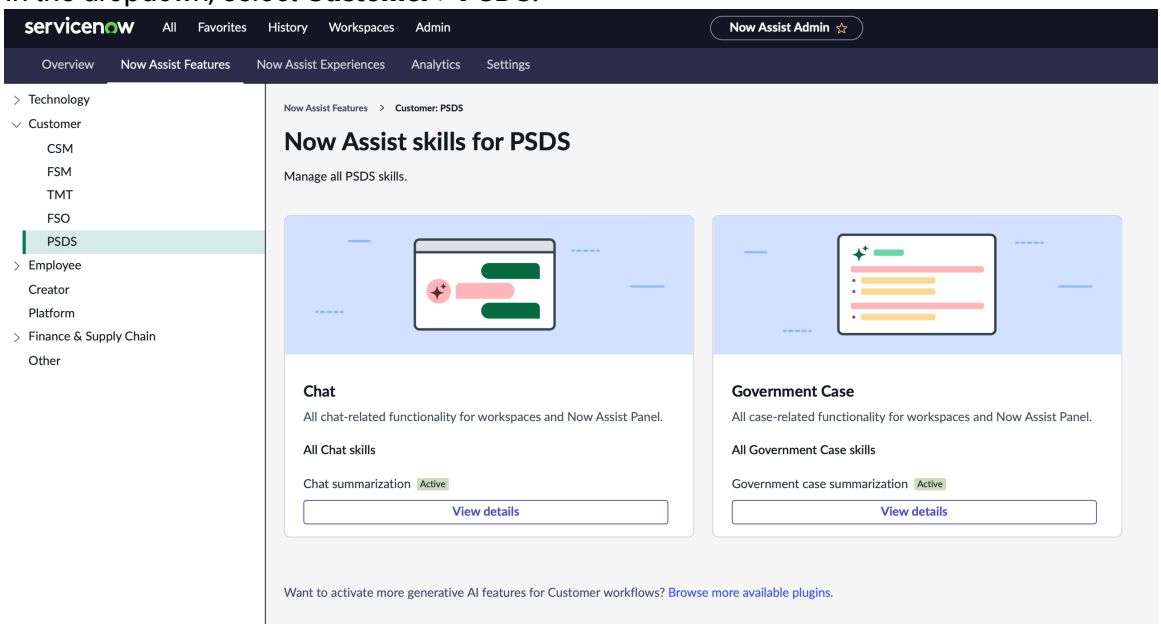

3. On the Chat feature card, select **View Details**, then select **Chat Summarization** under Active Skills.
   By default, the chat summarization skill is activated for Now Assist for PSDS. If it is not active, select **Activate Skill** in the All available Chat skills section of the chat recommendation card.
4. Select **Define Trigger**, the first step in the guided setup.

   By default, many of the options in the setup are configured for the most common use cases. You can use the **Back** button to navigate through the steps.
5. Using the toggles, select what actions trigger the chat recommendation skill.
6. Select whether you want the summary to be formatted with bullet points.

   By default, summaries are written with bullet points, but can be configured to appear in paragraph form by toggling this off.
7. Go to **Choose Input** by selecting **Save and continue**.
8. **Optional:** Select any additional data sources that you want the large language model (LLM) to take into account when generating the chat summary.
9. **Optional:** Select any additional portals to allow chat summaries to be generated for conversations occurring on that portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If **Add Additional Data Sources** is toggled on, the admin **must** specify a portal and enable a specific channel in the Portals dropdown for the requester to be able to initiate the chat on that portal. Otherwise, the agent will receive an error message. By default, Government Service Portal (GSP) for PSDS is selected as the portal, and cannot be deselected.


10. Select **Save and continue**.
11. Go to **Select display**, and select where you would like to display the skill.

    You can select both in-product, Now Assist panel, or both.

    - **In-product**: When selected, Now Assist skills are displayed on forms and workspaces.
    - **Now Assist panel**: When selected, Now Assist skills are available in the Now Assist panel. If you don't see this option, you must activate the Now Assist panel. For more information, see Activate the Now Assist panel standard chat.

      Select the down arrow to configure the user roles that can access the skill.

    Select the arrow near the toggle to select roles for who can access the skill. You can add roles by entering the name of the role in the **User roles** field. You can remove existing roles by selecting the **X** icon in the role bubble. You must have at least one role specified, but you can add as many roles as you like.
12. Review your choices and select **Activate** to complete the skill configuration.

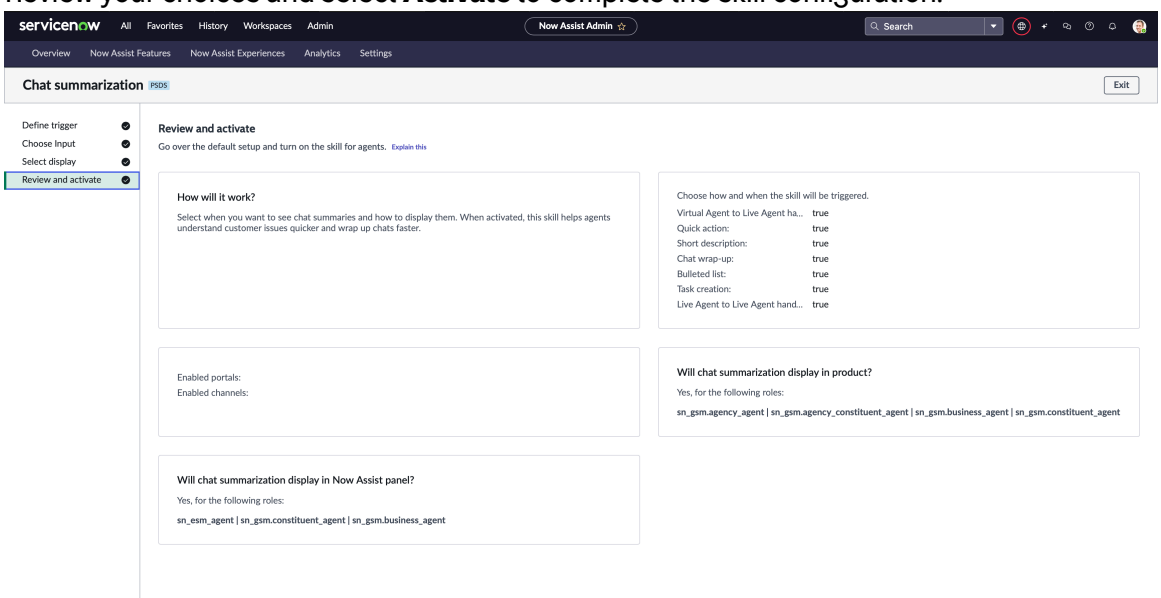

Result
Chat summarization is active and customized for the desired workflow.

What to do next
Review the performance of the Now Assist for PSDS chat summarization skill on the Now Assist Admin console. Learn more about tracking your Now Assist usage at Monitoring Now Assist usage in Subscription Management.

Configure the Government case summarization skill in Now Assist for Public Sector Digital Services (PSDS)

Activate and customize the Government case summarization skill in the Now Assist for Public Sector Digital Services (PSDS) application so that government service agents can use the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

generative AI skills in CSM Configurable Workspace and in Public Sector Digital Services Core UI.

About this task

Government service agents can utilize case summarization, powered by Now LLM, to gain contextual understanding of constituent issues throughout the case's lifecycle. The case summarization skill auto-generates informative summaries that distill key details from work notes, comments, and other case data, which can help agents resolve cases faster.

With case summarization enabled, agents can use Generative AI to summarize the key information of each government case to understand the context and get a concise overview of actions taken and resolution steps.


Note:
The base system includes a pre-configured case summarization skill.

Before you begin

Role required: sn_nowassist_admin.user, admin

Procedure

1. Navigate to **All** > **Now Assist Admin** > **Features** to access the **Now Assist Features** tab of the Now Assist Admin console.
2. In the dropdown, select **Customer** > **PSDS**.

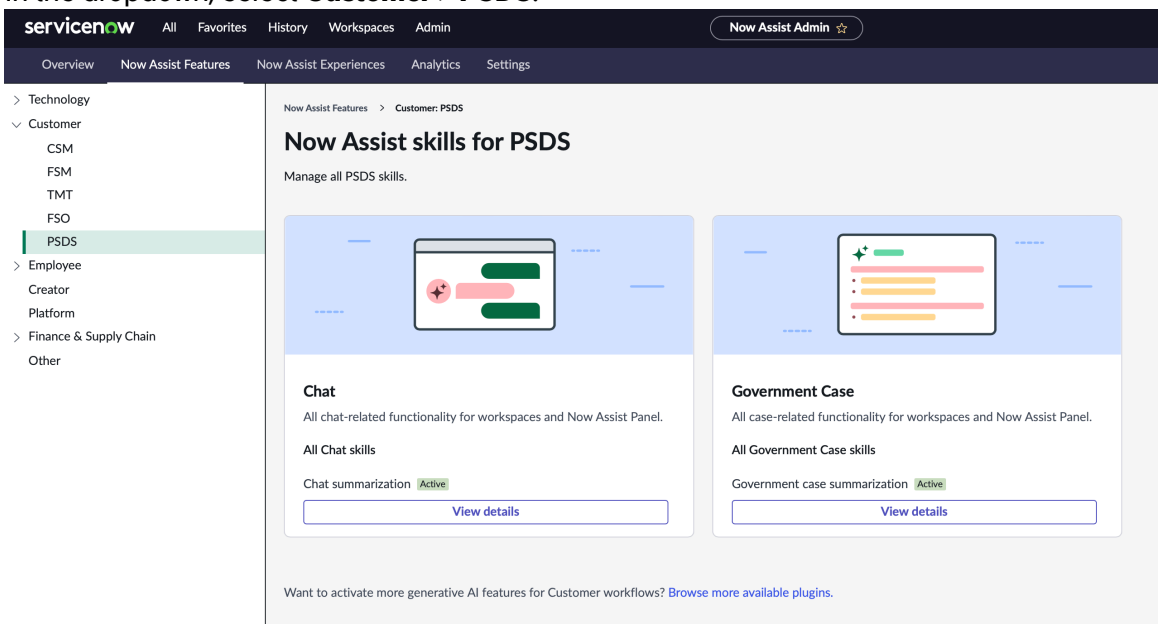

3. On the Government case feature card, select **View Details**, then select **Case Summarization** under Active Skills.
   By default, the case summarization skill is activated for Now Assist for PSDS. If it is not active, select **Activate Skill** in the All available Chat skills section of the case recommendation card.
4. In the Active skills section, locate the **Government case summarization** skill.
5. Select the More actions icon for the skill in the Active skills section, and create a copy that you can customize by selecting **Make a copy**.

   The copy that you make is listed in the Active skills section.
6. Select the copied skill from the Active skills section to open it.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A guided setup leads you through the configuration of the general details, input, prompt, availability, display, review, and activation of the customized skill. If you complete the entire walk-through, the case summarization skill is activated.

7. In the General details step, fill in the fields.
   For information about the inputs and triggers for each skill, see Skill inputs for Now Assist for Public Sector Digital Services (PSDS).
   a. Enter a name and description for the skill.
   b. Select **Save and continue** to go to the next step.
8. View the input data for each skill, such as the base input fields and related lists for the different input templates (Case new, Case work in progress, and Case resolved states).

   View Input displays the data the large language model (LLM) considers when creating a response. The input fields and rule conditions form an input template.

   Configure the base input table fields and related lists for the different input templates (Case new, Case work in progress, and Case resolved states) for the skill.


   Each skill relies on a base input table and input fields with descriptions to provide context for the Now LLM Service to generate a response.

   Select only those related tables that are offered as the base system, as part of the input data.

   a. For each input template state (New, Work in progress, and Resolved), select **+New base input field** and configure the base input table fields.

      Add multiple base input fields, as necessary.

View input step

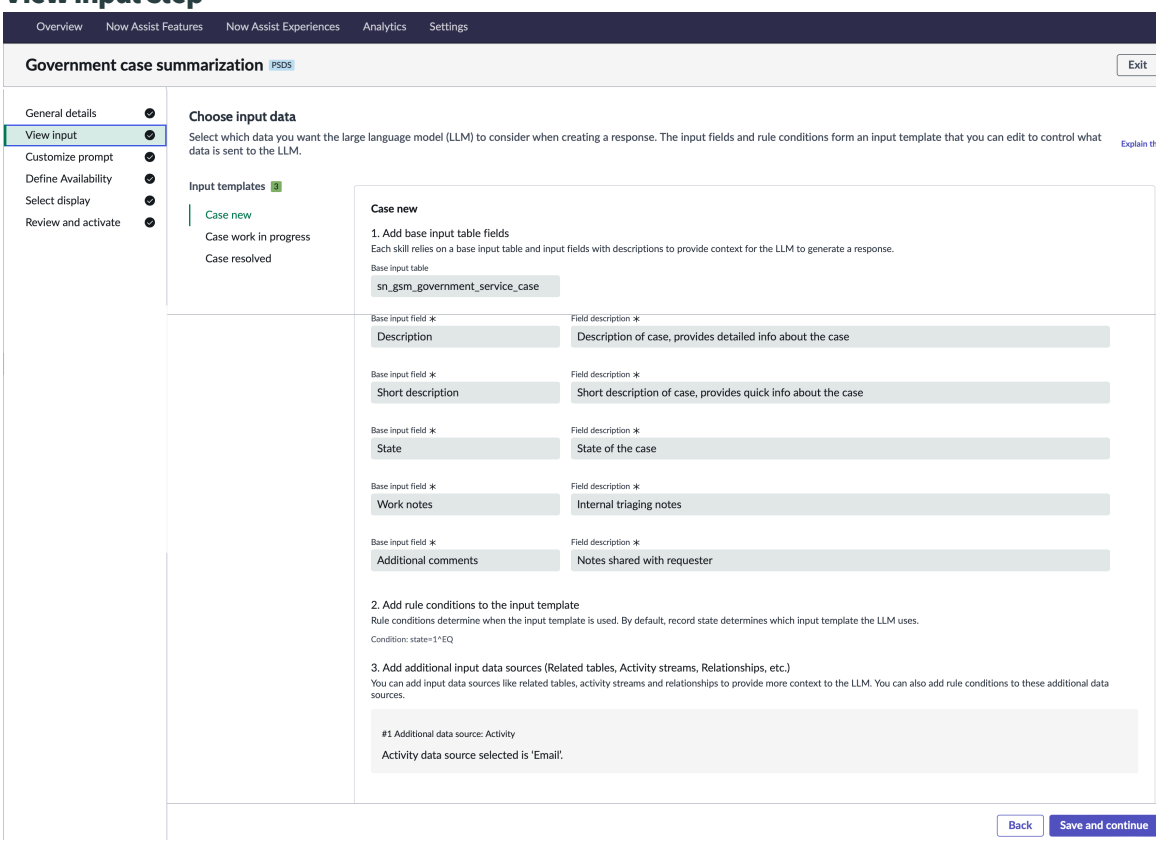

The following table lists the base input table fields and descriptions, including a relevant example.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Base input fields

Field	Description
Base input field	Field in the case table whose value this skill uses in its response. For example, `Short description`.
Field description	Description of the base input field value. For example, `Short description of case, provides brief information about the issue.`

b. For each input template state (New, Work in progress, and Resolved), configure the rule conditions by using the condition builder to filter the data.

The rule conditions determine when the input template is used. By default, the record state determines the input template that the Now LLM Service uses.

You can build the condition out further by selecting **+New condition set** and configuring additional parameters.

The following table lists the input template states.

Input template states

State	Description
New	State is New.
Work in progress	State is Work in Progress.
Resolved	State is Resolved.

c. For each input template state (New, Work in progress, and Resolved), select **+New data source** to configure the additional related table and activity stream data, as needed.

Adding input data sources, like the related tables and activity streams, provide more context to the Now LLM Service in a related list.

You can also add the rule conditions to these additional data sources.

The selection of the related table fields may have a direct impact on the quality of the corresponding prompt header. For example, if a prompt header requires a specific field from the related table, but that field isn't selected as input, the summary for that prompt header will contain missing information. For example, as a base case, you see one related table, such as Service level agreement (SLA), that includes all the required fields and filtering conditions for the prompt header. The SLA prompt header is preselected to help you understand how the related table, its fields, and the prompt header work together to produce a summary. You can use the SLA as a reference to configure the other related tables to determine which fields to select and which description adds the requirements of their respective prompt headers. Apply any additional conditions to filter the data further.

d. Select **Save and continue** to go to the next step.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

9. Customize the prompt.

   To customize prompts for each input template, add new sections that will be added to the summary.

   Review and test the prompt for each input template configuration. You can edit the prompt by adding new predefined sections and reordering them, as needed.

   a. For each input template state (New, Work in progress, and Resolved), select the prompt sections from the list of available sections to include in the generated summary.

      To add a section, you must configure the relevant input data prior to this step.

      The available prompt sections that you can select:

      - **Issue**
      - **Key Actions Taken**
      - **Resolution**

      The following table lists the mandatory prompt headers.

      Mandatory prompt headers

Input template state	Mandatory prompt header
New	Issue
Work in progress	▪ Issue ▪ Key Actions Taken
Resolved	▪ Issue ▪ Key Actions Taken ▪ Resolution

      You can add the **Waiting on customer** prompt to cases only if the case has an **Awaiting info** state. Otherwise, adding this header to other states could cause the Now LLM Service to generate inaccurate or unreliable results.

   b. Select **Save** to continue to the test response.

   c. Select a case record in the Test response section, and test the prompt response output format by selecting **Run Test**.

   d. Select **Save and continue** to go to the next step.

10. Define how the skill is available to your users.
    Customize how and when the skill capability will exist and be available. If customize skill availability is selected, add the criteria below to define the conditions under which the skill is made available.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Configure the skill to be always available to users, or select conditions that must be met before the skill is available.
Selecting **Customize skill availability** displays a condition builder to filter the data further.

b. Select **Save and continue** to go to the next step.

11. Configure where to display the case summarization.
Toggle on In-product to display chat summarization in a Workspace or on a CoreUI form. Select Now Assist panel to display the chat summarization in the panel. To restrict access to the content by role, click > under Display and enter the user roles.

a. Select either **In-product**, or **Now Assist panel**.

- **In-product**: When selected, the Now Assist skills are displayed on the forms and workspaces.

  For the skills that appear in-product, select the down arrow to identify the roles that can use the skill.


- **Now Assist panel**: When selected, the Now Assist skills are available in the Now Assist panel.

  If you don't see this option, you must activate the Now Assist panel. For more information, see Activate the Now Assist panel standard chat.

  For the skills that appear in the Now Assist panel, select the down arrow to identify the roles that can use the skill.

b. Select **Save and continue** to go to the next step.

12. Review your choices and select **Activate** to complete the skill customization.
Review the settings on this page. Click **Back** to make changes for the input or display settings, or select **Activate** to turn the skill on.

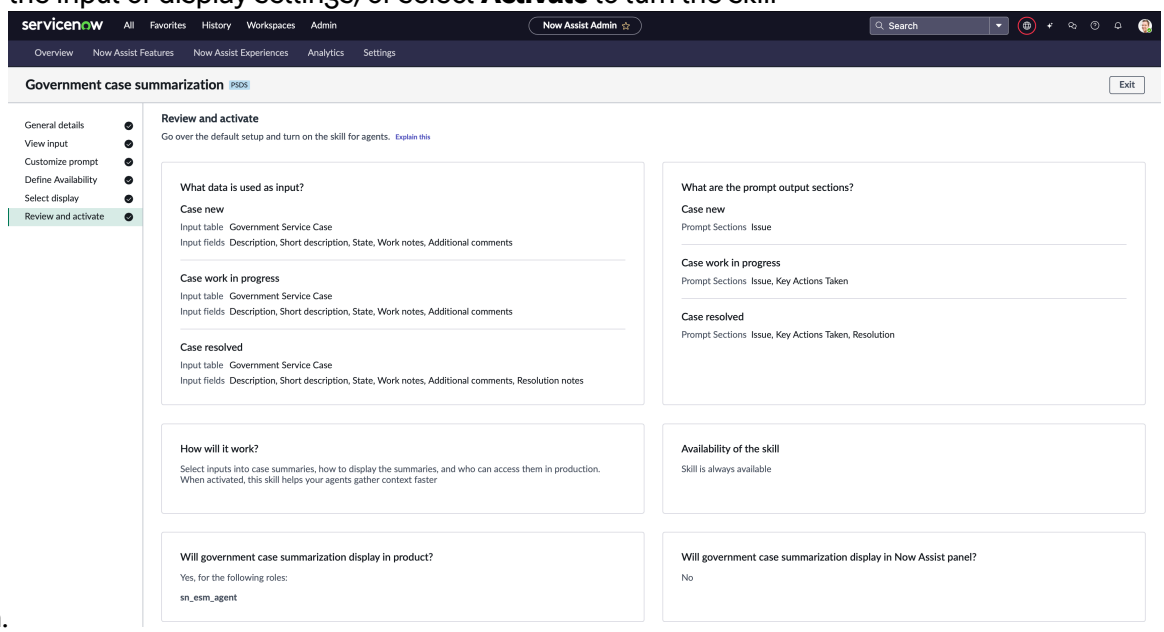


Result

Once all the settings are configured, the modal window confirms that Government Case Summarization has been successfully activated.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Enabling and configuring AI Search with Now Assist for PSDS

Configure and use the AI Search engine in the Now Assist for Public Sector Digital Services (PSDS) application.

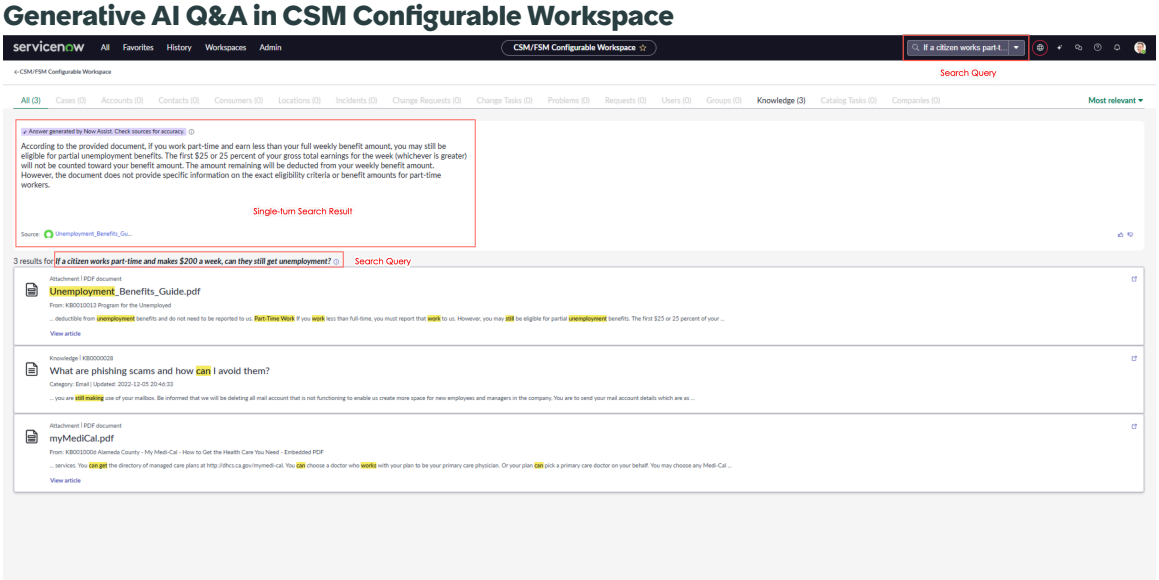

Now Assist for PSDS supports additional configuration for AI Search, such as search profile configuration.

Configure AI search for Now Assist for Public Sector Digital Services (PSDS)

Activate the Now Assist in AI Search application to extract actionable Q&A Genius Result answers from knowledge articles found in the Service Portal, Virtual Agent, Employee Center, and global searches using generative AI.

About this task

Configure and use the AI Search engine in the Now Assist for Public Sector Digital Services (PSDS) application.

Note:
By default, Now Assist Search is enabled in Now Assist for Public Sector Digital Services (PSDS). Follow these steps only if the application has been previously disabled.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **AI Search** > **AI Search Status**.
2. If the screen says you do not have AI search on the instance, select **Request AI Search**.
3. Wait until AI Search is displayed as activated and ready for use.

Configure AI search profiles with Now Assist for PSDS

You can enable AI Search users to search content and metadata from documents in all or part of the knowledge bases, external repositories, and remote tables.

Now Assist for PSDS supports additional configuration for AI Search, such as search profile configuration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

AI Search for Now Assist for Public Sector Digital Services (PSDS) stores search experience settings in search profiles. Define a search profile for each unique search experience that you want to offer users in a ServiceNow AI Platform application. Create and populate synonym and stop word dictionaries. Configure typo handling dictionary settings. Define Genius Results and result improvement rules.

A search profile contains settings that determine how AI Search generates search results for a given search. The search application's configuration specifies which search profile to use, and also determines how the generated results are displayed to users.

For more information on AI search profiles, see Search profiles in AI Search.

Create a search profile using Now Assist for PSDS

Create a new search profile to store search experience settings for Now Assist for PSDS AI Search.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **AI Search** > **Search Experience** > **Search Profiles**.
2. Select **New**.
3. On the Search Profile form, fill in the fields.
   For a description of the field values, see Search Profile form.
4. Select **Submit**.

Result
The new search profile appears in the AI Search Search Profiles list with **State** set to *New*. An informational message and an alert triangle icon (⚠) indicate that the new search profile has never been published.

What to do next
Your new search profile includes sample synonym and stop word dictionaries and a default typo handling dictionary. For more details on configuring and populating these dictionaries, see Synonyms, Stop words, and Typo handling.

To make content searchable using your new search profile, link one or more search sources to it.

Link a search source to a search profile in Now Assist for Public Sector Digital Services (PSDS)

Link search sources to a search profile to specify the content that a government service agent can search through that profile.

Before you begin
Role required: admin

About this task
Linking a search source to a search profile makes its filtered content available for searches using that search profile. AI Search only indexes and uses content from the search profile's linked search sources when finding and generating standard search results and Genius Result answers.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **AI Search** > **Search Experience** > **Search Profiles**.
2. Open the search profile that you want to link the search source to.
   To configure single-turn AI Search for use in the Now Assist Panel, select the **[CSM AIS] Configurable Workspace Search Config** search profile,
3. In the Search Sources related list, select **Link Existing**.
   To configure single-turn AI Search, select the Genius Results related list, then select **Link Existing**.
4. On the Search Profile-Search Source Mapping form, fill in the fields.

   To configure single-turn AI Search, enter **Now Assist Q&A** in the Genius Result Configuration field, and set the order to **1**.

   For a description of the field values, see Search Profile - Search Source Mapping form.
5. Select **Submit**.

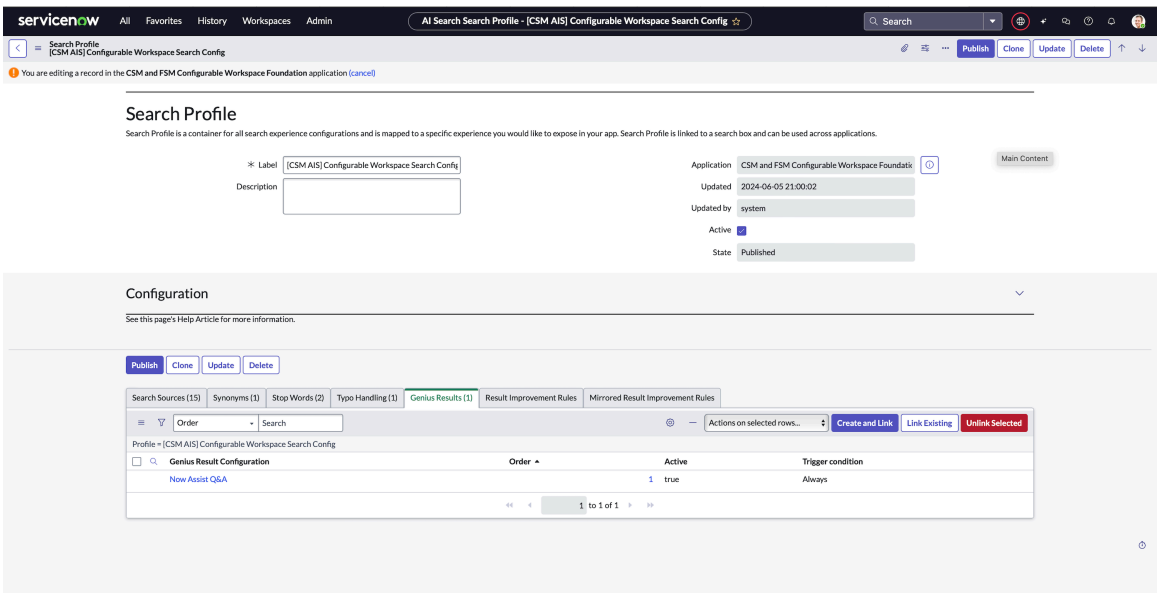

Result

The new search source appears in the Search Sources or Genius Results related list. Search query results immediately reflect changes to the set of records searchable through the search profile.

What to do next

To make a search profile's settings active in search queries, you must publish it.

Publish a search profile in Now Assist for Public Sector Digital Services (PSDS)

Publish a search profile to make its settings, and any pending changes to its settings, active in search queries.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **AI Search** > **Search Experience** > **Search Profiles**.

   Note:

   Search profiles with the *New* state display an alert triangle icon (⚠). An informational message notifies you to publish these search profiles.

2. Open the search profile that you want to publish.
3. Select **Publish**.

Result

The search profile appears in the AI Search Search Profiles list with **State** set to *Published*, and can be used to filter what search sources are being indexed by the Now Assist for PSDS AI Search.

Skill inputs for Now Assist for Public Sector Digital Services (PSDS)

Use the inputs and triggers for each skill to configure how and when a skill is used.

Overview of skills

Depending on the selected skill, you can configure inputs. These settings determine how and when a skill is used. An input identifies the data that is used for a skill, such as the table and fields that are used to generate a case summary.

Chat summarization skill

The following table lists the inputs for the chat summarization skill.

Inputs for the chat summarization skill

Input	Description
Chat conversations	Virtual Agent chat conversations are input data by default.
Portals	Portals to use as the source of the input data. You can't deselect the default product portal, and portals that are already in use by other products can't be selected.

The following table lists the property that you can select to control how a chat summary is displayed.

Property for the chat summarization skill

Property	Description
Bulleted list	Chat summary as an unordered list. When this option is set to Off, the chat summary can be viewed in paragraph form.

Case summarization skill

The case summarization skill includes the inputs that identify the table and fields that are used when a case summary is generated.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

In this release, you can't modify a skill's input data source. The data source contains the tables and fields that the skill relies on.

The following table lists the inputs for the case summarization skill.

Inputs for the case summarization skill

Input	Description
Input table	Case [sn_gsm_case]
Input fields	• Description • Short description • Work notes • Additional comments

Using Now Assist for Public Sector Digital Services (PSDS)

If you have an agent role, you can use various skills with the Now Assist for Public Sector Digital Services (PSDS) application.

Summarize the case details to help you understand the case context quicker. These summaries are useful for long-running or complex cases that include multiple conversations between agents and constituents.

Generate a summary of the Virtual Agent chat history and the chat conversation between a live agent and a customer by using the chat summarization skill in the Now Assist for Public Sector Digital Services (PSDS) application.

Synthesize and summarize information from multiple KBs to deliver relevant answers in a conversational format using the Now Assist AI Search for CSM Workspace plugin. This skill provides actionable AI-generated or AI-selected answers to a search in CSM Workspace, and can replace a list of possible findings with a single-turn conversational result.

Skills

The Now Assist for PSDS application includes the generative AI skills that enable your agents to understand the case context so that they can propose resolutions to the constituent or approve an application faster.

Government case summarization

Condenses comprehensive case records into concise summaries, including the issue and the actions taken, enabling agents to grasp case contexts and respond effectively to inquiries. Generates detailed resolution information for specific government case types, allowing agents to propose solutions to constituents or business contacts and integrate this information into the case record.


The case summarization skill generates a case summary and displays it above the activity stream. The summary includes the information that the agent enters in the following case record fields:

- Short description
- Description
- Work notes

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Additional comments
- Email
- Service level agreement (SLA)

Government case record with case summary

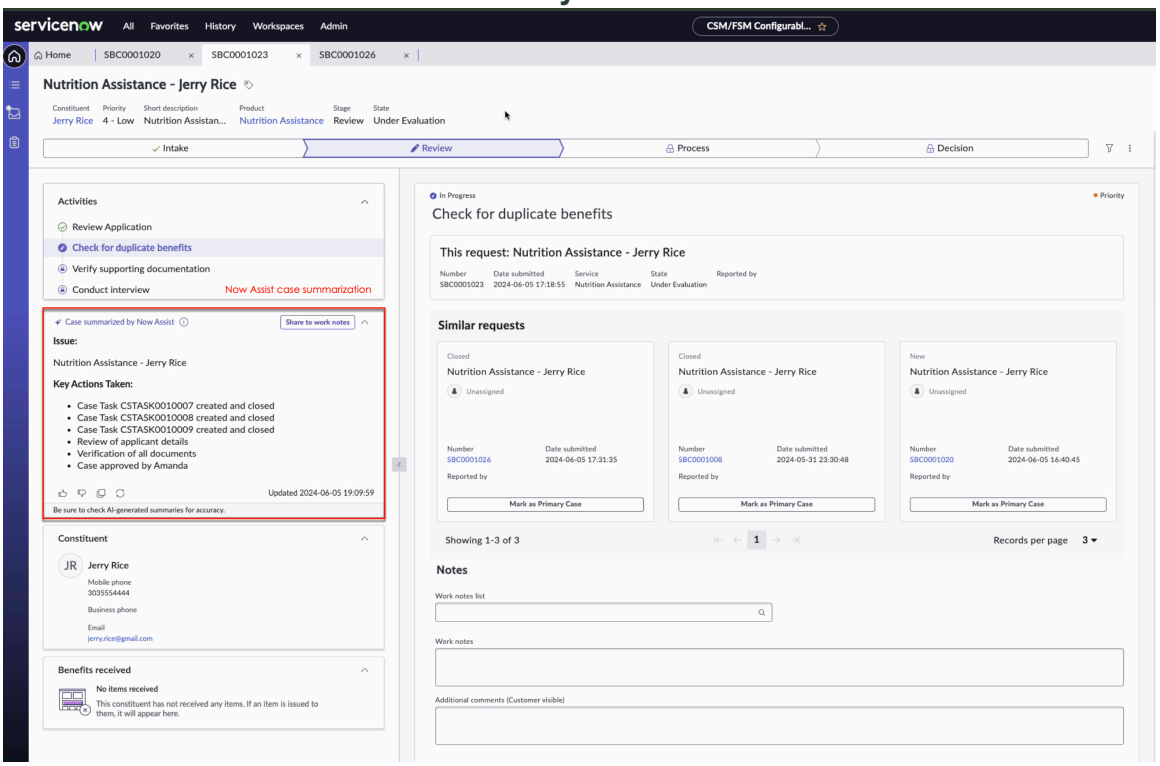

Chat Summarization

Automatically generate summaries of agent-facing chats, capturing the context of conversations between agents and constituents or virtual agents at different points of the handoff, such as when a Virtual Agent chat history is handed off to a live agent, or when one live agent hands off a chat history with a customer to another live agent. This functionality enables critical information from interactions to be readily accessible for future reference and action.

Now Assist for AI Search

Leverage single-turn capabilities for legislation and policy summarization, providing agents with succinct overviews of complex documents and enhancing the ability to navigate and comprehend extensive legislative materials. This skill provides actionable AI-generated or AI-selected answers in searches, synthesizing and summarizing information from multiple knowledge bases to deliver relevant answers in a conversational format.

Fee Waiver AI agent skill

Determines the fee breakdown for an information request by working to arrive at a subtotal fee estimate, a recommendation for whether a fee waiver request should be approved or rejected, including reasons for any rejection, and a total fee estimate, with the fee waiver, if applicable. This skill works via the Information Request Fee Estimation AI Agent to provide an autonomous decision based on guidelines added in a specific knowledge article. For information on standalone AI agents in Public Sector, see Agentic AI for Public Sector Digital Services.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

- Not all model providers are available for customers with in-country SKUs, and some Now Assist products/features are currently unavailable for in-country customers. For more information, see the KB1584492 article in the Now Support Knowledge Base. Be sure to check for model provider availability updates in future releases.
- Some Now Assist products/features are currently unavailable for customers in the FedRAMP, NSC DOD IL5, or Australia IRAP-Protected data centers, self-hosted customers, or in other restricted environments. For more information, see the KB0743854 article in the Now Support Knowledge Base . Be sure to check for availability updates in future releases.
- Some Now Assist products/features are currently available only for customers in some regions. Be sure to check for availability updates in future releases.
- Some AI products and skills are not available in Regulated Markets. For more information, see KB2593939: Regulated Markets AI Products/Skills Not Available. Be sure to check for availability updates in future releases.

Related topics

Now Assist

Configure Now Assist for Public Sector Digital Services (PSDS)

Using Now Assist for Public Sector Digital Services (PSDS)

Summarize a chat conversation using Now Assist for Public Sector Digital Services (PSDS)

Generate a summary of the Virtual Agent chat history and the chat conversation between a live agent and a customer using the chat summarization skill in Now Assist for Public Sector Digital Services (PSDS).

About this task

Agents can utilize chat summarization, powered by Now LLM, to gain contextual understanding of support issues throughout a chat's lifecycle, even if it involves virtual agent interactions, transfers to live agents, or multiple hand-offs between agents.

In a Virtual Agent conversation, when a requester chooses to connect to a live agent, a chat interaction appears in your inbox. When you accept the interaction, a summary of the Virtual Agent conversation is generated. You can request more details from the requester to resolve the issue.

You can also summarize the chat interaction when the chat ends or when an incident is created for further troubleshooting before or after the chat ends. The summary includes all points of the handoff, including the Virtual Agent conversation, and provides a context of the interaction to you and the other agents who might want to refer to it.

The chat summarization skill enables you to do the following actions:

- Summarize the Virtual Agent chat history and provide a summary of the actions taken by the customer before the customer engages with a live agent.
- Summarize the live agent and customer chat history, including the actions taken by the customer before the live agent hands off the call to another live agent and the customer engages with the new agent.
- Summarize the chat at any point during the conversation using the `/summarize` quick action.
- Summarize the chat between a live agent and a customer when a chat is handed off to another live agent or when an agent wraps up the conversation and ends the interaction.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
You can also generate a chat summary on demand from the Now Assist panel. For more information, see .


The chat summarization skill updates the Short description and Chat Summary fields on the interaction record once the chat is ended.

Before you begin

Role required: admin

Procedure

1. Navigate to **Workspaces** > *CSM Configurable Workspace*.
2. In CSM Configurable Workspace, open a chat from your inbox.
   The chat summarization skill automatically creates an inline summary in the Active Chat window. This summary includes the constituent's issue, the interaction with the Virtual Agent, and any actions the constituent has taken before engaging with a live agent. This summary appears in the Active Chat window and is identified by the Now Assist icon (✦) and the **AI chat summary** label.

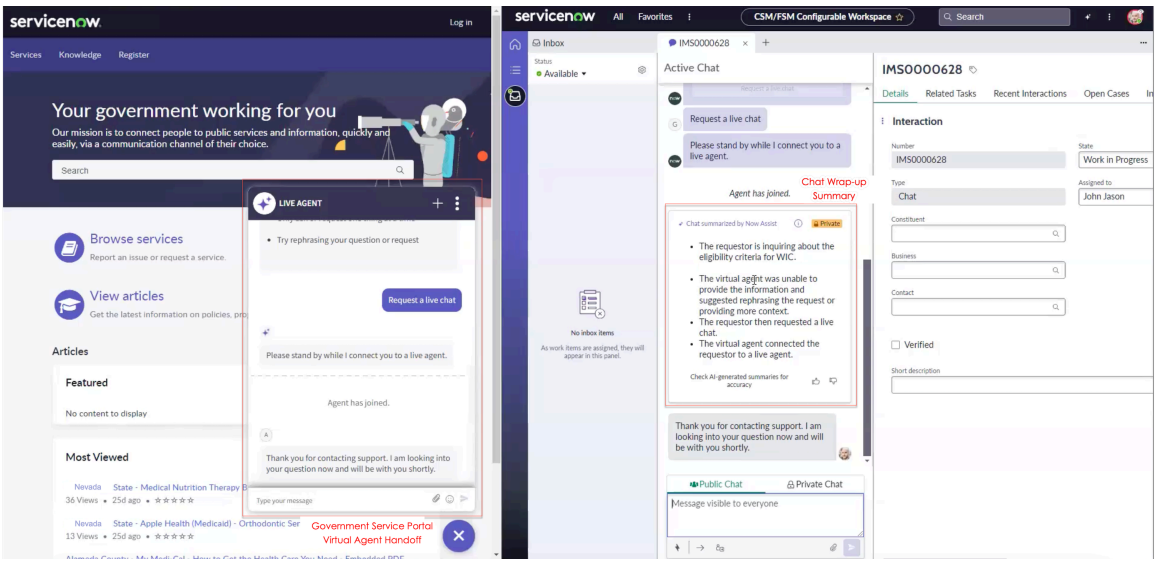

3. **Optional:** Provide feedback for the chat summary by selecting the helpful icon (👍) or not helpful icon (👎) on the summary card.
   This feedback improves the generative AI model and can help to improve the future versions of this skill. The system gathers the feedback on each generated summary and stores it in the generative AI logs (sys_generative_ai_log_list.do).
4. Chat with the customer to get any additional details about their question or issue.
   For example, if an applicant is applying for a benefit program, you may need to collect additional information from what they provided the Virtual Agent.
5. In the Active Chat window, use the `/summarize` quick action to summarize the chat during the conversation with the customer.
   The chat summarization skill creates an additional inline summary in the Active Chat window. This is helpful if you want to summarize long or detailed customer conversations.
6. **Optional:** If Live Agent to Live Agent handoff is enabled, transfer a chat to another agent after accepting an incoming chat with the following steps:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Select the Transfer to Agent icon to transfer the interaction to another agent.

b. Select the name of another live agent.

c. The second live agent selects **Accept** to join the chat.
Another summary of the chat is created when the conversation moves from one live agent to another live agent.

7. End the chat conversation by selecting **End Chat**.
The chat summarization skill updates the **Short description** and **Chat Summary** fields on the interaction record once the chat is ended.

Note:
If a chat summary isn't available for the interaction, the **Chat Summary** field does not appear on the interaction record.

8. Review the text in the **Short description** and **Chat Summary** fields to ensure accuracy, and make any necessary corrections.
9. Select **Save**.

Summarize a government case using Now Assist for Public Sector Digital Services (PSDS)

Generate a summary from the fields that you selected on the case record to help you quickly understand the case context by using the case summarization skill in the Now Assist for Public Sector Digital Services (PSDS) application.

About this task

Government service agents can utilize case summarization, powered by Now LLM, to gain contextual understanding of constituent issues throughout the case's lifecycle. The case summarization skill auto-generates informative summaries that distill key details from work notes, comments, and other case data, which can help agents resolve cases faster.

The case summarization component appears below the activity picker component on the playbook page templates, and is collapsed by default. When an agent generates a case summary by selecting **Summarize**, the component expands to display the summary information, including a description of the issue, the actions taken, and the next steps. For longer summaries, select **View more** and use the scroll bar to view the content.

The chat summarization skill enables you to do the following actions:

- Select Summarize to create a summary of the case details.
- Select Share to work notes to copy the summary text to the activity stream.
  - Review the summary text in the Share to work notes pop-up dialogue and modify the text as needed.
  - Select Save to work notes on the pop-up dialogue to add the text to the activity stream.
- Select the refresh icon in the component footer to refresh the text and get the latest summary.

After generating a summary, you can:

- Review the summary information and edit as needed.
- Provide feedback on the generated summary.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Add the summary information to the case work notes.
- Copy the summary information to the clipboard.

Note:
You can also generate a case summary on demand from the Now Assist panel. For more information, see .


Before you begin
Role required: admin

Procedure

1. Open a government service case by navigating to Lists in the CSM Configurable Workspace.
2. In the Case summary by Now Assist component, select **Summarize**.

Note:
The Case summary by Now Assist component appears above the constituent card. Generating and displaying the summary may take several seconds. The component is collapsed by default and expands to display the summary. For longer summaries that don't fit in the window, select **View more** and use the scroll bar to view the rest of the content.

Case record with case summary

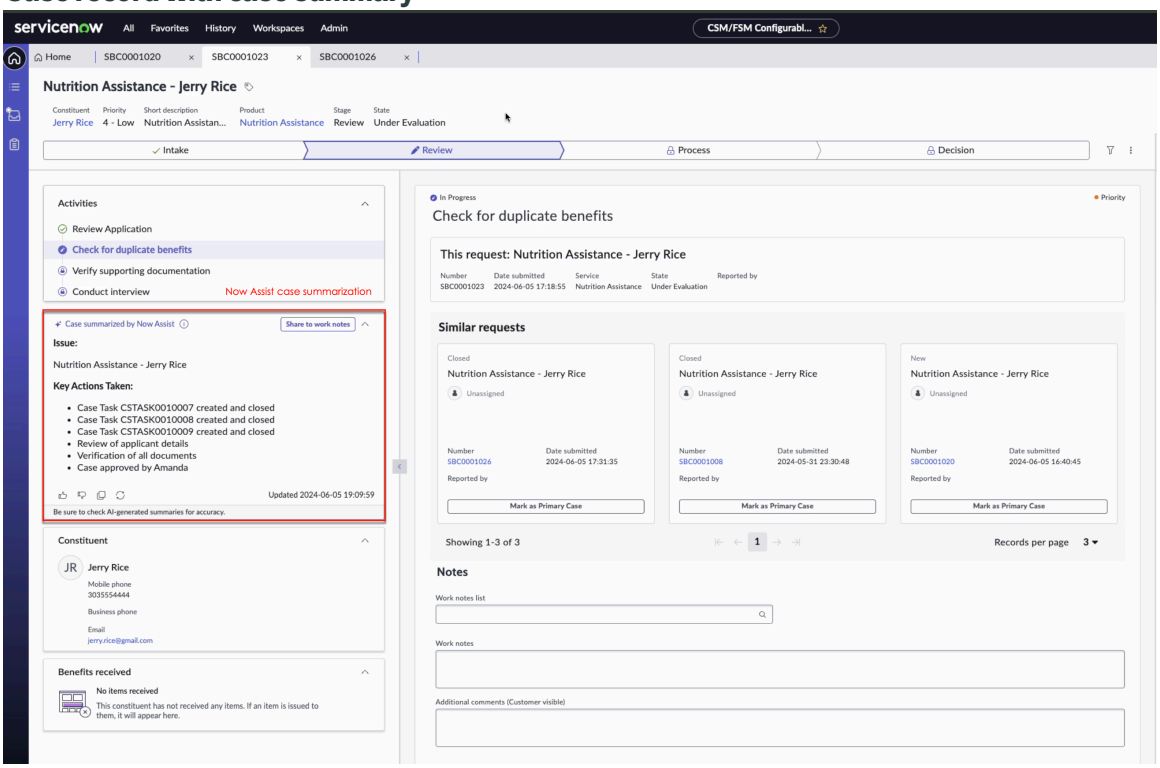

3. **Optional:** When you're finished summarizing a case, you can add it to the case work notes, expand or collapse it, provide feedback, copy it, or view information about it.

Using AI Search in Now Assist for Public Sector Digital Services (PSDS)

Agents can search for information with single turn Q&A using the AI Search feature in Now Assist for Public Sector Digital Services (PSDS).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


The Now Assist in AI Search application uses Now LLM Service to extract actionable Q&A Genius Result answers from the knowledge articles that are found in the Service Portal, Virtual Agent, Employee Center, and global searches. By using this application, an agent can improve the customer's experience by retrieving the relevant content from the knowledge base and generating concise answers. For more information, see Now Assist in AI Search.

Legislation summarization

The Now Assist AI Search for CSM Workspace plugin synthesizes and summarizes information from multiple knowledge bases to deliver relevant, actionable AI-generated or AI-selected answers to search queries in a conversational format.

Agents can use AI Search to pose a query directly in the search bar in the CSM Configurable Workspace, which will then generate an answer to their question by parsing and summarizing content from one or more knowledge bases. This single-turn, conversational search result replaces a long list of possible matches, and can help improve agent response accuracy and relevancy by allowing agents to review a summary of relevant content before responding to customers.

Generative AI Q&A in CSM Configurable Workspace

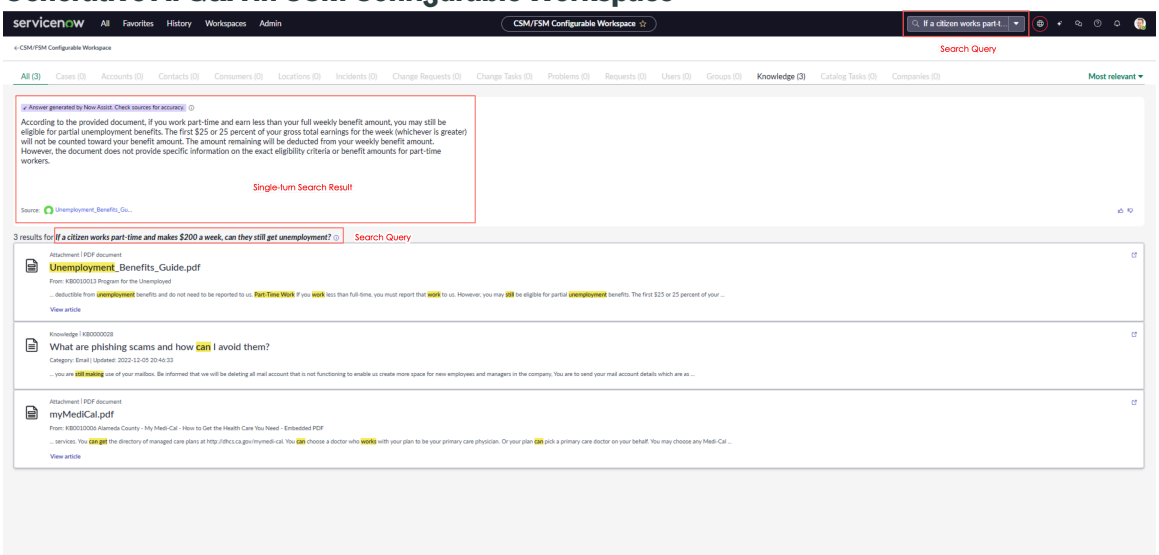

Search configurations

A search application configuration specifies the search engine and the settings to use for search in a ServiceNow AI Platform application. The **[CSM AIS] Configurable Workspace Search Config** search application configuration is provided with the CSM Configurable Workspace store app. To access this configuration, navigate to **AI Search > Search Experience > Search Applications.**

An admin can define and customize the source tables and knowledge bases that the Now Assist AI Search indexes data from by customizing the search profiles within the search application configuration for Now Assist for Public Sector Digital Services (PSDS).

For more information on search application configurations, see Search application configurations. For more information on how to set up and customize AI Search for use with Now Assist for Public Sector Digital Services (PSDS), see Configure AI search for Now Assist for Public Sector Digital Services (PSDS).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use agentic AI in Now Assist for Public Sector Digital Services (PSDS)

Use standalone agents to achieve specific automated outcomes with the Public Sector Digital Services AI Agent Collection application.

AI Agents are configurable through the AI Agent Studio. The AI Agent Studio is available to administrators as part of the Now Assist for Public Sector Digital Services (PSDS) offering. The AI Agent Studio allows admins to configure, test, and manage AI agents using natural language and prebuilt workflows. These agents can automate tasks like fee estimation and information request handling.

This table describes the use cases in Now Assist for Public Sector Digital Services (PSDS).

Use cases powered by Agentic AI in Public Sector Digital Services

Use case	Description
Estimate fee breakdown for an information request	Helps government service agents determine the fee breakdown for an information request by working to arrive at a subtotal fee estimate, a recommendation for whether a fee waiver request should be approved or rejected, including reasons for any rejection, and a total fee estimate, with the fee waiver, if applicable.

Find information such as the Large Language Models (LLM) supported in Now Assist and security controls that are important considerations for using agentic AI.

Supported Large Language Models

Note:

- You can use Now LLM Service, Now LLM Long Term Stable models (LTS), Azure OpenAI, Google Gemini or Anthropic Claude on AWS as the AI model provider for all Now Assist skills and AI agents. Use the Configuration Controls in AI Control Tower to define which options are available, then set the skill-level preferences in the Now Assist Admin console. For more information, see Large language models on the ServiceNow AI Platform®.
- For the Now LLM Service updates, see Now LLM Service updates.

Security implementation considerations

Enable security implementation to execute AI agents and agentic workflows through Access Control Lists (ACLs) and user identities. ACLs provide the Run As capability to let agents and agentic workflows execute actions either as a dynamic user or as an AI user. For more information, see Implement access control in Now Assist AI agents

Role masking enables users to limit the roles and privileges of agentic workflows during tool execution. Agentic workflows and their AI agents that get installed with Now Assist applications are assigned pre-defined roles. If you select *`Users with specific roles`* for user access, you must configure the security controls to include these roles. Data access settings must also include these roles. For the instructions to change the security controls, see Define security controls for an agentic workflow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role masking enables users to limit the roles and privileges of AI agents during tool execution. AI agents that get installed with Now Assist applications are assigned pre-defined roles. If you select *Users with specific roles* for user access, you must configure the security controls to include these roles. Data access settings must also include these roles. For the instructions to change the security controls, see Define security controls for an AI agent.

Considerations for running the autonomous AI Agents

Important:
By default, all agent workflow and AI agent records are read-only.

To run the AI agents autonomously, you must first duplicate the agentic workflow, and then proceed with the following steps:

- Activate the agentic workflow.
- Activate all agents within the agentic workflow.
- Activate the trigger to invoke the agentic workflow automatically. The triggers for each agentic workflow must be unique. If you prefer to invoke it manually, activating the trigger isn't necessary.
- Azure OpenAI is recommended for ITSM agentic workflows. For information on Large Language Models (LLMs) for AI agents and agentic workflows, see Large language models on the ServiceNow AI Platform®.

Standalone AI agents

Looking for an AI agent?

- There might be AI agents installed with the Now Assist application that are not used in agentic workflows. To learn how to see all agents that are available on your instance, see Find AI agents.
- To find agents that might not be installed on your instance, visit the AI Agent Marketplace on the ServiceNow Store.

For information on the standalone Public Sector Digital Services AI agents, see Standalone AI Agents in Public Sector Digital Services.

Standalone AI Agents in Public Sector Digital Services

Use standalone agents to achieve specific automated outcomes with the Public Sector Digital Services AI Agent Collection application.

Important:
In the **Define availability** screen for the AI agent, make sure that the **Status** field is enabled to activate the AI agent.

The following table describes the available AI agents in the Now Assist for Public Sector Digital Services (PSDS) application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Available standalone AI Agents for the Public Sector Digital Services AI Agent Collection

AI Agent name	Description
Information Request Playbook Fee Estimation Agent	• Analyzes fee waiver justification from applicant for an information request case record, and validates justification against predefined rules • Outlines the steps required to estimate the fees associated with an information request • Retrieves similar case records and allows user to exclude any from the fee calculation • Estimates and communicates fee breakdown associated with an information request case record based on similar request queries and request details from the user • Communicates sub-total estimate, fee waiver recommendation, and total with fee waiver.

Note:
Verify that AI Search is enabled on the instance before configuring the agents.

Looking for an AI agent?

- There might be AI agents installed with the Now Assist application that are not used in agentic workflows. To learn how to see all agents that are available on your instance, see Find AI agents.
- To find agents that might not be installed on your instance, visit the AI Agent Marketplace on the ServiceNow Store.

Note:

You can use Now LLM Service, Now LLM Long Term Stable models (LTS), Azure OpenAI, Google Gemini or Anthropic Claude on AWS as the AI model provider for all Now Assist skills and AI agents. Use the Configuration Controls in AI Control Tower to define which options are available, then set the skill-level preferences in the Now Assist Admin console. For more information, see Large language models on the ServiceNow AI Platform®.

Enable security implementation to execute AI agents and agentic workflows through Access Control Lists (ACLs) and user identities. ACLs provide the Run As capability to let agents and agentic workflows execute actions either as a dynamic user or as an AI user. For more information, see Implement access control in Now Assist AI agents

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:
By default, all agent workflow and AI agent records are read-only.

To run the AI agents autonomously, you must first duplicate the agentic workflow, and then proceed with the following steps:

- Activate the agentic workflow.
- Activate all agents within the agentic workflow.
- Activate the trigger to invoke the agentic workflow automatically. The triggers for each agentic workflow must be unique. If you prefer to invoke it manually, activating the trigger isn't necessary.
- Azure OpenAI is recommended for ITSM agentic workflows. For information on Large Language Models (LLMs) for AI agents and agentic workflows, see Select the LLM for AI agents and agentic workflows.

For more information on configuring AI Agents, see Configure AI Agents for Public Sector Digital Services.

Related topics

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.