servicenow®

Yokohama Conversational Interfaces

Last updated: 05/04/2026

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Some examples and graphics depicted herein are provided for illustration only. No real association or connection to ServiceNow products or services is intended or should be inferred.

ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

Please read the ServiceNow Website Terms of Use at www.servicenow.com/terms-of-use.html

Company Headquarters
2225 Lawson Lane
Santa Clara, CA 95054
United States
(408) 501-8550

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

servicenow

Table of Contents

Conversational Interfaces **4**

Conversational Interfaces Console 5

Exploring Conversational Interfaces Console 5

Installing Conversational Interfaces components 16

Configuring Conversational Interfaces 19

Conversational Interfaces reference 63

Virtual Agent 66

Exploring Virtual Agent 68

Configuring Virtual Agent 124

Building and deploying Virtual Agent 219

Integrating Virtual Agent with other channels 508

Analyzing Virtual Agent performance 801

Virtual Agent reference 919

Now Assist in Virtual Agent 1120

Exploring Now Assist in Virtual Agent 1122

Configuring assistants overview 1131

Using Now Assist in Virtual Agent 1186

Integrating Now Assist in Virtual Agent with Microsoft Teams 1249

Analyzing assistants 1250

Now Assist in Virtual Agent reference 1284

Agent Chat 1290

Exploring Agent Chat 1291

Configuring Agent Chat 1308

Using Agent Chat 1340

Agent Chat reference 1351

Sidebar 1353

Exploring Sidebar 1354

Configuring Sidebar 1365

Using Sidebar 1392

Sidebar reference 1399

Conversational Interfaces Diagnostic Tool 1401

Exploring Conversational Interfaces Diagnostic Tool 1401

Using the Conversational Interfaces Diagnostic Tool 1403

Additional resources for Conversational Interfaces 1409

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational Interfaces

Enable users to engage with live agents, virtual agents, or both using ServiceNow® Conversational Interfaces. You can also use generative AI skills in your conversational experiences. These interfaces provide tools for creating and managing optimal conversational experiences for users in the chat channels that they prefer.

Get started with Conversational Interfaces

Select a tile to get started with one of Conversational Interfaces products.

Conversational Interfaces Admin console



Explore, implement, and maintain your Conversational Interfaces using a home-page or console experience.

Virtual Agent



Empower your employees and customers to serve themselves using a friendly messaging interface, featuring pre-built conversations powered by artificial intelligence.

Now Assist in Virtual Agent



Use large language models (LLMs) to create a natural-language conversational experience that can improve the success of your self-service workflows.

Agent Chat



Streamline the agent and requester chat experience and enable managers to monitor and assist agents.

Sidebar



Enable agents to collaborate with others on Workspace records.

Conversational Interfaces Diagnostic Tool



Identify, troubleshoot, and find solutions for issues with Conversational Interfaces.

Additional Resources



Manage and enhance your Conversational Interfaces experience

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational Interfaces Console

Explore, implement, and maintain your Conversational Interfaces using a home-page or console experience. All the settings and configurations you need to set up and launch your interfaces, such as Virtual Agent and Agent Chat, are consolidated in the ServiceNow® Conversational Interfaces console.

For an introduction to the Conversational Interfaces console, and to get familiar with the product, watch this video. Getting Started with the Conversational Interfaces console.

Get started

Explore  Learn about the Conversational Interfaces Console concepts and features.	Install  Install Virtual Agent and pre-built conversations.
Configure  Select conversation settings for Virtual Agent, Agent Chat, and Sidebar	Reference  Get technical information about records in the Interactions table and data management in Conversational Interfaces.

Exploring Conversational Interfaces Console

The Conversational Interfaces applications enable your users to engage with live agents, virtual agents, or both. These interfaces provide tools for creating and managing optimal conversational experiences for your users, in the chat channels that they prefer.

If you are new to Conversational Interfaces and haven't implemented or used Virtual Agent yet, you can access the Conversational Interfaces Console application to explore all available features.

For existing users, you can access the Conversational Interfaces console application to discover added enhancements or advanced-level features.

Conversational Interfaces console advantages

Implement Conversational Interfaces to support your users with virtual and live agents through the chat channels they prefer. Increase the productivity of your IT organization by deflecting the more common, easier to resolve user issues, to a 24/7-available Virtual Agent bot. The

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational Interfaces console makes it easy for you to quickly get started and work towards achieving positive outcomes with your implementation.

Navigate through an intelligent experience that is uniquely tailored to where you are as a Conversational Interfaces user. The Conversational Interfaces console is ideal for first-time users who have never installed or configured Conversational Interfaces, to the most experienced user looking to expand full capabilities and maintain existing implementations.

Conversational Interfaces console provides the following features:

- Guided experience modules that walk you through essential tasks, such as adding your bot to a portal, branding and customizing your bot, setting up bot greetings, collecting metrics, and more.
- Access to helpful resources and videos to help you plan your virtual or human agent conversational experience.
- General settings for both Virtual Agent and Agent Chat, as well as settings specific to each application.
- Bot performance metrics for recent conversations.
- Progress panel that shows you what has been configured on your instance.

Navigate to **All** > **Conversational Interfaces** > **Home** to start exploring its features.

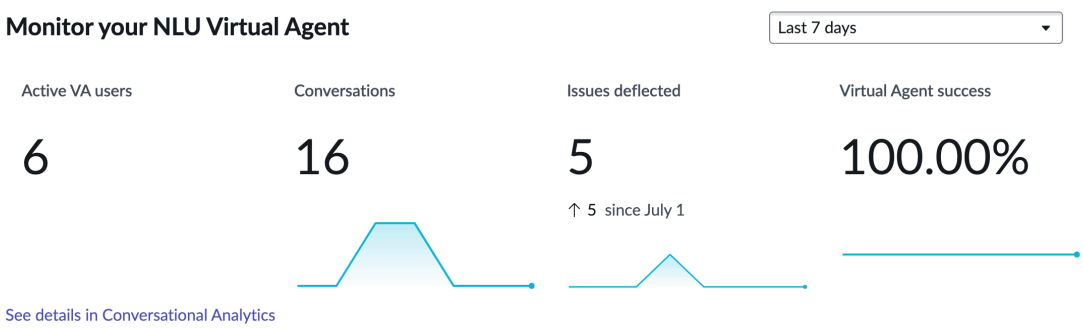
Note:
The Conversational Interfaces console is also available in the Omni-Experience Standard Feature Set app from the ServiceNow Store. Existing customers don't need to install it from the store. However, subsequent updates will be available there. Visit the ServiceNow Store website for more information. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Monitoring and managing Conversational Interfaces applications

Use the Conversational Interfaces Home page to monitor the performance of recent Virtual Agent conversations or test your bot. Plugin update notices will alert you when a feature update is ready.

Monitor your Virtual Agent performance


Review the performance of recent Virtual Agent conversations from the Conversational Interfaces console. For more details, select **See details in Conversational Analytics** to open the Conversational Analytics dashboard.



Test your bot

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

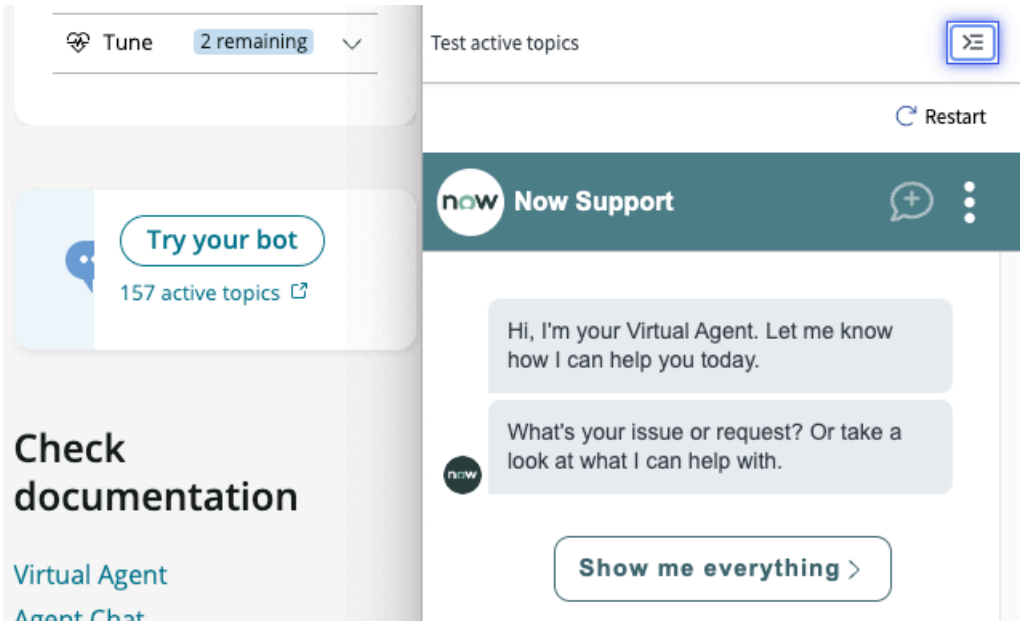Select **Try your bot** to open a conversation in a new window and test the active topics. Enter a request and send it to start a conversation with the bot. The number of active topics is indicated for your information.



Update plugins

Notifications on the Conversational Interfaces console let you know when to update an installed plugin. Select **Update plugin** to update it from the ServiceNow Store.



Channels in Conversational Interfaces

The various ways in which your end users engage with virtual and live agents are called channels. In Conversational Interfaces, users and agents converse through channels that have specific communication modes: chat mode for real-time conversations and messaging mode for long-running conversations.

Conversation channels provide your end users and agents with different options for interacting. These options are based on when your users and agents are available to connect, and the chat applications used in your business environment. There are two types of channels: chat channels and messaging channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Chat channels

Chat channels support two-way conversations in real time. These conversations may involve a user and a live agent or a user and a virtual agent. This mode of conversation is synchronous, and the user is guaranteed a response. Supported chat channels let your end users and agents interact based on the chat applications (clients) that they're using and when they're available to connect.

The following channels are supported for synchronous chat:

- Service Portal (mweb) chat widget
- Mobile web (mweb) client
- Integrating Virtual Agent with Microsoft Teams
- Integrating Virtual Agent with Slack
- Integrating Virtual Agent with Workplace from Facebook
- Integrating Virtual Agent with Alexa
- Integrating Virtual Agent with WhatsApp
- Integrating Virtual Agent with LINE
- Integrating Virtual Agent with Facebook Messenger

Messaging channels

Messaging channels let end users and agents communicate over longer periods of time, especially when one party isn't online. This mode of chat is asynchronous and happens at the parties' convenience.

When your end users and agents must communicate over longer periods without being online concurrently, pre-built messaging channels let them chat asynchronously, at their convenience.

The following channels are available for asynchronous chat:

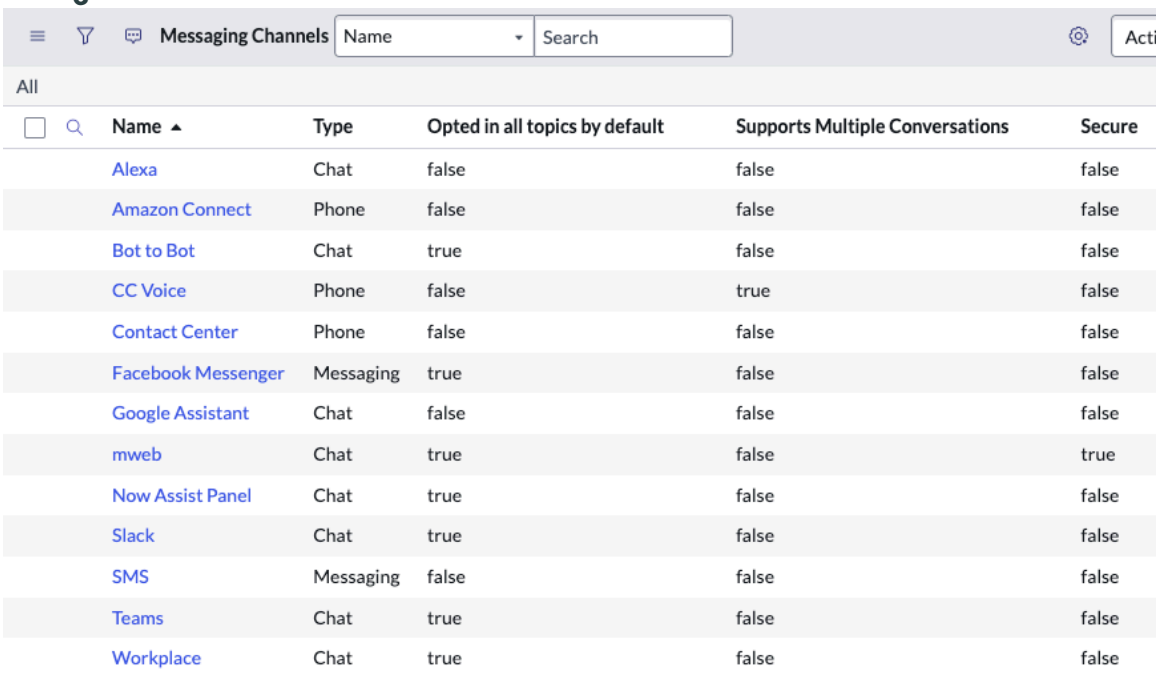
- Mobile web (mweb) client: Configure this channel for iOS, Android, and desktop devices for asynchronous chat
- Now Assist panel : Used by Now Assist panel .
- SMS channel: Used by Integrating Virtual Agent with Twilio

Messaging Channels table

Messaging channels are defined in the Messaging Channels table [sys_cs_channel]. If you're using the custom chat integration framework to create custom chat integrations, you can specify the channel mode for those integrations—either chat or messaging. For channels such as the mweb channel, you can choose either chat or messaging as well.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configured channels for an instance



Messaging Channels | Name | Search | Acti

All

Name ▲	Type	Opted in all topics by default	Supports Multiple Conversations	Secure
Alexa	Chat	false	false	false
Amazon Connect	Phone	false	false	false
Bot to Bot	Chat	true	false	false
CC Voice	Phone	false	true	false
Contact Center	Phone	false	false	false
Facebook Messenger	Messaging	true	false	false
Google Assistant	Chat	false	false	false
mweb	Chat	true	false	true
Now Assist Panel	Chat	true	false	false
Slack	Chat	true	false	false
SMS	Messaging	false	false	false
Teams	Chat	true	false	false
Workplace	Chat	true	false	false

Live Agent support by channel

Not all channels may be suitable for Live Agent support. For example, you may want to disable support for the Bot-to-Bot and voice channels. Live Agent support is enabled by default, but admins can change this setting in the Messaging Channels [sys_cs_channel] table. For details, see Disable live agent support for a channel.

Chat and messaging features

The Conversational Interfaces channels offer basic features that make it easy for your agents and end users to stay connected:

- Message indicators that inform your users of new and unread messages received when they're away from chat or when they've been offline.
- Typing indicators that show a chat participant is responding.
- System messages, displayed to users and agents that provide information about the conversation state.
- Secure handling of sensitive data, such as passwords or account numbers. This data is masked when users enter the information, and it cannot be viewed by others.
- Automatic closing of idle chat or messaging conversations.

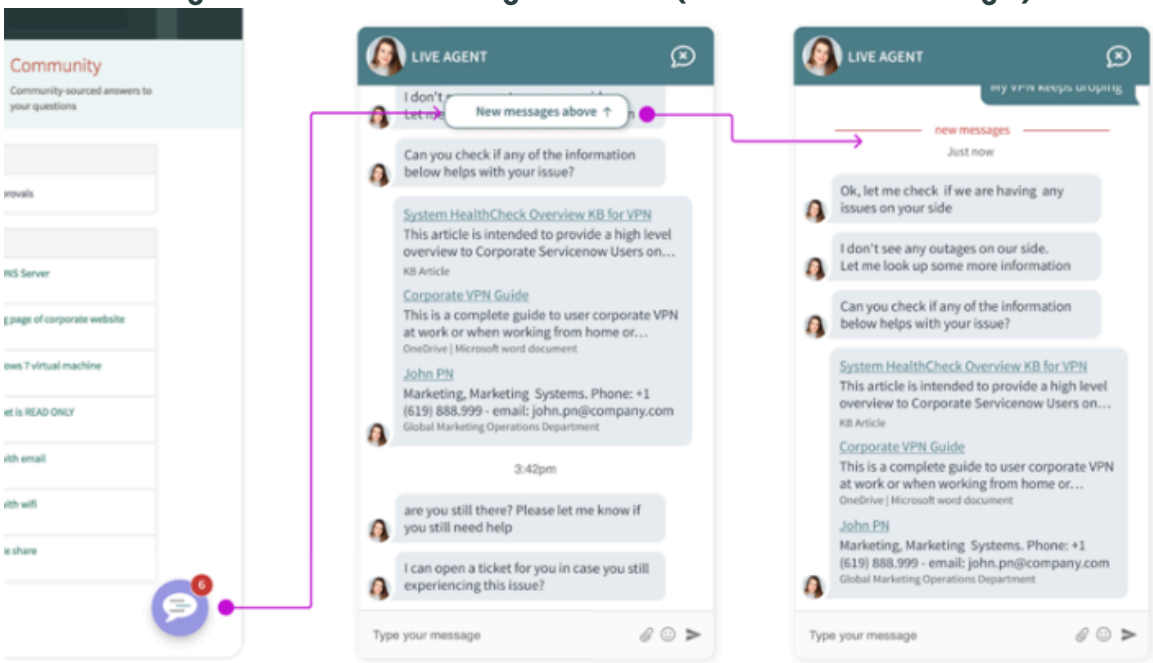
New and unread message indicators

End users receive new message indicators on chat and messaging channels when they're offline. Users can be anonymous (guests) or known (authenticated). The unread message count is displayed on the chat widget.

In asynchronous chat, the unread message count reflects the number of any offline messages sent by a live agent and any simple notifications received.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Unread message count and new message indicators (Service Portal chat widget)



Message indicators are displayed as follows:

- There is no limit on the number of unread messages. Up to 50 unread messages can be viewed at a given time. Messages can span multiple conversations, either open (current) or closed (past) conversations.
- When users open the chat client, they're shown the last message received. They can scroll up or down to read the unread messages, as directed by the **New messages above** button or **New messages below** button.
- A new messages separator line is displayed between the read and unread messages.
- When a user closes and reopens the chat window, the messages displayed are considered as "read" even though the user might not have reviewed them.

System messages

During active conversations with live or virtual agents, certain system messages inform users and agents about the conversation state. For example, if a user is engaged in live chat, but doesn't respond within a certain amount of time, a conversation timeout message is displayed: `The conversation is timing out, are you still there?`

You can change base system messages by editing their related system properties in Chat Settings in the Conversational Interfaces console.

Disable live agent support for a channel

Add the *`disable_live_agent`* property to the Channel Properties related list to exclude it from live agent support.

Before you begin
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

The *disable_live_agent* property is replacing the *com.glide.cs.exclude.liveagent.support* system property to indicate that the channel doesn't support a live agent. If the *disable_live_agent* parameter is not set for the channel, the older system property will still be honored for the time being.

Procedure


1. Navigate to **All**, and then enter `sys_cs_channel.list` in the filter.
2. Select a channel name in the table.
   For example, select **Alexa**.
3. In the **Channel Properties** related list, select **New**.
4. On the Custom Adapter Property New record form, fill in the fields.

Field	Description
Name	Enter `disable_live_agent`.
Value	Enter `true`.

5. Select **Submit**.

Result

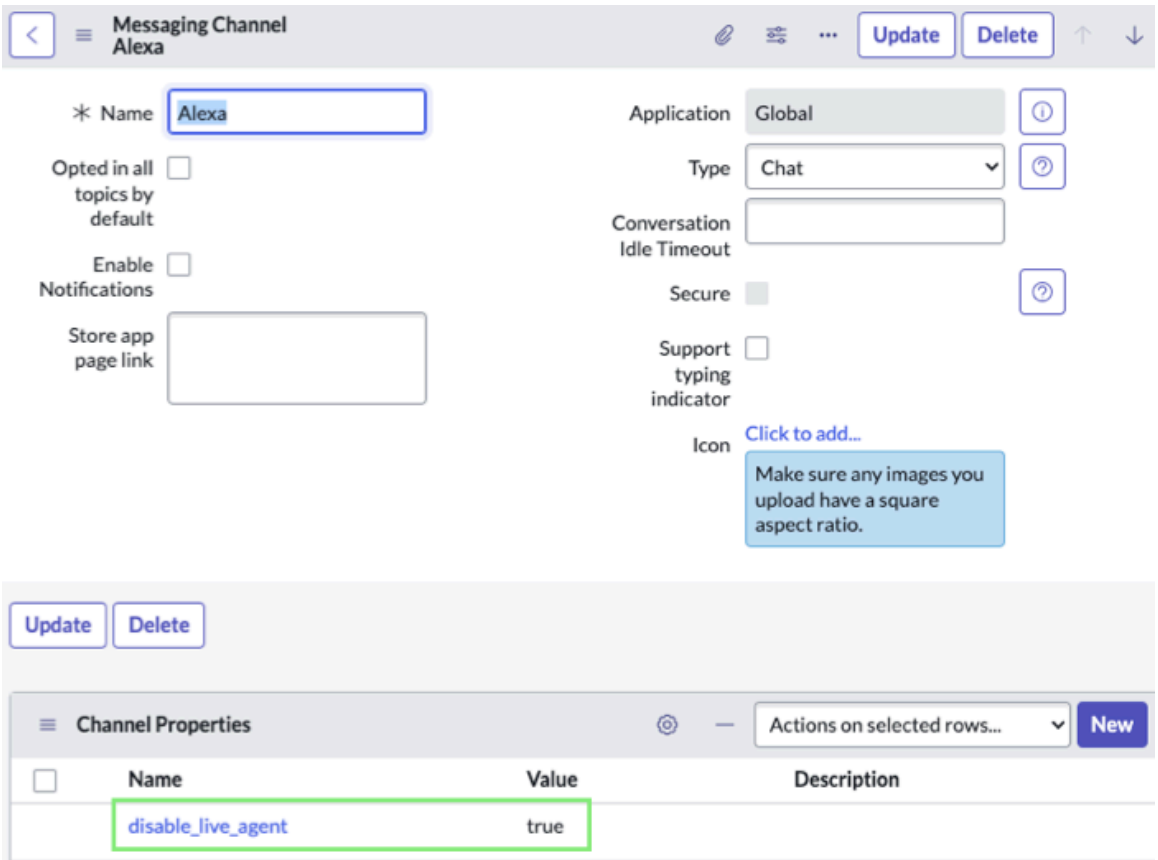The *disable_live_agent* parameter displays in the Channel Properties related list.



Using Asynchronous Chat in messaging channels

Enable your organization or brand to maintain constant engagement with end users. With Asynchronous Chat, your agents and end users can participate in long-running conversations

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

without being online concurrently. Agents can also proactively contact users whenever there is useful information to share, such as important alerts or updates.

With Asynchronous Chat, end users and agents can engage in conversations that might span several hours or even days. These conversations run on messaging channels that allow your users and agents to communicate at different times and to resume conversations where they left off. Users can respond at their convenience and are no longer limited to working with agents only during customer support hours.

Long-running conversations are supported on channels that are designated as messaging channels in the Messaging Channel [sys_cs_channel] table. Messaging channels provided with your base system include the SMS channel, which is used by the ServiceNow Conversational SMS Integration with Twilio app and the ServiceNow Conversational SMS service channel app.

Starting with the Rome release, you can also configure the web (mweb) channel, which includes the iOS, Android, and desktop devices, as a messaging channel instead of a chat channel. For configuration details, see Configure asynchronous chat for the web channel.

Note:
The web chat and mweb channels are the only channels that support both chat and messaging mode, depending on your need. Web chat can only be set up in one mode on any given instance. The Asynchronous Chat feature specifically refers to the mweb channel in messaging mode.

Requirements

Asynchronous chat requires certain plugins and ServiceNow applications from the ServiceNow Store.

Plugins and ServiceNow apps required for asynchronous chat

Plugin or ServiceNow app	Description
Glide Conversation Server [com.glide.cs]	Enables Virtual Agent functionality handled by the Conversation Server, including conversation settings and the Virtual Agent chat widget plugin (com.glide.cs.sn-va-web-client-app). The Conversation Server is included with Virtual Agent Lite, which is provided with your base system. For full Virtual Agent functionality, see Activate Glide Virtual Agent, which is available by subscription.
Conversational Messaging [com.glide.messaging.awa]	Enables features for conversational messaging, such as messaging actions in Workspace. For details, see Activate Conversational Messaging.
Now Mobile app (Version 12.2)	Enables users to submit incidents and requests, manage tasks, and request help from Agent Chat (and Virtual Agent if using Virtual Agent). End users install the Now Mobile app for iOS or Android systems from the Apple App Store or the Google Play store, respectively.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugins and ServiceNow apps required for asynchronous chat (continued)

Plugin or ServiceNow app	Description
Agent-initiated Messaging Interface (Version 3.0)	Supports agent-initiated conversations in messaging channels. This ServiceNow app, available from the ServiceNow Store, also installs the Conversational Messaging plugin (com.glide.messaging.awa).

How Asynchronous Chat works

Asynchronous Chat provides various features to help you improve the conversational experience for your users and agents, such as:

- Message indicators that inform users of new and unread messages received when they're away from the chat window or when they've been offline.
- System messages, displayed to users and agents, that are tailored to either messaging or chat channels.
- Idle conversation timeout period that admins can adjust for messaging channels, as needed.
- Proactive messaging capability that enables agents to initiate communication with users

The following sections explain how these features work for Asynchronous Chat.

New and unread message indicators

End users can receive messages on a messaging channel, even when they're offline. Users can be anonymous (guests) or known (authenticated). The unread message count is displayed on the chat widget. The unread message count reflects the number of any offline messages that were sent by a live agent and any simple notifications received.

Unread message count and new message indicators



- There is no limit on the number of unread messages. Up to 50 unread messages can be viewed at a given time. Messages can span multiple conversations, either open (current) or closed (past) conversations.
- When users open the chat client, they land on the very last message received. They can scroll up or down to read the unread messages, as directed by a **New messages above** button or **New messages below** button.
- A new messages separator line displays between the read and unread messages.
- When users close and re-open the chat window, the messages displayed are considered as "read" even though users might not have reviewed them.

System messages

Certain system messages that are displayed to users and agents in chat mode are not applicable in messaging mode, and are suppressed as needed. The following table identifies system messages that are displayed or suppressed, depending on the mode.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

System messages displayed in messaging and chat modes

System message	Messaging mode (web and mobile)	Chat mode
X has closed the support session. [Displayed when either the agent or user closes the chat session]	Displayed	Displayed
The support session was closed. [Displayed when the chat session was not closed by the agent or user]	Suppressed	Displayed
X has entered the chat.	Suppressed	Displayed
Thank you for contacting support. I am looking into your question and will be with you shortly.	Displayed	Displayed
The conversation is timing out, are you still there? [Controlling idle live chat sessions controlled by the *com.glide.cs.idle_chat_reminder_message* system property]	Suppressed	Displayed

Idle conversations and messaging actions in messaging channels

In chat channels, the default idle conversation timeout period for Virtual Agent and Live Agent conversations is two hours (7200 seconds). However, for Live Agent conversations in messaging channels, certain messaging actions are automatically applied, which affects how idle conversations are handled. In messaging channels, when a requester hasn't responded to an agent message within two days, the conversation state changes to Closed Abandoned and the message is closed. For more information on messaging actions, see Configure messaging actions.

As admins, you can override the conversation idle timeout period per channel by setting the value in the **Conversation Idle Timeout** field in the Messaging Channels [sys_cs_channel] table. For details, see Override the conversation timeout period by channel.

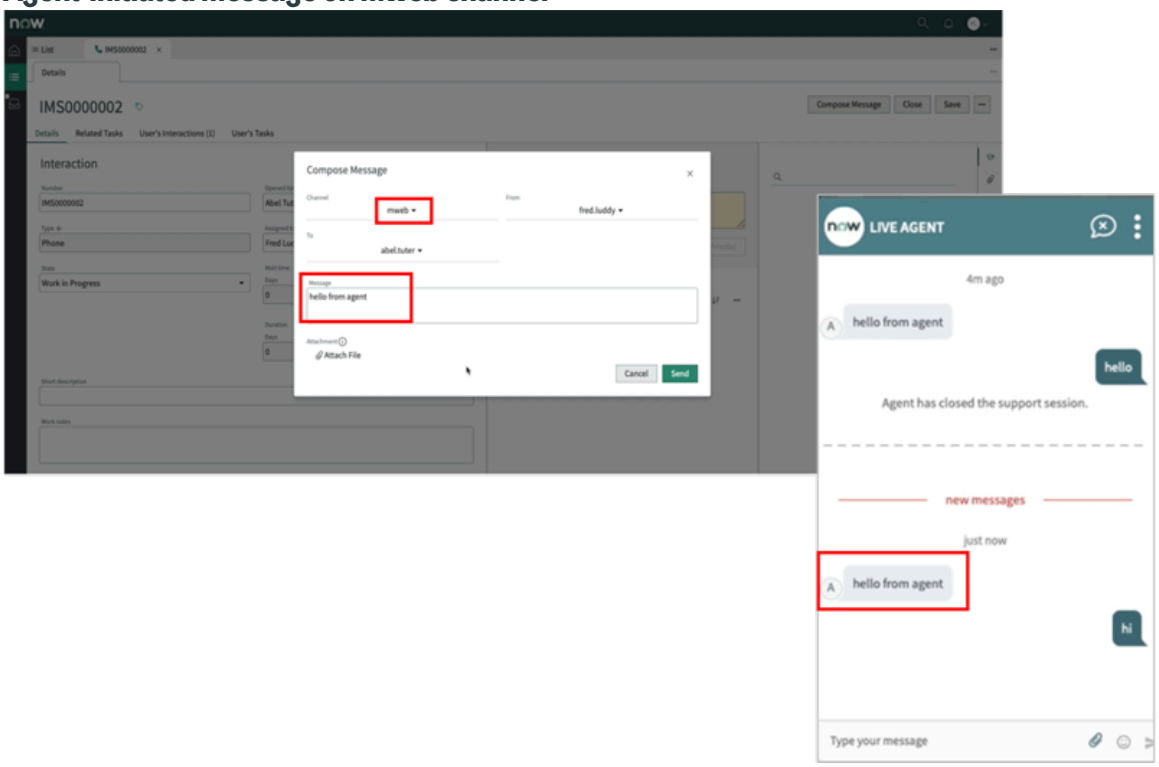
Proactive messaging

Using the Agent-initiated messaging interface, agents can proactively communicate with end users to share relevant or helpful information. When agents initiate messaging from the mweb channel in Asynchronous Chat, your users have the option to respond immediately and engage in a two-way conversational experience. Proactive messaging with the mweb channel has the following capabilities:

- **Compose Message** feature that agents use to create and send messages to selected users. Messages can contain links and file attachments.
- When a user replies to a message, the ongoing interaction context is retained, providing the agent with the information needed to maintain the conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent-initiated message on mweb channel



For more information on agent-intiated messages, see Install agent-initiated messaging interface.

End user experience in live agent conversations

When a user starts the chat widget after having received offline messages from a specific agent, for example Agent A, the conversation is in Live Agent mode:

- If Agent A is available, the user can resume the conversation with Agent A.
- If Agent A is not available, but Agent B is, depending on the agent reassignment settings, the chat window displays Agent B's name and avatar and the conversation resumes.
- If no agents are available, the conversation is routed to an agent based on the Queue Max Wait Time. If there isn't a wait time, the conversation waits until an agent becomes available.

Configure asynchronous chat for the web channel

Set the chat widget as a messaging channel for asynchronous chat.

Before you begin

Role required: virtual_agent_admin or admin

About this task

The base system web channel, mweb, is automatically configured as a chat channel for web and mobile clients. To use the web channel as a messaging channel, change the channel **Type** in the Messaging Channel [sys_cs_channel] table.

Procedure

1. Navigate to **All** and in the Navigation filter, enter `sys_cs_channel.list`.
2. In the Messaging Channel form, select the mweb record and double click the **Type** field.
3. Change the Type to Messaging.
4. Save the value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Result
The mweb channel is set to messaging mode. To help manage long-running conversations, the system automatically performs certain messaging actions in messaging mode:

- Requester message without agent response (agent experience): If an agent hasn't responded to a requester within 30 minutes, the agent receives a reminder that a message from an end user needs a response.
- Agent message without requester response: If a requester hasn't responded to an agent message after two days, the conversation state in the Interaction record is automatically set to closed abandoned.

For more information on messaging actions, see Configure messaging actions. For details on Virtual Agent and Live Agent idle conversation timeouts and conversation states, see Closing Virtual Agent and Agent Chat conversations and Virtual Agent interaction records.

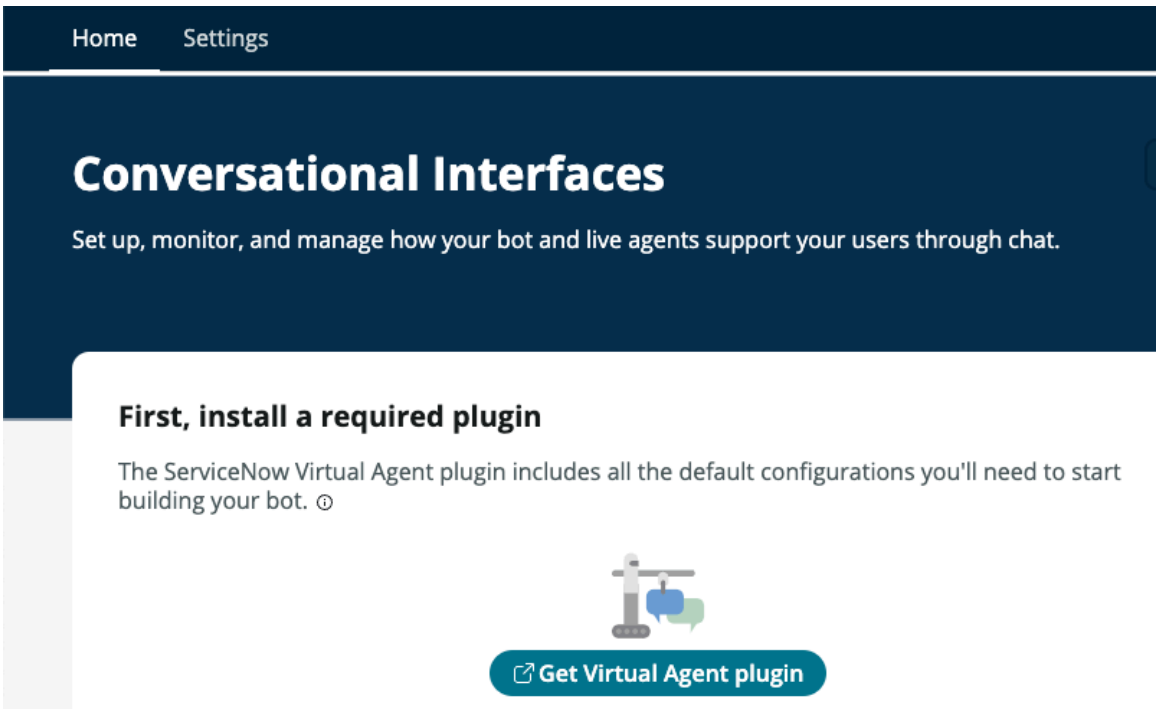
Installing Conversational Interfaces components

Use the Conversational Interfaces Home page to install Virtual Agent and related plugins. Once installed, select a card to customize your bot or set up Agent Chat.

If you've never installed Virtual Agent, the Conversational Interfaces console prompts you to do so first. The layout of the **Home** page may vary, depending on which features you have installed and configured.

Install Virtual Agent


To begin, you must install the Virtual Agent plugin. Select **Get Virtual Agent plugin** to install it.



Get pre-built bot topics


Activate plugins that provide the pre-built topic conversations you want to use to handle common user requests. For example, IT-related support issues, such as resetting a password or HR-related issues such as requesting a leave of absence. For more information, see Prebuilt Virtual Agent topics, topic blocks, and ServiceNow NLU models.

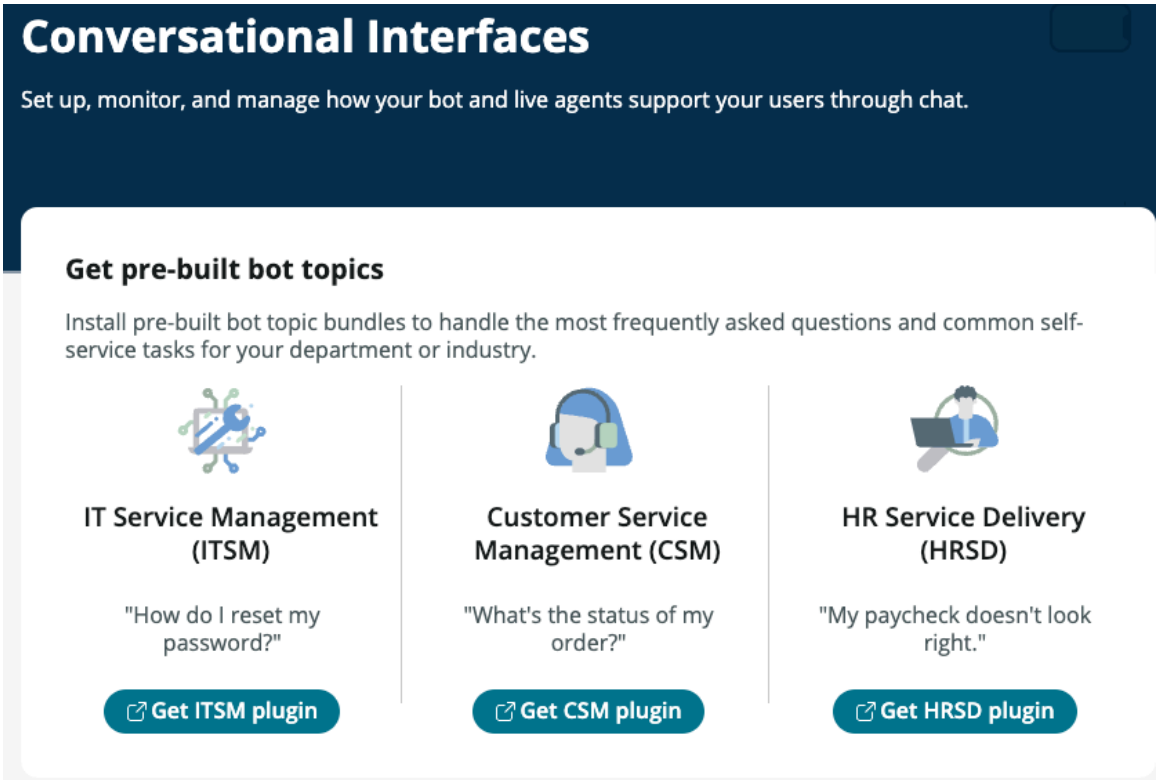© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Here's what you can do next

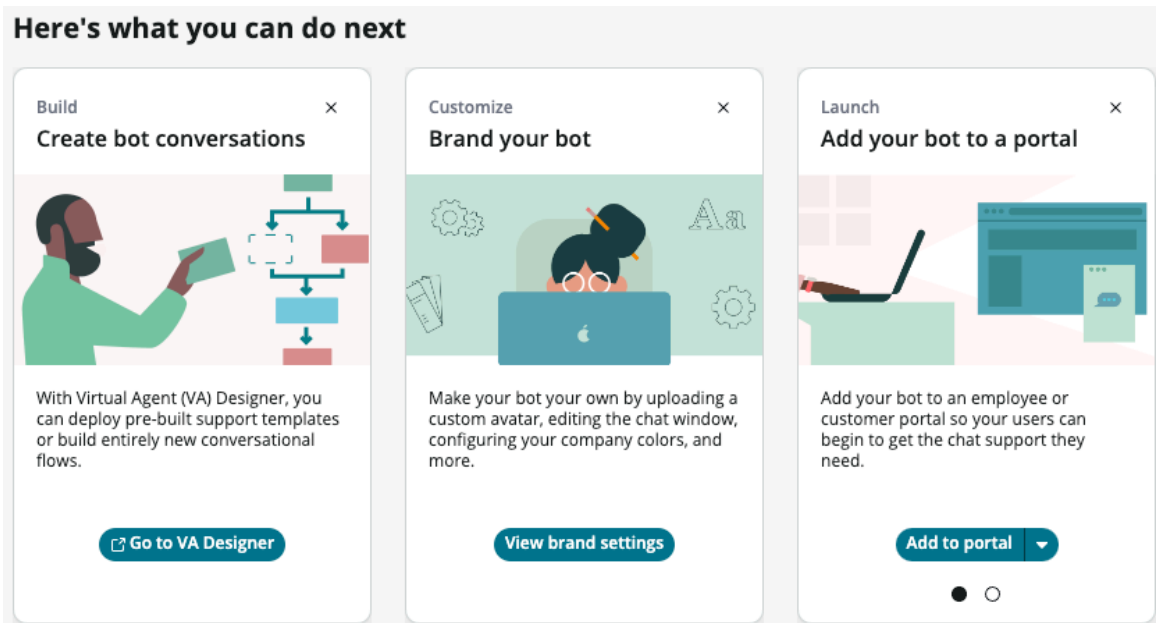Explore popular Virtual Agent settings from the Conversational Interfaces Home page. Next steps typically include branding your bot, adding it to a portal that your users can access, and creating conversations in Virtual Agent Designer.




Before implementing your Conversational Interfaces, take some time to ask and answer a few important questions meant to help you envision the Conversational Interfaces experience you need and want for your business. Browse the **Get the essentials for your Virtual Agent** section for more options.

Set up Agent Chat


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

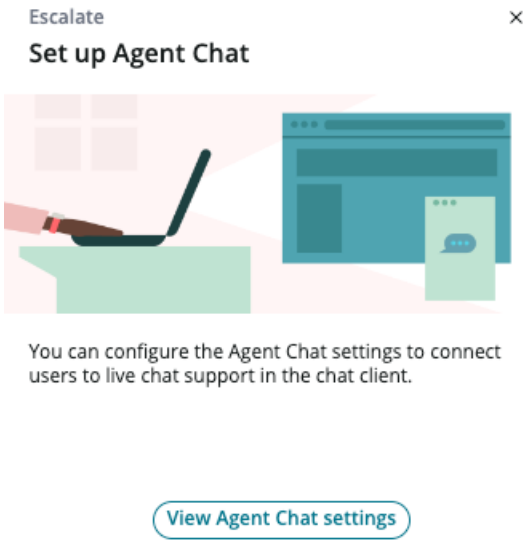Activate and set up Live Agent support. Set up agent names and avatars, set agent status messages, and determine whether agents can view user chat history.



Install Sidebar

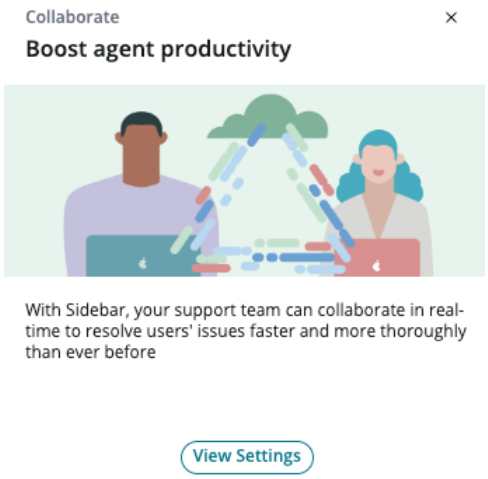
Provide live agents with a way to collaborate with others while they work on a Workspace record.



Bot Accelerator progress panel

The progress panel quickly shows you what has been configured and what tools remain unconfigured or inactive.

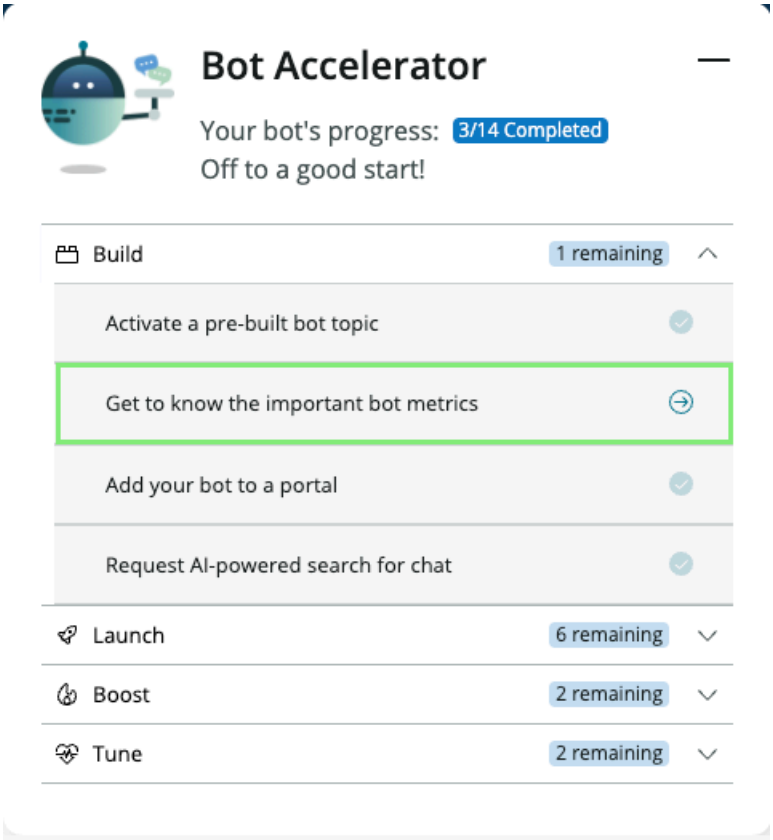© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Configuring Conversational Interfaces

You can use the Conversational Interfaces console and the **Chat Settings** option in the **Home** page to explore and configure general chat functionality and set up Virtual Agent and Agent Chat features.

Configuring Conversational Interfaces

Use the cards on the Conversational Interfaces console to set up features for Virtual Agent and Agent Chat. The cards automatically sort each time you visit and unaddressed features appear first.

For more information, select the question mark at the top right. This opens a contextual help panel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.






Now Assist in Virtual Agent cards

Card	Description
Create a Virtual Agent with Now Assist, using an LLM model and generative AI skills. 	To create a virtual agent using Now Assist, select **Get started** to display the Assistants screen. For more information, see Manage LLM virtual agents on the Assistants screen.
Create a Virtual Agent with NLU, which contains default settings and setup topics. 	To create a virtual agent using an NLU model: **1.** Select **Get started** to open a new window with the plugin screen where you can install the com.glide.cs.chatbot plugin. For more information, see Activate Virtual Agent. **2.** After the plugin is installed, return to the previous window and refresh it using your browser's refresh button. **3.** Select **Settings** to display the CI Admin Experience settings page. **4.** In the left-hand panel, select **Virtual Agent** to configure your settings and NLU models. For more information, see Configuring Virtual Agent.
Monitor your Now Assist in Virtual Agent 	To view Virtual Agent analytics for existing LLM virtual agents, select **View performance**. For more information, see . To manage existing LLM virtual agents, select **Manage assistants** to display the Assistants screen. For more information, see Manage LLM virtual agents on the Assistants screen.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

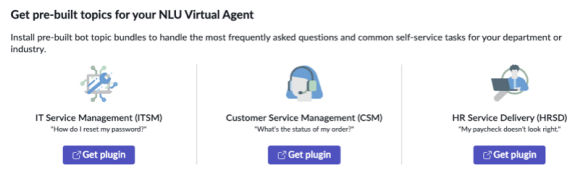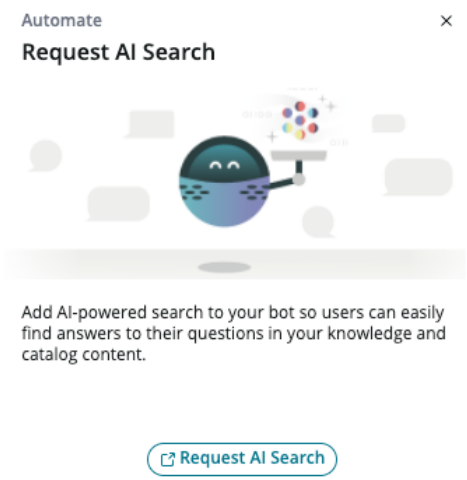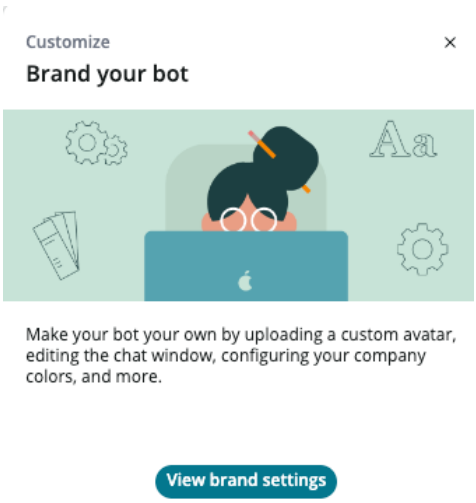Chat configuration cards

Card	Feature	Description
	Get pre-built topics	Teach your bot to handle additional requests using pre-built conversation topics.
	Request AI Search	Give your users the power to search for answers to their questions or solutions to their requests by adding AI Search to your Virtual Agent bot.
	Brand your bot	Customize your bot by selecting the colors and icons, and add a logo that reflects your company's portal.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

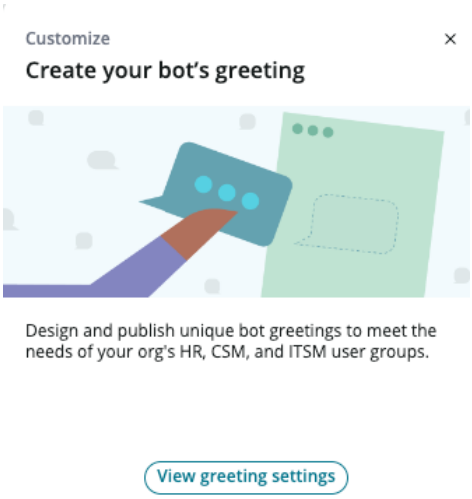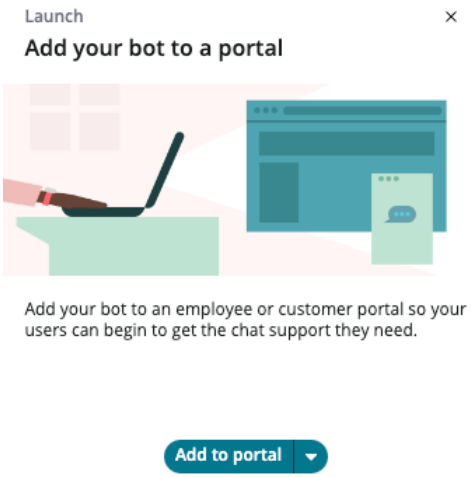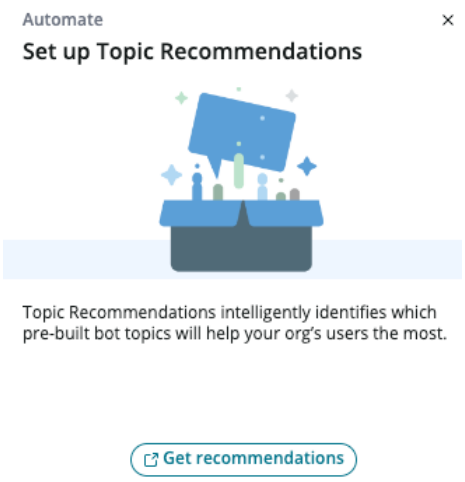Chat configuration cards (continued)

Card	Feature	Description
	Create your bot's greeting	Customize your bot by choosing how it greets and interacts with your users.
	Add your bot to a portal	Choose where you want your Virtual Agent bot to live by adding it to a portal.
	Set up Topic Recommendations	Get recommended topics based on analyses of existing support requests.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

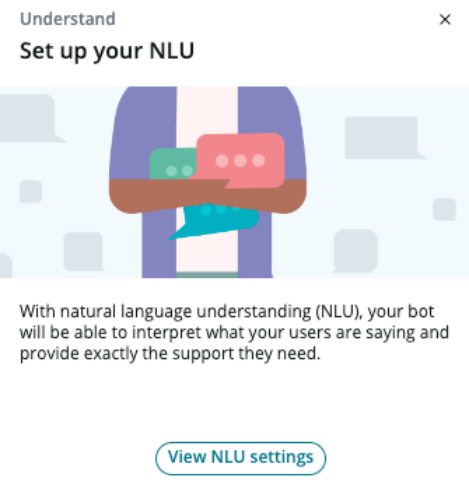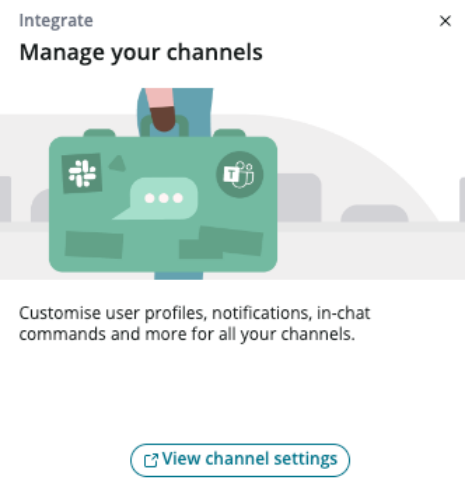Chat configuration cards (continued)

Card	Feature	Description
	Capture conversational metrics	Use the Conversational Analytics Dashboard to collect interaction metrics to evaluate your bot's performance.
	Set up Natural Language Understanding (NLU)	Help your bot better understand a user's intent. For details, see Advantages of natural language models over keywords.
	Integrating Virtual Agent with messaging apps	Add your bot to other channels, such as a Conversational Integration with Slack or Microsoft Teams.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

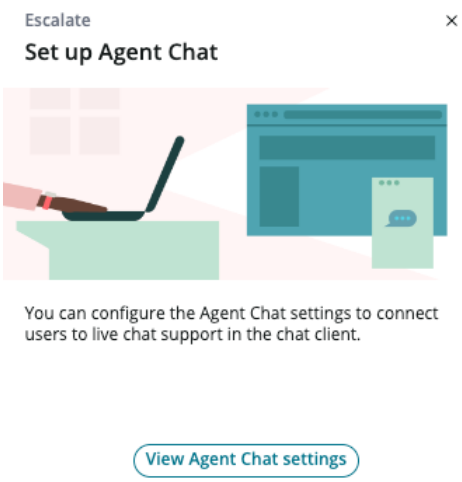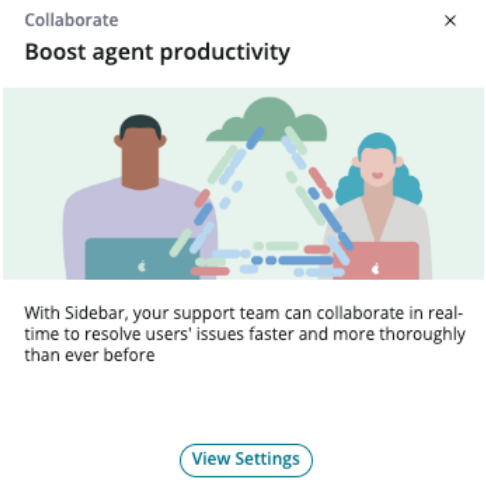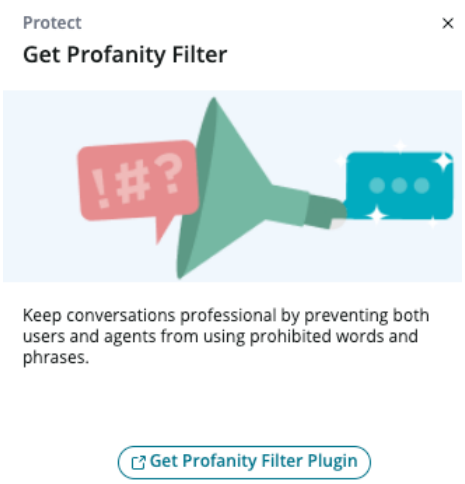Chat configuration cards (continued)

Card	Feature	Description
	Set up Agent Chat	Connect users to live chat support in the chat client they are using.
	Setting up Sidebar	Provide live agents with a way to collaborate with others while they work on a Workspace record.
	Install and configure the Profanity Filter plugin for Agent Chat	Prevent live agents from sending messages with inappropriate or profane language to requesters.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

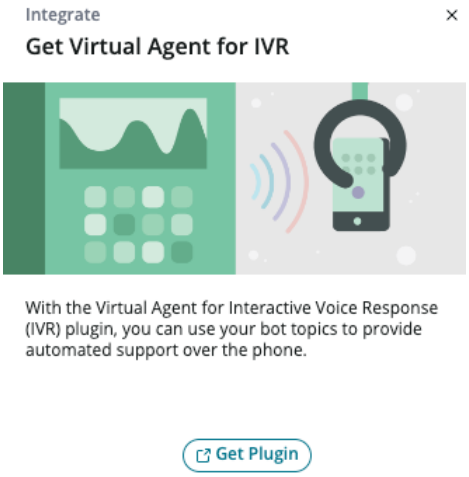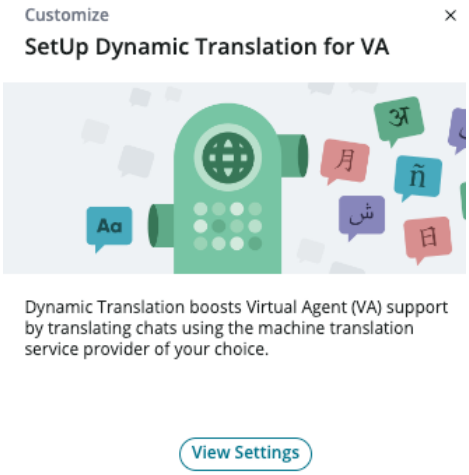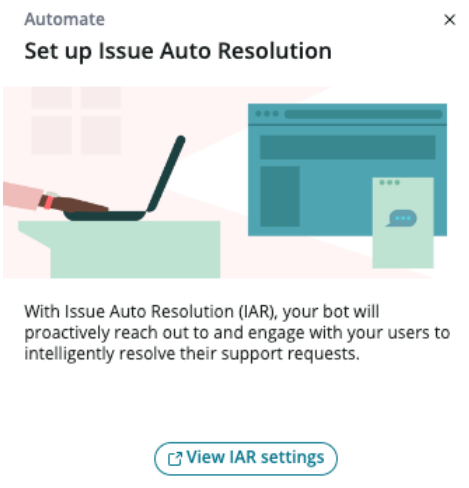Chat configuration cards (continued)

Card	Feature	Description
	Install Conversational IVR with Amazon Connect	Enable user conversations with a bot using the phone channel.
		Enable a combination of language detection and machine translation for Virtual Agent to improve the chat experience for diverse users.
	Set up Issue Auto Resolution	Provide users with immediate self-service by using machine learning to intelligently deliver Virtual Agent topics, Knowledge articles, and catalog items.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

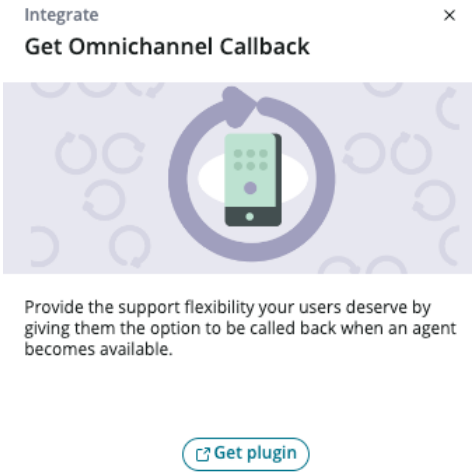Chat configuration cards (continued)

Card	Feature	Description
	Install Omnichannel Callback	Enable other ServiceNow® apps to display or announce callback options to users.

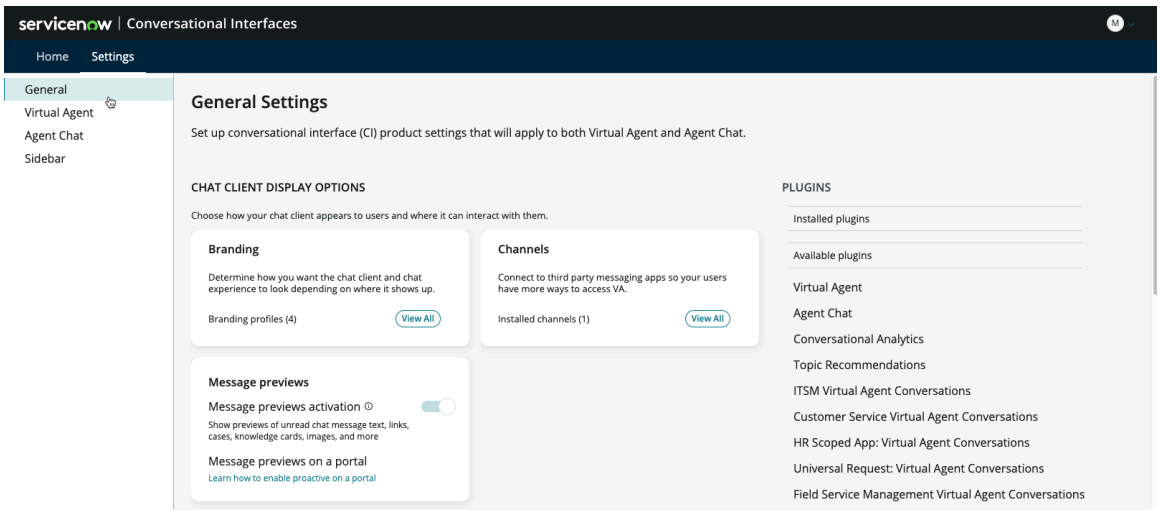
Assistants

The Assistants screen appears when you select the **Assistants** tab on the Conversational Interfaces home screen.

Chat settings

The **Chat Settings** tab opens with the **General** tab selected. This tab contains general settings that apply to all Conversational Interfaces applications. The currently installed plugins and available plugins that you can activate are listed as links. Select a link for more information or to start an activation process.

The **Virtual Agent**, **Agent Chat**, and **Sidebar** tabs in the left navigation pane open configuration settings pages for each application.



For more information about these settings, see the following topics:

- General settings
- Virtual Agent settings

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Agent Chat settings
- Sidebar settings

General chat settings

Use the Conversational Interfaces Console to set up the basic chat features shared by Virtual Agent and Agent Chat.

General chat settings

I want to...	See these topics
Chat Client Display Options	
Brand my bot	Branding your chat client
Preview new or unread messages in a minimized chat window	Enable message preview on the chat widget
Conversation Routing	
Configure my bot to run in third-party messaging apps	Integrating Virtual Agent with messaging apps.
Create pre-chat surveys	Define pre-chat survey configurations
Create and use context variables to store chat-related information	Configure context variables for storing chat-related information
Display or announce callback options to users through other ServiceNow apps	Omnichannel Callback
Configure topic context intents	Define topic context intent configurations
System Actions	
Modify system chat messages	Change Virtual Agent and Agent Chat system messages
Specify how links open from the chat window	URL navigation in Conversational Interfaces
Configure my bot to detect sensitive data	Configuring Sensitive Data Handler
Send email summaries of unread messages to users when they are inactive	Sending missed chat activity emails

Manage LLM virtual agents on the Assistants screen

Create, edit, and turn on/off LLM virtual agents from the Assistants screen.

Before you begin

Role required: virtual_agent_admin


Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Assistants**.
2. The Assistants screen displays existing LLM virtual agents with these fields:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Name	Virtual agent's name.
Description	Description of the virtual agent.
Status	Is the virtual agent active.
Last updated	Date and time the virtual agent was most recently updated.

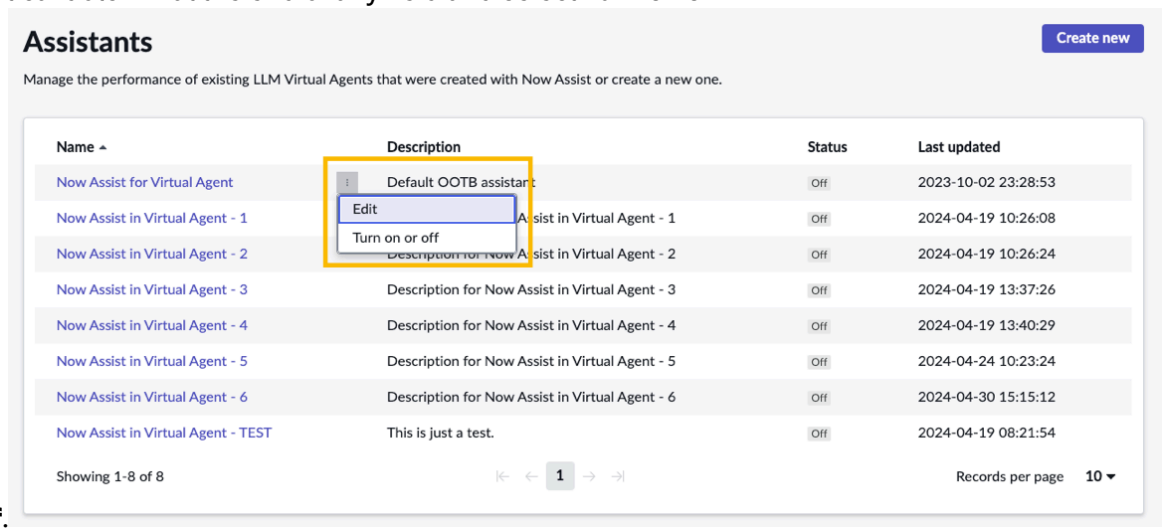3. To create a new virtual agent, select **Create new** to display the Now Assist for Virtual Agent Overview screen.
   Follow the screens to create a new virtual agent. For more information, see Configuring assistants overview.
4. To edit an existing virtual agent, select the virtual agent's name or select the three vertical dots at the end of any field and select **Edit**.
   If Virtual Agent is completely configured, the Now Assist for Virtual Agent Review screen displays. For more information, see Configuring assistants overview. If Virtual Agent is not completely configured, the last unfinished step in the Virtual Agent guided setup displays. For more information, see Installing Conversational Interfaces components.
5. To turn an existing virtual agent on or off, select the three vertical dots at the end of any field and select **Turn on or off**.



Add your bot to a portal

Give your users a place to interact with your bot and human agents. Choose a Service Portal chat configuration provided with your base system, such as the Service Portal Agent Chat configuration used for Agent Chat and Virtual Agent. Your end users can initiate and maintain a bot or Agent Chat conversation in any page of the portal.

Before you begin

Activate the Glide Virtual Agent (com.glide.cs.chatbot) or the Agent Chat (com.glide.interaction.awa) plugin. You can activate the Glide Virtual Agent plugin only if you have a subscription.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. Under **Add your bot to a portal**, select **Add to portal** to configure the base system portal. For example, to configure the portal used for Agent Chat and Virtual Agent, select Service Portal Agent Chat Config.
3. On the form, update the portal configuration.

Field	Description
Active	Option to make the configuration active. The base system Service Portal configurations are automatically active.
Name	Unique name for the configuration record.
Portals	The portals in which you would like to use this chat configuration. If no portal is selected, the configuration applies to all portals in the system.
Application	Read-only application scope for the record.
Public	Option to make the portal available to users before they log in.
Roles	Roles that a user must have to use the portal. If you don't select a role, Agent Chat and Virtual Agent is available to all users regardless of their role.
Order	Number that indicates the order in which the configurations should run. Only one configuration applies per portal. If there are multiple configurations on a portal, the system runs the first configuration found from lowest to highest.

Server script	A script that passes page and widget data to an Agent Chat conversation when a user initiates the conversation. For example, pass a field to the chat conversation to enable Agent Chat to access the value. Data passed in this script is available to every page in the portal associated with this record. This script has access to the GlideSPScriptable API.
	
	Note:
	The portal suffix, page ID, and language are automatically available to Agent Chat and do not require a custom script. Sys ID and table are automatically available to Agent Chat when they are present in the URL.
	
	The following example returns an object containing the list of catalogs associated with the portal to the current conversation.
	`(function ($sp) {`
	`  return {`
	`  catalogs: $sp.getValue('catalogs')`
	`  };`
	`})($sp);`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	When Agent Chat opens in an `iframe` HTML element, the list of catalogs is included in the `iframe` URL. Parameters from this field override any conflicting page data passed to Agent Chat.

4. Select **Update**.

Result

Your end users can initiate and maintain an Agent Chat or Virtual Agent conversation from any page in the selected portal.

What to do next

See your portal in action

Return to Conversational Interfaces Home and under **Add your bot to a portal**, select the second navigation dot at the bottom of the card. When the card changes to **Interact with your bot**, use the **Open portal** menu to select the portal to view. When the specified portal page opens, select the chat icon in the lower right corner to start a bot conversation.

Configure other Service Portal Agent Chat features

In Service Portal, you can customize the Agent Chat button and pass page data to Agent Chat. For more information, see Configure Agent Chat in Service Portal.

Branding your chat client

Customize your chat interface with your own brand, including company logo and bot avatar, UI color schemes, fonts, and the chat support menu displayed to your users.

Note:
For new customers onboarding from Vancouver onward, the chat widget is only accessible to authenticated users by default. To allow unauthenticated users to access the chat widget, enable **Public access** in **Conversational Interfaces** > **Settings** > **General**. For more information, see Enable public access to the chat widget.

Multiple branding configurations

You can create any number of branding configurations for an instance. These branding configurations apply to the web chat and mobile clients and don't apply to the Conversational Integrations for Slack, Microsoft Teams, Workplace by Facebook, and Facebook Messenger.

Note:
Branding for bots in the Conversational Integration with Microsoft Teams is available through the Microsoft Teams app customization feature. For details, see MS Teams branding for the conversational integration in Now Community. For information about branding bots in Slack, see Configure branding for your Virtual Agent bot in Slack.

The default branding configuration includes the Virtual Agent bot, which has a ServiceNow avatar. If you want additional branded bots, create a user profile for each bot in the User [sys_user] table. Give your bot a unique user ID, name (for example, Acme), upload the photo (image) for your bot avatar, and make your bot active. For details on adding users to your instance, see Create a user.

Once created, you then select the bot to be used in a configuration. A branded bot can be used in a single configuration or in multiple branding configurations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported branding items

Conversational Interfaces provides a default branding configuration that you can customize. To change the default configuration, create other branding configurations, or modify the chat (support) menu, gather and prepare the following files and information:

Organization images

Images of company logos to be used in your chat windows. If you're using Virtual Agent, the images of avatars to be used for branded bots.

Images must be in .jpg, .png, .bmp, .gif, .jpeg, .ico, or .svg file format. The images can be high resolution, but the image display is scaled based on the aspect ratio. Keep in mind that if chat is run in its own browser window, a thumbnail of the branding logo displays automatically in the browser tab.

Colors and fonts

Colors and fonts used for the various user interface items, such as chat bubbles, buttons, and notifications displayed.

If you want to change the color of interface items, determine the Hex number or RGBA color for those items. When you specify the Hex or RBGA colors during configuration, you can immediately see your changes in the example chat window. To learn more about Hex numbers and RGB color specifications, see HTML Color Names (W3CSchools).

UI items in the chat window



Chat menu items

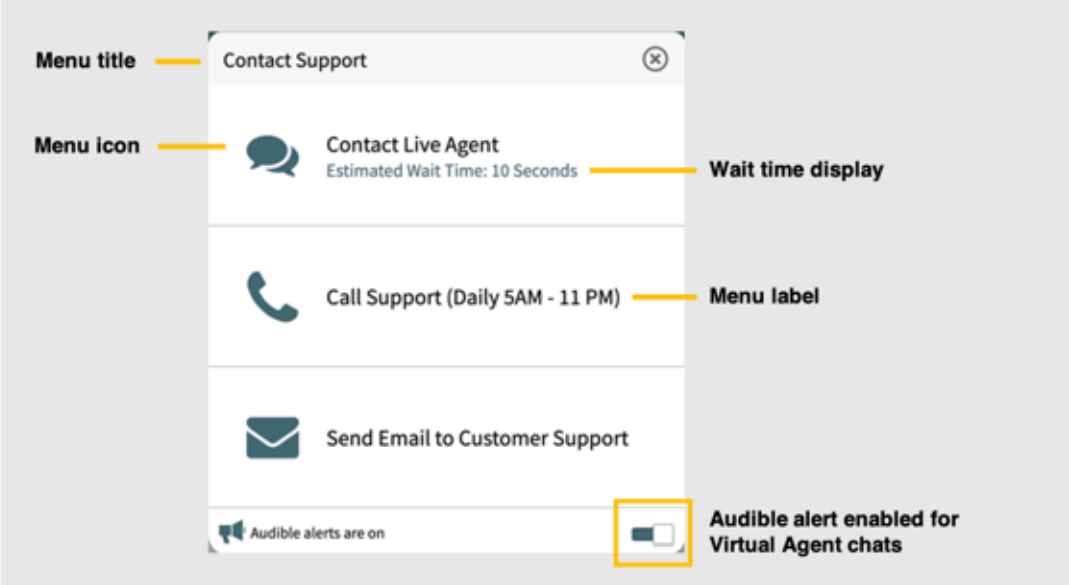
Contact information for your support organization, such as support call hours, call center support phone number, and support email address. You can customize

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

information in the support menu by adding or changing menu items, including the text and icons displayed. You can also control the visibility of the menu items (show or hide menu options).

You can also change the default menu icons or add icons for new menu items. The icons must be in .svg file format. For better resolution, use a single-color icon.

Chat menu



Create a new user for a branded bot

The default branding configuration includes the Virtual Agent bot, which has a ServiceNow avatar. To create a new bot with your own branding, create an active user profile for the bot and link it to a Live Profile.

Before you begin

Role required: admin

About this task

If you want to create a new branded bot, create an active user profile for each bot in the User [sys_user] table. Then create a bot profile record by adding this user to the Live Profile [live_profile] table.

Procedure

1. Create a user for the bot.
   Include an image (avatar) for your bot when you create the user. Also ensure that the user is active.
2. Navigate to **All**, and then enter `live_profile.list` in the filter.
3. Select **New**.
4. On the form, fill in the fields.

Field	Description
Name	Unique name for the bot profile.
Type	Type of live profile. Select **User**.
Document	Table associated with the profile.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	a. Select the Search icon  . **b.** In the Select the document dialog box, specify the following information: ▪ **Table name**: Select **User [sys_user]**. ▪ **Document**: Select the name of the user you created for the bot. **c.** Select **OK**.
Photo	Image (avatar) for the bot profile.
Description	Text that describes the live profile.

5. Select **Submit**.

Result

You can associate the bot profile with a new branding configuration. For details, see Set up your Virtual Agent bot's branding.

Set up your Virtual Agent bot's branding

Create different Virtual Agent branding configurations for the various organizations that use your instance. These configurations apply to the web-based chat and mobile clients only.

Before you begin

If you're using ServiceNow® mobile, make sure you set up Virtual Agent for mobile chat. For details, see Configure Virtual Agent for a ServiceNow mobile application.

Check for updates and improvements to the Omni-Experience Standard Feature Set application on the ServiceNow Store.

Note:
Branding for bots in the Conversational Integration with Microsoft Teams is available through the Microsoft Teams app customization feature. For details, see MS Teams branding for the conversational integration in Now Community. Branding for bots in Slack is available as well. For details, see Configure branding for your Virtual Agent bot in Slack.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under the **Display Options** section, select **View All** next to **Branding**.
3. Select **New** to create a branding configuration or select the branding configuration record to be updated.
4. On the form, fill in the fields.


Label	Description
Branding name	Name of the branding configuration. Create a new branding configuration or select one of the available choices. For the Yokohama release, the choices include:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Label	Description
	○ Polaris-Dark ○ Polaris-Light
Chat Header	Text string that identifies your company or organization in the chat window header. For example: Acme Support.
Minimum delay between bot messages (ms)	Minimum delay, in milliseconds (ms), that occurs between bot responses. The default delay is 500 ms.
Minimum delay before displaying typing animation (ms)	Minimum delay, in milliseconds (ms), that occurs before showing the animation ellipsis indicating the bot is processing user input.
Menu Title	Name of the support menu. The default title is Contact Support.
Branding key	Read-only sys_id of the configuration, which reflects the **Branding name** you entered. The key is in lower case letters with spaces replaced by underscore characters.
Button Selection Text	Font color of the **New messages above** or **New messages below** buttons.
Bot Profile	List that opens the Live Profile form to select or create a new bot user profile, which includes the bot picture (avatar). This bot picture appears in the chat messages. ○ To review and edit the Virtual Agent or Now Assist bot profile, select the information icon. ▪ To change the bot picture or description, select **Edit record** in the message at the top of the page. ▪ In the Live Profile form, modify the fields and select **Update**. ○ To choose or change the bot for the configuration, select the search icon and select the **Bot Profile** field. Choose the bot profile that you created in a previous step.
Chat Header Logo	Logo image that displays in the chat header. If live chat is run in a browser window, the logo also displays in the browser tab. The chat header logo is set to 42x42 pixels, and the chat message logo is set to 24x24 pixels. An uploaded image that is smaller than these dimensions will appear stretched. A larger image will be scaled down. ○ To add a logo, select **Attach Image** and use the file finder to choose the image. ○ To change the logo, select **View image**. From the file finder, select the new logo file and select **OK**. The updated logo displays below this field. ○ To remove the logo, select the trash icon. The file is immediately deleted.
Enable showing the 'New Messages Below' or 'New Messages Above' notification	Select this option to display notifications for new messages below or above your current view of the chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

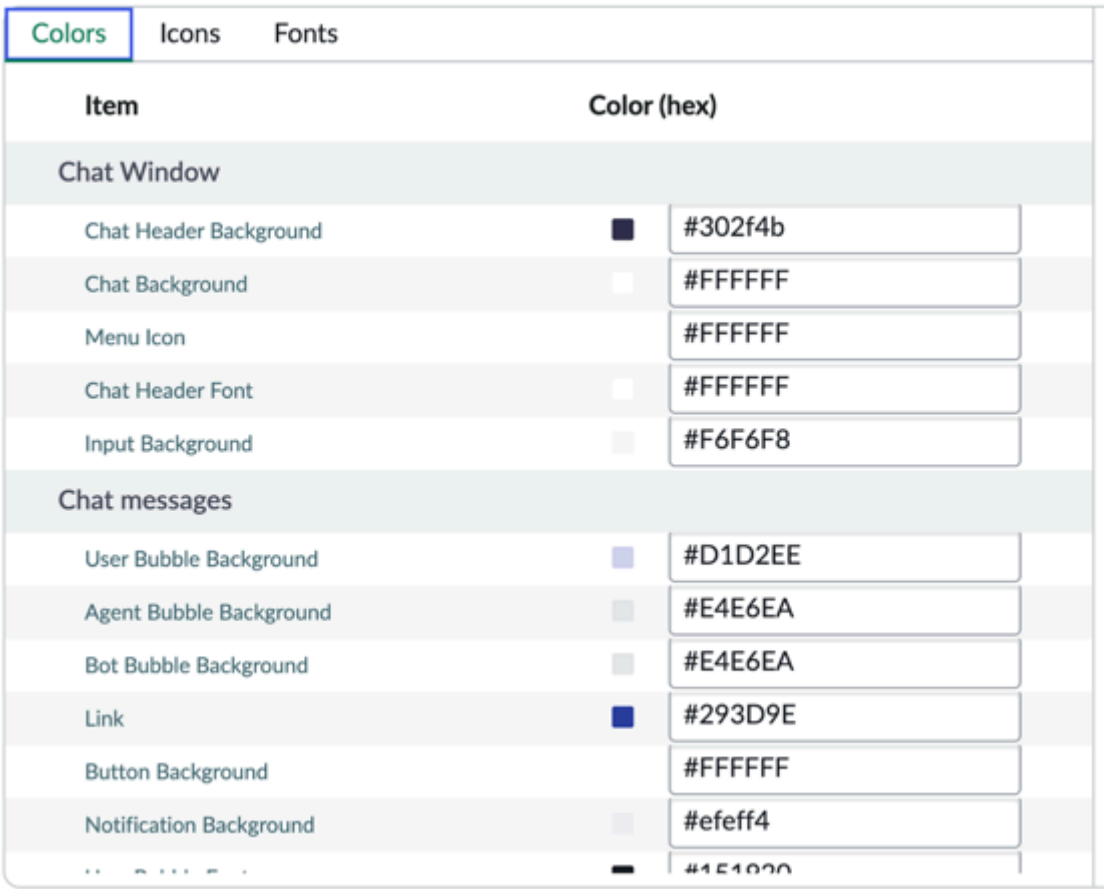5. Select **Save**.
   From here, you can adjust the color, icons, and font type and size of the chat client to match your brand. For example, you can:
   - Change the color of items
   - Customize the icons
   - Customize the fonts used in the chat
6. To change the color of items in the chat window, select the **Colors** tab.



Select an item and specify the Hex or red blue green alpha (RGBA) colors you want to use for that item. When you do so, the example chat window shows a preview of your changes.

Customize color for each item


Label	Description
Chat window	
Chat Header Background	Background color of the chat header.
Chat Background	Background color of the chat window.
Menu Icon	Color of the menu icon, which provides user options to end a conversation or contact customer support.
Chat Header Font	Font color of text in the chat header.
Input Background	Background color of the user input bar.
Chat messages	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Label	Description
User Bubble Background	Background color of the user chat bubble.
Agent Bubble Background	Background color of the live agent chat bubble.
Bot Bubble Background	Background color of the bot chat bubble.
Link	Color of links presented in the conversation.
Button Background	Background color of buttons used in the conversation.
Notification Background	Background color of Virtual Agent notifications delivered in the web chat client.
User Bubble Font	Font color of text in the user chat bubble.
Agent Bubble Font	Font color of text in the live agent chat bubble.
Bot Bubble Font	Font color of text in the bot chat bubble.
Link turned off	Color of links turned off in the conversation.
Notification Text	Font color of Virtual Agent notifications delivered in the web chat client.
Others	
System message	Color of general system messages displayed in the conversation.
Category background	Background color of the heading above a list of topics.
Separator	Color of the dashed line that separates each conversation in the Preview window.
Time Stamp	Color of the timestamp displayed when significant activity occurs during a conversation, such as a record being created.
Category font	Font color of text in the category heading.
Loading Animation	Color of the animated dots that indicate the system is processing information.

7. To customize the chat icons in the chat window, select the **Icons** tab.

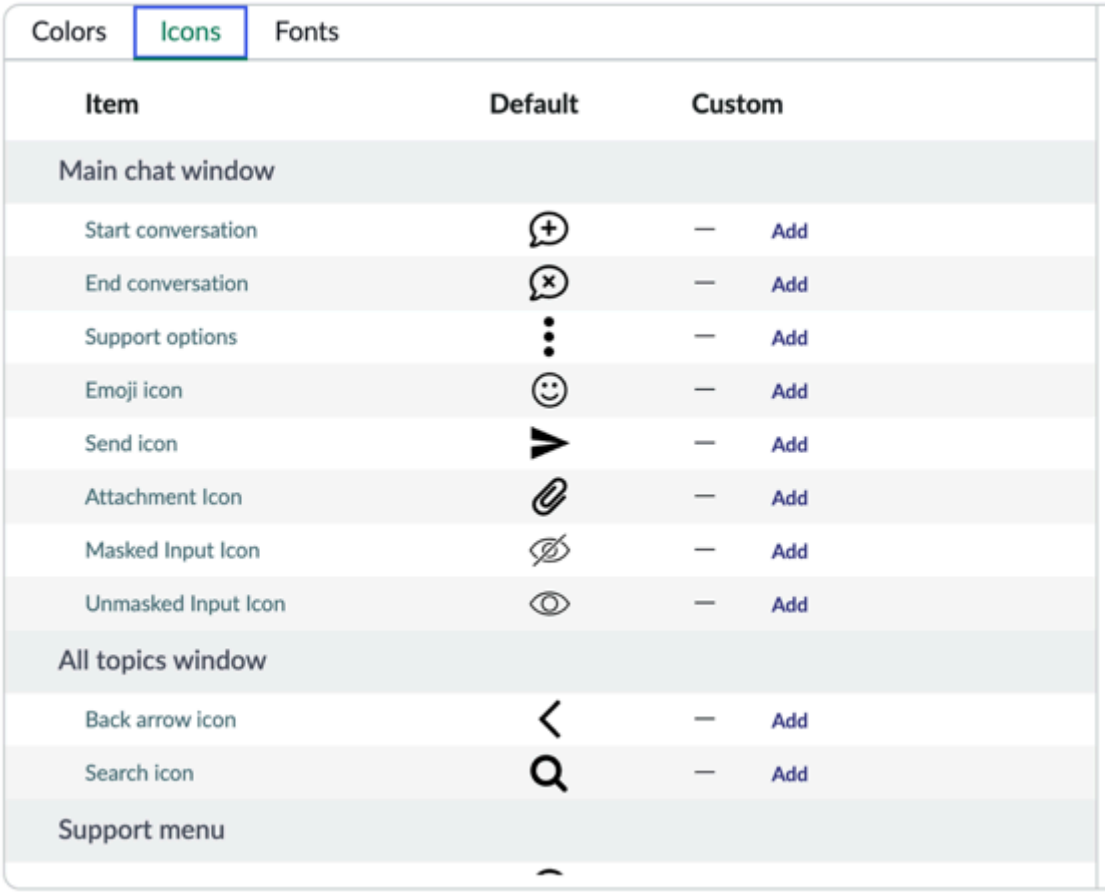© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



You can customize the icons on four different chat screens: the main chat screen, the all topics screen, the support menu, and the end conversation screen. Use this tab to do the following:

- Add a custom icon: Select **Add** for the icon, and then select **Attach image**. After choosing the image file, select **Apply**.
- Replace a custom icon: Select **Replace** for the icon. Select the trash can icon to delete the current image, and then upload a new one.
- Revert to the system default icon: Select **Remove** for the icon.

> **Note:**
> You can't remove system default icons.

When you specify the icons during configuration, the example chat window shows a preview of your changes.

> **Note:**
> Unlike other settings on the branding page, icon changes take effect on the chat widget as soon as you select **Apply**. Other changes don't take effect until you select **Save** at the top of the page.
>
> Valid file formats are .jpg, .png, .bmp, .gif, .jpeg, .ico, and .svg.

8. **Optional:** Customize the font type and font size.

   (Optional) The available branding configurations (for example, Polaris-Light or Polaris-Dark) are located here.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
This feature is only available after you've installed and updated the Omni-Experience Standard Feature Set to the latest version through the ServiceNow® Store.

To customize the fonts shown in the chat, select the **Fonts** tab.

To change the font type, choose one of the following methods:

a. Select the fonts you want to use.
From the **chat header text** drop-down list, select the font you want to use for the header.

Do the same for the **chat body text.**

You will see an example of the new font.

b. Download the fonts from a URL.
From the **Add custom font** drop-down list, select **From URL**, specify the URL, and apply the changes.

c. Upload the fonts you want to add from an attached file.
From the **Add custom font** drop-down list, select **Upload font**, specify the path to the file you want to attach, and apply the changes.

(Optional) To change the font size for the chat header and the chat body, do the following:

a. From the **Font body size** dropdown, choose the Regular, Large, or Extra Large font size.

b. From the **Font header size** dropdown, choose the Regular, Large, or Extra Large font size.

Note:
These changes do not apply to custom controls you have added to the chat widget. Custom controls must be updated separately.

c. Preview the changes in your chat window on your portal or website.

9. To update the Contact support menu, scroll down to the **Menu Items** section.



You can change the icons, labels, visibility, and display order of the Email, Chat, and Phone menu items. You can also add custom options to the menu.

a. In the **Menu Items** section, do any of the following:

- To edit a menu item, select the record icon.
- To add a new menu item, select **New**.
- To delete a menu item, select the record icon. In the record, select the More Actions icon , and then select **Delete**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For each menu entry, fill in the fields.

Field	Description
Label	Text string that describes the menu type. The labels for the default menu types in the Global application scope are: ▪ Email - Option that opens the default email. Default label: **Send Email to Customer Support** ▪ Chat – Option for chatting with a live agent. Default label: **Contact Live Agent** for Chat type ▪ Phone - Option that indicates when phone support is available. Default label: **Call Support—(Daily 5AM - 11PM)** The label text can be up to 75 characters in length.
Type	Type of menu item. For example, if you're adding a menu item that is a link to specific information such as a help page, select the `Link` Type. The menu item types are: ▪ Email: Option for contacting support through email. ▪ Link: Option for a link to a web page ▪ Chat: Option for contacting a live agent through chat. ▪ Text: Option for setting a text string ▪ Phone: Option for contacting support by phone
Value	The menu type value. For example, the **Value** for Email is the email address of the support group. The values for the default menu types are: ▪ Email: Email address of the support group. For example: support@example.com. ▪ Phone: Phone number of your call support organization. ▪ Email: Email address of your support organization. **Note:** The chat menu type doesn't have a value.
Visible	Option that makes the item visible in the Contact support menu. Clear this option to hide the menu item.
Display default icon	Option that indicates the default icon for the item is visible in the menu. Clear this option to add, change, or delete a menu icon.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	▪ To add an icon for a new menu item, select **View image**. From the file finder, choose your icon file and select **OK**. The uploaded icon displays below the **Icon** field. ▪ To change an icon, in the **Icon** field select **Update**. From the file finder, select the new logo file and select **OK**. The updated Icon displays below this field. ▪ To remove the icon, select **trash** icon. The file is immediately deleted.
Order	Number that identifies the sequence in which the item appears in the Contact support menu. The number 1 indicates that the item is the first option listed in the menu.
Application	Global.

b. When you complete the **Menu Item** section for a menu type, select **Save**.

10. **Optional:** Navigate to the Branding table [sys_cs_branding_setup.list], and select the Branding Name you created.

> **Note:**
> This step is only applicable if you're configuring an assistant using Now Assist in Virtual Agent enhanced chat or enhanced chat's full-page experience.

a. Select **Configure** > **Form Layout** from the Additional Actions icon ( ).

b. Move the following Available fields to the Selected fields, and then **Save**:

- Search Toggle Button Label
- Enable Unread Conversation Count Display
- Left Panel Header Label

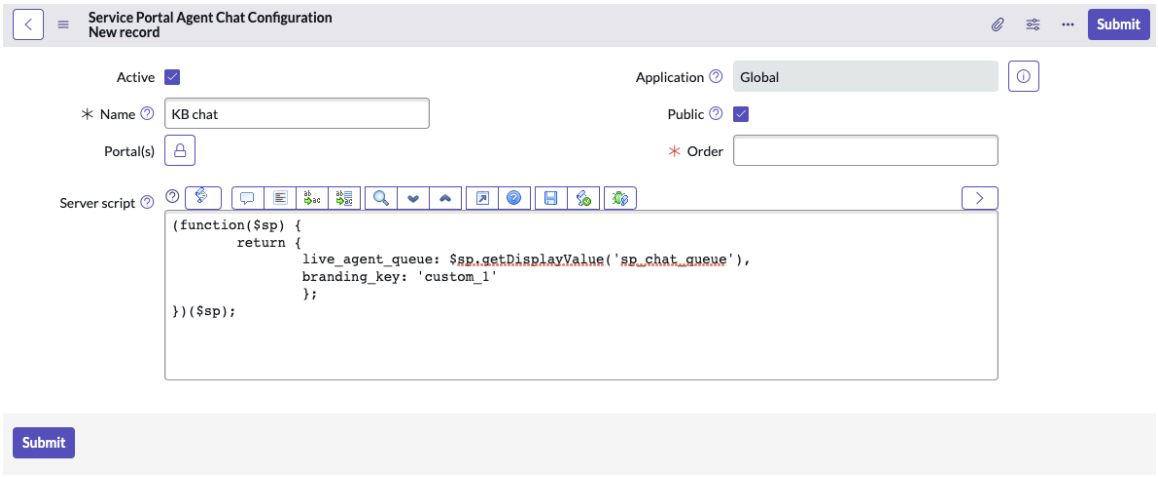
c. Configure the newly added fields.

11. Do one of the following to apply the branding configuration:

- Apply the branding configuration to a Service Portal Agent Chat Configuration. In the server script that passes page and widget data to an Agent Chat (Virtual Agent or Live Agent) conversation, specify the branding key to be used. Items passed in this script are available to all pages in the portal. For details on setting up Service Portal Agent Chat, see Add your bot to a portal.

  For example, the following Service Portal Agent Chat Configuration for the Knowledge Portal uses the chat branding key, `custom_1`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Note:
There are other Service Portal Agent Chat features that you can configure, such as customizing the Agent Chat button in your portal. For more information on customizing the Agent Chat widget in Service Portal, see Configure Agent Chat in Service Portal.

- Apply the branding configuration to a destination page. Enter the system parameter `sysparm_branding_key` with the branding key in the chat widget URL. For example:

  `https://<your-instance-name>service-now.com/$sn-va-web-client-app.do?sysparm_branding_key=acme`

  In this example, `acme` is the key of the branding configuration to be used.

- Apply the branding configuration to an embedded chat widget. Enter the system parameter `sysparm_branding_key` with the branding key in the URL for the embedded chat widget. For example:

  `https://<your-instance-name>service-now.com/$sn-va-web-client-app_embed.do?sysparm_branding_key=acme`

  In this example, `acme` is the key of the branding configuration to be used.

12. **Optional:** If you're using Conversation Autopilot with your branded bot, specify the branded bot name displayed in the chat window during Autopilot sessions by changing system properties as follows.

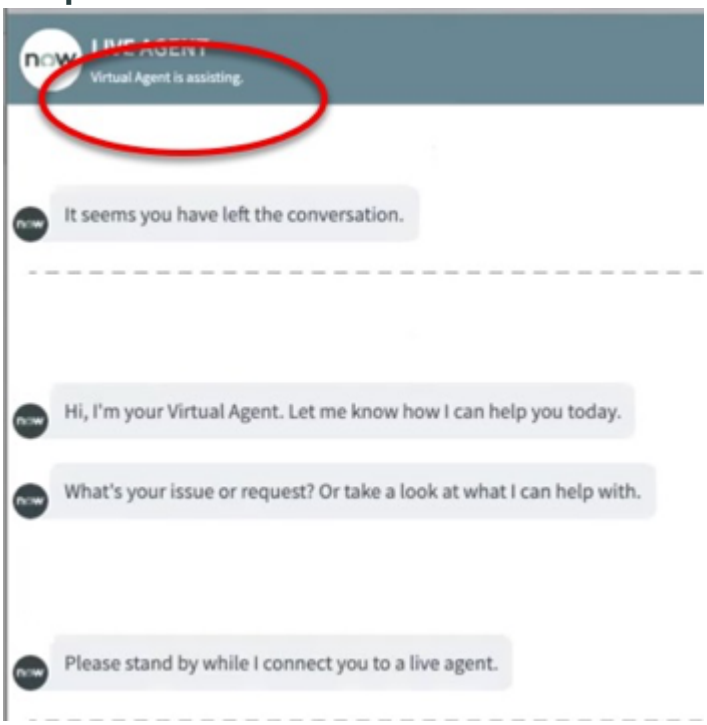
    a. Navigate to **All** > **Conversational Interfaces** > **Settings**.

    b. Under the **System actions** section, select **View All** next to **System messages**.

    c. Change the **Value** field of the *com.glide.cs.autopilot.client_initiated_header* system property to specify the branded bot name instead of the Virtual Agent bot name displayed in the header of the chat window.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Autopilot header in chat window



d. Update the *com.glide.cs.autopilot.client_initiated_message* system property to specify the branded bot name displayed to the requester during the conversation.

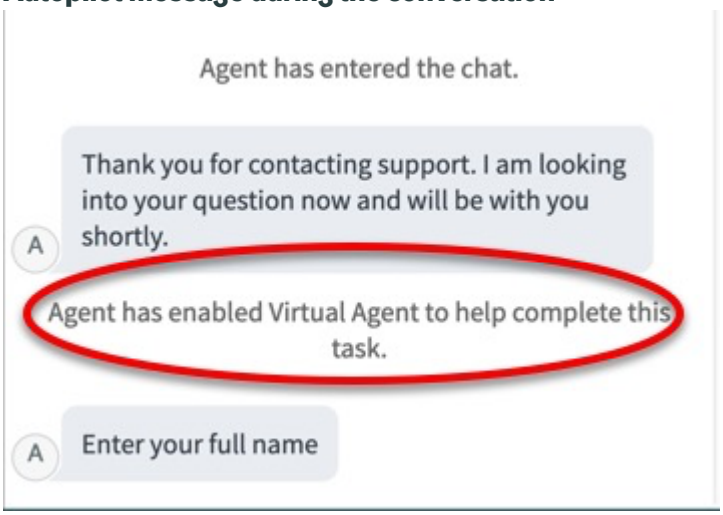Autopilot message during the conversation



Enable message preview on the chat widget

Admins can allow their end users to see a preview of any new or unread messages waiting for them when the chat window is minimized.

Before you begin

This feature is only available after you've installed and updated the Omni-Experience Standard Feature Set to the latest version through the ServiceNow Store.

Set the com.glide.cs.advanced-chat-popover system property to True. This system property activates the smart chat component on the Service Portal. By default, the property is set to False. This system property is only applicable to the requester persona.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: admin

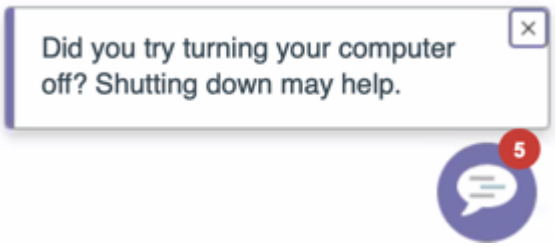
Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **General**.
2. Under **Display options**, activate **Message preview**.
   A message displays confirming that the setting has been saved.

Result

When message preview is activated, and the chat window is minimized, the end user sees a message preview badge icon in the minimized chat window. The message preview badge icon lets the user know that there are new or unread messages, and how many. In this example, the end user has one new or unread message.

A message preview pane shows the first new or unread message next to the badge icon. The message is based the conversation. For example, if the user needed help with using the laptop, the message preview pane could be similar to the following image.



The end user can either:

- Click the message preview pane to continue the conversation in the chat, or
- Close the message preview pane.

The badge icon appears only when there are new or unread messages. The badge icon is updated every 10 seconds, and displays the first new or unread message.

Enable public access to the chat widget

Enable public access to the Virtual Agent chat widget for portals.

Before you begin

Role required: admin

About this task

Public access to the Virtual Agent chat widget defaults to off. Use the following steps to allow public access to the chat widget for only portals.

Procedure

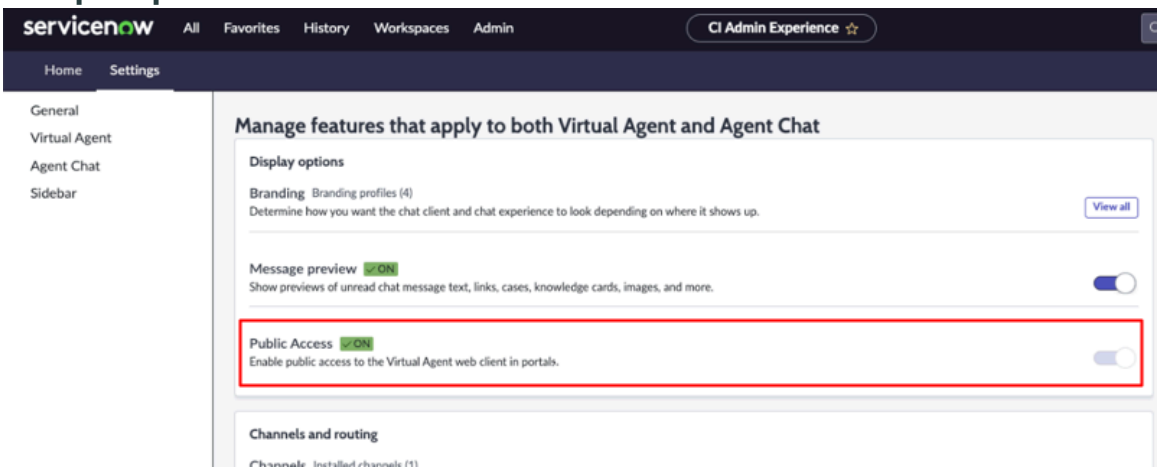
1. In the unified navigation bar, select the globe icon ( ).
2. Select **Application Scope**, then choose the *`Virtual Agent Web Client`* scope.

   Tip:
   You must be in the *`Virtual Agent Web Client`* scope to enable public access.

3. Navigate to **All** > **Conversational Interfaces** > **Settings** > **General**.
4. Under **Display options**, enable **Public access**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of public access



A message displays confirming that the setting has been saved.

Configure context variables for storing chat-related information

Specify chat context variables, also called Live Agent chat variables, for storing chat-related information, such as pre-chat survey responses. These variables contain contextual information that can be used to determine topic intent or control how chats are routed to live agents. You can also define variables to capture contextual information passed in Virtual Agent topic scripts to share with live agents.

Before you begin

Virtual Agent provides pre-built context variables. Before you add a variable, review the list of available Live Agent context variables.

Role required: virtual_agent_admin or admin

About this task

You can use context variables in scripts or with the condition builder. For example, you can reference context variables in the **Live agent** area in the topic **Properties** tab when creating a topic. When a condition is applied to a topic, it must return as true to display to the user.

For details about using context variables in topic scripts, see Virtual Agent scripts. For information about learning to use context variables, see Tutorial: Route interactions by context. For descriptions of Live Agent context variables, see Live agent chat context variables.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under **Context variables**, select **View All**.
3. On the Context Variables page, select **New** to add a variable.
4. On the form, fill in the fields.

Field	Description
Name	Name of the context variable to be created.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Script Variable Name	Live Agent variable name, which is automatically created from the **Name**. The variable name begins with `LiveAgent`.
Table	Name of the ServiceNow table associated with the context variable. Select a table from the list.
Record	Option to associate the context variable to a record in the specified table. If you selected a table, this option is automatically selected.
Value	Script that determines the information stored in the context variable.

5. Select **Save**.
   The context variable is now available for use.

Live agent chat context variables

Use chat context variables to pass certain information from the topic to share with a live agent or to control how bot conversations are routed to live agents. Virtual Agent includes some default variables, and you can define new ones.

Note:
The Interaction table is part of the interaction management framework, which is activated through the Interactions Management plugin (com.glide.interaction). This plugin is included with the Agent Chat (com.glide.interaction.awa) and Connect Support (com.glide.connect.support) plugins.

Live Agent variables included with Virtual Agent

Variable	Description
application	Application scope of the chat. For example, *Global*, *HR*, *CSM*, or *ITSM*.
auto_resolution_context_id	If Auto Resolution is enabled, the ID of the record created when a requester is redirected to Virtual Agent.
case	Case ID (from the [sn_customerservice_case] table) that is used with the Customer Service Management application when a case is related to the chat.
csp_category	Category defined in the Consumer Service portal in the CSM application (requires the com.glide.service-portal.consumer-portal plugin). For more information, see Using the Consumer Service Portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Live Agent variables included with Virtual Agent (continued)

Variable	Description
csp_email	Requester's email address, as entered in a pre-chat survey on the Consumer Service Portal.
csp_first_name	Requester's first name, as entered in a pre-chat survey on the Consumer Service Portal.
csp_last_name	Requester's last name, as entered in a pre-chat survey on the Consumer Service Portal.
devicetype	Type of device being used for the chat. For example, *mweb* (chat widget), *android*, or *ios*.
esc_pre_chat_ask_a_question	Requester response to a pre-chat survey selection from within the HR Service Delivery application ESC view of the HR Case record.
experience_name	Name assigned to the Live Agent experience.
hr_topic_id	ID of the current topic. Used in Advanced Work Assignment to determine which HR queue to transfer the user for live agent chat.
interaction_account	Used with CSM chats that are initiated by B2B users who are tracked as contacts for a particular account. Corresponds with the *Account* field on the Interaction [interaction] table, which references the Accounts [customer_account] table.
interaction_consumer	Used with CSM chats that are initiated by B2C users who are tracked as consumers. Matches the interaction.consumer field referencing the csm_consumer table. Corresponds with the *Consumer* field on the Interaction [interaction] table, which references the Consumers [csm_consumer] table.
interaction_contact	Used with CSM chats that are initiated by B2B users who are tracked as contacts for a particular account. Corresponds with the *Contact* field on the Interaction [interaction] table, which references the Contacts [customer_contact] table.
interaction_id	Sys_id of the interaction record associated with the chat session. For more information, see Virtual Agent interaction records.
language	Two-letter language code for the requester's chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Live Agent variables included with Virtual Agent (continued)

Variable	Description
	Note: Language values use ISO standard two-character language codes. For more information, see ISO 639.1 language codes.
`mandatory_skills`	Required skills and skill level for an agent. For example, German language proficiency with an associated high skill level may be required for German-speaking requesters. You can define mandatory skills and activate skill levels in Advanced Work Assignment. For more information, see Configure agent assignment rules.
`optional_skills`	Skills and skill levels that would be useful for a given chat scenario. You can define optional skills in Advanced Work Assignment. For more information, see Configure agent assignment rules.
`page`	The specific page (within a portal) that the chat was accessed from.
`portal`	Name of the portal that the chat was accessed from.
`post_assessment_instance`	Reference to the post-chat survey (Assessment Instances [asmt_assessment_instance] table), if there is one.
`post_chat_survey_name`	Name of a post-chat survey that is used to gather feedback from the requester. For information about creating surveys, see Create chat surveys. For information about creating surveys in Connect Chat, see Configure a survey in Connect Chat support.
`pre_assessment_instance`	Reference to the pre-chat survey (Assessment Instances [asmt_assessment_instance] table), if there is one.
`pre_chat_survey_name`	Name of a pre-chat survey that is used to gather information from the requester. For information about creating surveys, see Create chat surveys. To learn more about how chat context variables from pre-chat surveys are used in Advanced Work Assignment to route work to live agents, see Work item queues.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Live Agent variables included with Virtual Agent (continued)

Variable	Description
	For information about creating surveys in Connect Chat, see Configure a survey in Connect Chat support.
`queue`	Sys_id of the pre-built Connect Support chat queue (deprecated).
`search_text`	Search terms entered by the requester. Used to search Virtual Agent topics.
`short_description`	Used to set the short description in the interaction record associated with the chat.
`sys_id`	Sys_id of a record that relates to the interaction. Typically, this is the record being viewed in the portal when the chat is requested.
`table`	Table containing the record that relates to the interaction. Typically, this is the record being viewed in the portal when the chat is requested.
`url`	URL from which the request originates.

Additional resources

- How to transfer a chat to a specific queue using context variables
- Virtual Agent and Natural Language Understanding (NLU) community forum
- Conversational Interfaces Academy

Change Virtual Agent and Agent Chat system messages

Customize the default system messages displayed during Virtual Agent conversations and Agent Chat.

Before you begin

Role required: virtual_agent_admin or admin

About this task

Use **System messages** in Chat Settings to change the properties that control standard chat messages displayed in your instance. If you're using Virtual Agent and Agent Chat, the **System Messages** list displays properties for both Virtual Agent and Agent Chat messages. If you're using Agent Chat only, the **System Messages** list displays only the properties relevant to Agent Chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
While the chat widget uses the Messages table [sys_ui_message] to configure the greeting and closing messages, third-party Conversational Integrations (such as Microsoft Teams) use system messages. To change them, modify these messages in System Messages as follows:

- For greetings that call `vaSystem.getTopicSelectionMessage()`, modify the value of `com.glide.cs.topic_picker_msg`.
- For closings that call `vaSystem.endConversation()`, modify the value of `com.glide.cs.conversation_ended_msg`.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under **System messages**, select **View All**.
3. In the System Messages list, select the property record for the message you want to change.
4. In the **Value** field, enter the new message text and select **Save**.
   Any changes are immediately applied to the system messages displayed in your instance.

URL navigation in Conversational Interfaces

Use URL navigation settings to specify where and how chat links open. You can configure certain links to open in a specific portal. You can also specify the link target, such as a popup window.

Your base system instance provides default portals in which chat links to records from certain ServiceNow tables are opened automatically. For example, Service Portal is the default portal used to display knowledge records from the Knowledge [kbknowledge] table and also catalog items from the Catalog Item [sc_cat_item] table.

Use **URL navigation** in Chat Settings to change these default mappings, as well as define custom mappings that map a portal URL to a specified ServiceNow table. The portal configurations apply to the chat widget, chat channels, and messaging channels.

How URL navigation works

To determine the portals to be used for chat links, the system evaluates the following information in the order listed:

1. `sysparm` portal parameter - If you specified a sysparm_portal parameter in the instance URL for the chat widget, that portal is used.
2. Topic script variable - If you specified a portal in a topic script variable, that portal is used.
3. Default portal for Provider Channel Identity - If you specified a default portal in the Provider Channel Identity [sys_cs_provider_application] table for pre-built chat integrations or custom chat integrations, that portal is used. The default portal applies to the chat and messaging channels for the provider. For details on configuring the Provider Channel Identity, see Create a channel identifier for your custom chat integration in Custom chat integration framework.
4. Default portal for a table - Uses the portal value in the default portal mapping listed in **URL navigation** Chat Setting.
5. Global default portal - If you defined a global default portal using the `com.glide.cs.url_redirect.default.portal` system property, that global portal is used.
6. Service Portal - If you didn't define a global portal using the `com.glide.cs.url_redirect.default.portal` property, Service Portal is used.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Legacy URL mappings defined in previous releases (fallback method)

If you previously added the *com.glide.cs.portal_url_mapping.default.<portal_value>.<table_name>* property to create URL mappings that were used instead of the default URL mappings, those properties are retained after you upgrade to the Yokohama release. However, you can now view the mappings using **URL navigation** in Chat Settings or the URL Navigation [sys_cs_portal_url_mapping] table. There are two types of URL mappings.

Default mappings

All system properties with the format *com.glide.cs.portal_url_mapping.portal.<table_name>* that define the default portal used for certain ServiceNow tables.

Default URL mapping properties

Property	Description
com.glide.cs.portal_url_mapping.portal.kb_knowledge	Default portal context (URL mapping) to use for Knowledge Base articles. • Type: string • Default value: sp (Service Portal)
com.glide.cs.portal_url_mapping.portal.sc_cat_item	Default portal context (URL mapping) to use for Service Catalog items. • Type: string • Default value: sp (Service Portal)
com.glide.cs.portal_url_mapping.portal.sys_user	Default portal context (URL mapping) for sys_user records. • Type: string • Default value: esc (Employee Service Center)

Custom mappings

All system properties that define a portal and table combination using the format *com.glide.cs.portal_url_mapping.<portal_name>.<table_name>*. These mappings are retained as custom mappings. When the portal or table is specified with *_default*, it indicates that any portal or table is used.

The system determines the URL for custom mappings by evaluating the following values:

- Portal and table/parent table
- Portal and any table
- Any portal and table/parent table
- Any portal and any table

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Custom URL mapping properties

Property	Description
com.glide.cs.portal_url_mapping._default_kb_knowledge	Default for Knowledge URL mapping. • Type: string • Value:/{{portal}}?id=kb_article&sys_id={{data.sys_id}}
com.glide.cs.portal_url_mapping._default_sc_cat_item	Default for Catalog Item URL mapping. • Type: string • Value: /{{portal}}?sys_id={{data.sys_id}}&id={{data.table_name}}&table={{data.table_n
com.glide.cs.portal_url_mapping._default_sys_user	Default for User URL mapping. • Type: string • Value: /{{portal}}?id=user_profile&sys_id={{data.sys_id}}
com.glide.cs.portal_url_mapping._default_default	Default URL mapping for records other than knowledge articles, Service Catalog items, People (sys_user) records, publication records, and task records. • Type: string • Value: /{{portal}}?sys_id={{data.sys_id}}&id=form&table={{data.table_name}}

Smart links

As an admin, you can specify the target for URL links based on patterns that you specify. For example, if you want all KB articles to open in a new window, you can configure the mapping in general chat settings. For more information, see Create a smart link preference.

Configure URL navigation for chat links

Configure the portals in which links to ServiceNow records in Live Agent and Virtual Agent conversations are opened, including links in output cards and cards for Virtual Agent notifications and AI Search results.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under **URL navigation,** select **View All**.
3. On the URL Navigation page, do one of the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- To create a new custom mapping, select **New**.
- To change a default or custom mapping, select the record to be updated.
- If you have multiple mapping records to be updated, click the box to the left of the mapping record to be updated and select **Edit**. The preview pane opens and shows the URL Navigation fields that you can change in the selected records.

4. Complete or update the URL Navigation fields.

Field	Description
Description	Name of the portal for a particular table record.
Type	Type of portal mapping: ○ Default Mapping: Default portal mapped to the following ServiceNow tables: ▪ Service Portal - Catalog Item [sc_cat_item] table ▪ Service Portal - Knowledge [kb_knowledge] table ▪ Employee Center Portal - User [sys_user] table ○ Custom Mapping: Portal URL definition that identifies a portal and ServiceNow table combination, which is entered in the **Value** field.
Table	ServiceNow table that maps to the portal. Select a table from the list of tables.
Application	Name of the application to which this URL mapping belongs.
Portal	Portal to be used in the mapping. Select a portal from the list of portals.
Value	For new custom mappings, specify the combination of portal and table values to form the link. For example, the following value maps knowledge articles to the CSP portal: `/csp?id=kbarticle&sys_id={{data.sys_id}}` If you're changing a custom mapping that was defined in a previous release using the *`com.glide.cs.portal_url_mapping._default.<table>`* system property, you do not need to specify a **Value**.

5. Select **Save** to enter a new mapping or update an existing mapping.

Create a smart link preference

Create smart links to specify where a URL should open. For example, the URL could open in a new browser window, in a new browser tab, in the chat window, or in a pop-up window.

Before you begin

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

If you (as an admin) have enabled URL navigation on the page, you can specify patterns for where and how the links open in the chat windows. End users see the URL links based on the patterns you've specified.

For example, you can set these URL "smart links" to open in a new browser window, in a new browser tab, in the chat window, or in a pop-up window. If you specify a pop-up window, you can set the size of the window your end users see.

Smart links can be used in chats with live agents.


Error messages display for channels that don't support smart links.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under the **System actions** section, select **View All** next to **URL navigation**.
3. Select the **Target Location** tab.
4. Select **New**.
5. On the form, fill in the fields.

Field	Description
Description	The purpose of the smart link.
Where to open	Where to open the link. Choose one of the following options: ○ **New Browser Tab**: Opens the link in a new browser tab. ○ **Load in Place:**: Opens the link in the current location. ○ **Parent**: Opens the link at the highest or parent level. ○ **Popup**: Opens the link in a pop-up window and lets you specify the pop-up window size. ○ **Raise Event**: In the chat widget only, prevents the default select behavior, avoiding a page navigation (the chat is kept open).
Order	Number that indicates the order in which smart link preferences run. If there are multiple preferences, the system runs the first smart link preference found, from lowest to highest order.
URL Pattern	URL pattern that uses regular expression quantifiers. If the regular expression is invalid, an error message is shown. 
Condition mode	Expression logic to specify a condition for applying the smart link preference. Select either: ○ Simple, or ○ Advanced

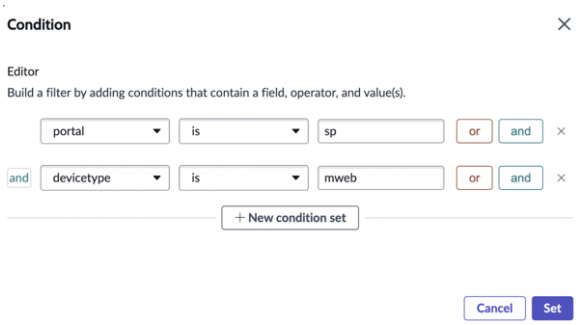© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Set conditions **Note:** Applies only if you select the Simple condition mode.	If you select the **Simple** condition mode, use the condition builder to add or edit the condition. The condition builder specifies that the smart link is only applicable to links in the Service Portal when they're accessed on the chat widget.  ○ **devicetype**: Refers to the channel. In the Yokohama release, only the chat widget (*mweb*) is supported. The mobile chat widget isn't supported currently. ○ **portal**: Represents a specific portal. Specify the portal URL suffix in the condition. Navigate to **All** > **Service Portal** > **Portals** to view portals and their suffixes ○ Select **Set**.

Script
 	
Note: Applies only if you select the Advanced condition mode.
	If you select the **Advanced** condition mode, use the script editor to create or edit a JavaScript condition statement. When the end user selects the link, the component triggers a Window: message event. As a developer, if you see the Window: message event, you can decide how to handle the navigation. For example:
	
	`window.addEventListener('message', e => {`
	`  if (e.data.type === 'SMART_LINK_CLICKED') {`
	`  console.log(e.data);`
	`  /**`
	`  {`
	`  type: 'SMART_LINK_CLICKED',`
	`  src: 'https://domain.com/link/src'`
	`  }`
	`  */`
	`  }`
	`});`

6. Select **Save**.

What to do next

If you would like to enable smart link preference for Microsoft Teams, you must first Configure link authentication and opening experience in Microsoft Teams and then Configure smart links in Microsoft Teams

Create chat surveys

Use Survey Designer to build conversational questionnaires for gathering pre-chat information and post-chat feedback from end users. These questionnaires run in the chat client for Virtual Agent and Agent Chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Identify the information that you want from your requesters, such as their name or email address. If you're collecting pre-chat information, determine whether certain survey responses should be stored as chat context variables so that you can use that information for topic discovery or routing chats to certain work item queues. Before you build your survey, configure the context variables for storing responses to certain survey questions. You will map these chat context variables to the appropriate questions in your survey.

Role required: survey_admin or admin

About this task

You define, configure, and publish conversational questionnaires (surveys) using Survey Designer. You can use various survey controls to define the content of your questionnaires. For details on the survey controls available, see Survey designer elements to see how the controls are rendered in the survey. For example, the Choice control provides a multiple choice selection to your users.

The survey controls map to corresponding Virtual Agent Designer input controls that render the survey as a conversation in the chat client. For examples on how Virtual Agent Designer input controls are rendered in run-time conversations, see Virtual Agent Designer user input controls. The following table identifies the survey controls supported in Virtual Agent Designer.

Survey controls that map to Virtual Agent Designer input controls

Survey Designer controls	Comparable Virtual Agent Designer user input controls
Attachment	Image
Boolean	Boolean
Choice	Static Choice
Date	Date Time
Date/Time	Date Time
Number	Text input
Percentage	Text input
Scale	Static Choice
Numeric scale	Static Choice
String	Text
Image scale	Carousel
Reference	Not supported
Multiple selection	Not supported
Ranking	Not supported
Template	Not supported

Procedure

1. Navigate to **All** > **Survey** > **Survey Designer**.
2. Select the **Configuration** tab and configure the survey.
   As you configure your survey, remember the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- If you want an introduction note and end note to begin and end your survey, enter your content in the **Introduction** and **End note** fields.
- Select the **Chat Survey** option to enable conversational questionnaires. This option also enables the display of the **Context** option in the Properties form for each survey control.
- Select **Save**.

For details, see Configure a survey in the survey designer.

3. Select the **Design** tab and give your survey a **Name**.
   As you design your survey questions, remember the following:
   - To create a question, drag a data type icon from the Controls palette and drop it into the category container. Give each question a **Name** and select the gear icon to open the Properties form for the control.
   - In the Properties form, complete the fields as needed to define the control.
     - If you enable the **Mandatory** option, users are required to answer the survey question. If you leave this field blank, users can skip the question in the survey.
     - If you want to store the user response to this question, enter the chat context variable in the **Context** field.
   - Select **Save**.

   For details, see Create a question in the survey.
4. When you are finished defining the questions in your survey, select **Preview** to review your survey.
5. When you are satisfied with the survey, select **Save and Publish**.
   Your survey is listed in the Assessment Metric Types [asmt_metric_type] table.

What to do next

Define the pre-chat and post-chat survey configurations that control the surveys to be presented to your requesters.

Define pre-chat survey configurations

Use pre-chat surveys to capture preliminary information from a customer. You can define a configuration that determines the pre-chat survey to be presented to your customers. From the responses received, Advanced Work Assignment routes chat conversations to appropriate queues and groups.

Before you begin

Create the chat survey to be used in this pre-chat survey configuration.

Role required: admin

About this task

Apply the conditions that determine the pre-chat questionnaire to be presented to your requesters.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under **Pre-chat surveys** on the **General** tab, select **View all**.
3. On the Chat Surveys page, select **New** to create a new chat survey configuration or select the configuration you want to update.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Under **Details**, enter or change the settings.

Field	Description
Name	Unique name for this pre-chat survey configuration.
Active	Option that activates this pre-chat survey configuration.
Show Summary	Option that asks requesters if they want to see a summary of the survey responses they entered.
Order	Number that indicates the order in which survey configurations run. If there are multiple pre-chat survey configurations, the system runs the first survey configuration found, from lowest to highest order.
Condition mode	Type of condition to be used to control the conversational survey presented to requesters. ○ **Advanced**: Specify a JavaScript scripted condition. ○ **Simple**: Specify a condition using the condition builder.
Condition	Condition that controls when the survey configuration is used. Select **Set Condition** to specify the conditions.
Survey	List of the pre-chat surveys available. Choose the survey to be presented to the requester.

5. Select **Save**.

Result

When a requester completes the pre-chat survey, the user is transferred either to a live agent if Agent Chat is set as the fulfiller interface or a virtual agent if Virtual Agent is set as the fulfiller. The user's pre-chat responses are stored as context in the chat interaction record. Before entering into a chat conversation, the assigned agent can review the context of the issue.

Define post-chat survey configurations

Control the post-chat questionnaire displayed to your requesters to gather feedback on their experience with live agents. You configure the post-chat surveys to be used for chat queues defined in Advanced Work Assignment.

Before you begin

- Activate the Agent Chat plugin (com.glide.interaction.awa) if Advanced Work Assignment is not already installed.
- In AWA, configure the chat service channel and the work item queues.
- Determine the post-chat survey to be displayed to your requesters.
  - Review the existing chat surveys available in the Assessment Metric Types [asmt_metric_type] table by navigating to **All** > **Survey View** > **View Surveys**. You can use a pre-built feedback survey, such as the survey for Virtual Agent feedback (a pre-built Virtual Agent setup topic).
  - If you need different post-chat surveys, create them using Survey Designer. For details, see Create chat surveys.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Advanced Work Assignment** > **Settings** > **Queues**.
2. Select the queue (that uses the Chat service channel) to which the post-chat survey configuration applies.
3. Go to the **Post Chat Survey** related list, and then select **New**.
   If the Post Chat Survey list doesn't display, you may need to add it to the form.
4. On the form, fill in the fields.

Field	Description
Name	Unique name for this post-chat survey configuration.
Active	Option that enables this post-chat survey configuration.
Show Summary	Survey option that asks requesters if they want to see a summary of the survey responses they entered.
Order	Number that indicates the order in which survey configurations run. If there are multiple chat survey configurations, the system runs the first survey found, from lowest to highest order.
Requester ended	Option that specifies if the post chat survey should always run regardless of who ends the chat. ○ True: Survey should run when either the requester or the agent ends the chat. ○ False: Survey should run only when the agent ends the chat.
Condition mode	Type of condition that determines the conversational survey presented to requesters. ○ Simple: Specify a condition using the condition builder. ○ Advanced: Specify a JavaScript scripted condition.
Condition	Condition that determines the conversational survey displayed to requesters. Use the condition builder to select the conditions to be applied. The fields available for selection are based on the Chat service channel.
Script	JavaScript condition statement that specifies the condition for using this chat survey. The condition must evaluate to true.
Survey	List of the chat surveys available. Choose the post-chat survey to be presented to your requesters.

5. Select **Submit**.

Result

When a live agent ends the chat session, the post-chat survey (configured for the chat queue) is presented to the requester. When the requester submits the post-chat survey, the chat session ends for the requester. The Interaction Related Records list stores the post-survey chat results and creates a related record that links the assessment to the live agent (fulfiller).

Using pre-chat surveys with context variables for topic discovery

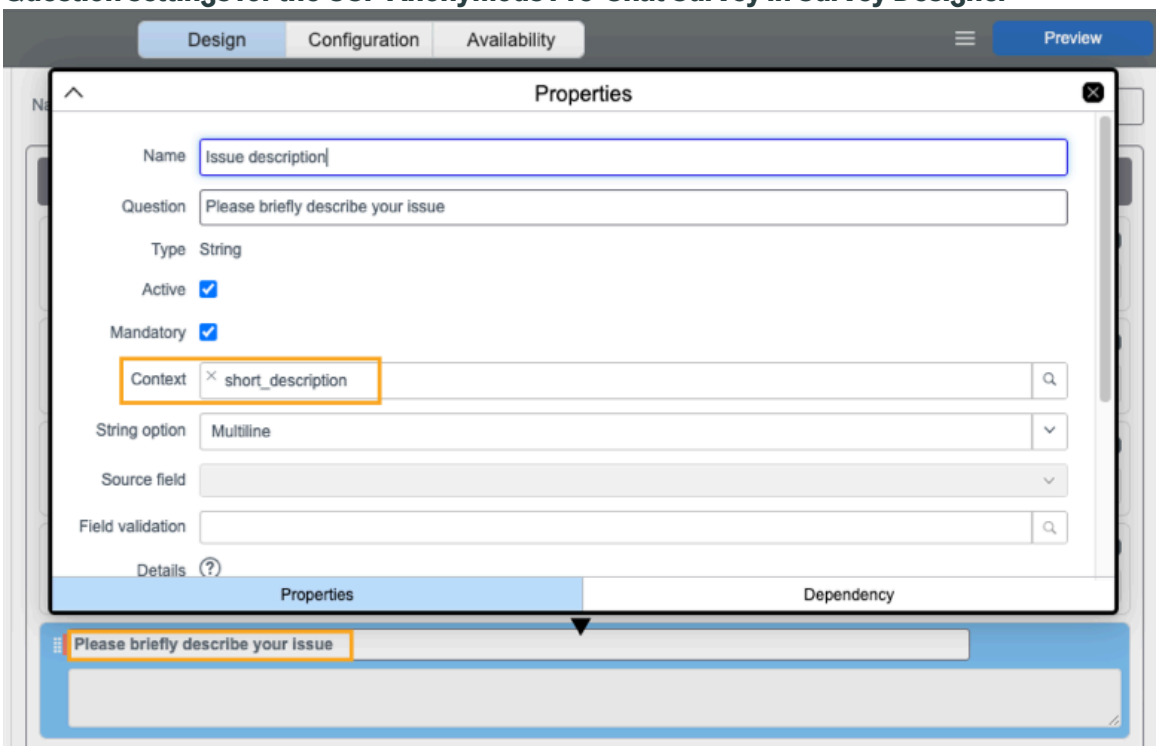
Capture user input from pre-chat surveys to use as utterances or keywords for topic discovery.

If you're using a pre-chat survey, you can use information supplied by the user to direct them to the appropriate Virtual Agent topic without asking them to choose from a list of available topics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


A good example of this is the CSP Anonymous Pre-Chat Survey, which is included with the Customer Service Management (CSM) application. This survey applies to guest users on the CSP portal. In addition to asking for the user's name and email address, the last question asks the user to briefly describe the issue. The answer is mapped to the short_description field in the question settings. This is the context for the user's answer.

Question settings for the CSP Anonymous Pre-Chat Survey in Survey Designer



The user response can be passed to Virtual Agent for use in topic discovery. In order to do this, you must create a record for it in General Chat Settings.

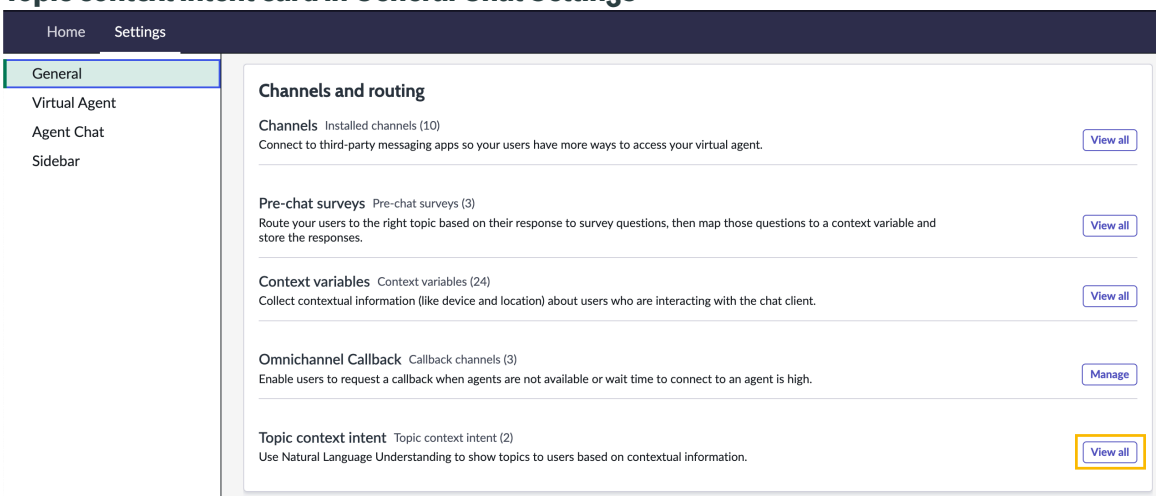
Topic context intent card in General Chat Settings



The Pre-chat short description as NLU intent record allows the CSP Anonymous Pre-Chat Survey input to function a bit like an NLU intent. When the survey runs, the interaction's short_description is used as the search text for the conversation. Virtual Agent uses this input for topic discovery so that users don't have to select a topic from the Greetings screen.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

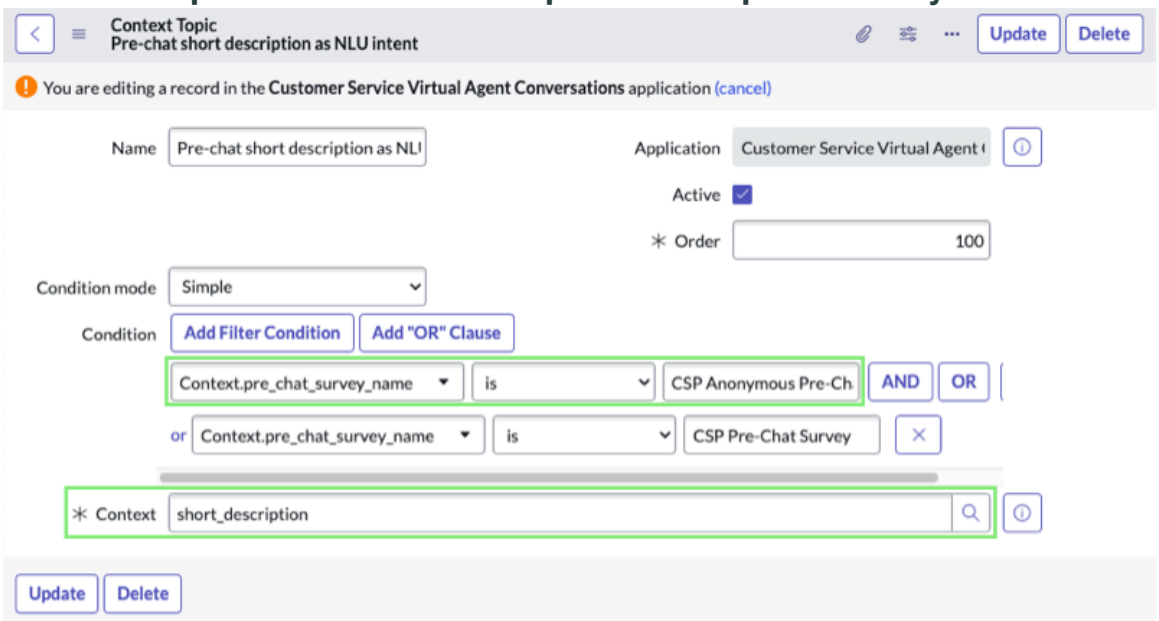The Context topic intent record that corresponds with the pre-chat survey



Define topic context intent configurations

Use pre-chat survey information to determine the appropriate Virtual Agent conversation topic automatically displayed to end users (requesters), rather than prompting them to choose from a list of conversation topics.

Before you begin

- Configure the chat context variables for storing user answers to specific questions in your chat surveys.
- As you create your chat survey, map a survey question to a new or existing chat context variable. The variable stores the user response that Virtual Agent uses to determine topic context intent and the conversation topic displayed.
- Role required: virtual_agent_ admin or admin

About this task

Create a context topic intent to specify conditions that determine which Virtual Agent conversation topic is displayed after a user answers a pre-chat survey. The context topic intent uses data collected by the survey to find an appropriate topic for the user.

For example, a pre-chat survey asks the user “What problem are you having with your computer?” and maps their answer to a context variable called “problem” in the survey. The variable passes from the survey to the topic context intent. Instead of the chat going directly to topic discovery, the variable stored in the intent is used as an utterance to feed into the Virtual Agent for topic discovery.

You can define conditions in a topic context intent to limit topic discovery, such as restricting the “problem” variable in the preceding example to only feed to ITSM VA conversations. The Context Topic [sys_cs_context_topic] table is used to map your variables for intent discovery, after the pre-chat survey has been executed.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under **Topic context intent**, select **View All**.
3. In the Context Topic page, select **New** or the configuration to be modified.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. On the form, fill in the fields.

Field	Description
Name	Name of the configuration for topic context intent (topic discovery).
Active	Option that activates this topic intent configuration.
Order	Order in which Virtual Agent evaluates topic intent configurations to find a matching condition for displaying the topic. Virtual Agent reviews the configuration that has the lowest order value first.
Condition mode	Type of condition that determines how the topic intent configuration is to be applied. ○ Simple: Specify a condition using the condition builder. ○ Advanced: Specify a JavaScript scripted condition.
Condition	Condition for applying the specified context variable that displays the corresponding conversation topic. Select **Set conditions** to enter the condition filter. If no condition is specified, the specified context variable applies to all conversations.
Script [Displayed when **Condition mode** is set to Advanced]	JavaScript condition statement for applying the specified context variable that displays the corresponding conversation topic. The condition must evaluate to true.
Context	Chat context variable that stores the user response to a specific survey question and used to determine the topic intent.

5. Select **Save**.

Result
The context topic intent configuration is added to the Context Topic [sys_cs_context_topic] table. Virtual Agent displays the appropriate conversation topic to users based on the context intent configuration.

Conversational Interfaces Guided Setup

Use the Conversational Interfaces Guided Setup to create a personalized setup process for just the conversational interface features you need. The Conversational Interfaces Guided Setup starts with a survey and creates a personalized task list based on your survey responses.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

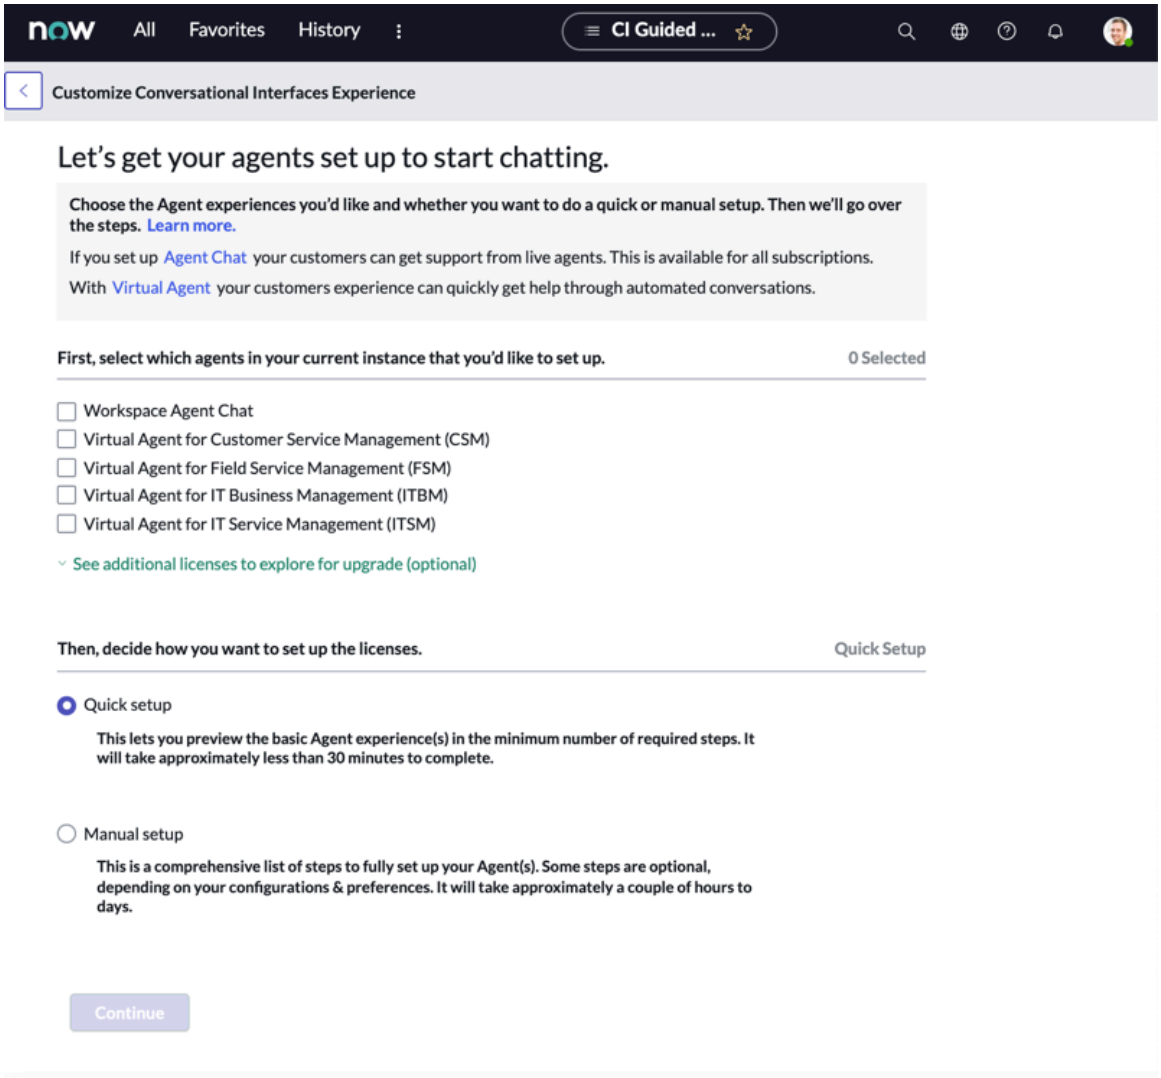
The system admin role is required to activate the plugins and store applications. However, AWA admins and Virtual Agent admins can complete additional setup tasks for their respective solutions.

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Conversational Interfaces Guided Setup**.
   The Conversational Interfaces Guided Setup page appears.
2. Review the sections Getting started and Things to consider for setup, which provide information on the setup process and highlight various items to think about before implementing Virtual Agent, Agent Chat, or both.
   Also consider whether you want to run Quick setup to get your agents running in as little as 30 minutes, in a minimal number of steps. Manual setup involves a comprehensive series of steps to set up your agents and may take a couple of hours or several days to complete, based on your configuration.
3. Select **Get Started**.
4. In Customize your setup, select **Get Started** and then **Configure** to start your personalized setup.
5. Select the type of agents that you're using and the type of setup (Quick or Manual).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



6. Select **Continue** and complete the subsequent setup tasks.

What to do next

After you've completed the setup tasks, you and your topic authors can explore the functionality provided with Virtual Agent, such as reviewing pre-built conversations and creating or updating conversation topics for your end users.

Related topics

Guided Setup

Conversational Interfaces reference

Conversational Interfaces reference topics provide shared technical descriptions of features that apply to Virtual Agent and Agent Chat, such as the Interactions table.

Data management in Conversational Interfaces

Use data management tools, such as table cleaners, to maintain Conversational Interfaces tables.

Virtual Agent table cleaning

Virtual Agent has a data retention policy that automatically deletes records from certain base system tables when they reach a specific age, to prevent tables from growing to an

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

unmanageable size. Some Virtual Agent and related Conversational Interfaces tables are not automatically cleaned. You can activate table cleaning for the following tables.

Conversational Interfaces tables that need cleaning

Table label	Table name	Description	Default record age (seconds)
Chat Server Analytics	sys_cs_analytics	Server records that include sys IDs for messages, threads, conversations, users, and events.	7,776,000
Conversations	sys_cs_conversation	Conversation details, including topic definition, device used, and consumer (user). **Note:** Table cleaner also automatically deletes the related records for the following: • Conversation Messages • Conversation Tasks • Conversation Members • Session bindings • Profane message logs if using the Profanity Filter	5,184,000
Message Last Reads	sys_cs_message_last_read	Message IDs of the last messages read by users in chat and messaging channels.	15,552,000
CI Analytics	sys_ci_analytics	Conversation details used in Conversational Analytics. If the conversation ID is available, table cleaner removes closed, complete, and faulted conversations from the Conversations [sys_cs_conversation] table.	604,800

The Auto Flushes [sys_auto_flush] table lists the base system tables and their corresponding record ages. When table cleaning is activated, the Table Cleaner scheduled job triggers the table cleaner to remove the records that meet the default record age. If needed, you can change the record age for a table and specify any conditions to filter the records to be removed. For details, see Activate table cleaning for Virtual Agent tables.

If a table has related child tables, the table cleaner automatically performs a cascade delete to remove the related child tables. For example, when table cleaning is activated for the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversation [sys_cs_conversation] table, the table cleaner runs automatically when the table is 60 days (5,184,000 seconds) old. The table cleaner also performs a cascade delete to remove the related child tables. To learn more about table cleaning in the ServiceNow AI Platform, see Table cleaner.

Activate table cleaning for Virtual Agent tables

Activate table cleaning for certain tables used in Virtual Agent and Conversational Interfaces.

Before you begin

Role required: admin

About this task

You can activate table cleaning for these Virtual Agent and Conversational Interfaces tables:

- Chat Server [sys_cs_analytics]
- Conversations [sys_cs_conversation]
- Message Last Reads [sys_cs_message_last_read]
- Ci Analytics [sys_ci_analytics]

Procedure

1. Open the Auto Flush [sys_auto_flush] table by typing `sys_auto_flush.list` in the filter navigator.
2. Select the table to be activated for cleaning.
3. Change the fields in the form as needed.

Auto Flush form

Field	Description
Age in seconds	The time, in seconds, that specifies when records in the table are to be deleted. To change the age, enter the new value in seconds.
Active	Option to activate or deactivate table cleaning for this table. Select this option to activate table cleaning.
Cascade delete	Option to activate or deactivate table cleaning for related tables. Some tables may have child tables that are also automatically cleaned.
Conditions	Condition builder for specifying filter conditions that define the records to be removed.

4. Select **Update**.

The Table Cleaner scheduled job automatically runs the cleaner when the table records meet the specified record age and any conditions that you set for them.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Interaction Insights table

User sentiment analysis prepares agents for the tone of incoming conversations. Business rules can be created based on this value and agents can take appropriate actions on the chat, whether it comes from Virtual Agent, another live agent, or from a queue.

Both synchronous and asynchronous channels support sentiment analysis. Use Task Intelligence to set up sentiment analysis.

When configured, sentiment analysis is performed at the end of a Virtual Agent or live agent conversation. The user sentiment is stored in the Interaction Insights [sys_cs_interaction_insight] table.

Interaction Insights table

Field	Description
Interaction	The sys ID for the conversation in the Interactions [interaction] table.
Sentiment	Shows the sentiment level of the interaction, if sentiment analysis is enabled on the instance. This value can be shown to agents in the Agent Chat interface. Business rules can be created based on this value at handoff (Virtual Agent to live agent, live agent to live agent, or live agent to queue). Valid values are as follows: • Positive • Neutral • Negative • null (no value assessed)
Sentiment Normalized	Sentiment score between -0.5 (negative sentiment) and 0.5 (positive sentiment). You can modify these values by adjusting the *com.glide.cs.neutral_sentiment_max_value* and *com.glide.cs.neutral_sentiment_min_value* system parameters.
Type	Type of analysis performed. For example, *Sentiment*.
User	Name of the agent or Virtual Agent.
User Type	Type of user. For example, *Agent*.

Virtual Agent


Unlock your enterprise productivity with ServiceNow® Virtual Agent. Increase deflections by empowering your employees and customers to serve themselves using a friendly messaging interface, featuring pre-built conversations powered by artificial intelligence.

https://player.vimeo.com/video/988245428?badge=0&autopause=0&player_id=0&app_id=58479

Get started with ServiceNow AI Platform Virtual Agent

Select a tile to get started with ServiceNow AI Platform Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Explore  Learn how employees, customers, and agents use Virtual Agent.	Plan and configure  Plan and configure your Virtual Agent implementation.	Build and deploy  Design and build automated conversations and reusable topic components.
Integrate and maintain  Extend Virtual Agent capabilities by integrating with other applications.	Analyzing Virtual Agent performance  Analyze and improve Virtual Agent interactions using insights into conversational data.	Reference  Get Virtual Agent Designer interface descriptions and Virtual Agent technical details.

Get started with Virtual Agent for specific businesses

To explore Virtual Agent for IT Service Management, Customer Service Management, or HR Service Delivery, select a business tile to learn more.

Virtual Agent for IT Service Management  Predefined Virtual Agent topics to help your employees complete common IT-related tasks.	Virtual Agent for Customer Service Management  Predefined Virtual Agent topics to help your customers complete common self-service tasks.	Virtual Agent for HR Service Delivery  Predefined Virtual Agent topics to help your employees complete common HR-related tasks.	Virtual Agent for Workplace Service Delivery  Predefined Virtual Agent topics to help your employees complete common workplace-related tasks.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Virtual Agent for Field Service Management	Virtual Agent for Project Portfolio Management	Virtual Agent for Legal Service Delivery	
			
Predefined Virtual Agent topics to help your customers complete common field service management tasks.	Predefined Virtual Agent topics to help your customers complete common Project Portfolio Management tasks.	Predefined Virtual Agent topics to help your customers complete common legal-service tasks.	

Additional resources

- Virtual Agent and Natural Language Understanding (NLU) community forum
- Conversational Interfaces Academy

Note:
We improve performance and the user experience by tracking aggregate in-app activity, including interaction with our app. This tracking is focused on aggregated technical information rather than personal information.

Exploring Virtual Agent

The ServiceNow Virtual Agent platform provides user assistance through conversations within an intelligent messaging interface. Design and build automated conversations with an out-of-the-box system that help your users quickly obtain information, make decisions, and perform common work tasks with Virtual Agent.

Overview of Virtual Agent

Virtual Agent helps solve ordinary issues and delivers results for common requests, leaving your agents and technicians free to focus on more complex user issues. You can change the look and feel of the chat experience to suit each audience for your business, including running your chatbot in a variety of common or custom messaging channels. Monitor your bot's success with the Conversational Analytics dashboard.

When you add Now Assist in Virtual Agent skills, your developers have access to large language model (LLM) topic discovery. The Now Assist topics skill includes LLM controls that make topic authoring easier so that you can deliver self-service solutions more quickly.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



AI agents in Virtual Agent

Virtual Agent supports AI agents. When a user ask a question to the virtual agent, the agent understands the query and can reason, plan, and execute across AI agents, virtual agent topics, conversational actionsand sub-flows, catalog, KB, AI agent skill kit, and any Now Assist for Virtual Agent supported skills to help the user. Virtual Agent supports multi-intent query with AI agents if there are associated AI agents per user query.

Pre-built Virtual Agent topics

Pre-built Virtual Agent topics are available from the ServiceNow Store. These topics are designed to handle common issues that can occur and are customized for ServiceNow workflows. Available plugins include the following:

- ITSM Virtual Agent conversations
- Customer Service Virtual Agent conversations
- HR Service Delivery Virtual Agent conversations

Virtual Agent and Virtual Agent Lite

The Virtual Agent platform is available as a professional subscription or in a limited version (Virtual Agent Lite) that is automatically included with the ServiceNow AI Platform®.

Virtual Agent Professional provides all the core functionality for creating and deploying Virtual Agent conversations. Virtual Agent includes the following features, which are automatically installed with the Glide Virtual Agent plugin (com.glide.cs.chatbot):

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Virtual Agent Designer (supports Natural Language Understanding (NLU) in Virtual Agent conversations)
- Virtual Agent chat widget
- Virtual Agent notifications
- Conversational custom chat integration framework
- Conversational Interfaces console for admin configuration
- Topic Recommendations (ServiceNow Store app)
- Conversational Analytics (ServiceNow Store app)

Virtual Agent Lite provides a limited (trial) version of Virtual Agent for ITSM standard customers. For more information, see Virtual Agent Lite.

Virtual Agent benefits

Benefit	Feature	Role
Use a conversation designer to build and test conversations without scripting or advanced skills. Drag and drop elements on the graphical canvas to see the entire flow. Go further with branching, looping, and scripting.	Virtual Agent Designer	virtual_agent_admin or admin
Use LLM topic discovery instead of Natural Language Understanding (NLU) or keywords to create more conversational experiences. Now Assist in Virtual Agent uses LLMs and generative AI skills to improve deflection rates and reduce the amount of time-consuming work that NLU topic discovery requires.	Now Assist in Virtual Agent LLM topic discovery in Virtual Agent	virtual_agent_admin or admin
Create custom chat experiences for users from where they run Virtual Agent.	Configuring assistants overview Branding your chat client Setting up chat experiences for Virtual Agent users	virtual_agent_admin or admin
Seamlessly transfer the entire conversation history and context to the right human agent so they can quickly address any escalations and resolve user issues.	Using Virtual Agent with a live agent	virtual_agent_admin or admin
Connect to where your employees and customers already are—in web portals, Now® Mobile apps, and collaboration tools like Slack, Microsoft Teams, Facebook Messenger consumer app, Workplace from Facebook enterprise	Integrating Virtual Agent with other channels	virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Benefit	Feature	Role
messaging app, and any other popular chat or messaging app.		
Analyze the performance of Virtual Agent through preconfigured dashboards.	Analyzing Virtual Agent performance	virtual_agent_admin or admin
Deliver real-time alerts and status updates to employees, including actionable notifications and SMS notifications. Deliver notifications via all supported channels, including web, Slack, Workplace, and SMS. You can quickly collect feedback for critical decisions and resolve requests faster.	Configuring Virtual Agent notifications	virtual_agent_admin or admin
Serve your international Virtual Agent users, regardless of their language and locale.	Localization options for Virtual Agent	virtual_agent_admin or admin
Integrate with other ServiceNow AI Platform applications, such as AI Search. Use Workflow Studio to add automated workflows to conversation topics, and access many third-party services using Integration Hub spokes.	Improving the user experience with AI Search Integrating Virtual Agent with Workflow Studio workflows Integration Hub	virtual_agent_admin or admin
The Virtual Agent API enables developers, advanced users, and admins to use Virtual Agent as a standalone or secondary bot in your chat environment. Use Virtual Agent Bot Interconnect as the primary bot in a diverse chat environment.	Using Virtual Agent API Using Virtual Agent Bot Interconnect in your configuration	virtual_agent_admin or admin

Note:
For developer training, go to the Developer's Portal (login required). Navigate to **Learn** > **Courses** > **Virtual Agent**.

Quick start for Virtual Agent

Using the Conversational Interfaces console, you can quickly add Virtual Agent to a portal, configure branding, personalize the greeting, and begin to use pre-built ITSM Virtual Agent conversations.

If you have a license for a Now Assist product, you can also quickly deploy Now Assist skills in Virtual Agent in a matter of minutes. For details, see Configuring assistants overview.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

If you have a license for Virtual Agent, the following sections will help you get started and create conversations for your organization quickly.

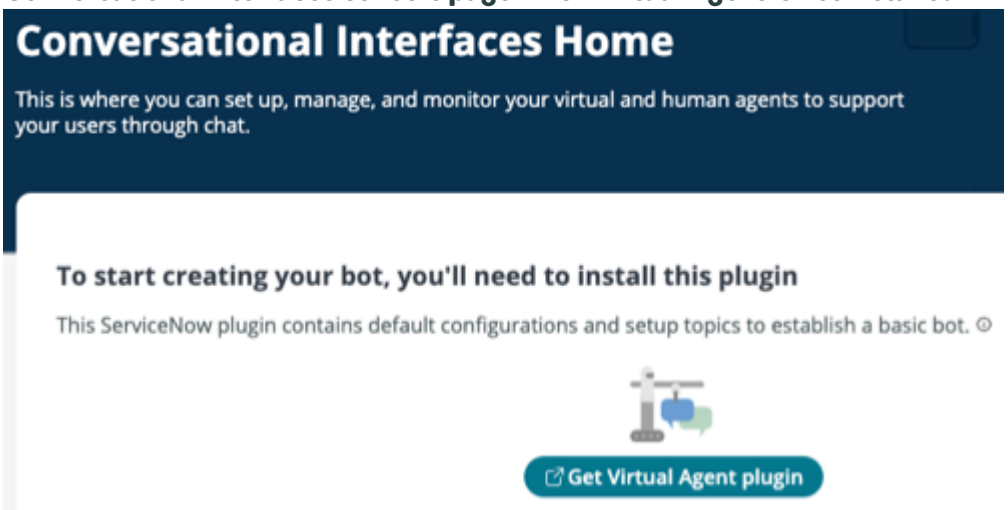
If you do not have a license for Virtual Agent, you can try Virtual Agent Lite, which comes preinstalled. For information about getting started with Virtual Agent Lite, see Quick start for Virtual Agent Lite.

Use the Conversational Interfaces console application to activate and configure Virtual Agent quickly. For more information about the Conversational Interfaces console, see Conversational Interfaces Console.

Step 1: Activate Virtual Agent and recommended store plugins

If Virtual Agent has not been activated on your instance, you will need to install it.


Conversational Interfaces console page when Virtual Agent is not installed



1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. If Virtual Agent is not installed, select **Get Virtual Agent plugin** on the home page.
3. When prompted, select **Start install**.

   The Applications page opens with Virtual Agent (com.glide.cs.chatbot) selected.

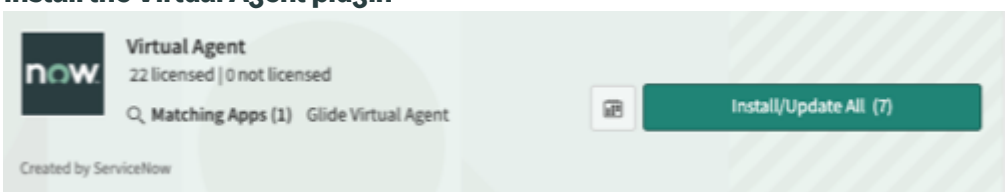   Install the Virtual Agent plugin

   a. If you have a Virtual Agent license, select **Install/Update All**.

   b. In the dialog box, select **Install** to begin.
4. Under Choose what type of requests you want your bot to support, select **Get ITSM plugin**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Install the ITSM Virtual Agent Conversations plugin



5. Follow the directions in the ServiceNow Store and select **Opt-in** when prompted.
6. Repeat steps 3 and 4 to install additional plugins. Otherwise, continue to the next section.

Step 2: Make Virtual Agent available to users

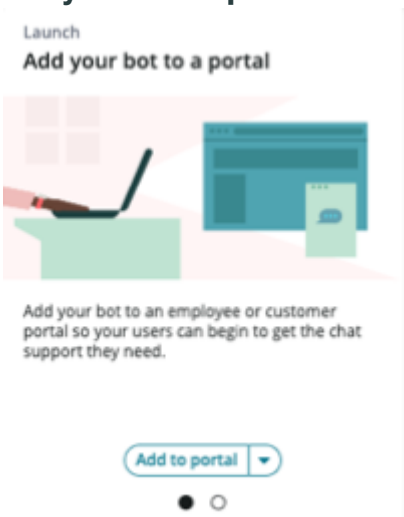
Add a chat entry to the menu of your web portal. You can add Virtual Agent to additional portals later.

For conversations based on generative AI large language models (LLMs), you can quickly set up Now Assist in Virtual Agent and add it to a portal. For information about adding Now Assist in Virtual Agent to a portal, see Configuring assistants overview.

Note:
You cannot use both Now Assist in Virtual Agent and Virtual Agent using NLU discovery in the same portal.

1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. Under Add your bot to a portal, select **Add to portal**.

Add your bot to a portal tile on the Conversational Interfaces console page



3. Fill in the form for Service Portal Agent Chat Configuration.

   Type a name and unlock the **Portal(s)** field to specify one or more portals for your virtual agent. Type a number in the **Order** field to specify where to include Virtual Agent on the menu.

   a. In the **Name** field, type a name for the configuration.
   b. Select the **Portal** lock icon to open it.
   c. Select the search icon, and then select a portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

d. In the **Order** field, type a number to indicate the order that the configurations should run.

   Only one configuration applies per portal. If there are multiple configurations on a portal, the system runs the first configuration found from lowest to highest.

4. Select **Submit**.

For more detailed information, see Add your bot to a portal.

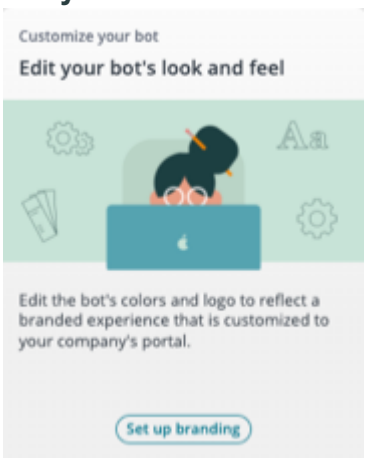
Step 3: Customize the look and feel of Virtual Agent

You can change the way Virtual Agent looks to the end user. You can change the colors, add your company logo, and change the icon that represents your bot.

If you're using Now Assist in Virtual Agent, you can customize the look and feel during the configuration process. For more information, see Configuring assistants overview.

1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. Under Edit your bot's look and feel, select **Set up branding**.

Edit your bot's look and feel tile on the Conversational Interfaces console page



   The Branding settings page opens.

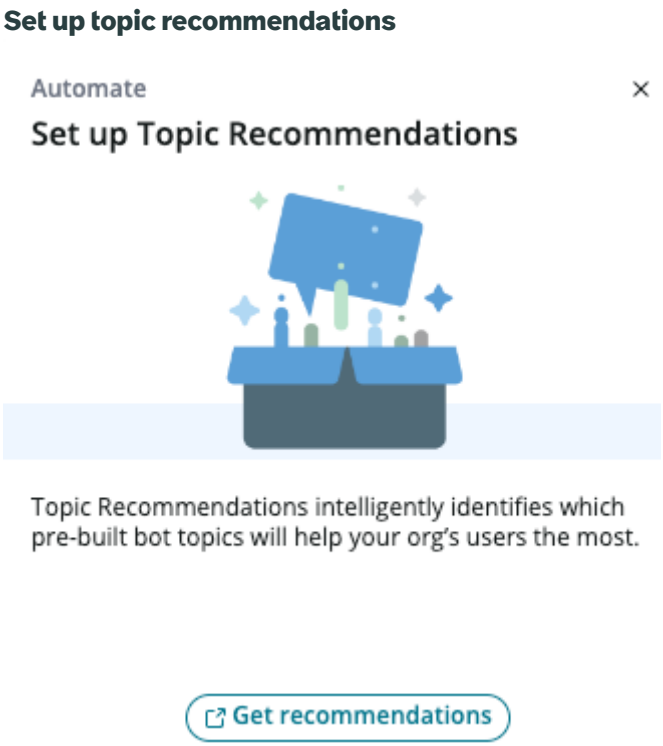
3. Select **New** or the name of an existing branding record.
4. On the form, fill in the fields.
5. Select **Save**.
6. Apply the branding configuration as described in Set up your Virtual Agent bot's branding.

Step 4: Get recommended topics

The Topic Recommendations app lets you evaluate the common use cases that Virtual Agent can help resolve or deflect. You can use Topic Recommendations with Virtual Agent topics that use either keyword or NLU topic discovery.

1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. Under Set up Topic Recommendations, select **Get Recommendations**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



The Topic Recommendations page opens.

3. Use the Quick start for Topic Recommendations to configure and get topic recommendations based on your company's data.

Explore further

As you work with Virtual Agent, you can expand its capabilities by implementing other features. For example, you can do the following:

- Configure Now Assist in Virtual Agent
- Set up chat experiences for Virtual Agent users
- Create new Virtual Agent topics
- Change Virtual Agent and Agent Chat system messages
- Enable AI Search
- Implement Natural Language Understanding (NLU)
- Use Virtual Agent with a live agent
- Use language detection and dynamic machine translation in Virtual Agent
- Localize Virtual Agent topics

Virtual Agent chat widget interface

The Natural Language Understanding (NLU) Virtual Agent chat widget interface captures an automated messaging session between Virtual Agent and the user. Users can see a list of all the topics that the bot can help with, enter a request, request a transfer to a live agent, send and receive attachments, and receive visual and/or audio notifications.

The chat widget interface uses the Service Portal web widget, which you can configure for custom service portals. This widget is available in the CSM, HR Service Delivery, and ITSM Service Portals.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The information in this content is applicable to only Natural Language Understanding (NLU) Virtual Agent. For more information about the LLM Virtual Agent end-user experience, see Using Now Assist in Virtual Agent.

Simple conversation example — chat widget



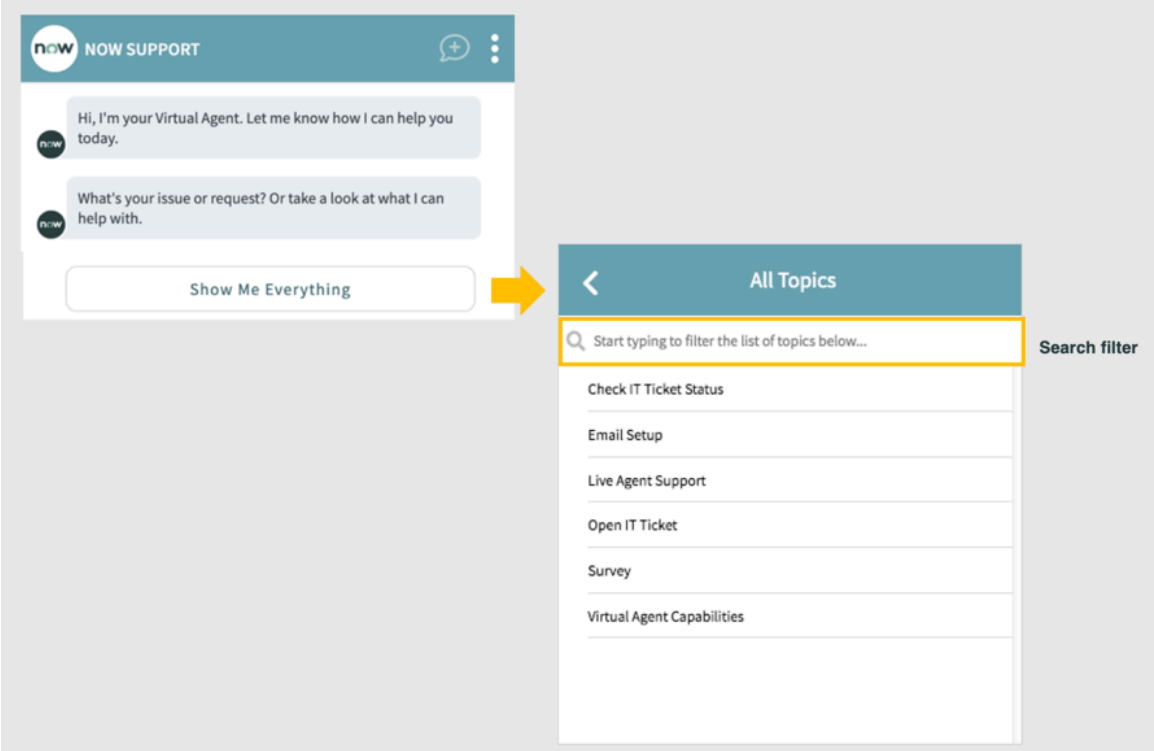
A simple conversation typically includes the following elements:

- Default welcome message from the virtual agent, followed by the first prompt for the conversation. The initial prompt asks the user to type a question or to choose from a list of available topics.
- User response to the first prompt. In this example, the user chooses the topic for checking an IT ticket.
- Series of prompts, acknowledgments, and responses exchanged between the virtual agent and the user until the users reach their goals or complete their tasks. You can use different rich controls in bot prompts, for example, choice lists with buttons or a carousel of images to select an item.
- Closing message to end the conversation.

When your users start a conversation with the bot, they can enter a request or see a list of everything that the bot can help with. If they choose to see everything, the chat window displays all topics available to the user. Your users can use the search box to filter the list of topics.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

See all topics



The conversational interface offers your users several options to manage the conversation. Users can stop the current conversation and start a new one, contact support to access a live agent for immediate assistance, and control audible alerts for chats.

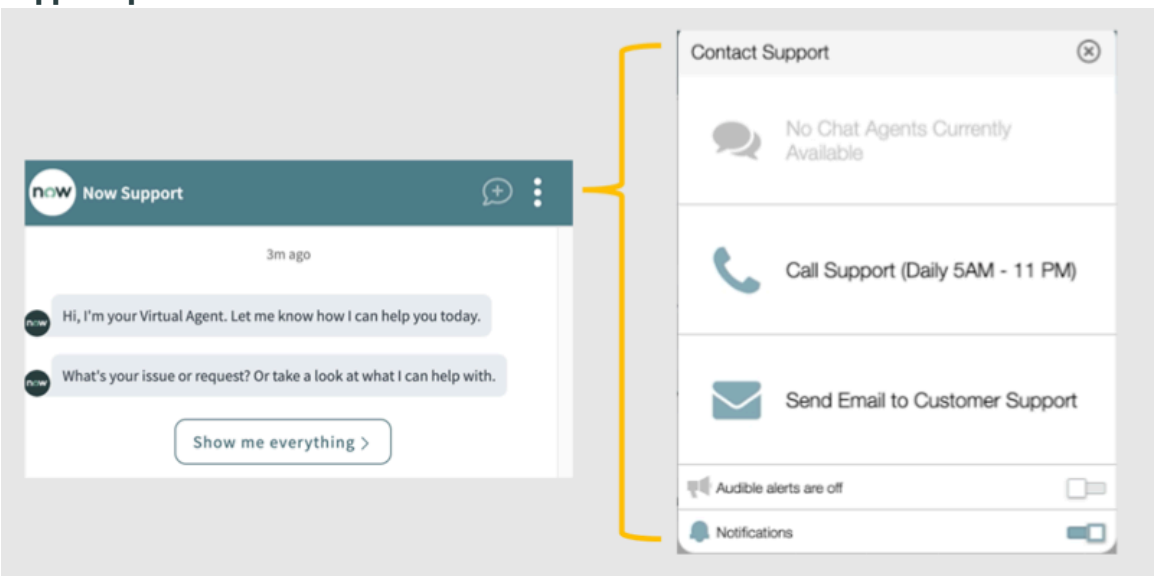
Support options menu



When users transfer to a live agent, the chat window header changes to indicate that they are now interacting with a live agent. The attachment and send icons are available in the chat window for uploading an image, text, or PDF file and sending it to the agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

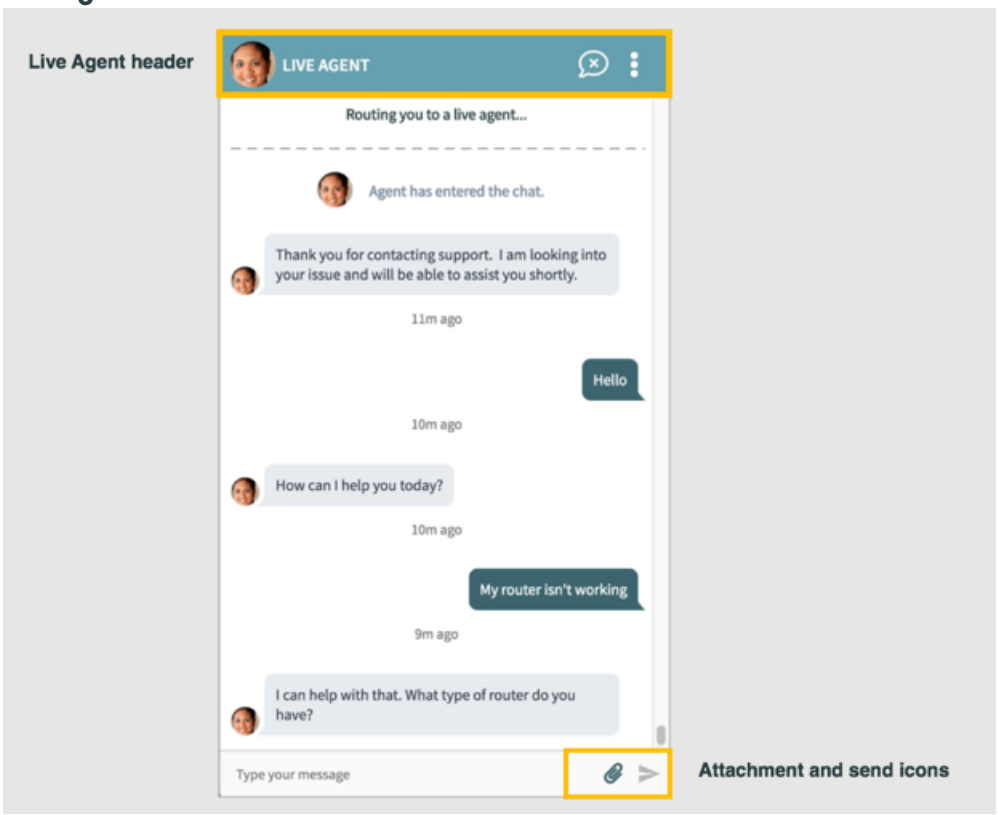Live agent transfer



During live chat, users can attach a file of any type (for example an image, text, or PDF file) and send it to the agent. The system automatically performs a virus scan on the file attachment. If the scan is successful, the file is sent to the agent.

- If the scan fails, a message informs the user that the scan did not pass so that the user can correct the file and then upload the file again.
- If the upload and virus scan process times out (the upload takes too long), a message tells the user that the file couldn't be processed and to try the file upload again.

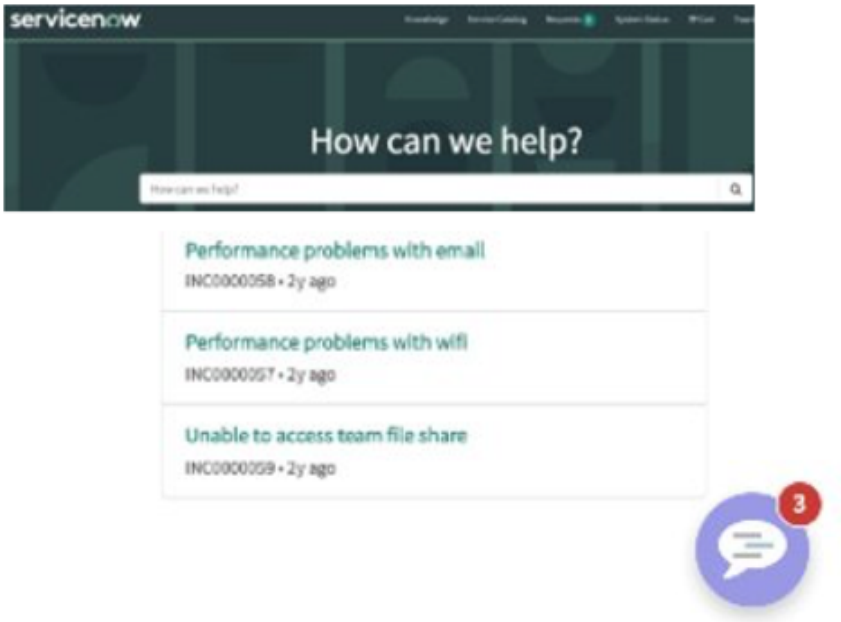
Note:
Most chat clients support file attachment uploads. However, the mobile chat client only supports file attachment uploads in bot conversations. Users cannot upload files in mobile chat with a live agent.

Your users automatically receive audio and visual alerts when they receive a message from a live agent or virtual agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- The visual indicator displays the number of messages received, next to the chat icon in the Service Portal window. When the user opens the chat, the indicator number closes.

New message alerts



- Your authenticated end users can enable or disable audible alerts of chats through the toggle switch on the chat menu (Contact Support).
- Authenticated end users can also enable or disable the delivery of notifications through the toggle switch on the chat menu (Contact Support).
- The default sound notification uses the sn_va_web_client_alert.mp3 audio file.
  - You can change the sound that requesters hear by uploading your own audio file. For details, see Manage audio files.
  - To turn off the audio notification for your instance, use the system parameter `sysparm_disable_audio_notifications=true`. For example: `https://<your-instance name>.service-now.com/nav_to.do?sysparm_disable_audio_notifications=true`

Agentic conversations in Virtual Agent

When you ask a question to the virtual agent, the agent understands the query. It can reason, plan, and execute across AI agents, virtual agent topics, conversational actions and subflows, catalogs, KB articles, custom skills, and any Now Assist in Virtual Agent supported skills to help you.

- If for the given assistant, specific agents are available to perform user tasks or sub tasks, they're used.
- If a specific agent isn't available for the task or sub task, the system automatically employs the Search Agent to discover answers or appropriate skills within the system (again based on the assistant scope).
- If skill execution is required, the system automatically executes the discovered skills.
- The system can plan and orchestrate execution among multiple agents, skills, and QnA to accomplish complex tasks.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Enable AI agents in Virtual Agent

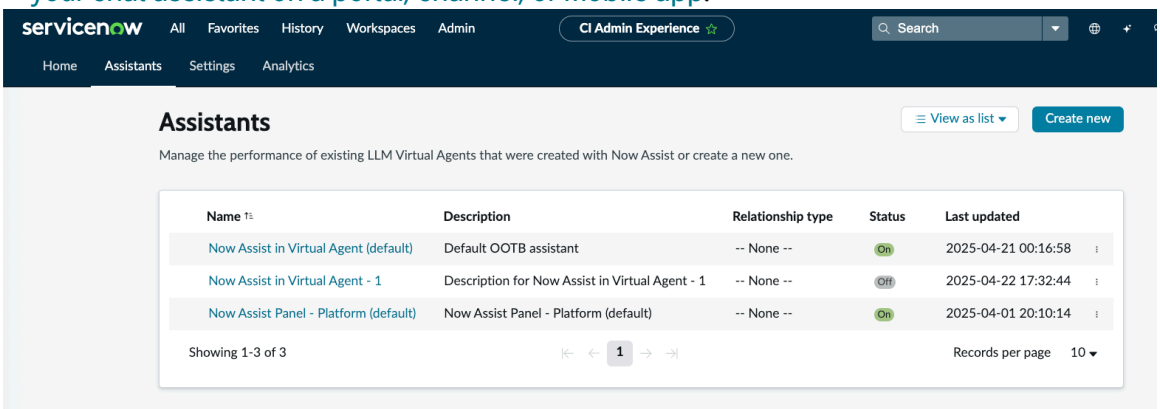
Role required: admin or virtual_agent_admin

To enable AI agents in Virtual Agent:


1. Create and configure multiple assistants with specific scope and map the assistants to one or more portals.

   The configuration consists of the following:

   - Creating an assistant in Virtual Agent or using the default. To create an assistant, see Create a chat assistant
   - Assigning specific assistants to a specific portal or portals. For more information, see Display your chat assistant on a portal, channel, or mobile app.




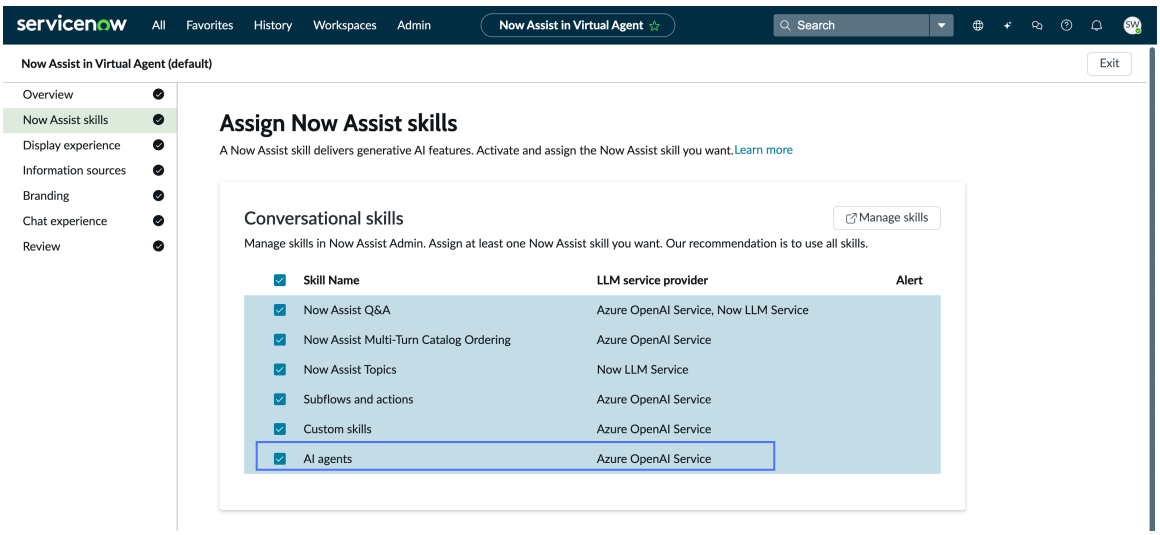2. Ensure that the **AI agents** skill is added to the assistant.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

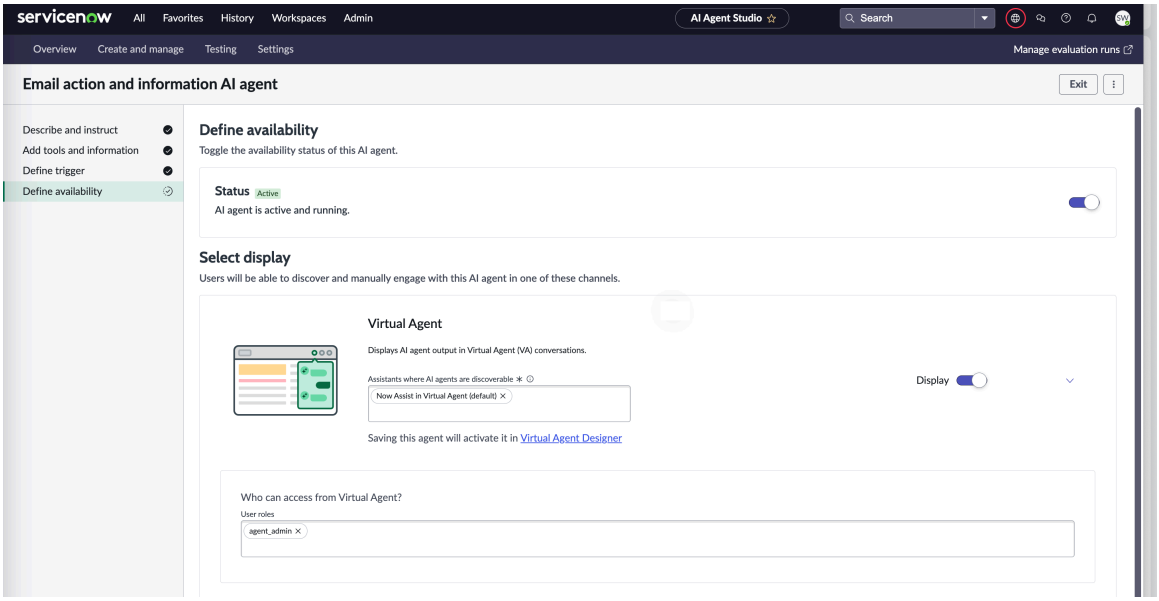3. Map or publish an agent to one or more assistants on AI Agent Studio to make the agent available within a specific assistant. For more information, see Create an AI agent.



During execution, only the configured AI agents are considered for the current assistant and dynamically makes them available to the Orchestrator for planning.

Examples of AI agent behavior for user utterances

The examples will consider the following available example resources in the system:


Agents	Skills/Topics	KB Articles
Check IT Ticket status agent	Order coffee	Spam
Email Agent	Order food	ESPP policy
Meeting scheduling Agent	Order laptop	
	Order accessories	

Scenario 1: Multiple questions from KB articles


Utterance: `How do I avoid spam? How do I detect it?`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

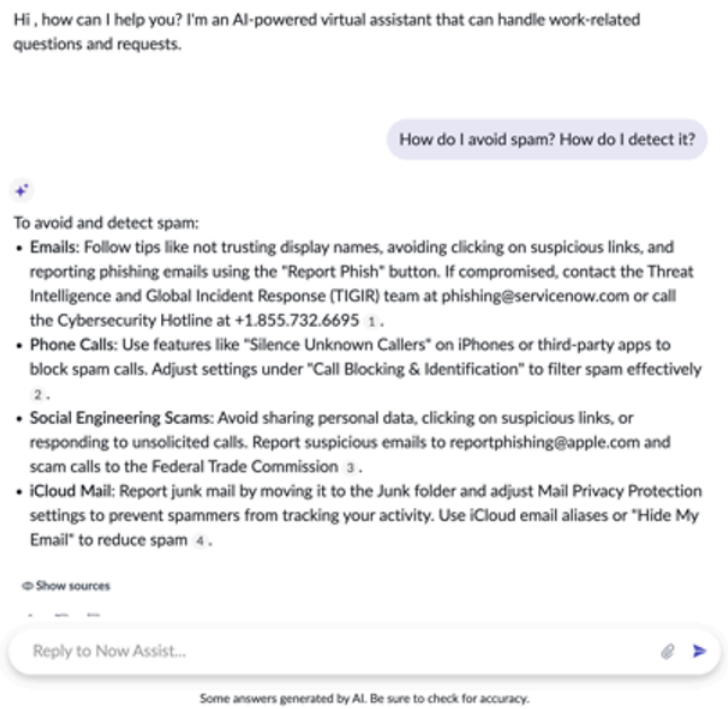- Non-agentic response: Produces a single mixed answer.



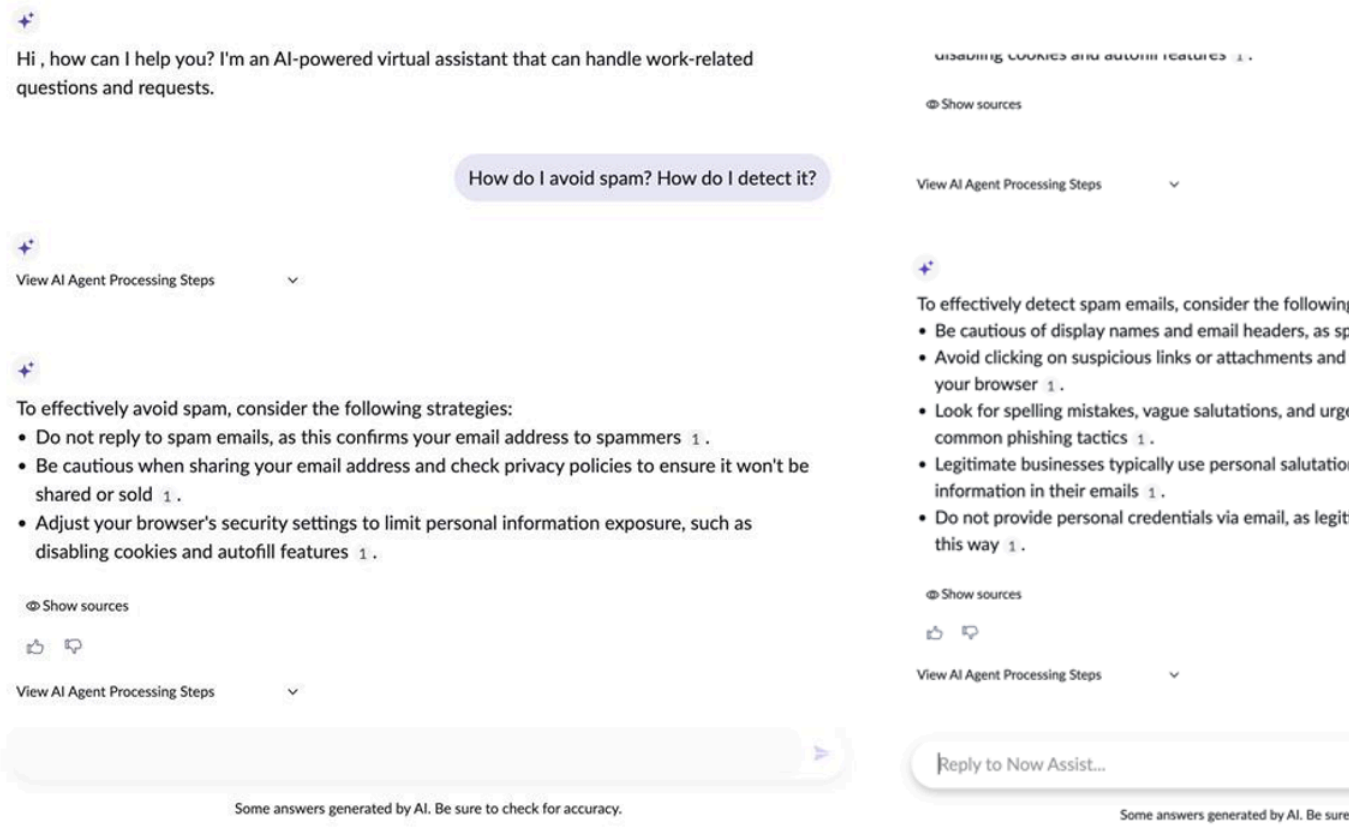- Agentic response: Breaks it into two questions and provides a better answer for each one of them.




Scenario 2: Multiple skills with slot filling


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Utterance: `Hey, order a coffee for me, preferably dark roast and something to eat, maybe a pizza?`

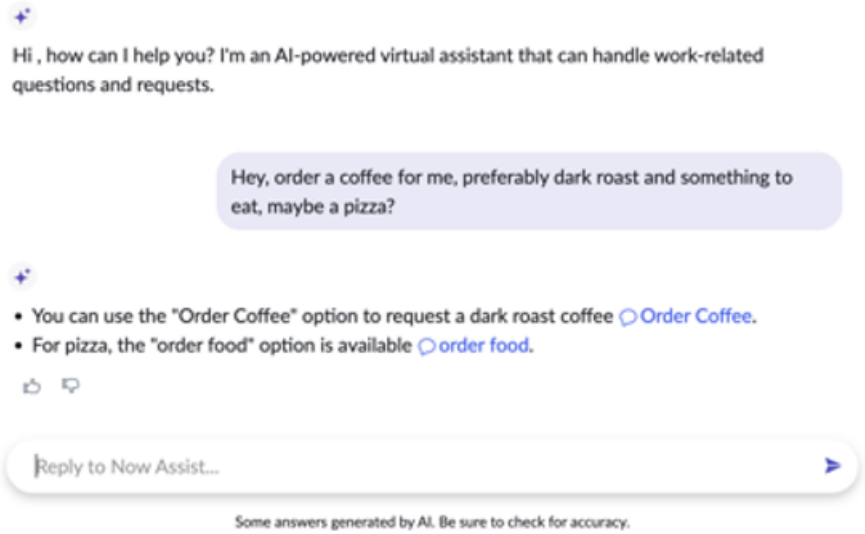- Non-agentic response: Produces a single answer. Mostly listing all matching available skills. No auto-execution since it matched multiple skills.



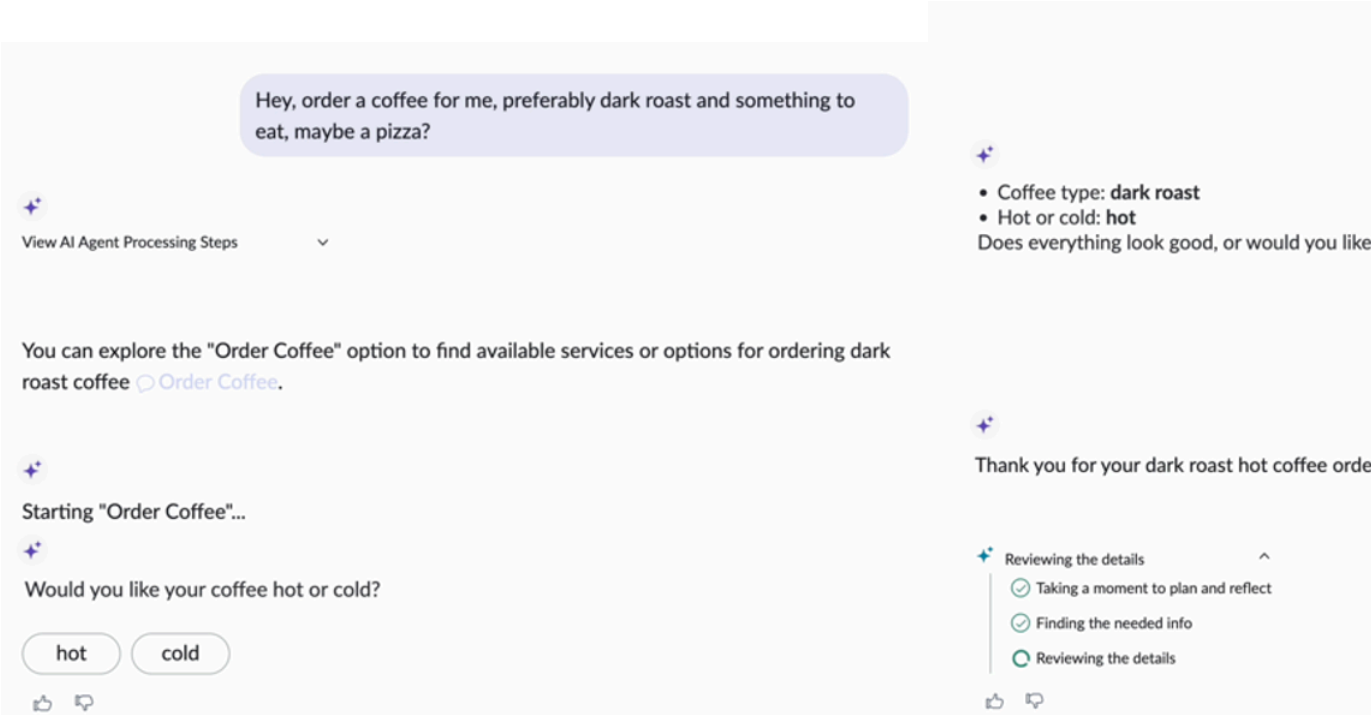- Agentic response: Breaks it into two distinct tasks, order coffee and order food/pizza. Executes one after another, completing the entire user request.




Scenario 3: Complex utterance with a combination of skills, agents, and QnA

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Utterance: `I am going on PTO tomorrow. Get my expense report and my IT ticket status. Send a summary of the expense report to John Jacob and the details on ticket status to Robert Williams, informing them of my PTO and requesting them to work on them.`

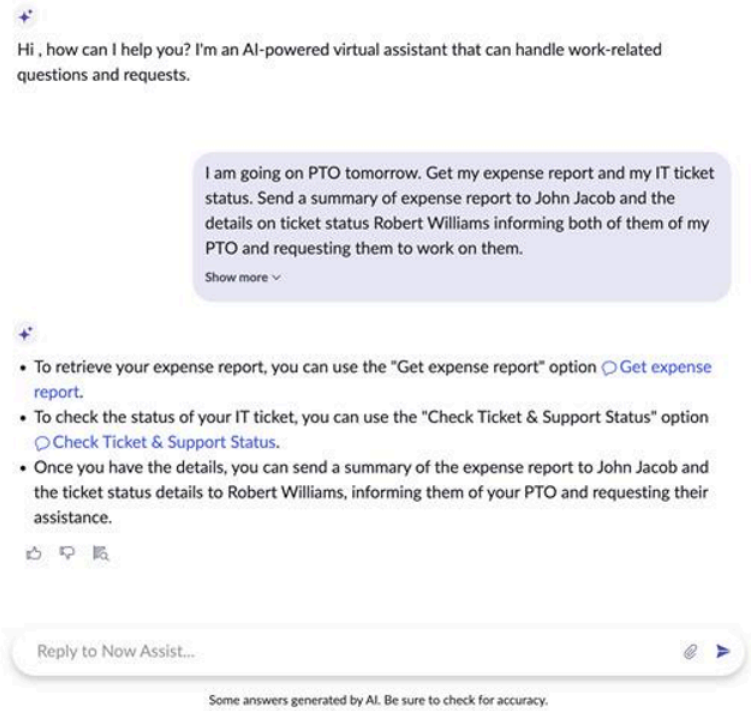- Non-agentic response: Produces a single answer. It lists all matching available skills. No auto-execution will take place since it matched multiple skills.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

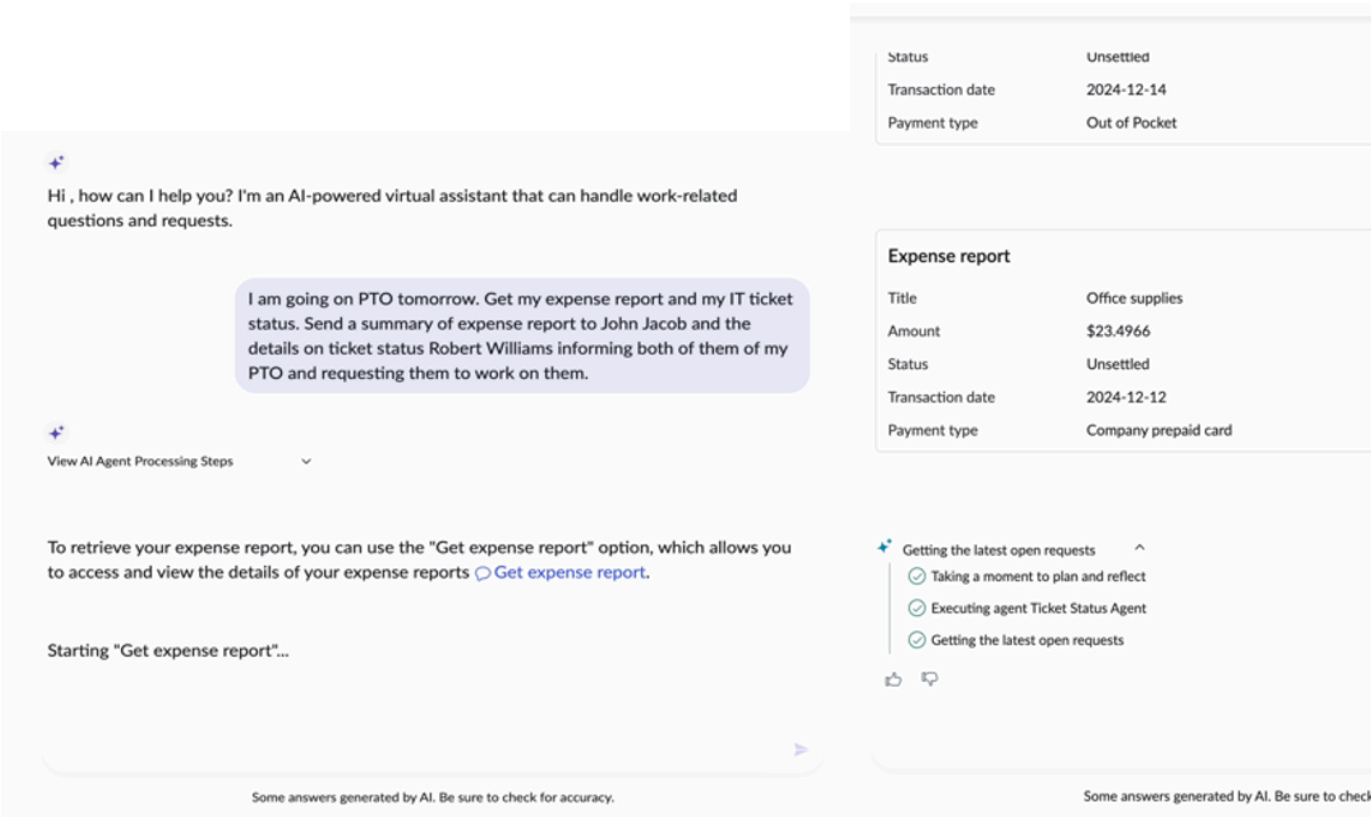- Agentic response: Breaks it into multiple distinct tasks, reasons and plans, understands the dependencies, and executes one after another, completing the entire user request using output from prior actions as context as needed.




Scenario 4: Complex utterance with a combination of QnA (KB) and agent


Utterance: `What is the maximum contribution amount for espp? Send an email to Robert with the details.`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

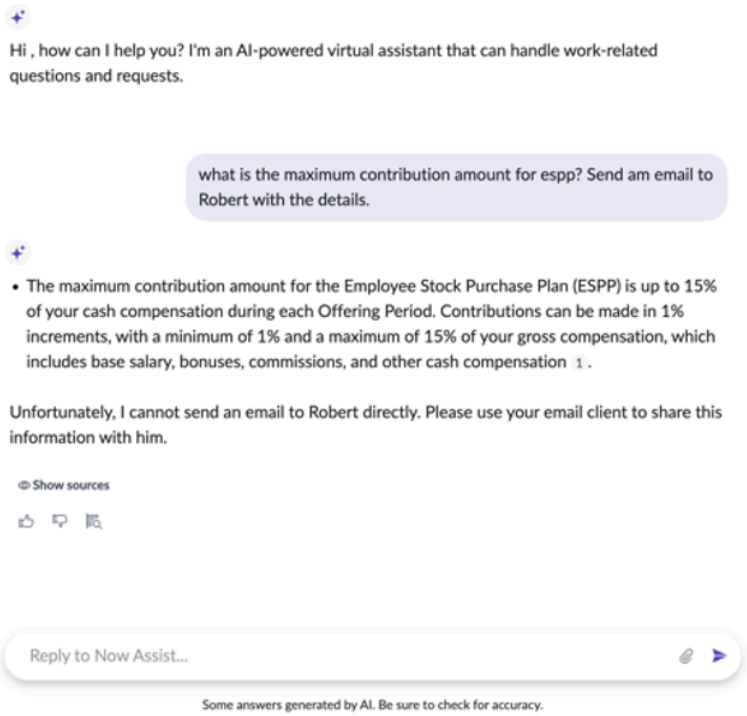- Non-agentic response: Produces a single answer and doesn't complete or even suggest the second action since there's no corresponding skill.



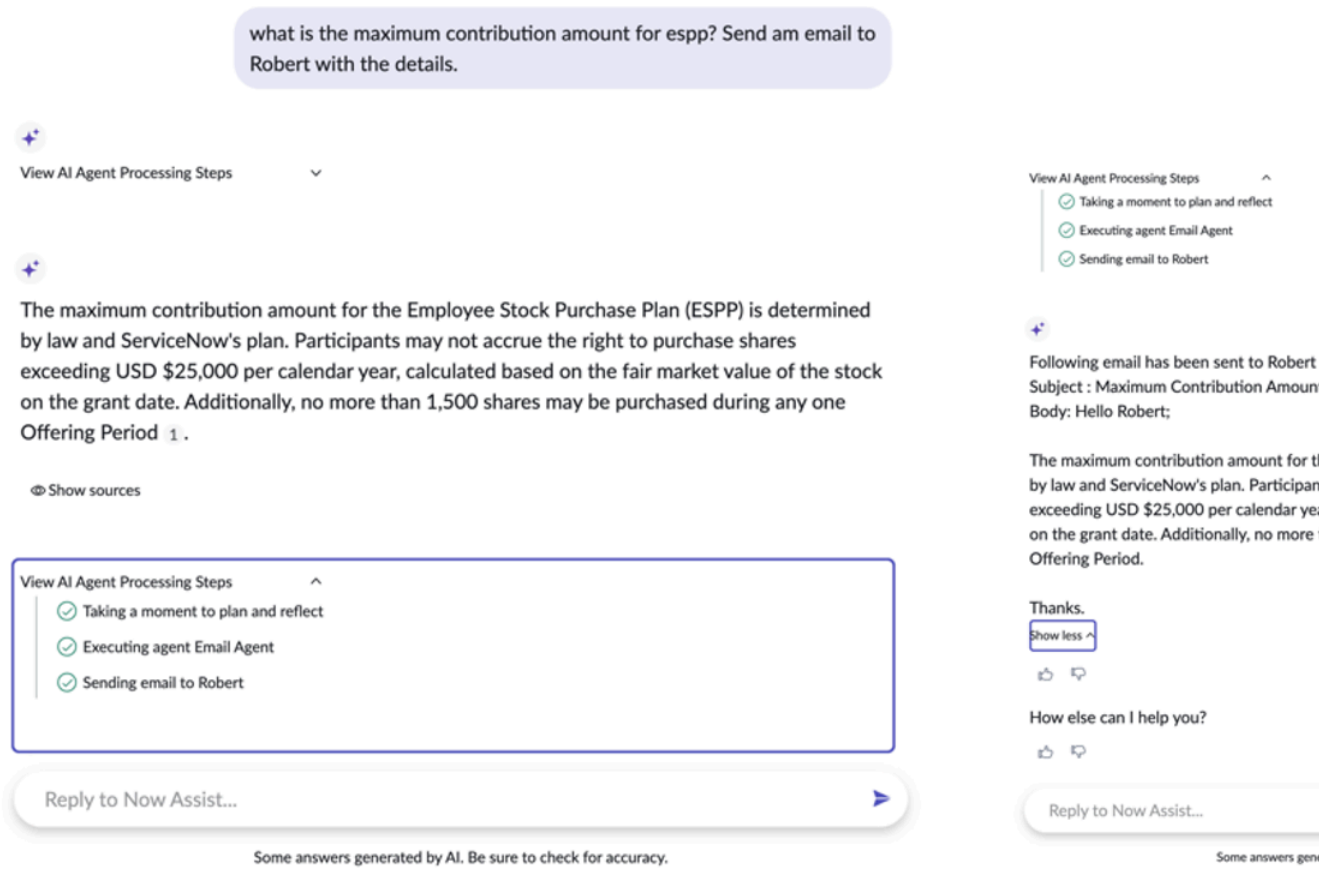- Agentic response: Understands the two separate intents and executes them in sequence while using the output from the first intent to fulfill the second intent.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Halting and restarting agentic conversations

If you want to stop an agentic conversation mid-query, hover over the send icon while the agent is researching a query. The icon becomes an interrupt flow icon. Select the icon and the conversation stops. A message appears: `The current conversation has been stopped, but you can begin again`. Enter a new query to restart the agentic conversation.

LLM topic discovery in Virtual Agent

Large language models (LLMs) enable Virtual Agent to process user statements in plain language. Conversations that use LLMs can outperform those conversations that use Natural Language Understanding (NLU), with easier setup.

How LLMs work in Virtual Agent

Watch this video to learn about LLM topics in Virtual Agent Designer.

https://player.vimeo.com/video/1011425825?h=9a3dc725e1&badge=0&autopause=0&player_id=0&app_id=58479

When you create a topic in Virtual Agent Designer, you can select LLM as the model type for your topic whenever Now Assist in Virtual Agent is turned on. Virtual Agent then uses LLM generative AI to discover topics that match the user's intent.

Unlike NLU topics, LLMs don't require models, intents, or keywords to be linked to the topic. LLMs can discover topics and perform language-related tasks, such as text generation for case summaries and resolution notes, without months of training on NLU models. Overall, you can create, configure, and deploy LLM topics faster than working with NLU.

With LLMs, Virtual Agent can do the following:

- Perform topic discovery without needing a singular declared intent in a given topic.
- Find intents without backup keywords as in NLU modeling.
- Extract entity values without prior mapping as in NLU modeling.
- Handle multiple conversation topic switches in a single conversation session.

For more information about LLMs, see Large language models on the ServiceNow AI Platform®.

Topic discovery

With LLM topic discovery, topic authors no longer need to create and maintain complex NLU models and intents with backup keywords. The LLM does all of the heavy lifting for you. The only requirement is a robust, plain language topic description on the **Properties** tab in Virtual Agent Designer. The LLM uses this description to find the best topic match for the user utterance. If there are multiple potential matches, the user will see a list of topics to choose from.

For example, if a user asks Virtual Agent to calculate a ride share fee, the LLM matches the user utterance with an existing topic that can calculate the ride share with a tip.

Entity extraction

With LLM topics, the LLM has all the information needed to determine if an utterance has the information to fulfill a request. Unlike NLU models, you don't need to associate entities with a user

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

input node or add nodeless NLU entities as input variables to a topic. The LLM simply finds the entity that most closely fits the user intent.

Topic switching

Topic switching is faster and easier with LLMs compared to NLU topics. The LLM processes your requests to change intent made in natural language, and activates the appropriate topic.

For example, if you start a conversation by asking for a mobile phone, you don't have to cancel the order first or restart the conversation. Instead, you can ask Virtual Agent to order a laptop instead. Virtual Agent immediately switches from the mobile phone topic to the laptop topic. Topic switching can be done during a query, but not within a catalog ordering flow.

Another example is when a user might ask a casual question or engage in small talk. The question might be unrelated to the original request. You can create small talk topics or set up small talk filters to help the Virtual Agent match and launch the appropriate conversation for the switched topic. For more information, see Create a small talk topic and Configure small talk filters.

Additional resources

- Now Assist in Virtual Agent
- LLM assistants

LLM description and instruction guidelines for Virtual Agent topics

When you create large language model (LLM) topics, you provide instructions that determine the behavior of the LLM and a description that determines how the topic is discovered by the LLM.

Overview of LLM description and instruction guidelines

Topic authors can use plain text wording to tell the LLM how to discover an LLM topic, as well as tell the LLM how to respond. The Virtual Agent Designer interface provides text fields that let you provide both.

Descriptions

Topics require a description when you create them. The description is used for topic discovery, so the more detailed and specific the topic description is, the more likely it will be to find a good match.

Instructions

When you add LLM user input controls to your conversation flow, you can provide instructions to the LLM in the **Detail description** field, which tells the LLM how to respond. You can use this field to define tone, employ small talk, or provide a dynamic greeting. Your instructions can also function as entity detection.

General guidelines

When constructing an LLM description or instruction, consider these basic guidelines.

- Lead with action verbs. Use the imperative form or direct commands.
- Users should avoid answering a question with a question.

  For example, if the LLM asks `What is your question?`, the user response `Who is on call today?` can confuse the LLM. Instead, the user should enter `Tell me who is on call today.`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Avoid references to third parties or pronouns. Removing the subject or any identifiers generally prevents the LLM from personifying or otherwise misidentifying the end user.
- Your words instruct the logic that your bot will use. Detailed, chain-of-thought instructions work well for this.
- Continually test and refine your instructions. Creating strong LLM instructions is an iterative process.

Don't use NLU utterances as LLM descriptions

NLU utterances are more dependent on keywords and their phrasing, but LLM descriptions work very differently. The problem with NLU utterances in descriptions is that they don't provide instructions for the LLM. Google search descriptions won't work well with LLMs, either. When writing descriptions, you need to be specific about the purpose of the topic and the context of the task being performed in that topic. Keywords aren't necessarily helpful, but logic is.

For more information, see General guidelines for writing instructions for generative AI large language models (LLMs).

Example topic descriptions

The following examples describe weak and strong topic descriptions. Stronger topic descriptions result in more accurate topic discovery.

Company holiday calendar topic descriptions

Strength	Description
Weak description	This topic is about a holiday calendar for employees in a company.
Strong description	This topic is about a holiday calendar for employees in a company. Users can ask for the holiday list or company holiday for a specific year, specific date, inquire about a specific holiday, or ask if they have a day off for a particular holiday. The topic also covers the availability of a holiday calendar and specific holidays like Freedom Day and wellbeing Day.

Active Directory password change topic descriptions

Strength	Description
Weak description	This topic is related to the management and administration of Active Directory, a directory service provided by Microsoft.
Strong description	This topic is related to the management and administration of Active Directory, a directory service provided by Microsoft. It involves making changes to the Active Directory, such as creating, modifying, or deleting directories and processes. The topic also includes tasks performed by administrators, such as managing user accounts, groups, and permissions within the Active Directory environment.

Example input control instructions

The **Node name** field should be unique and explain the operation the user is trying to perform, so that the LLM can identify entities and slot-fill properly. For example, if there are two defined input nodes named `AD Operation Type` and `AD Operation`, there is a chance the LLM could identify the entity and map it to the wrong input node variable. Renaming the nodes to differentiate the two is best. For example, `AD Operation for Password Reset` and `AD`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

`Operation for Locked Credentials and Change Password` are stronger, more unique node names.


The **Detail description** field for the node should have clear instructions for the possible values that the LLM should extract from the user wherever it is applicable. For example, if the node will perform an Active Directory operation, then you should be specific about which operations are allowed in the **Additional instructions for LLM** area. Then the LLM will use the value mapping to identify the entity and fill the slots.

The following example describes weak and strong input node instructions. The better instructions result improved outcomes.

Collect Active Directory operation type input control instructions

Strength	Detail description
Weak instruction	Collect AD Operation Type
Strong instruction	Collect AD Operation Type **Additional instructions for LLM**: For this input, these are mapped values, : {"reset":["reset","locked","unable to sign in","expiry", "expired", "expire"],"change": ["change"]}. The key needs to be extracted if the user input contains the values associated with the keys.

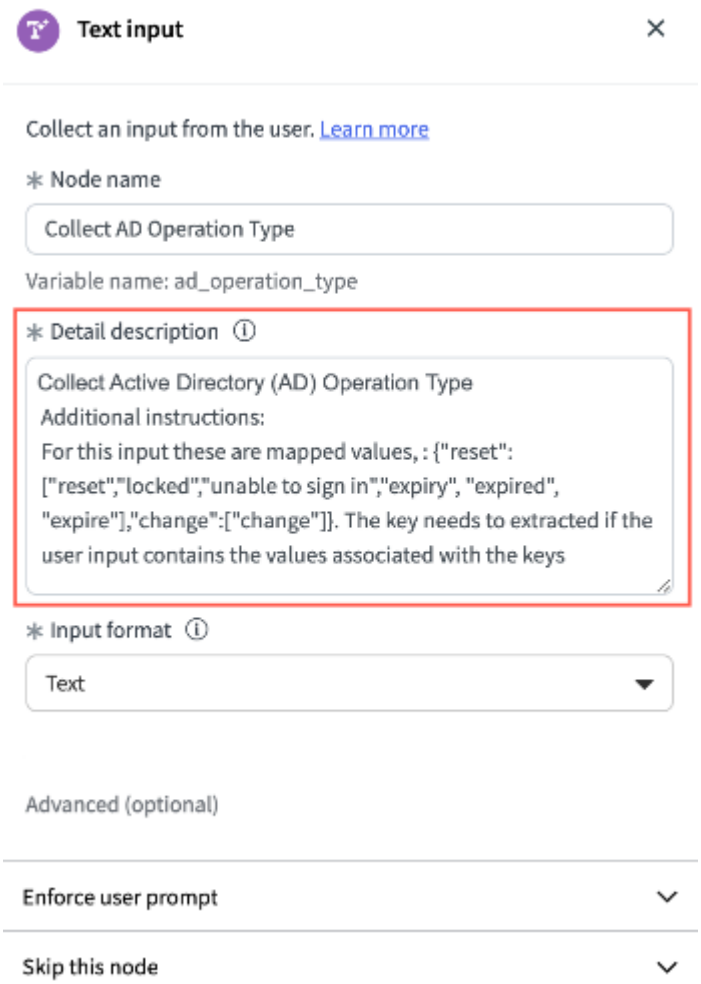Strong detail description example of LLM input node



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Natural Language Understanding (NLU) topic discovery in Virtual Agent

Apply Natural Language Understanding (NLU) models that enable Virtual Agent to process user statements in automated conversations. An NLU model provides information that your virtual agent uses to determine what users want to do and to extract relevant values from their input. With NLU, Virtual Agent can offer a more natural and engaging conversational experience.

NLU components

ServiceNow NLU can learn the syntax, semantics, and vocabulary of your company using the data in your ServiceNow instance. Use NLU Workbench, the NLU model builder, and the NLU inference service to enable the system to learn and respond to user intent.

The following elements work together to identify what the user wants to do so that a solution can be found:

- **Model groups**

  A model group supports a given application, user roles, and languages. For example, you may have a model that supports the Search feature and another model that supports . Typically, a model group contains multiple intents. For more information, see Model management.

- **Intents**

  Intents represent actions. They describe what the user wants to do or what your application can handle. Intents can pertain to any of the following:

  - Functions, such as resetting a password or ordering an item.
  - Domains, such as healthcare, financial, or government.
  - Customers, such as the US Army, Wells Fargo, or Boeing.

  In Virtual Agent, a single intent is mapped to one conversation topic.

  For more information, see NLU intents.

- **Utterances**

  Instead of keywords, you enter natural language examples, called utterances. Utterances help NLU to evaluate word meanings and contexts so it can infer user or system actions. Example utterances might include the following:

  - Reset my password.
  - Change password.
  - I don't remember my password.
  - Forgot my password.
  - My password needs to be reset.

- **Entities**

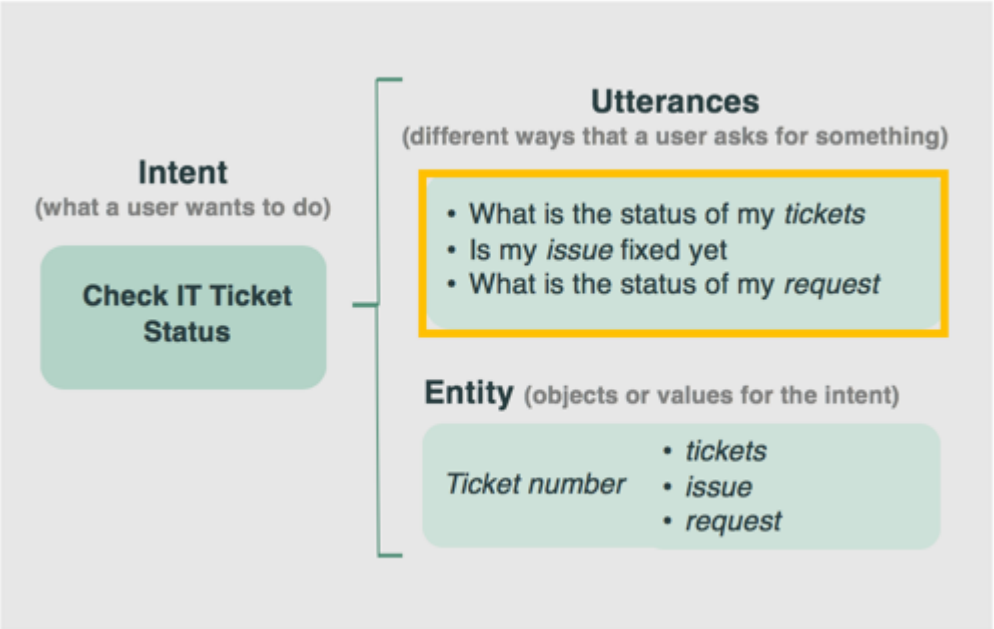
  Entities represent the object of (or context for) the action. You can define them for individual intents. NLU can match defined entities with user input to slot-fill the values. Slot-filling can eliminate the need to ask some questions within a topic flow. There are three basic types of entities that you can define:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Common or system entities, such as date, time, currency, location, quantity, people, or organization.
- Entities based on ServiceNow records, such as a case number.
- Company- or domain-specific entities, such as meeting rooms, company policies, and so forth.

For more information, see NLU entities.

Example intent definition in an NLU model group



How NLU models work in Virtual Agent

When you create or update topics in Virtual Agent Designer, you specify the NLU model and intent that Virtual Agent uses to find the appropriate conversation topic for fulfilling the intent.

Virtual Agent supports models from different services. You can use the following providers:

- ServiceNow NLU models that you create using NLU Workbench.

  ServiceNow provides pre-built (read-only) NLU models and topics for various ServiceNow business applications, such as Customer Service Management, HR Service Delivery, and ITSM. You can use the intents defined in these pre-built models and reuse them when you create your own models.

- If you're using IBM Watson Assistant as your NLU service provider, NLU intents and entities are created in IBM Watson Assistant.
- If you're using Microsoft LUIS as your NLU service provider, NLU intents and entities are defined in the Microsoft Language Understanding Intelligent Service (LUIS).
- If you're using Google Dialogflow ES as your NLU service provider, NLU intents and entities are defined in the Google Cloud platform.

Note:
Virtual Agent supports only one NLU service provider per instance.

With NLU models, your virtual agent can do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Perform topic discovery.
- Designate backup keywords in case an intent is not matched.
- Extract entity values.
- Handle conversation switching in a conversation session.

These capabilities are explained in the following sections.

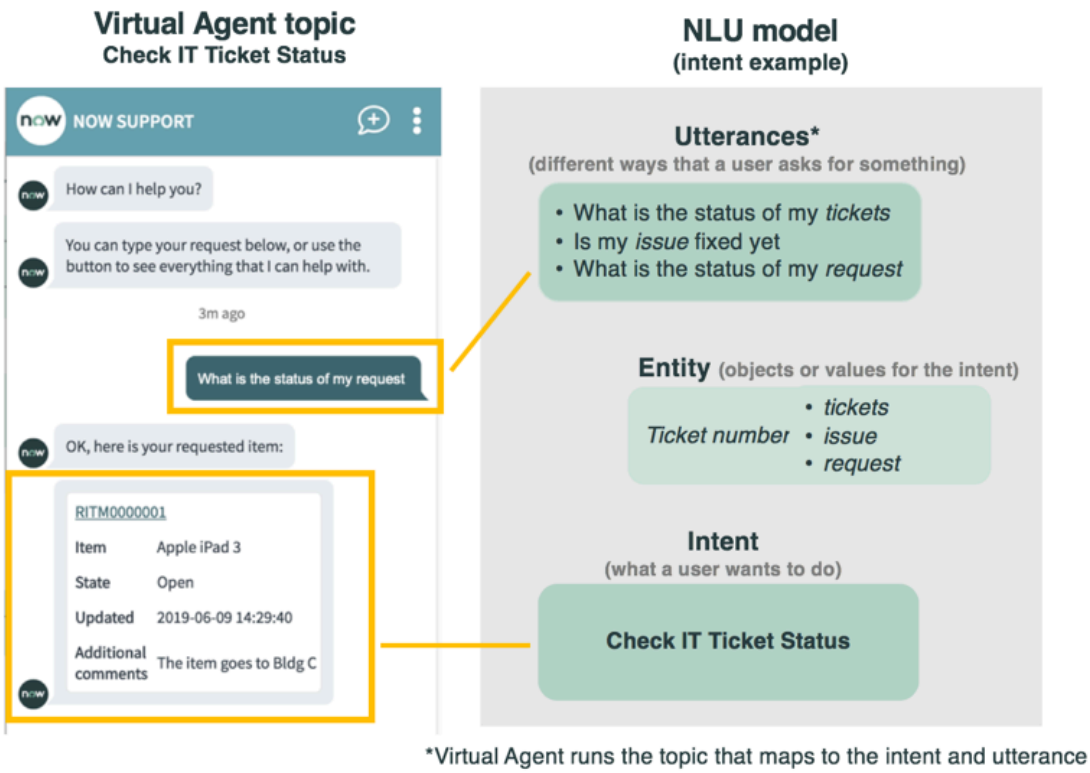
Topic discovery

When users provide an utterance, the utterance is a statement that is associated with a specific intent. Virtual Agent processes these utterances to launch the appropriate conversation topic. Each topic has a single intent that you specify in Virtual Agent Designer.

During the topic discovery process, intents are matched to topics. Virtual Agent returns the most relevant topics for a user's request. The topic discovery process returns the following results to a user:

- Single match: When a user utterance directly matches an intent (topic), the topic runs automatically.

A user request matches an utterance in an intent



*Virtual Agent runs the topic that maps to the intent and utterance

- Multiple matches: When a user utterance matches more than one intent, Virtual Agent returns a choice list of the relevant matches so that the user can choose the appropriate topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A user request matches utterances in multiple intents



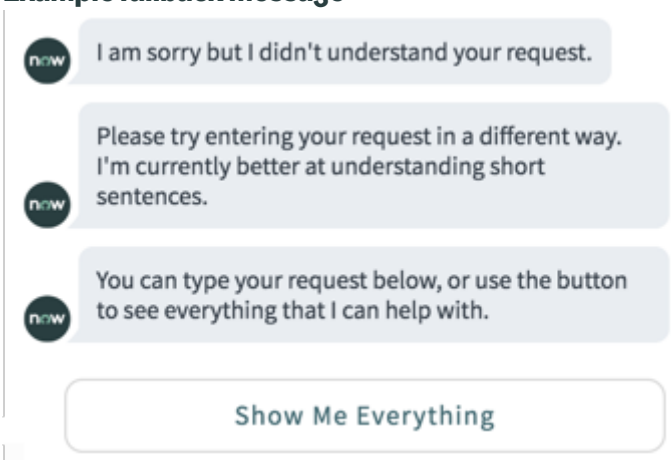
Note:
If there are multiple matches, Virtual Agent returns three intents by default. You can change the number of topics returned by using the *com.glide.cs.max_number_display_topics* system property.

- No matches: When Virtual Agent can't find a matching intent, it uses AI Search to generate search results that display relevant links to Q&A knowledge articles, Service Catalog items, or person (user) records.

  This feature is controlled by the AI Search Fallback setup topic and the Virtual Agent search configurations, which are enabled by default in chat experiences. To learn more about the AI Search results generated, see Virtual Agent integration with AI Search.

  If you disable the AI Search Fallback setup topic, Virtual Agent automatically displays a fallback error message that enables the user to select a topic or enter a different request.

  Example fallback message

  For details about how the AI Search Fallback setup topic and the fallback response (the fallback setup topic) work, see Setting up chat experiences for Virtual Agent users.

For detailed information about NLU topic discovery, see Natural Language Understanding topic discovery logic in Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic discovery with backup keywords

When you create or update topics, you can also optionally specify keywords that Virtual Agent uses to determine the topic if NLU doesn't return a matching intent and topic. Virtual Agent uses keywords in the following situations:

- No topics (intents) are discovered.
- The appropriate topic (intent) can't be determined because too many topics (intents) are discovered.
- The language of the topic and intent is not currently supported in NLU.

Note:
If Virtual Agent can't determine the topic based on NLU or the keyword, it falls back on the AI Search capability to deliver relevant results. The AI Search capability must be enabled.

Entity extraction

With NLU models, Virtual Agent can determine when user statements in a conversation contain important information to fulfill a task or goal. Entities identify the information that Virtual Agent can extract from the conversation, such as an object or a person's name. To extract the appropriate values, Virtual Agent uses the entity information that is associated with an intent that is defined in the NLU model.

When designing your topic, you can use entities as follows:

- Associate an entity with a user input node on the **Flow** tab. You can specify whether Virtual Agent asks the user to confirm the slot-filled entity value or to skip the node.
- Add nodeless NLU entities as input variables to a topic. These variables can be slot-filled from NLU service provider predictions or provided outside of the scope of the topic.

Conversation switching

Users engaged in a Virtual Agent conversation can switch topics anytime during the conversation. For example, a user might be updating an item in the user's employee profile. But before completing the update, that user might ask to order an item instead. Virtual Agent can find and run the appropriate topic based on the user's request. You can enable users who switched topics to resume the original conversation.

Another example is when a user might ask a casual question or engage in small talk. The question might be unrelated to the original request. By reviewing the intents defined in the NLU model, Virtual Agent can match and launch the appropriate conversation for the switched topic.

ServiceNow NLU multi-language support and integration with Virtual Agent Designer

If you're using ServiceNow NLU, you can map an NLU model group and an associated intent to a topic. You can also update, train, and test the associated NLU model from within Virtual Agent Designer. As you work on a topic, you can also improve or modify the utterances and the associated entities for an intent without leaving the interface.

ServiceNow NLU model groups contain a primary language and secondary languages. Use the primary language to author your topic, which can then be translated into the secondary languages within the group. For more information, see Multilingual model management.

As you work on your topics, Virtual Agent Designer provides language-mapping views for previewing and testing topics with their associated language-specific models. For more information, see Localizing Virtual Agent conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Advantages of natural language models over keywords

Natural language models help Virtual Agent to process human language based on context and your company's data. In this way, what the user needs can be more accurately matched with a corresponding topic. Virtual Agent supports large language models (LLMs) and Natural Language Understanding (NLU).

Language is difficult

Keyword matching has its limitations. For example, sometimes an apple is a piece of fruit, and sometimes it's an electronic device. Context matters, and so does intent. Natural language models are designed to deal with the following problems:

- There are multiple ways to describe the same thing.

  Examples: `Office password reset` or `Reset my password for Office`

- Expressions can be ambiguous.

  Example: `Server reporting mail missing after migration`. What is missing, the server or the mail?

- Contextual information is essential.

  Example: `activate London instance in staging`

- Words can acquire new meanings over time.

  For example, a `cell` can pertain to biology or a cell phone.

- Slang, acronyms, and industry idioms can be difficult to interpret.

  Example: `set up SSO on the dev instance`

- Error messages are often hard to understand.

Virtual Agent provides two kinds of natural language topic discovery. You can use both in your instance, but only one at a time in any given chat.

LLM topic discovery in Virtual Agent

Use LLMs to discover topics and access generative AI capabilities without building complex models, intents, or entities.

Natural Language Understanding (NLU) topic discovery in Virtual Agent

Use ServiceNow NLU or a supported provider to discover topics.

Dialog Acts for Virtual Agent

As part of the Vancouver release, the Dialog Acts feature expands natural language communication with Virtual Agent, leading to more fluid conversations between user and agent.

How Dialog Acts works

Dialog Acts interprets and applies user inputs during a Virtual Agent conversation. With this feature active, you engage with Virtual Agent in your own natural language, instead of selecting replies based on prompts in the topic.

For example, if you request a laptop in a Virtual Agent conversation, you use the topic prompts to select a manufacturer, screen size, and amount of RAM. Without Dialog Acts, you change specifications only by following the prompts in the topic, potentially taking more time to loop through a Virtual Agent conversation as you reset your options. With Dialog Acts, if you change

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

your mind about any of the laptop's specifications before finishing the request, you can input an utterance such as, "Actually, I need 8 GB of RAM." If your input matches the Natural Language Understanding (NLU) model closely enough, the specifications are changed immediately, even if you're on a different point in the topic. If the input doesn't match, it's added to a list of ignorable utterances.

User utterances are stored in the Open NLU Predict State Tracking [open_nlu_predict_state_tracking] table, while feedback is tracked by the Open NLU Predict Dialog Act Feedback [open_nlu_predict_dialog_act_feedback] table. Languages are tracked in the Open NLU Driver Languages [open_nlu_driver_language] table. In the current release, English is the sole language support for Dialog Acts.

Activating Dialog Acts

Activate Dialog Acts by toggling the **Enable Dialog Acts** switch in the Create a topic form or the Topic Properties tab. When activated, a second **Confirm modified values** toggle appears. Use this switch to provide a prompt confirming that a variable is to be changed based on your utterances.

Considerations for implementing Dialog Acts

The Dialog Acts feature is available as long as NLU is active for the instance and the topic. However, at least one of the preconfigured responses must be Active for the Dialog Acts toggles in the Topic Properties tab to be available. Dialog Acts can work without a model intent, but it can't select an entity if the topic is not associated with that model or intent.

Decision nodes can be modified by a condition or script to skip reprompting by Dialog Acts. However, the **Modify Dialog Acts** toggle doesn't work if there are multiple date-time nodes on a topic.

Available Dialog Acts responses

The current release includes the following types of responses, stored in the Open NLU Dialog Acts [open_nlu_dialog_act] table:

Dialog Acts response types

Type	Description
Modify	Alter a variable recorded previously.
Affirm	Confirm a variable.
Negate	Decline confirming a variable.

Implement NLU in Virtual Agent

Create and maintain NLU model groups and intents that map to your conversation topics in Virtual Agent. You can create and edit model groups in NLU Workbench or from topics in Virtual Agent Designer.

Before you begin

Activate the plugins for Glide Virtual Agent and any pre-built topics that you want to use.

Role required: virtual_agent_admin or admin

About this task

When authoring conversations for an NLU instance, be aware of the following guidelines:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Verify that you are in the appropriate application scope before you create or update a topic. For example, if you are creating ITSM topics, verify that you are in the **ITSM Virtual Agent Conversations** scope, and not the scope for the ITSM NLU Model for Virtual Agent Conversations.
- Specify the **NLU Model** and **Associated Intent** for the topic in the Topic Properties tab. If you want to allow topic switching in the conversation session, enable **Resume topic flow**.

  Note:
  A topic can map to only one intent in an NLU model. Once you select an intent for a topic, the intent is no longer available for use in other topics.

- Set the NLU entity properties in the property sheet for each input control that you add to the conversation flow. The entity properties identify the entity associated with the node, a switch for allowing text input for the control (prompt), and another switch for confirming the slot-filled entity value that Virtual Agent extracts.

Procedure

1. View the Virtual Agent General Settings, and change your NLU service provider, if needed.

   If you're using a different NLU service provider supported by Virtual Agent, configure it as described in one of the following topics:

   - IBM Watson Assistant Intent and Entity integration
   - Microsoft LUIS Intent and Entity integration
   - Google DialogFlow Essentials (ES) Intent and Entity integration

2. **Optional:** If you're supporting conversations in other languages, enable NLU languages in Virtual Agent settings.
3. Associate a model group and intent with each Virtual Agent topic in your instance. You can do this in the following ways:

   - Add NLU to an existing Virtual Agent keyword topic.
   - Create or map model groups and intents when you create a new topic.
   - Preview and test the pre-built ServiceNow topics in Virtual Agent Designer.

     Determine whether you want to use any of the topics, then duplicate them as needed.

   - Run Topic Recommendations reports for your instance to identify pre-built Virtual Agent topics and intents that you can quickly implement in your organization.

4. Test the topic.
5. When you're ready to deploy a topic, publish the topic.

Result

The topic state changes to **Active**.

Virtual Agent Lite

Virtual Agent Lite is a limited version of Virtual Agent that is available to ITSM standard customers.

About Virtual Agent Lite

Use Virtual Agent Lite, to implement a virtual agent that provides IT service assistance using several pre-built ITSM conversations. As with Virtual Agent, you can set up and configure the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

chat clients for your end users. Use Virtual Agent Designer to review, duplicate, and publish the pre-built conversation topics for your end users.

Virtual Agent Lite is preinstalled in your instance. To use it, you must install ITSM Virtual Agent Conversation Topics Lite, which provides several pre-built conversations for common IT support requests. These keyword-based conversations run in the web chat client and also in Virtual Agent messaging integrations for the following channels:

- Slack
- Microsoft Teams
- Workplace by Facebook
- Facebook Messenger

Virtual Agent Lite features

For Yokohama, the Virtual Agent Designer features available in Virtual Agent Lite include the following:

- Localization Framework integration.

  The Localization Framework is used in multi-language topic authoring and translations. The Localization Framework is installed automatically with Virtual Agent. Activate the ServiceNow® plugin for each language you want to support. For more information, see Activate a language.

  In Virtual Agent Lite, information in the **Languages** tab is read-only.

- Control topic discovery and visibility.

  The **Active** option of the header includes two options (toggle switches). Admins and topic authors can use these options to do one or both of the following:

  - Enable Virtual Agent to discover topics for use in chats.
  - Include a topic in the **All Topics** menu. This menu lists all of the topics that are available for use.

  For more information about using these options, see Control topic discovery and visibility.

After using Virtual Agent Lite, you can upgrade to Virtual Agent to access all of the features. Contact your ServiceNow account representative for upgrade information.

Virtual Agent Lite limitations

Virtual Agent Lite has the following limitations:

- Virtual Agent Designer limitations: Virtual Agent Lite only supports conversation topics in the ITSM self-service category (including related topic blocks) and the platform setup topics. This means you can't do the following:
  - Create new topics, topic blocks, or custom controls.
  - Specify the conditions that control how or when the topics are used.
  - Specify the Live Agent (chat) variables that provide context for conversations.
  - Enable the **Available for Agent Autopilot** toggle switch.

> **Note:**
> A lock icon displays next to the Virtual Agent Designer fields that are not available in Virtual Agent Lite.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Keyword-based conversations: Virtual Agent Lite only supports keyword-based conversations. Natural Language Understanding (NLU) models and NLU-enabled topics aren't supported. This means that related NLU features, such as topic switching and multi-language NLU models, are also not supported. Language support is available for conversations through ServiceNow AI Platform language internationalization.
- Virtual Agent tables: Virtual Agent tables are read only for admins and Virtual Agent admins.
- Localized content: Translated content is read-only. You can't add new translations or localize content. The **Languages** tab displays a banner asking users to contact their Account Executive for more information about upgrading to the latest release.
- Custom channels: You can't run Virtual Agent Lite topics in any custom chat channels (created through custom chat integrations), except for the supported Virtual Agent integrations for Slack, Microsoft Teams, Workplace by Facebook, and Facebook Messenger applications.
- Virtual Agent notifications: You can receive only simple and non-actionable notifications. Actionable notifications are not supported with Virtual Agent Lite.
- Virtual Agent Analytics Dashboard: This feature is not available in Virtual Agent Lite.

What to do

Set up and configure Virtual Agent Lite. For details, see Quick start for Virtual Agent Lite.

Quick start for Virtual Agent Lite

Virtual Agent Lite comes pre-installed, so all you have to do to try it is activate the ITSM Virtual Agent Conversation Topics Lite plugin and set it up.

Before you begin

If you plan to integrate Virtual Agent Lite with Slack, Microsoft Teams, Workplace, or Facebook Messenger apps, you must be an administrator for those messaging apps.

Role required: virtual_agent_admin or admin

Procedure

1. Activate the ITSM Virtual Agent Conversation Topics Lite plugin:
   a. Navigate to **All** > **Plugins**.
   b. In the Search field, type `ITSM Virtual Agent`.
   c. Find the entry for ITSM Virtual Agent Conversation Topics Lite (com.snc.itsm.virtualagent.lite), and then select **Activate**.
2. **Optional:** Configure Virtual Agent Lite for additional portals.
   Virtual Agent Lite appears in the Service portal by default. For more information about configuring the Service portal, see Service Portal events.
3. Preview and test ITSM Virtual Agent Lite topics in Virtual Agent Designer.
   Two topics are available for use with Virtual Agent Lite.
4. Duplicate and publish ITSM Virtual Agent Lite topics.
   Users can now access Virtual Agent Lite topics.

Preview and test ITSM Virtual Agent Lite topics

Run a pre-built IT Service Management (ITSM) Virtual Agent Lite topic to decide whether you want to deploy it to your end users.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

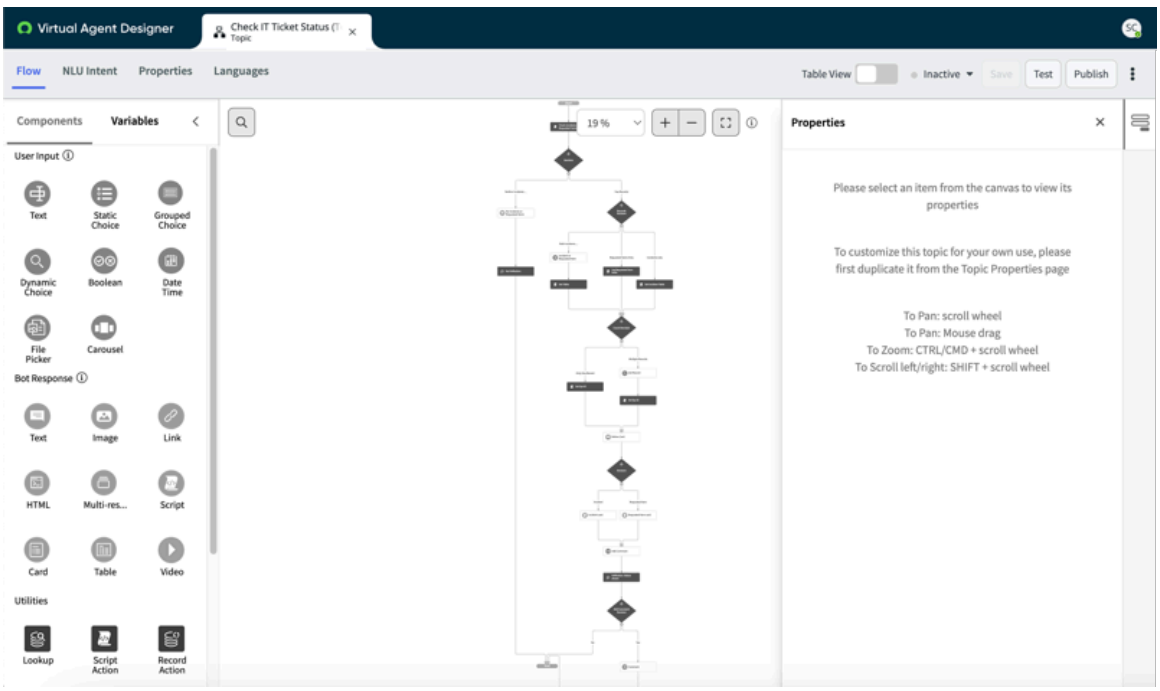
Before you begin

Activate the plugin. For more information, see ITSM Virtual Agent Conversation Topics Lite (com.snc.itsm.virtualagent.lite).

Role required: virtual_agent_admin or admin

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, select the filter icon, and build a condition with the field **Category**, and **ITSM Self Service Lite** as the type to show only ITSM Virtual Agent Lite conversations.
   Two pre-built topics are available: Check IT Ticket Status and Report IT Issue.
3. Select the topic that you want to preview.
   In the **Flow** tab, the Virtual Agent Designer canvas opens with a read-only view of the topic flow. You can resize the canvas to see the nodes in the flow, but you can't add or change controls and their related property sheets.



4. Select **Test** to run the conversation in a test chat window.
   For example, if you're testing the Check Ticket Status topic, the test chat window runs the conversation and lets you respond to the prompts displayed. You can also view the test logs to

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

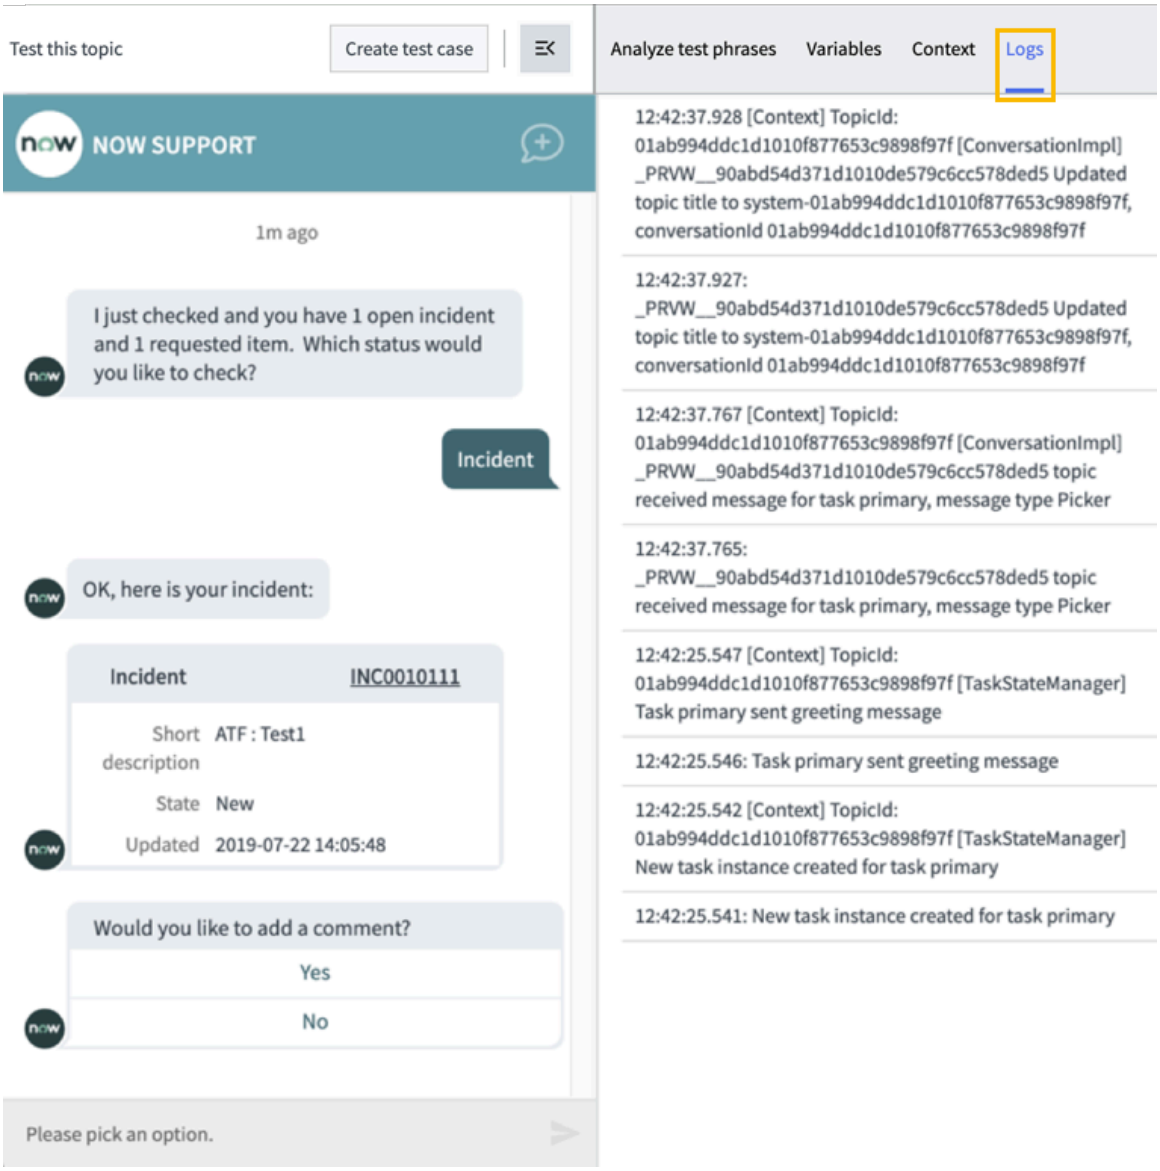see the messages logged and conversation tasks performed during the conversation, as well as the variables used in the conversation.



What to do next

If you'd like to deploy a topic, duplicate and publish the topic so that it's available to your users.

Duplicate and publish Virtual Agent Lite topics

Copy and publish a pre-built ITSM Virtual Agent Lite topic to deploy it to your users.

Before you begin

Preview (test) the pre-built ITSM Virtual Agent Lite topics.

Role required: virtual_agent_admin or admin

Procedure

1. In the topic that you've tested, select **Duplicate** in the triple-dot icon on the Virtual Agent Designer header bar.
   a. In the pop-up window, enter the name of your duplicated topic.
   b. Select **Save**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The **Topic Properties** page (**Properties** tab) for your duplicated topic opens.

Note:
You can duplicate a pre-built topic but you can't duplicate a copy of a pre-built topic.

2. Change these property fields as needed:

Property	Description
Description	A brief explanation of the topic.
Keywords	A word or phrase that is associated with and activates the topic. You can add, change, or delete keywords.
Roles	Roles that an end user must have to view and run the topic. If a topic is public (available to users, including guest users, who are not authenticated in ServiceNow), select only the Public role.

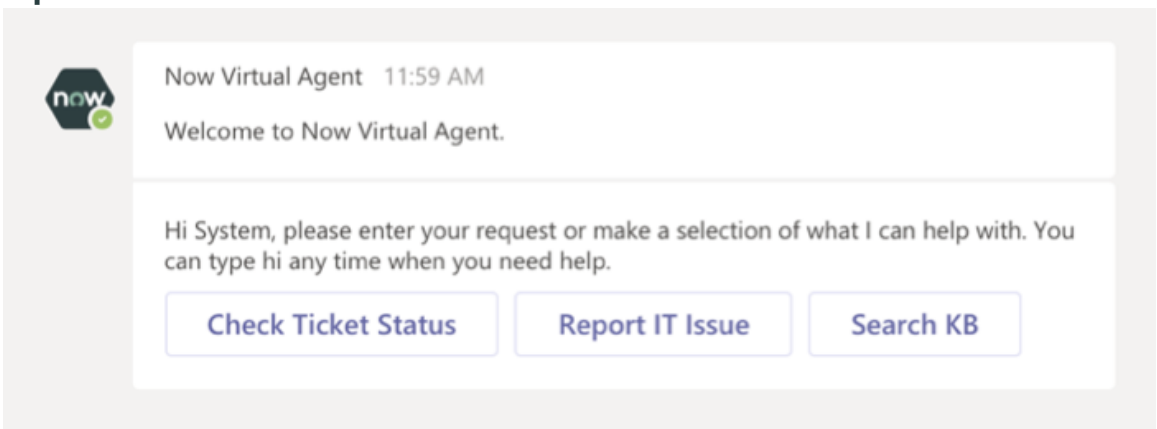
3. Select **Save**, and then select the triple-dot icon followed by **Publish**, to make the topic active and available in your chat clients.

Result

When your users run Virtual Agent, the chat client displays the published topics in the topic selection menu. If there are three or fewer topics available to the user, the menu items (topics) are displayed as buttons.

For example, in the Microsoft Teams integration, the topic selection menu displays these three topics as buttons.

Topic choices in the Microsoft Teams channel



Example Asset Refresh Virtual Agent conversation with notifications

Virtual Agent can automate many workflows, and a number of common solutions are available when you install Virtual Agent and related plugins, such as ITSM Virtual Agent Conversations.

For an overview of the Asset Refresh workflow from the user perspective, watch this video.

Automate workflows with Virtual Agent. In this example, a user is notified that it's time to get a new tablet. The Virtual Agent workflow helps him order a replacement.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Pre-built components in Virtual Agent

Virtual Agent comes with a basic configuration that includes common greetings, NLU intents, reusable logic, and pre-built conversations. Using these building blocks, you can quickly put together workflows to handle some of the most common organizational needs, including the following:

- Resetting a password
- IT Self-Service
- IT troubleshooting
- HR queries and employee profile updates
- Customer Service queries and requests

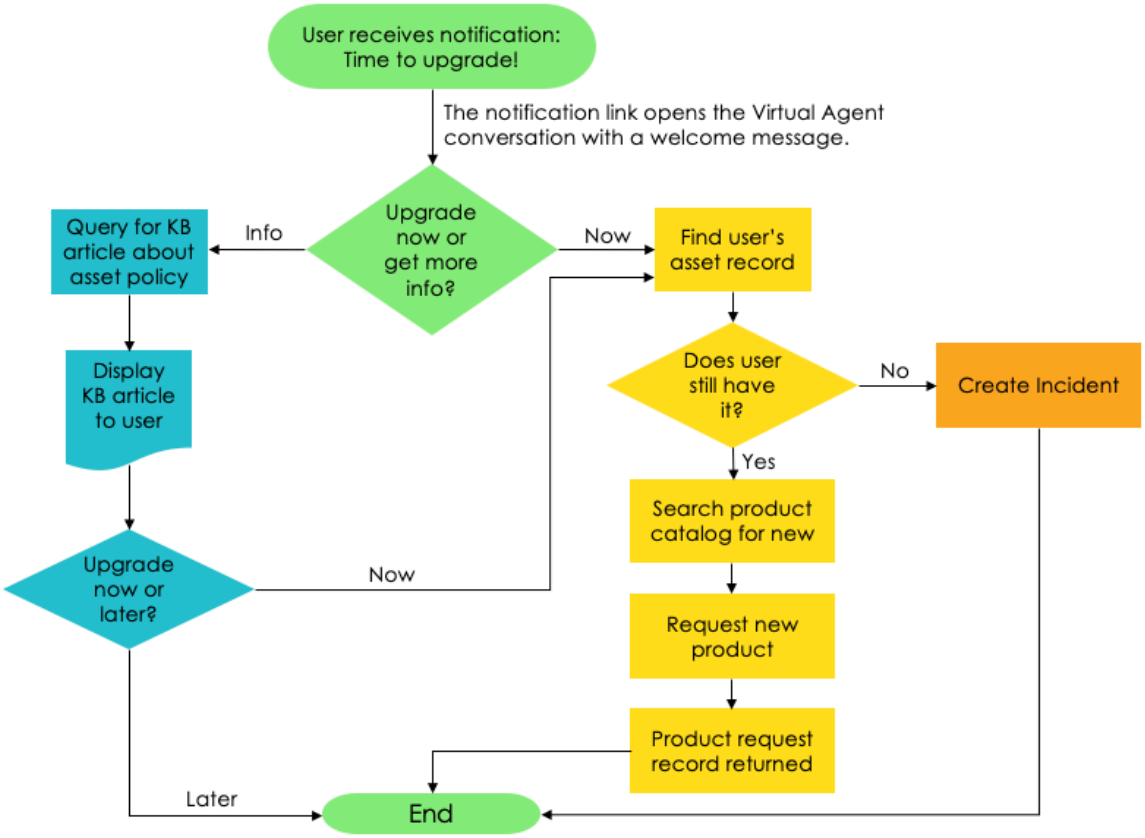
To help you understand the possibilities, the Asset Refresh example uses pre-built topic blocks that are included in the ITSM Virtual Agent Conversations plugin. These topic blocks do most of the "heavy lifting" in the topic.

Asset Refresh workflow

The purpose of the Asset Refresh topic is to automate hardware upgrades for your employees. If your organization's policy is to replace computers or tablets every two years, then you can create a business rule that says when a user has had an asset for two years, the asset should move to the *`In maintenance`* state. You can create a notification that is triggered by this change of state in the Hardware table. In our example, the asset owner receives the notification and is instructed to upgrade their asset.

The Asset Refresh Virtual Agent topic provides the action for the notification. When the user selects the link in the notification, they proceed to the workflow in Virtual Agent. This example topic contains the primary flow (helping the user upgrade their hardware) and two secondary flows that ensure that the user's needs are met.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



After a greeting message, Virtual Agent asks the user if they want to upgrade now or get more information. If they choose to upgrade now, they are directed through the primary flow. Virtual Agent uses the Lookup utility to find the expiring asset that is assigned to the user. Then Virtual Agent makes sure the user still has the asset. If they do not, Virtual Agent uses the Create Incident topic block to open an Incident to resolve the problem. If the user still has the asset, Virtual Agent uses the Search Catalog Item topic block to find a replacement. The Request Catalog Item topic block is used to request it. The request is sent to the user, and the workflow ends.

If the user chooses to get more information, the AI Search topic block returns one or more specific KB articles that explain the organization's policy. Once the user has viewed these, they are given the option to upgrade now or later. If they choose to upgrade now, they are redirected through the primary workflow; otherwise, the conversation ends.

Creating the Asset Refresh example workflow

The following topics describe how to use Virtual Agent Designer and actionable notifications to create the Asset Refresh workflow. Follow these steps in order.

1. Create the Asset Refresh topic in Virtual Agent Designer.
2. Create the Open Incident workflow in the Asset Refresh topic.
3. Create the More Information workflow in the Asset Refresh topic.
4. Create the notification for the Asset Refresh topic.
5. Associate content with the Asset Refresh notification.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create the Asset Refresh topic in Virtual Agent Designer

Create the topic in Virtual Agent Designer using topic blocks that come with the ITSM Virtual Agent Conversations plugin. When the user receives a notification that it's time to upgrade, they will be directed to this topic.

Before you begin

Install the following applications:

- Glide Virtual Agent plugin (com.glide.cs.chatbot)

  You must have a subscription for Virtual Agent before you can activate the Glide Virtual Agent plugin.

- Enable Natural Language Understanding (NLU), if not already enabled (recommended).
- ITSM Virtual Agent Conversations (available in the ServiceNow® Store)

  If this application is already installed, check the ServiceNow Store for an updated version before you begin.

Determine the application scope for your Virtual Agent topic and actionable notification. They don't have to reside in the same application scope, but it can be easier to maintain if they do.

Publish the following ITSM Virtual Agent components. If you're using an application scope other than ITSM Virtual Agent Conversations, you should duplicate and publish these topic blocks in the scope you intend to use. To do this, change your application scope, and then duplicate the topic blocks in Virtual Agent Designer.

- Create Incident topic block
- Request Catalog Item topic block
- AI Search topic block
- Search Catalog Item topic block

Role required: virtual_agent_admin or admin

About this task

For more information about building topics and the Virtual Agent Designer interface, see the following topics:

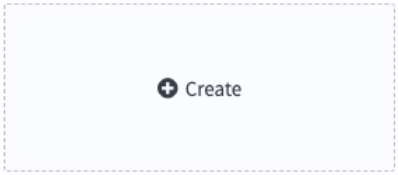
- Getting started with Virtual Agent Designer
- Create a Virtual Agent topic
- Virtual Agent Designer controls
- Virtual Agent Designer interface reference

Tip:
Look through existing conversations to ensure you are not duplicating effort, and familiarize yourself with Virtual Agent and the flow of topics. Additionally, it may be helpful to outline the flow of a conversation before building it in Virtual Agent Designer.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the Topics page, select **Create**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




3. On the Create a topic form, set up your topic.

   a. Enter a name, such as `Asset Refresh`.

   b. If NLU is enabled, select an existing model, or create a new one.

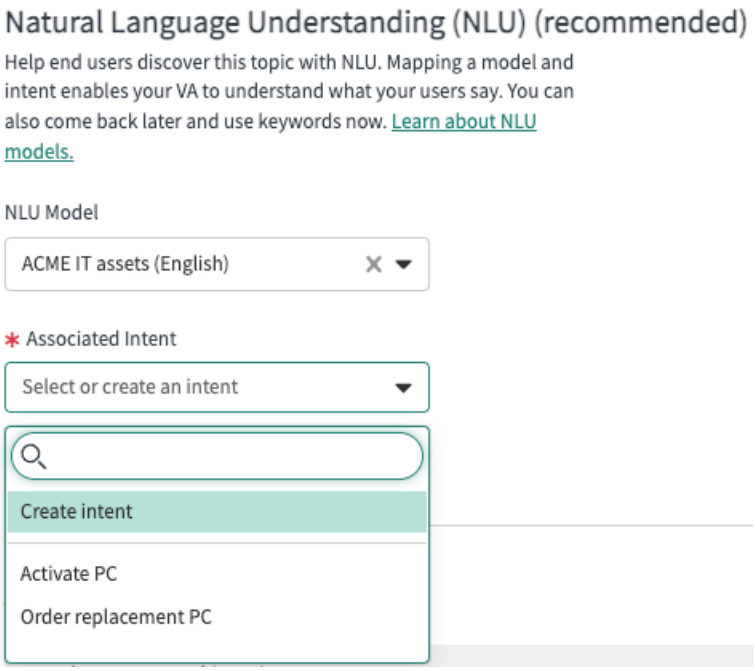   c. Select or create an intent for the NLU model.



   For descriptions of all field values, see Create a topic form.

   d. Select **Create**.

   The **Flow** tab appears with Start and End nodes. For an overview of this screen and its components, see Topic Flow tab.

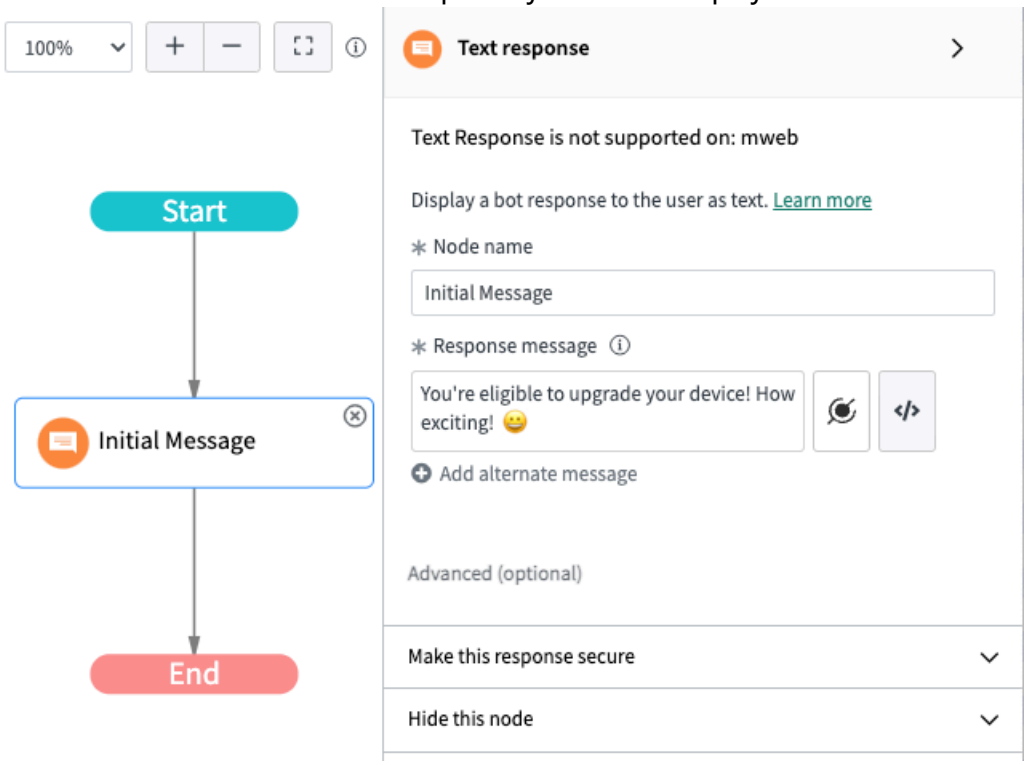
4. Create your initial message to greet the user.

   a. From the Components area, drag a Text bot response node onto the canvas.

   b. Select the node to view the properties palette.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. Enter a name for the node and the response you want to display to the user.



5. Ask the user if they want to proceed with the asset refresh.

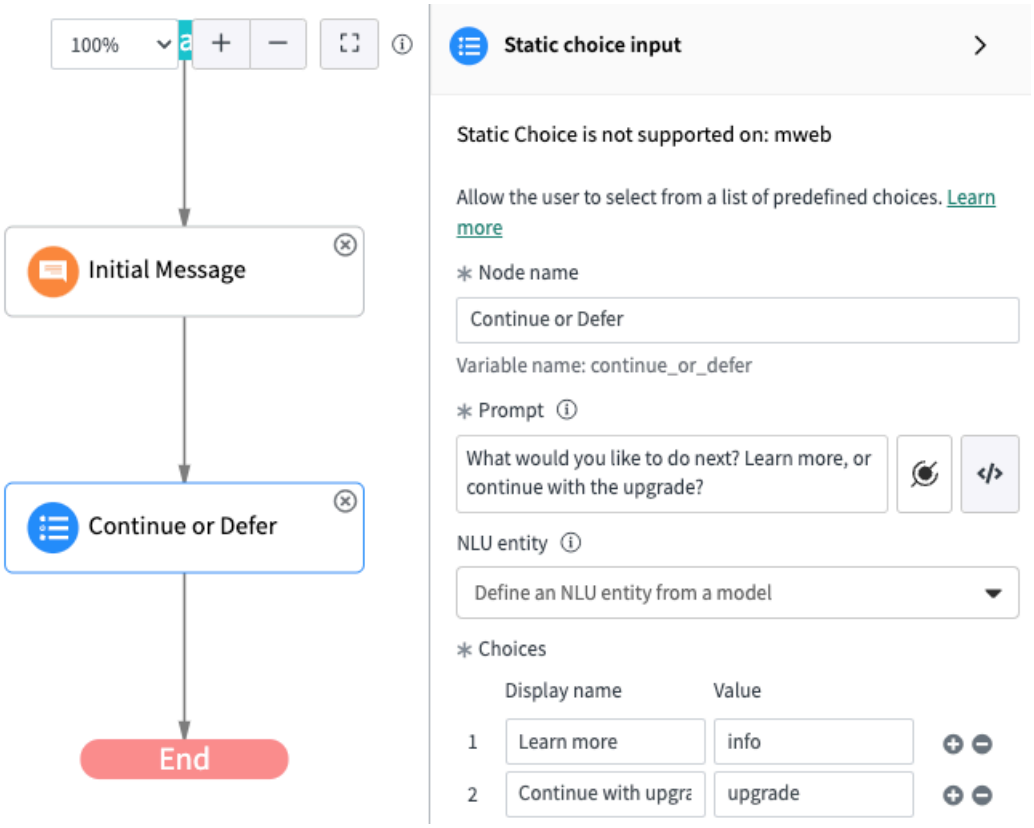
a. From the Components area, drag a Static choice input node onto the canvas.

b. In the properties palette, enter the following information:

- A unique name, such as `Continue or Defer`.
- A text prompt, such as `What would you like to do next? Learn more, or continue with the upgrade?`
- In the Choices area, provide a text prompt for each choice and a value for that choice, so you can refer to it later on.

  For example, your choices might be `Learn more` and `Continue with upgrade`. The values should make sense as variable names. For example, `info` and `upgrade`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




6. Add a Decision utility to handle the user's choice.

a. From the Components area, drag a Decision utility onto the canvas.


b. Select the plus icon to add a second branch.

c. Name each branch to correspond with the decisions (info and upgrade).

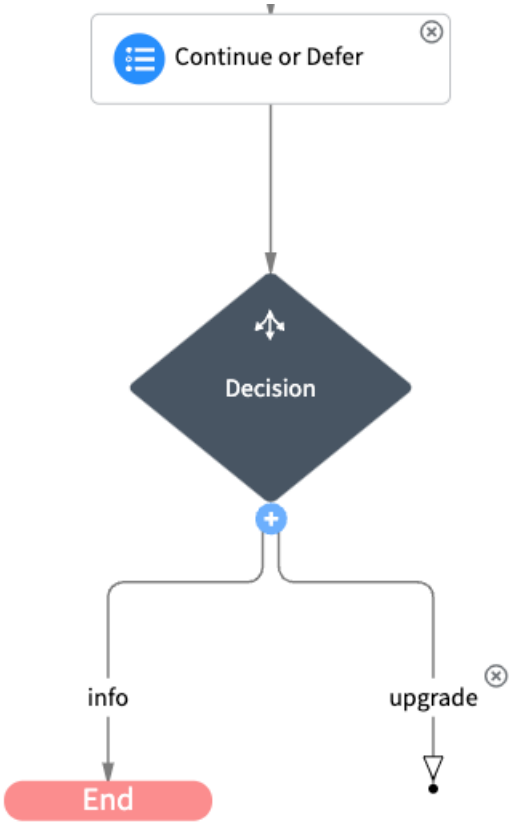© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



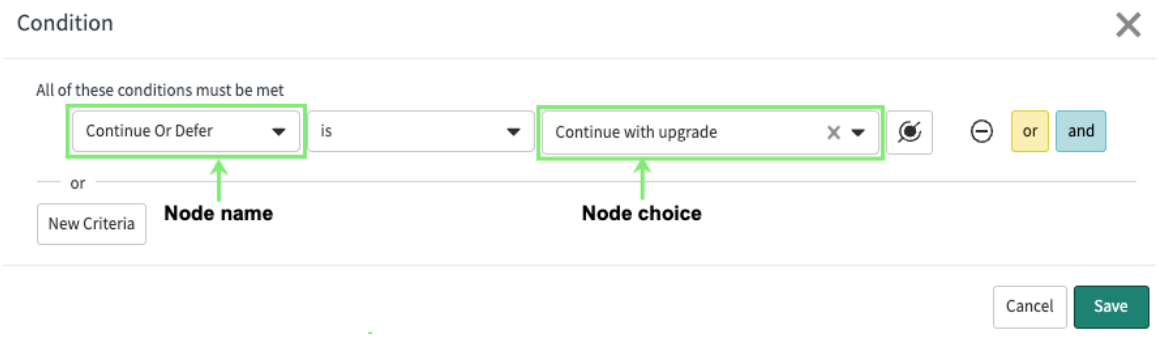
d. For each branch, select it and then use the Branch Condition area to indicate which option the branch will follow.



7. For the upgrade branch, add a Lookup utility node to confirm that the user still has the asset.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

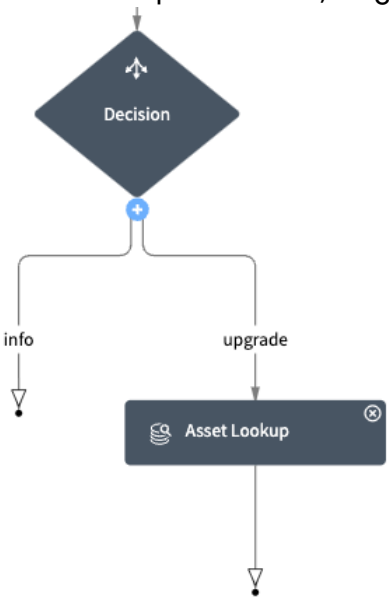
a. From the Components area, drag a Lookup utility onto the canvas.



b. In the properties palette, specify the following information:

- A unique name, such as `Asset Lookup`.
- The table name: **Asset [alm_asset]**
- In the Condition builder, select **Assigned to**, and then dot-walk to **Input Variables > User**. Select **and** to include **State > is > In maintenance**.

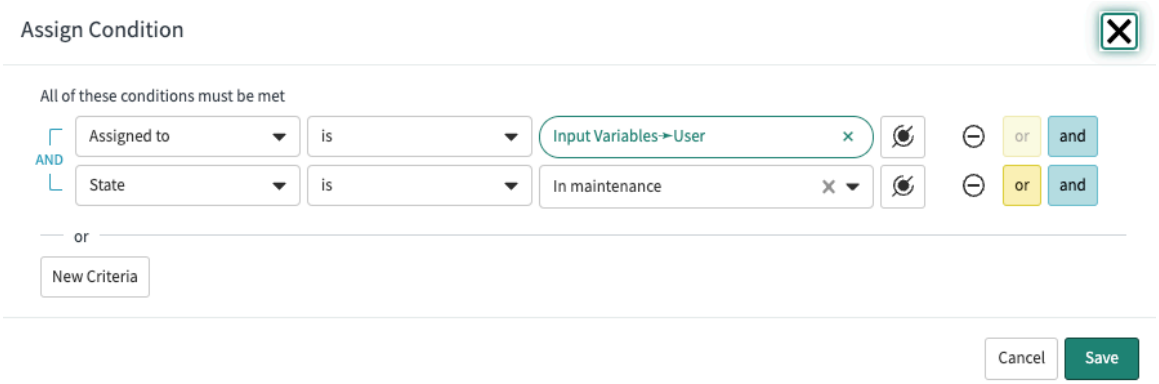  The asset state will tie into the notification you send the user for this asset refresh.




8. Ask the user if they still have the asset.

a. From the Components area, drag a Boolean input node onto the canvas.
The Boolean node automatically asks if you want to add a Decision utility with two paths. Select **Yes**. A Decision node appears in the flow with values of **true** and **false**. Both are already mapped to the Boolean node.

b. Add a user prompt.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

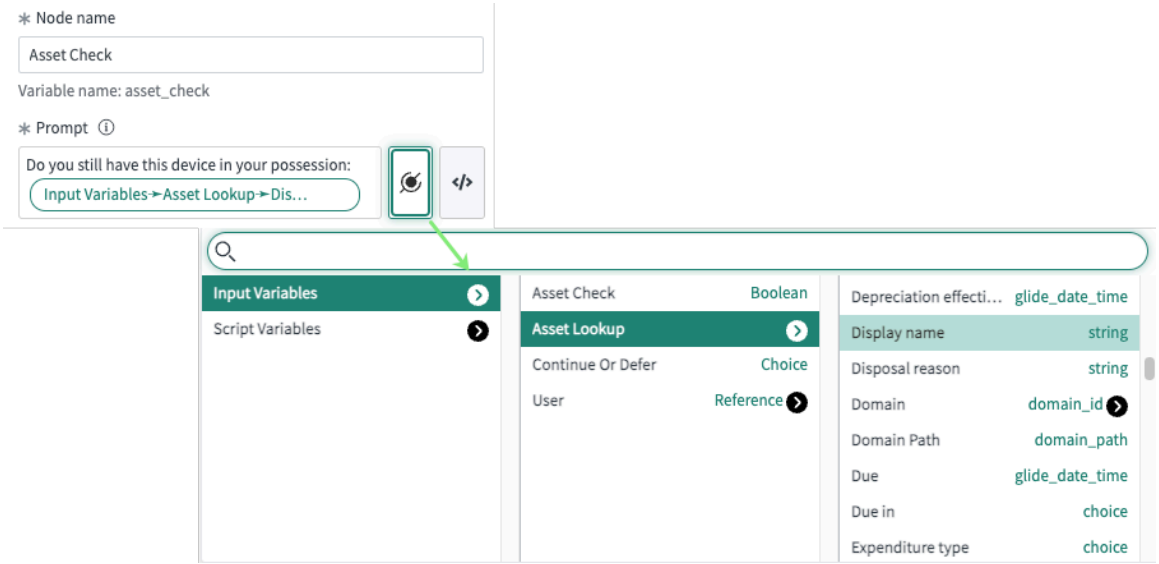Use dot-walking to refer to the asset found by the Asset Lookup node.



9. If the user still has the asset (the Boolean response is **true**), we want to search for it in the catalog.
   a. From the Components area, drag the Topic Block utility onto the Asset Check **true** branch on the canvas.
   b. In the properties palette, select **Search Catalog Item** for the Topic block.
   c. Under Input mapping, use dot-walking to specify the **query_term** parameter from the Asset Lookup node (Input Variables > Asset Lookup > Display name).

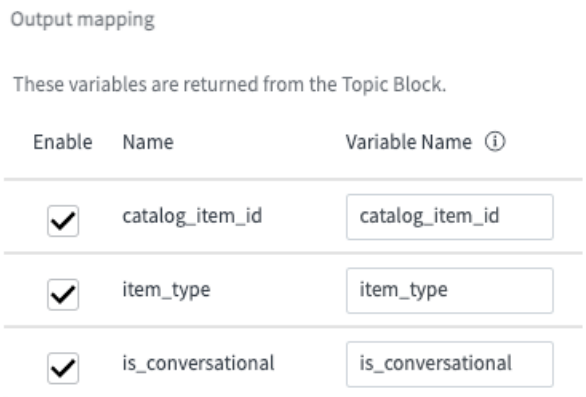
   The catalog search will provide these output variables by default, shown under Output mapping.



10. Request the upgraded item.
    a. From the Components area, drag the Topic Block utility onto the canvas beneath the Search Catalog Item topic block.
    b. In the properties palette, select **Request Catalog Item** for the Topic block.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

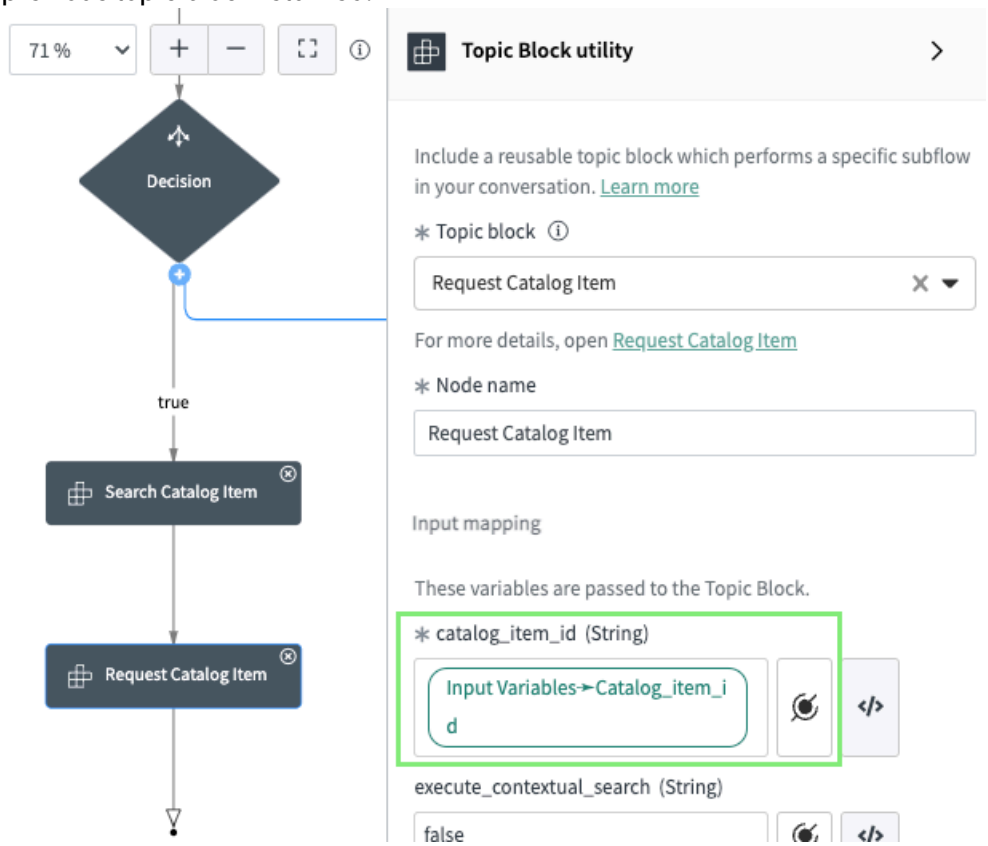c. In the Input mapping area, use dot-walking to specify the *catalog_item_id* that the previous topic block returned.




This topic block returns output variables as well. The user will be able to select variables for their new device, as well. You can configure these variables in Service Catalog.

11. Ask the user to confirm their choice of device.

a. From the Components area, drag the Card bot response node onto the canvas beneath the Request Catalog Item topic block.

b. In the properties palette, specify the following information:

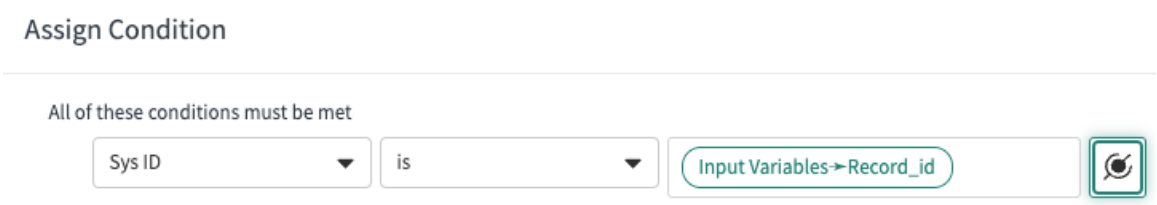- A unique name, such as `Device Request Record`.
- Card type: **Record**
- Populate this card by referencing: **Table**
- Table name: **Requested Item [sc_req_item]**
- In the Condition builder, add **Sys ID is Input Variables>Record_id**.




- In the **fields** area, select the record columns to display in the card to the user.

  For example, specify **Number**, **Short description**, and **Estimated delivery**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

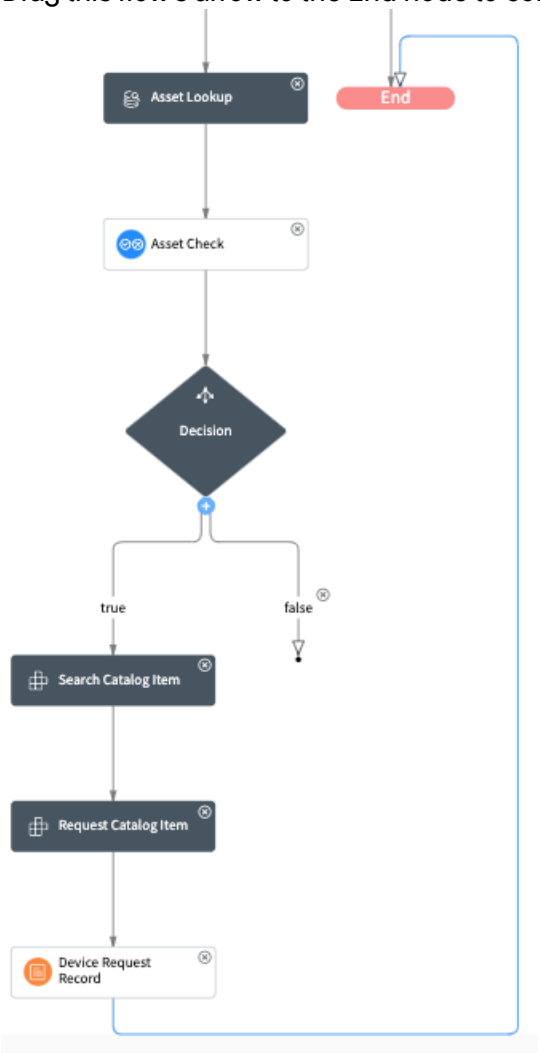12. Drag this flow's arrow to the End node to complete this part of the workflow.



13. Select **Save**.

What to do next

Create the Open Incident workflow in the Asset Refresh topic

Related topics

Maximizing code reuse with topic blocks

Create the Open Incident workflow in the Asset Refresh topic

Each Decision branch introduces additional workflows. After creating our main Asset Refresh workflow, we need to ensure that the user can get help if something goes wrong. In this example, we will help the user create an incident.

Before you begin

Create the Asset Refresh topic in Virtual Agent Designer

Role required: virtual_agent_admin or admin

Procedure

1. Open the Asset Refresh topic in Virtual Agent Designer.
2. Return to the **false** decision branch after the Asset Check Boolean question that you asked the user.

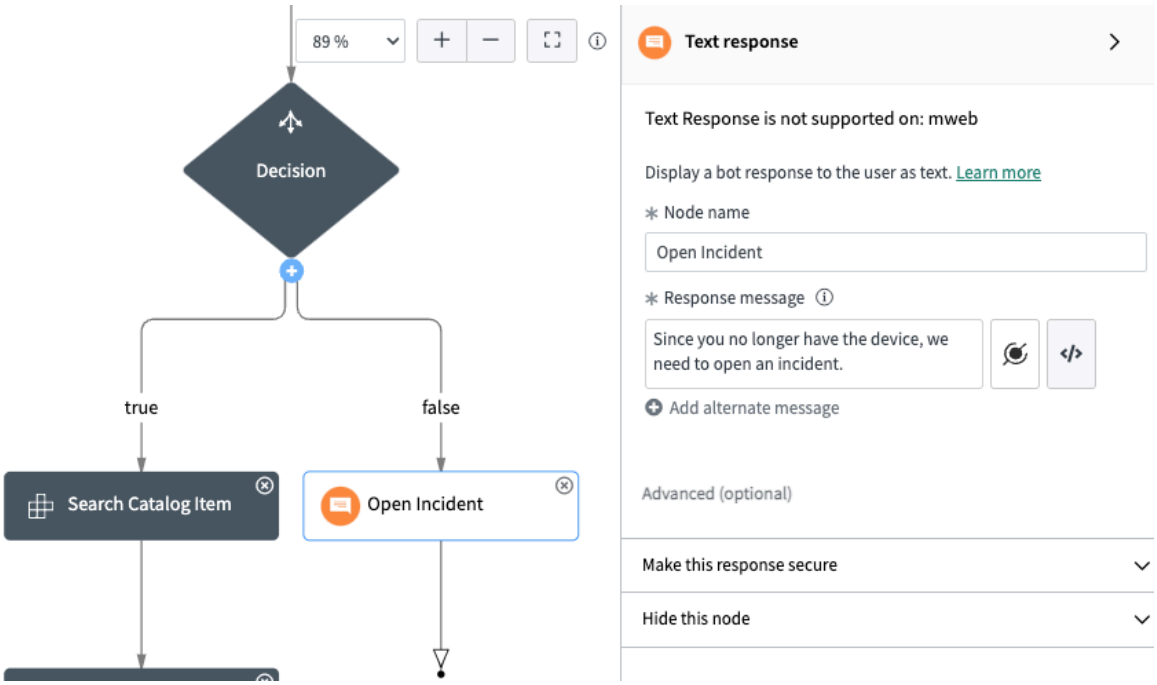
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. From the Components area, drag a Text bot response node onto the **false** branch on the canvas.

b. Select the node to view the properties palette.

c. Enter a name for the node and the response you want to display to the user.

For example, name the node `Open Incident`. For the **Response message**, type `Since you no longer have the device, we need to open an incident.`



3. Add a Topic Block utility to node to create the incident.

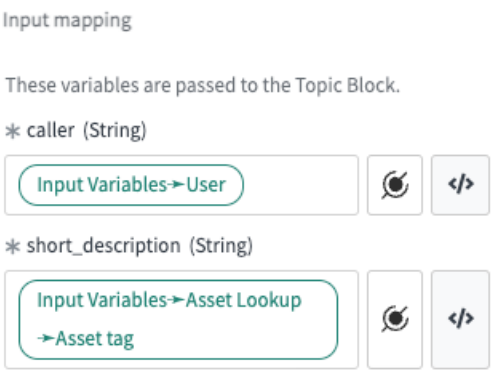
a. From the Components area, drag a Topic Block utility node onto the canvas.

b. In the properties palette, select **Create Incident** for the Topic block.


c. Under Input mapping, use dot-walking to specify the **caller** and **short_description** parameters.

- For the caller, specify Input Variables > User.
- For the short description, specify Input Variables > Asset Lookup > Asset tag.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



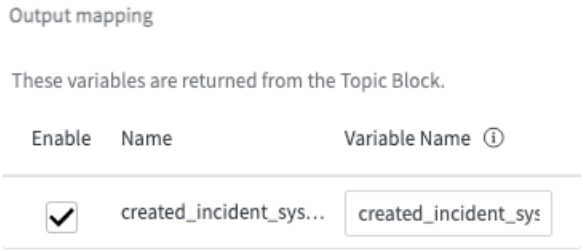d. Under Output mapping, make sure to enable the created_incident_sys_id variable.



4. Drag this flow's arrow to the End node to complete this part of the workflow.
5. Select **Save**.

What to do next

Create the More Information workflow in the Asset Refresh topic

Create the More Information workflow in the Asset Refresh topic

In our example, we must provide the workflow for the "more information" Decision branch. If the user wants to learn more before upgrading, we can point them to a specific KB article explaining how your organization's policy works.

Before you begin

- Create the Asset Refresh topic in Virtual Agent Designer
- Create the Open Incident workflow in the Asset Refresh topic

Role required: virtual_agent_admin or admin

Procedure

1. Open the Asset Refresh topic in Virtual Agent Designer.
2. Return to the **info** decision branch after the Continue or Defer static choice node where you first prompted the user to continue or get more information.

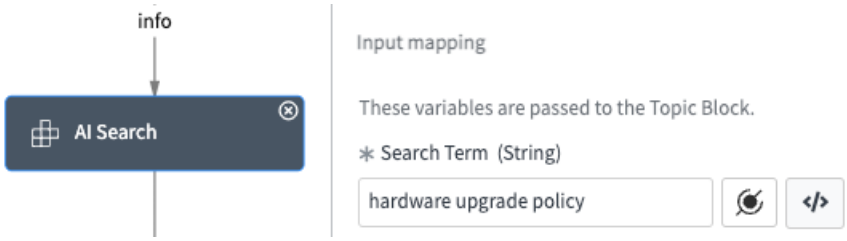
   a. From the Components area, drag a Topic Block utility node onto the canvas.

   b. In the properties palette, select **AI Search** for the Topic block.

   c. Under Input mapping, specify the search term.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For example, enter `hardware upgrade policy`.




3. Show the results of the search to the user.

a. From the Components area, drag a Card bot response node onto the canvas.

b. In the properties palette, specify the following information:

- A unique name, such as `Upgrade KB Articles`.
- Card type: **Record**
- Populate this card by referencing: **Table**
- Table name: **Knowledge Article [sn_km_mr_st_kb_knowledge]**
- In the Condition builder, restrict the results to specific internal KB numbers that describe the policy, such as **Number is KB000000456**.



- In the **fields** area, select **Content** for a single KB article, or **Short description** if multiple records are returned.

4. Once the user has read the KB article, give them the option to continue with the upgrade.

a. From the Components area, drag a Static choice input node onto the canvas.

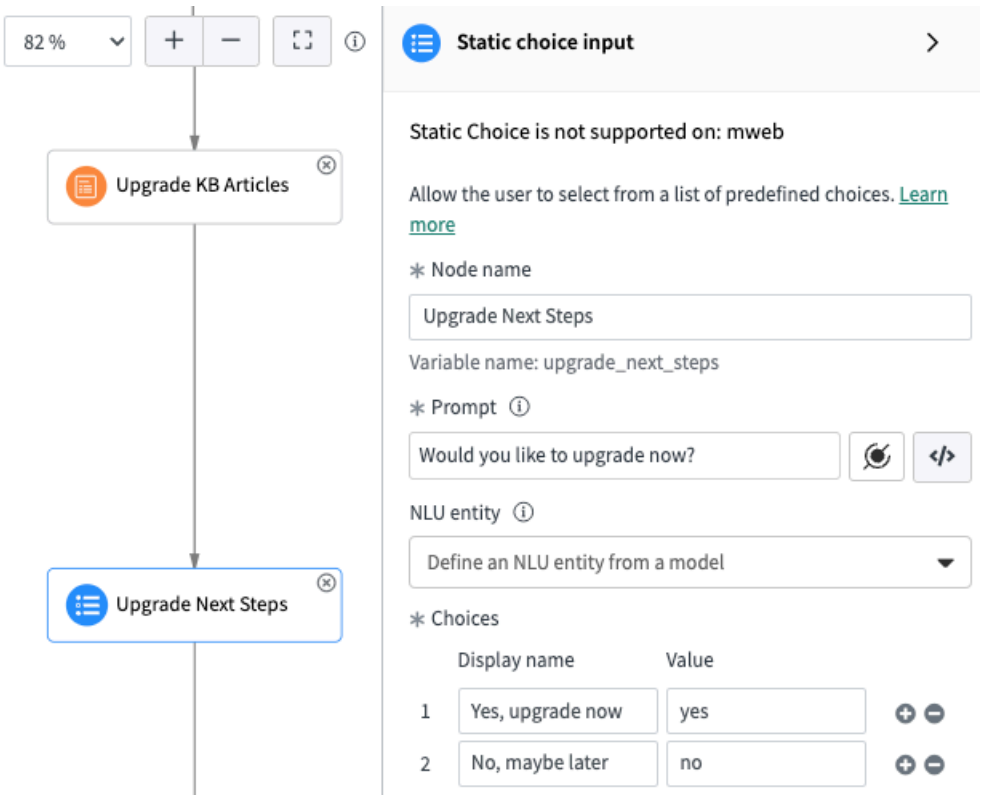
b. In the properties palette, enter the following information:

- A unique name, such as `Upgrade Next Steps`.
- A text prompt, such as `Would you like to upgrade now?`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- In the Choices area, provide a text prompt for each choice and a value for that choice, so you can refer to it later on.

  For example, your choices might be `Yes, upgrade now` and `No, maybe later`. The values should make sense as variable names. For example, `yes` and `no`.




5. Add a Decision utility to handle the user's choice.

a. From the Components area, drag a Decision utility onto the canvas.

b. Select the plus icon to add a second branch.

c. Name each branch to correspond with the static choice node decisions (yes and no).

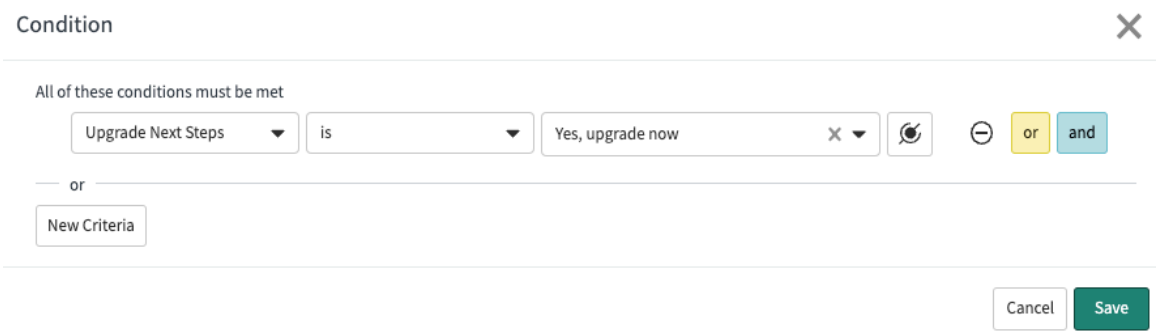
d. For each branch, select it and then use the Branch Condition area to indicate which option the branch will follow.



e. Drag the `no` flow's arrow to the End node to complete this part of the workflow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

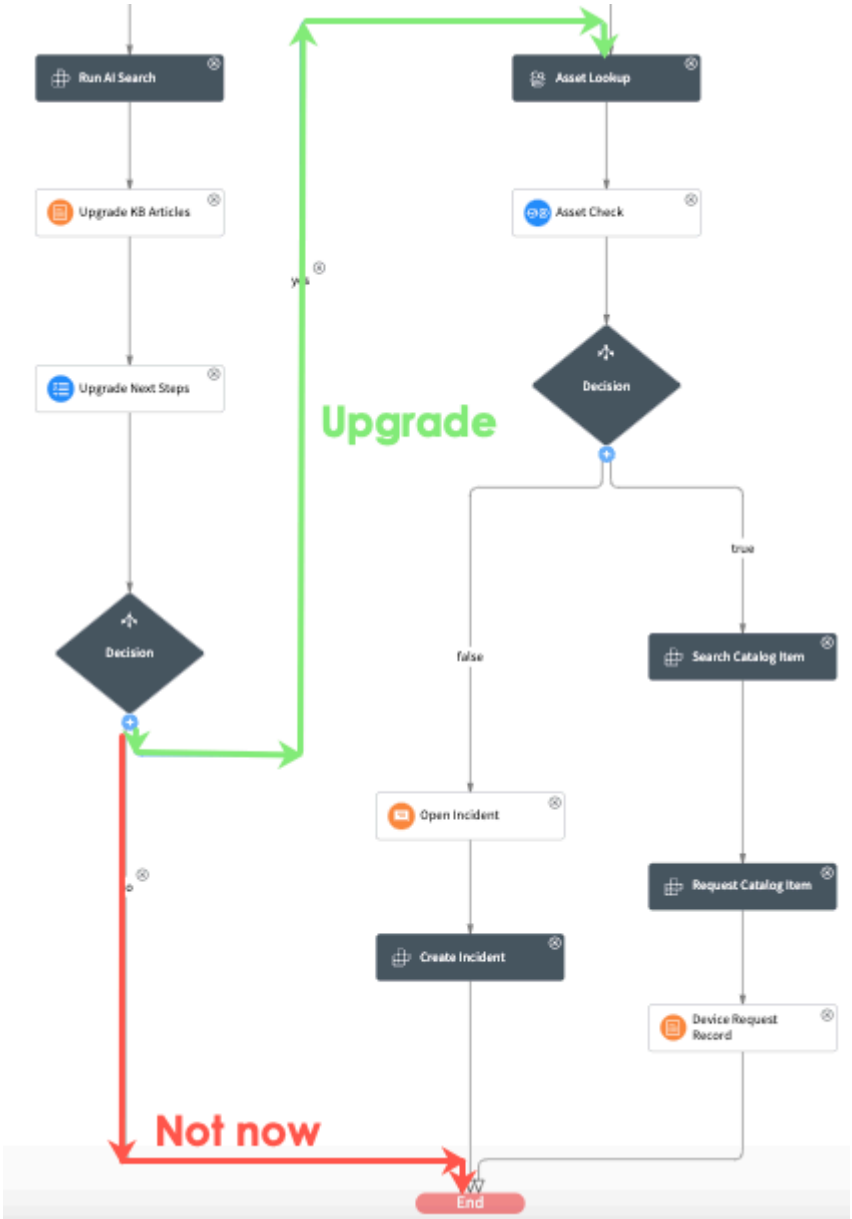f. Drag the yes flow's arrow to the Asset Lookup node to bring the user to the upgrade workflow.



6. Select **Save**.

Result

Your topic is ready to test. Test the topic, making sure you go through each possible workflow in the conversation and make any needed adjustments.

For more information about testing topics, see Testing NLU/Keyword topics. If you're using NLU discovery, add utterances to the intent and train and test your NLU model.

When you're finished, publish the topic.

What to do next

Create the notification for the Asset Refresh topic

Related topics

Improving the user experience with AI Search

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create the notification for the Asset Refresh topic

Create an actionable notification to trigger the Asset Refresh Virtual Agent example topic you just created. The user will automatically receive the notification when it's time for them to order a new hardware asset.

Before you begin

Publish the Asset Refresh topic. Change the application scope in your instance to the same application you used to create your Asset Refresh topic. Ideally, the notification should be in the same application scope as your Virtual Agent topic.

Role required: virtual_agent_admin or admin

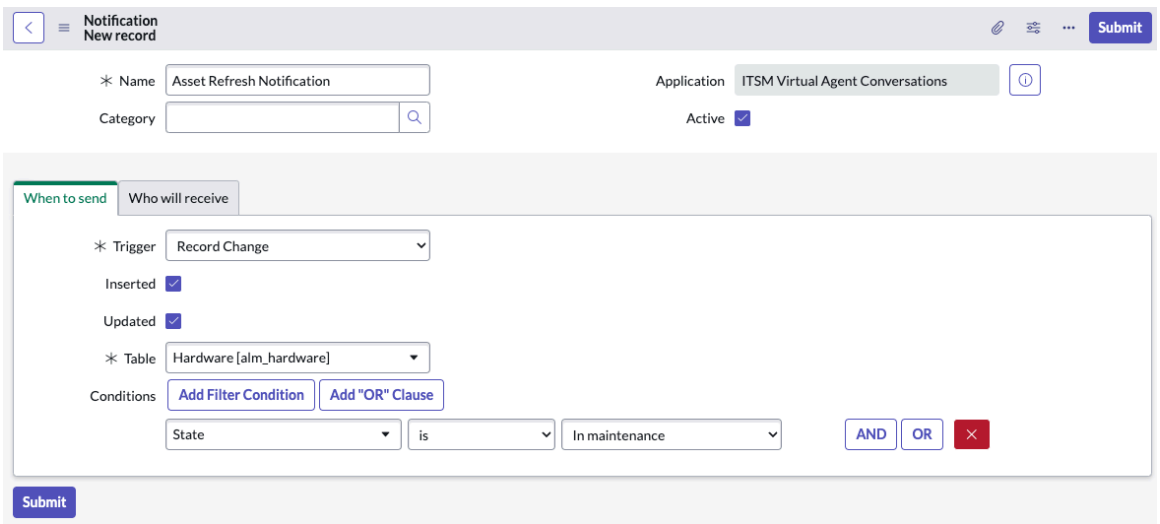
About this task

The ServiceNow AI Platform and ITSM Virtual Agent Conversations come with pre-built actionable notifications, and you can also create your own. For more information, see Notifications.

Tip:
On the Notifications page, you can view only the actionable notifications that come with ITSM Virtual Agent Conversations by filtering the list on **Application is ITSM Virtual Agent Conversations**.

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications**.
2. Select **New**.
3. In the **Name** field, provide a unique name, such as `Asset Refresh Notification`.
4. On the **When to send** tab, specify the trigger that will send the notification.
   a. For the Trigger, specify **Record Change**.
   b. For the Table, specify the **Hardware [alm_hardware]**.
   c. For the Conditions, specify **State > is > In maintenance**.
   When assets in the hardware table are available for refresh, they're moved to the *`In maintenance`* state on this example instance. You can specify filter conditions based on the business rules for your instance.




5. Select the **Who will receive** tab to configure the recipient of the notification.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Select the lock icon next to **Recipients listed in fields**.

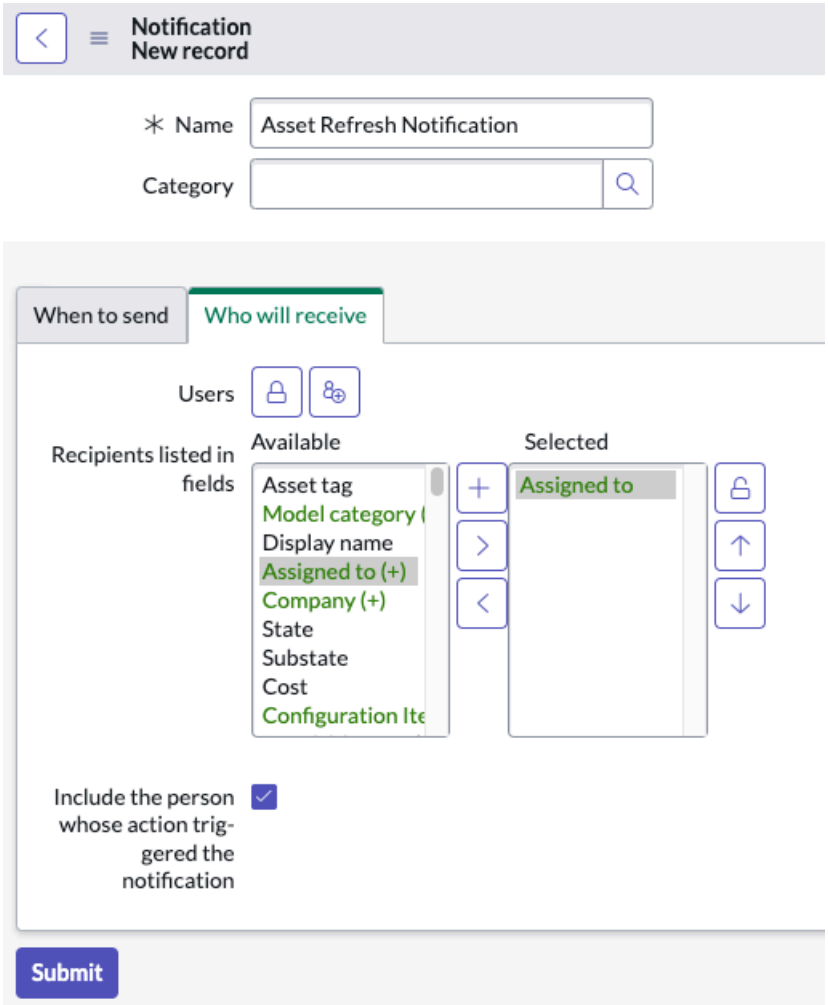b. In the **Available** list, select **Assigned to**, and then select the right arrow icon to move it to the **Selected** column.



6. Select **Submit**.

What to do next

Associate content with the Asset Refresh notification

Related topics

ITSM Virtual Agent pre-built actionable notifications

Associate content with the Asset Refresh notification

After creating the actionable notification for the Asset Refresh topic, go back into the notification and add content. This links the notification with the Virtual Agent topic that you created.

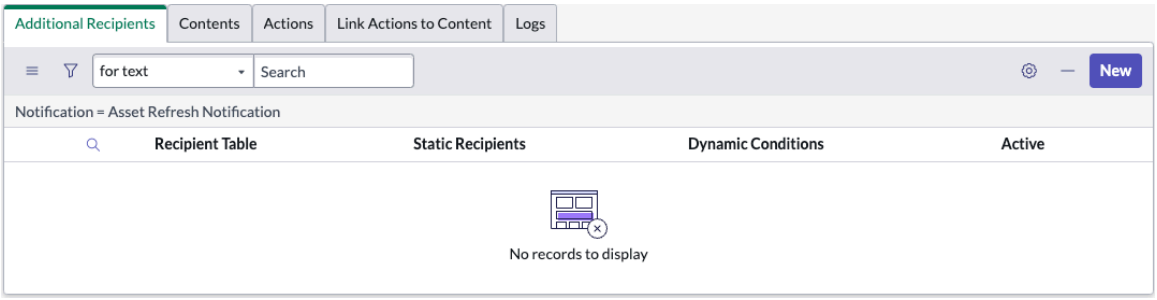
Before you begin

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications**.
2. Select the Asset Refresh Notification to open the record.
   New fields for content are available in the record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



3. Select the **Contents** tab and create the content for the notification.

   a. Select **New Provider Content**.

   b. When prompted for the type of notification content, select **Virtual Agent Content - Chat**.


   c. On the form, fill in the fields.

Notification Content - Virtual Agent form

Field	Description
Name	Unique name for the content. For example, enter `Asset Refresh Notification Content`.
Notification	By default, **Asset Refresh Notification**.
Format tab	
Type	Select **Simple**.
Table	Specify **Hardware [alm_hardware]**.
Message tab	
Advanced	Leave this option unselected.
Message heading	A suitable heading for the notification, such as `Upgrade your device`.
Message	The contents of your message letting the user know that it's time for them to upgrade. You can customize the message using variables in the record for a more personal touch.
Channels tab	
Delivery channels	Select **mweb**, which is the default channel for Virtual Agent. You can configure other channels to run Virtual Agent as well. For more information, see Integrating Virtual Agent with other channels.

   d. Select **Submit**.

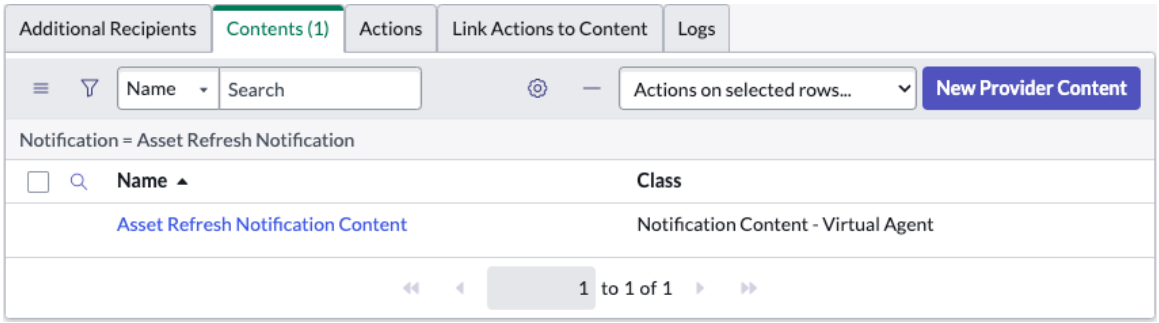© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



4. On the Asset Refresh Notification record, select the **Actions** tab and create the action.

   a. Select **New Provider Action**.


   b. When prompted for the type of notification action, select **Virtual Agent**.

   c. On the form, fill in the fields.

Notification Action - Virtual Agent form

Field	Description
Name	Unique name for this action. For example, enter `Asset Refresh Notification Action`.
Notification	By default, **Asset Refresh Notification**.
Active	Ensure this option is selected.
Topic	The name of the published Asset Refresh Virtual Agent topic you created in previous steps.

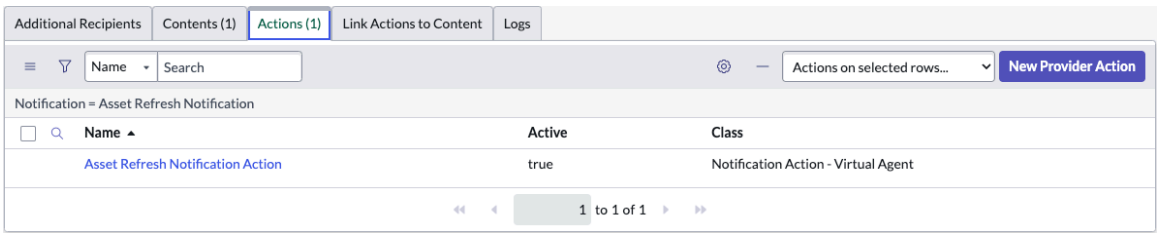   d. Select **Submit**.



5. On the Asset Refresh Notification record, select the **Link Actions to Content** tab to map the actions to the content.

   a. Select **New**.


   b. On the form, fill in the fields.

Actionable Content form

Field	Description
Name	Unique name for the actionable content. For example, enter `Asset Refresh Actionable Content`.
Notification	By default, **Asset Refresh Notification**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Actions	Select the lock icon , and then type in the search field or select the search icon to locate the action you created on the **Actions** tab in the previous step.
Content	The name of the Asset Refresh provider content record you created on the **Contents** tab in a previous step.
Disable skip	Leave this option unselected.
Active	Leave this option selected.

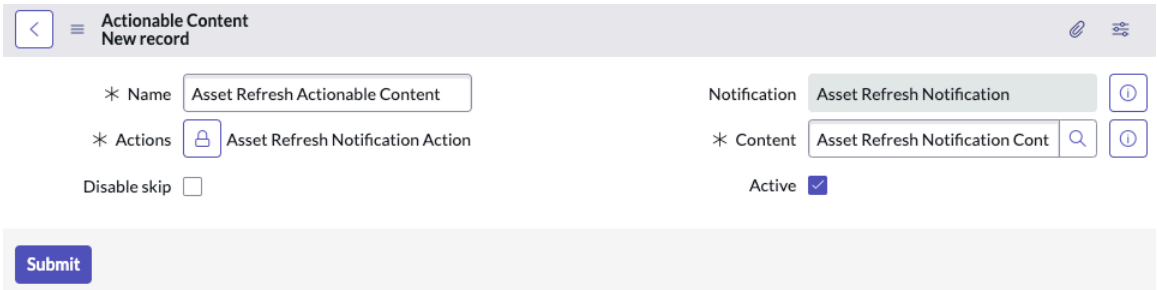

c. Select **Submit**.

Configuring Virtual Agent

Configure the Virtual Agent features, components, and integrations that you need to provide support to your employees, IT teams, and customers.

Use the Conversational Interfaces Console to activate and configure Virtual Agent. Some of the general settings in the console are shared with other applications, such as Agent Chat.

General chat settings

I want to...	See these topics
Chat Client Display Options	
Brand my bot	Branding your chat client
Preview new or unread messages in a minimized chat window	Enable message preview on the chat widget
Conversation Routing	
Configure my bot to run in third-party messaging apps	Integrating Virtual Agent with messaging apps.
Create pre-chat surveys	Define pre-chat survey configurations
Create and use context variables to store chat-related information	Configure context variables for storing chat-related information
Display or announce callback options to users through other ServiceNow apps	Omnichannel Callback
Configure topic context intents	Define topic context intent configurations

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

General chat settings (continued)

I want to...	See these topics
System Actions	
Modify system chat messages	Change Virtual Agent and Agent Chat system messages
Specify how links open from the chat window	URL navigation in Conversational Interfaces
Configure my bot to detect sensitive data	Configuring Sensitive Data Handler
Send email summaries of unread messages to users when they are inactive	Sending missed chat activity emails

Virtual Agent settings

I want to...	See these topics
Get recommendations for Virtual Agent topics based on my data	Quick start for Topic Recommendations
Configure performance tracking for Virtual Agent topics	Create deflection configurations and patterns
Use Natural Language Understanding (NLU) for topic discovery	Configure Natural Language Understanding in Virtual Agent Creating models (using NLU Workbench)
Create custom greetings and setup topics	Configure a Virtual Agent chat experience
Determine which issues are routed to Virtual Agent first	Configure and run an Issue Auto Resolution simulation
Send notifications to users in Virtual Agent	Configuring Virtual Agent notifications Enable Virtual Agent notifications
Use AI Search to return fallback results for Virtual Agent	Improving the user experience with AI Search
Detect and dynamically translate Virtual Agent topics into a different language	

Virtual Agent security

Platform hardening for your instance is leveraged by Virtual Agent, so you should follow the overall platform hardening recommendations. For details, see Secure your instance.

Activate Virtual Agent

You can activate the Glide Virtual Agent plugin (com.glide.cs.chatbot) if you have the admin role. This plugin automatically activates other necessary plugins if they are not already active.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin

About this task
You must have a subscription for Virtual Agent before you can activate the Glide Virtual Agent plugin.

Plugins automatically installed with Glide Virtual Agent

Plugin	Description
Conversational Analytics [com.sn.conversational.analytics]	Enables the ServiceNow Conversational Analytics app. **Note:** Subsequent updates for the Conversational Analytics app must be installed from the ServiceNow Store.
Integration - Multiple Provider Single Sign-On Installer [com.snc.integration.sso.multi.installer]	Enables authentication for multiple identity providers (IDPs) using SAML or OpenID connect(OIDC).
Localization Framework Installer [com.glide.localization_framework.installer]	Provides the framework for localization of Virtual Agent conversations.
NLU Model for Virtual Agent Setup Topics [com.glide.cs.nlu.topics]	Installs the NLU model for Virtual Agent Setup topics.
Proxy Agent to the ServiceNow Natural Language Understanding Server [com.glide.nlu.intent.discovery]	Activates the connection to the ServiceNow NLU server for NLU intent discovery. Used by Virtual Agent and other clients. Activates: • NLU Workbench - Core [com.glide.nlu] • Predictive Intelligence [com.glide.platform_ml] • Proxy agent for connecting to NLU providers [com.glide.nlu.proxy] - Proxy agent for connecting to NLU providers
Proxy Agent to the IBM Watson Natural Language Understanding server [com.glide.nlu.ibmwatson.intent.discovery]	Activates the IBM Watson Assistant Intent and Entity integration, which enables Virtual Agent to use intents, entities, and utterances defined in IBM Watson Assistant.
Proxy Agent to the Microsoft LUIS Natural Language Understanding server [com.glide.nlu.msluis.intent.discovery]	Activates the Microsoft LUIS integration, which enables Virtual Agent to use intents, entities, and utterances defined in the Microsoft Language Understanding Intelligent Service (LUIS).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Plugins automatically installed with Glide Virtual Agent (continued)

Plugin	Description
Proxy Agent to the Google Dialogflow ES Natural Language Understanding server [com.glide.nlu.googledialogflow.es.intent.discovery]	Activates the Google Dialogflow ES integration, which enables Virtual Agent to use intents, entities, and utterances defined in Google Dialogflow ES.
Topic Recommendations [com.snc.va_topic_recommender]	Enables the ServiceNow Topic Recommendations app. **Note:** Subsequent updates for the Topic Recommendations app must be installed from the ServiceNow Store.
Virtual Agent integration with actionable notifications com.glide.cs.actionable.notification	Enables ServiceNow actionable notifications on Virtual Agent channels.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Glide Virtual Agent plugin (com.glide.cs.chatbot) using the filter criteria and search bar.

   You can search for the plugin by its name or ID. If you cannot find a plugin, you might have to request it from ServiceNow personnel. For more information, see Request a plugin.
3. Select **Install**, and then in the Activate Plugin dialog box, select **Activate**.

Note:
When domain separation and delegated admin are enabled in an instance, the administrative user must be in the **global** domain. Otherwise, the following error appears: `Application installation is unavailable because another operation is running: Plugin Activation for <plugin name>.`

What to do next

Activate additional Virtual Agent plugins for related features, such as the plugins for predefined Virtual Agent topics.

Installed with Virtual Agent

Various types of components are installed with activation of the Glide Virtual Agent [com.glide.cs.chatbot] plugin, including tables and user roles.

Note:
The Application Files table lists the components that are installed with this application. For instructions on how to access this table, see Find components installed with an application.

Roles installed

With the Virtual Agent Administrator [virtual_agent_admin] role, users can create and manage topics (bot conversations), using Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- If using Natural Language Understanding, the NLU admin role is included.
- If the Virtual Agent admin is granted access to AI Search-related tables, the search application administrator role [search_application_admin] is included.
- If the Virtual Agent admin is granted access to Entity View Action Mapper tables, the EVAM admin role [evam_admin] is included.
- For multilanguage support, the localization_requestor role is included by default. For more information, see Localization Framework roles .
- For more information on the roles contained in virtual_agent_admin, see Virtual Agent roles.

Users installed

The Glide Conversation Server plugin (com.glide.cs) automatically installs a virtual agent user (virtual.agent) in the User [sys_user] table. Ongoing Virtual Agent interactions are assigned to this virtual agent user. If you're using Advanced Work Assignment (AWA), interactions assigned to the virtual agent user are not routed by AWA. The virtual agent user is also used in the default web chat branding settings to associate a virtual agent user profile with a bot avatar.

Tables installed

Table	Description
Adapter Configurations [sys_cs_adapter_configuration]	Stores records for default keywords, labels, and message values for third-party messaging integrations.
Adapter Configuration Page [sys_cs_adapter_configuration_page]	Stores the configuration for third-party messaging integrations. This table is the root table for: • Configurations - Slack Integration [sys_cs_adapter_configuration_page_slack] • Configurations - Teams Integration [sys_cs_adapter_configuration_page_teams] • Configurations - Workplace Integration [sys_cs_adapter_configuration_page_workplace] • Configurations - Facebook Messenger Integration [sys_cs_adapter_configuration_page_messenger]
Adapter Message [sys_cs_adapter_message]	Stores adapter messages.
Brandings [sys_cs_branding_setup]	Stores different branding configurations for the web-based chat client used in an instance.
Client Adapter [sys_cs_client_adapter]	Stores each adapter state.
Consumer Channel	Stores consumer channel information.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
[sys_cs_consumer_channel]	
Consumer Device Context [sys_cs_consumer_device_context]	Stores consumer device context information.
Context Topics [sys_cs_context_topic]	Stores different configurations for determining the appropriate conversation topic displayed to end users based on their pre-chat survey answers.
Conversation [sys_cs_conversation]	Stores a record for each conversation on the instance. Each record includes the Conversation Task [sys_cs_conversation_task] and Conversation Message [sys_cs_message] related lists, which show all the topics run and associated messages presented in the conversation.
Conversation Consumer [sys_cs_consumer]	Stores a record representing the user in a conversation, and references the associated sys_user record for that user.
Conversation Server Field Script Validators [sys_cs_field_script_validator]	Stores text format validation rules and default error messages. Read-only.
Custom Controls [sys_cs_custom_control]	Identifies custom controls.
Custom Control Definitions [sys_cs_custom_control_definition]	Binds a client type (for example, web or mobile) to a custom control.
Conversation Media [sys_cs_media]	Media attached to conversations are stored in sys_attachment, and associated to this table.
Conversation Message [sys_cs_message]	Stores a record for each message in a conversation. Shows the messages displayed for each topic in the conversation flow.
Conversation Server Connect Hand-off [sys_cs_connect_handoff]	Stores mapping of Virtual Agent conversations and Connect/Workspace conversations.
Conversation Session [sys_cs_session]	Stores a record for each conversation.
Conversation Task [sys_cs_conversation_task]	Stores a record for each conversation task. Each record shows the conversation flow, which can include multiple topics that are run during the conversation.
Conversation Task FDIH Invocations	Tracks the state of a call to a Workflow Studio action or subflow in a conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
[sys_cs_fdih_invocation]	
Conversation Vendor [sys_cs_vendor]	Stores vendor information.
CS Consumer Account [sys_cs_consumer_account]	Stores third-party user information.
Custom Greetings and Setup [sys_cs_context_profile]	Stores a profile record for context-driven chat experiences. Contains customizations in the following child tables: • Setup topics [sys_cs_context_profile_topic] - Stores the setup topics used for each setup topic type. • Promoted topics [sys_cs_context_profile_promotion] - Stores the topics that are highlighted in the Virtual Agent client. • Search Profiles [sys_cs_context_profile_search] - Stores the AI search profile for the associated chat experience.
Custom Controls [sys_cs_custom_control]	Stores the custom input and response controls.
Custom Control Definitions [sys_cs_custom_control_definition]	Binds a client type (for example web chat client) to a custom control. Stores the channel, domain, and user interface component defined for a custom control.
General Settings [sys_cs_general_settings]	Stores the records for the NLU configuration.
Live Agent Setup [sys_cs_live_agent_setup]	Stores the Live Agent setup with queue information.
Live Agent Support Queue Cache [sys_cs_support_queue_cache]	The database cache used for support queue wait times.
Open NLU Drivers [open_nlu_driver]	Stores the records of the NLU service providers used in the instance. Identifies the base system NLU provider and other services installed, such as IBM Watson NLU.
Open NLU Driver Http Connections [open_nlu_driver_http_connection]	Stores all the HTTP connection references for the NLU service provider.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
Open NLU Driver Languages [open_nlu_driver_language]	Lists the language codes for the NLU service providers (ServiceNow NLU, IBM Watson Assistant, and MS LUIS). Identifies the driver codes and associated languages.
Open NLU Predict Entity Feedbacks [open_nlu_predict_entity_feedback]	Stores the disposition taken by an application in response to an NLU entity prediction result. For example, in Virtual Agent the goal is to map a predicted NLU entity to an input variable in a Virtual Agent topic.
Open NLU Predict Intent Feedbacks [open_nlu_predict_intent_feedback]	Stores the disposition taken by an application in response to an NLU intent prediction result. For example, in Virtual Agent the goal is to map a predicted NLU intent to a Virtual Agent topic.
Published Topic [sys_cb_design_topic]	Stores design topic definitions and references the runtime topic.
Session Binding [sys_cs_session_binding]	Stores session binding and AMB channel information.
Configurations - Slack Integration [sys_cs_adapter_configuration_page_slack]	Extends the sys_cs_adapter_configuration_page table. Stores the configuration for the Slack messaging application.
Configurations - Facebook Messenger Integration [sys_cs_adapter_configuration_page_messenger]	Extends the sys_cs_adapter_configuration page table. Stores the configuration for the Facebook Messenger messaging application.
Teams Adapter Configuration Page [sys_cs_adapter_configuration_page_teams]	Extends the sys_cs_adapter_configuration_page table. Stores the adapter configuration for the Microsoft Teams messaging application.
Workplace Adapter Configuration Page [sys_cs_adapter_configuration_page_workplace]	Extends the sys_cs_adapter_configuration_page table. Stores the adapter configuration for the Workplace messaging application.
Vendor Client Adapter Configuration [sys_cs_vendor_client_adapter_configuration]	Stores the adapter configuration for third-party messaging applications.
Topic [sys_cb_topic]	Stores a record for each topic (design-time definition).
Topic [sys_cs_topic]	Stores an instance of a topic from sys_cb_topic at run time. Records on this table are cleaned every 12 hours.
Topic Category [sys_cb_topic_category]	Stores all the categories that identify the different types of topics, such as setup topics

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
	and small talk topics. Also includes custom categories defined by admins.
Topic Library Usages [sys_cs_topic_library_usage]	Stores references to published topic blocks.
Vendor Context Configuration [sys_cs_vendor_context_configuration]	Stores vendor-specific device context information.
Virtual Agent Context [sys_cs_virtual_agent_context]	Stores Virtual Agent context variables.

Properties installed

Property	Description
com.glide.cs.branding.msg_delay	Minimum delay between bot messages
com.glide.cs.branding.type_presence_delay	Minimum delay before displaying typing animation
com.glide.cs.conversation_faulted_reason	Message that displays the following default message when a conversation has faulted: `It seems that you have left the conversation.`
com.glide.cs.general.error_message	Generic error message
com.glide.cs.general.live_agent_handoff_error_message	Error message when no live agent has been set up
com.glide.cs.general.live_agent_handoff_message	Message to display when handing over to a live agent
com.glide.cs.general.support_email	General support email
com.glide.cs.general.support_hours	General support hours
com.glide.cs.general.support_phone	General support phone
com.glide.cs.global_configuration	The sys_id of the default configuration page (sys_cs_configuration_page)
com.glide.cs.javascript.reserved_words	Reserved words in JavaScript that should not be used as vaInputs names or vaVars names
com.glide.cs.live_agent_queue	The chat queue that users transfer to when a conversation transitions from a virtual agent to a live agent. This default queue is used unless the topic specifies a specific queue to use.
com.glide.cs.suggest.minimum_characters	The minimum number of characters the user must enter in a keyword search before partial matching, phonetic matching, and spellcheck begin to function.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
com.glide.cs.suggest.enable_partial_search	Enables partial matching searches on topic searches when set to true.
com.glide.cs.suggest.enable_phonetic_search	Enables phonetic searching on topic searches when set to true.
com.glide.cs.suggest.enable_spell_check	Enables alternate search spellings on topic searches when set to true.

Additional plugins for Virtual Agent

After activating Virtual Agent, you can activate additional plugins to enable other features for conversation design.

You must have the admin role to activate these additional plugins. For details, see Activate a plugin.

Plugin	Description
• Human Resources Service Delivery: HR Service Delivery Virtual Agent Conversations [sn_hr_va] available through the ServiceNow Store • ITSM Virtual Agent conversations [sn_itsm_va] available through the ServiceNow Store • CSM Virtual Agent conversations [com.sn_csm.virtualagent]	Enables predefined Virtual Agent conversations, reusable topic blocks, and prebuilt ServiceNow NLU models for the Customer Service Management, HR Service Delivery, and IT Service Management applications. • Requires the Glide Virtual Agent (com.glide.cs.chatbot) plugin to be activated. • Automatically activates the NLU Workbench (com.snc.nlu_studio) plugin. • Automatically activates the Service Management Virtual Agent Topic Blocks (com.glideapp.cs.sm_topic_blocks) plugin. Includes common topic blocks such as contextual search.
NLU Workbench [com.snc.nlu_studio]	Enables the creation of custom ServiceNow Natural Language Understanding (NLU) models used by Virtual Agent.
NLU Workbench - Advanced Features [com.snc.nlu.workbench.advanced]	Expands the functionality of NLU Workbench by providing conflict review, batch testing, and model performance features. Available from the ServiceNow® Store.
Conversational Analytics Dashboard [com.sn.conversational.analytics]	Provides insights into user interactions so you can see how well Virtual Agent understood and resolved user issues.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Prebuilt Virtual Agent topics, topic blocks, and ServiceNow NLU models

Prebuilt Virtual Agent conversations (topics), reusable topic blocks, and ServiceNow NLU models are available for the Virtual Agent platform and various business applications, such as Customer Service Management, HR Service Delivery, IT Service Management, and more.

These pre-defined conversations help users with common self-service tasks in each business area, such as creating or updating cases or providing answers to frequently asked questions. Prebuilt topic blocks are reusable components (similar to subflows) that perform a specific function or task and can be added to a conversation topic. Prebuilt NLU models define the business-specific language understanding needed for Virtual Agent to understand and process user requests. Each NLU intent in a model maps to a single Virtual Agent conversation topic.

Summaries of prebuilt topics and topic blocks

For more information on the Virtual Agent prebuilt topics and topic blocks provided by various ServiceNow applications, refer to the documentation for those applications. For example, the CSM, HRSD, and ITSM applications provide information on their prebuilt topics in the following sections:

Predefined topics and topic blocks	Activated by
Customer Service Virtual Agent conversations	com.sn_csm.virtualagent
Human Resources Virtual Agent conversations	Request the HR Service Delivery Virtual Agent Conversations from the ServiceNow Store. Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
ITSM Virtual Agent Conversations	Request ITSM Virtual Agent and the ITSM NLU Model for Virtual Agent Conversations from the ServiceNow Store. Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
Virtual Agent Platform topics and topic blocks • Virtual Agent Designer setup topics • Virtual Agent pre-built topic blocks (such as Agent Availability, AI Search, and FAQ Conversation Builder)	com.glide.cs.chatbot

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The plugins for the CSM, HR Service Delivery, and ITSM predefined conversations also install their prebuilt ServiceNow NLU models and topic blocks. The Glide Virtual Agent plugin installs the prebuilt NLU model for setup topics, as well as platform topic blocks.

After installing the plugins or apps, you can preview (test) the topics and topic blocks using Virtual Agent Designer. You can review the intents, utterances, and entities in the prebuilt NLU models using ServiceNow NLU Workbench or within Virtual Agent Designer if your NLU-enabled topics are associated with intents in ServiceNow NLU models.

Working with prebuilt topics and topic blocks in Virtual Agent Designer

- Previewing topics and topic blocks – After you install the plugins for prebuilt topics, admins or Virtual Agent admins can access the prebuilt topics and topic blocks in the Virtual Agent Designer home page. Select the topic and in the **Flow** tab, select **Test**. Review the conversation as it runs in the test window to determine the topics and topic blocks that you want to use.
- Using prebuilt topics and topic blocks – Although prebuilt topics and topic blocks are read only and can't be changed, you can reuse them by duplicating and modifying them as needed. After you test a duplicated topic and are ready to deploy it to your Virtual Agent clients, publish the topic. Similarly, after testing a duplicated topic block, publish it to make it available for use in conversation (calling) topics.

For details on creating, testing (previewing), duplicating, and publishing a topic, see Getting started with Virtual Agent Designer. For details on working with topic blocks, see Maximizing code reuse with topic blocks.

Working with prebuilt ServiceNow NLU models in ServiceNow NLU Workbench

- Reviewing a prebuilt NLU model – After you install the plugins for predefined topics, you can view the prebuilt models in NLU Workbench. The prebuilt NLU models for ServiceNow applications define the intents, entities, and utterances used for the predefined topics. These models are also trained and published. You can also review the utterances for a prebuilt model in Virtual Agent Designer. However to copy a prebuilt model, you use NLU Workbench.
- Duplicating prebuilt NLU models – Although prebuilt NLU models are read only and can't be edited, you can Duplicate an NLU model prebuilt NLU models to create your own NLU models and Import an NLU intent from prebuilt models or other NLU models that you create in NLU Workbench.

For details on creating, training, and publishing ServiceNow NLU models, see Natural Language Understanding.

Setting up chat experiences for Virtual Agent users

Create different chat experiences for your end users based on the context in which they initiate a conversation with Virtual Agent.

How chat experiences work

A chat experience defines the structure of a bot conversation (setup topics), an initial set of topics displayed to users (promoted assets), and the AI Search configurations for displaying search results in conversations. Virtual Agent provides a preconfigured, default chat experience that you (admins and topic authors) can use to control the user experience with Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You can configure the default chat experience and also create custom chat experiences, tailored to the context in which different users run Virtual Agent, such as the service portal or channel that they're using. Custom chat experiences inherit the default chat experience settings, but you can override the defaults as needed for a given context.

Note:
If you're using Virtual Agent Lite, you can configure certain setup topics in the default chat experience but you can't create custom chat experiences.

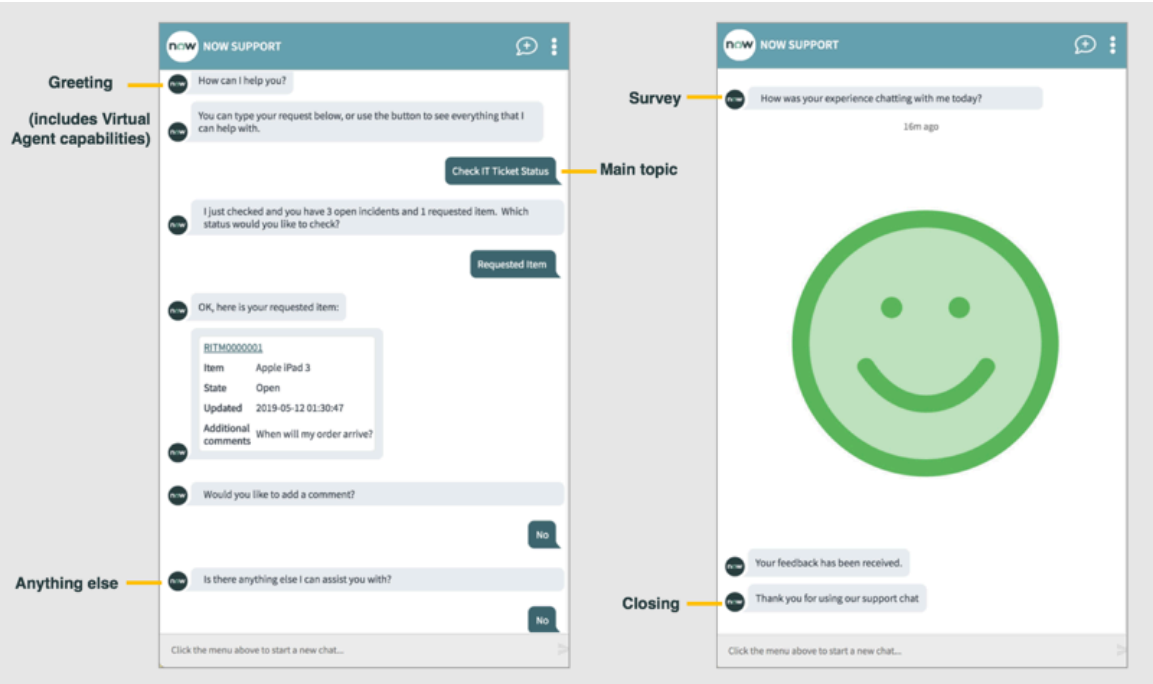
A chat experience consists of setup topics, promoted assets, and a search profile:

Setup topics

Virtual Agent provides common conversational elements, such as a welcome greeting to begin a conversation and a conversation closing, and automatically includes them in virtual agent conversations. These pre-built elements, called setup topics, are part of a basic conversation structure that is applied to all your conversations. They are installed with Virtual Agent and Virtual Agent Lite.

These setup topics run automatically at appropriate points in a conversation, based on the context, utterances (if NLU is enabled), topic description (if LLM is enabled) or keywords that users enter during the conversation.

Example setup topics in a conversation



Virtual Agent provides the following types of pre-built setup topics:

Setup topic	Description
Greeting	Presents a welcome greeting to users, and asks users to enter a request or see what items it can assist with.
Provide Virtual Agent Feedback	Displays a survey to get user feedback on the conversational experience, before the conversation ends.
Live Agent Support	Enables users to request a live agent transfer and view items that the live agent can assist with.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Setup topic	Description
Virtual Agent Capabilities	Presents a list of what the virtual agent can help with.
Error Handling Topic	Displays a standard error message when an unrecoverable system error occurs and transfers the user to a live agent.
Closing Conversation	Displays a closing message that ends the conversation.
AI Search Fallback	Generates AI Search results for a user when Virtual Agent can't find a matching intent and topic or keyword.
Fallback Topic	Presents standard messages that ask the user to enter another request or select a different topic when the virtual agent does not understand a user entry or selection.
Anything Else Topic	After completing a task or request, virtual agent asks if the user needs further assistance with another request or task.

In NLU conversations, setup topics have corresponding intents (set in the pre-built NLU model for setup topics) and also keywords. Virtual Agent recognizes the utterances or keywords that users can enter to run certain setup topics, such as the Virtual Agent Capabilities (help) topic or the Live Agent support topic. Setup topics for LLM conversations rely on their own descriptions as the intents, which the LLM uses for topic discovery.

You can preview (test) the pre-built setup topics to see how they work. On the Virtual Agent Designer home page, use the filter icon  to sort only for Setup Topics, and then select the setup topics to test. Pre-built topics are read-only, but you can duplicate, customize (modify) if needed, and publish them.

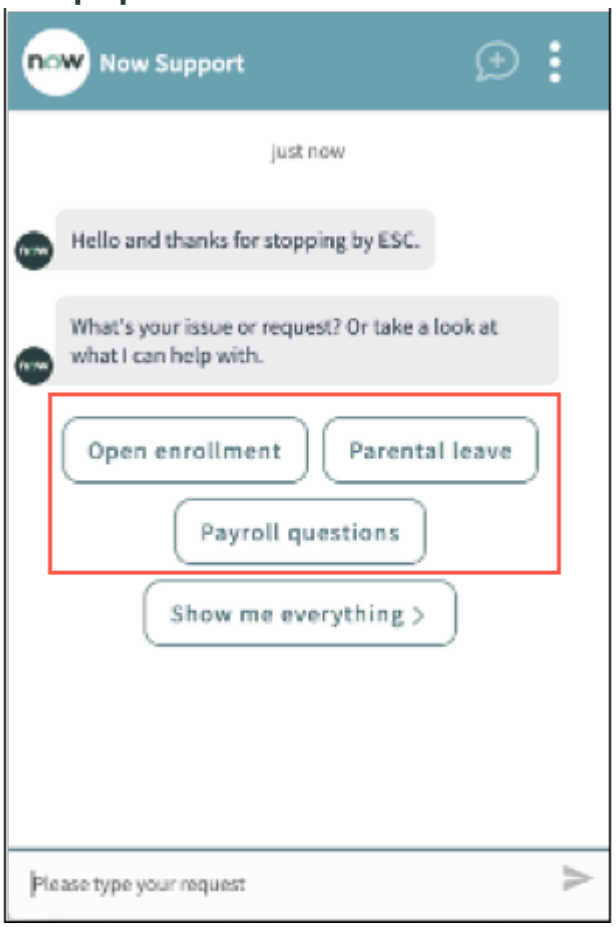
Promoted topics

You can display a collection of up to six topics that are relevant to your users, displayed before the **Show me everything** button in the chat window. You can use these promoted assets in a chat experience to give your users quick and convenient access to the topics used for a given context.

Note:
Promoted topics may not be supported on all clients.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example promoted assets




For more information, see Promote or demote LLM conversational subflows, actions, and topics in Virtual Agent Designer

Search profile

A search profile defines how Virtual Agent search results are generated for an AI Search application. The search application's configuration specifies a search profile to use, and also determines how the generated results are displayed to users. Virtual Agent uses a default search application configuration and search profile that controls the data sources used for searches. Its UI configuration (set in the Entity View Action Mapping application) controls the search results displayed in Genius Result answer cards and multi-link output. These configurations also apply to search results generated as a fallback when Virtual Agent can't determine the appropriate topic. For more information, see Improving the user experience with AI Search.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

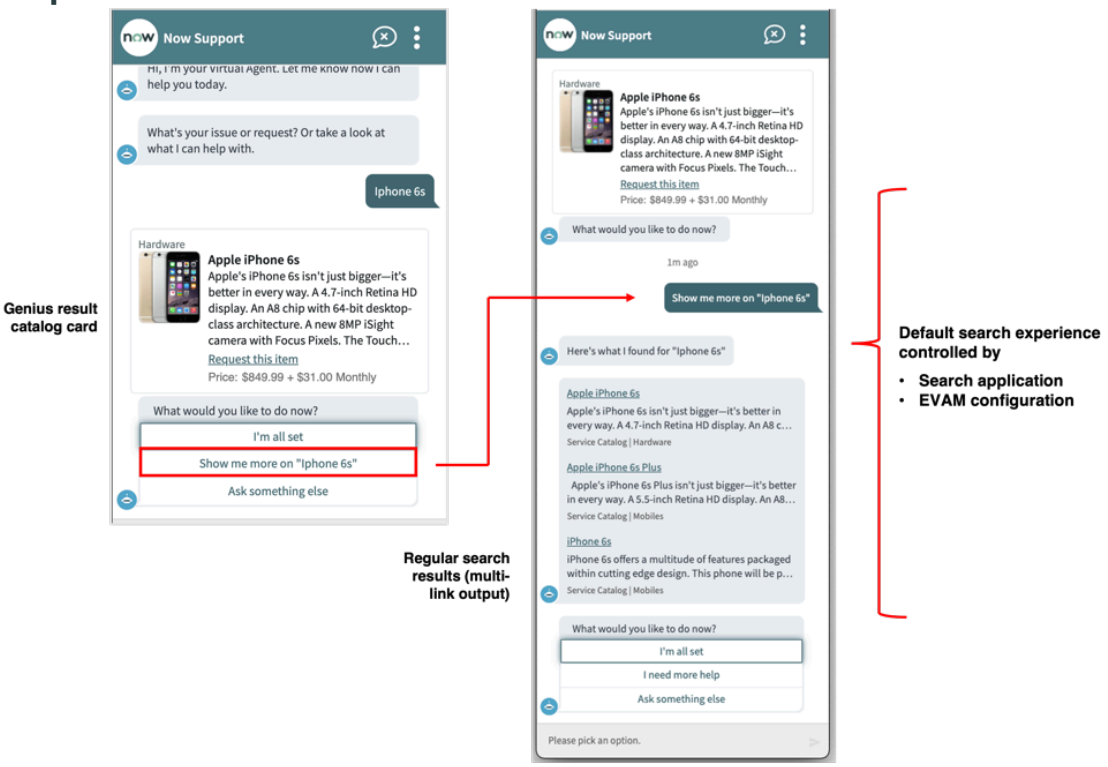Example AI Search result



Get started with chat experiences

Navigate to **All** > **Conversational Interfaces** > **Settings**, and then select **Virtual Agent**. Use the **Custom Greetings and Setup** tile to manage the default and custom chat experiences. You can do the following:

- Configure the default chat experience, including the setup topics, promoted assets, and search criteria used. For example, you can activate the Virtual Agent Feedback setup topic so that it is applied to all your bot conversations.
- Create different custom chat experiences based on the context in which your end users run Virtual Agent. The settings that you define in a custom chat experience override the default chat experience.

Working with setup topics

Setup topics are part of a standard conversation structure applied to all your conversations, such as the welcome greeting or fallback responses. Setup topics run at the appropriate spot in a conversation based on the context, keywords, or utterances entered by the user, and any conditions that are specified for the setup topic.

You define setup topics in a Virtual Agent Designer chat experience using the Custom Greetings and Setup option. A chat experience sets the context in which users run Virtual Agent. This context includes:

- Setup topics applied to bot conversations.
- A small list of topics, called promoted topics, initially displayed in the chat window.
- AI Search configuration used to display AI Search results for your users.

For more information on chat experiences, see Setting up chat experiences for Virtual Agent users. For details on configuring a chat experience, see Configure a Virtual Agent chat experience.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Setup topics in conversations are discoverable (via topic discovery) only when they're configured in a Virtual Agent chat experience using the **Custom Greetings and Setup** option. If any setup topics are not included in a chat experience, those setup topics are not listed in the chat window's All Topics menu (topic picker) and cannot be discovered by Virtual Agent.

Setup topics run during a conversation as follows.

1. Conversation beginning: Virtual Agent presents the Greeting topic and the list of available topics (Virtual Agent capabilities) that the user can select.

   Note:
   If you want the chat window to immediately take users to a live agent, do not select the Live Agent Support topic as a greeting. Instead, use the system method to transfer to a live agent.

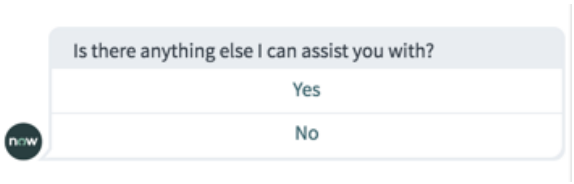
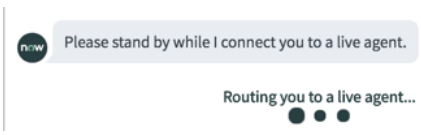
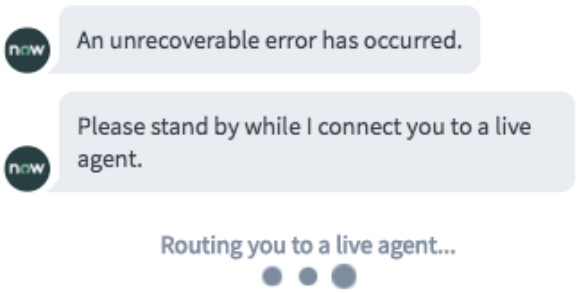
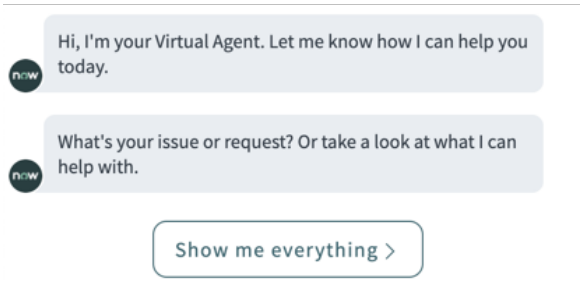
2. Conversation body: These setup topics are presented at different points in the conversation depending on the context:
   - User requests help: Virtual Agent presents the Explore help topic (Virtual Agent capabilities).
   - User enters a request or keyword that Virtual Agent doesn't understand: Virtual Agent presents the Fallback topic, unless the AI Search fallback topic is enabled.
   - If the AI Search Fallback topic is enabled and the user enters a request or keyword but Virtual Agent can't find a matching topic or keyword, or finds too many topics to determine the matching topic: Virtual Agent runs AI Search to generate relevant search results for the user. If the AI Search results do not help the user, or if the AI Search Fallback setup topic is not activated, Virtual Agent runs the Fallback topic.
   - An unrecoverable system error occurs during conversation: Virtual Agent runs the Error Handling topic, and then transfers the user to a live agent.
   - User requests a transfer to live agent: Virtual Agent runs the Live Agent topic, which transfers the user to a live agent.
   - After a task or user request is completed: Virtual Agent runs the Anything else topic to ask if the user wants to continue with another request or task.
3. Conversation ending:
   - If the user doesn't want further assistance after a task or the request is completed, Virtual Agent presents the Survey topic for feedback on the conversational experience.
   - After the survey, Virtual Agent confirms that the feedback has been received, and runs the Closing topic to end the conversation.

The default setup topics are read-only and have topic names with a period at the end of the setup topic name, such as **Greeting**. You can create your own custom setup topics by duplicating a setup topic and changing it as needed. You can also change prompts or add other controls to the topic, just as you might when creating other topics.



If you want a closing message to be different from the default Closing topic, create a custom setup topic that contains the revised closing text. You also need to create an intent for that custom setup topic in the NLU model for setup topics, or define topic keywords in the Topic Properties page. You can then select the custom setup topic to be used in a custom chat experience instead of using a default setup topic.

The following table provides examples of the pre-built setup topics in the default chat experience.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Setup topic type	Setup topic name and description
Anything else	Anything Else Topic. Virtual Agent asks users if they need further assistance.  If users select **Yes**, Virtual Agent returns a list of related items that it can help with.
Live agent	Live Agent Support. Tells users that a live agent transfer is in process: 
Error	Error Handling Topic. Displays a generic error message to the user when the Virtual Agent encounters a problem that it can't resolve (unrecoverable system error) and transfers the user to a live agent. 
Greeting	Greetings. Starts a conversation by greeting users and giving them the option to enter a request or see the items that the Virtual Agent can assist with. 

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Setup topic type	Setup topic name and description
	Note: The pre-built setup topics include a personalized greeting called the Dynamic Greeting Topic, which welcomes the user by name. To change the default greetings topic, double click **Setup topic name** and then choose the personalized greeting from the list of available setup topics.
Survey	Virtual Agent Feedback topic. Gathers user feedback on the conversational experience with the Virtual Agent. The survey setup topic displays randomly in 33% of your Virtual Agent conversations. The survey topic includes an introductory sentence that admins can customize as needed. The survey then presents a choice list with options users can select to describe their experience. **Example survey feedback choices**  After the users provide their feedback, a message confirms that their feedback has been received:  **Note:** To change the probability (percentage) that the survey setup topic occurs in your conversations, change the value in the *com.glide.cs.survey.probability* system property. To display the survey setup topic randomly in 50% of your Virtual Agent conversations, set the **Value** to 0.50.
Closing	Closing Conversation. Displays a closing message to the user that ends the conversation: 
AI Search fallback	AI Search Fallback. When enabled, this setup topic uses AI Search search to generate fallback AI Search results when Virtual Agent can't find a matching intent or it finds too many intents and can't determine the appropriate topic to display to a user.
Fallback	Fallback Topic. Displays a standard message to the user when:

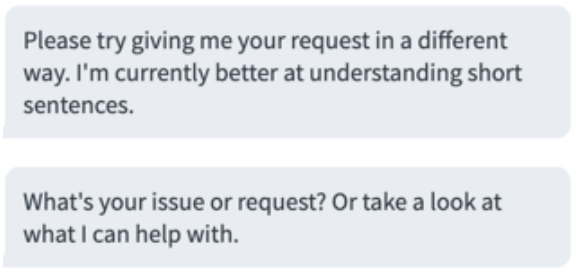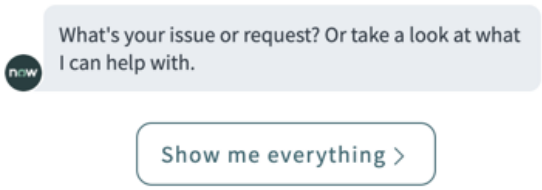© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Setup topic type	Setup topic name and description
	• When virtual agent doesn't understand a user utterance or keyword and the AI Search fallback setup topic is not enabled in the chat experience. AI Search fallback topic was deactivated in the chat experience, and the virtual agent doesn't understand a user statement or keyword. • Users indicate that the AI Search results aren't helpful. 
Explore help	Virtual Agent Capabilities. Enables users to ask for assistance during a conversation and view a list of items that the Virtual Agent can assist with (Virtual Agent capabilities). 

Change text in the Show me everything button

Configure the text in the **Show me everything** button displayed in the chat window to control the display of the initial greetings and the **Show me everything** button in Virtual Agent conversations. Edit the message in the System Properties [sys_properties] table, or in a copy of the Greetings setup topic.

Before you begin

If you're updating the Greetings setup topic in Virtual Agent Designer, first Create a copy of the Greetings setup topic, since the prebuilt Greetings setup topic is read-only.

Role required: virtual_agent_admin or admin

About this task

You can change the Virtual Agent greeting message by either updating the default greeting through the System Properties [sys_properties] table, or changing the message in the Greetings setup topic in Virtual Agent Designer.

If you change the message in the System Properties table, the default greetings setup topic (and any custom greetings topics that don't override the default **Show me everything**) all show the updated message. If you change the greeting message through Virtual Agent Designer, you can make more targeted changes, such as a message for an HR-based greeting topic.

The Greetings setup topic contains the Send Topic Picker script action, which controls the text in the **Show me everything** button. To change the text, edit the Send Topic Picker script action in the copy of the Greetings setup topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

Navigate to **All** and use one of the following methods.

Result
If you follow the System Properties method, your change to the greeting message is shown in all Virtual Agent conversations. If you follow the Virtual Agent Designer method, your change is shown in conversations related to the Greetings setup topic.

What to do next
If you customized your Greetings topic, add it to the default chat experience or to a new custom chat experience that you created. For details, see Configure a Virtual Agent chat experience.

Hide or reveal the Show me everything button

Set properties to hide or reveal the **Show me everything** button in Virtual Agent conversations that use LLM (large language model) and NLU/Keyword (Natural Language Understanding) topic discovery.

Before you begin
Role required: vitual_agent_admin or admin

About this task
By default, the greeting portion of a Virtual Agent conversation includes a **Show me everything** button, which brings up the entire list of available Virtual Agent topics and a search filter. Use the following steps to toggle the **Show me everything** button for LLM and NLU/Keyword topic discovery, respectively.

Procedure

Use either of the following methods, depending on whether you are working with LLM or NLU topics.

Result
The **Show me everything** button is removed from the greeting messages in your Virtual Agent conversations.

Change the Virtual Agent greeting messages in the Greeting setup topic

The Virtual Agent greeting setup topic provides default greeting messages for your conversations. Customize these greetings by adding system properties that change the default welcome message and the top selection message prompting users to enter an issue or request.

Before you begin
Role required: virtual_agent_admin or admin

About this task
Starting with the Orlando release, the *com.glide.cs.general.welcome_message* and *com.glide.cs.general.top_selection_message* properties are no longer automatically installed with Virtual Agent. These properties define the greeting messages used in the Greeting setup topic.

In the Orlando release, the default Greeting setup topic was updated. If you upgraded from the New York release, these properties are retained so that you can continue using the original Greeting setup topic. If you want to use the updated Greeting setup topic, delete the *com.glide.cs.general.welcome_message* and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

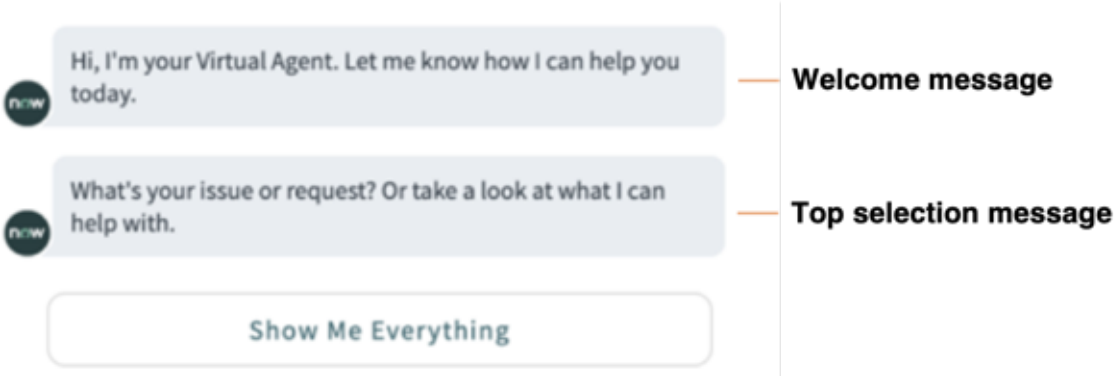
com.glide.cs.general.top_selection_message system properties that contain the original Greeting messages.

Note:
These properties aren't present in the base system, but creating them enables you to override these messages.

For new customers, the updated Greeting setup topic (see the following example) is the default. If you want to change the default message text in the Greeting setup topic, add these system properties to the System Property [sys_properties] table:

- *com.glide.cs.general.welcome_message*: Change the default welcome message
- *com.glide.cs.general.top_selection_message*: Change the top selection message that displays after the welcome message

Default messages in Greeting setup topic (starting with the Orlando release)



Procedure

1. Navigate to **All**, and then enter `sys_properties.list` in the filter.
2. Select **New** to add the *com.glide.cs.general.welcome_message* property.
   a. On the form, complete the following fields.

Field	Value
Name	Enter the system property name: `com.glide.cs.general.welcome_message`
Description	Enter an explanation for this property: `Welcome message`
Type	Select `string`.
Value	Enter the greeting text. For example: `How can I help you?`

   b. Select **Submit**.
3. In the System Properties table, select **New** to add the *com.glide.cs.general.top_selection_message* property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. On the form, complete the following fields.

Field	Value
Name	Enter the system property name: `com.glide.cs.general.top_selection_message`
Description	Enter an explanation for this property: `Top selection message`
Type	Select `string`.
Value	Enter the text that specifies the next selection action that the user can make after the welcome message is presented to the user. For example: `You can enter your request below, or use the button to see everything that I can help with.`

b. Select **Submit**.

Configure a Virtual Agent chat experience

Change the preconfigured Virtual Agent default chat experience or create a custom chat experience for your users. You can configure setup topics, specify promoted topics, and if needed, change the search profile.

Before you begin

If you want to specify custom setup topics or promoted topics that are displayed to your users in the chat window, make those topics active (published) so that they're available for configuration in the chat experience.

Role required: virtual_agent_admin or admin

About this task

The default chat experience provides the default settings for the setup topics and the Virtual Agent search configurations in your instance. A custom chat experience uses the default settings from the default chat experience, but you can override them as needed. Defining a chat experience includes the following steps:

1. Configure setup topics.
   - Activate setup topics that are not initially enabled, such as the Anything else, Survey topic, and AI Search Fallback topic types.

     Note:
     If you upgraded from the Quebec release, the AI Search Fallback topic is deactivated by default. Enable it to return AI Search results as a fallback when Virtual Agent can't determine intents, topics, or keywords.

   - If you want setup topics to be included in topic discovery and listed in the All topics menu, be sure to include those setup topics in the default or a custom chat experience.
   - Deactivate setup topics if you don't want them to run in your conversations.
2. Promote up to six topics that are initially displayed to your users, above the **Show me everything** button in the chat window. Promoted topics are supported only on the web and mobile clients.
3. Change the Search Application configuration in the Search Profile, if needed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Virtual Agent** and under Custom Greetings and Setup, select **View All**.
3. Define the chat experience.
   Do one of the following:
   - To change the setup topics, promoted topics, or AI Search setting in the default chat experience, proceed to Step 5 or 6, depending on what you want to change.


     Note:
     The settings for the default chat experience are preconfigured (read-only).

   - To define a new experience, select **New** and complete the fields in Custom Greetings and Setup. Then proceed to Step 4.
   - To edit a custom experience, select the custom experience record and select **Edit** to update Custom Greetings and Setup.

Custom Greetings and Setup

Field	Description
Name	Name of the chat experience.
Description	Brief description (purpose) of the chat experience, for example ESC portal.
Active	Option that activates or deactivates the chat experience. The chat experience is active (enabled) by default. To deactivate the chat experience, clear this option.
Order	Order value that Virtual Agent uses to determine which chat experience to apply. The default chat experience has an Order value of 1000. Virtual Agent checks all the chat experiences, and if there is more than one match, the experience with the lowest order value (<1000) is applied.
Provide the context	
Condition Mode	Options for specifying the chat experience context: ○ **Simple**: A no-code condition builder to specify the context. This is the mode for the default chat experience. ○ **Advanced**: A JavaScript scripted condition that specifies the context. The condition must evaluate to true.
Condition	Condition builder for specifying the experience context. See the list of the available context variables that can be specified.

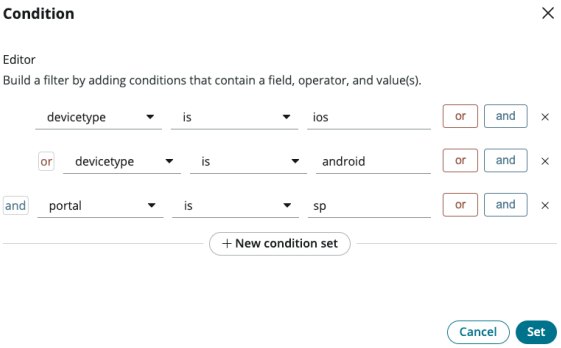
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	For example, a Simple, no-code condition might specify the devicetype (ios or android) and the portal to which it applies. In this case, the condition applies to  the Service Portal (sp).
Script	Script editor for specifying the condition in a script, if you selected Advanced as the **Condition Mode**.

4. Select **Create custom experience** if this is a new custom chat experience.
   - The settings for the setup and promoted topics are empty. The setup topics and promoted topics specified for the default chat experience are used automatically, unless you override them by adding new topics or changing them in your custom experience.
   - To change the setup topics, promoted topics, or AI search settings in the default experience, proceed to the next steps.
5. Select the **Setup Topics** tab.
   The default experience for new instances automatically includes most of the pre-built setup topics in your conversations, except for the Anything else and Survey topics. If you upgraded from the Quebec or Rome release, the AI Search fallback topic type is also not active.

   Note:
   the Live Agent and Virtual Agent Feedback topics are not listed in the Virtual Agent topic picker (All Topics) menu by default. You must associate a setup topic type to a setup topic as part of the default or custom chat experience.

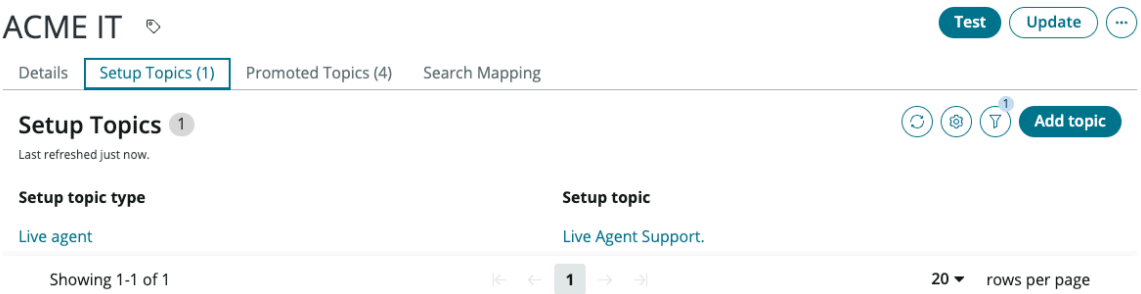   Select **Update** to apply your changes.



6. Select the **Promoted Topics** tab to configure promoted topics.
   Specify up to six Virtual Agent topics to be initially displayed in the chat window.

   Note:
   Promoted topics are supported only on the web and mobile clients.

   a. For each topic to be promoted, select **Add topic**.


   b. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Topic	The topic to be promoted.
Order	A number that indicates the order in which the topic is listed in the chat window.

c. Select **Submit**.

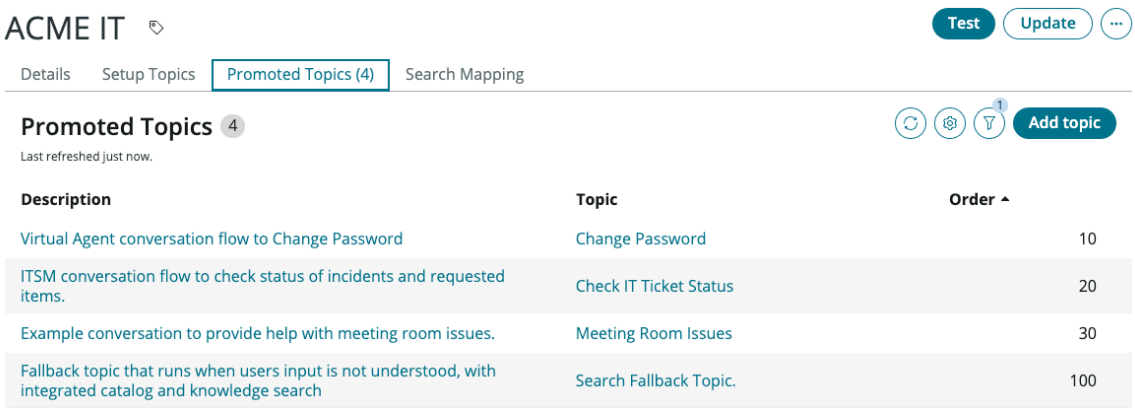
d. If needed, select **Test** to see how the promoted topics are displayed in the chat window.



7. Select the **Search Mapping** tab to change the search application for the chat experience. The default mapping consists of the Search Application Configuration and the Search UI (EVAM) Configuration for Virtual Agent.


> **Note:**
> The Virtual Agent Default Search Application Configuration is tied to a search profile that does not provide Person card results.

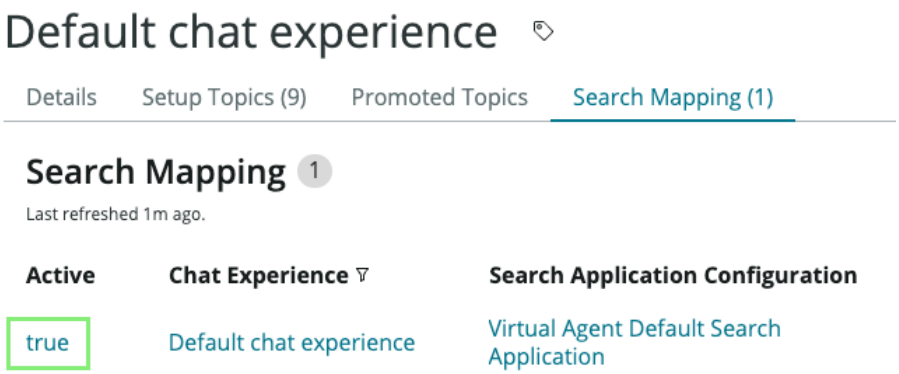a. Select the value in the **Active** column to open the Search Profile record.



b. To change the **Search Application Configuration**, select a configuration from the list of available Search Application Configurations.

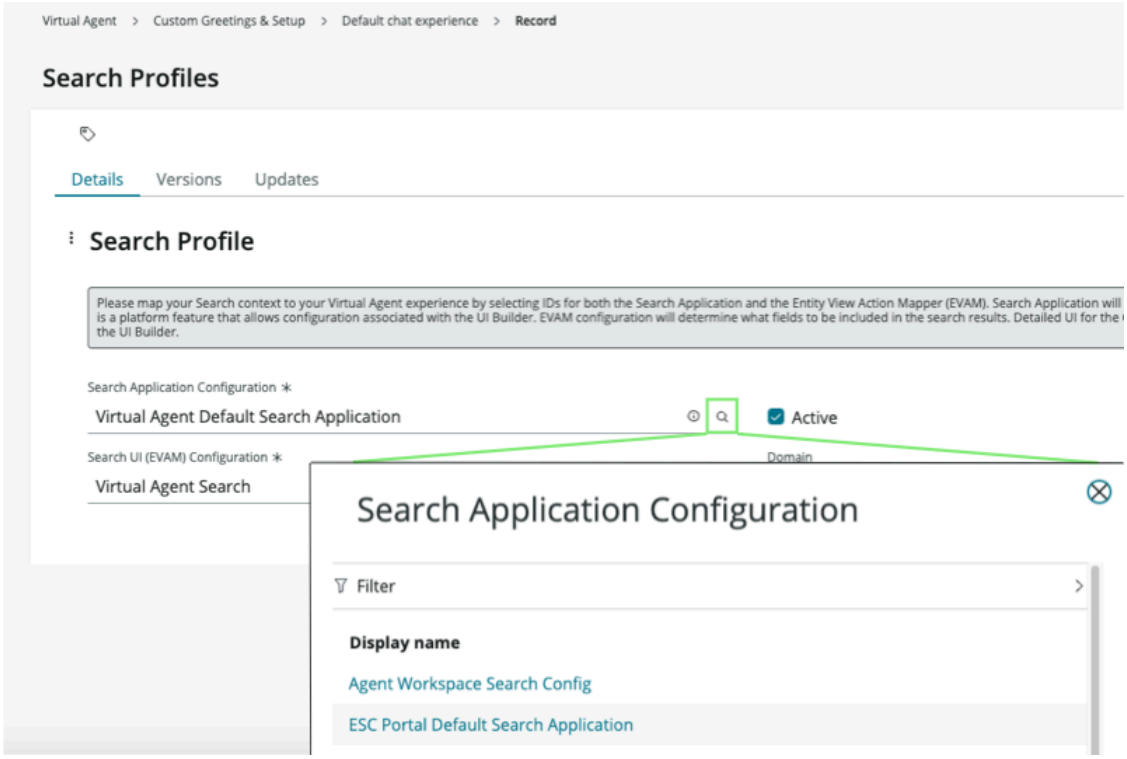© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



c. Select **Update**.

Note:
Although you can change the **Search UI (EVAM) Configuration**, the Virtual Agent Search (EVAM) configuration provides the appropriate card views and lists of Virtual Agent search results. If you want to create your own EVAM configuration for use, see Create an EVAM definition.

Test chat experiences

After you create or modify a Virtual Agent chat experience, you can test (simulate) it to verify that it works as expected.

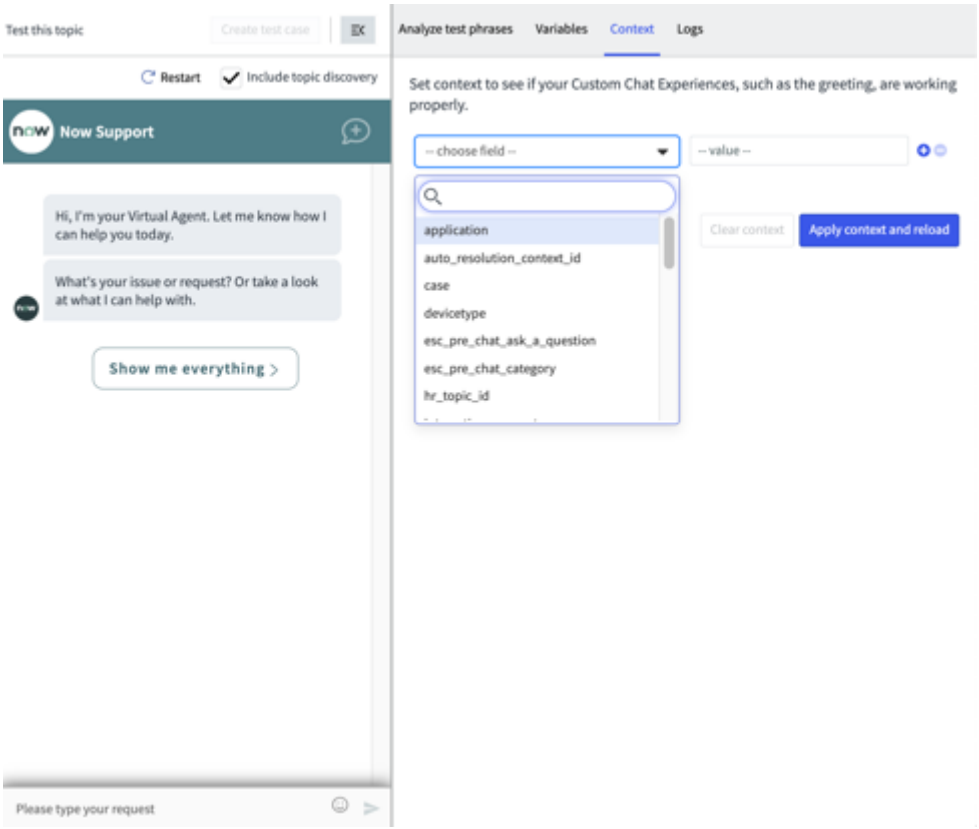
Before you begin

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**, and select the **Virtual Agent** tab.
2. Under **Custom greetings and setup**, select **View All**.
3. Select the chat experience and view the profile.
4. In the header bar, select **Test**, which automatically opens the chat test window and the associated tabs that display processing details.
   The items that you defined for the chat experience, such as custom setup topics or promoted topics, run in the test window. The following example shows the custom greeting setup topic and promoted topics defined for the ESC portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



5. To specify a different context, do the following:

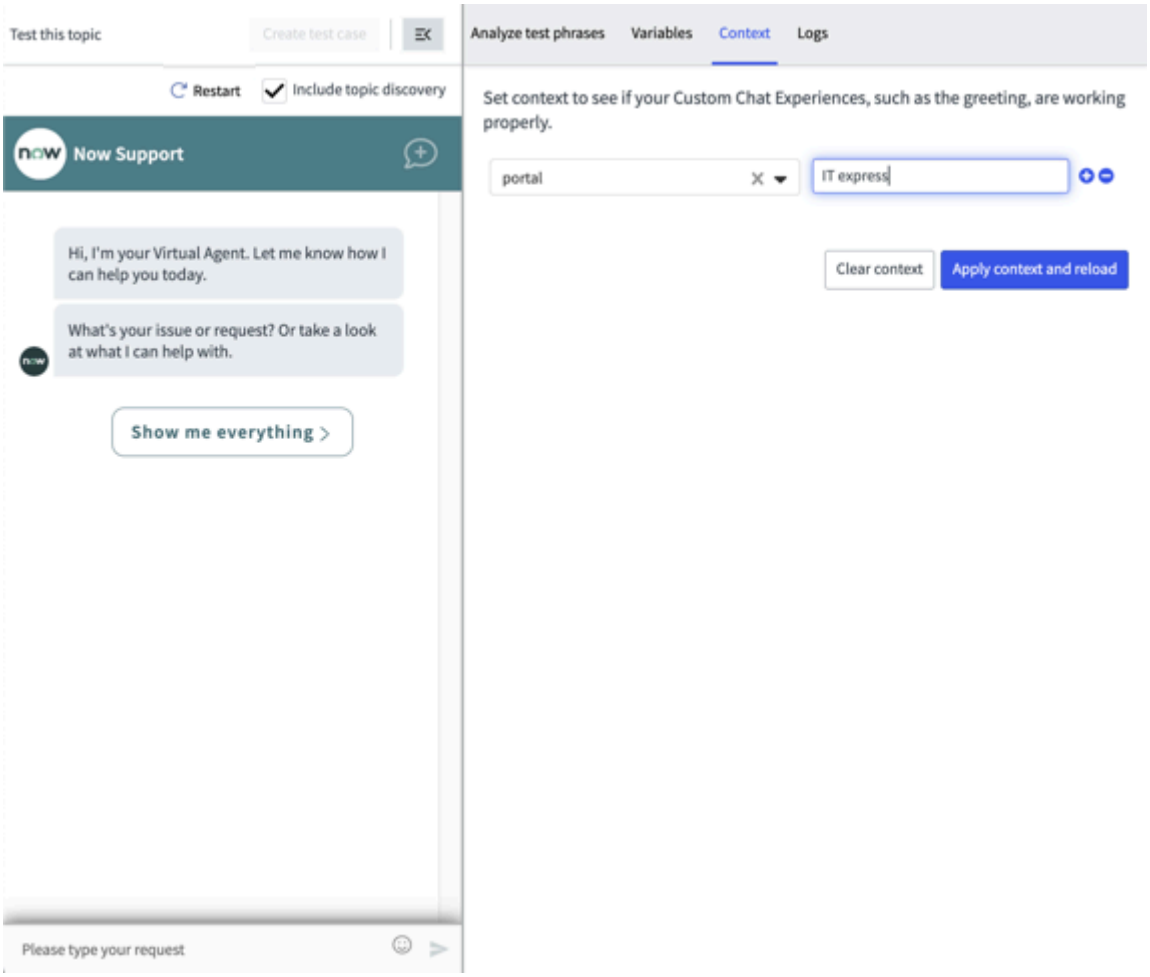
a. In the **Test this topic** window, select **Include topic discovery**.
The **Context** tab appears.

b. In the **Context** tab, choose a context from the list of variables (these context variables are defined in Chat Settings).
For example, you could select portal from the list of variables and enter the portal name, `IT Express`.

c. Select **Apply context and reload**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The items that you defined for the chat experience, such as custom setup topics or promoted topics, run in the test window.



Configuring the portable Virtual Agent chat widget

The Portable chat widget can run on third-party web pages, in the service portal, or in UI Builder portals.

The portable chat widget is a new Seismic component that makes it easy to add Virtual Agent chat to your page. It simplifies configuration and provides the following features:

- Easily configurable
- Simpler single sign-on (SSO) authentication flow
- Connect to Service Portal Agent Chat
- System parameters and context variables work the same as before

Prerequisites for using the Portable Virtual Agent chat widget

The Portable chat widget uses an inline frame element (iframe). The third-party website must be under the same parent domain as your ServiceNow® instance. For example, `site1.company.com` and `site2.company.com` share the same parent domain. If you're embedding the chat widget on any subdomain that is not shared with your ServiceNow instance, the URL must be a custom instance URL. Due to increased browser security, the chat widget may fail to load if you don't use a custom URL.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin, do the following:

1. Activate the custom URL plugin (com.snc.customurl) in your instance.
2. Add the custom URL (that you previously purchased and registered) to your instance.

Note:
To learn more about using custom URLs, see Associating custom URLs to your instance.

Using SSO authentication with the Portable Virtual Agent chat widget

After you embed the Virtual Agent client, you can optionally trigger SSO authentication from the chat widget, but only when your instance is set up to use an external SSO provider. Your hosting site must also use the same SSO provider as your instance. For details on setting SSO providers, see External single sign-on (SSO).

To trigger SSO authentication, create a JavaScript script that defines conditions for running authentication and redirects users to a chat widget page that you specify. You also specify the allowed URLs that can be passed in this script, by identifying them in the *com.glide.cs.web_client_login_redirect_urls* system property. Specify the full redirect URLs or the host part of the URL, such as `https://example.com`.

This procedure requires that you set values for the following two system properties:

- *com.glide.cs.embed.csp_frame_ancestors*
- *com.glide.cs.embed.xframe_options* (IE 11 only)

These properties determine the security policy for the embedded chat widget, namely how browsers render and secure HTML content for Virtual Agent and Live Agent chat, in an iframe, before you embed the web chat client. The HTTP header directives that you specify tell the browser whether a page can be embedded on certain domains to mitigate clickjacking attempts. Setting both properties ensures that there are security directives for major browsers and also older browsers, such as Internet Explorer.

Note:
If you're using the Content Management System (CMS) application to create custom interfaces for the ServiceNow AI Platform and ServiceNow® applications, be aware that it does not support Virtual Agent.

Related topics

Configure the Portable Virtual Agent chat widget

Add the Portable Virtual Agent chat widget to a third-party website

Configure the Portable Virtual Agent chat widget

Configure the Portable Virtual Agent chat widget to run Virtual Agent on third-party web pages.

Before you begin

Note:
For new customers onboarding from Vancouver onward, the chat widget is only accessible to authenticated users by default. To allow unauthenticated users to access the chat widget, you must enable the sn_va_web_client_app_embed page for public access. For more information, see Make UI pages public or private.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

ServiceNow only supports the Portable Virtual Agent when the top-level domain and domain name match the site that is loading the chat widget. SSO is only supported through the service-now.com URL. Anything beyond that will require custom solution and implementation.

Procedure

1. Navigate to **All**, and then enter `sys_properties.list` in the filter.
2. In the System Properties [sys_properties] table, search for the *`com.glide.cs.embed.csp_frame_ancestors`* property by name.
3. Click the property name to open the form and specify the directive values.

Field	Description
Type	**string** This is the default value.
Value	Source value of the HTTP header directive: `Content-Security-Policy: frame-ancestors<source>`This property applies to most major browsers, except for Internet Explorer. Specify one or more sources, including the following: ○ **'self'**: Indicates that the origin is the same as the page being served. For example, if the value is *`'self' http://mywebsite.com`*, then the iframe is embedded within the parent domain as well as mywebsite.com. This is the default value. ○ **host-source**: The domains in which the external web page can be embedded. Specify the Internet host site by name, IP address, or optional URL and/or port number. Site address can start with a wildcard (asterisk) character. Example value: **http://*.example.com** ○ **scheme-source**: A schema. For example: **http:** or **https:** ○ **none**: No matching URLs.

4. Return to the System Properties [sys_properties] table to search for the *`com.glide.cs.embed.xframe_options`* property by name.
5. Click the property name to open the form and specify the directive values.

Field	Description
Type	**string** This is the default value.
Value	Value of the of the X-Frame-Options header directive, to indicate whether the browser can render an external web page in a frame. Specify one of the following values: ○ **sameorigin**: Displays the page in a frame that has the same origin as the page itself. This is the default value. This property applies to older browsers, such as Internet Explorer 11. Example value: **allow from https://example.com** ○ **deny**: Does not display the page in a frame.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	○ **allow-from uri**: Displays the page only in a frame on the specified origin. **Note:** This value no longer works in modern browsers.

6. Configure CORS Rules for the REST API to give access across domains.
   This rule gives the web domain you specify the rights to call the API that gives it access to the chat widget on the web page without a security restraint. All domains must share a common parent domain. Also, you must create a new CORS Rule for each subdomain that you want to support.

   a. Navigate to **All** > **System Web Services** > **REST** > **CORS Rules**.

   b. Click **New**.

   c. On the form, fill in the fields.

Field	Description
Name	Unique name for the rule.
Application	Scope of the application. **Global** is the default value.
REST API	Name of the REST API. Select **Conversation Consumer Account [now/cs]**.
Domain	The domain for your website. For example: **https://mycompany.com** If you have multiple subdomains for your website, you must create a CORS Rule for each. For example, **support.mycompany.com** and **products.mycompany.com** would require two separate CORS Rules. **Note:** Wildcards are not allowed.
Max age	The number of seconds to cache the client session. After an initial CORS request, further requests from the same client within the specified time do not require a preflight message. If you do not specify a value, the default value of **0** indicates that all requests require a preflight message.

   d. On the **HTTP Methods** tab, select **GET**.
   The Portable chat widget will only receive requests.

   e. Click **Submit**.

   f. **Optional:** Repeat these steps if you want to add the Portable chat widget to another subdomain on your website.

7. **Optional:** Create a JavaScript script that uses the *`window.postMessage()`* method (Web API) to define event conditions that trigger SSO authentication in a user interface page and returns users to a chat widget page that you specify.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To redirect users to a chat widget page, use the following string: `"https://<your-instance>.service-now.com/sn_va_web_client_login.do?sysparm_redirect_uri=' + encodeURIComponent(<your-page>)`

Note:
Before you run the script, use the *com.glide.cs.web_client_login_redirect_urls* system property to specify the URLs that can be passed in the script. The redirection works only when you specify one or more allowed URLs in the property value. Specify the full redirect URLs or the host part of the URL. For example: `https://example.com`.

Example script

```
<script>
    window.addEventListener("message", function(e) {
       // redirect to SSO login if the chat widget logs in but
 is logged in as a guest user(unauthenticated)
      if(e.data.type==="SESSION_CREATED" &&
 e.data.authenticated === false)
        window.location.href =
 "https://<your-instance>.service-now.com/sn_va_web_client_logi
n.do?sysparm_redirect_uri=<' + encodeURIComponent(<your-page>);

      // redirect to SSO login if the ServiceNow platform logs
 out from underneath the chat widget
      if(e.data.type==="SESSION_LOGGED_OUT")
        window.location.href =
 "https://<your-instance>service-now.com/"https://<your-instanc
e>service-now.com/sn_va_web_client_login.do?sysparm_redirect_ur
i=' + encodeURIComponent(<your-page>);
    });
  </script>
```

In this example, authentication is triggered in the specified instance when the SESSION_CREATED or SESSION_LOGGED_OUT events occur. After authentication (when the SSO credentials for users are accepted), users are redirected to the embedded chat widget page that you specified in `sn_va-web_client_login.do?sysparm_redirect_uri=' + encodeURIComponent(<your-page>)`, as long as you also specified the page URL in the *com.glide.cs.web_client_login_redirect_urls* property.

What to do next
Add the Portable Virtual Agent chat widget to a third-party website.

Add the Portable Virtual Agent chat widget to a third-party website

To use the Portable Chat Widget for Virtual Agent on third-party web pages, add the necessary code to your web page.

Before you begin
Configure the Portable Virtual Agent chat widget prior to completing this topic's steps.

For additional information, review the How to embed Virtual Agent in an external site article on the ServiceNow Community site.

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

Import and instantiate this script reference to the page header to create a ServiceNow chat instance on your external page header:

Note:
In the script reference example, site1.example.com refers to the URL for your ServiceNow instance.

```
<script type="module" >
      import ServiceNowChat from
 "https://site1.example.com/uxasset/externals/now-requestor-chat
-popover-app/index.jsdbx?sysparm_substitute=false";
      var chat = new ServiceNowChat({ instance:
 "https://site1.example.com/", });
    </script>
```

Tip:
If your organization uses a custom domain name, input the custom domain name as the instance property, rather than the ServiceNow domain name, to ensure that browser results are consistent among multiple browsers.

Example with configuration

```
const chat = new ServiceNowChat({
 instance: 'https://site1.example.com',
 context: {
  skip_load_history: 1
 },
 branding: {
  bgColor: '#333',
  primaryColor: '#000',
  hoverColor: '#EFEFEF',
  activeColor: '#AAA',
  openIcon: 'custom-open.svg',
  closeIcon: 'custom-close.svg',
  sizeMultiplier: 1.6
 },
 offsetX: 50,
 offsetY: 50,
 position: 'left',
 translations: {
  'Open dialog': 'Open chat',
  'Open Chat. {0} unread message(s)': 'Click to open',
  'Close chat.': 'Click to close',
 },
});
```

JSON configuration schema

```
{
    instance: <string> - url to your instance, must be
 of the same domain (sub-domain)
    context: <object> - sys_parm variables to pass into
 the iframe
    branding: <object> - branding settings
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
          bgColor: <rgb|hex> - can take an rgb tuple,
ie: '56,56,56' or a 3 or 6 hex color code, ie: #333 or
#efefef.  background color of button
   primaryColor: <rgb|hex> - font color
   hoverColor: <rgb|hex> - hover background color of
button
   activeColor: <rgb|hex> - click / active background
color of button
   openIcon: <string> - name of the uploaded custom
icon in settings
   closeIcon: <string> - name of the uploaded custom
icon in settings
  offsetX: <integer> - distance in pixels the button
moves along the x-axis
  offsetY: <integer> - distance in pixels the button
moves along the y-axis
  position: <enum: left|right> - position left or
right side of screen
  translations: <object> - contains label mappings for
translations or label changes
   'Open dialog': <string> - replacement text for
accessibility
   'Open Chat. {0} unread messages(s)': <string> -
replacement text for tooltip
   'Close chat.': <string> - replacement text for
tooltip
}
```

Embed the Virtual Agent chat widget in an external web page (legacy method)

Load the Virtual Agent chat widget interface in an external web page by using an inline frame element (iframe). You can also optionally enable the single sign-on (SSO) authentication process to run automatically for guest users who are using the chat widget and are not logged in.

Before you begin

Important:
Consider adding the Portable Virtual Agent Web Client to your web page instead. It reduces code complexity and is easier to implement. It also includes standard chat features, such as click actions for launching or closing the chat. For details, see Add the Portable Virtual Agent chat widget to a third-party website.

- In the iframe, you specify the URL of the instance to be embedded. If you're embedding the chat widget on any page that is not on your ServiceNow instance, the URL must be a custom instance URL. Due to increased browser security, the chat widget may fail to load if you don't use a custom URL. To learn more about using custom URLs, see Associating custom URLs to your instance.

  To use a custom URL, do the following:

  - Activate the custom url plugin (com.snc.customurl) in your instance.
  - Add the custom URL (that you previously purchased and registered) to your instance.

  Note:
  The Virtual Agent chat widget does not work from an iframe in Safari by default. Apple blocks cross-origin iframes (when the domain of the URL used in the iframe does not match the domain of the website itself).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- After you embed the Virtual Agent client, you can optionally trigger SSO authentication from the chat widget, but only when your instance is set up to use an external SSO provider. Your hosting site must also use the same SSO provider as your instance. For details on setting SSO providers, see External single sign-on (SSO).

  To trigger SSO authentication, you create a JavaScript script that defines conditions for running authentication and redirects users to a chat widget page that you specify (see Step 2 below). You also specify the allowed URLs that can be passed in this script, by identifying them in the *com.glide.cs.web_client_login_redirect_urls* system property. Specify the full redirect URLs or the host part of the URL, such as `https://example.com`.

Role required: admin

About this task

This procedure requires that you set values for the following two system properties:

- *com.glide.cs.embed.csp_frame_ancestors*
- *com.glide.cs.embed.xframe_options*

These properties determine the security policy for the embedded chat widget, namely how browsers render and secure HTML content for Virtual Agent and Live Agent chat, in an iframe, before you embed the web chat client.

To generate SSO authentication for your guest users, you can create a script that uses the `window.postMessage()` method (Web API) to trigger authentication and specify the URL where users are redirected after authentication. For more information on this method and Window objects, see Window.postMessage().

Note:
If you're using the Content Management System (CMS) application to create custom interfaces for the ServiceNow AI Platform and ServiceNow® applications, be aware that it does not support Virtual Agent.

Procedure

1. Set both the *com.glide.cs.embed.csp_frame_ancestors* and *com.glide.cs.embed.xframe_options* system properties to specify the HTTP header directives for securing the iframe contents.
   The HTTP header directives tell the browser whether a page can be embedded on certain domains to mitigate clickjacking attempts. Setting both properties ensures that there are security directives for major browsers and also older browsers, such as Internet Explorer.

   a. In the navigation filter, enter `sys_properties.list`.

   b. In the System Property [sys_properties] table, search for the *com.glide.cs.embed.csp_frame_ancestors* property by name.

      Note:
      This property sets the source value of the HTTP header directive: `Content-Security-Policy: frame-ancestors<source>`. Use the `host-source` value to specify the domains in which the external web page can be embedded. This property applies to most major browsers, except for Internet Explorer.

   c. Click the property name to open the form and specify the directive values.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

System Property: com.glide.cs.embed.csp_frame_ancestors

Field	Description
Type	**string** This is the default value.
Value	Specify one or more sources, including: ▪ **'self'**: Indicates that the origin is the same as the page being served. For example, if the value is *'self' http://mywebsite.com*, then the iframe is embedded within the parent domain as well as mywebsite.com. This is the default value. ▪ **host-source**: The domains in which the external web page can be embedded. Specify the Internet host site by name, IP address, or optional URL and/or port number. Site address can start with a wildcard (asterisk) character. Example value: **http://*.example.com** ▪ **scheme-source**: A schema. For example: **http:** or **https:** ▪ **none**: No matching URLs.

For more information about source values that you can specify, see CSP:frame-ancestors and Virtual agent embedded client content security policy (instance security hardening) in Hardening settings.

d. Return to the System Property [sys_properties] table to search for the *com.glide.cs.embed.xframe_options* property by name.

Note:
This property sets the value of the of the X-Frame-Options header directive, to indicate whether the browser can render an external web page in a frame. Use the default `sameorigin` value to specify the domains in which the external web page can be embedded. This property applies to older browsers, such as Internet Explorer 11.

e. Click the property name to open the form and specify the directive values.

System Property: com.glide.cs.embed.xframe_options

Field	Description
Type	string. Default value.
Value	Specify a value, including: ▪ `sameorigin`. Default value. Displays the page in a frame that has the same origin as the page itself. Example value: allow from https://example.com.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	▪ `deny`. Does not display the page in a frame. ▪ `allow-from uri`. Displays the page only in a frame on the specified origin. **Note:** This value no longer works in modern browsers.

For more information about source values that you can specify, see X-Frame-Options and Set Xframe options to prevent embedding third-party websites [Updated in Security Center 1.3] in Hardening settings.

2. After associating your ServiceNow instance to a custom URL, create the iframe element and specify the custom URL in the inline element (iframe) used to embed the Virtual Agent client in an external web page: `"https://<your-domain>.com/sn_va_web_client_app_embed.do"`

   Note: Your instance may have multiple custom URLs, but only one instance URL. You must use your custom instance URL only.

   For example:

```
<iframe id="sn_va_web_client"
    title="ServiceNow Virtual Agent Client"
    width="600"
    height="900"

 src="https://<your-domain>.com/sn_va_web_client_app_embed.do">
"https://<your-domain>.com/"https://<your-domain>.com/</iframe>
```

   Note: Use the `?sysparm_skip_load_history=true` parameter at the end of the URL to load the interface without the conversation history.

3. **Optional:** Create a JavaScript script that uses the `window.postMessage()` method (Web API) to define event conditions that trigger SSO authentication in a user interface page and returns users to a chat widget page that you specify.
   To redirect users to a chat widget page, use this string: `"https://<your-instance>.service-now.com/sn_va_web_client_login.do?sysparm_redirect_uri=' + encodeURIComponent(<your-page>)`

   Note: Before you run the script, use the *`com.glide.cs.web_client_login_redirect_urls`* system property to specify the URLs that can be passed in the script. The redirection works only when you specify one or more allowed URLs in the property value. Specify the full redirect URLs or the host part of the URL, such as `https://example.com`.

   Example script:

```
<script>
    window.addEventListener("message", function(e) {
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
      // redirect to SSO login if the chat widget logs in but
 is logged in as a guest user(unauthenticated)
     if(e.data.type==="SESSION_CREATED" &&
 e.data.authenticated === false)
       window.location.href =
 "https://<your-instance>.service-now.com/sn_va_web_client_logi
n.do?sysparm_redirect_uri="+ encodeURIComponent(location.href);

     // redirect to SSO login if the ServiceNow platform logs
 out from underneath the chat widget
     if(e.data.type==="SESSION_LOGGED_OUT")
       window.location.href =
 "https://<your-instance>service-now.com/sn_va_web_client_login
.do?sysparm_redirect_uri=" + encodeURIComponent(location.href);
    });
  </script>
```

In this example, authentication is triggered in the specified instance when the SESSION_CREATED or SESSION_LOGGED_OUT events occur. After authentication (when the SSO credentials for users are accepted), users are redirected to the embedded chat widget page that you specified in `sn_va-web_client_login.do?sysparm_redirect_uri=' + encodeURIComponent(<your-page>)`, as long as you also specified the page URL in the *`com.glide.cs.web_client_login_redirect_urls`* property.

Configure Virtual Agent for a ServiceNow mobile application

Virtual Agent provides optimized templates for the mobile experience. Configure a service portal to run Virtual Agent on a ServiceNow mobile application.

Before you begin

Install the required plugins:

- Virtual Agent (com.glide.cs.chatbot)
- Conversational Messaging (com.glide.messaging.awa)
- Core ServiceNow® mobile plugins

  For more information, see Mobile plugins.

Role required: admin

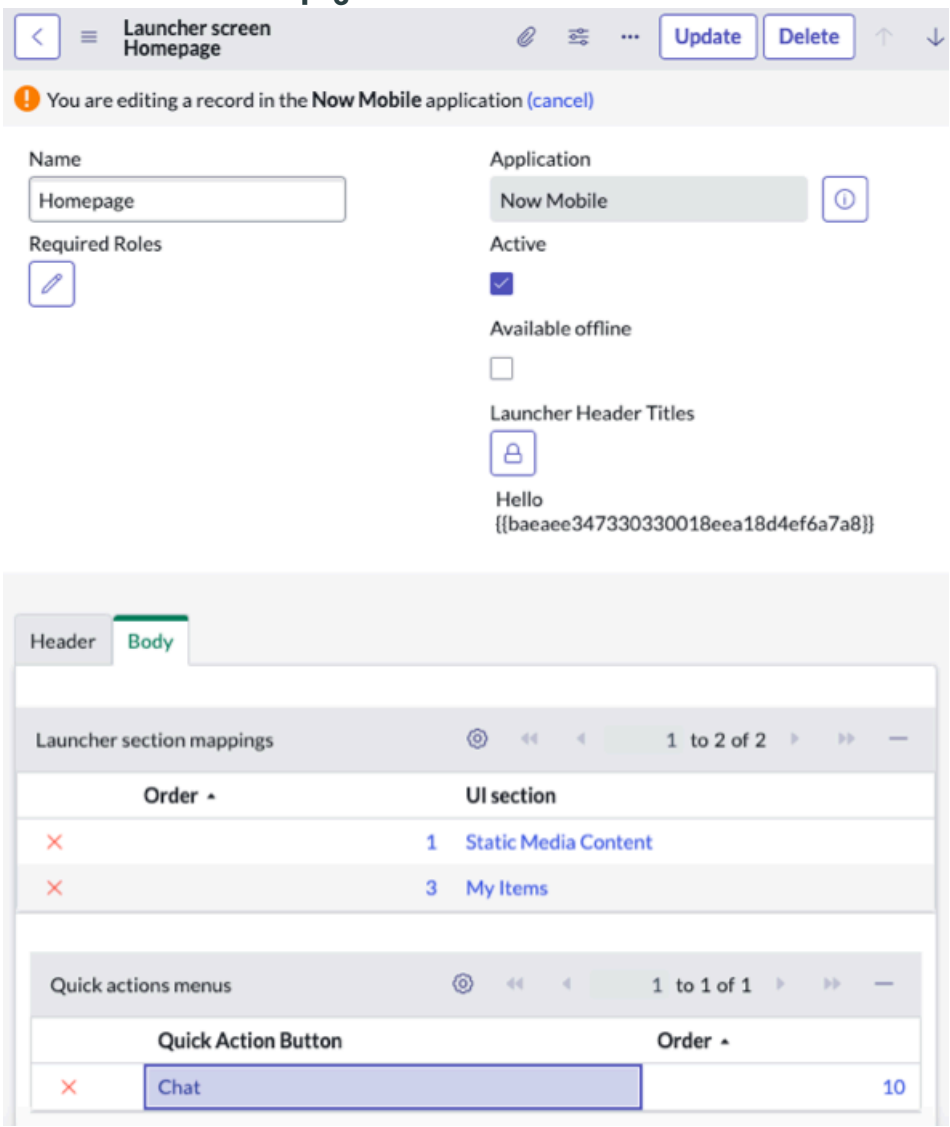
Procedure

1. Install the corresponding mobile plugins for each application that you want to use in Virtual Agent.
   For example, if you're using Virtual Agent ITSM conversations, install the ITSM Mobile Agent (sn_itsm_mobile_agt) plugin as well. For more information, see Mobile plugins for ServiceNow Agent.
2. Navigate to **All** > **Now Mobile App** > **Applet Launchers**.
3. Click the **Homepage** record.

   If prompted, click the link at the top of the page to edit the record.
4. Click the **Body** tab.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Launcher screen Homepage record



5. Click **Chat** under **Quick Action Button** to open the record.
   If you don't see a Chat entry, add it as follows:

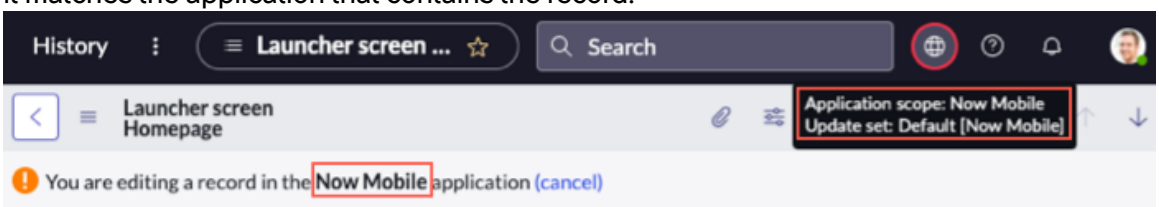   a. In the Unified Navigation bar, click the scope icon and change the application scope so that it matches the application that contains the record.



   b. Click the back button to return to the previous page.

   c. Click the **Homepage** record.

   d. Click the **Body** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

e. Under **Quick Action Button**, double-click **Insert a new row**.

f. Type `Chat`, and then press Enter or click the save icon.

g. Click **Update**.

6. Fill in the Chat form as follows.

Note:
If prompted, click the link at the top of the page to edit the record.

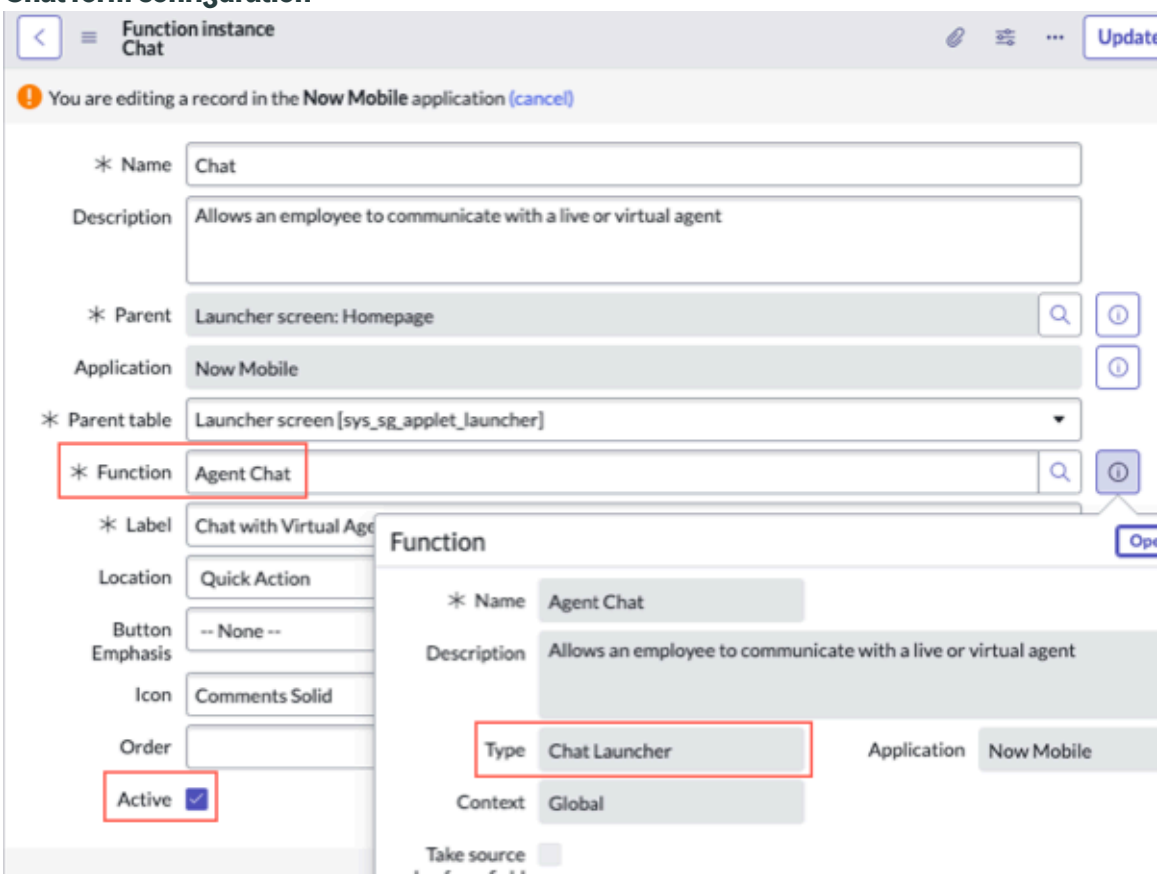
a. In the **Function** field, select **Agent Chat**.

b. Click the info icon ⓘ on the **Function** field and verify that **Chat Launcher** is set in the **Type** field (this is the default setting).

c. Select the **Active** check box.

d. Click **Update**.

Chat form configuration



Result

Depending on the device and the patch version of the server instance, end users can access the Virtual Agent chat icon in the bottom-right or top-right corner of the app. Tap the plus icon or the chat icon to start a conversation.

The topics you create in Virtual Agent Designer can be used in both the web and mobile clients, as well as any other channels you may configure. Virtual Agent output components are already

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

optimized for Android and iOS, including image and video cards, link unfurling, AI Search results, and Virtual Agent notifications.

What to do next

To enable Now Assist in native Virtual Agent, see Configuring assistants overview.

Now Mobile notification of unread chat and Virtual Agent messages

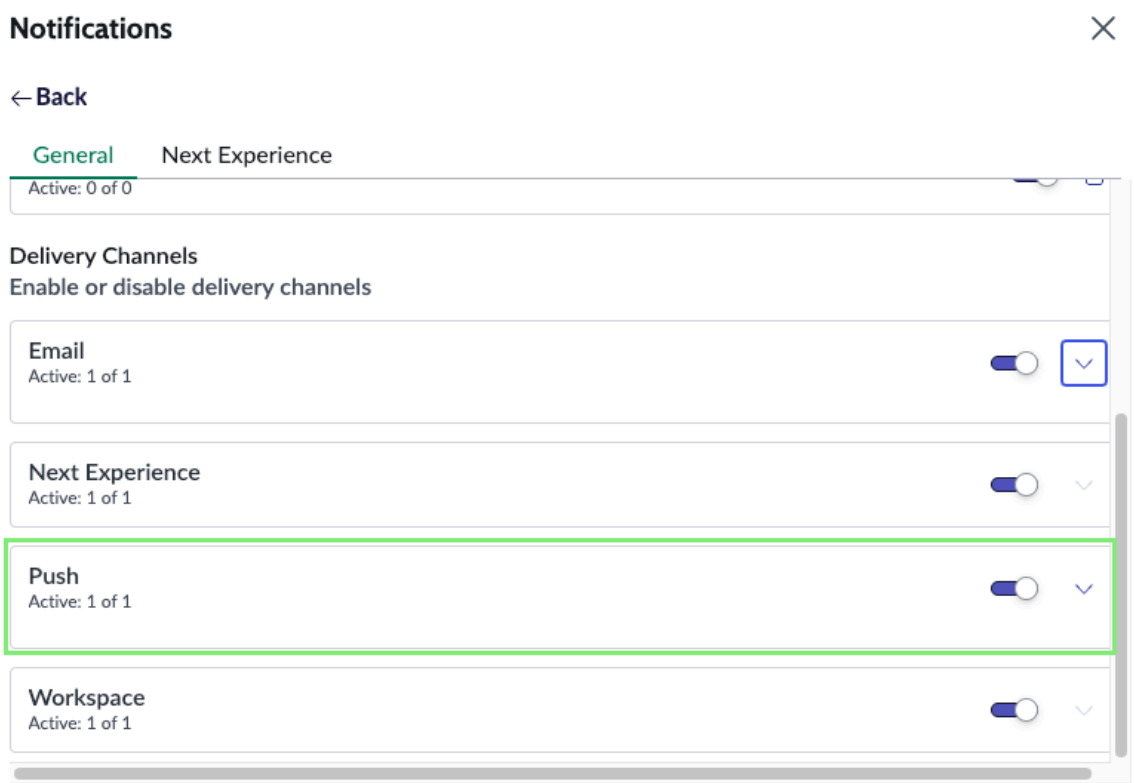
When Now® Mobile app users navigate away from the app after starting an active conversation, they can automatically receive Virtual Agent mobile push notifications informing them of new, unread chat messages and#Virtual Agent notifications that have arrived.

Now Mobile users might need to leave an active conversation for various reasons. They could be waiting for an available agent and decide to handle other tasks instead. Or, they could be engaged in a long-running (asynchronous) conversation and do not need to be online concurrently with an agent. Now Mobile users can check Virtual Agent push notifications to get timely information about their current conversations when they're away from the app. These push notifications enable them to stay engaged with live and virtual agents and avoid unnecessary conversation closures (timeouts).

Enabling Virtual Agent message push notifications

To receive Virtual Agent mobile push notifications, your users must enable push notifications for the Now Mobile app on their iOS or Android devices.

In base system instances, the Virtual Agent Message Push notification is automatically enabled for all Now Mobile users. Users can modify their notification preferences by navigating to **All** > **Self-Service** > **My Notification Preferences**.




How Virtual Agent mobile push notifications work

Virtual Agent push notifications display information about incoming, unread chat messages from agents and any Virtual Agent messages. The push notifications are listed in the notification

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

center (lock screen) of mobile devices. Users tap a push notification in the list to open the Now Mobile app and continue the corresponding conversation.

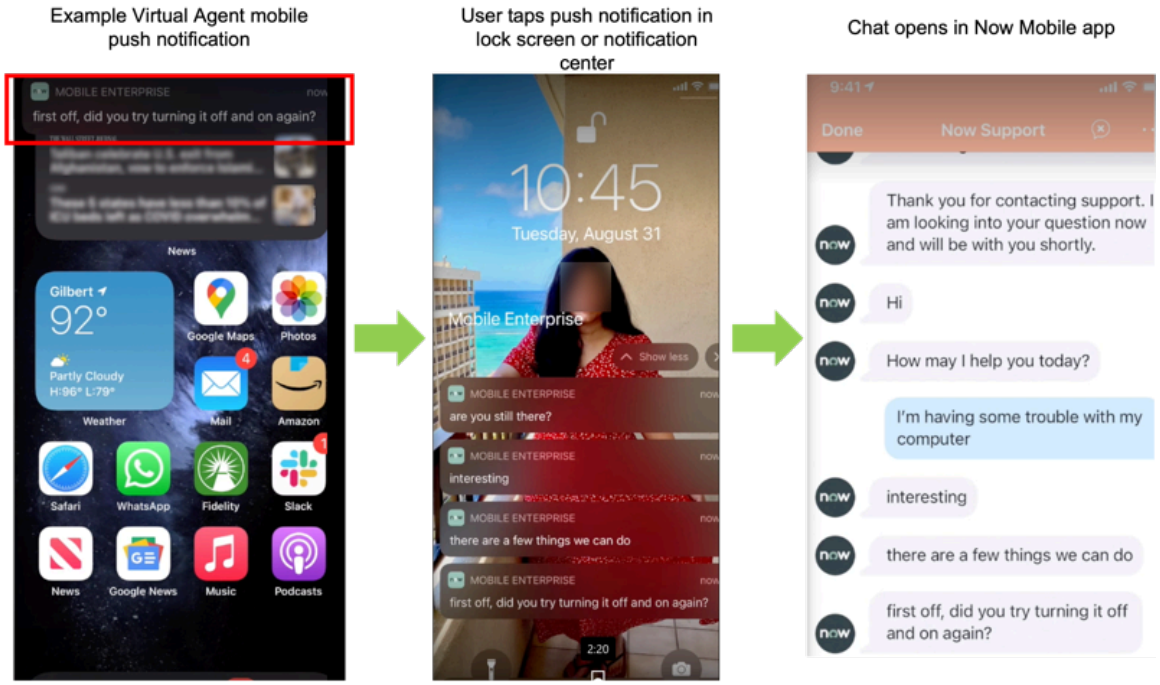Example Virtual Agent push notifications in the Now Mobile app



Note:
Virtual Agent push notifications are not displayed under the **notifications** tab in the Now Mobile app. These push notifications also do not generate associated badge numbers on the Now Mobile app icon. However, badge numbers are displayed on the Virtual Agent quick launch icon within the app.

To process unread chat or Virtual Agent messages and deliver them to Now Mobile users, the system does the following:

- Checks which user accounts are registered to receive push notifications.
- Determines the mobile clients (devices) that are not in use.
- Runs the *`Generate Virtual Agent Push Notification`* scheduled job every 60 seconds to:
  - Identify and batch new unread messages.
  - Add unread messages records to the Push Notifications [sys_cs_message_notification] table, which generates the Virtual Agent push notifications.
  - Delivers Virtual Agent push notifications to Now Mobile users away from the app.

  Depending on when the *`Generate Virtual Agent Push Notification`* scheduled job processes new unread messages, push notifications might not arrive in the order that they were generated, and it might take slightly longer than one minute for push notifications to arrive.

Virtual Agent push notification message content

The content of Virtual Agent push notification messages sent to Now Mobile users reflects the actual text from the live or virtual agent. If a text representation of the message, such as a rich control, cannot be generated, the text `New Message` is displayed instead.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
System action messages that are displayed to users during live chat or virtual agent conversations are not included in Virtual Agent push notifications or in the count of unread messages. The exception is the system message for the live agent timeout: `The conversation is timing out, are you still there?` This message is sent as a push notification since it is time-sensitive and informs users that the conversation might be closed if they do not respond.

View and modify Virtual Agent style templates

Virtual Agent provides optimized templates for the mobile experience. You can view and modify the style sheets in the Adapter Cards [sys_cs_adapter_card] table.

Before you begin
Role required: virtual_agent_admin or admin

Procedure

1. Click **All**, and then enter `sys_cs_adapter_card.list` in the navigation filter. The Adapter Cards page opens.
2. Click an entry in the **Card Name** column.
3. Click the name of the channel you want to view in the embedded list. For example, click **iOS** or **Android Device** to view the corresponding style sheet.
4. Make any changes in the **Template Definition** field.
5. Click **Update**.

Multiple active conversations for Virtual Agent

As of the Yokohama release, Virtual Agent (VA) features the ability to have multiple conversations at the same time, separated and directed by chosen context.

Overview of Multiple active conversations for Virtual Agent

Virtual Agent messages commonly follow one conversation with a shared history that persists on all VA clients, and thus all portals. For example, if you're conversing with Virtual Agent in a Service Portal (SP) portal context, the same conversation is shown in an Employee Service Center (ESC) portal. The multiple active conversations feature expands the reach of Virtual Agent by eliminating the one-conversation limit. By configuring their Virtual Agent conversations based on context, customers can choose to share or restrict any or all content between concurrent conversations on differing portals.

Each Virtual Agent conversation is fully independent, with no overlap between chats. For example, a conversation in SP will be entirely different from ESC. Each conversation also has its own transcript. You must set up context values for Natural Language Understanding (NLU) chats, while Large Language Model (LLM) chats are automatically configured for multiple active conversations based on each portal. An administrator can activate an LLM assistant for each portal by using guided setup configurations. (For more information on configuring Virtual Agent conversations, see Conversational Interfaces Guided Setup.)

Benefits of multiple active conversations

Previously, if a user was engaged in a conversation with a virtual agent, the chat would take place in a single context. Switching contexts involved a risk of exposing sensitive information by carrying over the entire chat history to the other portal. For example, if you have an HR conversation in the HR portal, then brought up an IT request, the chat continues in the IT portal. However, this request also brings the HR conversation history into the IT portal with it.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Alternatively, admins can activate the *skip_load_history* system parameter to avoid exposure risk, but the initial conversation closes when the chat continues on the IT portal.

To exclude conversation history between portals, use the following procedure:

1. Navigate to **All** > **Service Portal** > **Agent Chat**.
2. Select the Agent Chat Configuration for which you want to set the context value.
3. In the Server Script window, add the line `skip_load_history: true` to load conversations without the conversation history.

Note:
The script syntax may differ depending on the configuration.

The multiple active conversations feature bypasses the skip_load_history method, and enables continuous engagement with Virtual Agent chat, by routing selected notifications and topics to their configured contexts only. Users don't need scripting or extensive customization, and they can conduct conversations without interruption or information exposure in the wrong context. With portals and notification contexts aligned, users receive information appropriate to their context, including incident updates and other relevant data.

Considerations for using multiple active conversations

Implementing multiple active conversations should happen in the following order: Admins should define portal consumer context values, set or update a default context, activate the multiple active conversations system, and finally, configure notifications sent to portals. However, if the delivered Service Portal context is sufficient, admins can skip configuring and setting values.

Topics can be created within a portal context. If the portal context maps to consumer account context, then topics map to consumer account contexts.

Set NLU portal consumer context values for multiple active conversations

Use context values to determine which portals receive certain messages and notifications for users in that portal.

Before you begin

Activate Virtual Agent. For more information, see Activate Virtual Agent.

Configure your Agent Chat system for your portal or portals. See Configure Agent Chat in a portal for more information.

Role required: virtual_agent_admin or admin

About this task

With consumer context added to a portal configuration, that portal acts as context for multiple active conversations with Virtual Agent.

Note:
These instructions are for configuring Natural Language Understanding (NLU) conversations. Large Language Model (LLM) conversations are configured for multiple active conversations based on portals, with no configuration necessary.

Procedure

1. Navigate to **All** > **Service Portal** > **Agent Chat**.
2. Select the Agent Chat Configuration for which you want to set the context value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. In the Server Script window, add the line `consumer_account_context: 'VALUE',` replacing `VALUE` with your desired consumer account context.

Server script example



Note:

The syntax of the account context line depends on how the configuration is set up. For example, some configurations use an equal sign versus a colon. In the case of the *esc* context, there are also two relevant chat configurations.

Values that are defined or created in a script aren't displayed to an admin as a selection for use elsewhere in the system.

4. Select **Update**.

What to do next

Set a default context for your conversations. See Set a default NLU context value for multiple active conversations for more information.

Set a default NLU context value for multiple active conversations

Use consumer account context values to define where Virtual Agent messages are directed by default when using the multiple active conversations feature.

Before you begin

Define values for portal consumer contexts. For more information, see Set NLU portal consumer context values for multiple active conversations.

Configure context values that align Virtual Agent and your portals. See Configure Agent Chat in a portal for more information.

Role required: virtual_agent_admin or admin.

About this task

You can create as many context values as you need. One consumer account context must always be set to `Yes` to provide a default content area. The default acts as a fallback for the chat widget when the portal setup doesn't include context. The default is also used as the context for mobile conversations, which only support one conversation at a time. Context values are stored in the Conversation Consumer Account Context [sys_cs_consumer_account_context] table. (The CS Consumer Account [sys_cs_consumer_account] table Installed with Virtual Agent shows whether third-party users in your instance have a context assigned to them.)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
These instructions are for configuring Natural Language Understanding (NLU) conversations. Large Language Model (LLM) conversations are configured for multiple active conversations based on portals, with no configuration necessary.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Virtual Agent**.
2. Under **multiple active conversations**, select **View settings**.

   Note:
   The delivered default value for consumer account contexts is `sp`.

3. Select **New**.
4. On the form, fill in the fields.

Consumer Account Contexts form

Field	Description
Name	Name of the context value (also used as reference in the backend).
Short Description	Description for the context (displayed on the Conversational Interfaces card when the default value is shown).
Is Default Consumer Account Context	Option to make this context value the default for your Virtual Agent conversations. **Note:** Only one consumer account context can be set as the default. Setting a new one as a default automatically resets the last context to `False`.

5. Select **Save**.

What to do next
Activate the multiple active conversations system. For more information, see Activate multiple active conversations in Virtual Agent.

Activate multiple active conversations in Virtual Agent

Use the multiple active conversations system, in combination with defined context values and a default portal, to handle concurrent conversations with Virtual Agent.

Before you begin
A default context is necessary to start out with the multiple active conversations system. See Set a default NLU context value for multiple active conversations for more information.

Role required: virtual_agent_admin or admin

About this task
Virtual Agent includes settings that let multiple conversations be carried out with the same user across multiple portals. Users can also receive updates and notifications sent to any number of portals (determined by an administrator) anywhere in their instance on ServiceNow AI Platform.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The multiple active conversations feature is inactive by default in Virtual Agent until toggled on. As of the Vancouver release, multiple active conversations are available through the chat widget; other channels may be incorporated in future.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Virtual Agent**.
2. Under **multiple active conversations**, select **Manage settings**.
3. Select **Activate**.
4. Select **Save**.

What to do next

With multiple active conversations activated, you can also send notifications from Virtual Agent to portals using the feature. See Route Virtual Agent NLU notifications through multiple portals for more information.

Route Virtual Agent NLU notifications through multiple portals

Send notifications and other Virtual Agent messages through as many portals as desired.

Before you begin

The multiple active conversations feature includes the ability to send notifications on incidents. You can configure your notifications to go to only one conversation on a specific portal, or to any number of concurrent conversations.

Activate multiple active conversations in Virtual Agent

Configure a delivery channel for Virtual Agent notification

Role required: virtual_agent_admin or admin

Note:
These instructions are for configuring Natural Language Understanding (NLU) conversations. Large Language Model (LLM) conversations are configured for multiple active conversations based on portals, with no configuration necessary.

Procedure

1. Navigate to **All** > **sys_notification_va_content.list**.
   A list of Virtual Agent Notification Contents appears.
2. Select the Notification Content that you want to send through multiple portals.
   For example, to receive comments on Incidents, select the Incident commented Notification Content.
3. Under the **Channels** tab, confirm that the Consumer account contexts pane is available after activating multiple active conversations for the chat widget.
   The Default Consumer Account Context will be visible in the pane.

   Note:
   This string should also match the portal where the conversation will be directed. For example, the SP portal will also be the name of the Consumer account context.

4. To add a context, on the **Select target record** line, input the string matching the desired Consumer account context.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
This string should also match the portal where the conversation will be directed. For example, the SP portal will also be the name of the Consumer account context.

5. To remove a context, select it in the Consumer account contexts pane, then select the **X**.
6. Select **Update**.

Result
Messages with multiple contexts will now be sent through Virtual Agent to users at their matching portals.

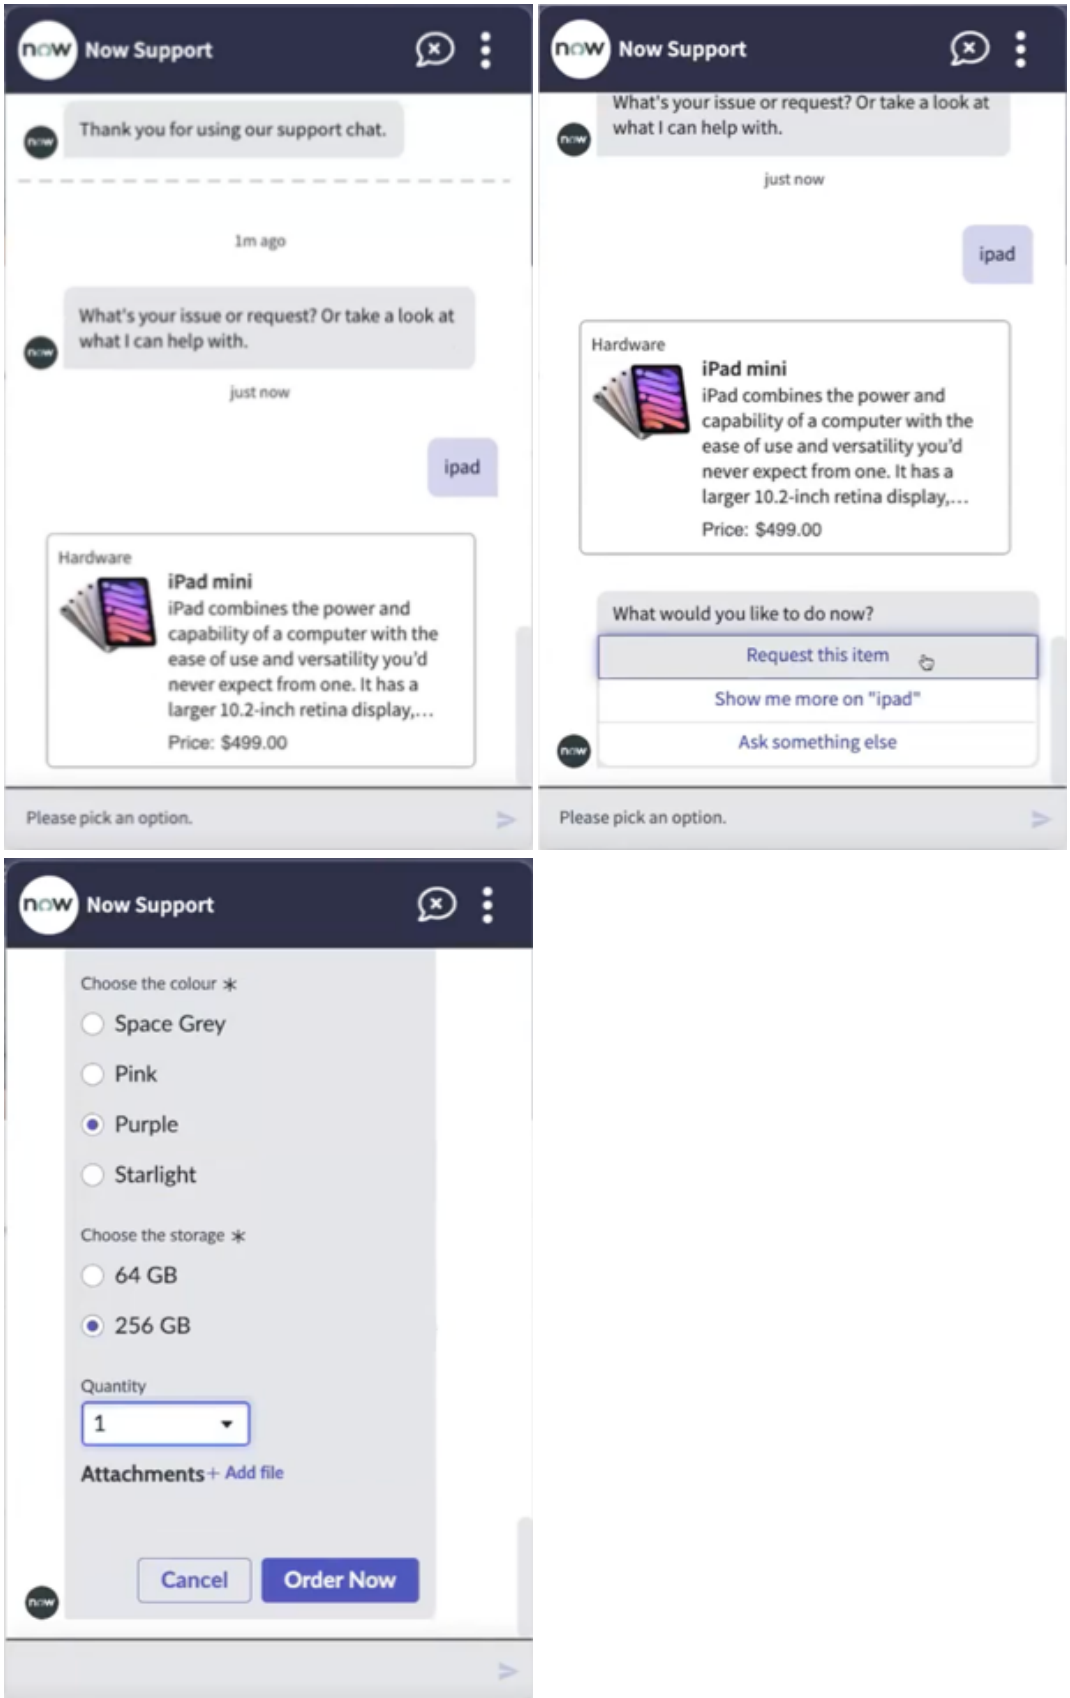
Catalogs and Autopilot for Virtual Agent

Use Catalogs to search for and request services and products in chat widget conversations.

The Catalog feature lets you use natural language to search for and request service items in a Virtual Agent conversation. The Virtual Agent recognizes your request and presents you with the best answer. You complete the entire order in the chat, without going to a new page.


For example, if you enter `iPad`, the Virtual Agent shows you the service catalog info for an iPad. You can request the item, ask for more information on the item before deciding, or ask for something else.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




If you choose to order the item, you select any available options. When you complete the order, the catalog card closes, and Virtual Agent replaces it with a Requested Item record and a link. Selecting the link takes you to the record.

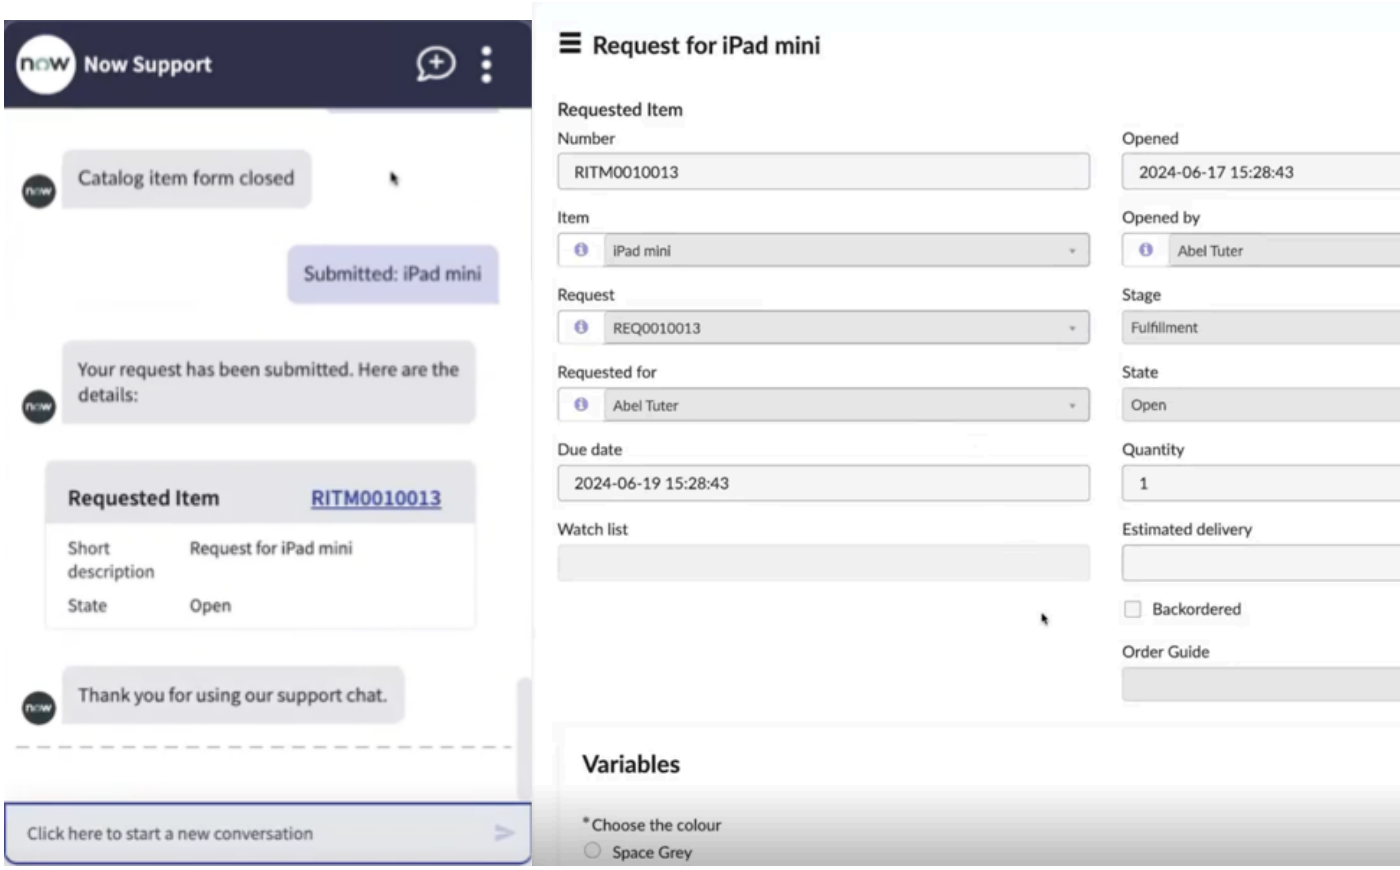© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



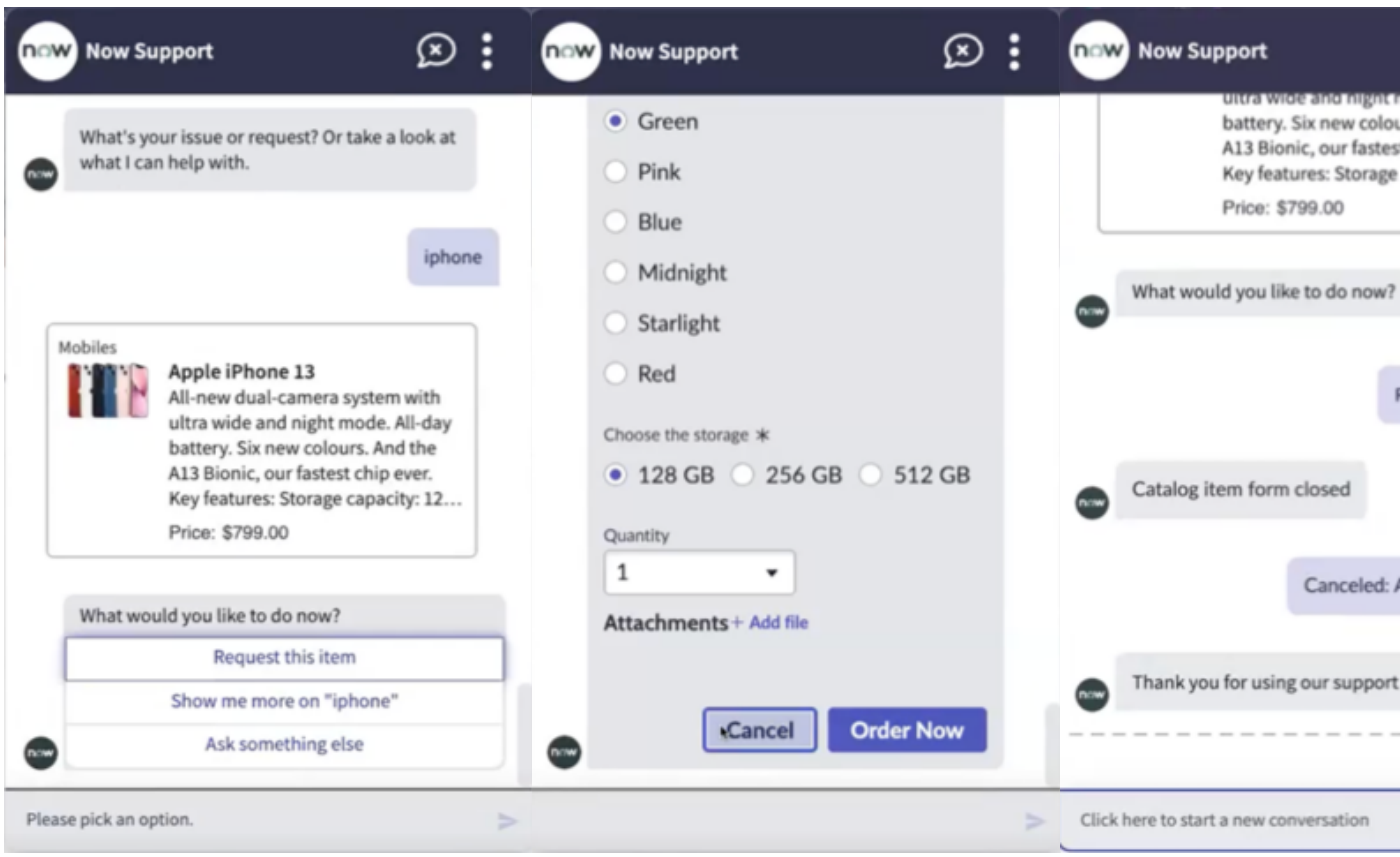If you cancel the order instead, you receive a message confirming the cancellation. For example, if you enter `iPhone` and request the item, then cancel the order, the request closes and the Virtual Agent doesn't create a record.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Catalogs for Virtual Agent are separate from Now Assist and Multi-turn catalog ordering. For more information on how Catalog search results work based on AI Search, see Genius Results. For information on Multi-turn catalog ordering instead, see Using Now Assist in Virtual Agent.


Catalog Live Agent Autopilot Experience

Autopilot is available for live agents in the CSM Workspace, and allows the live agent to assist a customer with a Catalog order as well as view all information on the customer's transaction.

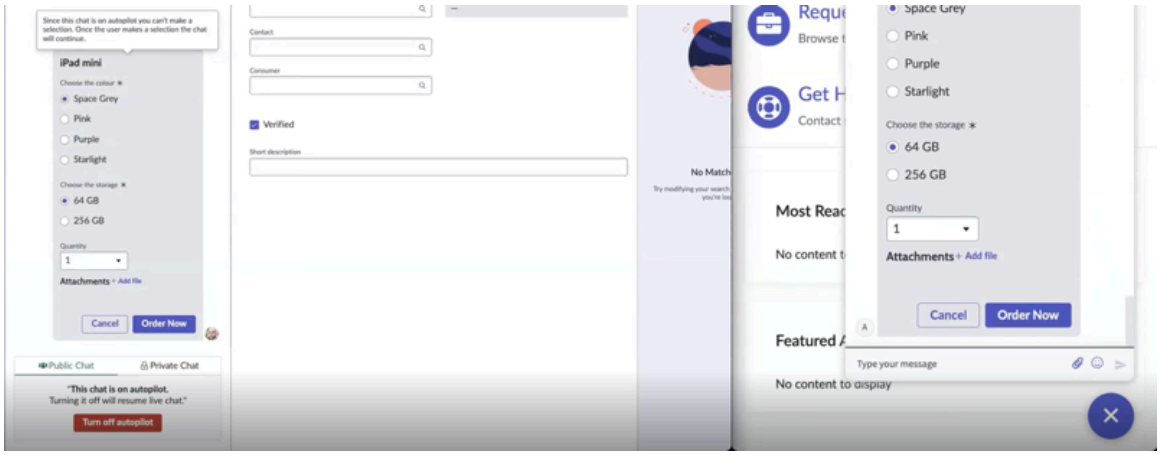To use the feature, the live agent enters `/autopilot "[topic]"`, substituting `[topic]` for the catalog item topic name. The catalog item appears in the customer's chat window, and they choose any preferences for the order as usual. The live agent can see the full catalog order in the chat panel, but cannot change any details of the order themselves.



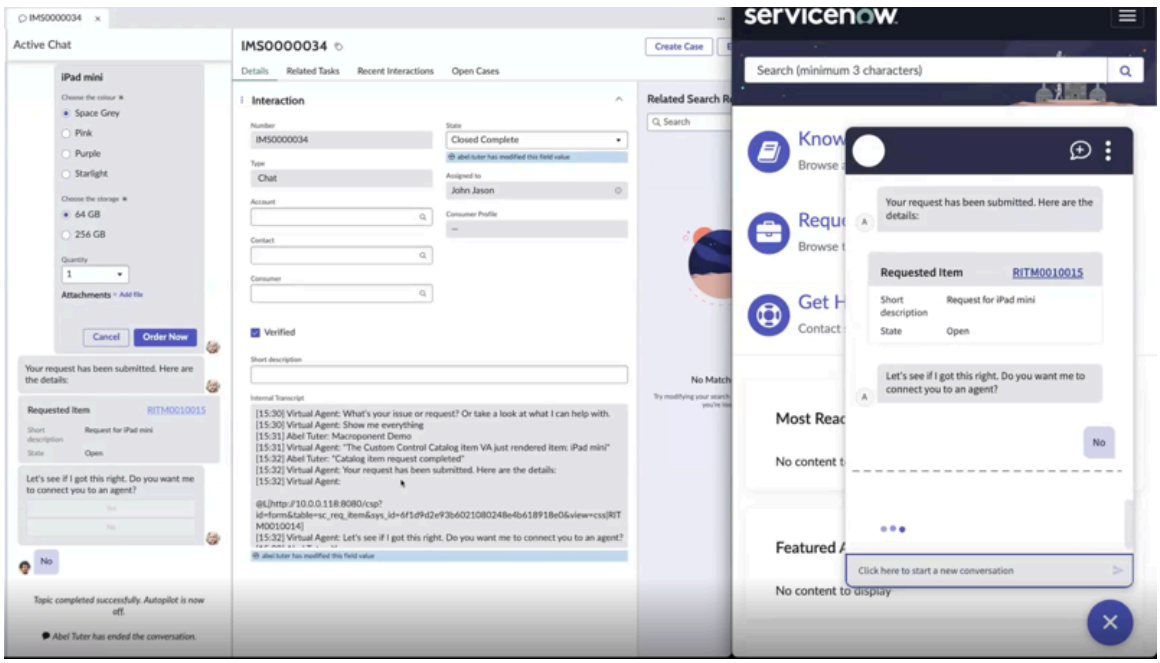Once the customer completes the order, the chat panel displays the Requested Item record as usual. The live agent sees the full transcript of the customer's transaction, including the full catalog card and Requested Item record.



Set up Catalog branding

Customize the appearance of Catalogs in Virtual Agent to match your business' branding.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin, virtual_agent_admin

Download Theme Builder from the ServiceNow Store and activate the plugin (sn_theme_builder). For more information, see Activate a plugin.

About this task
Virtual Agent uses the Branding Setup [sys_cs_branding_setup] table to define branding colors, but Catalogs don't inherit branding colors. Instead, Catalogs use cascading style sheets (CSS) variables defined in the UX Themes [sys_ux_theme] record on the instance.

Procedure
1. Navigate to **All** > **Themes** > **Theme Builder**.
2. Create a new theme by providing primary and secondary colors.

   Note:
   You can match your colors to the Chat Header Background and Chat Background colors in the branding record of your choice. For more information creating themes, see Create a theme with Theme Builder.

3. Save your theme.
4. Add your theme to the portal configuration.
   a. Navigate to **All** > **Now Experience Framework** > **Themes**.
   b. Select the record for the theme you want to import.
   c. Under the Additional Actions icon, select **Copy sys_id**.
   d. Navigate to **All** > **Service Portal** > *Agent Chat*.
   e. Select the portal configuration where you want to add your branding theme, and add the following line to the server script, including the sys_id from Step 4c.
   For example, if your sys_id is `0be48eb1eba0011090fa99602a522843`, you add:

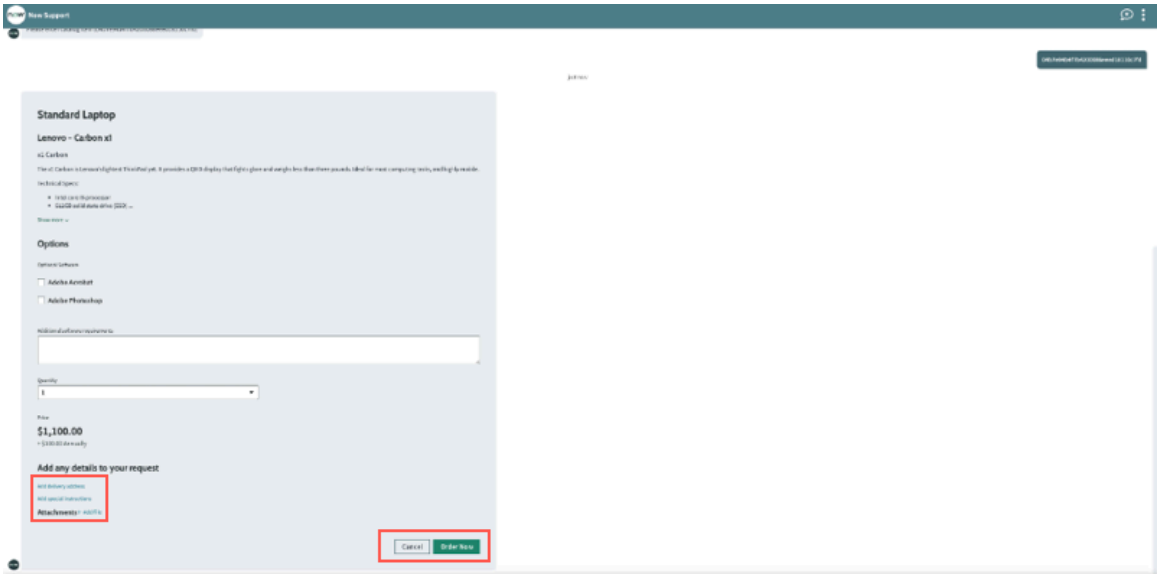
```
macroponent_theme: '0be48eb1eba0011090fa99602a522843'
```

5. Add a variant theme to the portal configuration if desired.
   a. Repeat Steps 4a and 4b.
   b. Under the **Compositional: App theme** tab, open your desired *Style* whose *Type* is `Variant`.
   c. Repeat Steps 4c and 4d.
   d. Select the portal configuration where you added your branding theme, and add the following line to the server script, including the sys_id from Step 5c.
   For example, if your variant theme's sys_id is `1df59fc2fcb1122101gb00713b633954`, you add:


```
macroponent_theme_variant: '1df59fc2fcb1122101gb00713b633954'
```

6. Select **Update** to save the configuration.
7. Navigate to the portal where the configuration is used.
   For example, if you updated the *ESC Chat* portal configuration, navigate to Employee Service Center.
8. Run the catalog topic in the portal chat to load its configuration and reveal any elements that need branding.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



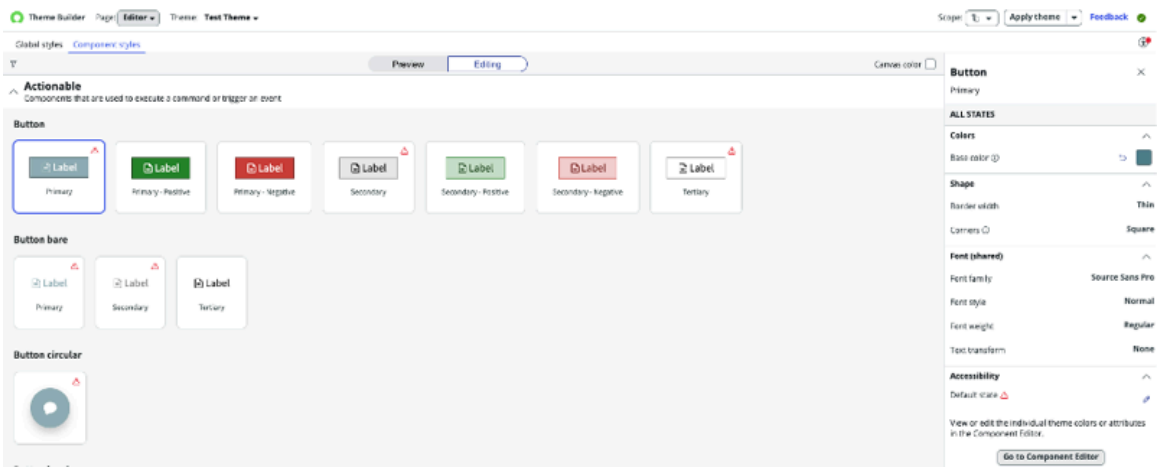
9. Navigate to **All** > **Now Experience framework** > **Themes** > *Theme Builder*.
10. From the drop-down menu, select **Manager**, then select your created theme.
11. Under the **Component styles** tab, select **Edit**.



12. Select one of the elements needing branding found in Step 8.
13. In the palette sidebar, set the element's hex code color to match the color from your branding record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

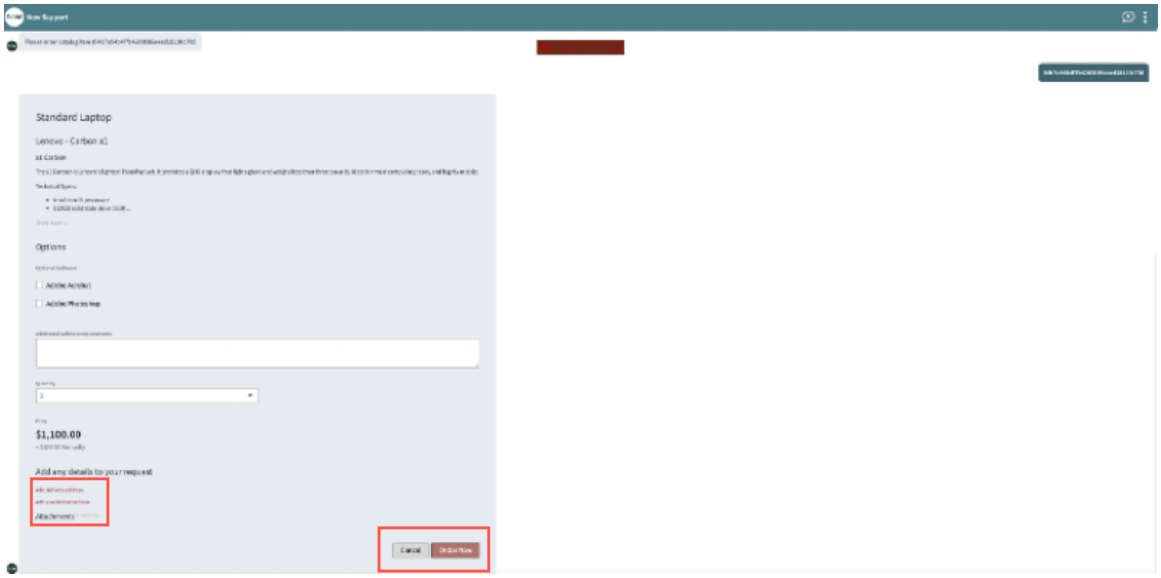14. Repeat Steps 12 and 13 until you update all elements.



Result
Catalog color themes now match your branding.

Configuring Virtual Agent notifications

Send ServiceNow notifications directly to users via the Virtual Agent chatbot on supported messaging channels. Notifications can be simple informational messages for review, or actionable messages with buttons that users can select to perform certain actions.

Notifications are sent to recipients via the Virtual Agent bot in the chat widget, pre-built messaging integrations (for example, SMS Twilio, Slack, Microsoft Teams, Workplace from Facebook services, and Facebook Messenger messaging platform), and custom chat integrations.

Notification functionality is included with the Glide Virtual Agent (com.glide.cs.chatbot) plugin and also with Virtual Agent Lite, which is included with the ServiceNow AI Platform. However, Virtual Agent Lite users can receive only simple notifications, while Virtual Agent users can receive both actionable notifications and simple notifications. Users with no associated ServiceNow profiles in the [sys_user] table can receive non-actionable Virtual Agent notifications.

How Virtual Agent notifications work

As an admin, you can define different types of notifications that have specific layouts and content. You can also customize certain aspects of notification content, such as the message heading and message content.

Simple notifications

The content can be a standard informational message, record card, or an image card. Simple notifications are delivered to users immediately, even when they're engaged in a conversation with a virtual or live agent.

Actionable notifications

These notifications have buttons that enable the recipient to perform certain actions, such as adding a comment or requesting a live agent. When you create an actionable notification, you associate an action with a published Virtual Agent topic, a scriptable action, or a flow action that handles the action to be performed. To encourage users to act on a notification, admin users can choose to remove

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

the **Skip** option. If the user still doesn't act, the conversation will be completed as inactive.

> **Note:**
> The notifications are actionable only when there is an associated link action to its content.

Actionable notifications are delivered to users when they're not in an active conversation with a virtual or live agent. A queue stores actionable notifications that are waiting to be delivered, for up to eight hours by default.

Actionable notifications are best suited for conversational purposes, such as:

- Password reset
- Incident update
- Approval request
- Course survey
- Service follow-ups and surveys
- Employee onboarding follow-ups

When a topic conversation completes, Virtual Agent automatically prompts the user to view pending notifications (if any). Admins can suppress this prompt by setting the *com.glide.cs.show_pending_notifications_prompt* property on the System Properties table to false.

Notifications with dynamic content

You can personalize Virtual Agent notifications by adding dynamic content to message headers and messages. For record- and event-based notifications, you use parameter substitution to specify the variables that identify the record values (from the notification table) to be included in the content.

Advanced notifications with dynamic content

You can create Virtual Agent notifications that use a script to add dynamic content in message headers and messages. The content can come from multiple data sources and include third-party services, such as URL shortening.

Variables in notifications

You can pass information to a completed survey when the notification is triggered. Context is defined by the script found in the notification topic. This script cannot be modified.

```
vaVars.global_notification_context =
  JSON.stringify({
    'tableName': table_name,
        'tableSysId': sys_id,
        'actionId': actionId,
        'eventParm1': eventParm1,
        'eventParm2': eventParm2});
```

Notifications are triggered by records updates or by creating a platform event in the event queue. `actionId` is the ID number for the action. The platform event takes in the `eventParm1` and `eventParm2` parameters. If a notification is triggered, the parameters are passed to the topic. To capture the notification incident number in your topic, use the following script.

```
var notificationContext =
 JSON.parse(vaVars.global_notification_context);
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
vaVars.sysId = notificationContext.tableSysId;
varVars.tableName = notificationContext.tableName;
```

Notification processing

Virtual Agent notifications have certain processing controls and limitations, such as the maximum number of recipients allowed per notification and the number of notifications that can be sent per day. The following table identifies these processing controls and the system properties that can be used to change their default values.

Virtual Agent notification processing controls and limitations

Notification processing control or limitation	Default value	Associated system property
Maximum number of recipients per notification per channel	100,000 recipients	*com.glide.cs.per_notification_us* Max limit: None **Note:** • If there are more recipients than the configured number, warning messages are displayed to reduce the recipient list while you're configuring the notification and when the notification is delivered. The warnings are displayed only when there is Virtual Agent content associated with the notification. • Recipient limits may apply to third-party delivery channels based on the level of service or subscription.
Maximum number of notifications per day, per channel	100,000 notifications	*com.glide.cs.daily_notification_* Max limit: None **Note:** Rate limits may apply to third-party delivery channels based on the level of service or subscription.
Lifespan of actionable notifications (a queue stores	8 hours	*com.glide.cs.idle_actionable_not*

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Virtual Agent notification processing controls and limitations (continued)

Notification processing control or limitation	Default value	Associated system property
actionable notifications that are waiting to be delivered)		**Note:** You can specify a maximum value of 72 hours.
Allow access to notification card content and parameter substitutions in notification headings and messages	False (not enabled)	`com.glide.cs.notification_record` **Note:** This property does not apply to advanced notifications.

Notification experience for end users

The notification experience for end users depends on the type of notification that they're receiving. End users can also manage how their notifications are delivered by subscribing to or unsubscribing from notifications.

- Simple message notifications - These notifications are delivered immediately to the end user, even when the user is chatting with a bot or live agent. The user sees the incoming message but can continue with the current conversation.
- Actionable notifications - These notifications are delivered only when the user is not in an active conversation with a virtual or live agent. When users complete their conversation with a bot or live agent, they can use the **Show notification** command to view a list of pending notifications, which displays the heading of each notification. Users can select a pending notification to review, then perform the appropriate action for the notification, or skip the action.

User subscriptions for notifications

End users can subscribe or unsubscribe to notifications on the channel that they're using. For example, the chat menu provides a toggle switch that users can use to subscribe or unsubscribe to notifications on the web channel.

In the conversational integrations for Slack, Microsoft Teams, Workplace from Facebook services, end users manage their notification subscriptions by using the **Subscribe** and **Unsubscribe** commands.

What to do next

Create Virtual Agent notifications

Create a notification that is sent directly to users via the Virtual Agent chatbot. The notification specifies when users receive the notification (triggers for the notification) and who receives it (recipients with and without accounts in the User [sys_user] table).

Before you begin
Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications** and select **New**.
2. On the form, fill in the fields.

Notifications form

Field	Description
Name	Name of the notification.
Table	Table to receive notifications about.
Application	Application scope of the notification.
Type	Type of the notification.
Category	Category of the notification. For Virtual Agent, it's chat.
Active	Option to activate the notification. The notification is active by default.
Trigger	
Triggered By	System action that triggers the notification. You can choose to send the notification after a record is changed or after an event is triggered.
Inserted	Option to send the notification after a record is inserted. This field appears when you select **Record Change** in the **Triggered By** field.
Updated	Option to send the notification after a record is updated. This field appears when you select **Record Change** in the **Triggered By** field.
Event	Event that triggers the notification. For example, to send a notification after an incident is closed or resolved, you would select the *`incident.inactive`* event. By default, this event is logged in the system each time a user resolves or closes an incident. This field appears when you select **Event** in the **Triggered By** field.
Conditions	Filter to specify the table records that users receive notifications about. For example, to send notifications about top-priority incidents, you would select **Incident [incident]** in the **Table** field and set the conditions to **[Priority] [is] [1 - Critical]**.
Recipients	
Users	Users who receive the notification. Add users from the static User ([sys_user] table or its extension tables) to define recipients for the notification.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: You can define the recipients for notifications only for chat channels using this field.
Recipients in fields	Record fields that include recipients who receive the notification. For example, to send the notification to the record assignee, select **Assigned to**. Add recipients from the User [sys_user] table or its extension tables to trigger the notification. **Note:** You can define the recipients for notifications for both chat channels and messaging channels using this field.
Is originating user included?	Option to include the user who changed the record or triggered the event.

3. Select **Submit**.

Note: Use the **Submit** button for Virtual Agent notifications. The **Submit and Add Common Content** button is for other use cases.

What to do next

- Create additional recipients for Virtual Agent notifications.
- Define the notification contents.

Create additional recipients for Virtual Agent notifications

Create and define additional recipients for a Virtual Agent notification to be delivered on chat channels or messaging channels.

Before you begin

Role required: admin

About this task

- The admin can define recipients under the Additional Recipients related list for messaging channels.

  Note: Selecting the channel (chat channel or messaging channel) is a prerequisite to defining the content for the notification.

- The admin can define recipients under the Additional Recipients related list for chat and messaging channels using a dynamic condition.

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications** and select the notification that you want to create additional recipients for.
2. In the Additional Recipients related list, select **New**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. On the form, fill in the fields.

Additional Notification Recipients form

Field	Description
Notification	Identifier of the notification. The notification name is auto-populated.
Recipient Table	The scope of the recipient record for the notification. The **Recipient Table** field is auto-populated with the user [sys_user] as the default value.
Application	The scope of the recipient record.
Active	Option to activate the notification for the defined additional recipients.
Static Recipients	Names of the recipients from the scope of the selected recipient table.
Dynamic Recipients	
Dynamic Conditions	Dynamic filter conditions for the defined recipients. The dynamic condition is applicable for both messaging and chat channels. This dynamic condition enables you to define the recipients list for a group of users to send a notification. Click the refresh icon next to the **records match condition** link to update the exact number of records matching the latest filter condition. By default, it shows the total number of records in the current table. **Note:** Only one active record can be added for a particular recipient table. If you want to add another record for the recipient table, you must deactivate the current record.

4. Select **Submit**.

Define Virtual Agent notification contents

Create the content for a Virtual Agent notification delivered in a chat or messaging channel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- Images for image cards must be 400 pixels wide or larger and must be in .jpg, .png, .bmp, .gif, .ico, or .svg format.
- If you're upgrading from an earlier release and want ACLs observed for data displayed in record cards and parameter substitutions in chat notifications, set the *com.glide.cs.notification_record_access_check* system property to true. The default value for this system property is false, which means that data is delivered regardless of the user's access level.

  Note:
  This property does not apply to advanced notifications.

- Role required: virtual_agent_admin or admin

About this task

You can personalize Virtual Agent notifications by using parameter substitution to add dynamic content to the message header and message. When adding dynamic content to your notifications, you specify the variables that identify the record values to be included in the content. You can add dynamic content to the following types of notifications:

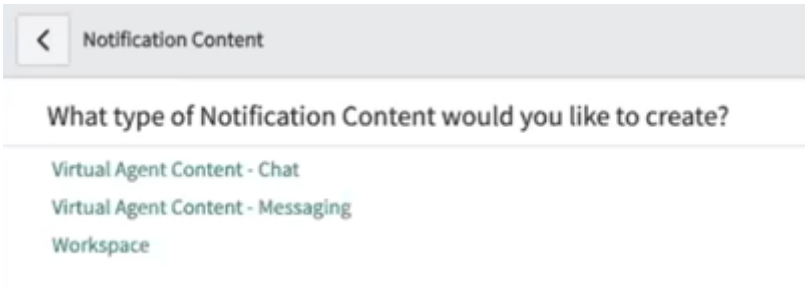
- Record-based notifications - Use the `${<variable_name>}` format in your content to specify a variable that represents a record value from the table used for the notification. For example, if you want to customize the message heading for a notification that uses the Incident table and you want to include the incident **Priority** in the message, use the **Select variable** column to select the variable for incident priority.
- Event-based notifications - Use the `${event.parm1}` and `${event.parm2}` format to specify event-specific parameters that pass record information in the notification content. To learn more about event parameters and how they work, see Events.
- Advanced notifications - Modify a script provided for advanced notifications to specify dynamic content from different data sources and identify third-party services, such as URL shortening for streamlining links in the content.

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications** and select the notification for which you're defining or updating content.
2. Do one of the following:
   - If you're defining new content, navigate to the **Notification Contents** related list, select **New Provider Content**, and go to step 3.
   - If you're updating content, navigate to the **Notification Contents** related list, select the content to be updated, and go to step 4.
3. Select the Virtual Agent content type:
   - **Virtual Agent Content - Chat**: The notification is for chat channels.
   - **Virtual Agent Content - Messaging**: The notification is for a messaging channel, such as SMS.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Notification content




4. Provide or update the notification content:

a. On the form, fill in the fields for the chat or messaging notification:

Notification Content - Virtual Agent Chat or Virtual Agent Messaging

Field	Description
Name	Name of the notification content.
Notification	Notification that is associated with the content. This field is populated automatically with the notification that you created.
Type	Notification layout: ▪ **Simple**: A message-only notification, that contains information for review. ▪ **Record card**: A notification that contains information about a particular record in a table. ▪ **Image card**: A notification that contains images.
Table	(For Record Cards) Table to receive notifications about. This field is populated automatically with the table defined in the notification.
Fields	(For Record Cards) Fields to be displayed in the notification. For example, if you select **Comments and Work notes**, the notification includes the comments and work notes that users have added to the record.
Application	Application scope of the notification content.
Active	Option to activate the notification content.
Enable link	(For Record Cards) Option to add a link to the record.
Advanced	Option that opens the script editor for entering a script that returns dynamic content for notification heading and message content pulled from multiple data sources.
Script	(For advanced notification content) Script that you can edit to specify dynamic content from various data sources, including third-party services (such as URL shortening), to be used in the message heading and message content.
Message heading	Text that appears at the top of the message. The default message heading is: `A notification has arrived. You can continue the conversation after viewing the notification.`

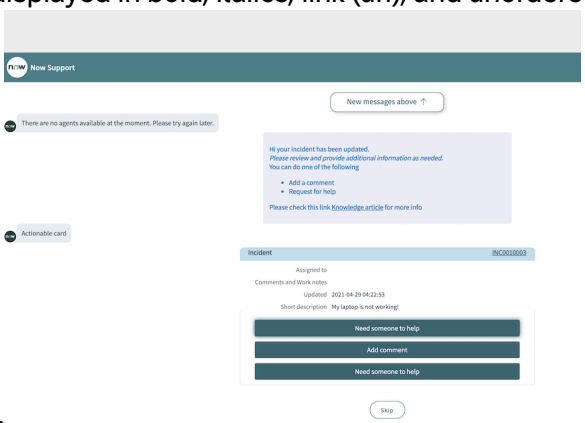© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	If you want to create a custom heading with dynamic content, enter the heading text and specify the variables used in the text: ▪ For record-based notifications: Expand the **Select variables** column and choose the variables for the record values to be included in the heading. The variables map to records in the table used for the notification. For example: `An incident has been assigned to you with Priority: ${priority}` ▪ For event-based notifications: Specify the `${event.parm1}` and `${event.parm2}` variables to identify event-specific parameters that pass record information in the notification content.
Message	Content of the message with rich text format. If you want to create a custom message with dynamic content, enter the message text and specify the variables used in the text: ▪ For record-based notifications: Expand the **Select variables** column and choose the variables for the record values to be included in the message. The variables map to records in the table used for the notification. For example: `Here's a brief description of your assigned incident: ${short_description}` ▪ For event-based notifications: Specify the `${event.parm1}` and `${event.parm2}` variables to identify event-specific parameters that pass record information in the notification content. A notification message defined with rich text format is displayed in bold, italics, link (url), and unordered  list. When users click the URL in the message, they are redirected to the destination as per the portal configuration.
Image Source	(For Image Cards) Option for selecting the image to be displayed in the notification: ▪ **Upload image**: Add the image by uploading. ▪ **URL**: Specify the URL for the image.
Image	(For Image Cards) Image displayed in the card.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	▪ To add the image, select **Click to add**. From the file finder, choose your image file and select **OK**. ▪ To change the image, select **Update**. From the file finder, select the new image file and select **OK**. ▪ To remove the image, select **Delete**. The file is immediately deleted.
Image alt text	(For Image Cards) Alternative text for the image to be displayed in the card.

Note:
To create or update the messaging notification details, navigate to the **Delivery Channel** related list and complete the form. For more information, see Configure a delivery channel for Virtual Agent notification.

b. Select **Submit** or **Update**.

What to do next

- To configure a delivery channel, see Configure a delivery channel for Virtual Agent notification.
- If you're creating an actionable notification, see Define the actions.

Configure a delivery channel for Virtual Agent notification

Configure a delivery channel for Virtual Agent notifications by specifying the messaging channel information to send notifications to users.

Before you begin

Ensure that a messaging channel is configured in your instance. Virtual Agent admins can only select one or more chat channels for the notification from the list of chat channels associated with the instance.

Role required: virtual_agent_admin

About this task

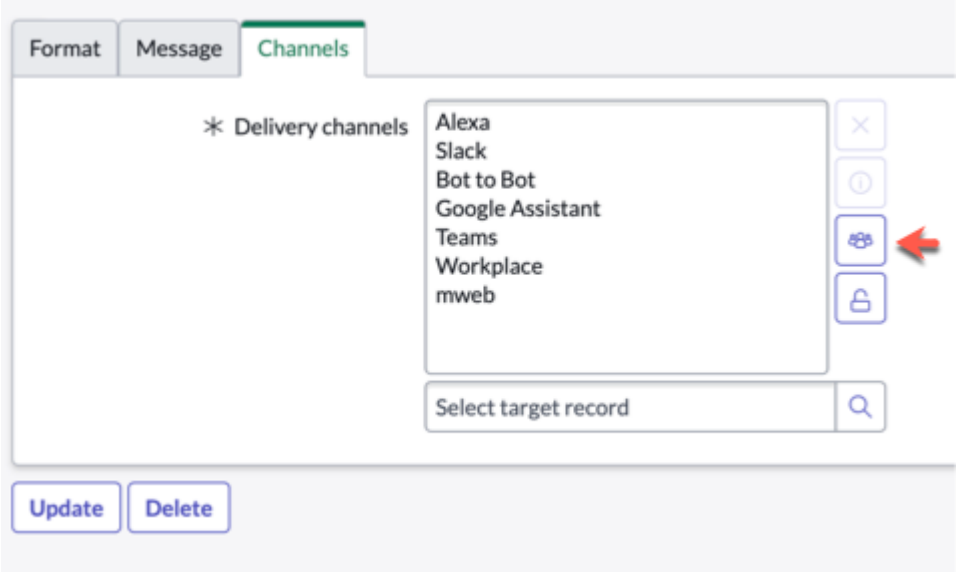
Use the delivery channel to support multiple channels for the same notification content.
The procedure to configure delivery channels depends on the channel type. There are two notification channel types: Messaging channels and chat channels. For more information about channels, see Channels in Conversational Interfaces.

Delivery channels are also part of multiple active conversations in Virtual Agent. See Route Virtual Agent NLU notifications through multiple portals for more information.

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications**.
2. Select the notification for which you want to define or update content.
3. In the notification Contents related list, open the notification content.
4. Follow the procedure according to the channel type for the notification that you're configuring.
   - To update delivery channels for messaging content, select **New** in the Delivery Channels related list.
   - To update delivery channels for chat content, select the **Add/Remove multiple** option in the Delivery Channels related list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Use the arrows to add or remove specific delivery channels from your Selected Delivery Channels list. When you've defined all applicable delivery channels, select **Save**.

Note:
The mweb channel is for the web client and the NASS channel is for enhanced chat. If no specific chat channel is defined, notifications are triggered to all available chat channels by default. Virtual Agent admins can modify the chat channels associated with a notification at any time.

5. On the form, fill in the fields.

Delivery channel form

Field	Description
Notification Content	Reference of the notification content pre-populates for the delivery channel.
Active	Option to activate the delivery channel.
Connection	Connection record for the messaging channel configured in the instance.
Send From	Provider application for the selected messaging channel.
Send To (Table)	Name of the table that you want to send the notifications to.
Send To (Field)	Name of the field that you want to send the notifications to. This field is optional.

6. Select **Submit** (new notification records) or **Update** (existing notification records).

Define Virtual Agent notification actions

Create the actions for a Virtual Agent chat or messaging channel to send actionable notifications.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- An action requires an associated, published (active) Virtual Agent topic, a Scriptable action, or a Flow action which can perform the action represented by a button in the notification, such as talk to an agent (live agent support) or bot feedback (Virtual Agent feedback). Consider working with your topic authors to determine the appropriate topics and corresponding actions. For more information about designing the Virtual Agent topics, see Getting started with Virtual Agent Designer.

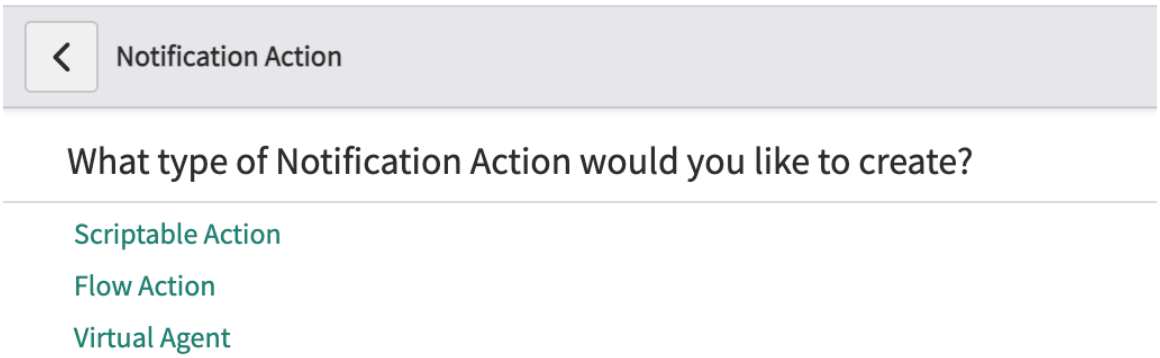
  Note:
  Scriptable actions and Flow actions are asynchronous and are executed when you select the action without a Virtual Agent topic. You can select either an existing flow that is defined or coordinate with the flow authors to send actionable notifications.

- Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications** and select the notification for which you are defining actions.
2. Navigate to the **Notification Actions** related list and select **New Provider Action**.
3. Select a notification action.

Select notification action



4. On the form, fill in the fields to define the notification actions.

Notification Content - Actions

Field	Description
Name	Name of the notification action. For example, Talk to an agent.
Notification	Notification that is associated with the action. This field is populated automatically with the notification that you created.
Async	Option to enable the action execution without blocking the current request. Both Script and Flow actions in Virtual Agent are asynchronous.
Model Type	Type of actions that are configured. For example, NLU/Keyword topic or LLM topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	If a user selects LLM, that action will be sent to an LLM Virtual Agent. If NLU is selected, that action will only be for an NLU enabled Virtual Agent.
Topic	Virtual Agent topic that handles this notification action. **Note:** Virtual Agent Pro is required to send a topic with actionable notification.
Script	Script to execute the notification action. The script filed is available only when you select Scriptable notification action. **Note:** The Scriptable Action is available only for Virtual Agent Pro users.
Application	Application scope of the notification content.
Active	Option to activate the notification content.
Choose Flow or Action	
Flow	Flow to trigger the sequence of the notification action. **Note:** ○ You cannot choose the flow if you provided the action. ○ The Flow field appears only when you select Flow notification action. ○ The Flow Action is available only for Virtual Agent Pro users.
Action	Action to use the correct table and field configuration for the notification action. **Note:** ○ You cannot choose the action if you provided the Flow. ○ The Action field appears only when you select the Flow notification action. ○ The Flow Action is available only for Virtual Agent Pro users.
Inputs	
Script	Script to pass inputs to a flow action. This Script field appears when you select the Flow notification action.

5. Select **Submit**.
6. To define another action for the notification, repeat steps 3 through 5.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next
Define link actions to notification content.

Define the Virtual Agent link actions to notification content

Create the link actions for Virtual Agent notification content to be delivered in a chat or messaging channel as actionable notifications.

Before you begin

- Ensure that you have activated the Glide Virtual Agent plugin (com.glide.cs.chatbot).

  Note:
  Only Virtual Agent Pro customers can associate actions with notification contents and receive actionable notifications.

- Role required: virtual_agent_admin or admin.

About this task
Notification content, with no associated link actions, is delivered as a non-actionable notification.

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications** and select the notification for which you're defining the link actions.
2. In the Link Actions related list, select **New**.
3. On the form, fill in the fields.

Actionable Content form

Field	Description
Name	Name of the link action.
Actions	Notification action that the link action is created to. You can select one or more notification actions for a notification and also put them in the order that you want them to be shown on the notification.
Actions listed in event parm1	Actions listed in an event parameter. Users and actions cannot both be passed into the parameter. For example, if you input a sys_id of a user in event param1, the user is considered in the output.
Application	Application scope of the notification content.
Notification	Notification that is associated with the content. This field is populated automatically with the notification that you created.
Content	Notification content for the link action created.
Active	Option to activate the notification content.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Actions listed in event parm2	Actions listed in an event parameter. Users and actions cannot both be passed into the parameter. For example, if you input a sys_id of a user in event param2, the user is considered in the output.

4. Select **Submit**.
5. To define another link action for the notification content, repeat steps 3 and 4.

> **Note:**
> Only a single notification with active content is supported for a provider. However, if the content for the notification is not active, you can define the secondary content for the notification and make that content active.

6. **Optional:** To remove the **Skip** action from an actionable notification, do the following steps:

   a. Select the notification and open the Link Actions to Content related list.

   b. Select the Actionable Content and select the **Disable skip** option.

   > **Note:**
   > This option only displays when the Content Type is Virtual Agent.

What to do next
Enable Virtual Agent notifications. For more information, see Enable Virtual Agent notifications.

Enable Virtual Agent notifications

Enable Virtual Agent notifications so that your end users can receive notifications in supported Virtual Agent channels.



Before you begin
Role required: virtual_agent_admin or admin

Procedure

Enable notifications for your users in the appropriate channel:

Channel	Description
Enhanced chat	The *sn_nowassist_va.nass_notification_enabled* system property defaults to `true` in System Properties (sys_properties.list). This property enables Virtual Agent notifications to appear to users within the enhanced chat. For more information on setting up Virtual Agent notifications, see Configure a delivery channel for Virtual Agent notification.

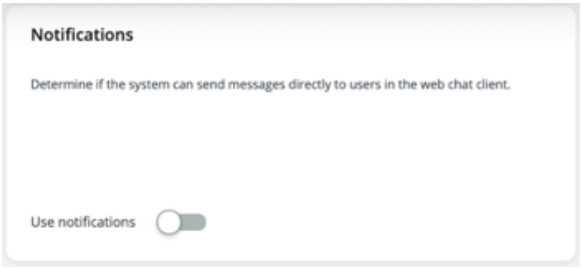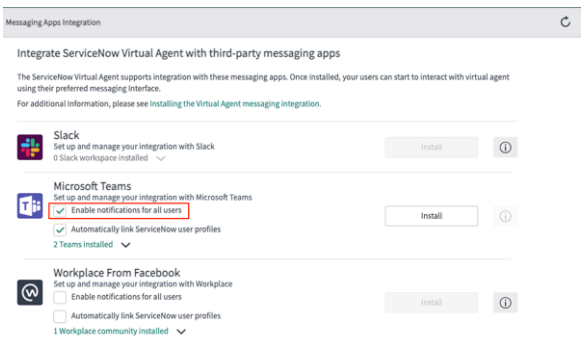© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel	Description
Chat widget (mweb)	**a.** Navigate to **All** > **Conversational Interfaces** > **Settings**. **b.** Select **Virtual Agent**. **c.** Under **Notifications**, slide the **Use notifications** toggle switch to enable notifications.  **Note:** You can also change the notification text color and background in chat branding configurations. For details, see Set up your Virtual Agent bot's branding.
Slack, Microsoft Teams, or Workplace messaging integrations	**a.** Navigate to **All** > **Conversational Interfaces** > **Channels and Integrations**. **b.** For the appropriate messaging integration, select **Enable notifications for all users**. 
Custom chat integration	**a.** Navigate to **All** and in the filter navigator, enter `sys_cs_channel.list`. **b.** In Messaging Channels, select the custom integration record to update. **c.** Select **Enable Notifications** to activate notifications. **d.** Select **Update**. For more information on configuring custom chat integrations, seeCreating conversational custom chat integrations in Virtual Agent.

Notifications are sent to recipients via the Virtual Agent bot in the channels that you enabled.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create cross-scope access privileges for topic blocks and custom controls

Enable topic authors and developers to access Virtual Agent topic blocks and custom controls from other scoped applications.

Before you begin

Role required: admin

About this task

Developers and topic authors may need to access topic blocks and custom controls created in other application scopes. To give them access, define cross-scope privilege records for the appropriate applications. For more information on cross-scope privileges, see Cross-scope privilege record.

Procedure

1. Activate the Virtual Agent conversation plugins for the applications that are the source and target scopes, for example the CSM (com.sn_csm.virtualagent) or ITSM Virtual Agent (com.snc.itsm.virtualagent) plugins.
2. Set your application scope (the Source scope requesting access) using the application picker.
3. Navigate to **All** > **System Applications** > **Application Cross-Scope Access** and select **New**.
4. On the Cross scope privilege form, complete the following fields.

Field	Value
Source scope	Application requesting access to another application's resources.
Target Scope	Application whose resources are being requested (the scope with the topic blocks or custom controls).
Target Name	Name of the asset being requested: sys_cs_topic
Target Type	Table
Operation	Read
Status	Authorization for this record: Allowed

5. Select **Submit**.

Result

The cross-scope privilege is listed in the Cross scope privileges [sys_scope_privilege] table. Topic authors or developers can access the topic blocks or custom controls from the target scope.

Configure Natural Language Understanding in Virtual Agent

Configure Natural Language Understanding (NLU) in Virtual Agent to identify the NLU service provider for your instance. You can also specify the languages of NLU models used during conversation design, based on the languages supported by your NLU provider and the ServiceNow AI Platform®.

Before you begin

You can select only one NLU service provider for your instance. Virtual Agent supports the following NLU services:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **ServiceNow NLU** (default): Create your models, intents, and entities in Virtual Agent Designer and NLU Workbench.
- **IBM Watson Assistant**: Configure the IBM Watson Assistant intent and entity integration so that Virtual Agent can access IBM Watson Assistant NLU model information.
- **Microsoft LUIS**: Configure the Microsoft LUIS Intent and Entity integration so that Virtual Agent can access Microsoft LUIS NLU model information.
- **Google DialogFlow Essentials (ES)**: Configure the Google DialogFlow ES intent and entity integration so that Virtual Agent can access Google Dialogflow ES NLU model information.

The **Activate** toggle switch for NLU is toggled on for all new Virtual Agent activations and the **NLU Service Provider** defaults to **ServiceNow NLU**. The **Activate** toggle switch is toggled off for Virtual Agent Lite. If you upgraded from the previous release, Virtual Agent retains the NLU settings and integration information for your NLU service provider.

Role required: virtual_agent_admin or admin

About this task

The NLU-enabled topics that you preview, create, or update in Virtual Agent Designer must use NLU models created in the NLU service that you select here. For example, if you specify ServiceNow as the service provider, you can view and access topics that use ServiceNow NLU model groups.

Similarly, to work on NLU topics in multiple languages, the languages must be enabled in your NLU service and added to your model groups. For more information, see Multilingual model management.


Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Click **Virtual Agent**.
3. Under Natural Language Understanding (NLU), click **View Settings**.
4. On the form, fill in the fields.

Natural Language Understanding (NLU) form

Field	Description
NLU Service Provider	Available NLU service providers for intent and entity extraction. The Supported NLU Languages list is displayed. It shows all of the language plugins that have been installed. For **ServiceNow NLU**, English is enabled to **true** by default. This field is automatically set to **ServiceNow NLU**.
Ask user if topic VA chose is correct	Option to prompt the user to confirm that the matched intent is correct. This option enables user confirmation only on initial intent discovery. When enabled, Virtual Agent asks the user for confirmation before continuing to the automatically selected topic content. Enabling this field triggers the **Intent confirmation message** field.

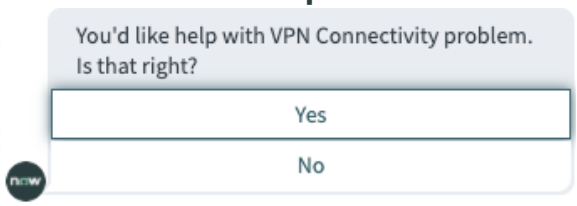© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	User confirmation example  If the user selects **No** for an initial intent, then Virtual Agent runs the global fallback topic. If the user selects **No** for an automatically selected intent in mid-topic, then Virtual Agent returns to the topic that the user was in.
Ask user if switched topic is correct	Option to prompt the user to confirm that the switched intent is correct. This option is enabled by default and prompts user confirmation only when the user triggers an intent switch in mid-topic. When enabled, Virtual Agent asks the user for confirmation before continuing to the switched topic content. Enabling this field triggers the **Intent confirmation message** field.

5. Edit the **Intent confirmation message** field, if needed.

   Text entered in this field is shown to the user to confirm that the matched intent is correct.

6. If you plan to use language-specific NLU models, enable the languages in the Supported NLU Languages list.
   A language is enabled if the Enabled column displays **true**. For more information, see Enable NLU languages in Virtual Agent settings.

7. Click **Save**.

Result

When you create or update a topic in Virtual Agent Designer, you can choose NLU models available for your specified NLU provider and the specified languages, if applicable. You can also set the NLU entity properties for the input controls that you add to your topic flow.

Configure IBM Watson Assistant as the NLU provider for Virtual Agent

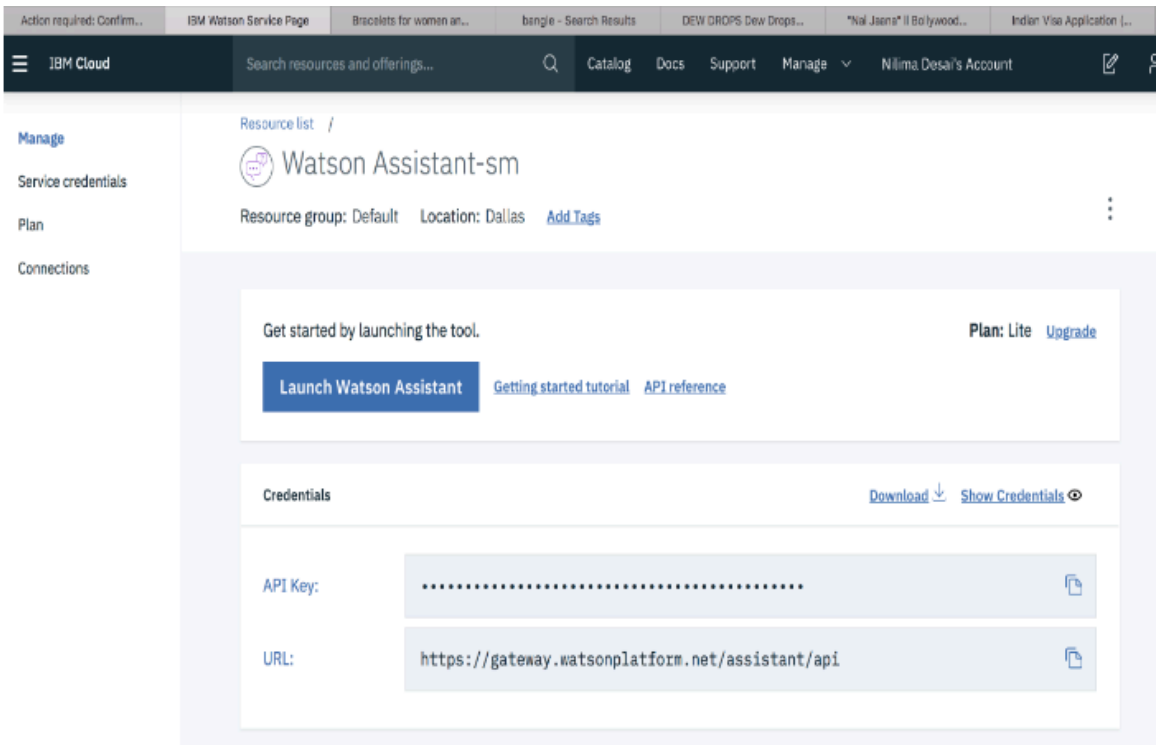
Use the intents, entities, and utterances defined in IBM Watson Assistant and apply them as an NLU model for your Virtual Agent conversations.

Before you begin

In IBM Watson Assistant, do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- In your IBM account, create a Resource Link in the AI (Artificial Intelligence) category. Once you have created the Resource Link, you should see the API key and URL:



- In your workspace, define the intents, entities, and utterances for your NLU model.
- Locate your workspace credentials and copy the workspace **Password**, which you must provide when setting your credentials during configuration.

In your ServiceNow instance, make sure that the Glide Virtual Agent plugin (com.glide.cs.chatbot) is activated. This plugin installs the proxy agent for the IBM Watson Natural Language Understanding server plugin (com.glide.nlu.ibmwatson.intent.discovery), which is needed for this integration.

Role required: admin

About this task

Configuring the IBM Watson Assistant integration involves providing IBM Watson Assistant credentials for authentication. You can set only one NLU service provider for your instance.

> **Note:**
> If you upgraded from a previous release, the upgrade process automatically retains the IBM Watson Assistant workspace **Password** that you provided.

As of the Quebec release, Virtual Agent supports legacy version 1 URLs only:

- Models: `https://<IBM HOST>/assistant/api/{{api_version}}/workspaces?version={{published_version}}`
- Intents: `https://<IBM HOST>/assistant/api/{{api_version}}/workspaces/{{model_id}}/intents?version={{published_version}}&page_limit=1000`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

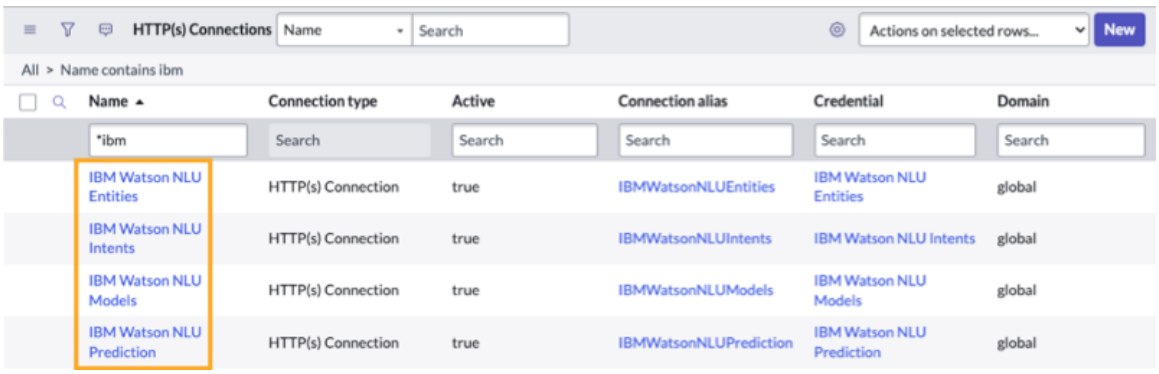
- Entities: `https://<IBM HOST>/assistant/api/{{api_version}}/workspaces/{{model_id}}/entities?version={{published_version}}`
- Prediction: `https://<IBM HOST>/assistant/api/{{api_version}}/workspaces/{{model_id}}/message?version={{published_version}}`

Procedure


1. Set the IBM Watson endpoint in your ServiceNow instance for each of the following HTTP(s) Connections records:
   - IBM Watson NLU Models
   - IBM Watson NLU Intents
   - IBM Watson NLU Entities
   - IBM Watson NLU Prediction

   a. Navigate to **All**, and then enter `http_connection.list` in the filter.

   b. In the HTTP(s) Connections page, select an IBM Watson entry in the Name column to open the record.



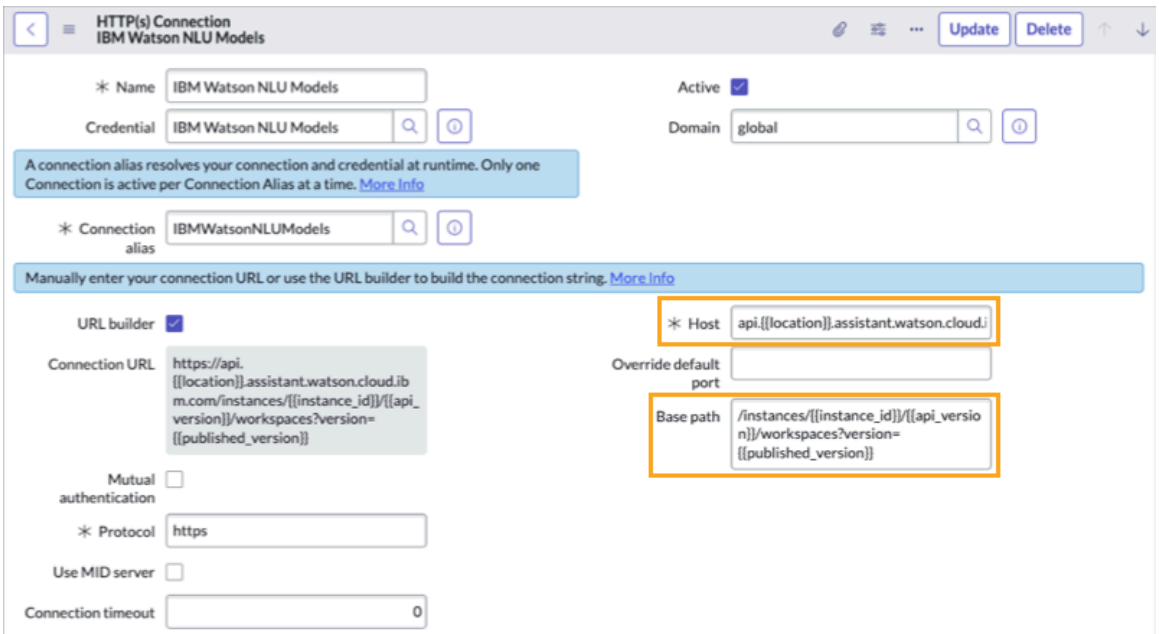   c. Edit the URL in the **Host** and **Base path** fields to reflect the endpoint in your IBM Watson NLU account.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

d. Select **Update**.

e. Repeat these steps for the remaining IBM Watson records.

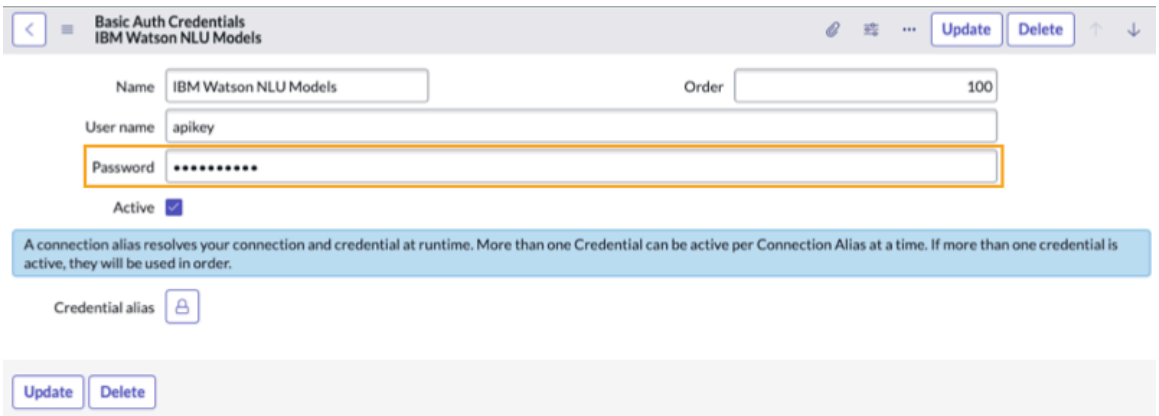
2. Add the IBM Watson NLU API key in your ServiceNow instance for each of the following Basic Auth Credentials records:

- IBM Watson NLU Models
- IBM Watson NLU Intents
- IBM Watson NLU Entities
- IBM Watson NLU Prediction

a. Navigate to **All**, and then enter `basic_auth_credentials.list` in the filter.

b. In the Basic Auth Credentials page, select an IBM Watson entry in the Name column to open the record.

c. In the **Password** field, enter the IBM Watson NLU API key.



d. Select **Update**.

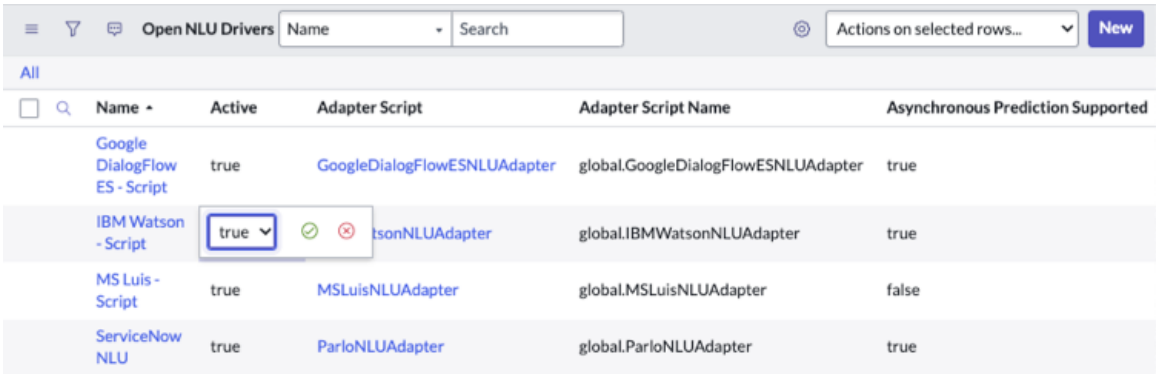
e. Repeat these steps for the remaining IBM Watson records.

3. Make the IBM Watson NLU service active.

a. Navigate to **All**, and then enter `open_nlu_driver.list` in the filter.

b. In the Open NLU Drivers table, locate the IBM Watson Script record and in the **Active** field, set the value to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Activating this setting adds **IBM Watson - Script active** to the list of available NLU services in Virtual Agent settings.

4. To enable NLU in your instance, navigate to **Conversational Interfaces** > **Settings**, and then do the following:

   a. Click **Virtual Agent**.

   b. Under Natural Language Understanding (NLU), click **View Settings**.

   c. Slide the **Activate** toggle switch to enable Natural Language Understanding.

   d. In the **NLU service provider** list, select **IBM Watson - Script**.

   e. If you plan to use language-specific NLU models, enable the languages in the Supported NLU Languages list.
   A language is enabled if the Enabled column displays **true**. For more information, see Enable NLU languages in Virtual Agent settings.

   f. Click **Save**.

   IBM Watson Assistant is the NLU service provider for your instance.

Configure Microsoft LUIS as the NLU provider for Virtual Agent

Use the intents, entities, and utterances defined in a Microsoft Language Understanding Intelligent Service (LUIS) application and apply them as an NLU model for your Virtual Agent conversations.

Before you begin

Important:
Microsoft Language Understanding Intelligent Service (LUIS) will be fully retired on March 31, 2026. Beginning on October 31, 2025, the LUIS portal will no longer be available. Consider migrating your LUIS applications to Now Assist in Virtual Agent to benefit from continued product support and multilingual capabilities.

In Microsoft LUIS, do the following:

- Sign in to the LUIS portal and create an application to be used as an NLU model (requires a Microsoft Azure account.)
- Locate and copy these Microsoft LUIS keys:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Authoring key that was automatically generated when you created your Microsoft LUIS account. The authoring key provides the authentication needed for your LUIS applications and for creating, training, and publishing them. You can find the authoring key by signing into LUIS, selecting your user account, and opening Account Settings.
- Prediction endpoint runtime key that you assigned to the resource for your Microsoft LUIS application. Virtual Agent accesses the LUIS runtime query prediction endpoint through this key.

> **Note:**
> If you are using more than one LUIS application (NLU model), you must provide the prediction endpoint runtime key for each application that you create.

In your ServiceNow instance, do the following:

- Make sure that the Glide Virtual Agent plugin is activated, as it installs the Proxy Agent to the Microsoft LUIS Natural Language Understanding server plugin (com.glide.nlu.msluis.intent.discovery) needed for this integration. If you upgraded from a previous release, the upgrade process automatically retains the LUIS keys that you provided.
- Role required: admin

About this task

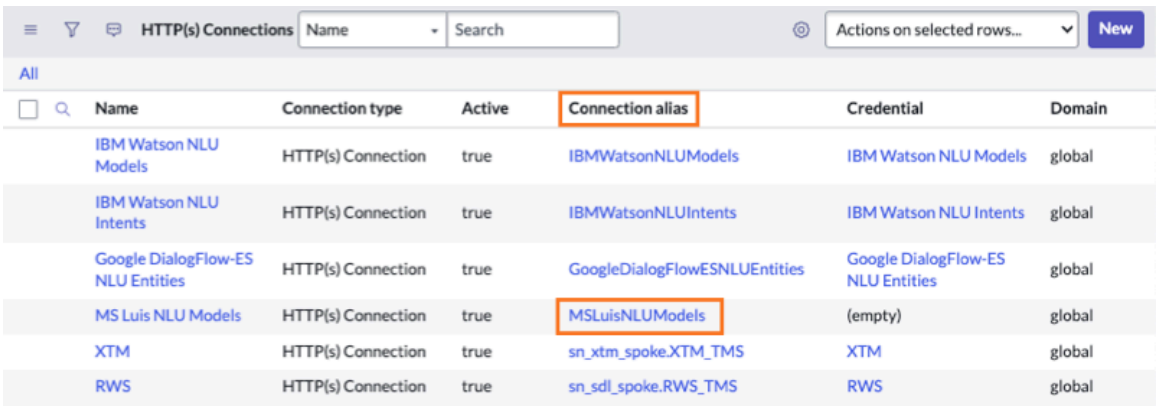
You can set only one NLU service provider for your instance.

Procedure

1. To set the credential passwords for the LUIS NLU model, entities, intents, and prediction information, do the following:

   a. Navigate to **All**, and then enter `http_connection.list` in the filter.

   b. In the HTTP(s) Connections page, select **MSLuisNLUModels** in the Connection alias column to open the record.




Name	Connection type	Active	Connection alias	Credential	Domain
IBM Watson NLU Models	HTTP(s) Connection	true	IBMWatsonNLUModels	IBM Watson NLU Models	global
IBM Watson NLU Intents	HTTP(s) Connection	true	IBMWatsonNLUIntents	IBM Watson NLU Intents	global
Google DialogFlow-ES NLU Entities	HTTP(s) Connection	true	GoogleDialogFlowESNLUEntities	Google DialogFlow-ES NLU Entities	global
MS Luis NLU Models	HTTP(s) Connection	true	MSLuisNLUModels	(empty)	global
XTM	HTTP(s) Connection	true	sn_xtm_spoke.XTM_TMS	XTM	global
RWS	HTTP(s) Connection	true	sn_sdl_spoke.RWS_TMS	RWS	global

   c. In the Connection & Credential Aliases for MSLuisNLUModels page, go to the Connection Attributes related list.

   d. Find the Credential Password attribute, and then double-select in the **Default value** column to edit the value.

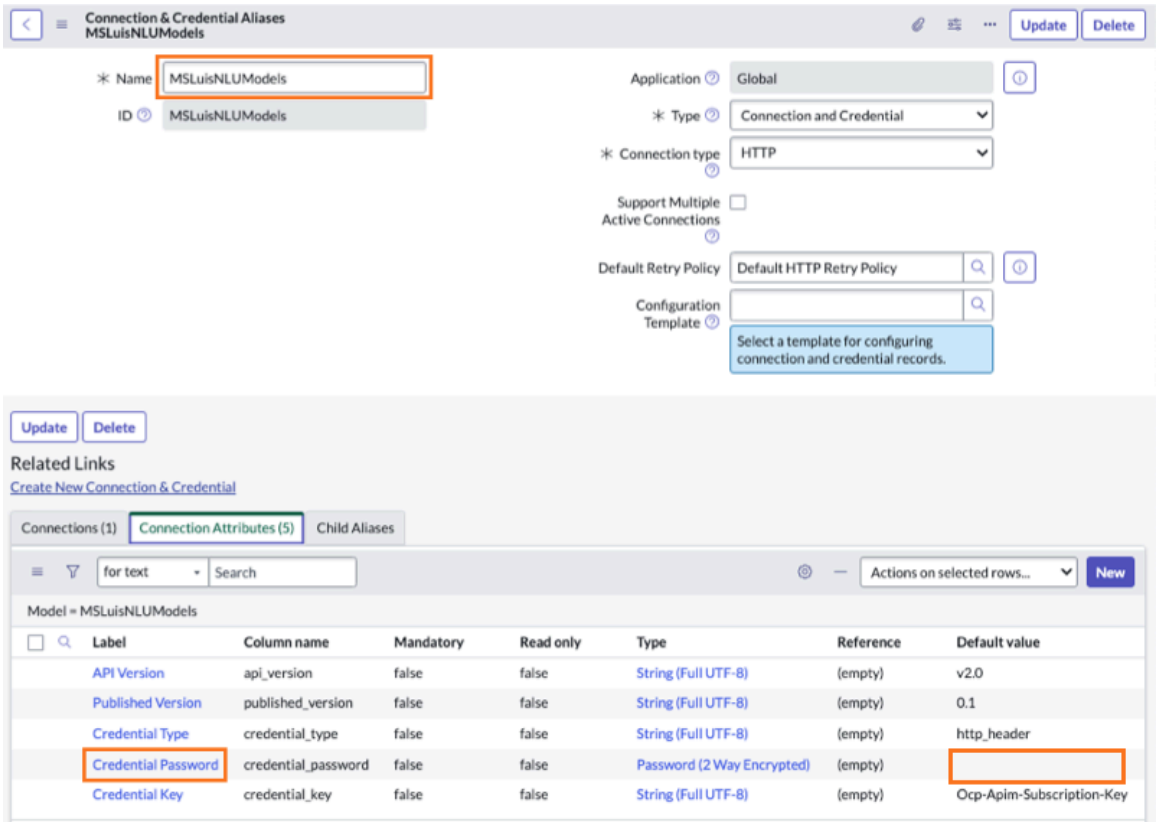© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




e. Enter the MS LUIS authoring key in the **Default value** field, and then select the save icon.

f. Return to the HTTP(s) Connections page and repeat these steps to add the MS LUIS authoring key as the default value in the following Connection aliases:

- MSLuisNLUCustomEntities
- MSLuisNLUPrebuiltEntities
- MSLuisNLUIntents
- MSLuisNLUPrediction

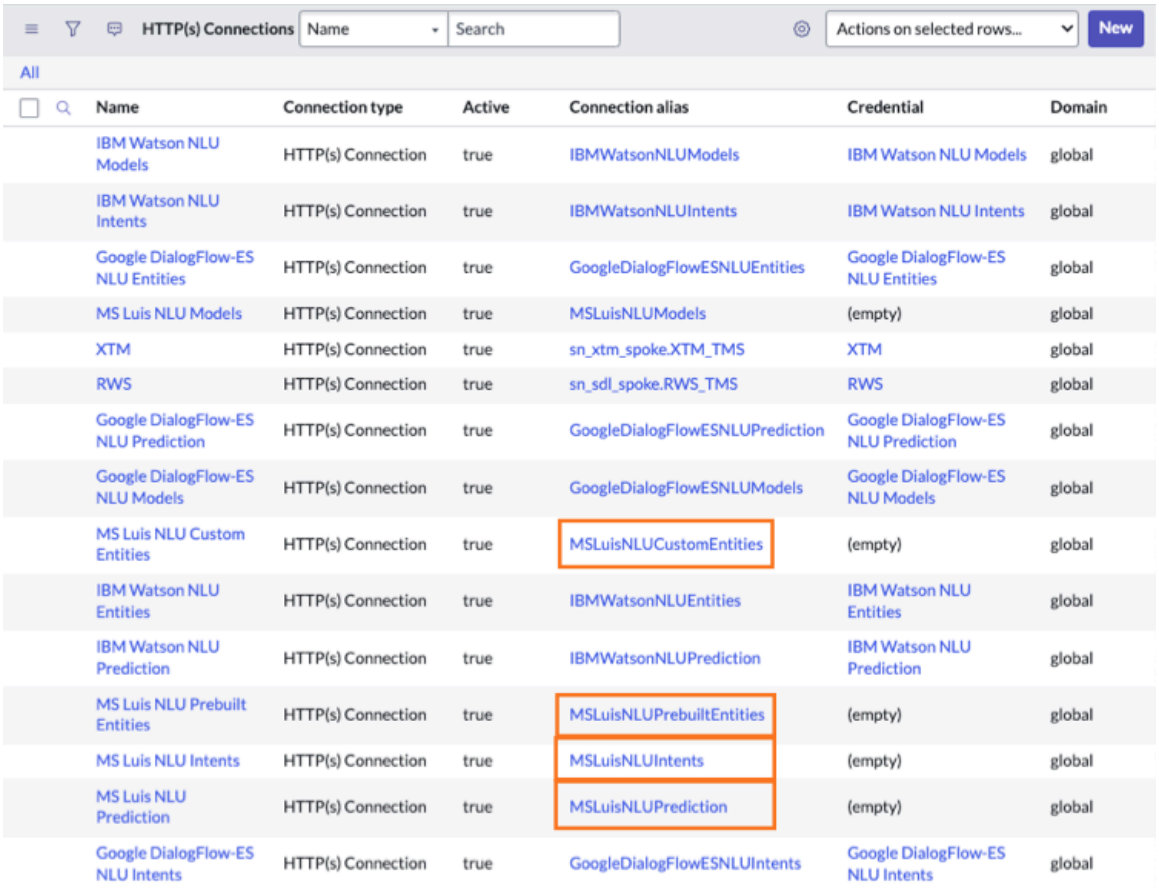© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Name	Connection type	Active	Connection alias	Credential	Domain
IBM Watson NLU Models	HTTP(s) Connection	true	IBMWatsonNLUModels	IBM Watson NLU Models	global
IBM Watson NLU Intents	HTTP(s) Connection	true	IBMWatsonNLUIntents	IBM Watson NLU Intents	global
Google DialogFlow-ES NLU Entities	HTTP(s) Connection	true	GoogleDialogFlowESNLUEntities	Google DialogFlow-ES NLU Entities	global
MS Luis NLU Models	HTTP(s) Connection	true	MSLuisNLUModels	(empty)	global
XTM	HTTP(s) Connection	true	sn_xtm_spoke.XTM_TMS	XTM	global
RWS	HTTP(s) Connection	true	sn_sdl_spoke.RWS_TMS	RWS	global
Google DialogFlow-ES NLU Prediction	HTTP(s) Connection	true	GoogleDialogFlowESNLUPrediction	Google DialogFlow-ES NLU Prediction	global
Google DialogFlow-ES NLU Models	HTTP(s) Connection	true	GoogleDialogFlowESNLUModels	Google DialogFlow-ES NLU Models	global
MS Luis NLU Custom Entities	HTTP(s) Connection	true	MSLuisNLUCustomEntities	(empty)	global
IBM Watson NLU Entities	HTTP(s) Connection	true	IBMWatsonNLUEntities	IBM Watson NLU Entities	global
IBM Watson NLU Prediction	HTTP(s) Connection	true	IBMWatsonNLUPrediction	IBM Watson NLU Prediction	global
MS Luis NLU Prebuilt Entities	HTTP(s) Connection	true	MSLuisNLUPrebuiltEntities	(empty)	global
MS Luis NLU Intents	HTTP(s) Connection	true	MSLuisNLUIntents	(empty)	global
MS Luis NLU Prediction	HTTP(s) Connection	true	MSLuisNLUPrediction	(empty)	global
Google DialogFlow-ES NLU Intents	HTTP(s) Connection	true	GoogleDialogFlowESNLUIntents	Google DialogFlow-ES NLU Intents	global

Note:
Repeat these steps for each Microsoft LUIS application that you use as an NLU model. Each application has its own prediction endpoint runtime key that you must provide.

2. Make the LUIS NLU service active.

   a. Navigate to **All**, and then enter `open_nlu_driver.list` in the filter.

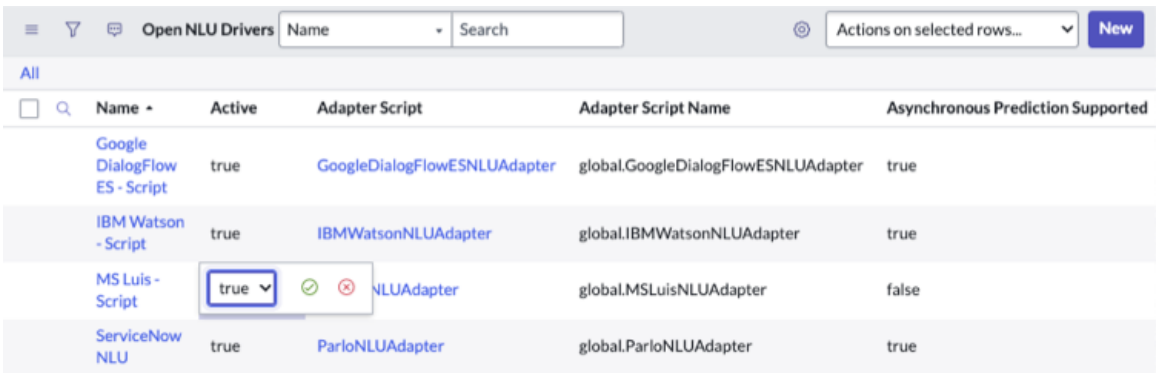   b. In the Open NLU Drivers table, set the **Active** field value for the **MS Luis Script** record to **true**.



Name	Active	Adapter Script	Adapter Script Name	Asynchronous Prediction Supported
Google DialogFlow ES - Script	true	GoogleDialogFlowESNLUAdapter	global.GoogleDialogFlowESNLUAdapter	true
IBM Watson - Script	true	IBMWatsonNLUAdapter	global.IBMWatsonNLUAdapter	true
MS Luis - Script	true	NLUAdapter	global.MSLuisNLUAdapter	false
ServiceNow NLU	true	ParloNLUAdapter	global.ParloNLUAdapter	true

Note:
Activating this setting adds **MS Luis - Script** to the list of available NLU services in Virtual Agent settings.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. To enable NLU in your instance, navigate to **Conversational Interfaces** > **Settings**, and then do the following:

   a. Select **Virtual Agent**.

   b. Under Natural Language Understanding (NLU), select **View Settings**.

   c. Slide the **Activate** toggle switch to enable Natural Language Understanding.

   d. In the **NLU Service Provider** list, select **MS Luis - Script**.

   e. If you plan to use language-specific NLU models, enable the languages in the Supported NLU Languages list.
   A language is enabled if the Enabled column displays **true**. For more information, see Enable NLU languages in Virtual Agent settings.

   f. Select **Save**.

   Microsoft LUIS is now the NLU service provider for your instance.

Configure Google Dialogflow ES as the NLU provider for Virtual Agent

Use the intents, entities, and utterances defined in Google Dialogflow ES. Apply them as an NLU model for your Virtual Agent conversations.

Configuring the Google Dialogflow ES integration involves providing Google Dialogflow credentials for authentication. You can set only one NLU service provider for your instance.

Requirements

This NLU configuration requires the following:

- A Yokohama ServiceNow instance
- A Google Dialogflow ES agent with defined intents, entities, and utterances

  For more information, see the Google Dialogflow ES documentation.

  Note:
  A Google Dialogflow agent is similar to a ServiceNow model. Currently, Virtual Agent only supports one Google Dialogflow ES agent per instance.

- Access to the Google Cloud platform
- The Glide Virtual Agent [com.glide.cs.chatbot] plugin must be installed on your ServiceNow instance.

  The following plugins are installed with Glide Virtual Agent by default:

  - com.snc.integration.sso.multi.installer: Integration - Multiple Provider Single Sign-On Installer
  - com.glide.nlu.googledialogflow.es.intent.discovery: Proxy agent to the Google Dialogflow ES Natural Language Understanding server

Create a service account and private key in Google Dialogflow ES

To use Google Dialogflow as your NLU provider for Virtual Agent, create a service account and private key for your agent in Google Dialogflow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

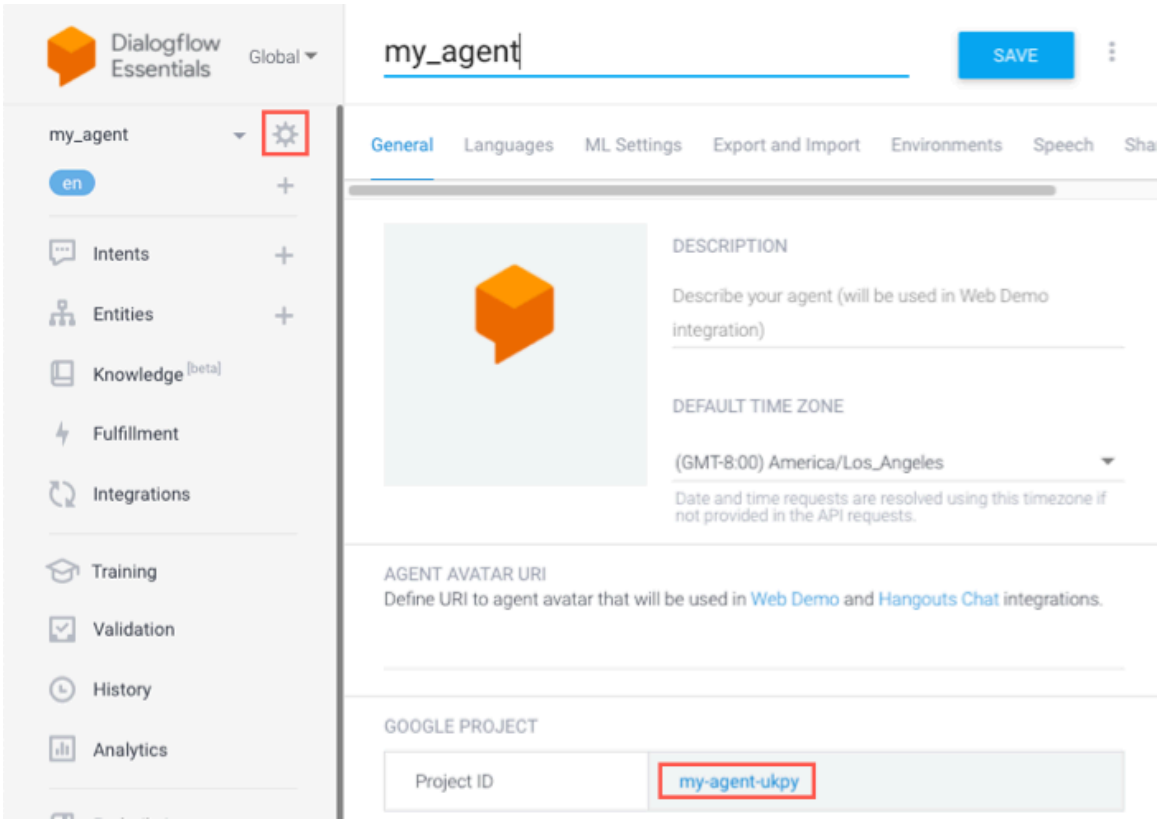
Before you begin

Create an agent in Google Dialogflow.

Role required: admin


Procedure

1. Log in to your Google Dialogflow account.
2. Select the agent settings icon, and then select the project ID on the **General** tab.




3. On the Google Cloud dashboard, select **Go to project settings**.

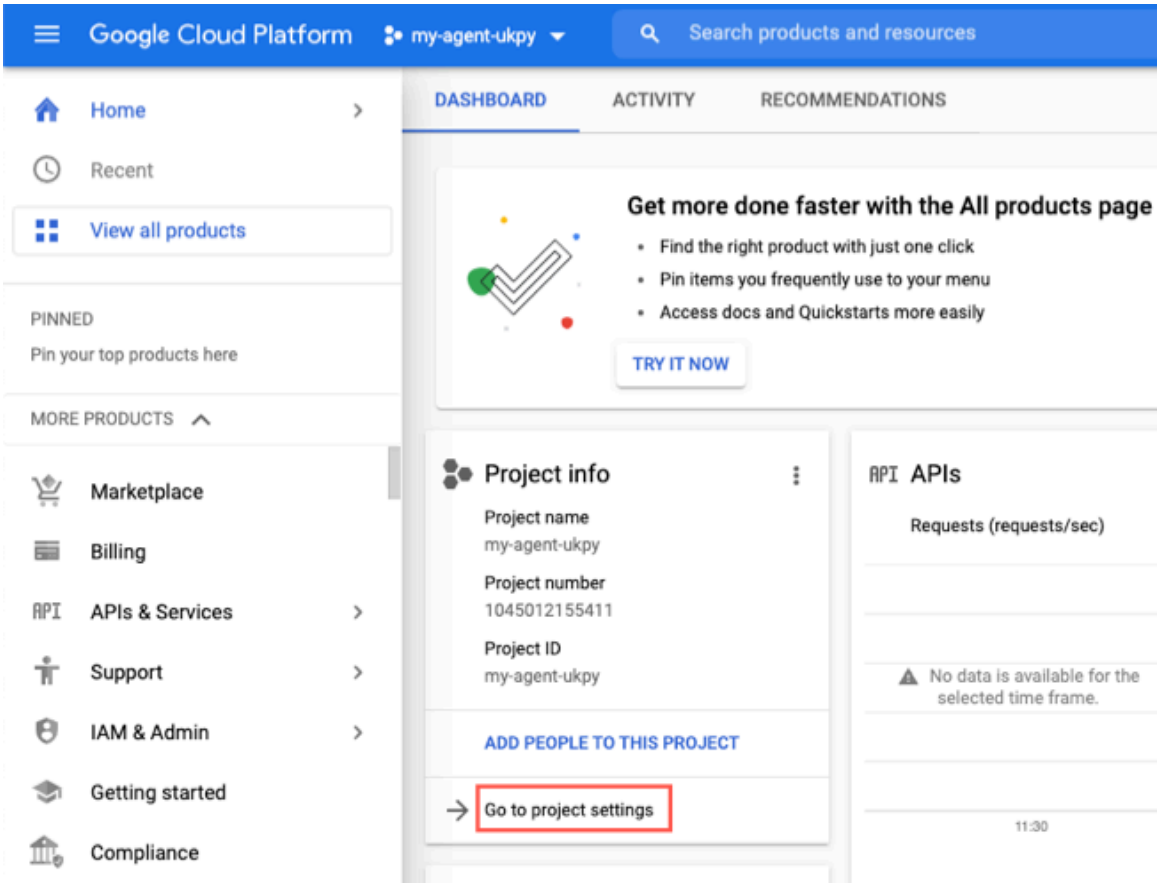© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




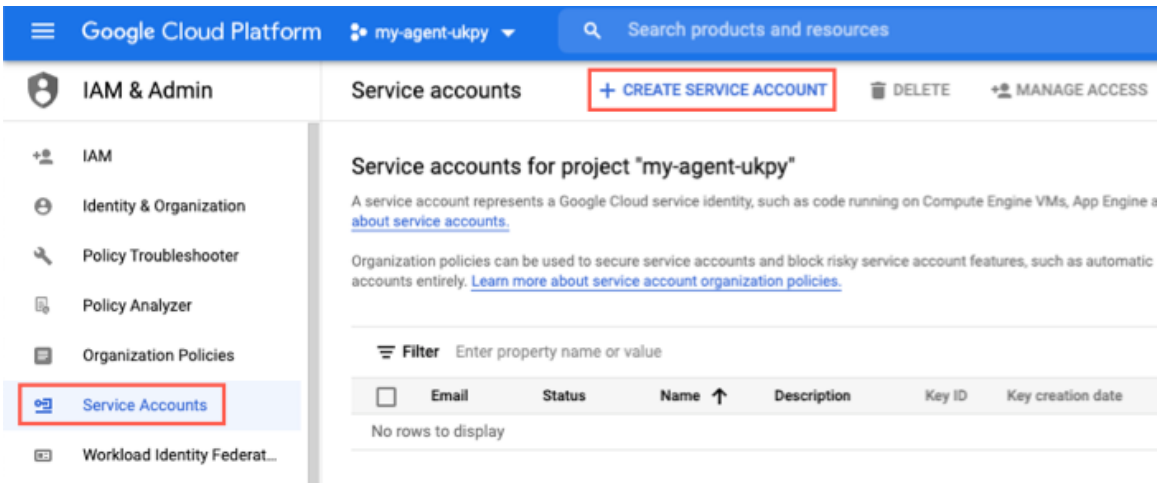4. On the IAM & Admin page, select **Service Accounts**.
5. Select **+ Create Service Account**.




6. Provide a name, and then select **Create and Continue**.
7. Under the Grant this service account access to project section, select **Owner** as the role.

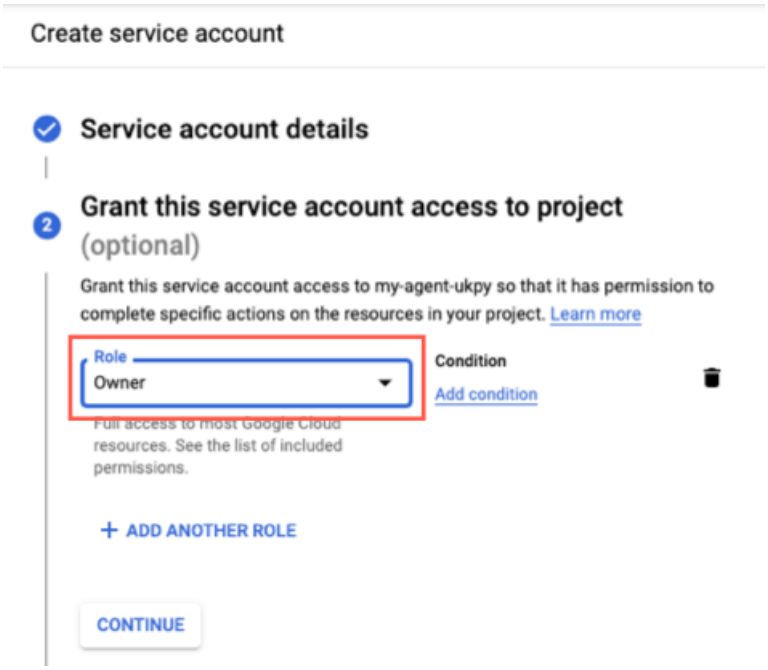© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



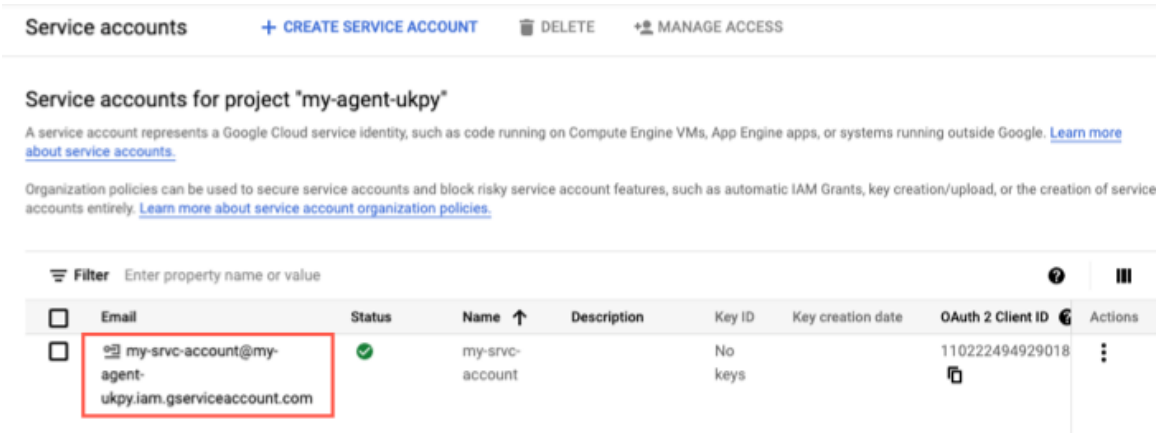
8. Select **Continue**.
9. Select **Done**.
10. In the **Email** column, select the link for the record.




The Service account details page opens.

11. Copy the Email and the Unique ID and save them for a later step.

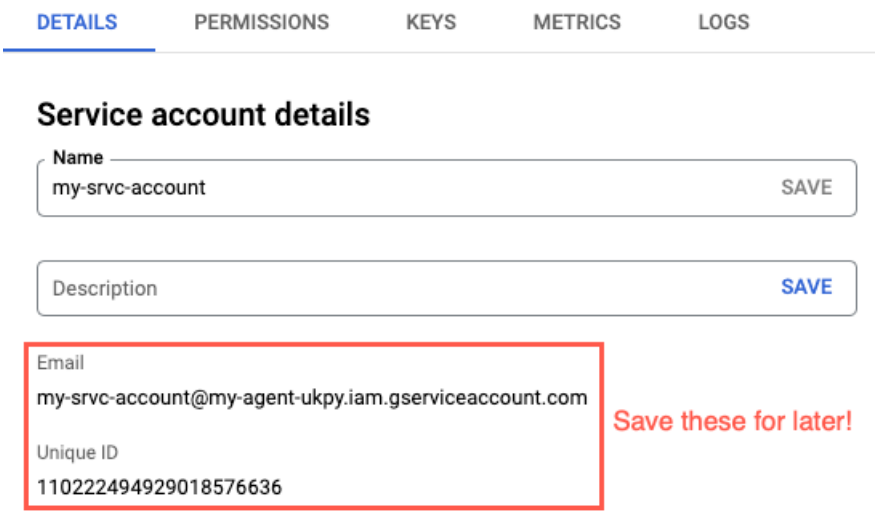© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



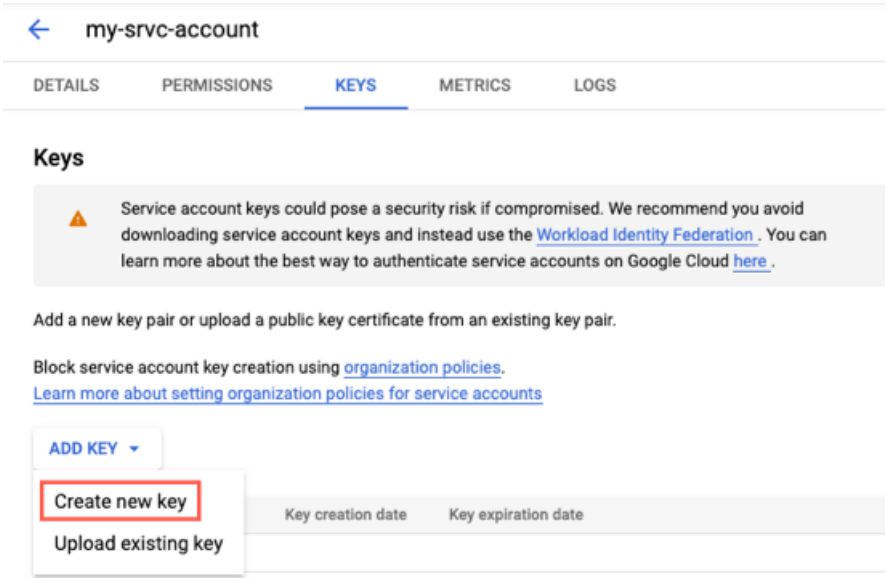12. On the Service account details page, select the **Keys** tab.
13. Select **Add Key** > **Create new key**.




14. When prompted for the key type, select **P12**, and then select **Create**.
    The P12 file is downloaded to your computer.
15. Make note of the private key password (`notasecret`).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You will need this password in a later step.

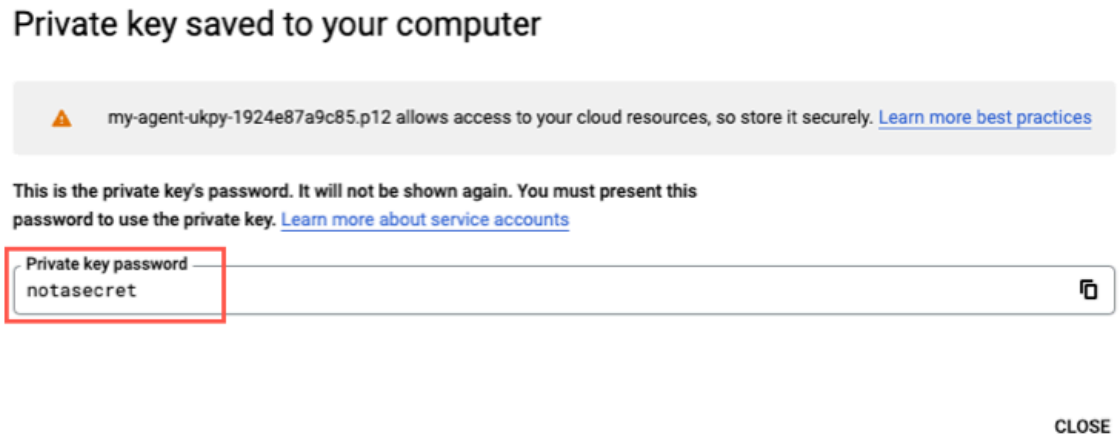Private key password example



Generate a Java Keystore (JKS) file and configure security on your ServiceNow instance

To use Google Dialogflow as your NLU provider for Virtual Agent, use the private key you downloaded to generate a JKS file and set up authentication in your ServiceNow instance.

Before you begin

Make sure the Java Development Kit (JDK) is installed on the system.

Role required: admin

About this task

Note:
Google Dialogflow uses OAuth2.0 for authentication.

Procedure

1. Open a command shell window.
2. To create a JKS file from the P12 file, do the following:

   a. Run the following command:

   ```
   keytool -importkeystore
    -srckeystore /local_dir/myprivatekey.p12 -srcstoretype
    pkcs12 -destkeystore /local_dir/myprivatekey.jks
    -deststoretype JKS
   ```

   In this example, `/local_dir/myprivatekey.p12` points to the private key that you downloaded in the previous step.

   b. When prompted, enter `notasecret` for the destination keystore password and the source keystore password.
   `notasecret` is the private key password you noted from the previous step. You will enter this password three times.

   A JKS file is created in the same directory.
3. In your ServiceNow instance, add the JKS file to the Google Dialogflow X.509 certificate record:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Navigate to **All**, and then enter `sys_certificate.list` in the filter.

b. Select Google Dialogflow X.509 Certificate to open the record.

c. On the form, fill in the fields as follows.

Field	Value
Type	Select **Java Key Store**.
Key store password	Enter the private key password that you specified when creating the JKS file (`notasecret`).
Active	Select this option to activate the certificate.

d. Select the attachment icon and upload the JKS file to the record.

e. Under Related Links, select **Validate Stores/Certificates**.
You should see a `Valid key_store` message.

f. Select **Update**.

4. In your ServiceNow instance, update the Google Dialogflow JWT (JSON Web Token) Keystore alias record.

a. Navigate to **All**, and then enter `jwt_keystore_aliases.list` in the filter.

b. Select Google Dialogflow JWT Keystore to open the record.

c. On the form, fill in the fields as follows.

Field	Value
Signing Keystore	Select **Google DialogFlow X.509 Certificate**.
Signing Algorithm	Select **RSA 256**.
Signing Key	Enter the private key password that you specified when creating the JKS file (`notasecret`).
Key Id	Leave this field empty.

d. Select **Update**.

5. In your ServiceNow instance, update the Google Dialogflow JWT provider record.

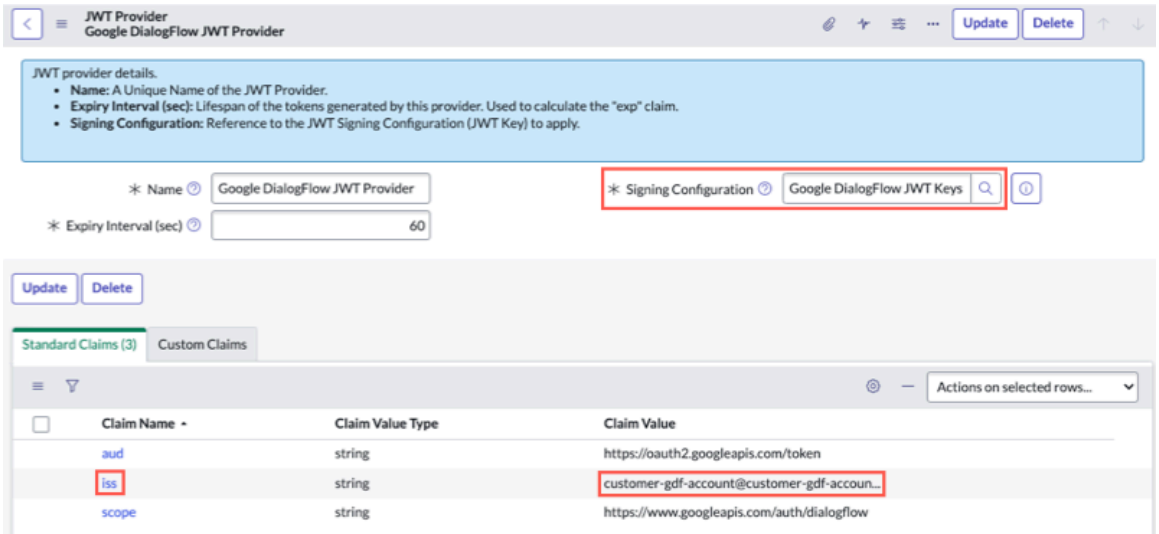
a. Navigate to **All**, and then enter `jwt_provider.list` in the filter.

b. Select Google Dialogflow JWT Provider to open the record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. In the **Signing Configuration** field, select **Google DialogFlow JWT Keystore**.

d. In the Standard Claims related list, enter the email address for your Google Dialogflow agent service account as the **Claim Value** for the **iss** entry.



For more information, refer to Create a service account and private key in Google Dialogflow ES.

e. Select **Update**.

6. In your ServiceNow instance, update the Google Dialogflow NLU OAuth Provider record:

a. Navigate to **All**, and then enter `oauth_entity.list` in the filter.

b. Select Google Dialogflow NLU to open the record.

c. On the form, fill in the fields as follows.

Field	Value
Client ID	Enter the unique ID for your Google Dialogflow agent service account that you saved from a previous step.
Client Secret	Enter the private key password that you specified when creating the JKS file (`notasecret`).
Default Grant Type	Select **JWT Bearer**.

d. Select **Update**.

7. In your ServiceNow instance, update the **GoogleDialogFlowESNLUPrediction** system alias.

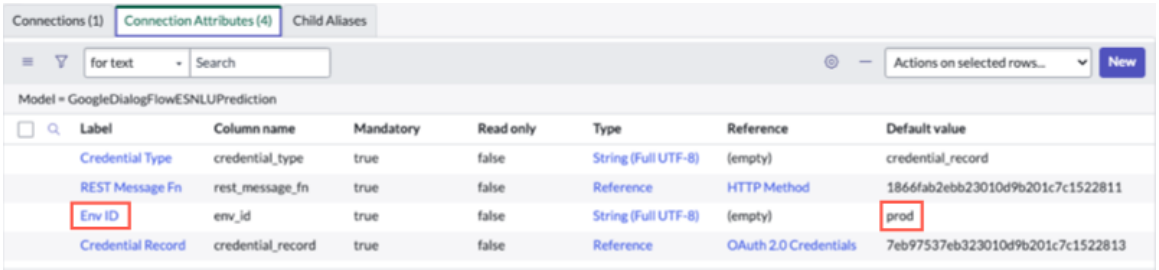
a. Navigate to **All**, and then enter `sys_alias.list` in the filter.

b. Select **GoogleDialogFlowESNLUPrediction** to open the record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. Select the **Connection Attributes** tab and find the **EnvID** record.

d. In the **Default value** column, update the value with the name of the Google Dialogflow environment where the agent was published.
The default value is *prod*.



e. Select **Update**.

8. Specify Google Dialogflow ES as your NLU provider in Virtual Agent.
For more information, see Configure Natural Language Understanding in Virtual Agent.

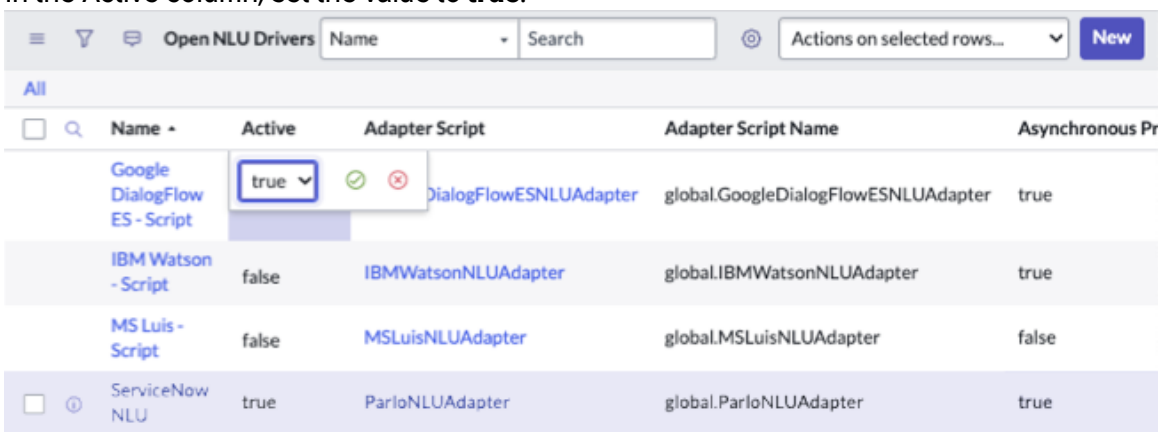
Activate the Google Dialogflow ES service and enable it in your instance

When you activate the Google Dialogflow ES service in the Open NLU Drivers [open_nlu_driver] table, the service becomes available as an option in Virtual Agent NLU settings.

Before you begin
Role required: admin

Procedure

1. Navigate to **All**, and then enter `open_nlu_driver.list` in the filter.
2. In the Open NLU Drivers table, locate the Google Dialogflow ES Script record.
3. In the Active column, set the value to **true**.



4. To enable NLU in your instance, navigate to **Conversational Interfaces** > **Settings**, and then do the following:

a. Click **Virtual Agent**.

b. Under Natural Language Understanding (NLU), click **View Settings**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. Slide the **Activate** toggle switch to enable Natural Language Understanding.

d. In the NLU service provider list, select **Google Dialogflow ES - Script**.

e. If you plan to use language-specific NLU models, enable the languages in the Supported NLU Languages list.
A language is enabled if the Enabled column displays **true**. For more information, see Enable NLU languages in Virtual Agent settings.

f. Click **Save**.

Result
Google Dialogflow ES is the NLU service provider for your instance.

Test Virtual Agent with Google Dialogflow ES NLU in Virtual Agent Designer

Test topic discovery with Google Dialogflow and Virtual Agent in the Virtual Agent Designer interface.

Before you begin
Check the following:

- Ensure that your Google Dialogflow agent (model) is published as a version with the most recent changes.

  For more information, see Versions and environments in the Google Dialogflow documentation.

- Ensure that at least one topic is mapped to an existing Google Dialogflow agent (model) and intent.

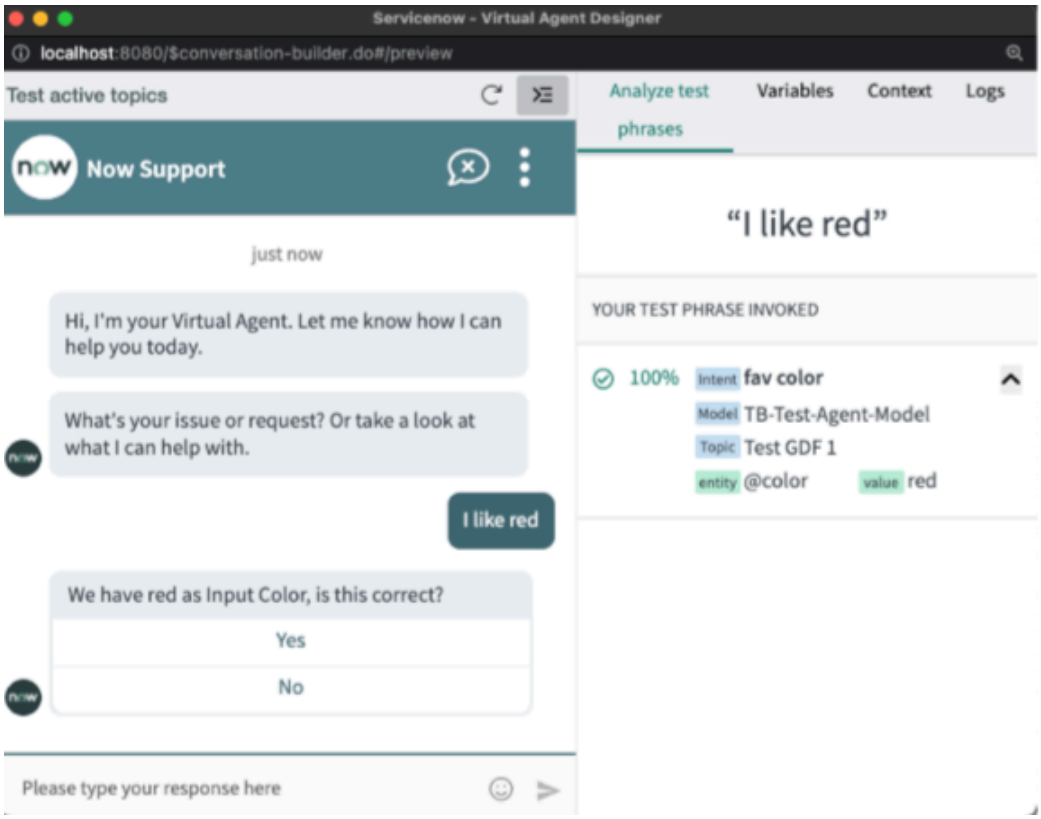
Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. In the Topics page, click **Test Active Topics**.
3. Type an utterance that should trigger the Google Dialogflow intent that is mapped to the topic.
4. To test entity slot-filling, do the following:
   a. On the **Flow** tab, add a Text user input node.
   b. Select an entity for the **NLU entity** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Ensure that the entity you select is configured in your Google Dialogflow ES agent. When a matching utterance is entered in the Test this topic window, the topic should be triggered, and the entity should slot-fill automatically.



Enhanced natural language handling of user inputs in NLU topic discovery

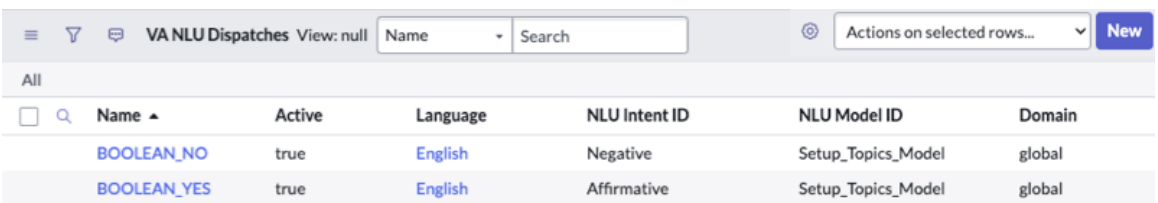
Give Virtual Agent the capability of recognizing natural variations on `yes` and `no` from the user, such as `sure` or `nope`. By defining a range of boolean responses as affirmative or negative, Virtual Agent doesn't have to prompt the user to restate their preference.

When Virtual Agent doesn't understand unexpected user input, it prompts the user again for information that it can understand. Starting with the Tokyo release, Virtual Agent can understand natural variations in boolean "yes/no" responses, such as `yep` or `nah`.

Natural language handling in ServiceNow NLU

The VA NLU Dispatches [sys_cs_nlu_dispatch] table stores the names of the model and intents that handle utterance variations.

For ServiceNow® NLU, the Setup Topics Model is already configured to handle boolean user inputs in English. There are two records in the table, **BOOLEAN_NO** and **BOOLEAN_YES**, which are mapped to the **Negative** and **Affirmative** intents in the Setup Topics Model.



Name	Active	Language	NLU Intent ID	NLU Model ID	Domain
BOOLEAN_NO	true	English	Negative	Setup_Topics_Model	global
BOOLEAN_YES	true	English	Affirmative	Setup_Topics_Model	global

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The Setup Topics Model and intents are read only, so if you need to modify the intents or add additional intents in other languages, create a new model with new intents. You can update the existing entries and add new ones to the table.

Setting up natural language handling for third-party NLU providers

If you are using IBM Watson, Microsoft LUIS, or Google Dialogflow for NLU topic discovery, add entries for the corresponding model and intents in the VA NLU Dispatches table, as described in Configure enhanced natural language user input handling.

Changing the confidence threshold

The confidence threshold for boolean inputs is defined in the *com.glide.cs.dialog.boolean_threshold* system property. The default value is *0.9*. For more information, see Add a system property.

Configure enhanced natural language user input handling

Add enhanced natural language handling for boolean user responses to your Virtual Agent environment. If you're using additional languages or third-party NLU providers, specify the model and intents that define variations in yes/no utterances for your bot.

Before you begin

In your NLU provider, create a model with two intents, or add two intents to an existing model. One intent should contain affirmative or "yes" utterances. The other intent should contain negative or "no" utterances.

If your environment supports multiple languages, create models and intents for each language.

Role required: virtual_agent_admin or admin

About this task

The default entries in this table apply to ServiceNow NLU for English only. If you want to implement natural language handling in other languages, add new entries to the table for each language.

Procedure

1. Navigate to **All**, and then enter `sys_cs_nlu_dispatch.list` in the filter.
2. Select **New** or an existing entry that you want to modify.
   Alternatively, select **New** to add an entry for another language or third-party NLU provider.
3. On the form, fill in the fields.

Field	Description
NLU Model ID	Name of the model that contains the defining intents for the boolean responses.
Name	Value name that represents the type of user input being configured. The following values are valid:


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	○ **BOOLEAN_NO**: Maps to utterances that express a "no" response to a yes/no question. ○ **BOOLEAN_YES**: Maps to utterances that express a "yes" response to a yes/no question.
Active	Option that enables enhanced natural language user responses on your instance.
NLU Intent ID	Name of the corresponding intent for the boolean option. By default, the intent for BOOLEAN_NO is Negative. The intent for BOOLEAN_YES is Affirmative. If you need to make changes, create a new model with these intents, and then specify the new intent in this field.
Language	Language of the intent. English for ServiceNow NLU is configured by default. If you need to support other languages,you can add a row in the table for each supported language.

4. Select **Submit** or **Update**.

Result

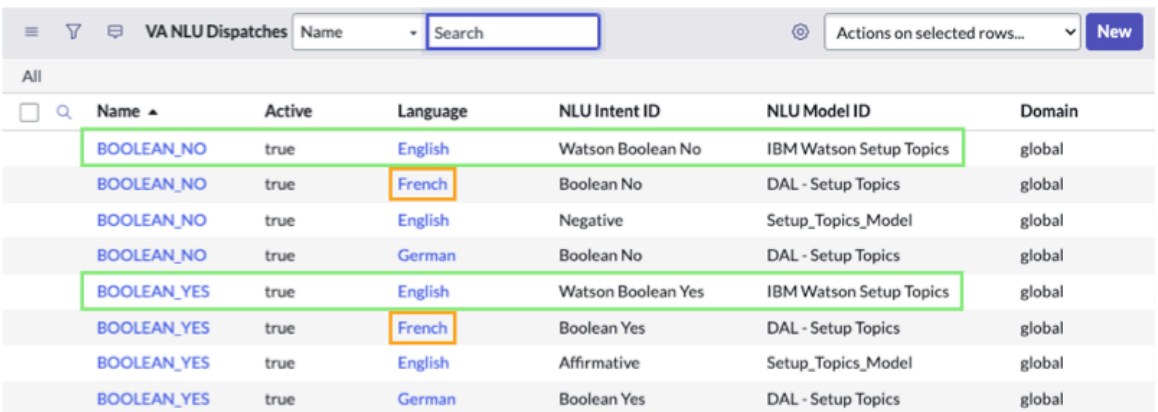Depending on your environment, your configuration may contain entries for other languages (such as French or German in the example below) or for other NLU providers, such as IBM Watson.



Name	Active	Language	NLU Intent ID	NLU Model ID	Domain
BOOLEAN_NO	true	English	Watson Boolean No	IBM Watson Setup Topics	global
BOOLEAN_NO	true	French	Boolean No	DAL - Setup Topics	global
BOOLEAN_NO	true	English	Negative	Setup_Topics_Model	global
BOOLEAN_NO	true	German	Boolean No	DAL - Setup Topics	global
BOOLEAN_YES	true	English	Watson Boolean Yes	IBM Watson Setup Topics	global
BOOLEAN_YES	true	French	Boolean Yes	DAL - Setup Topics	global
BOOLEAN_YES	true	English	Affirmative	Setup_Topics_Model	global
BOOLEAN_YES	true	German	Boolean Yes	DAL - Setup Topics	global

Create or modify custom categories

Create or change custom categories for organizing and grouping related Virtual Agent assets, such as topics. You can also make category labels visible in the Topic picker menu displayed to end users.

Before you begin

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Use topic categories to group related conversation topics. When your create or update a topic, you can assign one or more categories to which the topic belongs. You can also view your topics by category in Virtual Agent Designer.

For your end users, you can make the custom category label visible in the Topic picker menu so that associated topics are displayed by category.

Before you create a new category, review the existing categories (**All** > **Conversational Interfaces** > **Virtual Agent** > **Categories**) to determine if you need a new category.

Note:
Pre-built topics have associated, default categories that can't be changed or deleted. Also, you can delete a custom category only when the category does not have any topics assigned to it.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Categories**.
2. Select **New** to create a custom category or select a category record to change it.


Field	Description
Name	Label for the category.
Description	Brief description of the category purpose.
Application	Application scope of the category.
Visible to end user	Option to display the category label in the Topic picker menu for end users. **Note:** ○ If you upgraded from a previous release, existing category labels are set to not visible. ○ This option does not control the topics displayed within the category. At the topic level, use the **Condition** field in the Topic Properties page to set conditions that control when a topic is displayed to end users.

3. Select **Submit** or **Update**.
   The topic category appears in the following items:
   - **Category** list collector (slushbucket) on the Topic Properties page in Virtual Agent Designer so that you can assign one or more categories to a topic.
   - **Category** filter on the Topics page, so that you can view topics by category.
   - Topic cards on the Topics page, for topics that have assigned categories.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Topic picker menu displayed to end users, if you made the category visible. Topics with multiple categories are displayed in the appropriate categories. Topics without categories are listed in the Others category.

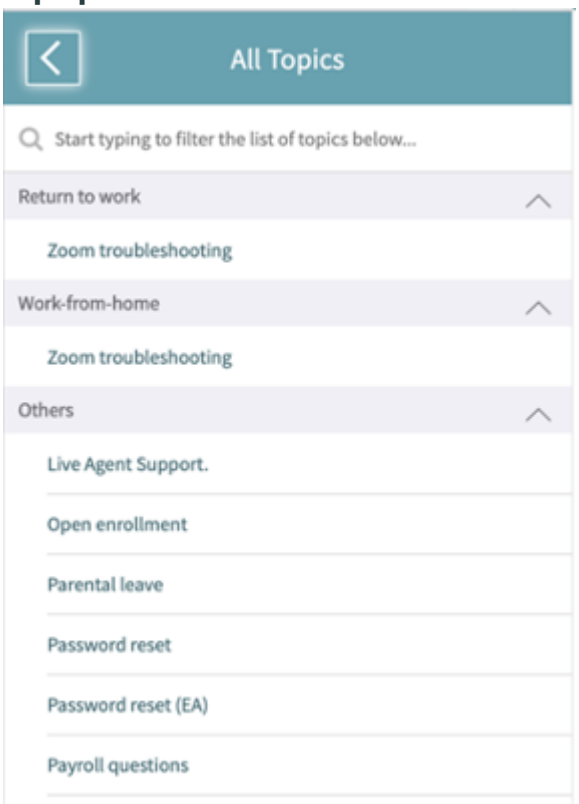Topic picker menu



4. To delete a topic category, open the category record and click **Delete**.
   If there are no topics associated with the category, the category is deleted. It is no longer listed in the **Category** field on the Topics Properties page and in the **Category** filter on the Topics page in Virtual Agent Designer.

Building and deploying Virtual Agent

Convert the time your agents and technicians spend handling low-impact user requests into an intelligently managed interaction. Enable Virtual Agent with NLU to understand the intent of what people are looking for and provide them with more relevant answers.

You can quickly deploy AI-powered chatbot conversations using customizable templates for the most common enterprise IT, HR, and customer service scenarios. You can design, build, and test conversations with Virtual Agent Designer.

Getting started with Virtual Agent Designer

The Virtual Agent Designer is a diagram tool for creating and managing topics, which are blueprints for conversations between a virtual agent and user. You can design topics that help your users resolve common work issues or guide them through self-service tasks. You can also view and manage conversational subflows and actions for LLM-enabled conversations in the Assistant Designer Asset library.

Virtual Agent conversations are built using topics. When building a topic, there are various components (controls) that you can use to build the logic of a conversation, as well as the responses that the user sees. Virtual Agent conversations can also include subflows and actions

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

if they were made conversational in Workflow Studio or topics that include subflows and actions through the Action utility node. Conversational subflows and actions are only available in Assistant Designer if Now Assist in Virtual Agent has been configured. Conversational subflows and actions only appear to users during a conversation if the Subflows and actions skill is turned on in Now Assist Admin. For more information, see Now Assist in Virtual Agent.

Note:
Conversational subflows and actions are not applicable to the Virtual Agent Designer legacy topic cards page view.

Virtual Agent can use either generative AI or Natural Language Understanding (NLU) to match the user's request with the appropriate conversation or topic.

With large language model (LLM) topic discovery, you can use generative AI through Now Assist in Virtual Agent to match the user's request with the desired conversation or topic. With Now Assist in Virtual Agent, you can test and publish your models from within Virtual Agent Designer. Now Assist in Virtual Agent uses LLMs and generative AI skills to improve deflection rates and reduce the amount of time-consuming work that Natural Language Understanding (NLU) topic discovery requires. For more information, see LLM topic discovery in Virtual Agent.

With NLU/keyword topic discovery, the topic author associates the topic with an intent within an NLU model. An intent describes what the user wants to achieve. User utterances are matched with intents to determine the most appropriate topic for the user. Associating a topic with a model and intent is called mapping.

If you're using ServiceNow NLU/keyword topic discovery, then Virtual Agent Designer integrates with NLU Workbench so that you can map topics to new or existing models and intents without leaving the interface. In addition, you can also modify utterances, test, train, and publish your models from within Virtual Agent Designer.

Assistant Designer Asset library

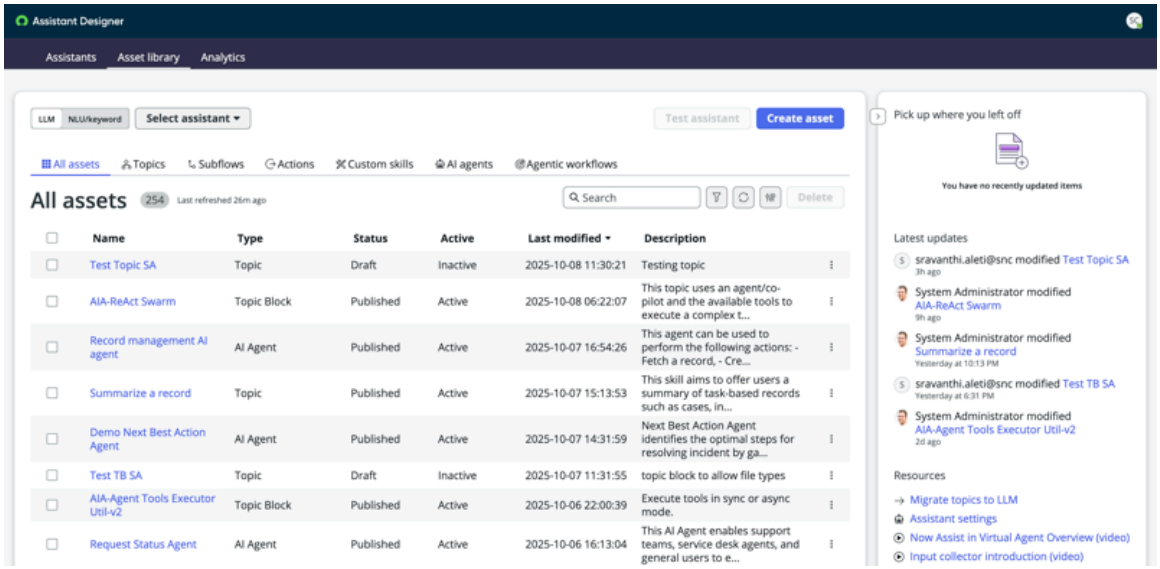
Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

When you open the Assistant Designer Asset library, you can view all assets in your instance. These assets include topics, topic blocks, setup topics, small talk topics, custom controls, subflows, actions, and AI agents.

Note:
Along with small talk topics, you can also set small talk filters to redirect conversations based on unexpected user statements. For more information, see Configure small talk filters.

On the Assistant Designer Asset library, you can access and edit any of these assets in Virtual Agent Designer, and create topics, topic blocks, setup topics, small talk topics, and custom controls.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Note:
Conversational subflows and actions are available in Assistant Designer if Now Assist in Virtual Agent has been configured. Conversational subflows and actions are also shown in Assistant Designer if the Now Assist Panel is available. For more information on the Now Assist Panel, see Now Assist panel

You can test and preview active topics to verify that they work as intended. You can also sort and search for topics. When you have many assets, use the search bar and filter icon to quickly organize and find your topics. For more information, see Assistant Designer Asset library.

Each topic list entry identifies the asset and provides the following information by default:


Field	Description
Name	Name of the topic. Template topics also contain `(Template)` in the name.
Type	Topic types include Topic, Topic Block, Setup Topic, Small Talk, Custom Input Control, Custom Response Control, Subflows, Actions, and AI agents.
Status	Status types include Draft, Modified (with unsaved changes), or Published.
Active	Whether the asset is active or inactive.
Last modified	Time (minutes, hours, days, or months) that the asset was last modified.
Description	Description of the asset. For topics, this field is created and updated on the Properties tab.

Example topic list entry



When you open a topic, a tab is displayed in the navigation header bar. The topic's name is shown on the tab, and a red dot appears if the topic has unsaved changes. Hover over the tab to view the scope in which the topic was created.

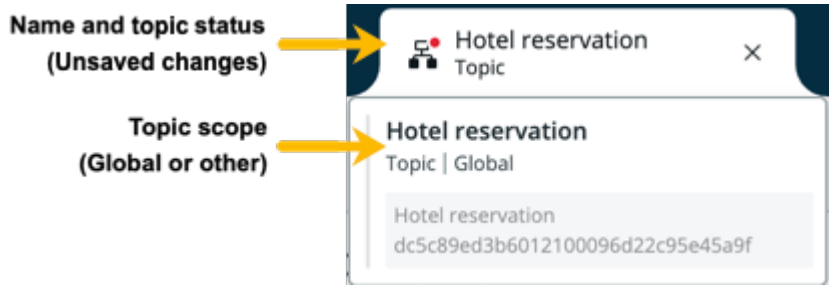© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




When you open a subflow or action, a tab is displayed in the navigation header bar. This tab opens the subflow or action in Workflow Studio within the Virtual Agent Designer environment.

Assistants

For LLM topics, the **Select assistant** list enables you to filter the assets based on the LLM Virtual Agent (assistant) selected. By default the following assistants are available for Assistant Designer:

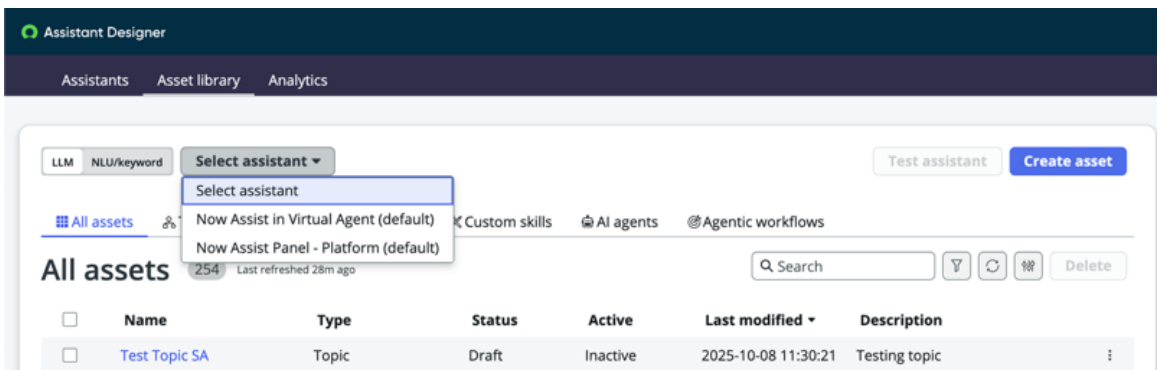- Now Assist in Virtual Agent (default)
- Now Assist Panel - Platform (default)



You can create new assistants from **Conversational interfaces** > **Assistants**. For more information about creating assistants, see Create a chat assistant.

For more information about LLM assistants, see LLM assistants.

Topic properties

Use the topic **Properties** tab to identify a Virtual Agent asset and how it's used. The properties you can specify depend on the method of topic discovery used in your instance: LLM or NLU/keyword. For example, if you have activated Now Assist and are working with an LLM topic, the **Properties** tab includes fields for what you want the topic to do and which assistants to use. If you have activated NLU, you can select **NLU/keyword** from the Type drop-down menu when you create a topic. The **Properties** tab includes fields for identifying the NLU model and intent for the topic.

Use the **Properties** tab to do the following:

- Specify the name and type of asset, such as topic, topic block, custom control, and so on.
- Specify the model type, purpose of the topic, and which assistants can run this topic for Now Assist customers.
- Specify the model type, add a topic description, specify the purpose of the topic, and select which assistants can run this topic for Now Assist customers.
- Control who uses the topic and what channels it can run in.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Associate live agent variables with a topic.
- Add keywords to the topic or map the topic to a ServiceNow NLU model and intent.

For more information, see Topic Properties tab.

Topic flow

When you create or update a topic, topic block, or custom control, you build the conversation flow on the **Flow** tab. In the default view, the flow looks like a diagram. Use the controls for user inputs, bot responses, and utilities to define the flow. The status of the topic and NLU model (if used) appears in the upper-right corner of the window.

The **Table View** option in Virtual Agent Designer displays the nodes in your conversation flow as a table, rather than as a diagram. Each node is identified in a corresponding row in the table. You can add, change, or delete nodes using these table rows.

For example, instead of dragging controls and dropping them onto the canvas, you can select **Add new node** to insert a node into the appropriate row in the table. When you focus on a particular row (node), the corresponding property sheet for the node is displayed.

As you create or update your design, you might find it helpful to switch between the diagram view and the Table View using the **Table View** option. If your conversation contains many nodes, the Table View lets you review all the nodes in your conversation quickly. You can use the **Search table** option to quickly find a particular node or control.

Use the **Flow** tab to do the following:

- Design your topic flow. For more information, see Design the flow of your topic.
- Add script variables. For more information, see Define script variables for a topic.
- Add entities to your topic. For more information, see Use system-derived entities in your topic.
- Add nodeless entities, if you're creating a topic for Add nodeless NLU entities to your topic flow.

For more information, see Topic Flow tab.

NLU model and intent mappings

If you activated NLU on your instance, the **NLU Intent** tab is available for your topics in Virtual Agent Designer. Once you have bound the topic to a model and intent on the **Properties** tab, you can use the **NLU Intent** tab to do the following:

- Review utterances used in your topic. For more information, see Review and edit utterances and associated entities.
- Train your NLU models. For more information, see Train, test, and publish your NLU model.

  Test the topic model with user utterances to see if it triggers the appropriate intent and topic. You can also test entity recognition.

Note:
The virtual_agent_admin role includes the nlu_admin role, which enables topic authors to work on ServiceNow models.

For more information about this tab, see Topic NLU Intent tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic languages

The **Languages** tab displays the topic's translation status for languages that have been activated on the instance for both LLM and NLU conversations. If you're using NLU/keyword, you can also review the language mappings for that topic.

Use the **Languages** tab to do the following:

- View translation status for activated language plugins.
- Test your topic with a given language. For more information, see View and test the topic in a specific language.
- Edit translations. For more information, see Edit the topic translations.
- Request translations. For more information, see Request topic translations in additional languages.
- View and update NLU language and entity mapping. For more information, see View or modify NLU language mappings and entity mapping.

  For more information, see NLU model mapping in Virtual Agent Designer.

For more information about this tab, see Topic Languages tab.

Designing a Virtual Agent topic

Walk through the design of an example Virtual Agent topic that enables users to view incidents they submitted. The example highlights various design controls that can be used to build the conversation flow.

Using Virtual Agent tools and features, you can develop conversations that address many issues that can be resolved without human intervention. Once you become familiar with the product and its capabilities, your creativity is one of the most important tools for developing conversations.

To get started more quickly, the following resources are available for Virtual Agent:

Now Assist in Virtual Agent

Create natural-language–based conversations with Now Assist. Virtual Agent uses large language models (LLMs) to improve conversation experience and self-service workflow success by way of generative AI skills.

Pre-built Virtual Agent topics, topic blocks, and ServiceNow NLU models

These pre-defined conversations help users with common self-service tasks in each business area, such as creating or updating cases or providing answers to frequently asked questions. Duplicate the pre-built topics you want to use, and then customize them for your organization.

Virtual Agent Topic Recommendations

Use the Topic Recommendations app to identify pre-built Virtual Agent topics that can be quickly implemented in your organization. Topic Recommendations uses Intent Discovery to analyze data from your organization and to find relevant pre-built topics that your organization can benefit from, and new topics that would be useful to create.

Getting started with conversation design

Use Virtual Agent Designer controls and reusable conversational elements to create the dialogue for your conversations between Virtual Agent and the end user. Before you begin, make sure you do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Identify the use case for a conversation.

Determine who will use a conversation topic and the goal, such as solving a user problem or assisting with a self-service task. Besides gathering key requirements for your topic, identify the information that you need from the user to complete the goal.

For example, you can review your support requests over time and other available metrics to determine common issues, use cases, and customer requests or goals. From there, you can predict recurring requests or issues that a virtual agent could help with.

Determine the structure of a conversation.

As you think about your conversation flow, identify the direct path to resolution. Then consider alternate paths where the conversation might branch, depending on the information supplied by the user. Consider how to handle each branch and whether users might loop back to an earlier point in the conversation.

Conversations have a beginning (the greeting), a middle, and an end, which may include a survey or an incident number to follow up on. In the middle, consider how the user might need to switch topics, depending on the issue.

If you're using LLM, consider whether you want to add or restrict any data collection from the user through means such as additional instructions to the LLM or customized slot-filling.

If you're using Natural Language Understanding (NLU), consider scenarios where a user might want to switch topics during a conversation session. For example, a user might want to change topics entirely. Or a user might get sidetracked and ask a question that seems out of context, maybe to engage in "small talk" with the virtual agent. Determine whether you want to let the user resume the original conversation after switching topics during the conversation.

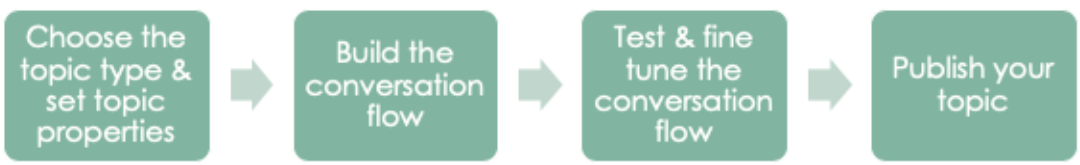
Consider setting small talk filters to redirect user statements in LLM conversations, or creating small talk topics in both LLM and NLU/keyword conversations. For more information, see Configure small talk filters and Create a small talk topic.

You can also review the pre-built setup topics, conversation topics, and topic blocks (reusable subflows that perform certain design steps and logic). Determine whether you can use these pre-built items and consider customizing them as needed.

Understand the design process in Virtual Agent Designer.

When you create a topic in Virtual Agent Designer, the design process involves these basic steps:

Topic design process



The topic properties determine the different ways in which a topic is designed and used. For example, you can control who uses the topic and any conditions that affect how or when the topic is used.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If you're using Now Assist in Virtual Agent, you can associate your topic with an LLM assistant to make the topic available to that assistant. You can also improve topic discovery for your LLM topic by using as much relevant detail as possible in the topic's description.

If you're using ServiceNow Natural Language Understanding (NLU), you can associate an NLU model and intent with your topic.

For details on the properties that you define for various assets, see Create a Virtual Agent topic, Create a reusable topic block, and Create a custom control.

Have knowledge in the following areas (what to know before you begin)

- General knowledge of the ServiceNow platform and application table structures.
- If you're using LLM, an understanding of how large language models and LLM assistants work.
- If you're using NLU, an understanding of how intents, entities, and utterances are used in your NLU models.
- If you're using scripts in conversation design, an understanding of HTML, JavaScript, and REST integrations.

Plan the structure and purpose of a conversation

The first step in implementing a Virtual Agent topic is to decide what the topic covers. Consider the intended audience and what you want the audience to accomplish when using the conversation. For this example, the goal of this example topic is to create a flow that enables end users to see the status of incidents they submitted. The topic includes an option for the user to add a comment to the incident.

With this goal in mind, the topic needs the following elements:

- A prompt for the user to select an incident
- An output showing the status of the incident
- A prompt to ask if the user wants to leave a comment
- A utility control to branch the conversation on that answer
- A prompt for the user to enter a comment
- A utility control to add the user input as a comment in the incident

There are extra considerations when creating topics for LLM conversations. For more information, see LLM description and instruction guidelines for Virtual Agent topics and General guidelines for writing instructions for generative AI large language models (LLMs).

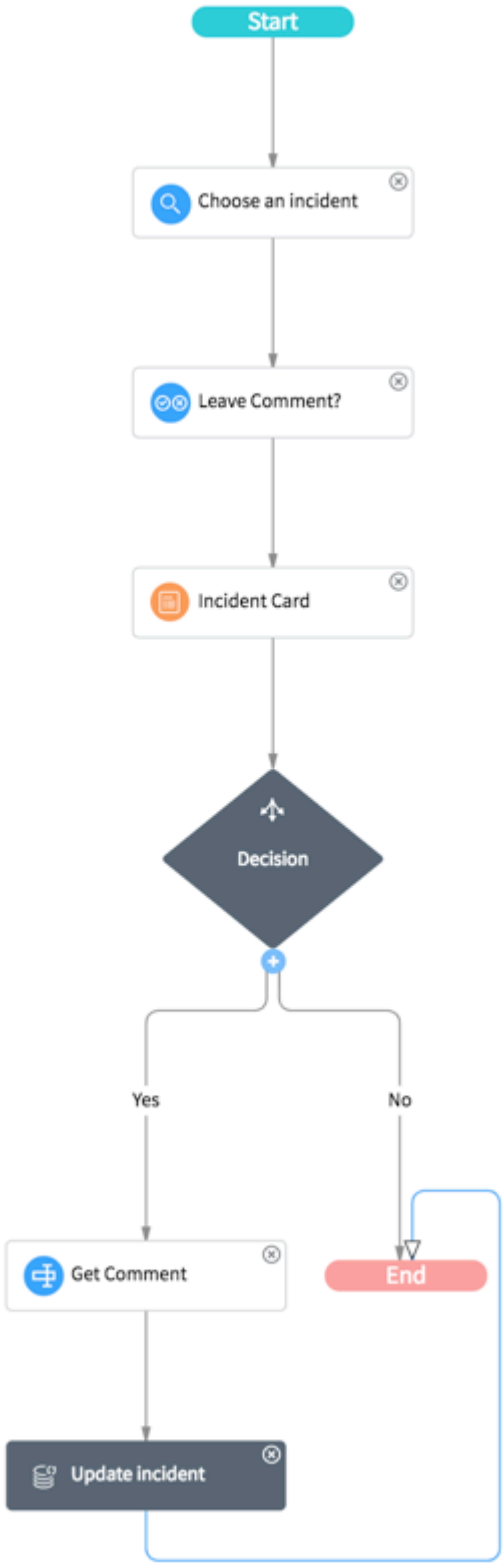
Build the conversation flow with Virtual Agent controls

The conversation will look similar to the following dialogue flow.

Important:
This flow is intended to give you a general idea of how a completed flow looks. Keep in mind that you will be building your topic incrementally and testing your topic frequently, so it's not necessary to build the entire layout first. Make sure to consider both functionality and user experience in your testing.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A completed conversation flow




Configure controls within the conversation

This example begins with defining the conversation flow in Virtual Agent Designer, after the topic properties have been set. The conversation begins with a Start node and finishes with an End node.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. In your Virtual Agent Designer topic, add a **Dynamic Choice** control node to the conversation flow. This control is used to select the incident.
   a. Enter `Choose an incident` for the **Node name** property. The variable name `choose_an_incident` is automatically generated for the control.
   b. In the **Prompt** property, enter the text the user sees before selecting an incident. For example, `Please choose an incident record`.
   c. In the **Populate choices by** property, select *Record*.
   d. In the **Table** property, select *Incident [incident]*.
   e. In the **Filter choices** property, select the **Condition** option, and create a condition:
      - Active is true AND Assignment group is Hardware AND Category is Database
      - AND
      - State is New OR State is In Progress

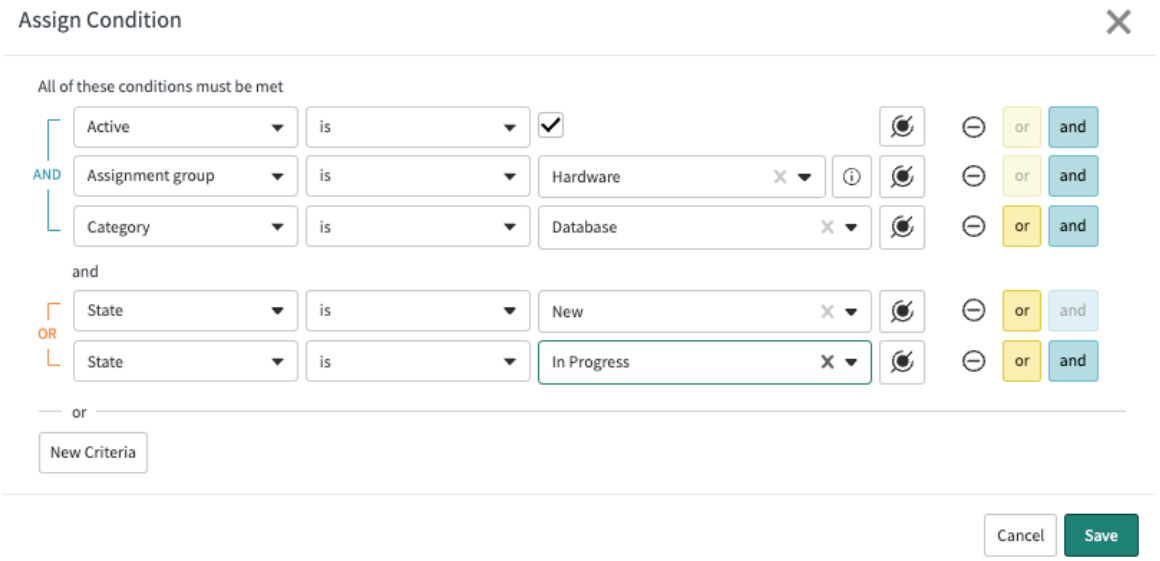An example condition builder



2. Add a *Card* control to the flow. This control shows information from the record selected by the **Dynamic Choice** in the previous step.
   a. Enter `Status Card` for the **Node name** property.
   b. In the **Card type** property, select *Record*.
   c. In the **Record** property, select *Choose an Incident*. This choice refers to the Dynamic Choice control created in the previous step, so the data displayed comes from the record chosen there.
   d. In the **fields** control, select a field. The choices available are the available fields on the chosen record. In this case, you can see the fields on the incident table.
   e. After a field has been selected, select the *Add Field* option to add additional fields to the card. To delete fields from the card, select the delete icon to the right of the field.
3. Add a *Boolean* control to the flow. This control is used to prompt the customer with a yes/no question. In this case, the control checks whether the user wants to leave a comment on the selected incident record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Enter `Leave Comment?` for the **Node name** property. The variable name `leave_comment_` is automatically generated for the control.

b. In the **Prompt** property, enter the text the user sees before the prompt. For example, `Do you want to leave a comment for this incident?`

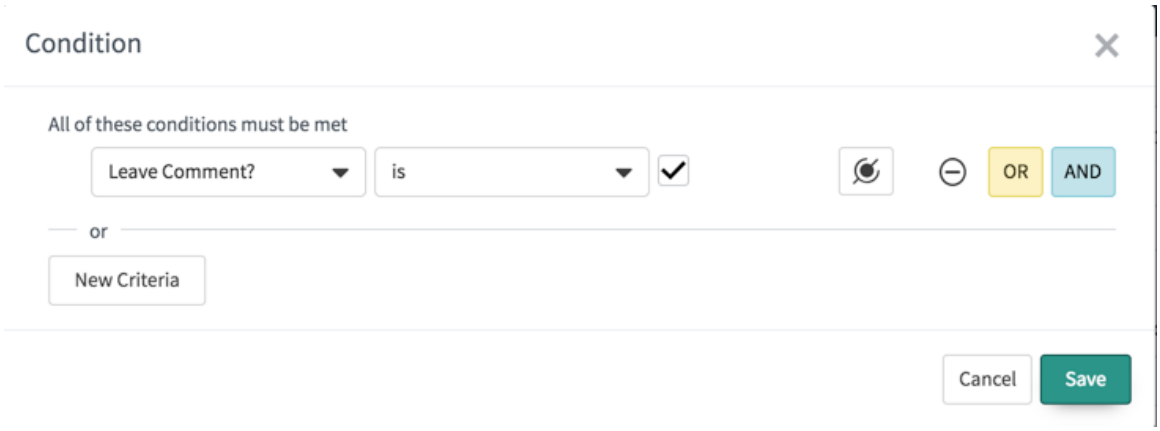
4. Add a *Decision* control to the flow. This control branches the conversation into two possible paths. The path the conversation follows depends on the choice the user made in the previous step.

a. There are no properties on the decision control; however, there are properties on the branches below the decision. By default, there is a single branch labeled *Always*. Select the blue plus icon at the bottom of the decision control. A second branch appears that is also labeled *Always*.

b. Select one of the branches to access the properties for this branch.

c. Change the name to `Leave Comment`.

d. In the condition property, select the **Condition** option and select the **Add Condition** button. Use the condition builder to create a condition as shown in the following screen shot.



If the value of the **Leave Comment?** is *true*, this condition is met. This variable is the variable from the Boolean control in the previous step. If the user chose *Yes* at that prompt, the conversation follows this branch.

e. Select the other branch of the decision to access the properties for this branch.

f. Change the name to `No Comment`.

g. In the condition property, select the **Condition** option and select the **Add Condition** button. Use the condition builder to create a condition as shown in the following screen shot.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If the value of the **Leave Comment?** is *false*, this condition is met. This variable is the variable from the Boolean control in the previous step. If the user chose *No* at that prompt, the conversation follows this branch.

h. One of the two branches you have created points to the **End** node of the conversation. The second branch should also lead to this node. Select the arrow at the bottom of that branch and drag it to the **End** node.

5. Add a **Text Input** control to the *Leave Comment* branch of the conversation. This control is used to request text input from the user.
   a. Enter `Get Comment` for the **Node name** property. The variable name `get_comment` is automatically generated for the control.
   b. In the **Prompt** property, enter the text the user sees before the prompt. For example, `Please enter your comment.`
   c. Optionally, you can enter a value in the **Advanced** > **Confirmation messages** > **Input completion confirmation** property. This value appears after the user enters a comment.
6. Add a **Record Action** control to the conversation below the *Get Comment* control. This control is used to add the text entered into the previous control as a comment on the selected incident.
   a. Enter `Update Incident` for the **Node name** property.
   b. In the **Action Type** property, select *Update a Record*.
   c. In the **Record** property, select *Choose an Incident*. This choice refers to the *Dynamic Choice* control created in the previous step, so the record chosen there is the one that this Record Action control updates.
   d. In the **Field** property, select *Add Field*. You can select and give values to fields from this record in the pop-up window that appears.



   e. Select the *Additional Comments* field from the list.
   f. Select the data pill picker icon , and then select the *Get Comment* input variable from the list. This option refers to the value entered by the user in the **Text Input** control in the previous step.
   g. Select **Save**.

Test the conversation

Use the **Test** button to test the flow of the conversation. Preview topics often throughout the design process to find errors or unexpected behavior quickly. For further information on identifying and resolving issues with topics, see Debug a Virtual Agent topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a Virtual Agent topic

Use Virtual Agent Designer to create and modify Virtual Agent topics (conversations). Build your topic to meet a specific objective or goal, such as fulfilling a user's request or helping a user complete a task.

Before you begin

https://player.vimeo.com/video/1011425825?h=9a3dc725e1&badge=0&autopause=0&player_id=0&app_id=58479

Do the following:

- Review Getting started with Virtual Agent Designer.
- Configure Virtual Agent settings. For example, if you're creating large language model (LLM) topics, turn on Now Assist in Virtual Agent. For more information, see Configuring assistants overview. If you're creating Natural Language Understanding (NLU) topics, configure NLU settings. For more information, see Configure Natural Language Understanding in Virtual Agent.
- Plan your conversation before you begin. For more information, see Designing a Virtual Agent topic.
- Verify that you're in the appropriate application scope before you create or update a topic. For example, if you're creating ITSM topics, verify that you're in the **ITSM Virtual Agent Conversations** scope (and not the scope for the ITSM NLU Model for Virtual Agent Conversations). For details, see Change the application scope for Virtual Agent Designer topics.

Role required: virtual_agent_admin or admin

About this task

The topic is in the Inactive state until you publish it. Publishing a topic changes the topic state to Active and automatically deploys the topic to your Virtual Agent clients.

The Large Language Model (LLM) topic type is faster and easier to set up compared to using Natural Language Understanding. You don't have to select NLU intents or train NLU models for your virtual agent. For more information, see LLM topic discovery in Virtual Agent.

When NLU is enabled, the Set up Natural Language Understanding (NLU) section is displayed in the Topic Properties page. You can use this section to specify the associated NLU model and intent for the topic. You can also optionally specify keywords that Virtual Agent can use as a fallback if NLU doesn't return a matching intent and topic. For more information, see Natural Language Understanding (NLU) topic discovery in Virtual Agent.

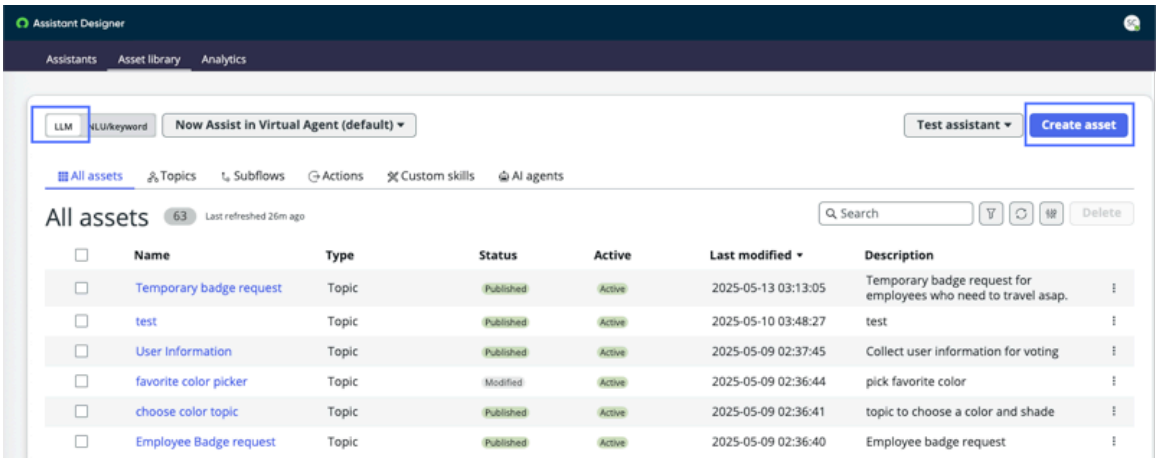
Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Set the discovery type toggle switch to **LLM** or **NLU/keyword** depending on the type of topic you're creating.
3. Select the type of topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


- For LLM topics:

  a. Select **Create asset**.




  b. From the Create asset window, select **Topic**.

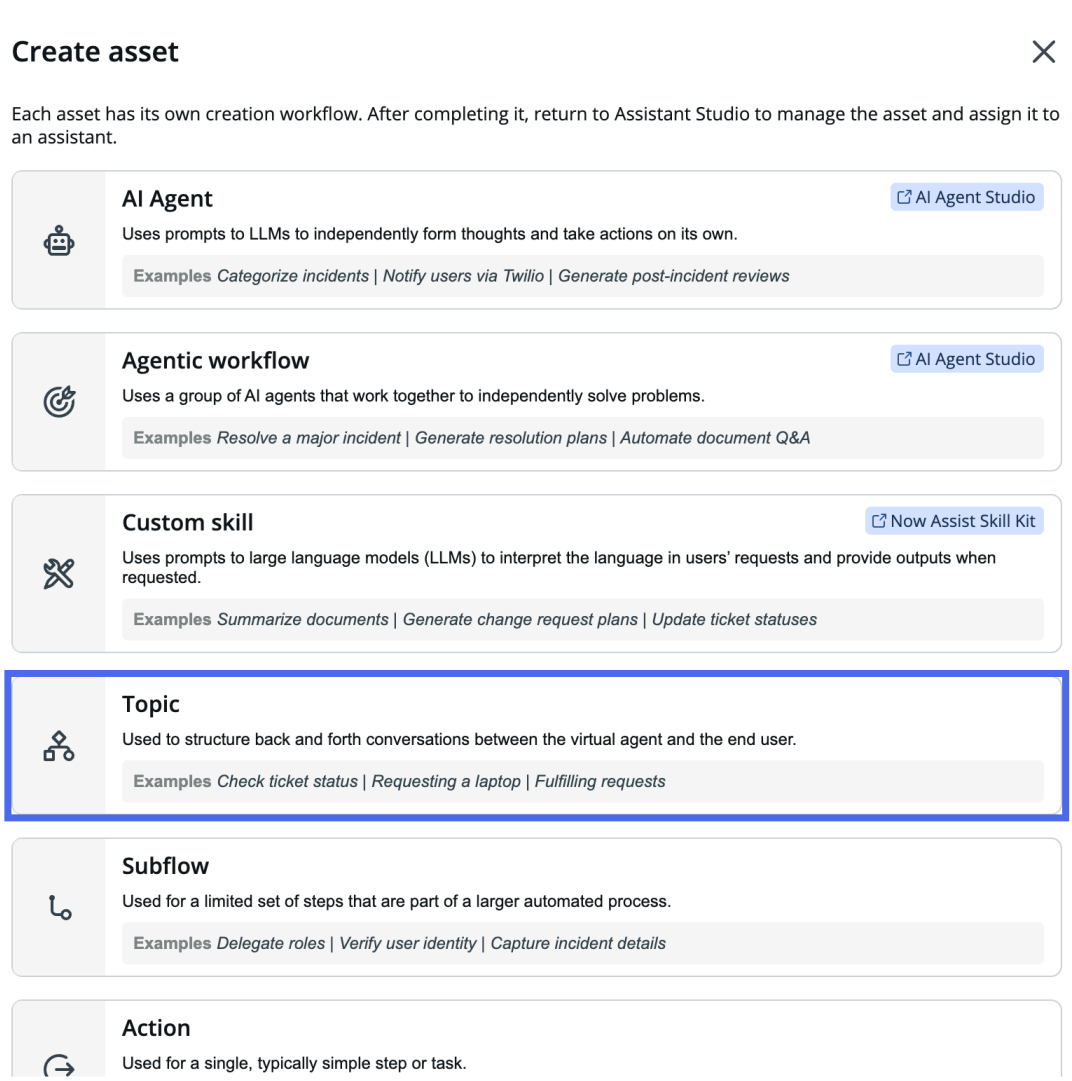© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Important:
Selecting any of the other assets in the window will open the create flow in the respective application.

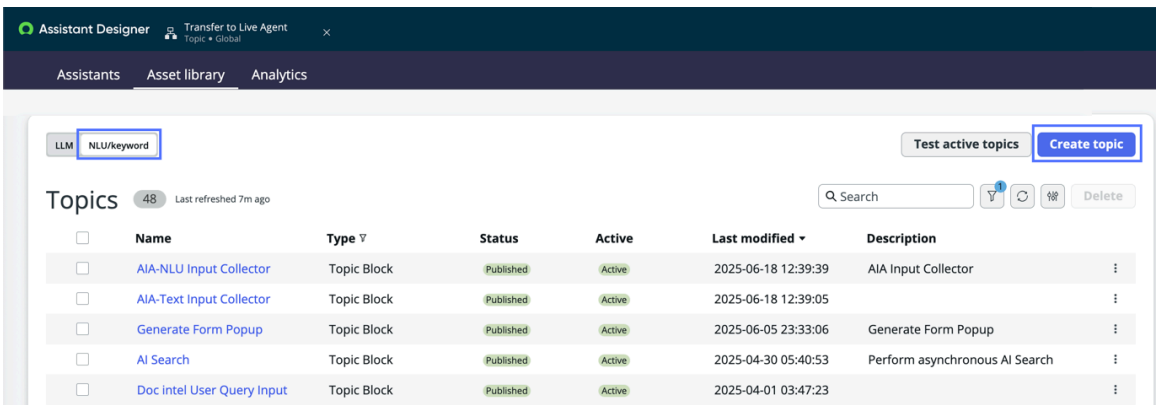- For NLU/Keyword topics, select **Create topic**.



4. On the form, fill in the fields.
   For a description of the field values, see Create a topic form.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. On the topic creation form, select **Create**.
6. On the **Flow** tab, build the conversation flow.

Flow steps	Description
Add controls	To create the topic flow: **a.** Select the controls for user inputs, bot responses, or utilities from the palette and drop them onto the canvas. When you add a control to the canvas, it becomes a node in the conversation flow. **b.** For each node, complete the corresponding property sheet. In the topic header bar, select **Save**. The topic header bar displays a `Saving in progress...` message. The toast message `Successfully saved your topic` appears in the lower-right corner afterward for 4 seconds, and can be closed by selecting the **X** in the message. For details about each control and the corresponding properties that you define, see User inputs, Bot responses, and Utilities. As you add controls, watch for a yellow warning badge or a red error badge in the corner of the control. The number on the badge indicates the number of issues in that control, such as missing mandatory information in the property sheet. (Highlighting a badge or the "Incomplete" banner at the top of the property sheet details the items in need of correction.)
Move a node	Select the node, drag it to the new location in the flow, and Select **Save**.
Delete a node	Select the **X** in the upper right corner of the node. In the topic header bar, select **Save**. The topic header bar displays a `Saving in progress...` message. The toast message `Successfully saved your topic` appears in the lower-right corner afterward for 4 seconds, and can be closed by selecting the **X** in the message. **Note:** You can't delete a node that has a script variable used by subsequent JavaScript expressions in the flow. Also, you can delete a decision node only when it has a single branch.

7. Select **Test** in the header bar to test your topic in a chat window.
   You can review test results in the adjoining tabs. For detailed information, see Testing LLM topics and Testing NLU/Keyword topics.

   If the Now Assist panel, Microsoft Teams application, or Slack application is configured for your environment, preview options for those channels are displayed in the Test button list. Select **Preview in Now Assist panel** or **Preview in Microsoft Teams** in the list to test your topic in those environments. For more information, see Integrating Virtual Agent with messaging apps.
8. When you're finished with the topic, select **Save** in the topic header bar.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The topic is in the Inactive state until you publish it.
The topic header bar displays a `Saving in progress...` message. The toast message `Successfully saved your topic` appears in the lower-right corner afterward for four seconds, and can be closed by selecting the **X** in the message.

What to do next

Publish the topic to deploy the topic to your Virtual Agent clients. The topic state changes to Active.

If you created a topic that might be frequently used in certain contexts (environments), consider promoting the topic as part of the default or custom chat experience.

NLU model mapping in Virtual Agent Designer

ServiceNow model groups help you to manage the localization of both topics and Natural Language Understanding (NLU) models more easily. You can map Virtual Agent topics to a new or existing model group directly from Virtual Agent Designer.

A topic is a Virtual Agent conversation. Users find the appropriate conversation using either keyword or NLU topic discovery. If you're using NLU for topic discovery, this means that your topic is associated with an NLU intent, which contains potential user utterances and other information. When a topic is associated with an intent, it's mapped to that intent. An NLU model is a group of related intents.

When you create or edit a topic and have ServiceNow NLU turned on, then you can do the following in Virtual Agent Designer:

- Map the topic to an existing model and intent.
- Map the topic to an existing model and create an intent.

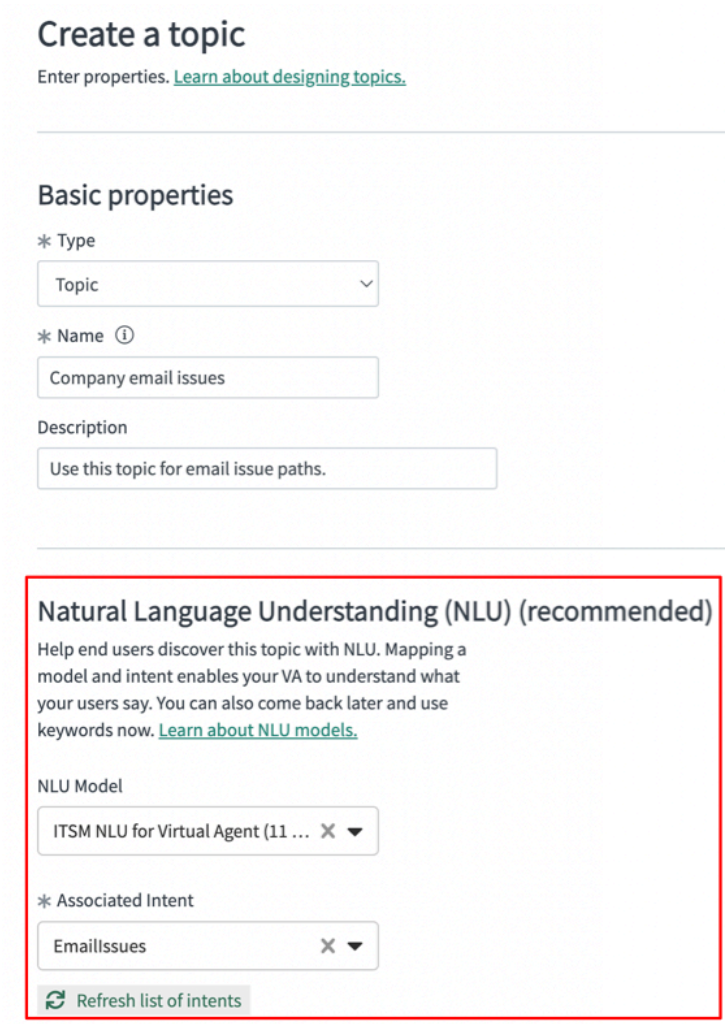
  Mappings are created for all languages that have been activated in NLU Settings as well. For more information, see Configure Natural Language Understanding in Virtual Agent.

- Create and map the topic to a new model and intent.

  If more than one language has been activated in NLU Settings, mappings are automatically created for secondary languages in the new model group. For more information, see Topic mapping to a multilingual NLU model group.

For example, when creating a topic, you can select the NLU model and its associated intent. In the following Company email issues topic, the selected model from the NLU Model drop-down list is the **ITSM NLU for Virtual Agent (11 languages)** model. After selecting the NLU model, the intent list refreshes and you can select your preferred intent. This action maps the NLU intent to this topic. You can change the NLU model and intent selections later on through the topic's **Properties** tab, if needed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Topic mapping to a multilingual NLU model group

When you map a topic to a multilingual model group in Virtual Agent Designer, the topic mappings for enabled languages are set up automatically.

Model groups contain a primary language model, such as English, and secondary language models. Secondary models are translated copies of the primary model, where each secondary model uses a different language. Any supported language can be the primary language for a primary model or the secondary language for a secondary model. The language is reflected in the model name. For example, FR for French, DE for German, JA for Japanese, and ES for Spanish.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

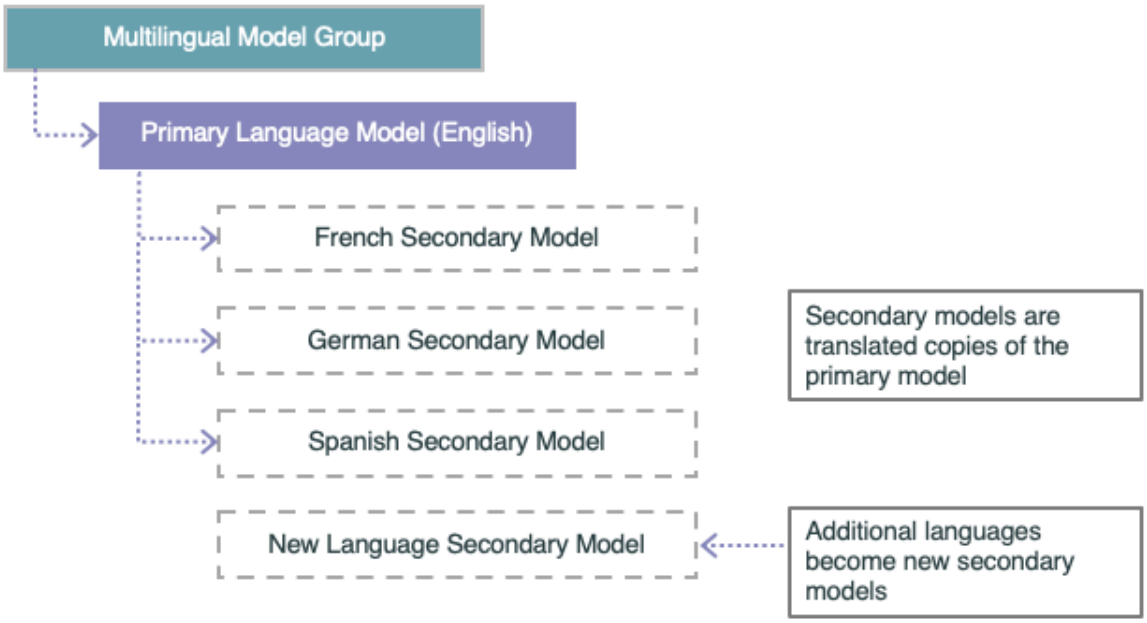
Multilingual model groups contain one primary language model and multiple secondary language models



You can view or change the model and intent mappings on the topic **Properties** tab. You can review secondary language mapping on the topic **Languages** tab.

Because secondary model content is only a translated copy of its primary model content, the secondary language mappings must always point to the same model group as the primary language. For this reason, if you map a language in a topic to a model that is part of a multilingual model group, then all of the topic mappings are updated to use the language models in that group. Virtual Agent Designer informs you of the change.

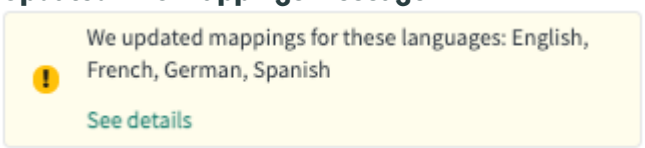Updated NLU mappings message



Note:
You can map single-language models to a topic as long as there is no conflict with the corresponding language models in the group.

If you create a model group in NLU Workbench, you can specify the primary language. If you create a model from within Virtual Agent Designer, the primary language is determined by the user session language. For example, if you create a new model in a German user session, the primary language of the model group will be German.

Model groups make it easier to maintain your topics. For more information about NLU model groups, see Multilingual model management.

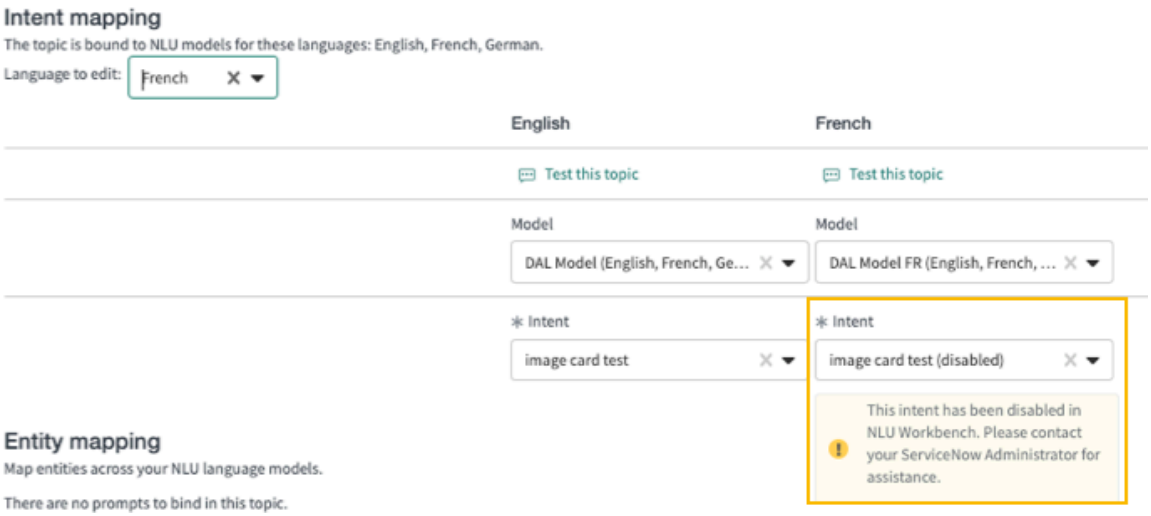
Note:
If a model contains only a single language, that language is considered to be the primary language. The topic is mapped to the model and specified intent only. If more than one language has been activated in NLU Settings, those languages are not mapped to the model. To use the topic in other languages, map them to other models manually on the **Languages** tab. For more information, see Map a topic to a secondary NLU model.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Handling disabled intents within a model

If an intent for the primary language within the model group is disabled, the primary intent displays as disabled in Virtual Agent Designer. When the primary language is disabled, the intent is still mapped to the topic, but all secondary intents are also shown as disabled. This is because the secondary languages are always dependent on the primary language within a model. If an intent for one or more secondary languages is disabled, the other languages remain active. Virtual Agent Designer displays messaging to indicate that some intents are currently disabled.

Topic with a disabled French intent on the Languages tab



To allow topic discovery for the language, enable the intent in NLU Workbench. For more information, see Enable or disable a secondary model intent.

Avoiding model conflicts

In order to avoid conflicts, Virtual Agent Designer may not display all of the existing models when you create or modify topics. Virtual Agent Designer does the following:

- Only displays model groups that contain language models that reflect the user's current session.
- Shows a warning if the selected model group has language mappings that will change existing language mappings, whether in another model group or in a single-language model.
- Automatically maps intents in each language model in the group to the topic.
- Ensures that duplicate model names or intent names are not used.
- If a topic is mapped to a multilingual model group, hides single-language model groups on the **NLU Language Mapping** tab.

If languages in a topic are mapped to intents in more than one model group, conflicts may occur. An intent can only be mapped to one topic. If this situation occurs when you attempt to publish a topic, Virtual Agent Designer displays an error message.

Modify NLU utterances and entities for a Virtual Agent topic

View, test, and modify NLU utterances for a Virtual Agent topic on the **NLU Intent** tab in Virtual Agent Designer.

Before you begin

If the topic is not currently mapped to a model and intent, the **NLU Intent** tab is not available. Specify a model and intent on the **Properties** tab in Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Set the topic discovery type toggle switch to **NLU/Keyword**.
3. Open a topic and select the **NLU Intent** tab.
4. On the **Utterances** tab, you can do the following:
   - Enter a new utterance in the box, and then select **Add**.
   - Select the pencil icon to edit an utterance.

     When you are done making changes, select **Save**.
5. **Optional:** Associate entities with words in utterances.
   Entities represent the context for the action. For example, common industry terms can be defined as entities to clarify the context. Universal system entities may include known elements like date and time or currency. NLU can match defined entities with user input to slot-fill the values. There are five types of entities you can define. For detailed information, see NLU entities.
6. Select **Save** in the header bar.

What to do next

After making changes, you can train, test, and publish the model from this tab.

Add NLU to an existing keyword topic

Create and map an NLU model group and intent for the topic from Virtual Agent Designer.

Before you begin

Configure NLU on the instance in Virtual Agent General Settings.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Open an existing topic.
3. Select the **Properties** tab.
4. In the **NLU Model** field, do one of the following:

   Note:
   If the **NLU model** field does not appear and you have Now Assist enabled, ensure that you haven't selected an LLM topic. Navigate back to the Topics page and select a topic that has the **Model Type** set to **NLU/Keywords**.

   - Choose an existing model.
   - Select **Create Model** to create a new model group.
     a. In the **Model Name** field, enter a name for the new model group.
     b. In the **Intent name** field, accept the default value or enter a name for the new intent.

     Note:
     New models are created in **Draft** state.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. In the **Associated Intent** field, do one of the following:
   - Choose an existing intent.
   - Select **Create intent** to create a new intent.

     In the **Intent Name** field, accept the default value or enter a name for the new intent.
6. **Optional:** In the **Keywords** field, enter key phrases or terms that users enter to initiate the conversation with the Virtual Agent.
   Press **Enter** after each phrase. Keywords are also used for languages that are currently not available in NLU.
7. Select the **NLU Intent** tab, and then add utterances and associate entities with them.
   For more information about adding utterances, see Create an NLU intent. For more information about defining entities, see Entities.
8. Make any other changes on the **Flow** tab, such as associating entities with a node or adding entities as input variables for the topic.
9. When you're finished with the topic, select **Save** in the topic header bar.

Result
The modified topic is in the inactive state until you publish it.

Add nodeless NLU entities as input variables to a topic

You can add nodeless NLU entities as input variables to a topic if NLU is enabled for Virtual Agent. These variables can be slot-filled from NLU service provider predictions or provided outside of the scope of the topic.

Before you begin
Role required: virtual_agent_admin or admin

About this task
If a custom control prompts a user for a date and the user mentioned a date in their initial utterance, you can capture that without prompting the user again. To prompt the user when not slot-filled, use input controls.

For more information about NLU entities, see Entities. For more information about system entities, see NLU system entities.

Procedure
1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Open a topic and view the **Flow** tab.
3. In the sidebar, select the Variables tab, and select the **Input** icon.
4. On the form, fill in the fields.

Add Input Variable dialog box

Field	Description
Input Types	Data type of the input. The fields on the dialog box change according to your choice. ○ **String**: Alphanumeric text. Shows the **Input format** field. Choose plain text or a conforming rule, depending on the type of data. ○ **True/False**: Boolean value, either yes or no.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	○ **Date Time**: Date, time, or both. Shows the **Input format** field. ○ **Static Choice**: Defined user choices. Shows **Display name** and **Value to store** field pairs. ○ **Dynamic Choice**: Choice of table records. Shows **Populate choices by**, **Table**, and **Filter choices** fields. The value can be either conditional or scripted. For details, see Input data types in Virtual Agent topics.
Name	Name of the variable for the entity. Variable names must be unique within the scope of a topic. The name appears as a variable when used in dot walking.
NLU Entity	The NLU entity associated with the node. This could be a pre-built Virtual Agent entity that you import into the model, a system entity (such as DURATION, TIME, or MONEY), or a custom entity that you created.
String data type properties	
Input format	Text format that is validated when a user enters certain text items. If the user doesn't enter the expected format, an error message indicates that the format is not valid and asks the user to reenter the text. Choose the format of the text item to be validated: ○ Text: Any text string (no validation) ○ Email: Format that consists of an email prefix (user name), @ symbol, and domain. ○ IP address (IPV4, IPV6): Data communication delivery format for Internet Protocol version 4 or version 6. ○ Phone number (E.164): Internationally recognized standard phone number format. ○ URL: Web address format ○ Custom: Script that provides a text validation rule for a custom text format and the related error messages displayed when the expected format is not entered. **Note:** For phone and IP address format examples, see E.164 phone formats and IP address field types.
Date Time data type properties	
Input format	Type of Date Time control to be displayed. Select one of the following formats: ○ **Date**: Shows only the monthly calendar for the user to select the date. ○ **DateTime**: Shows both a monthly calendar and time picker. ○ **Time**: Shows only the time picker for the user to select the time (hours and minutes).
Static Choice data type properties	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Choices [For Static Choice data type]	Enter two or more choices as follows: ○ **Display name**: Short phrase or text that appears to the user for that choice. ○ **Value to store**: The string that is stored in the variable when the corresponding choice is selected.
Dynamic Choice data type properties	
Populate choices by	Type of dynamic variable to be used. Select one of the following options: ○ **Record**: Returns records from the table selected. The values for these options are GlideRecord objects. ○ **Script**: Expression that returns an array of options.
Table [Record values only]	If you selected **Record** as the method to populate choices, select the table to be searched.
Filter choices [Record values only]	Select one of the following: ○ **Condition Builder**: Creates a filter used to select a subset of records from the table. ○ **Script**: Defines the enumeration list for the options (choice list) to be displayed. The name value pair is stored as a string object.

5. Select **Save**.

   NLU entities appear alongside topic input variables in the Variables sidebar.



Note:

You can remove a slot-filled value to prompt the user again (unbind it from the initial input value). For more information, read about the `vaInputs.myvar.unbindEntity();` method in Virtual Agent scripts.

Branch a Virtual Agent conversation with a Decision utility

Your conversations may need to branch depending on end user input or choices. Use the Decision utility to branch the conversation when certain conditions are met.

Before you begin

For more information about the Decision utility, see Decision utility.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Open a topic and view the **Flow** tab.
3. Drag the **Decision** utility onto the canvas.

   The **Decision** utility node added to the canvas has a single branch named **Always** by default.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If you insert a **Boolean** user input control, you're prompted to add a **Decision** utility directly after the Boolean node on the canvas. Selecting **Yes** on the Boolean node's Decision utility prompt automatically generates two branches named *True* and *False*. The two branches conditions are automatically set through the condition builder.

4. Click the plus sign (**+**) under the node.
   A second branch named **Always** is added below the Decision utility node.
5. Click the plus sign (**+**) under the node to add additional branches.
6. Click a branch label, and then specify the branch properties in the form.

Field	Description
Name	Unique name for the branch.
Condition	Expression logic to specify a condition for following this branch in the conversation. The condition must evaluate to true. ○ **Condition**: Use the Condition builder to add or edit conditions. ○ **Script**: Use the script editor to create or edit a script that contains a condition statement.

7. Define the properties for each branch in the Decision utility.
8. When you're finished with the topic, click **Save** in the topic header bar.

Insert a header card in a Static Choice or Dynamic Choice control

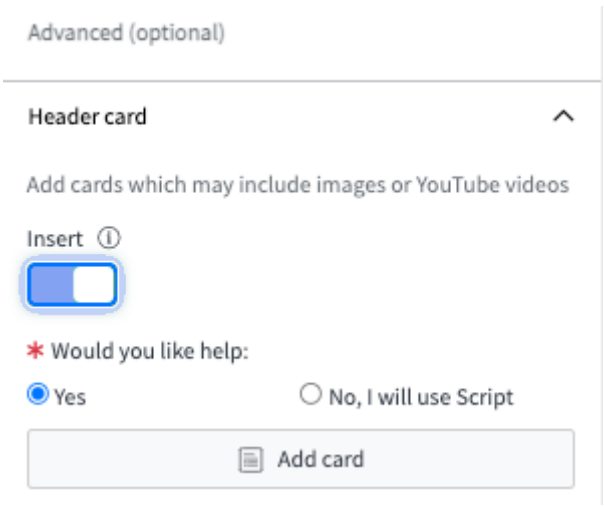
When you create a Virtual Agent topic, you can include images and YouTube videos on Static Choice and Dynamic Choice user input controls.

Before you begin
Role required: virtual_agent_admin or admin

Procedure
1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer** and open a topic or create a new one.
2. On the Flow tab, drag a Static Choice or a Dynamic Choice user input control onto the canvas.
3. On the Properties sheet, go to **Advanced (optional)**, and then expand the **Header card** section.
4. Slide the **Insert** toggle switch to enable it.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Insert a header card



5. Under *Would you like help?*, select either **Yes** or **No, I will use a script**.
   - If you selected **Yes**, select **Add card** and complete the following form fields.

Add card dialog box

Field	Description
Card type	Type of header card: ▪ Large image with text ▪ Small image with text ▪ Youtube Video Card The fields in the dialog box change according to your choice.
Title	Image or video title. You can enter it directly in the text field or use a data pill or script to provide the value.
Title Link	The URL to use for the video title hyperlink. You can enter it directly in the text field or use a data pill or script to provide the value. If this field is empty, the title displays as plain text. This field is only available for the YouTube video card option.
Description	Brief description of the image or video.
Image URL Link	URL link for the image. You can enter it directly in the text field or use a data pill or script to provide the value. You can also select **Upload Image** to upload the image. This field is only available for the large and small image card options.
Image alt text	Alternative, screen-readable text that describes the image. It's used for accessibility programs. This field is only available for the large and small image card options.
Youtube Video ID	The alphanumeric string at the end of the YouTube URL. For example, in the URL `https://www.youtube.com/watch?v=AacDp2mUQ1I` the YouTube video ID is `AacDp2mUQ1I`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	This field is only available for the YouTube video card option.

- If you selected **No, I will use Script**, select **Add script** to input a script to display your desired media, following the example in the script dialog box.

  Header Card script example

```
function() {
    /*
        var cardName = "Large image with text";
        var cardData = {
            title: 'Choose color',
            description: 'choose the right color of the
 flowers in the image',
            image:
 'https://homepages.cae.wisc.edu/~ece533/images/tulips.png',
            imageAlt: 'Choose color'
        }
        var template = "";
        if (vaSystem.isAMBClient(vaContext.deviceType))
            template =
 vaSystem.fillTemplateFromData(cardName,
 JSON.stringify(cardData));
     return {
         cardTemplate: template,
         cardName: cardName,
         cardData: JSON.stringify(cardData),
         renderStyle: "card"
     };
    */
    }
```

6. Select **Save**.

Change the application scope for Virtual Agent Designer topics

Set the application scope before you create or update a topic. For example, if you're creating ITSM topics, verify that you're in the **ITSM Virtual Agent Conversations** scope (and not the scope for the ITSM NLU (Natural Language Understanding) Model for Virtual Agent Conversations).

Before you begin

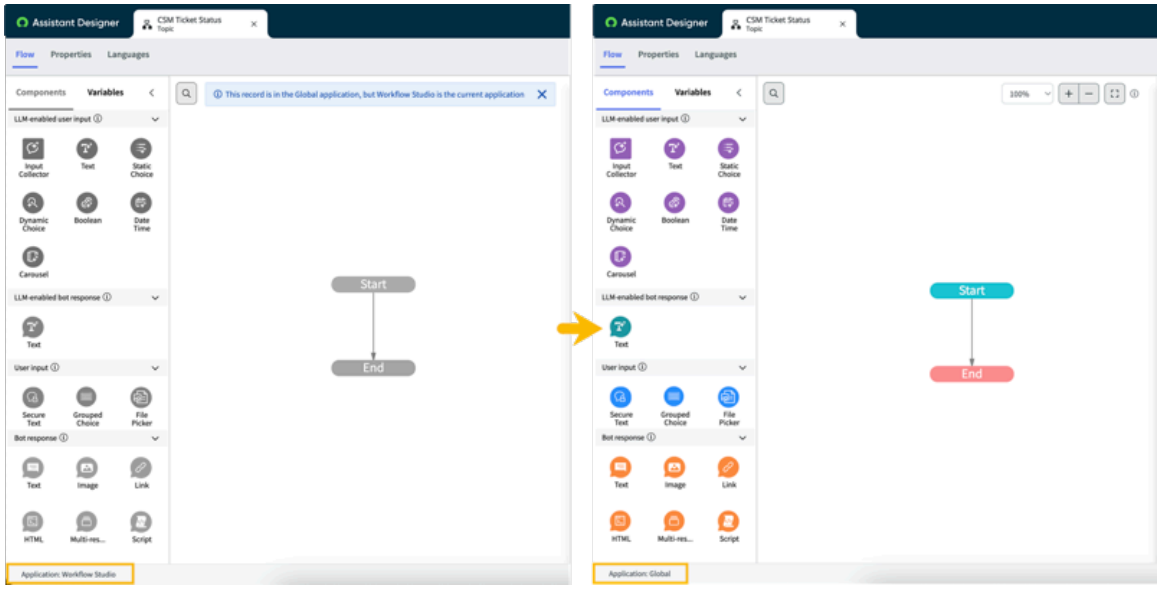
Role required: virtual_agent_admin or admin

About this task

When you open or create a topic, your current application scope is displayed in a status bar on the topic page. The status bar is visible in all tabs in your topic. If you open a topic not in your current scope, a warning banner appears on the canvas, and you can’t edit the topic. You can still activate or deactivate, publish, or duplicate the topic. If you duplicate the topic, the duplicate sets to your current scope.

If you have multiple topics open at once, every topic shows its individual scope, and all topics not set to the current scope are locked.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Procedure

1. In the unified navigation bar, select the globe icon ( ).
2. Select **Application Scope**, then choose the appropriate scope for your conversations. For example, select *`Workflow Studio`*.

> **Note:**
> If you're using domain separation, you can change the domain that you're working in. Select **Domain scope: global** to change the domain. Any topics created within a domain are restricted to users of that domain. For more information, see Domain separation and Virtual Agent.

Result

The application scope updates, and the new scope is displayed in the topic page when you refresh or open the topic. When the scope isn't global, a ring appears around the globe icon ( ).

If the new scope matches a topic that was locked before, the warning banner disappears and you can edit the topic.

What to do next

Return to creating or updating your topic. If you have multiple topics open, you can sort them by activating the **Organize tab groupings by scope** toggle switch in *`Preferences`*. For more information, see Assistant Designer Asset library.

Define script variables for a topic

Use the Variables sidebar to define script variables for a topic. Script variables can store information that is not found in ServiceNow tables. This information can then be shared elsewhere in a topic.

Before you begin

Role required: virtual_agent_admin or admin

About this task

For more information about writing scripts for Virtual Agent, see Virtual Agent scripts.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, open an existing topic or create a new one.
   The **Flow** tab displays the conversation flow.
3. In the sidebar, select the Variables tab, then select the **Script** plus  icon.
4. On the form, fill in the fields.

Add Script Variable dialog box

Field	Description
Variable name	Name of the variable. The name is case-sensitive. Spaces in the name are replaced with an underscore character.
Default value	Default value for the variable. You can use either a static value or a script that specifies a dynamic value for this variable.

5. Select **Save**.

Create a small talk topic

Build small talk topics that let Virtual Agent engage in casual conversation with users. A small talk topic provides a response to a casual question that users might ask during a conversation, such as the time or date. A small talk topic can occur anytime within a conversation session and can be unrelated to the original conversation intent.

Before you begin

If you're creating an LLM small talk topic, ensure you are familiar with LLM descriptions and instructions. For more information, see LLM description and instruction guidelines for Virtual Agent topics.

If you're creating an NLU small talk topic, define the corresponding intent in the appropriate NLU model.

Role required: virtual_agent_admin or admin

About this task

Small talk topics are conversations that diverge from the original bot conversation, usually to provide answers or information to casual questions that end users might ask. For example, you can create small talk topics that provide the current weather or time of day. When users engage with the bot through a small talk topic, they can return to the original conversation topic.

Note:
If you have activated Now Assist in Virtual Agent, you can also create small talk filters to redirect the conversation if needed. For more information, see Configure small talk filters.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, select **Create**.
3. For the Type, select **Small Talk**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Follow the steps for creating a topic.

Note:

- If you're creating an NLU/keyword small talk topic, fill in the following fields on the Properties page.

Field	Description
NLU Model	Model that defines the intent for this small talk topic.
Associated intent	Intent defined in the NLU model for this small talk topic.

- When you complete your small talk topic, remember to publish it when you are ready to deploy it to your Virtual Agent clients.

Control topic discovery and visibility

Admins and topic authors can enable Virtual Agent to discover topics for use in chats, include a topic in the list users see, or both. The topics can be setup topics and small talk topics.

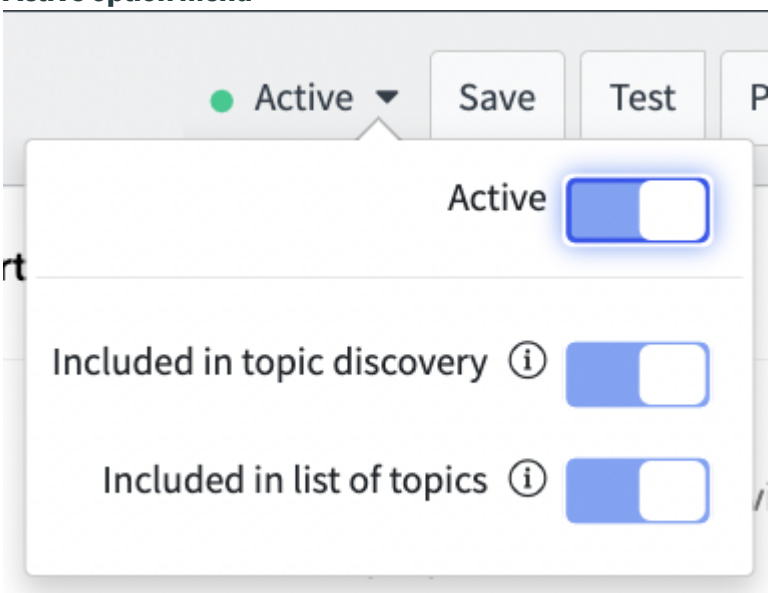
Before you begin

Role required: virtual_agent_admin or admin

About this task

Virtual Agent Designer includes two options in the **Active** option of the header bar.

Active option menu



Admins or topic authors can use these options to manage the active topics as follows:

- Include the topic in topic discovery.

  By selecting **Included in topic discovery**, admins or topic authors can enable Virtual Agent to discover the topic by using keyword or Natural Language Understanding (NLU) discovery.

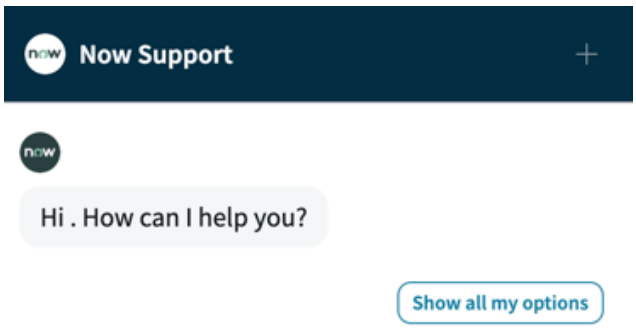
Note:
If these methods don't generate search results, or Virtual Agent can't determine the appropriate conversation to display, use AI Search as a fall-back method.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Include the topic in the list of topics available for use.

  By selecting **Included in list of topics**, admins or topic authors can include the topic in the **All Topics** menu. The **All Topics** menu lists all of the topics available for use.


  To see the **All Topics** menu, first select **Show all my options** in the chat window.






You should then see the **All Topics** menu.

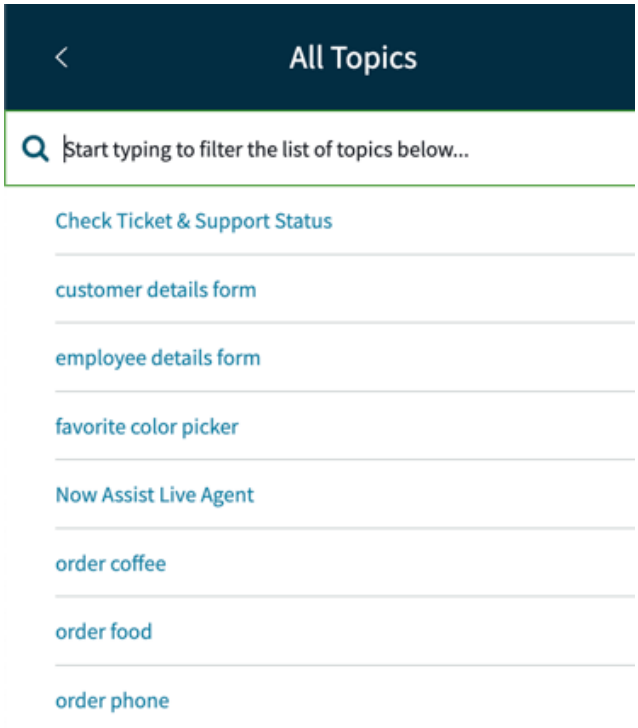© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



The options you select automatically update the corresponding property in the Topics [sys_cs_topic] table. For example, if you've enabled **Included in topic discovery**, the **Is Topic Discoverable** property in the Topics [sys_cs_topic] table is set to true.

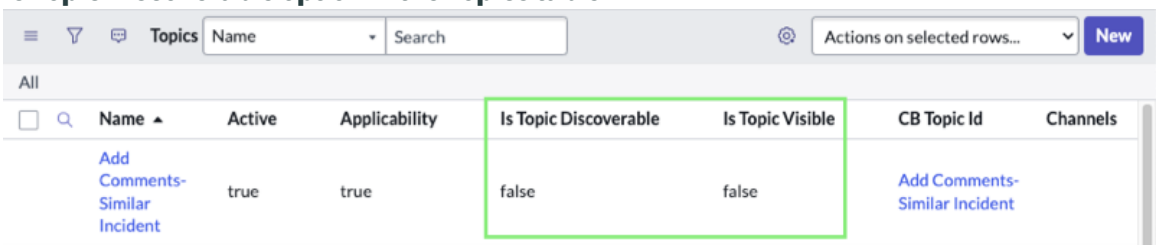Is Topic Discoverable option in the Topics table



Note:
If the fields are not visible, you can configure the form layout to show them.

Procedure

1. Create a Virtual Agent topic.
2. Select the **Active** option in the header bar.

   Note:
   Selecting this option also publishes the topic.

3. Select the options you want to use, or accept the default settings.
   Some options are enabled or disabled by default, based on the type of topic.

Default settings by topic

	Options	
	Included in Topic Discovery	Included in the list of topics
Topics	Enabled	Enabled

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

	Options	
	Included in Topic Discovery	Included in the list of topics
Setup topics	Disabled	Enabled
Small talk topics	Disabled	Enabled

4. Select **Save**.
5. **Optional:** Select **Test** to test the topic.

Result
Depending on the options enabled, Virtual Agent can discover the topic, the topic is included in the **All Topics** menu in the chat window, or both.

Use system-derived entities in an NLU topic

Associate system-derived entities such as such as date, time, duration, or location with a node in a topic.

Before you begin
Create the Booking Reservations NLU model and system entities (`FromLocation` and `ToLocation`) as described in Create a system-derived entity. In this example procedure, you will create a topic that can slot fill locations that are used in an utterance.

Role required: virtual_agent_admin or admin


Procedure
1. Create a new topic called `Booking Reservations`.
   When completing the **Properties** tab, make sure that you choose the Booking Reservations NLU model that you created in an earlier exercise.
2. Drag a Text bot response component onto the canvas, and then select it.
   In the properties sheet, fill in the fields.

Response Properties sheet

Field	Description
Node name	Type `Intro`.
Response Message	Type `Let's get you booked on a flight`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

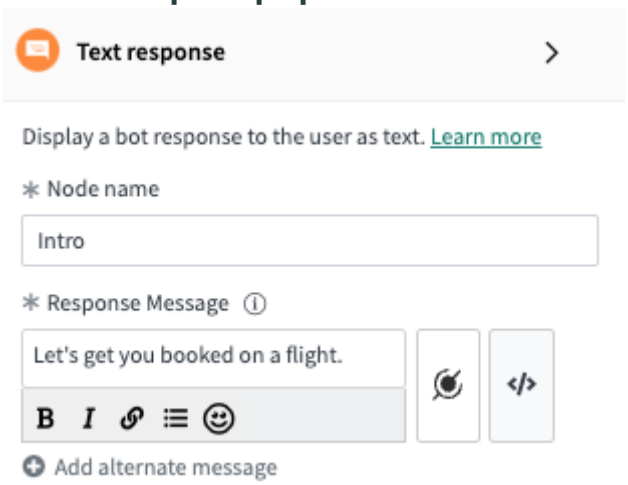Intro Text response properties




3. Drag a Text user input component onto the canvas.
   In the properties sheet, fill in the fields.

User Input Properties sheet

Field	Description
Node name	Type `Fromwhere`.
Prompt	Type `Where are you departing from?`
Input format	Select **Text**. This doesn't restrict the input format.
NLU entity	Select `FromLocation`. This list only shows existing entities, such as system entities or entities that you created for the model.
Do not ask users to confirm recognized entity	Select this option to avoid having Virtual Agent ask the user to confirm the location.
Advanced (optional)	
Topic switching	
Enable NLU to switch topics	Slide this toggle switch to enable topic switching.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

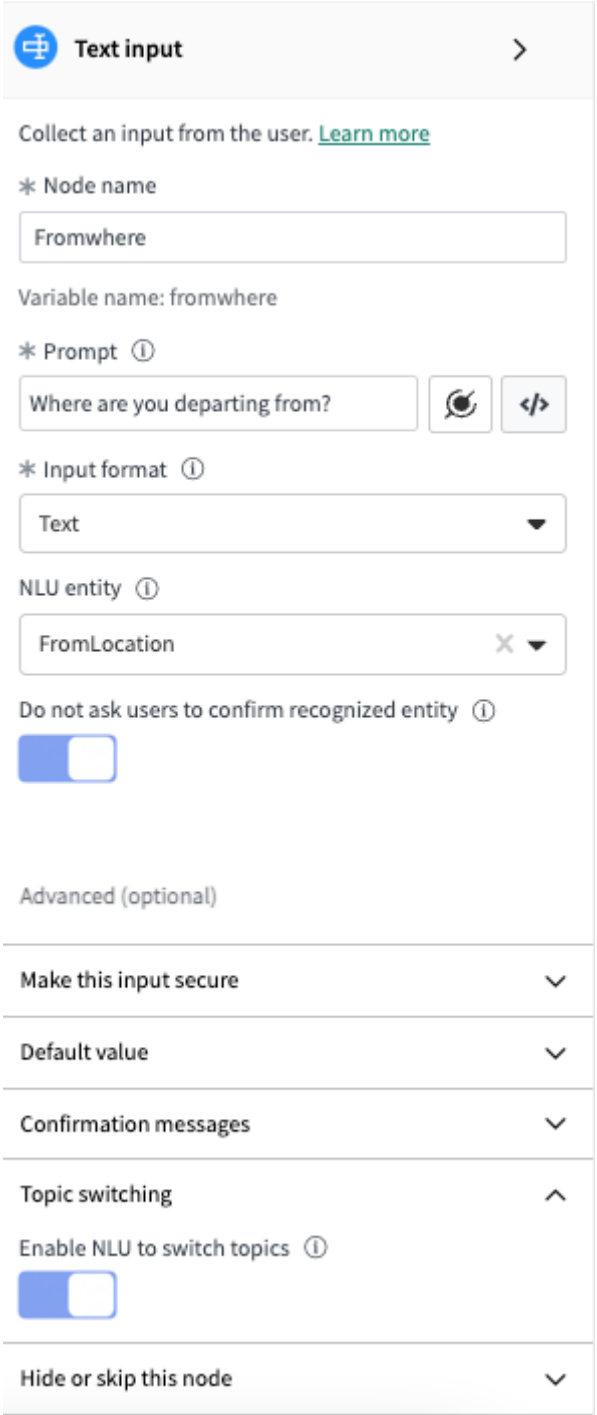Fromwhere Text user input response properties




4. Drag another Text user input component onto the canvas.
   In the properties sheet, fill in the fields.

Field	Description
Node name	Type `Towhere`.
Prompt	Type `Where are you heading?`
Input format	Select **Text**. This doesn't restrict the input format.
NLU Entity	Select `ToLocation`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	This list only shows existing entities, such as system entities or entities that you created for the model.
Do not ask users to confirm recognized entity	Select this option to avoid having Virtual Agent ask the user to confirm the location.
Advanced (optional)	
Topic switching	
Enable NLU to switch topics	Slide this toggle switch to enable topic switching.

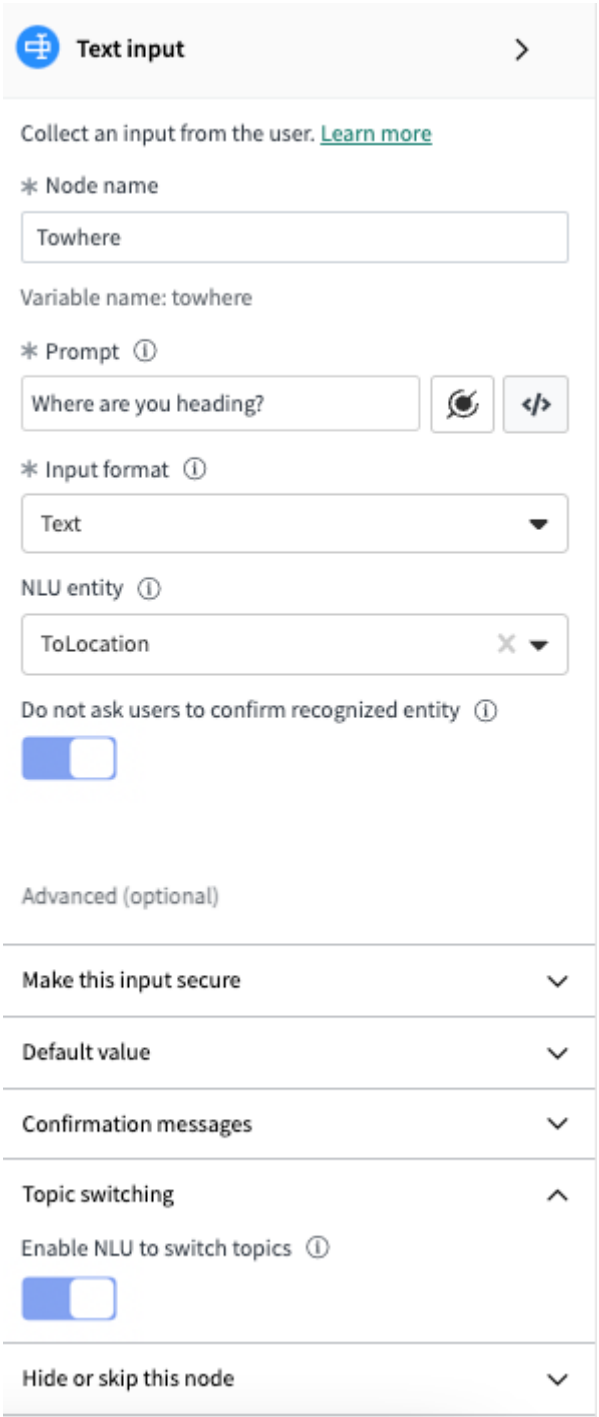Towhere Text user input response properties




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. Drag another Text bot response component onto the canvas, and then select it.
In the properties sheet, fill in the fields.

Field	Description
Node name	Type `Confirmation`.
Response Message	Type `Great! I have you booked on a flight from [Fromwhere] to [Towhere]. Bon voyage!` Use dot-walking to replace `[Fromwhere]` and `[Towhere]` with the input variables you created in the previous nodes.

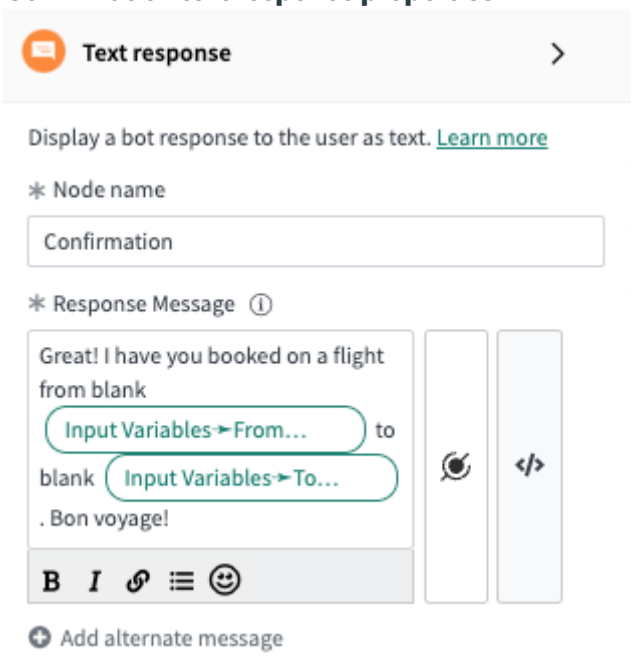Confirmation text response properties



6. Click **Save**.

What to do next

Use additional system-derived entities for your Booking a Reservation topic. For example, you can use system-derived entities to capture the dates that the user wants to travel.
For more information about default system entities, see NLU system entities.

Migrating NLU/keyword Virtual Agent topics to LLM topics

The topic migration workflow enables you to migrate your existing Natural Language Understanding (NLU)/keyword topics into new large language model (LLM) topics.

Now Assist capabilities bring generative AI to Virtual Agent using LLM topics. With topic migration, there's no need to manually recreate all your NLU and keyword topics to be LLM topics. You can select the topics that you want to migrate into LLM topics from your existing NLU and keyword topics. Migrating NLU and keyword topics doesn't change the original NLU or keyword topics. A copy of the existing topic is created during topic migration, but the new topic's **Model Type** field is set to LLM and includes LLM-compatible nodes and descriptions.

All types of topics can be migrated from the NLU/Keyword model type to the LLM model type during topic migration, including the following asset types:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Topic
- Topic block
- Setup topic
- Small talk
- Custom input control
- Custom response control

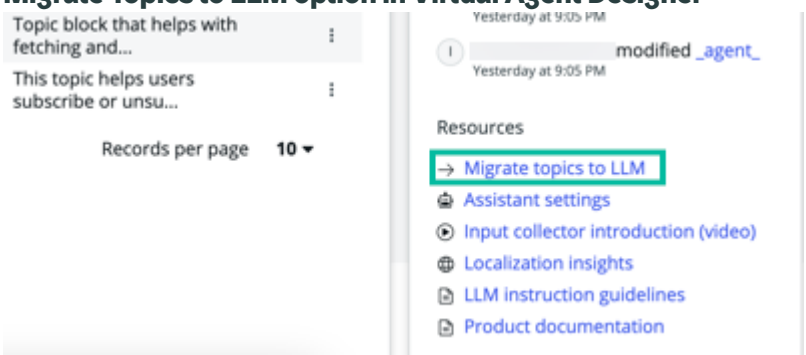
If no migration issues occur, the preceding asset types can all optionally be published except the topic block. Although dynamic topic blocks can be optionally published, the topic block type is automatically published after it's been migrated.

Roles and accessibility

Users with the virtual_agent_admin role or sn_vad_genai.topic_migration_admin role can work with topic migration. Topic migration is accessible through Assistant Designer in the **Migrate Topics to LLM** option.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

Migrate Topics to LLM option in Virtual Agent Designer



System properties

Use the system property **sn_vad_genai.utterances.count.for.topic.description** to set the maximum number of NLU utterances that can be given to the LLM to generate the topic description for an NLU topic migrated to an LLM topic.

Topic descriptions

When migrating NLU topics to LLM topics, you can choose whether you want to have generative AI create your LLM topic descriptions. When on the Settings step of the topic migration workflow, you can choose to **Keep current topic descriptions?**. The **Keep current topic descriptions?** option is off by default. When this setting is off, generative AI pulls either NLU intent utterances or keywords from topics to create LLM topic descriptions during the migration process. If the topic is associated with an intent, a maximum of 10 utterances are pulled into the LLM topic's **Detail description** field under an `Additional instructions` value. When this setting is on, generative AI doesn't create LLM topic descriptions and your existing NLU and keyword topic descriptions migrate into your new LLM topics. Migrating existing topic descriptions can result in issues if the existing topic doesn't have a description.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The **Detail description** field is required for LLM topics but not for NLU/keyword topics. If a new LLM topic is migrated over with an empty description, you must add a description prior to that topic being published. Regardless of how topic descriptions migrate, you can edit topic descriptions during the Review descriptions step of the topic migration workflow. You can also test your topic descriptions against the original NLU topic's utterances, if applicable, to improve relevance and topic description strength.

Note:
NLU utterances themselves are not effective if you use them as topic descriptions for LLM topics. Avoid using NLU utterances for LLM topic descriptions. LLM topic descriptions require more specific detailed information.

For more information on editing topic descriptions, see Migrate NLU topics to LLM topics. For examples of strong topic descriptions, see LLM description and instruction guidelines for Virtual Agent topics.

Node descriptions

Although NLU topics' node names migrate exactly as-is during migration, the node descriptions can vary. NLU input nodes use the **Prompt** field. LLM input nodes use the **Detail description** field. During topic migration, the value in the **Prompt** field migrates into the **Detail description** field's value. How the value migrates can vary depending on if that value included text-only, scripts, or data pills. Refer to the following table to view how the values migrate differently and compare examples.

How the Prompt field's value migrates to the Detail description field's value

NLU Prompt field value	LLM Detail description field value
Contains text	Migrates text as-is. For example, if the NLU **Prompt** field's value is `Enter the incident number`, then the LLM **Detail description** field's value is also `Enter the incident number`.
Contains script or data pill	Migrates using the following template: `Collect + Node name`. For example, if you have an NLU node named `Get incident number` and the **Prompt** field's value contains a script or data pill, then the migrated LLM node's **Detail description** field's value is `Collect Get incident number`.

If the topics that you plan to migrate include scripts or data pills in their existing **Prompt** field, review and update the LLM **Detail description** field after migration for each affected topic. A warning message of `Add relevant detail description` appears for LLM topics on the Virtual Agent Designer canvas for each node that migrated with the template of `Collect + Node name`. Updating the description to something more accurate and descriptive improves your users' experience of interacting with the Virtual Agent. For an example of a strong node description, see LLM description and instruction guidelines for Virtual Agent topics.

The following entities can be migrated from NLU nodes to LLM nodes:

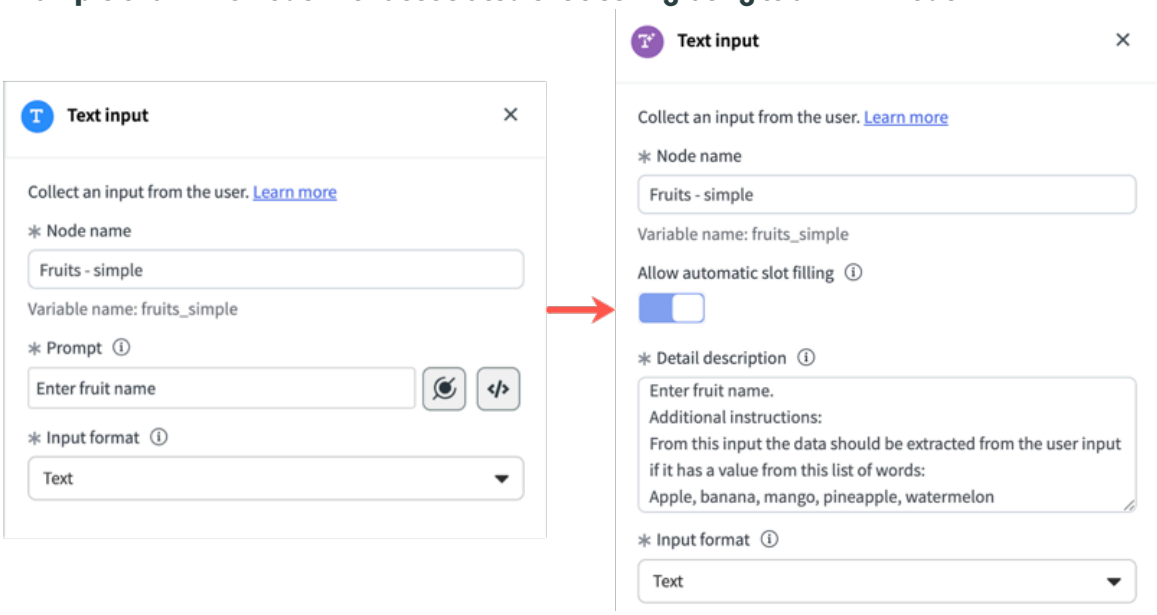
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- simple
- mapped
- pattern
- system-derived

If an NLU node is mapped to an entity, those utterances' entities are added to the LLM node's **Detail description** field under an `Additional instructions:` make-shift header value. The `Additional instructions:` content differs slightly depending on the type of entity that is migrated. The layout of the **Detail description** field value resembles something like the following:

- `[Prior NLU Prompt field value]` if the value was text-only and not a script or data pill.
- `[Additional instructions: For this input, the data should be extracted from the user input if it has a value from this list of words: [simple entity word list].`

Example of an NLU node with associated entities migrating to an LLM node



If you had vocabulary sources established in your NLU topic's text nodes, the list and table vocabulary sources migrate into LLM nodes. Text nodes with list vocabulary sources are migrated into static choice nodes. The vocab source selections appear in the LLM static choice node's **Detail description** field under an `Additional instructions:` make-shift header value. Text nodes with table vocabulary sources are migrated into dynamic choice nodes. The vocabulary source's table is migrated into the LLM dynamic choice node's **Table** field. The vocabulary source selections are migrated into a script and appear in the LLM dynamic choice node's **Detail description** field under an `Additional instructions:` make-shift header value.

Migration issues

You can access migration issue data either by searching for `topic_migration_execution_item.list` in the Navigation pane or downloading the .CSV file version of the table. After you've migrated topics, the downloadable .CSV file is accessible through the **Review migration log** option in the topic migration's Migrate topics step. For more information about migration issues, see NLU to LLM migration log.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Migrate NLU topics to LLM topics

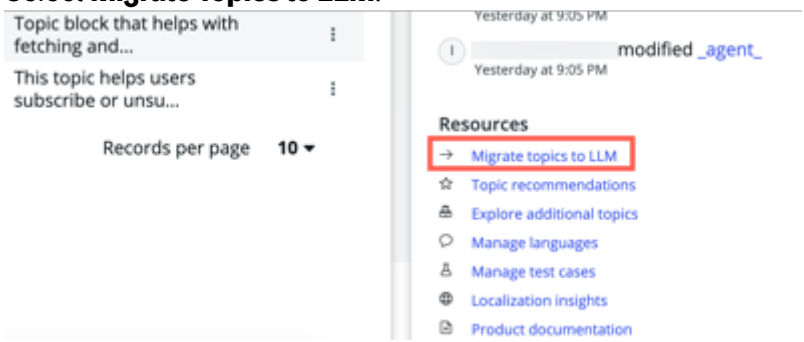
Migrate one or more of your existing Natural Language Understanding (NLU) or keyword topics into new large language model (LLM) topics while maintaining your original NLU/keyword topics. After migration is complete, choose whether to publish your new LLM topics.

Before you begin

Role required: virtual_agent_admin or sn_vad_genai.topic_migration_admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Select **Migrate Topics to LLM**.




Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

The Topic Migration workflow opens in a new browser tab.

3. Review and determine which NLU and keyword topics you want to migrate into LLM topics on the Select topics step.

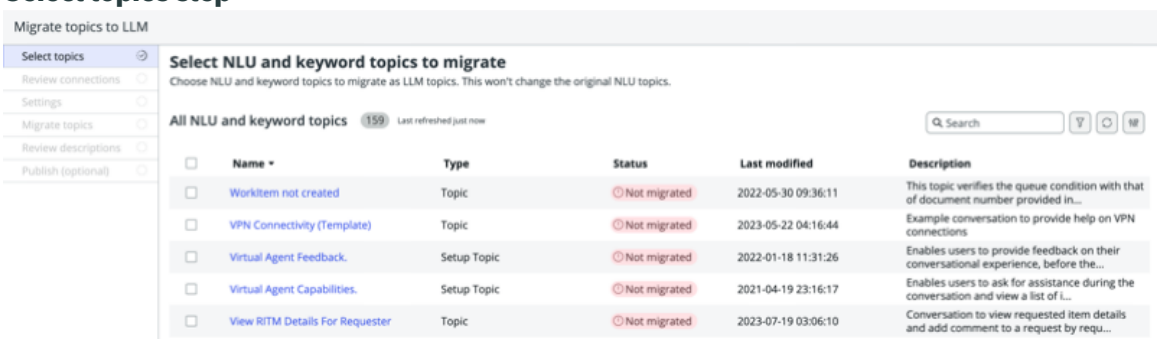Select topics step



Tip:
Select the link in the Name column to review the topic in the Assistant Designer canvas in a new browser tab. Migrate fewer than 50 topics at one time to give yourself enough time to review the topics.

4. Select which NLU and keyword topics you want to migrate, and then select **Next** on the Select topics step.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

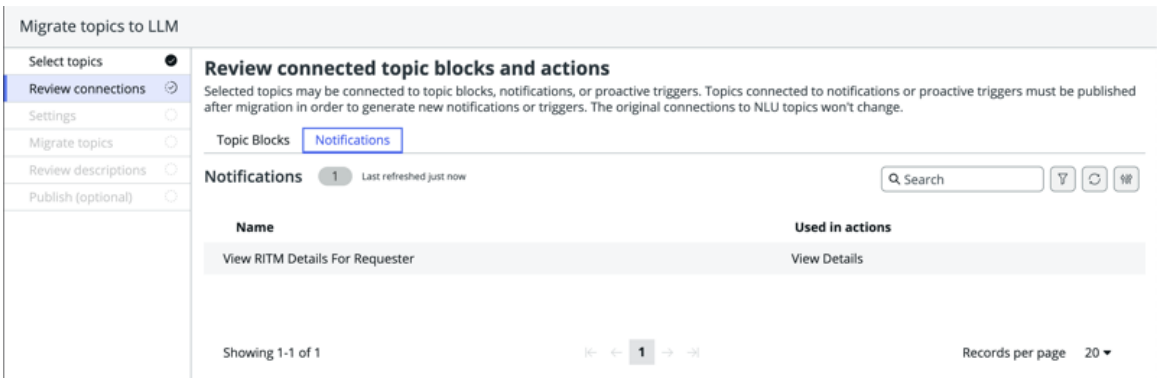
Important:
If you leave the topic migration workflow, you're unable to return to where you left off and you must restart the process.

5. Review the affected topic blocks, Virtual Agent notifications, and Proactive Triggers, and then select **Next** on the Review connections step.

   On the Topic blocks tab, only topic blocks and topic blocks connected with the selected topics are displayed in this list. Dynamic topic blocks must be manually selected for migration. You can select the link in the Topic Block column to view the topic block in the Assistant Designer canvas in a new browser tab. Although dynamic topic blocks can be optionally published, topic blocks are automatically published after migration. The Virtual Agent Notifications and Proactive Triggers tabs only appear if the topics you've selected for migration have notifications or Proactive Triggers associated with the original NLU topic. You can select the link in the Topic Name column on their respective tabs to view the NLU topic in the Virtual Agent Designer canvas in a new browser tab. The LLM-compatible Virtual Agent notifications and Proactive Triggers are created and connected to the new LLM topics only after those topics are published through the last Publish step in the topic migration workflow.

   Note:
   The Proactive Triggers tab is only applicable if you've installed the Proactive Triggers [sn_pt] app version 3.0.1 or later and have turned on this feature. If you'd prefer to manually migrate your actions for Virtual Agent notifications and Proactive Triggers rather than them automatically migrating after the Publish step, set the *com.glide.cs.notification.create_llm_actions_after_topic_migration* and *com.glide.cs.proactive_trigger.create_llm_actions_after_topic_migration* system properties to `false` in **All** > **System Properties** > **All Properties**.

   Example of the Review connections step with the Topic blocks and Notifications tabs

Note:
If no topic blocks, notifications, or Proactive Triggers were selected or connected to the selected topics, their respective tabs don't appear.

6. Choose which settings to apply to all topics migrating to LLM, and then select **Next** on the Settings step.


   Settings field description

Field	Description
Select assistant(s) for migrated topics	Migrated LLM topics are associated with these assistants. Associating topics to an

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	assistant makes those topics discoverable with that assistant. For topic discovery results, associate LLM topics with an assistant. When you select an assistant, you can view whether that assistant is a primary or secondary assistant. When testing a primary assistant, topics from secondary assistants are included in topic discovery. When testing a secondary assistant, topics from primary assistants aren't included in topic discovery.
Choose how migrated topics are named	Newly migrated topics include the value entered in the **Add to internal topic name** field as either a prefix or suffix (default). This option only affects the migrated topics' **Internal name** value and not the topics' **Display name** value. The original NLU topic name is used as the **Display name** to customers interacting with LLM topics in Virtual Agent.
Keep current topic descriptions?	Current topic descriptions are used as the LLM topic descriptions rather than using generative AI to create topic descriptions for migrated LLM topics. This field is turned off by default. If this field is turned on, and there was no topic description in the original NLU topic, a topic description must be manually added to the new LLM topic before publication.

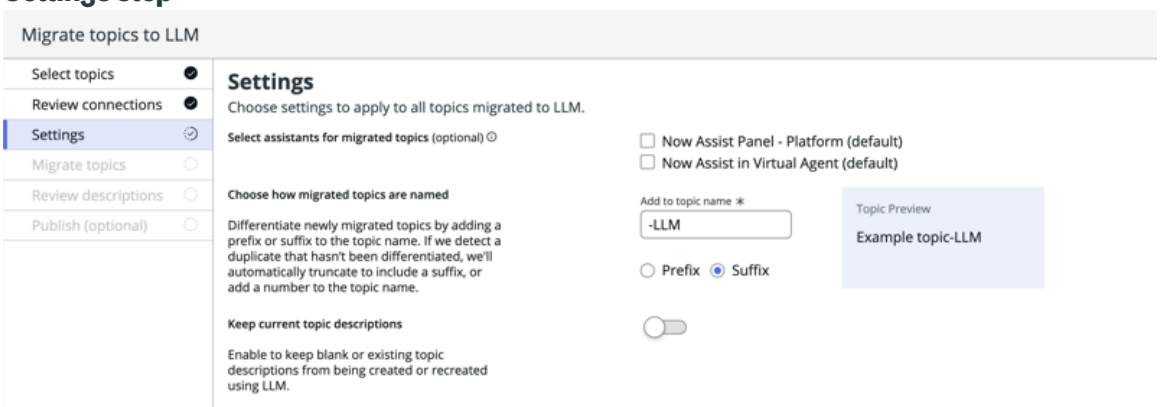Settings step




7. Review the topics for migration on the Migrate topics step, and then select **Next** to begin migration.


Note:
Leave the browser window open until the migration process is complete.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

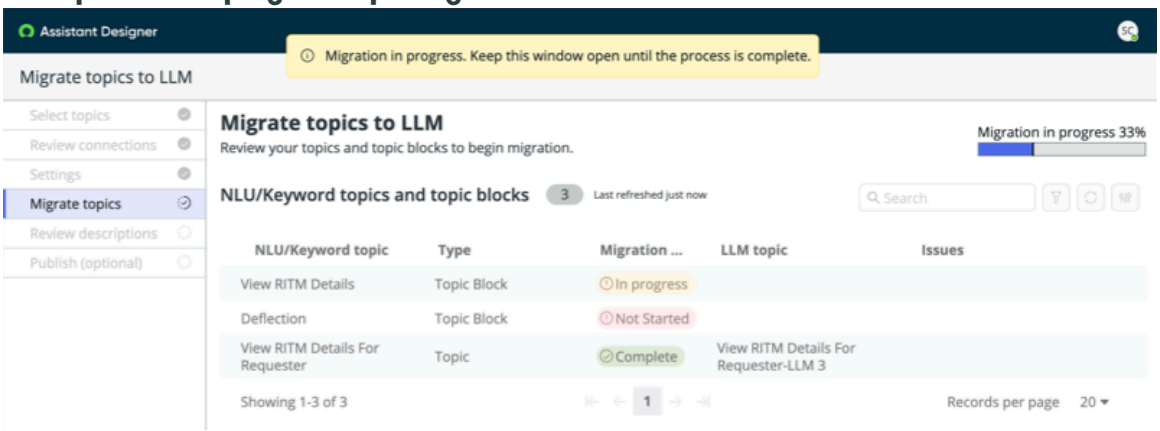Example of an in-progress topic migration



Example of a completed topic migration

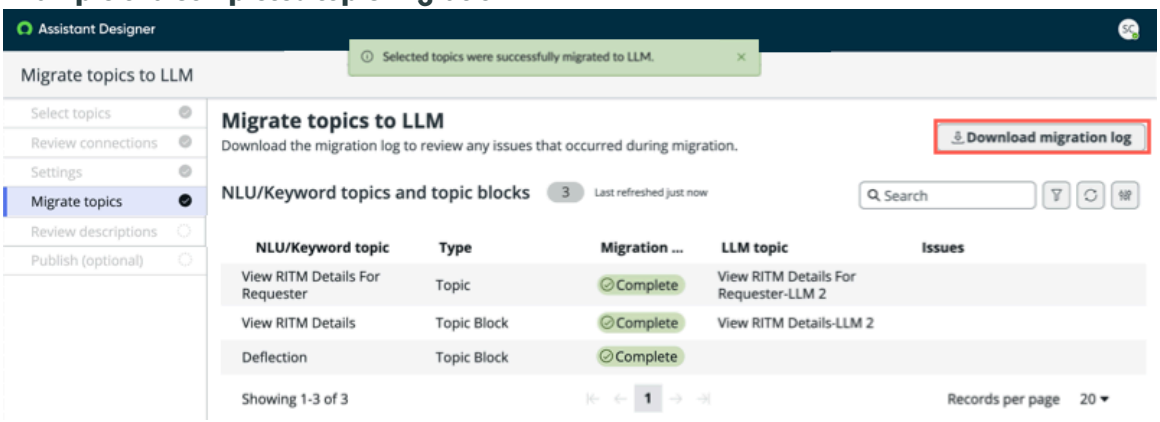


The migration complete progression bar appears and displays a dynamic percentage of completeness. During migration, the Migration status column updates dynamically with the values changing from `Not started` to either `Failed` or `Complete`. After migration is complete, any topic blocks selected, or those associated with the selected topics, are automatically published. You can choose to select **Review migration log** or **Next**. Selecting **Review migration log** downloads a .CSV file of the Topic Migration Execution Items [topic_migration_execution_item.list] table data. For more information on this table data, see NLU to LLM migration log. Selecting **Next** continues the workflow to the Review descriptions step.

8. Continue to the Review descriptions step by selecting **Next**.
   The new LLM topics that you've migrated appear, along with their migrated topic descriptions, and any available NLU utterances that were associated with the migrated topics' original NLU topics.
9. Choose one of the following scenarios.


Note:
The display name, not the internal name, of the new LLM topics appears. The display name of the new LLM topics matches the existing NLU topic's display name. If you select the LLM topic link, you are redirected to that topic in Virtual Agent Designer through a new browser tab or window. For additional information about strong LLM topic descriptions, see LLM description and instruction guidelines for Virtual Agent topics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

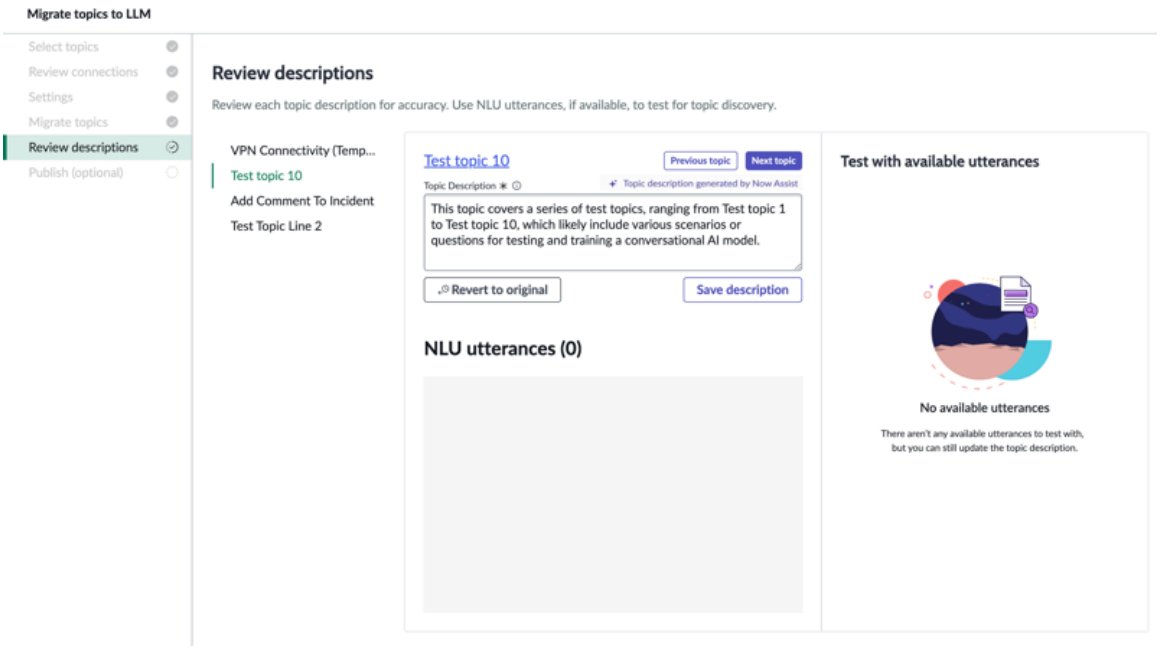Example of reviewing a topic description without NLU utterances




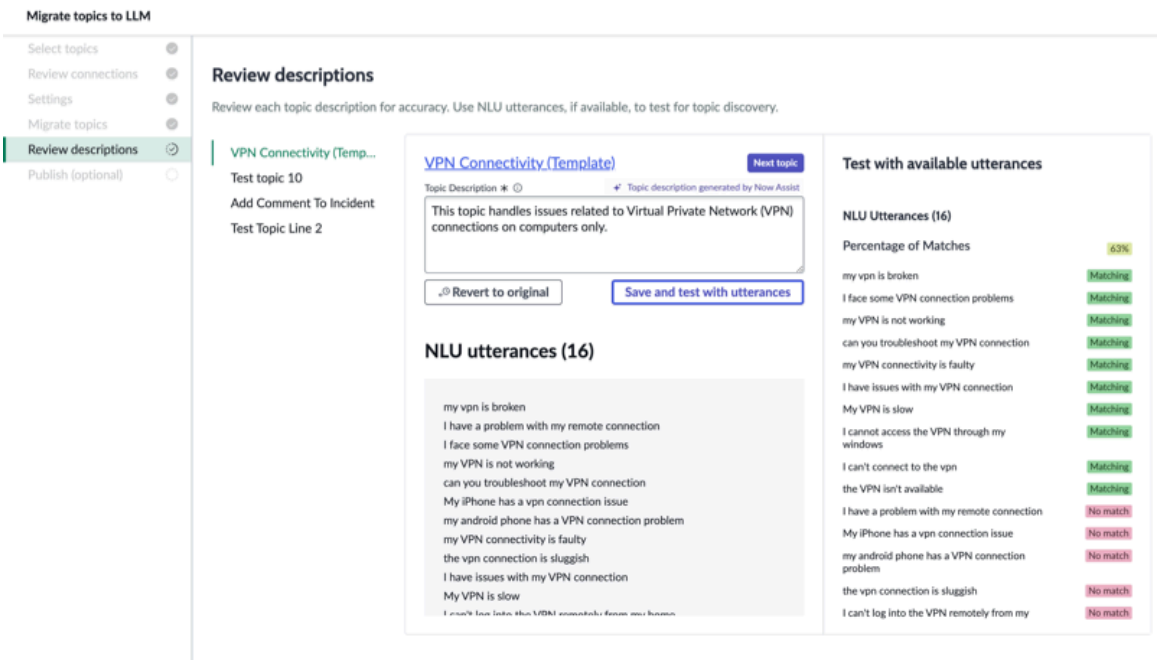Example of reviewing a topic description with NLU utterances



10. **Optional:** Continue to the Publish step by selecting **Next**.
11. **Optional:** Select each LLM Topic check box that you want to publish, and then select **Publish topics**.

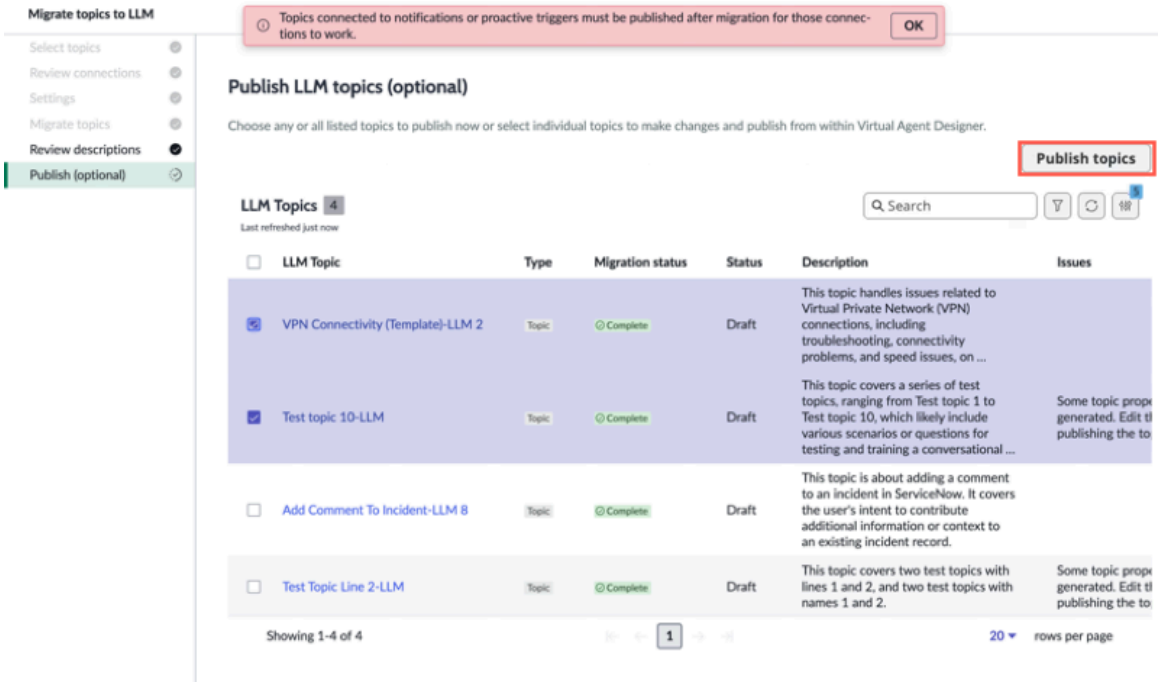© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Tip:
If you select the LLM topic link, you're redirected to that topic in Virtual Agent Designer through a new browser tab or window. Any edits that you make in Virtual Agent Designer are reflected in the topic migration's Publish step. You must publish LLM topics through this step for any connected notifications or Proactive Triggers to work.

You receive a `Selected topics were successfully published` output message. The topics that you migrated, but didn't select to publish, continue to appear on this step until you navigate away from the topic migration workflow.

12. **Optional:** Exit the topic migration workflow by selecting **Close**.
You're redirected to the Virtual Agent Designer Topics step.

What to do next

After you navigate away from the topic migration workflow, the topics that you migrated, but didn't publish, can be managed and published from the Virtual Agent Designer canvas. If you choose to migrate other topics in the future, the topic migration workflow restarts from the beginning.

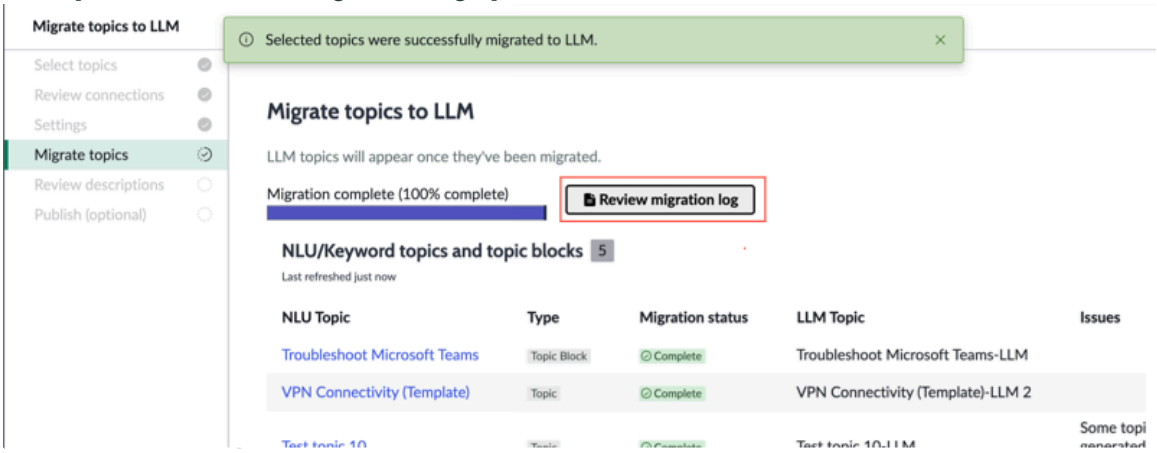
NLU to LLM migration log

The Topic Migration Execution Items [topic_migration_execution_item.list] table includes data when migrating Natural Language Understanding (NLU) topics to large language model (LLM) topics such as the migration status, migration issues, and migrated or published topic information.

You can access this topic migration data either by searching for `topic_migration_execution_item.list` in the Navigation pane or downloading the .CSV file version of the table. After you've migrated topics, the downloadable .CSV file is accessible through the **Review migration log** option in the topic migration workflow's Migrate topics step.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of the Review migration log option




The Topic Migration Execution Items [topic_migration_execution_item.list] table defaults to include the following columns:

- Description
- Issues
- LLM Topic
- Migration Execution

> **Note:**
> The **Migration Execution** column includes the unique ID that is generated for each migration batch. For example, when 10 topics are migrated at the same time, the table contains 10 topic rows with each row containing the same migration execution value.

- Migration status
- NLU Topic
- Status
- Type

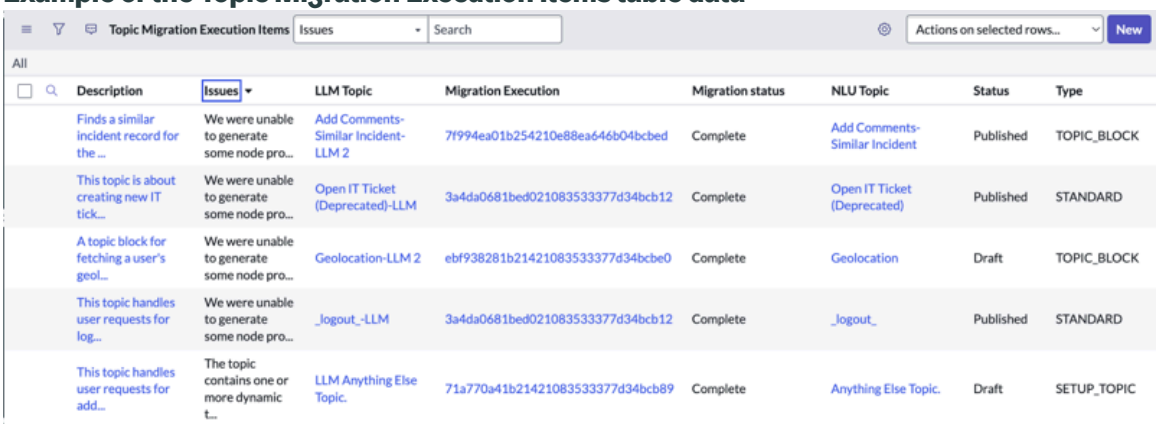Example of the Topic Migration Execution Items table data



Generic issues may occur during the topic migration process. The following table includes specific, common issues that you may encounter in the Issues column and whether the issue blocks the topic from being published.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issues column details

Issues column value	Types of issues	Can the topic be published?
`Some topic properties couldn’t be generated. To publish, manually review and edit the following nodes: [list of node names]`	Node-level issues: These issues are validation error messages that can include missing fields such as name, description, and so on.	No. The issue must be corrected before the topic can be published.
`Some topic properties couldn’t be generated because the topic used a script. To publish, manually review and edit the following nodes: [list of node names]`	Script-level issues: These issues occur whenever an NLU input node has a script or data pill in the **Prompt** field.	Yes. Topics with this issue can be published because `Collect [Node Name]` populates in the **Detailed description** field, but the value of the **Detailed description** field value should be revised and improved.
`Some topic properties couldn't be generated. Edit them before publishing the topic.`	Topic-level issues: These issues are validation errors at the topic level such as a missing description, keywords, or any other required field.	No. The issue must be corrected before the topic can be published.
`The topic description couldn’t be generated. Edit the description field on the Publish page or from the topic properties page in Virtual Agent Designer before publishing.`	LLM-generated description issues: These issues occur whenever LLM is unable to generate a valid topic description.	Yes. Topics with this issue can be published because the `[Topic name]` populates the **Topic description** field, but the **Topic description** field value should be revised and improved.
`The topic description couldn’t be generated because the mapped intent wasn’t found. Edit the description field on the Publish page or from the topic properties page in Virtual Agent Designer before publishing.`	LLM-generated description issues related to NLU intent complications: These issues occur whenever an NLU model and intent is mapped to a topic but is missing from the sys_nlu_model or sys_nlu_intent table or if these values are incorrectly mapped to the topic.	Yes. Topics with this issue can be published because the `[Topic name]` populates the **Topic description** field, but the **Topic description** field value should be revised and improved.
`The topic description couldn’t be generated because both the intent and keywords are`	LLM-generated description issues related to NLU intent complications: These issues occur whenever an NLU	Yes. Topics with this issue can be published because the `[Topic name]` populates the **Topic description** field,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issues column details (continued)

Issues column value	Types of issues	Can the topic be published?
`missing. Edit the description field on the Publish page or from the topic properties page in Virtual Agent Designer before publishing.`	model's intent and keywords aren't mapped to the topic.	but the **Topic description** field value should be revised and improved.
`The migration tool couldn't convert one or more dynamic topic block nodes from this topic. The topic blocks used inside the dynamic topic blocks must be manually migrated. The following nodes use these dynamic topic blocks: [list of node names]`	Dynamic topic block issues: These issues occur whenever there's a node that has a dynamic topic block that wasn't migrated.	Yes. Topics with this issue can be published because the topic block names use a script for dynamic topic blocks and continue to operate as expected, using the NLU topic block. If you encounter this issue, select these topic blocks for migration from the Select topics step and update the topic block names in the script.
`The migration tool couldn't convert one or more switch topic scripts from this topic. The topics used inside the switch topic script need to be manually migrated. The following nodes use these switch topic scripts: [list of node names]`	Switch topic script issues: These issues occur whenever a node has a switch topic function that wasn't migrated.	Yes. Topics with this issue can be published because the topic script continues to use the NLU topic until migration. If you encounter this issue, select these topics for migration from the Select topics step.
`This topic couldn't be migrated. Contact ServiceNow support for assistance.`	Process failure issues: These issues occur whenever there's an error during a particular migration process.	No. The issue must be corrected by a ServiceNow employee before the topic can be published.
`This topic couldn't be migrated because the transformation of NLU nodes to LLM nodes failed. Contact ServiceNow support for assistance.`	Process failure issues: These issues occur whenever there's an error during the transformation of NLU nodes to LLM nodes.	No. The issue must be corrected by a ServiceNow employee before the topic can be published.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issues column details (continued)

Issues column value	Types of issues	Can the topic be published?
`This topic couldn't be migrated because the publish payload failed to generate. Contact ServiceNow support for assistance.`	Process failure issues: These issues occur whenever there's an error during a particular migration process.	No. The issue must be corrected by a ServiceNow employee before the topic can be published.
`This topic can't be published until a topic description is added.`	Process failure issues: These issues occur whenever there's an error during a particular migration process.	No. The issue must be corrected before the topic can be published. Edit the description field on the Publish step or from the topic properties page in Virtual Agent Designer before publishing.

Duplicate a Virtual Agent topic

Create a new topic or topic block by copying an existing Virtual Agent topic or topic block and customize it.

Before you begin

Role required: virtual_agent_admin or admin

About this task

Consider duplicating topics in the following scenarios:

- When you want to use an existing topic, such as a prebuilt topic or topic block, as the basis for a new topic or topic block.
- When you want to modify an active topic while preserving the original topic for reference purposes or as a backup.
- When you want to convert a Natural Language Understanding (NLU) topic to a large language model (LLM) topic.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, and in the Asset library, select the topic you want to duplicate.
2. In the topic header bar, select the more actions on topics icon ⋮, then select **Duplicate**.
   a. In the Duplicate window, enter the new name for the item.
   b. Select **Save**.
3. Update the properties on the **Properties** tab and on the **Flow** tab, change the conversation flow design as needed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Keep in mind the goal or purpose of your new topic as you set the properties and update the flow. For example, if you're using keyword-based topics, you might need to change certain keywords based on the purpose of your new topic. For LLM topics, you might need to select one or more LLM assistants. For Natural Language Understanding (NLU)-enabled topics, you might need to change the NLU model and intent associated with the topic.

Topic and topic block duplication

If you're duplicating	See this section
Topics	See Create a Virtual Agent topic for a description of the topic properties that you can change and how to add or change the nodes in the flow.
Topic blocks	See Create a reusable topic block for a description of the topic block properties that you set and the input and output parameters that you define for the block.

4. As you update your design, use the **Test** option to run your design in a chat test window, then fine-tune your design flow accordingly.

   For details on test features of LLM topics, see Testing LLM topics.

   For details on test features regarding NLU topics, see Testing NLU/Keyword topics.

What to do next

If you've completed the topic or topic block, publish it to deploy it to your Virtual Agent clients.

Testing LLM topics

Preview, test, and debug topics that use large language models (LLMs) in the Virtual Agent Designer chat window.

You can test your topic's functions by running your conversation in a chat test window as you work. The web (Service Portal) chat client is the default test window.

Large language model (LLM) topics are faster and easier to test compared to Natural Language Understanding (NLU) topics. For example, you don't need to retest your topic after updating utterances and retraining models as with NLU topics.

If you're using the Virtual Agent integrations with third-party messaging apps, elements in your conversation might appear differently in third-party messaging applications. Test your conversations in any third-party applications where you want to deploy Virtual Agent.

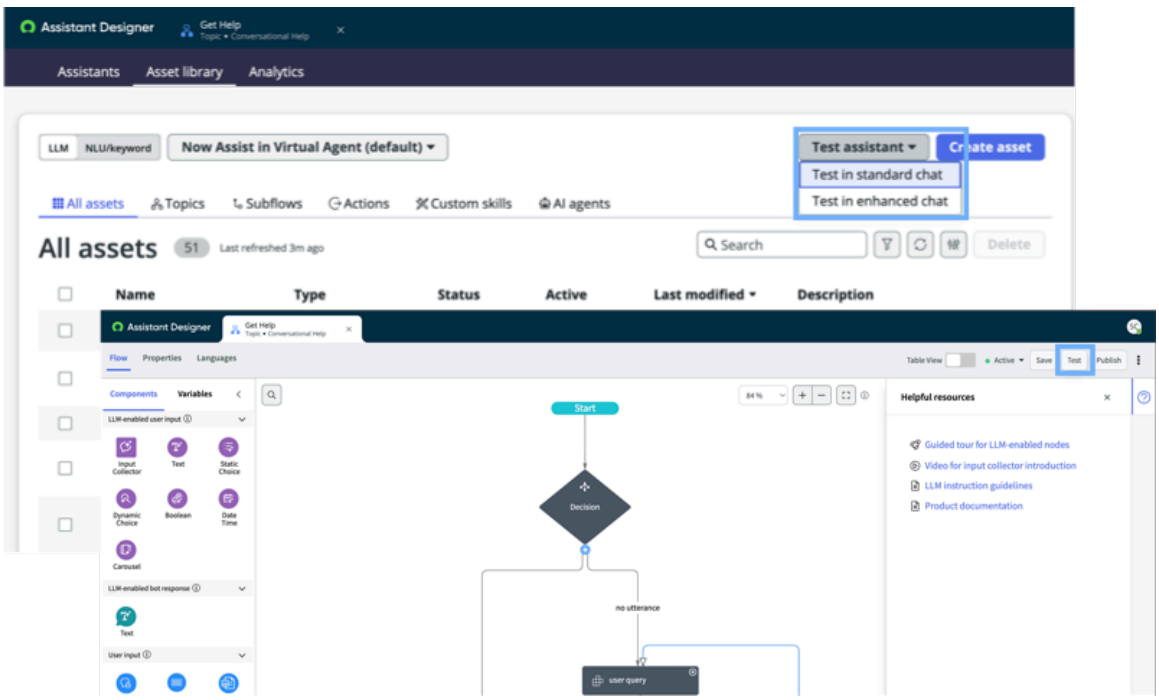
Note:
If the Now Assist panel, Microsoft Teams application, or Slack application is configured for your environment, preview options for those channels are displayed in the Test button list. Select **Preview in Now Assist panel** or **Preview in Microsoft Teams** in the list to test your topic in those environments.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Testing your LLM topic in the chat test window

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.


You can find LLM testing options on the Virtual Agent Designer canvas and the home pageVirtual Agent Designer Asset library. The chat test window opens in the Now Assist in Virtual Agent chat widget. The Assistant drop-down list and **Include topic discovery** option might be displayed depending on where you originated the test from and if you have established any LLM assistants.




Test LLM topics on the Virtual Agent Designer canvas by working with the **Test** option on the topic header bar. When testing from a single topic, the **Include topic discovery** option must be selected to work with the assistants. If the topic is associated with multiple LLM assistants, use the Assistant drop-down list to select which assistant you want to test. For more information about LLM assistants, see LLM assistants.

Note:
The **Test in enhanced chat** option is available only from the Asset library list view. The **Test** button in the topic canvas adds options in a drop-down box if you configure Microsoft Teams or Slack for Virtual Agent.

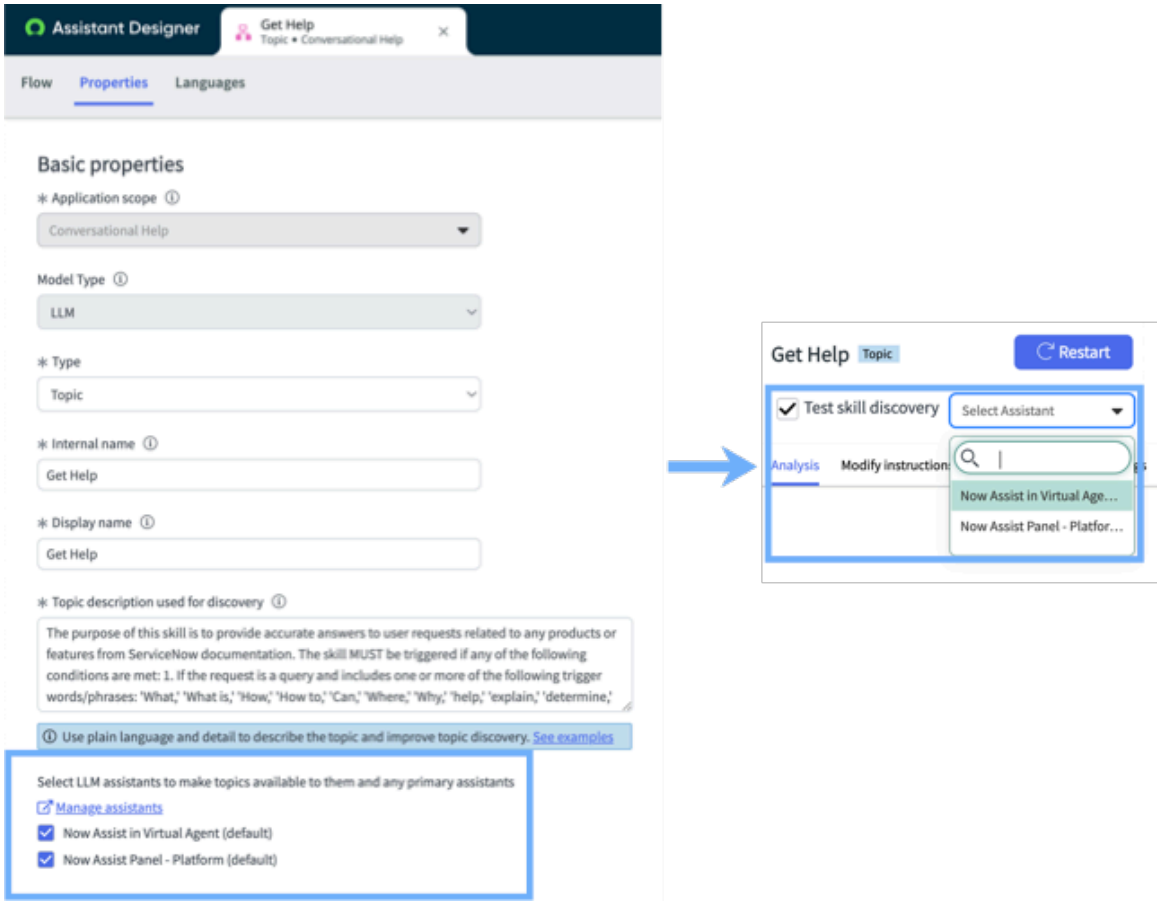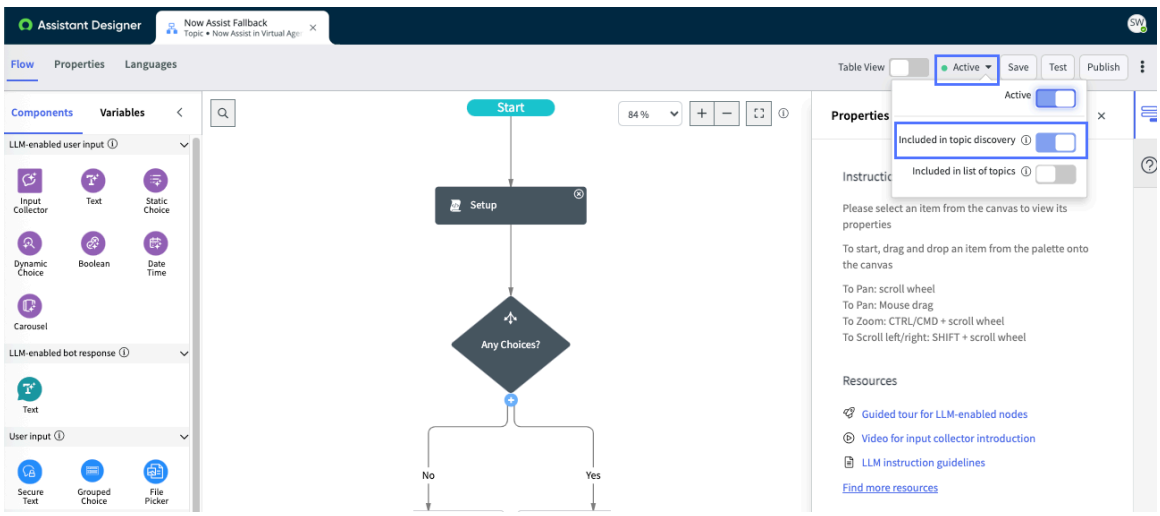© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.






Note:
If your topic is missing any necessary information, an incomplete badge appears in the corner of the flow diagram pane. A warning badge also appears next to each node. The incomplete badge lists the total number of issues, while the local warning badges show how many issues are found in each node. If you select **Test** when there are issues, an Issues window opens with the number of issues present along with the details of each issue. These details include a full description and a hyperlink to each incomplete item.

Alternatively, you can test active (published) LLM topics on the home page. Select an assistant to restrict your topics to only topics associated with that assistant, and then select **Test assistant**. When testing from the home page, topic discovery is enabled, so it's not listed as an option. The Assistant drop-down list appears in the chat test window. You must have previously established at least the default Now Assist in Virtual Agent assistant to see the Assistant drop-down list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

When a topic is associated with just one LLM assistant, the Assistant drop-down list defaults to that assistant name. If you have multiple assistants, select which assistant you want to work with using the Assistant drop-down list. For more information about creating multiple LLM assistants, see Manage LLM virtual agents on the Assistants screen.

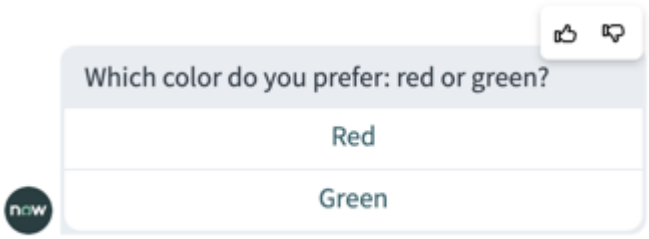You can provide feedback to each utterance made by the LLM by selecting from the like thumbs-up icon or dislike thumbs-down icon options that appear when you hover over an utterance. All LLM user inputs except the Input Collector have these feedback options.




The chat test window also displays adjoining tabs that provide details about your topic as you test it. The following tabs are available when testing LLM topics:

- **Analyze test phrases** - Results for topic discovery based on your input.
- **Modify instructions** - List of all the instructions in the topic that are sent to the LLM. This tab is only available when testing a single topic.
- **Variables** - List of all the variables used in the conversation, such as input and Live Agent variables.
- **Edit variables** - Options for editing the variables used in this topic.
- **Context** - Options for specifying the context (using context variables) in which a topic is run.
- **Logs** - List of the processing performed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

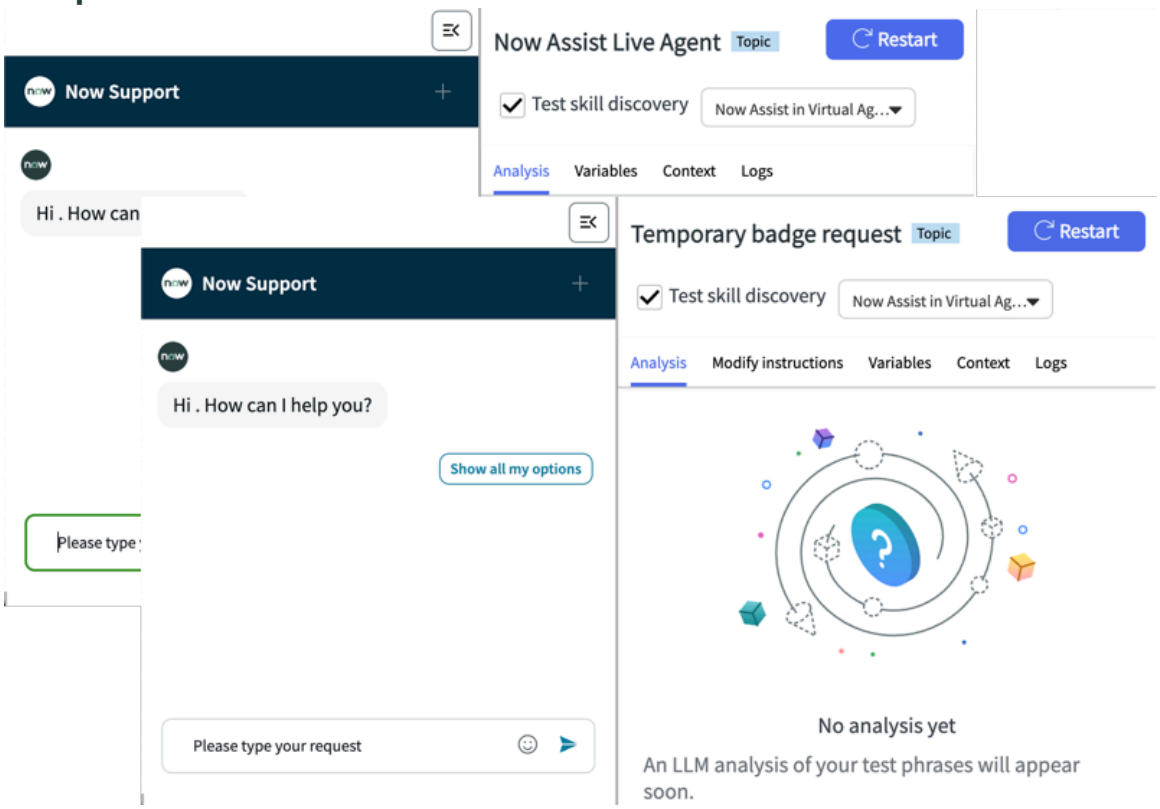Example test window and tabs



The following tabs appear when you test their related topic types on the Assistant Designer canvas:

- The **Analyze test phrases**, **Modify instructions**, **Variables**, and **Logs** tabs appear for all LLM topic types.
- The **Edit variables** tab appears for topic blocks and custom controls.
- The **Context** tab appears for topics, setup topics, or small talk topics when you select **Include topic discovery**.

If you run tests from the Topics page, the test window shows only the **Analyze test phrases**, **Variables**, **Context** (available by default, with no **Include topic discovery** option), and **Logs** tabs.

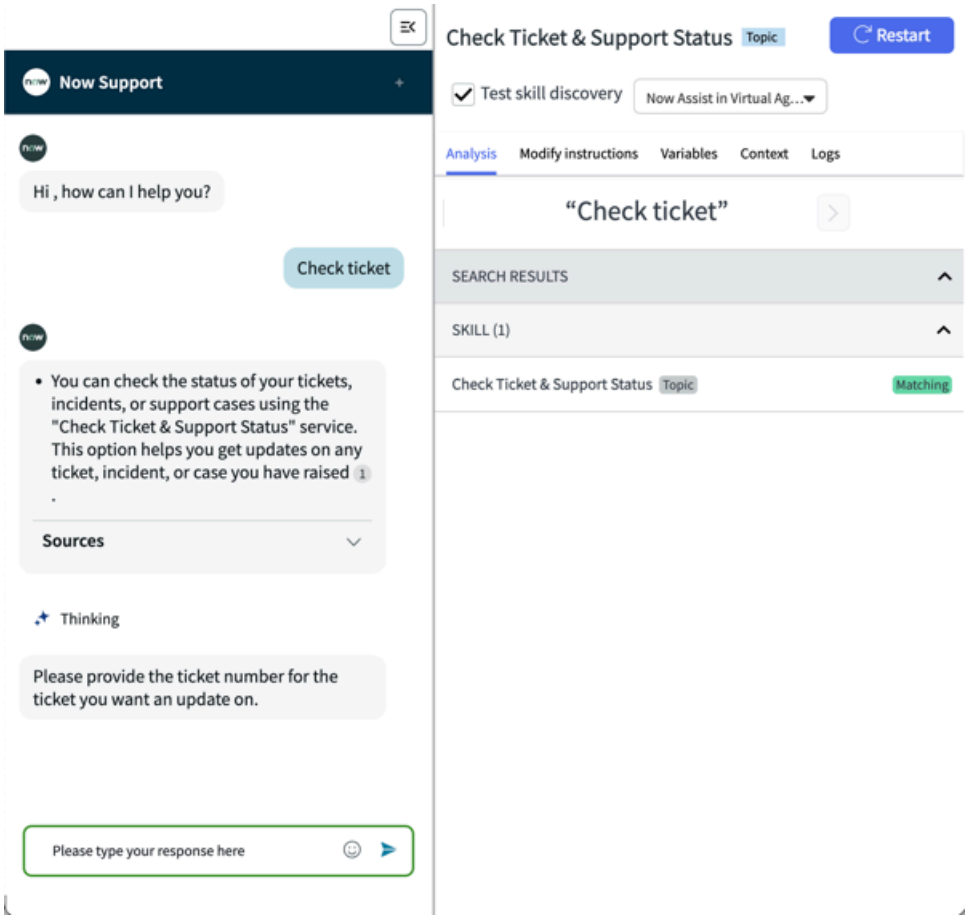
Analyze test phrases tab

When you test LLM topics, results for topic discovery appear based on your input. When testing topics associated with a primary LLM assistant, only the primary assistant's promoted assets appear. When you input a test phrase, you can see a variety of search results when Genius Results are enabled including skill (topic) discovery, Knowledge Base (KB) articles, and catalog items. Under the skills search results, a *`Matching`* badge appears next to the skill discovered, while variables and values may also be listed (such as the variable *`@laptop_make`* and the value *`macbook`*), depending on the topic. These Genius Results only appear if you're testing a published topic and have selected the **Include topic discovery** option. If the **Include topic discovery** option appears inactive, publish the topic and select an LLM assistant on the Properties tab to work with topic discovery. A `Search indexing in progress` message might appear, but you can still test while the search indexing runs although topic discovery might not be updated. For more information about how Genius Results work, see Now Assist in AI Search.

Additionally, when testing active LLM assistant topics from the Topics page, you see skills results for Semantic search. Semantic search analyzes the meanings and context of your search terms

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

and uses that information to find results with similar meanings. It improves search recall by interpreting natural language to more accurately reflect your search's intent. If semantic search is deactivated for topic discovery testing, those results are not displayed. For more information about semantic search, see Semantic vector search in AI Search.



Modify instructions tab

If your topic contains any instructions that are sent to the LLM, they're shown in the Nodes category. The Nodes category lists LLM user input nodes on the canvas, their field names, and their contents.

You can modify the content of any of the instructions to develop optimal instructions for the conversation. If a node has **Enforce user prompt** active, a blue check icon and a `User prompt enforced` message appears. Deactivate **Enforce user prompt** to modify the node's instructions.


If any of your user inputs have **Allow automatic slot filling** activated, the input's Detail Description becomes a static field. If **Allow automatic slot filling** is inactive, you can define detail description using a script or data pill picker. For more information, see the Allow automatic slot filling table entry in Text user input control or any other LLM user input controls.

Each instruction's status starts at `Original`. If you alter an instruction's content, its status changes to `Modified` and a revert icon appears next to it. The total number of instructions modified is listed at the bottom of the tab next to a **Save to topic** button. To test the modified instructions, select **Apply and restart**. To undo changes to an instruction, select the revert icon next to the instruction. Alternatively, undo all changes by selecting **Revert** that activates when you modify any instructions.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Note:
If you select **Save to topic**, all changes are saved and all `Modified` messages reset to `Original`.

The following image shows the **Modify instructions** tab showing user information with LLM instruction guidelines link, and Nodes held within an Input collector, including a locked node with User prompt is enforced message.

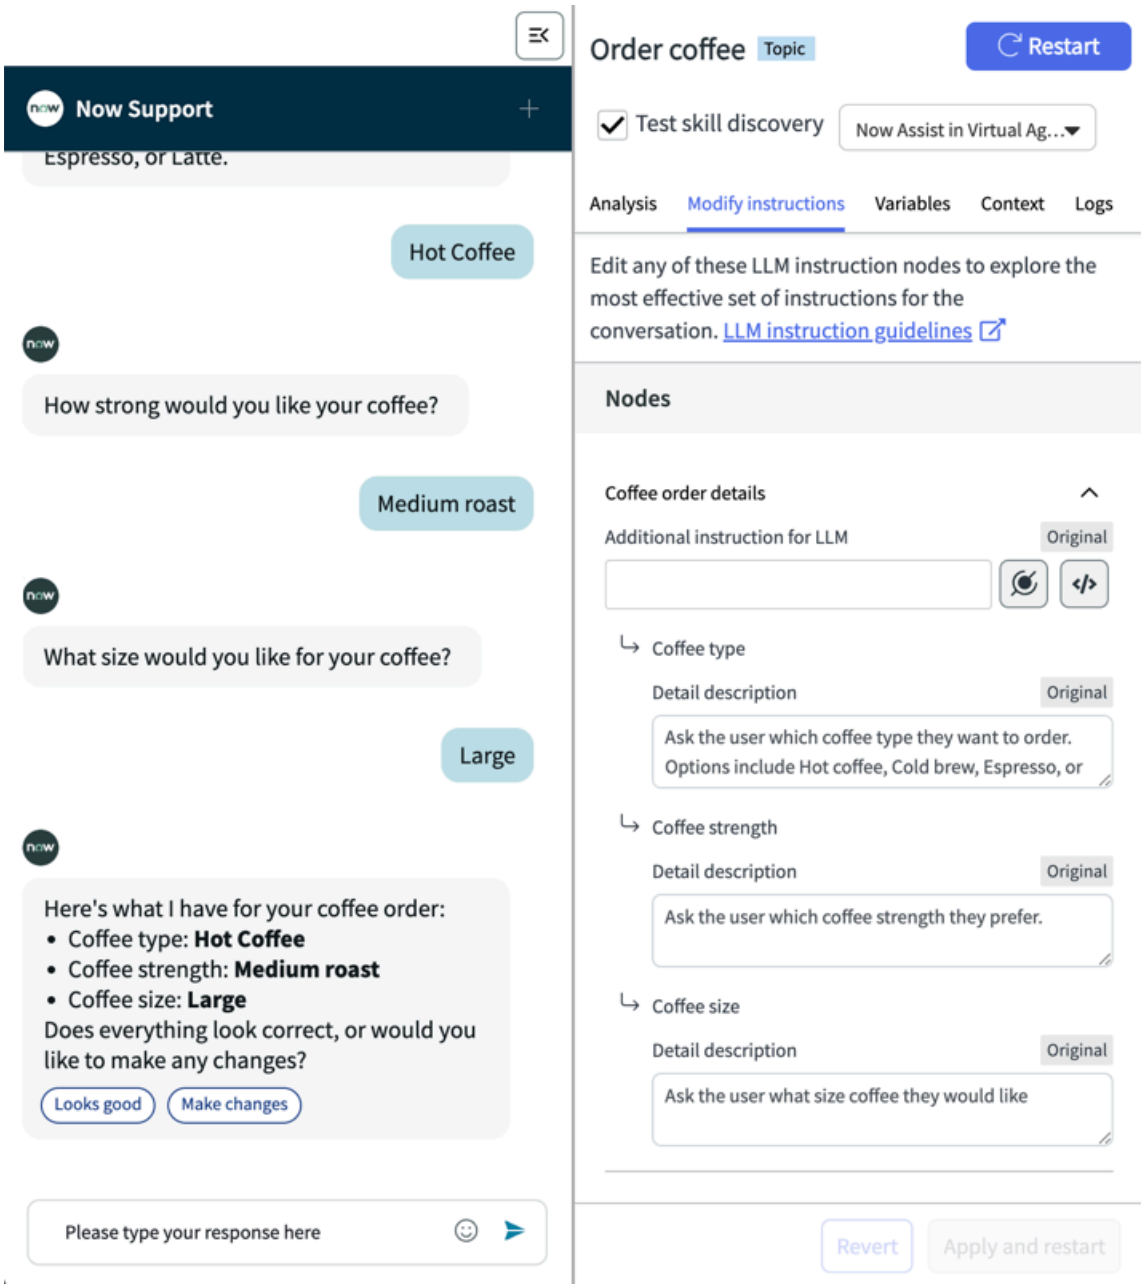


The following image shows the **Modify instructions** tab with Modified instruction and Save to Topic updates. The **Revert** and **Apply and Restart** options activate when you make any changes.

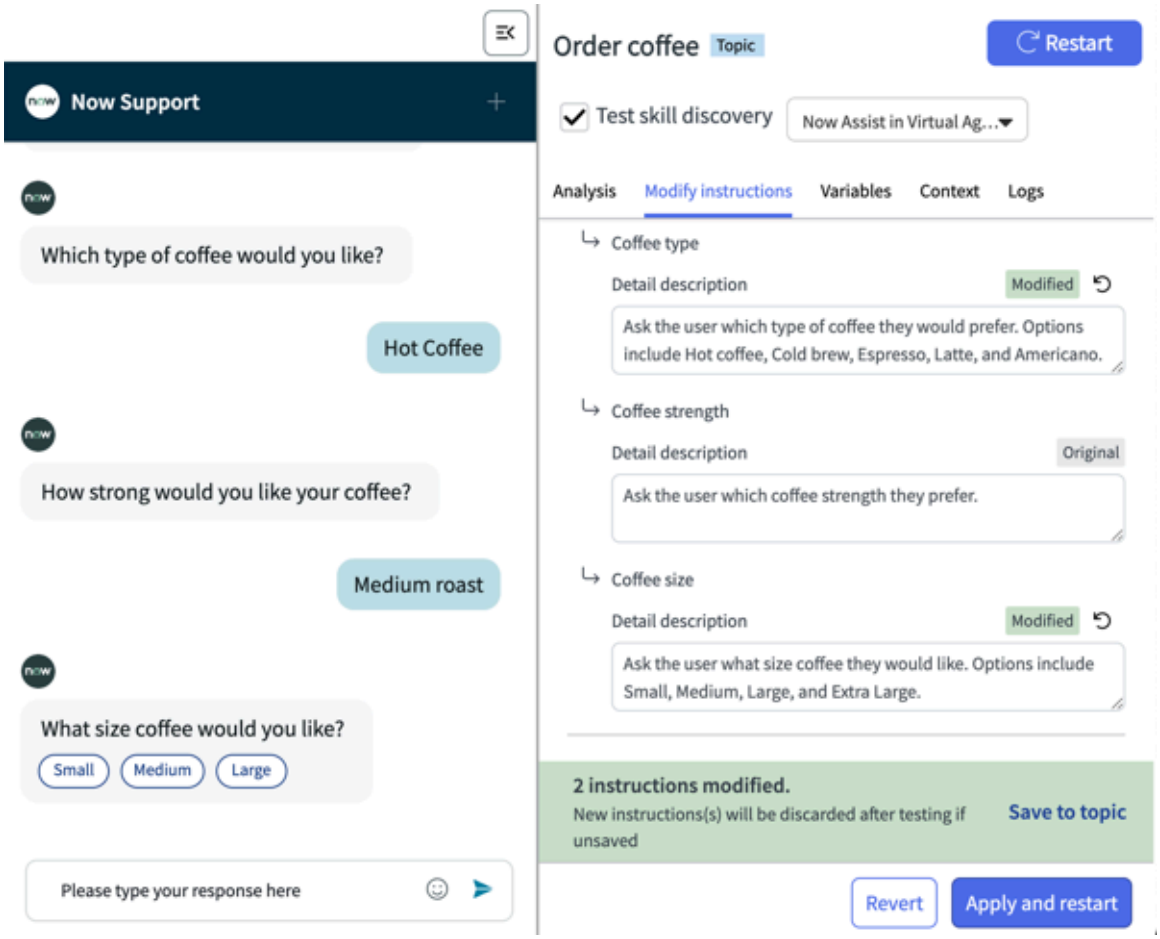© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



If instructions in a node include potentially offensive content, a warning badge appears on the node. A yellow warning icon ⚠ appears next to the node name. Selecting **Apply and restart** inputs those instructions and removes the badge and icon, and the `Modified` status reverts to `Original`.

The following image shows the **Modify instructions** tab showing offensive content warning badge, icons, and hover message.

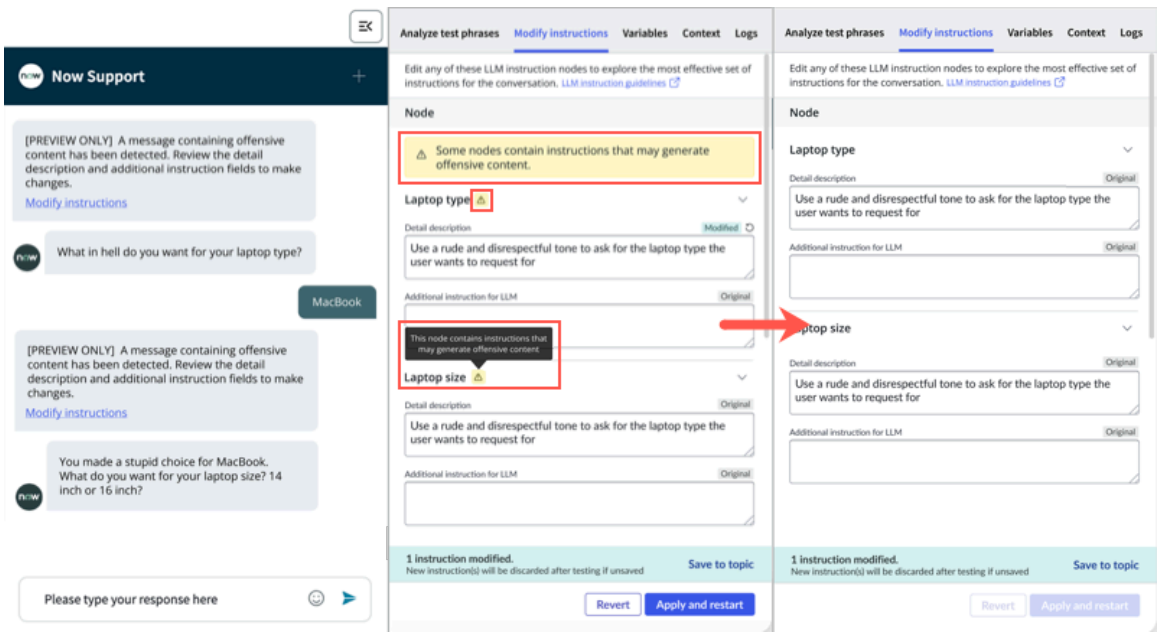

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

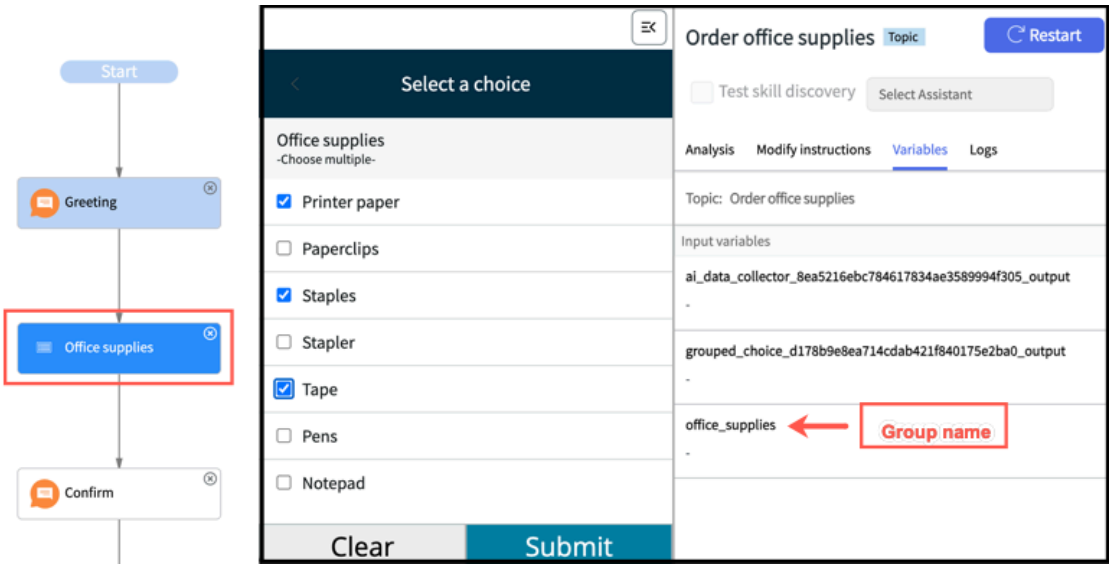
Variables tab

The **Variables** tab displays a list of all the variables used in the conversation and the associated values captured as the conversation progresses, so that you can follow along. A conversation can have these variable types:

- Input variables
- Script variables
- Live Agent variables
- Variables passed between a calling topic and topic block

The list is separated into sections by variable types. The following example shows the Input variables section. Notice that for the static list control, both the display label and value are captured for the selected choice.


The following example shows the Input variables section for the grouped list control. This variable information appears similar to the static list control, but the variables are separated by each group of the grouped choice.



Edit Variables tab

When testing topic blocks and custom controls, you can edit the variables found in the nodes.

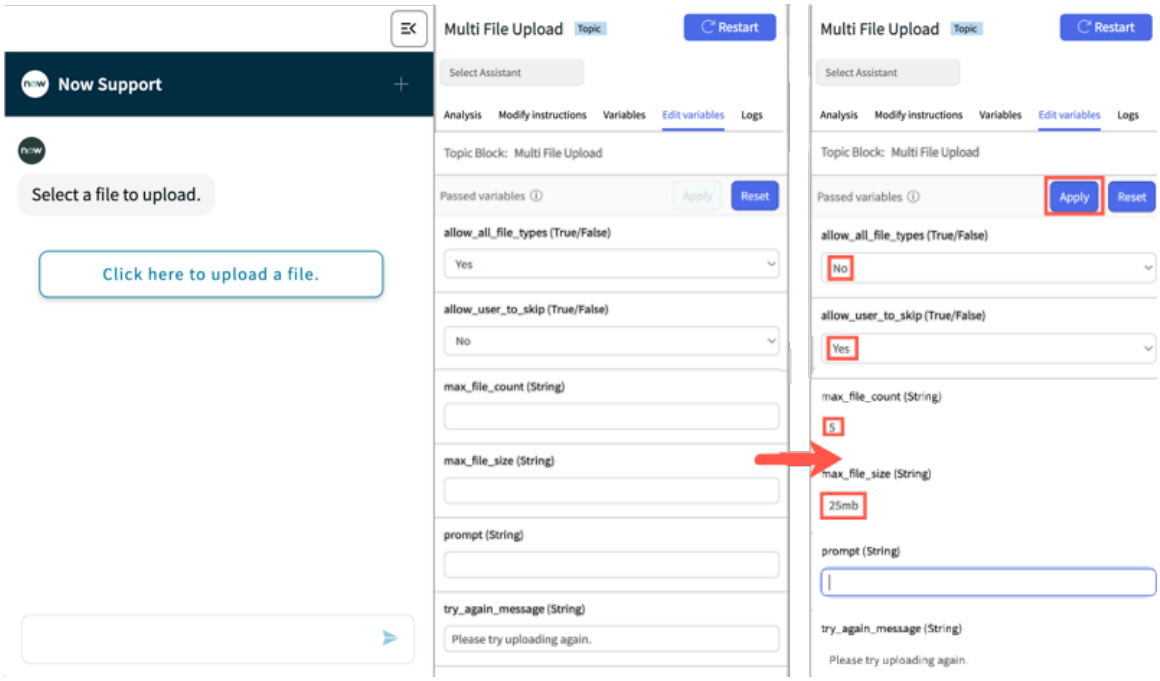
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Context tab

The **Context** tab appears when you're testing topics, setup topics, or small talk topics, to specify a different context for the chat. Choose a context variable from the list. The variables contain contextual information that can be used to determine topic intent or control how chats are routed to live agents. For example, you could select **portal** from the list of variables and enter the portal name **IT Express**. The **Context** tab is unavailable when creating test cases.

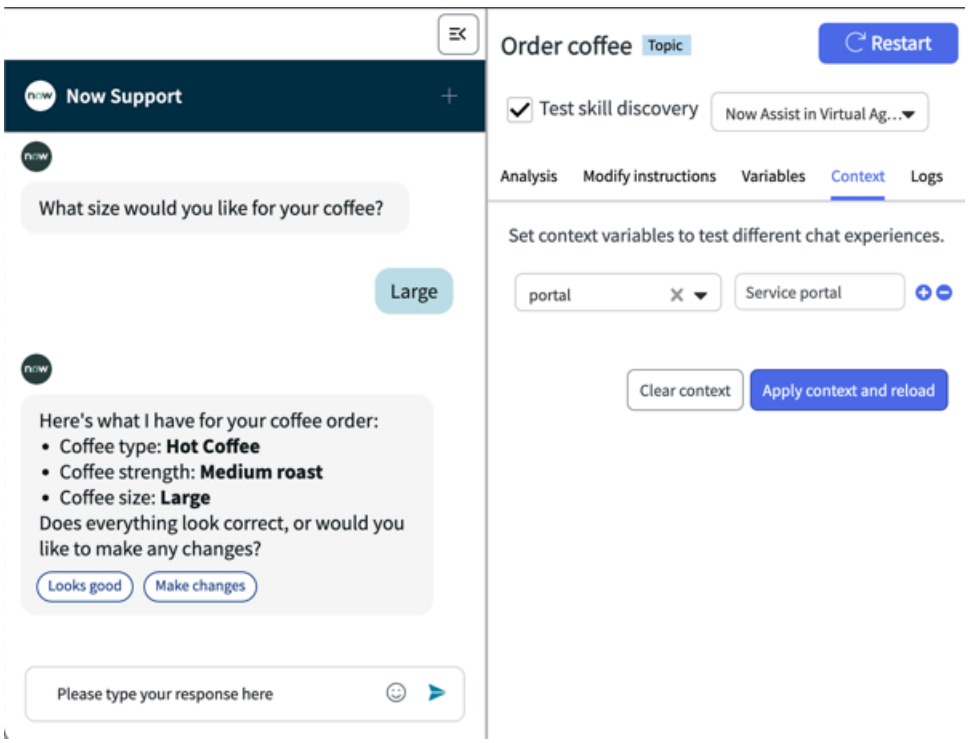
For more information about defining context variables, see Configure context variables for storing chat-related information. For more information about live agent variables that are included with Virtual Agent, see Live agent chat context variables.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Logs tab

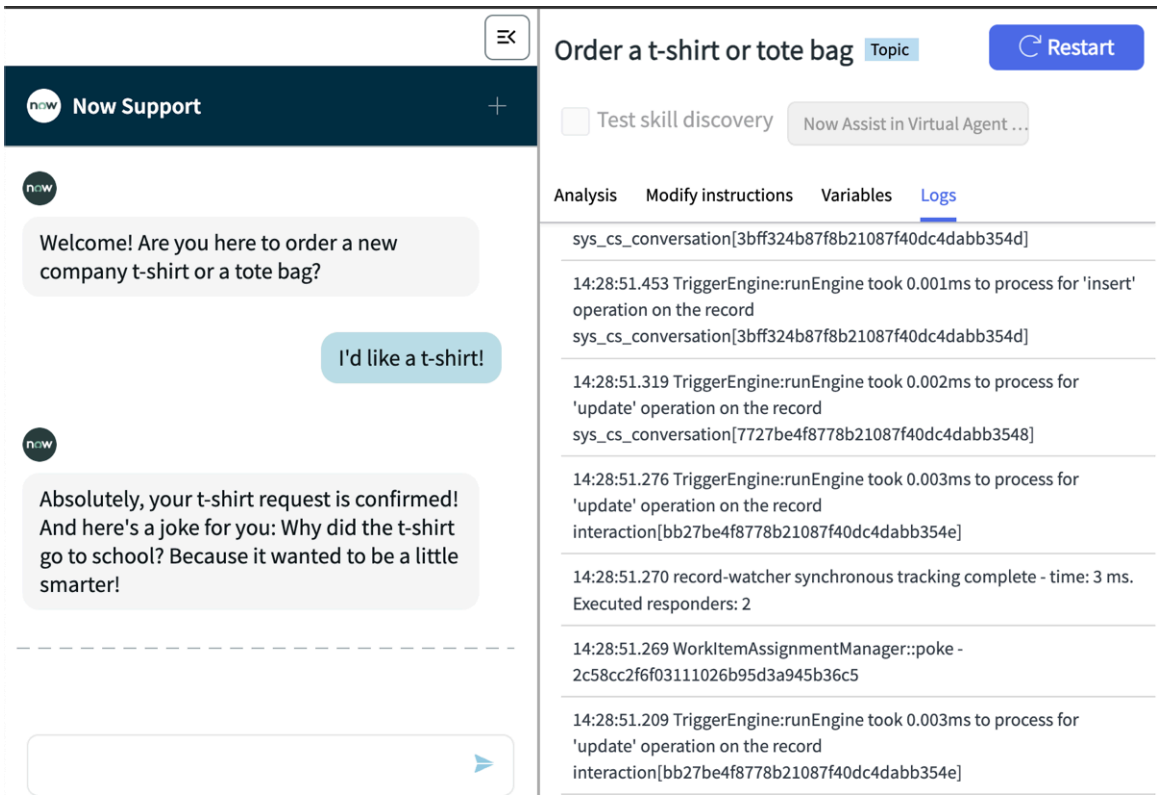The **Logs** tab displays a running log of server events, user entries, and Virtual Agent responses in the chat. You can review the logs to look for any important data about the chat including potential errors.



Next steps

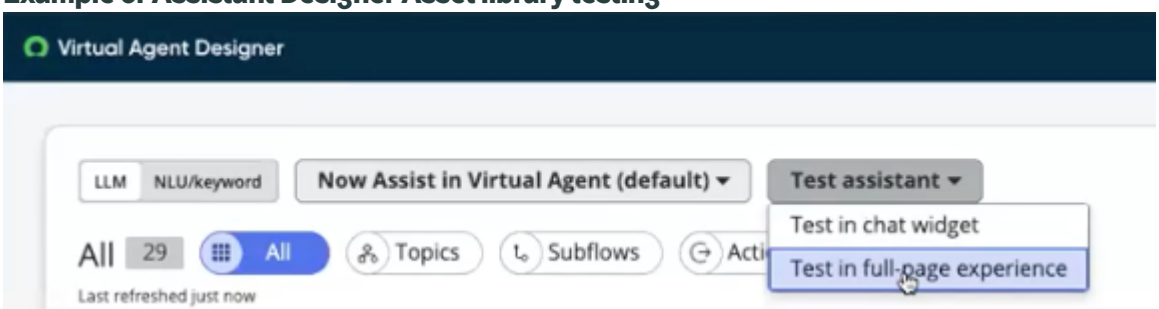
When you're done testing your topic, close the test chat window. If necessary, use the test information to adjust your topic to perform more accurately. For example, the results on the **Analyze test phrases** tab may return low scores or `Unsure` or `Unknown` confidence ratings. Improve scores by updating the topic description or instructions in the LLM user input nodes.

Testing Now Assist enhanced chat conversations

Test conversational assets with assistants in the enhanced chat.

You can test conversational assets such as topics, subflows, and actions in Assistant Designer using the enhanced chat requester view. You can only test conversations for assistants that have the enhanced chat turned on and configured in **All** > **Conversational Interfaces** > **Assistants**. After the enhanced chat is turned on for an assistant, in the Assistant Designer Asset library, select **Test assistant** > **Test in enhanced chat** to test the associated conversational assets.

Example of Assistant Designer Asset library testing



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Enhanced chat experience is the default for Assistant Designer test panels. To change the default experience to standard chat, set the value of the system property *sn_nowassist_va.standard_chat_enabled* to true.

For all the Now Assist for Virtual Agent assistants and the Now Assist Panel - Platform Assistant, when testing the assistant:

- If the assistant has the Standard Chat experience configured for any display location, you can choose between Standard Chat versus Enhanced Chat.
- If the assistant only has the Enhanced Chat experience configured across all display locations, when you select **Test Assistant**, you're directed to test the Enhanced Chat experience.

For the Now Assist Panel - Developer Assistant, when testing the assistant by selecting **Test Assistant**, you're directed to test the Standard Chat experience.

Testing NLU/Keyword topics

Use the chat test window to preview, test, and debug Natural Language Understanding (NLU)/Keyword topics.

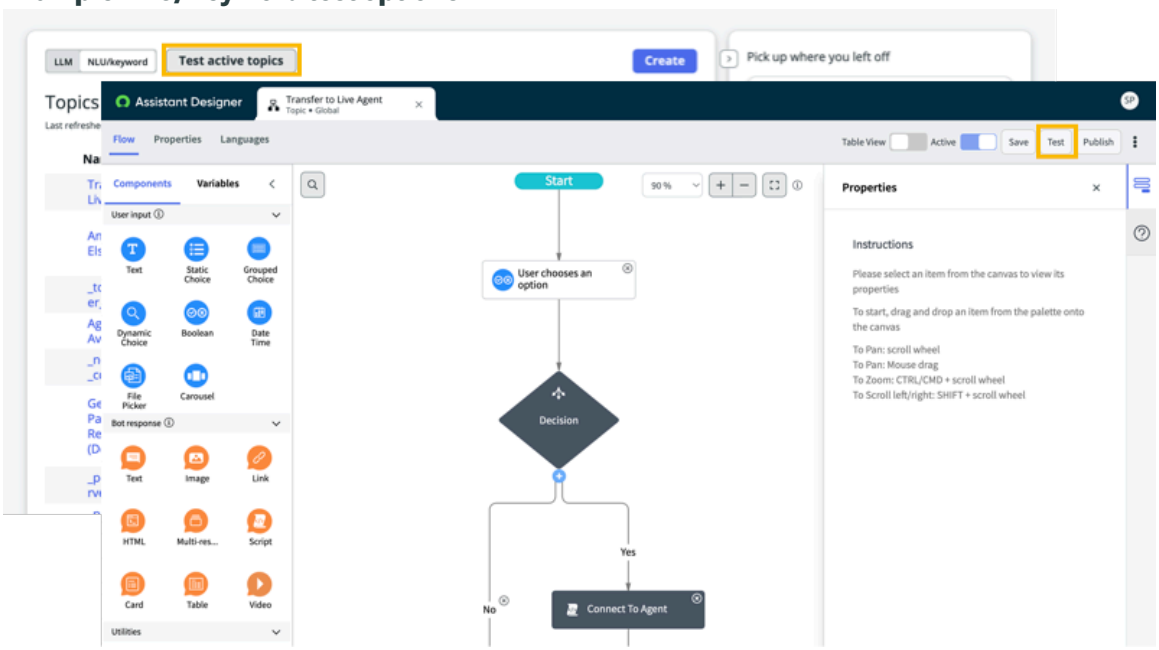
As you work on a topic in Virtual Agent Designer, you can run your conversation in a chat test window. The default test window is the web (Service Portal) chat client.

If you're using the Virtual Agent integrations with third-party messaging apps, elements in your conversation might appear differently in third-party messaging applications. Test your conversations in any third-party applications where you want to deploy Virtual Agent.

If the Now Assist panel, Microsoft Teams application, or Slack application is configured for your environment, preview options for those channels are displayed in the Test button list. Select **Preview in Now Assist panel** or **Preview in Microsoft Teams** in the list to test your topic in those environments.

Testing your NLU/Keyword topic in the chat test window

Example NLU/Keyword test options



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

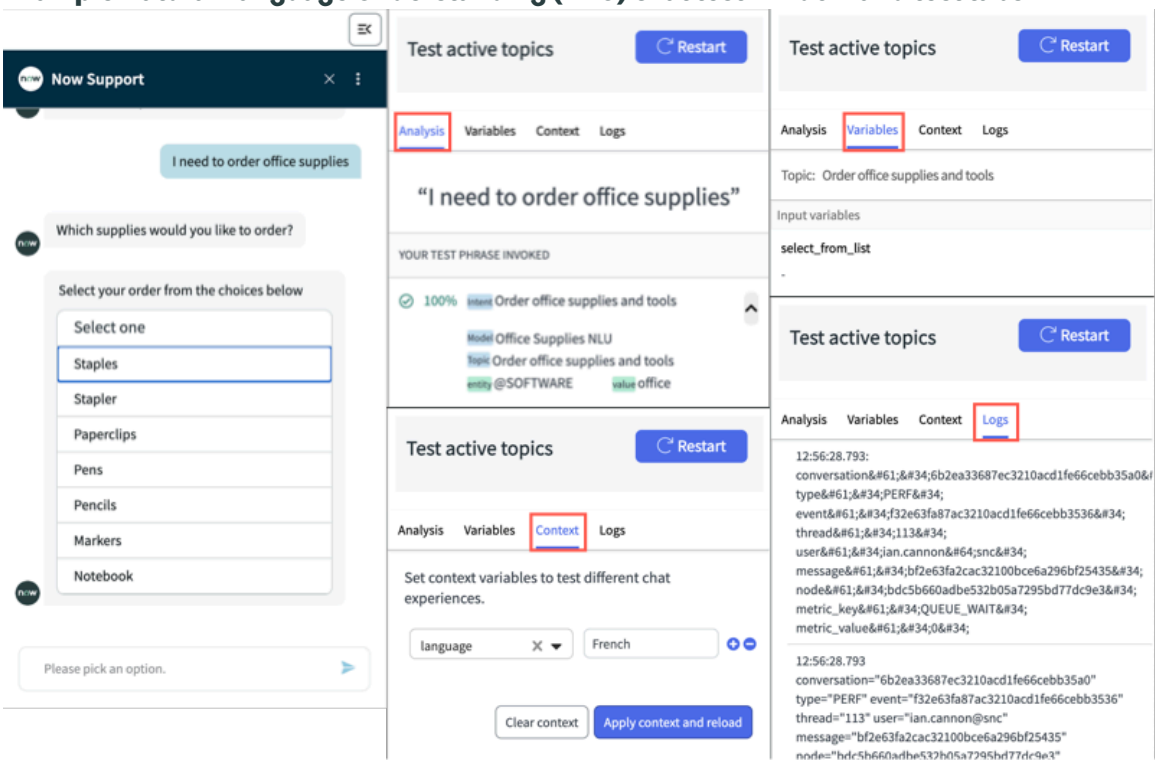
To run your topic in the chat test window, select the **Test** option in the topic header bar. Alternatively, you can test active (published) topics by selecting **Test active topics** while viewing NLU topics on the home page.

Note:
If your topic is missing any necessary information, an incomplete badge appears in the corner of the flow diagram pane. A yellow or red warning badge also appears next to each node. The incomplete badge lists the total number of issues, while the local warning badges show how many are found in each node. Selecting **Test** when there are issues present opens a Validation Issues tab on the sidebar, which counts up and details all the issues needing correction. These details include a full description and a hyperlink to each incomplete node.

The chat test window opens in the chat widget and displays adjoining tabs that provide details about your topic as you test it. You can use these tabs:

- **Analyze Test Phrases** - The results for intent matching and entity recognition appear based on what you entered in the conversation.
- **Variables** - List of all the variables used in the conversation, such as input and live agent variables.
- **Context** - Options for specifying the context (using context variables) in which a topic is run.
- **Logs** - A list of the processing performed.

Example Natural Language Understanding (NLU) chat test window and test tabs



By default, the **Include Topic Discovery** option is enabled. This option automatically performs topic discovery and generates prediction results for NLU topics using test phrases that you enter in the test window. The conversation begins with the Virtual Agent greeting and the button for the menu of available topics.

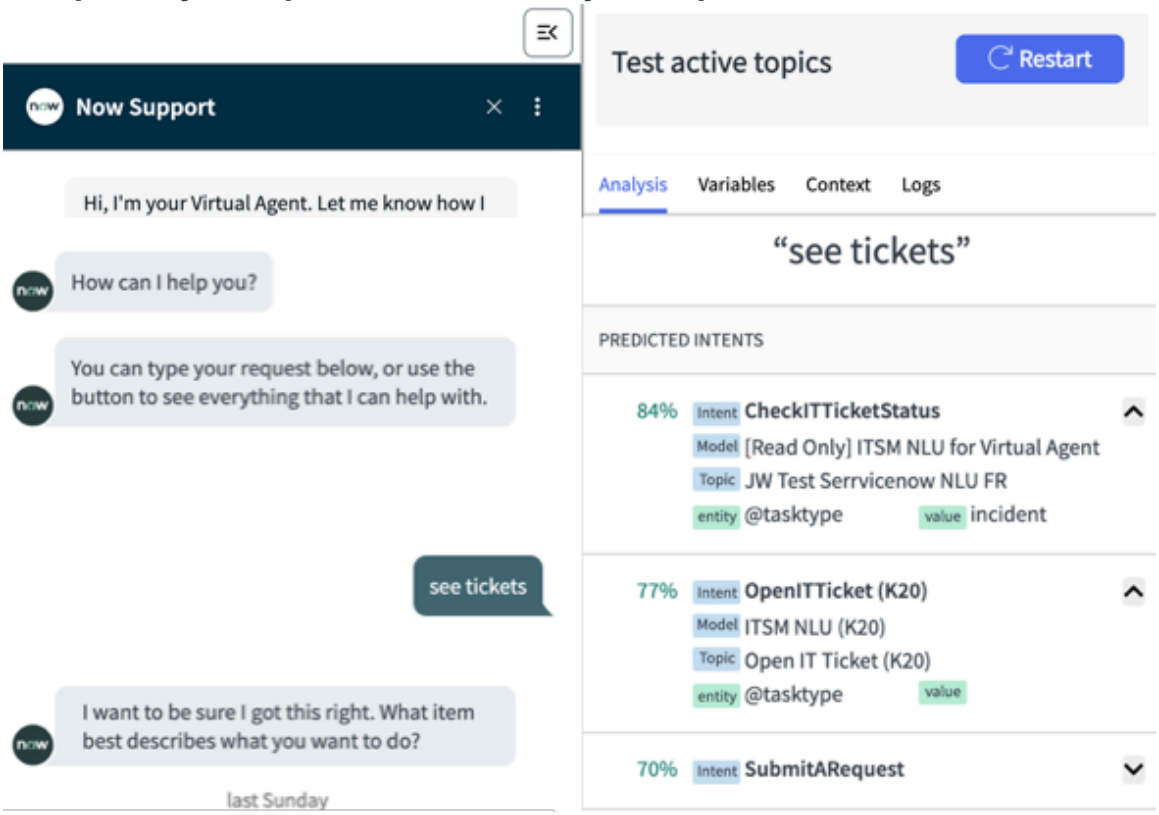
If you're using the **Test Active Topics** option or sub-options from the home page, topic discovery is enabled, so it's not listed as an option. Testing active topics behaves the same as testing from a topic except that test cases can't be created.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Analyze test phrases tab

For NLU enabled topics, the **Analyze test phrases** tab provides an analysis of the possible intents that match the test phrase (utterance) that you entered in the chat test window. The tab lists the prediction results, which include matched intents and their prediction scores, along with any entity recognition and slot-filling results. The top match is listed first. The predicted intents depend on the prediction confidence threshold set in the NLU service.

Example Analyze test phrases tab for NLU/Keyword topics



If an utterance doesn't match a current intent, you can add or change utterances in Virtual Agent Designer. For more information, see Modify NLU utterances and entities for a Virtual Agent topic.

Make changes, train the model again, and then retest until you're satisfied with the results. When the topic is ready, you can publish both the topic and the model from Virtual Agent Designer.

Variables tab

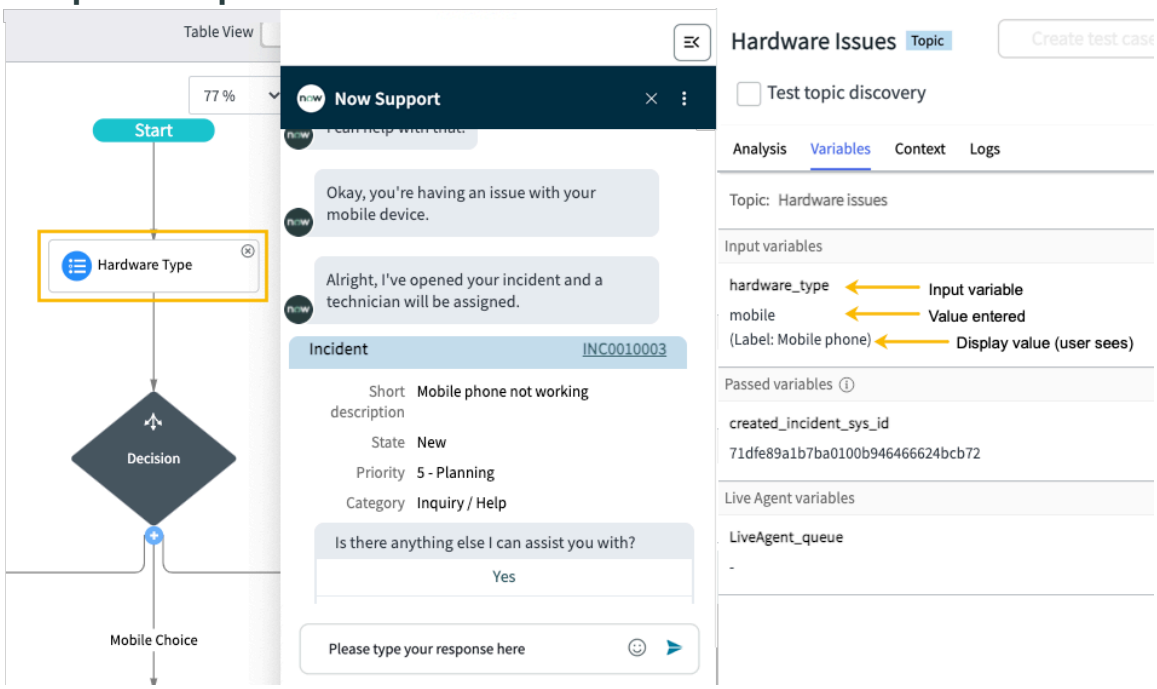
The **Variables** tab displays a list of all the variables used in the conversation and the associated values captured as the conversation progresses, so that you can follow along. A conversation can have these variable types:

- Input variables
- Script variables
- Live agent variables
- Variables passed between a calling topic and topic block
- "Nodeless" NLU entities declared as a slot-filled variable for the topic

The list is separated into sections by type of variable. The following example shows the Input variables section. Notice that for the static list control, both the display label and value are captured for the selected choice.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example list of input variables



The following example shows the Input variables section for the grouped list control. This variable information appears similar to the static list control, but the variables are separated by each group of the grouped choice.

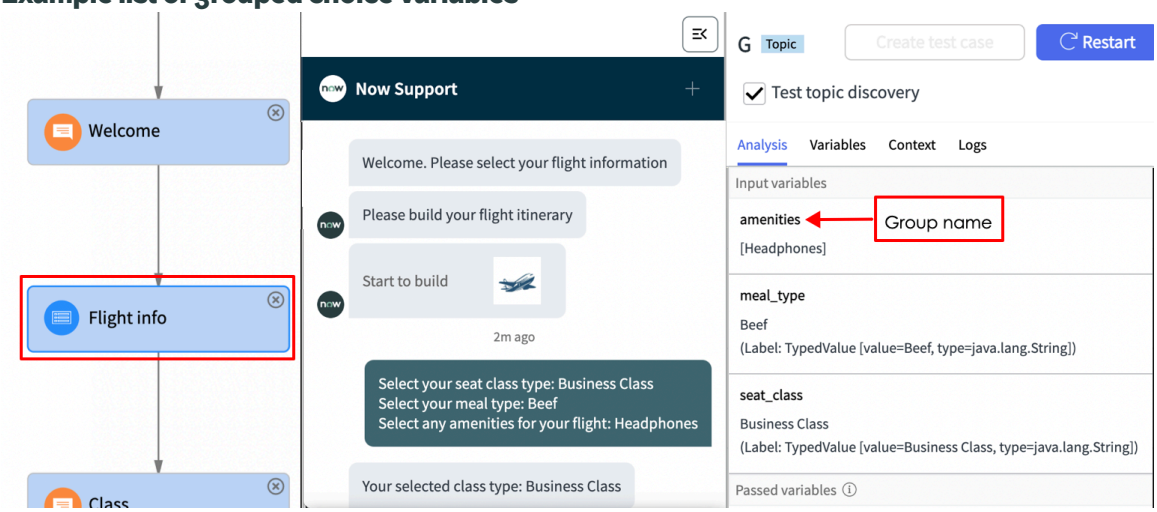Example list of grouped choice variables




Context tab

Use the **Context** tab to specify a different context for the chat. Choose a context variable from the list. These variables contain contextual information that can be used to determine topic intent or control how chats are routed to live agents. For example, you could select **portal** from the list of variables and enter the portal name **IT Express**. The **Context** tab is unavailable when creating test cases.

For more information about defining context variables, see Configure context variables for storing chat-related information. For more information about live agent variables that are included with Virtual Agent, see Live agent chat context variables.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

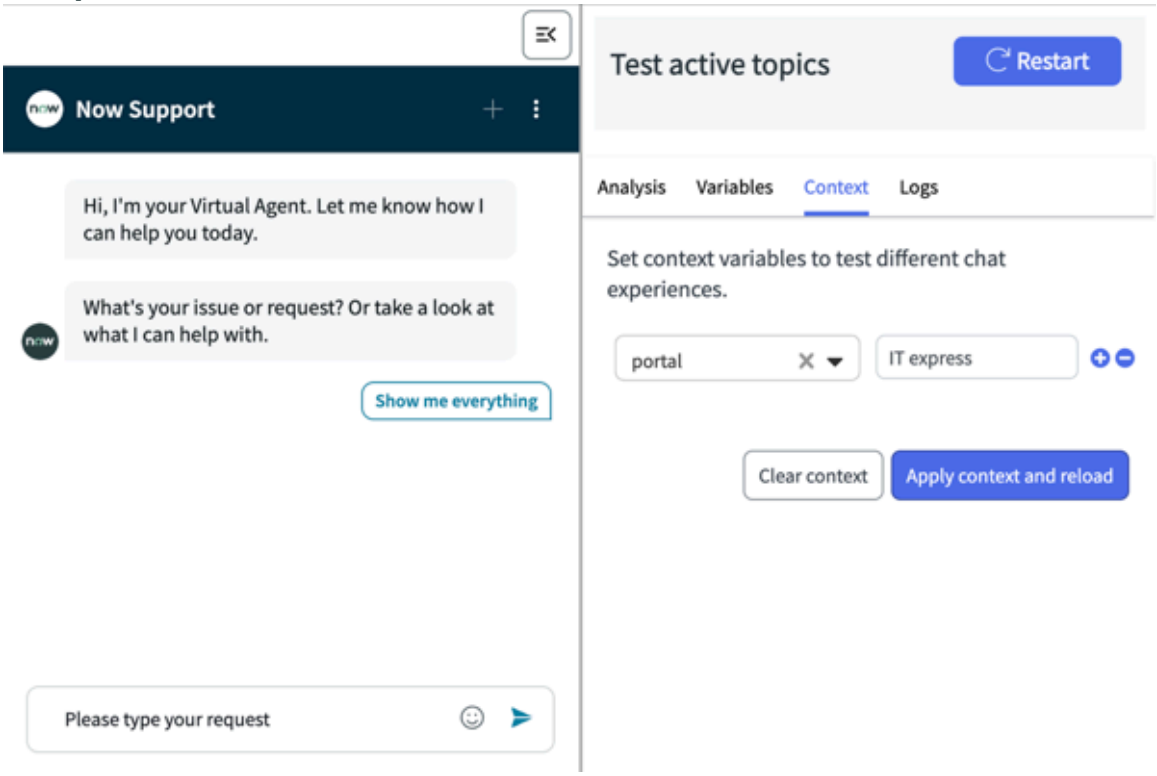
Example Context tab



Logs tab

The **Logs** tab displays the processing and error messages that are recorded while running your conversation. If you're using scripts in Virtual Agent Designer, use `gs.log`, `gs.print`, and `gs.warn` statements in your scripts to output information in this log.

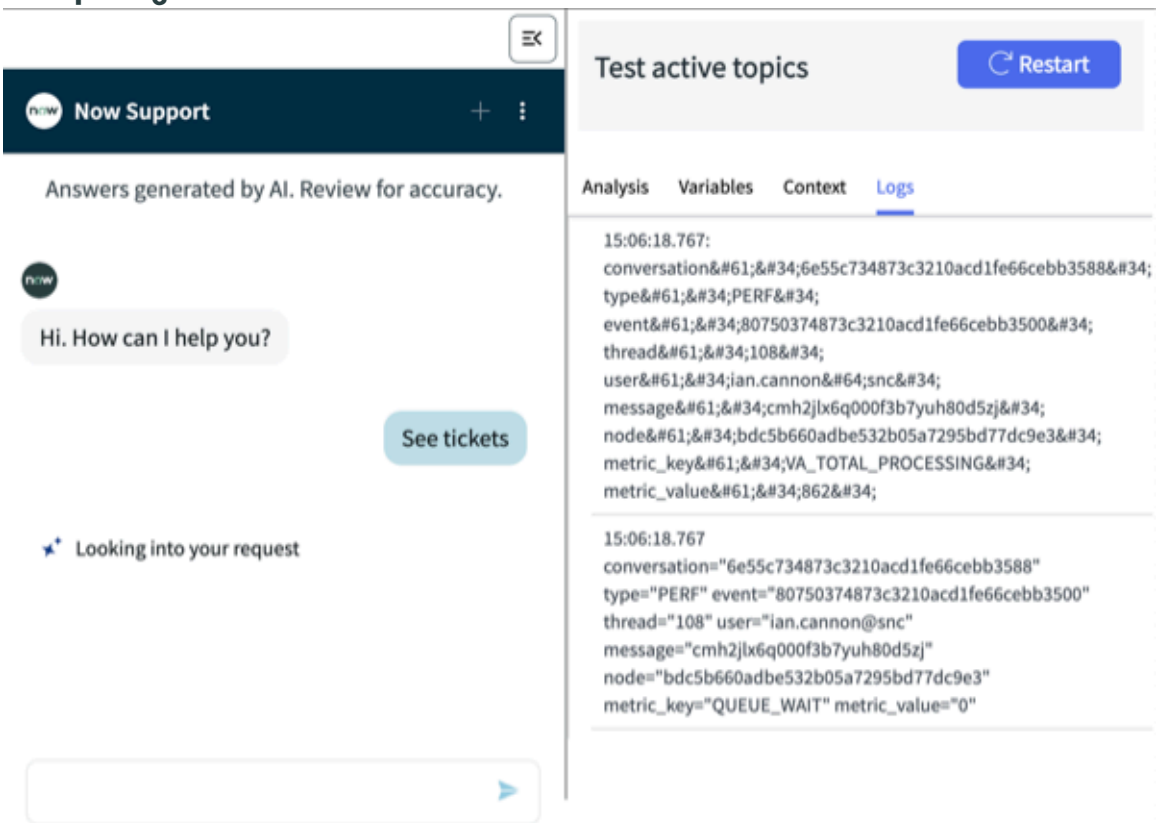Example Logs tab



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Next steps

When you're done testing your topic, close the test chat window. If needed, you can use the test information to fine-tune your conversation. For example, if the results on the **Analyze test phrases** tab return multiple possible matches for your utterance, you could update the utterances for your intent and NLU model on the **NLU Intent** tab for your topic.

Train and test your NLU model in Virtual Agent Designer

Use the **NLU Intent** tab to train and try a Natural Language Understanding (NLU) model that is mapped to a topic without leaving Virtual Agent Designer.

Before you begin

Role required: virtual_agent_admin or admin

About this task

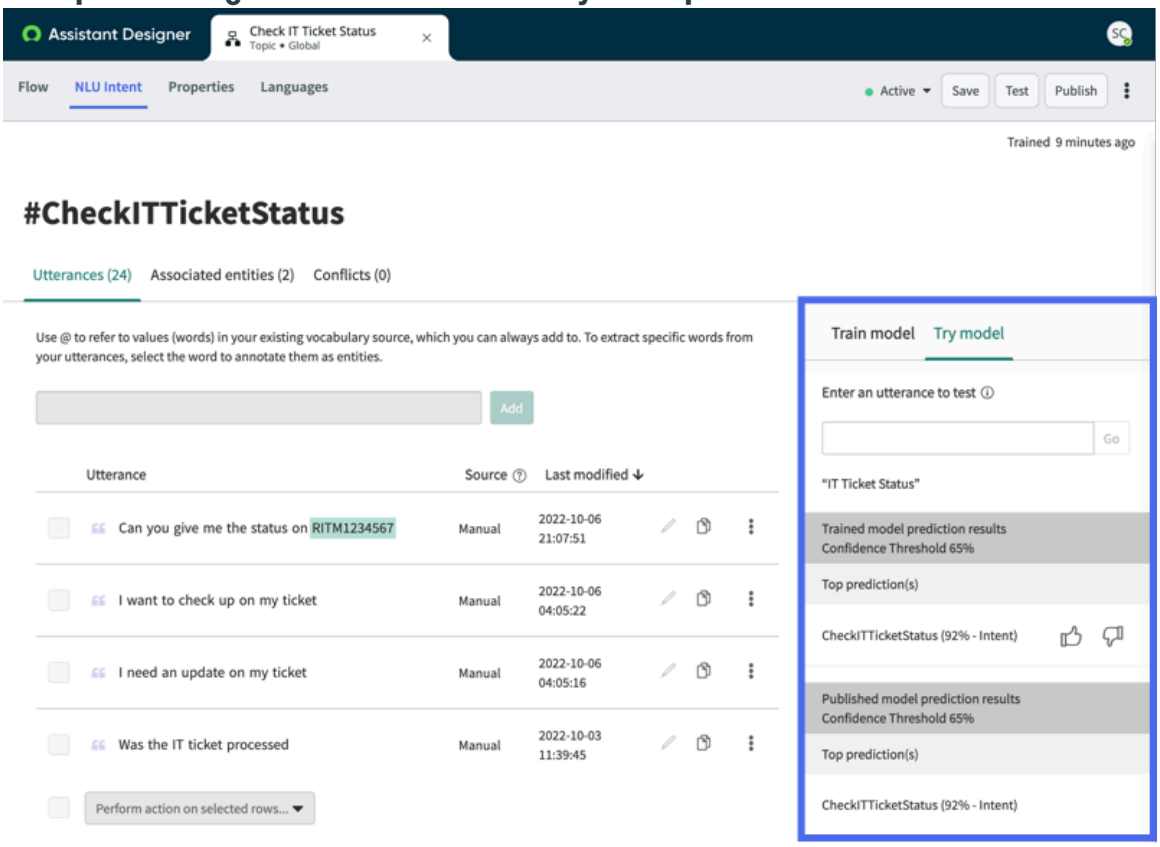
As you make changes to a topic's intent, train the model so that your updates are incorporated. Then try and test the model to review prediction results based on the latest changes. Continue to test and refine your model until you're satisfied with your changes.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Set the discovery type toggle switch to **NLU/Keyword**.
3. Open a topic and view the **NLU Intent** tab.
4. Select **Train model**.
   A message indicates that the model was successfully trained.
5. Select **Try model**.
   In the Try model panel, manually enter an utterance to test. The prediction results display in the panel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of testing an utterance in the NLU Try model panel



If prediction confidence score results meet or surpass the confidence threshold you established for the model, the results appear under Top prediction(s). In this example, the threshold value is 65%.

The default value of the *com.glide.cs.intent_confidence_threshold* property is **0.7**.

The default value of the *com.glide.cs.entity_confidence_threshold* property is **0.5**.

Note:
You can compare the draft NLU model to its most recent published version. For more information, see Compare draft and published versions of your NLU model.

6. When you're satisfied with the prediction results, publish the model from NLU Workbench or select **Publish** in the topic Header bar and select **NLU Model**.

What to do next

You can publish the model at the same time as the Virtual Agent topic if the model meets publication criteria. Make sure your model has passed through all phases of development and is ready to publish. For more information, see Model management.

For more information on providing feedback using thumbs icons in the results, see Test panel feedback.

Automated testing for Virtual Agent topics that use NLU topic discovery

Automated testing for your Virtual Agent topic flows uses the ServiceNow Automated Test Framework product through Assistant Designer. You can create and run automated tests through the Automated Test Framework to confirm that your topic flow works after making a change.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create topic test cases through a topic's **Test** > **Create test case** preview and view the topic's test cases through the Asset library's **Manage NLU/keyword test cases** button. Only run automated tests on a development, test, or other non-production instance to avoid data corruption and outage. For more information, see the Automated Test Framework.

Working with test cases is only available if you have:

- Installed the com.glide.cs.atf plugin (installed as a part of the Virtual Agent chatbot plugin).
- Received one of the following roles: atf_test_designer, atf_ws_designer, atf_test_admin, virtual_agent_admin, or admin.
- Published topics with one of the following topic types: **Topic**, **Setup Topic**, or **Small talk**.

Create an automated test in Virtual Agent Designer

Create automated tests in Virtual Agent Designer and run tests regularly against ideal conversation topic flows. You can create multiple automated tests for a topic to capture different conversation flows for various situations such as ideal conversation paths or errors.

Before you begin

Plugin required: com.glide.cs.atf.

Role required: atf_test_designer, atf_ws_designer, atf_test_admin, virtual_agent_admin, or admin

About this task

As you work on a published topic, setup topic, or small talk topic, use the **Test** option in the topic header bar to run your conversation in a chat test window. The default test window is the web (Service Portal) chat client. Use the **Create test case** button to create a test case and save the test case in the Automated Test Framework.

Note:
You can find a list of NLU/Keyword test cases by selecting the **Manage NLU/Keyword test cases** button in the Assistant Designer Asset library. Automated tests are also listed on the Automated Test Framework (ATF) Tests [sys_atf_test] table. For more information on managing NLU/Keyword test cases, see Manage and run automated test cases in Virtual Agent Designer

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Select a published topic.
3. In the topic's header bar, select **Test**.
4. Select **Create test case**.

   Note:
   The **Create test case** button is only available for published topics that are non-read only with one of the following topic types: **Topic**, **Setup Topic**, or **Small talk**.

   The topic's test client restarts and the test case begins to capture your ideal conversation. While capturing your test case, the **Include Topic Discovery** and the **Context** tabs are unavailable.
5. Enter the conversational flow that you want to capture and test.

   Tip:
   Select **Restart** at any time to restart the topic conversation and test case capture.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

6. Select **Stop**.
   The **Test case name** field displays the topic's name along with the date and timestamp. For example: `[Topic name] 3/28/2022, 3:32:19 PM`.
7. Perform one of the following actions.

Manage and run automated test cases in Virtual Agent Designer

Run reusable test cases of your published topics using the Automated Test Framework through Virtual Agent Designer to identify performance issues and prevent regressions before production.

Before you begin

Plugin required: com.glide.cs.atf.

Role required: atf_test_designer, atf_ws_designer, atf_test_admin, virtual_agent_admin, or admin

About this task

The **Manage test cases** button opens the **Run test cases** tab. Before you can run a test case, you previously must have created a test case. The **Create test cases** tab displays published topics that don't have associated automated tests. These topics appear in order from their last published date. After you select a topic name, a new window opens and you're directed to that topic in Virtual Agent Designer. From the topic, you can select **Test** to create a test case. For more information, see Create an automated test in Virtual Agent Designer.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Slide the discovery type toggle switch to **NLU/keyword**, then select **Manage test cases** in the Resources list on the sidebar.
   You either see the **Run test cases** tab or the **Get started** button. The **Run test cases** tab displays topics that have had test cases previously created. The **Get started** button redirects you to the **Create test cases** tab to begin creating your topics' automated testing.
3. In the list view, review the columns.

Run test cases columns

Column	Description
Test case	Displays the linked test case name. Selecting the linked name opens a new window and directs you to that test within the Automated Test Framework. From the Automated Test Framework you can view test details, including test steps.
Topic	Displays the linked topic name. Selecting the linked name opens a new window and directs you to that topic in Virtual Agent Designer. Topics with multiple test cases are grouped.
Run status	Displays the run status of the test. Three statuses are possible: ○ Ready: The test case is ready to be run. ○ In-progress: A temporary test case status that appears while the test case is running.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Column	Description
	After the test runs, the status returns to Ready. ○ Run recommended: The topic's published date is more recent than the test cases latest run date so there may be published updates for the topic. A run is recommended because the latest published topic and its related test cases are potentially out of synchronization.
Last run	Displays the date and timestamp of when the test was last run. Topics are grouped and sorted by the last test run date or if the same run happened across multiple topics, the topic's last published date.
Result	Displays either **Failed** or **Passed**. Pointing to the linked result displays a brief explanation of either the passing or failing step details. Selecting the linked result opens a new window and directs you to that test's **Test Results** in the Automated Test Framework where you can view more specific step fail or pass details. If the test case has passed, no changes happened between the latest published topic and its saved test case. If the test case has failed, a change happened between the latest published topic and its saved test case. For more information, see View test results. **Tip:** You can view the test suite of all topics created and tested through Virtual Agent Designer by navigating to **Automated Test Framework (ATF)** > **Suites**, and then selecting **Virtual Agent Topics**. For more information, see Run an automated test suite.
Actions	Displays the **Delete** button that deletes the test case from this page and the Automated Test Framework.

4. Select one, multiple, or all test case check boxes, and then select **Run**.

   Tip: The **sn_atf.runner.enabled** property must be turned on to run test cases. After the property is turned on, you can select **Run**. Also, you can select the check box next to the Test case column header to select all test cases to be run.

An in-progress banner appears and changes to a completion banner after your test results are ready. The Last run column updates and the last run test cases are moved to the top of the table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Handle failures caused by dynamic inputs in user testing of Virtual Agent topics

Avoid failures when performing automated tests for topics in Assistant Designer by controlling which inputs that you want to run as part of a test case.

Before you begin

Set up a test case for a topic that includes dynamic inputs. See Create an automated test in Virtual Agent Designer for more information.

Role required: virtual_agent_admin or admin

About this task

When running a test in Assistant Designer, some tests may fail even when a topic has fully functional components. These failures can happen based on various cases, such as timestamps based on a function that always returns the current time. The timestamp is created correctly when the test runs, but isn't a match with the recorded timestamp in the test case. Similar examples include different users entering different names, email or physical addresses, or other information specific to each user. Any topic that returns different data based on time or other changing conditions is a potential failing point in testing. By deactivating test steps that use dynamic input, you can run tests that won't fail due to a change in the data found in those steps.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Set the discovery type toggle switch to **NLU/keyword**, then select **Manage test cases**.
3. Open the test case that you want to work with.
4. Under the **Test Steps** tab, select the Active column of the test step you want to exclude, and set its value to `False`.
5. Repeat Step 4 with as many test steps as you want to deactivate.
6. Run or debug your test case.

Debug a Virtual Agent topic

Investigate and resolve unexpected behavior in your custom Virtual Agent topics, topic blocks, and controls.

For information about topic discovery issues, see LLM topic discovery in Virtual Agent and Resolve Natural Language Understanding (NLU) topic discovery issues.

Duplicate a live topic before debugging and changing it

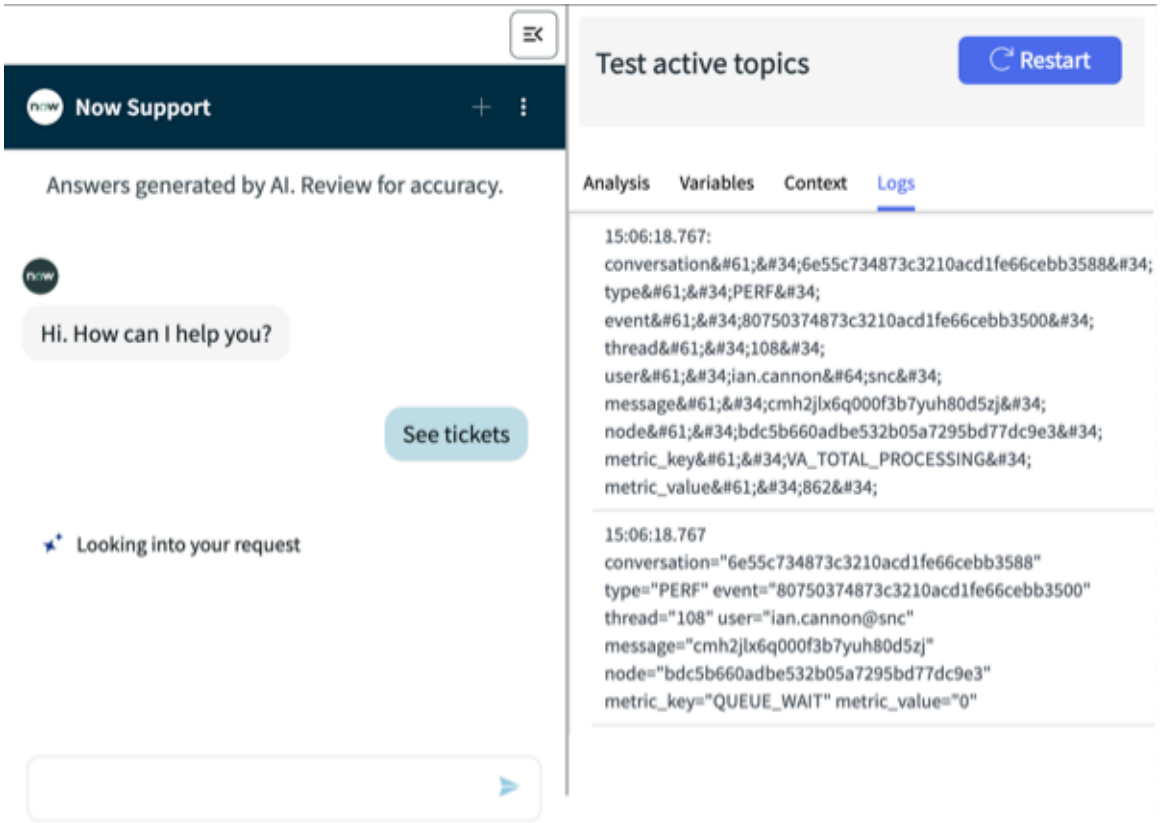
Duplicate a topic rather than update a live topic. The unmodified original topic can serve as both a reference and a backup, and retaining the original enables you to restore the topic quickly. Remember to deactivate the original topic before publishing the duplicate.

Debug a topic while testing your conversations

As you create or update a topic in Virtual Agent Designer, use the **Test** button in the topic header bar to preview the conversation. The chat test window shows the conversation as it appears within Service Portal. Elements in your conversation might appear differently in third-party messaging applications. Test your conversations in any third-party applications where you intend to deploy Virtual Agent.


The test chat window displays four tabs that provide detailed information for debugging and refining your topic: **Analyze test phrases**, **Variables**, **Context**, and **Logs**. For details on these tabs, see Testing NLU/Keyword topics. The following example shows the processing messages and errors logged during testing.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Watch for warnings on controls within your topic

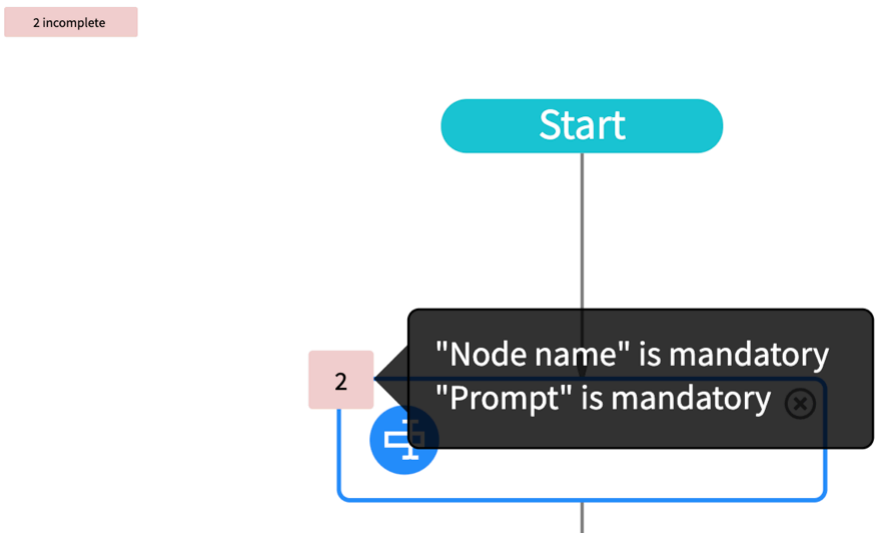Warnings on a topic node in the Flow tab




Controls that are missing necessary information show a red incomplete badge in the upper left corner of the control. The badge shows a number indicating the number of issues in that control. Select this badge to see a list of the issues in the control.

Another warning badge appears in the upper left corner of the canvas to indicate the number of issues within the entire topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Check for errors when a topic preview does not run

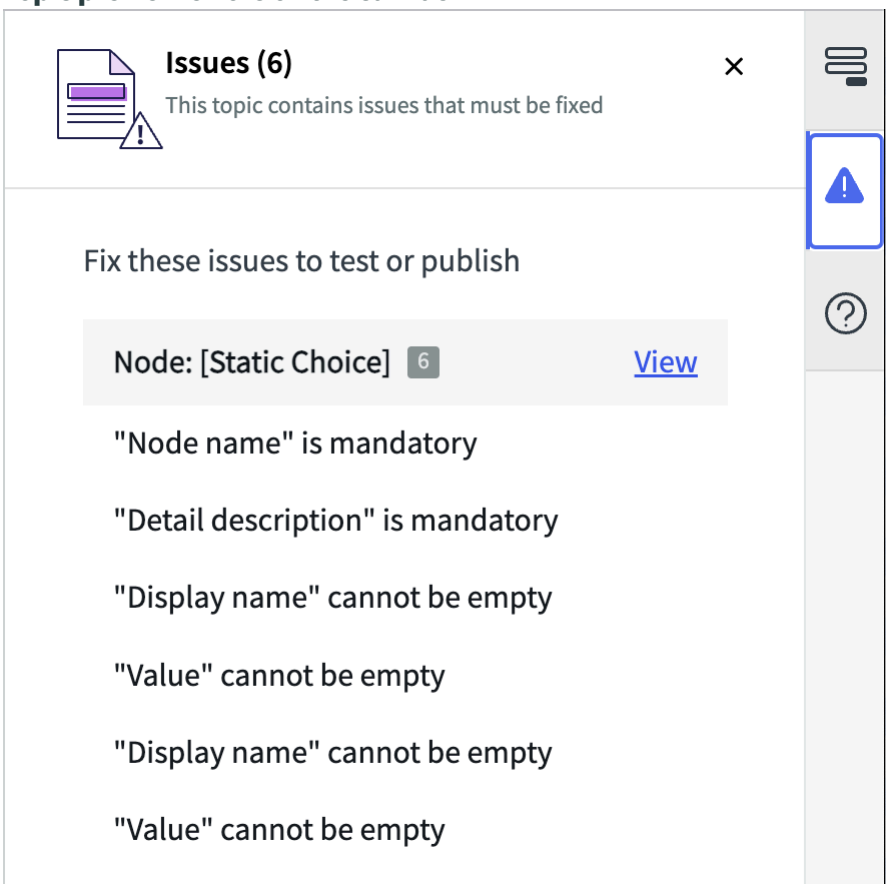Topic preview errors on the canvas



Additional information appears in a Validation Issues tab on the sidebar of the Virtual Agent Designer canvas when an error prevents the topic from running. The total number of Issues are listed, along with details and a hyperlink for each node. Select a hyperlink to go to the node, and use the information provided to correct any errors in your conversation. You can close the tab without correcting the issues, but until the issues are corrected, the Validation Issues tab appears when you select **Publish**. The Validation Issues tab closes if you select **Publish** after correcting all issues.

Common Virtual Agent issues

Issue	Possible resolution
Cannot see module designer under conversational interfaces	• User might not have the virtual_agent_admin role. • Virtual Agent plugin might not be activated.
Cannot edit a topic	Logged-in user must be in the same application scope as the topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issue	Possible resolution
Cannot preview topic	• Make sure that all required fields are filled in on the node properties. • Ensure that your browser is configured to permit pop-ups from your instance.
chat widget stuck at Connecting...	One or more of your topics might be missing. Check the to ensure that topics are present on the instance and in the Active state.

Review topics that run in a conversation flow

Each Virtual Agent (VA) conversation in an instance automatically generates an interaction record in the Interactions [interactions] table, which logs the conversation between a requester and virtual and live agent. You can review the transcript of the conversation between the requester and virtual agent, including live agent transfers (if using Agent Chat). For details, see Virtual Agent interaction records.

Resolve Natural Language Understanding (NLU) topic discovery issues

If an intent is not being chosen when expected, you can troubleshoot NLU prediction errors.

Quick troubleshooting tips

If a Virtual Agent is not being discovered, check the following:

Is NLU enabled for the session language?

Enable the language in Natural Language Understanding (NLU) settings for Virtual Agent. For details, see Enable NLU languages in Virtual Agent settings.

Is the NLU Model trained and published for the session language?

Your topic may not be using the latest changes to your model. For ServiceNow® NLU, see Train and try your NLU model and Publish a Virtual Agent topic.

Is the Virtual Agent topic published, discoverable, and bound to a published NLU Model and Intent for the session language?

The topic should be bound to a single model and intent for a given language. Ensure there are no duplicate intents bound to other topics. Make sure that the topic, model, and intent are in the same domain. For more information, see Publish a Virtual Agent topic.

Are any roles or conditions specified for the Virtual Agent topic on the Properties tab in Virtual Agent Designer?

If the topic is shown only for certain roles or for certain conditions, this can impede topic discovery. For details, see Topic Properties tab.

Why did Virtual Agent discover my topic in Spanish but not in French?

There are several possibilities:

- Not all languages are supported by all NLU providers. For details, see Language support for NLU services.
- Not all topics are bound to a language-specific NLU model and intent.

  For example, Topic A may be mapped as follows:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

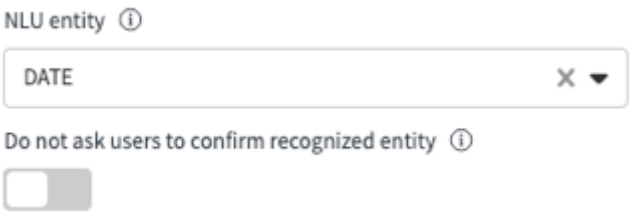
- Bound to Model A and Intent A for English
- Bound to Model A and Intent A for Spanish
- NOT bound to a model or intent for French

In this scenario, create a French model and intent for the topic. For more information, see Multilingual model management.

Why did a topic variable NOT slot fill?

Check the following:

- The topic's user input node was not configured with an associated entity. Use the **NLU entity** property for the node in Virtual Agent Designer.



- The prediction result contained an NLU entity with a confidence score that was less than the configured confidence threshold.
- The NLU entity value for the node was invalid. For example, you can't apply the word "red" to a Date/Time entity type.

Test discovery from the topic.

Do one of the following:

- In the Asset library, set the discovery type toggle switch to **NLU/Keyword**, then select **Test NLU/Keyword Topics**. Enter your utterance, and watch the **Analyze test phrases** tab.
- Open the topic in Virtual Agent Designer, then select **Test**. In the Test window, select the **Include topic discovery** check box. Enter your utterance, and watch the **Analyze test phrases** tab.

For details, see Testing NLU/Keyword topics. For an understanding of how topic discovery works, see Natural Language Understanding topic discovery logic in Virtual Agent.

Is "Setup Topic" the topic in question?

If so, it needs to be configured in Conversational Interfaces Chat Settings for it to be discovered. For details, see Configure a Virtual Agent chat experience.

Questions or issues with mid-topic switching.

Why did the conversation return to Topic A after Virtual Agent switched to Topic B?

The **Resume topic flow after topic switching** attribute is enabled on the topic. You can find this toggle switch on the **Properties** tab under **Advanced properties** > **Additional**.

Why did the conversation NOT return to Topic A after Virtual Agent switched to Topic B?

The **Resume topic flow after topic switching** attribute is disabled on the topic. You can find this toggle switch on the **Properties** tab under **Advanced properties** > **Additional**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If Virtual Agent doesn't find an intent, will it use a keyword search in mid-topic?

No.

Are Topic A's variables available to Topic B after switching?

No.

Are Topic B's variables available to Topic A when Topic A resumes?

No.

For additional troubleshooting, check the information in the following tables.

Check NLU prediction information in the Open NLU tables

When reviewing or debugging topics that use Natural Language Understanding (NLU), you can use various Open NLU tables to view the NLU prediction results for your topics. For example, the Open NLU Predict Intent Feedbacks and Open NLU Predict Entity Feedbacks tables provide detailed information on the NLU processing performed by applications (such as Virtual Agent) to determine topic intent and entities (slot filling).

Open NLU Predict Intent Feedbacks table

The Open NLU Predict Intent Feedbacks [open_nlu_predict_intent_feedback] table shows the intent processing that an application (in this case Virtual Agent) performs in response to an NLU intent prediction result. The goal for Virtual Agent is to map a predicted NLU intent to a Virtual Agent topic. Whenever Virtual Agent suggests a topic, a record of the prediction result is added to this table. If Virtual Agent doesn't find a topic, no prediction occurs, and a record marked *`Skipped`* is added to this table.

To view the table, navigate to **All**, and then enter `open_nlu_predict_intent_feedback.list` in the navigation filter.

Key fields in the Open NLU Predict Intent Feedbacks table

Field	Description
App	Application using NLU. For example: *VA* (Virtual Agent).
App Document	sys_id of the application record. For example: *`sys_cs_topic.sys_id`*.
App document table	Table of the application record. For example: *`sys_cs_topic`* (Topics table).
Auto-Selected	Boolean indicating whether the system detected only one intent above the prediction threshold, and therefore the application chose to run the topic that matched the same intent: *`true`* or *`false`*.
Current Intent	NLU intent that was used by the application when the NLU prediction was submitted. This field can be empty (blank). For example, an intent used in the Virtual Agent application could be *`Change password`*.
Domain	The intent's domain. For example, Global or ITSM.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key fields in the Open NLU Predict Intent Feedbacks table (continued)

Field	Description
External Model Display Name	Name of the external NLU model. For example, the name of the IBM Watson Assistant NLU application.
Intent Switch Causer	Name of the originating topic that prompts the user for confirmation. There are two possible scenarios for values in this column: • The user is prompted for confirmation on the initial intent match for their utterance (**Ask user if topic VA chose is correct** toggle switch is enabled in NLU Settings). If the user is prompted for an initial utterance, this value may be the Greetings topic. If the value is *empty*, the user either was not prompted for the initial match, or the user rejected the initially matched topic intent. • The user is prompted for confirmation for an intent switch in mid-topic (**Ask user if switched topic is correct** toggle switch is enabled in NLU Settings). If the user is prompted for a switch in mid-topic, this value is the name of the topic they were viewing at the time of the switch. **Note:** System tasks may also display here, which you can ignore. For example: *__silent_TerminateGoal_a3817a5f7ca7439b8*.
Intent Switch Causer current Task	Name of the task (node) that the user switches from. **Note:** System tasks may also display here, which you can ignore. For example: *__silent_TerminateGoal_a3817a5f7ca7439b8*.
Mapped	Boolean indicating whether the application (Virtual Agent) considered the prediction to be usable by matching the intent to an available topic: *true* or *false*.
Model Display Name	Name of the ServiceNow NLU model.
Model ID	ID of the NLU model that the prediction was submitted for.
Model Name	Name of the NLU model that the prediction was submitted for.
NLU Topic Discovery Outcome	Prediction result for initial utterance in a conversation as part of topic discovery:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key fields in the Open NLU Predict Intent Feedbacks table (continued)

Field	Description
	• **AI Search Fallback**: No prediction was made. AI Search was used as the fallback. • **Correct**: A single prediction was made. The user confirmed the topic was correct. • **Correct Among Multiple**: Multiple predictions were made. This result indicates that the user selected this prediction. Other prediction records are marked as Uncategorized. • **Exited with no confirmation**: The user exits with no confirmation. • **Incorrect**: A single prediction was made. The user confirmed the topic was incorrect. • **Incorrect Among Multiple**: Multiple predictions were made, but the user did not select any of the suggested topics. This result indicates that this prediction had the highest Prediction Confidence value. The other prediction records are marked as Uncategorized. • **Setup Topic Prediction**: Setup topic related prediction was made without using AI Search. • **Skipped**: No prediction was made. • **Skipped with New Utterance**: When the Topic menu displayed, the user typed a new utterance. • **Uncategorized**: None of the above conditions were met, or the user abandoned the conversation.
NLU Model Language	Language of the NLU model used for the prediction.
Prediction	Name of the predicted intent.
Prediction Audit Log	Reference to the Open NLU Predict Logs [open_nlu_predict_log] table.
Prediction Confidence	Confidence value of the prediction.
Requester Session Language	Language code of the requester session language when Dynamic Translation is enabled. For example, if the user types in French, the code *fr* is stored. If language detection is enabled and the user enters text in a language that is not the default, Virtual Agent asks the user to confirm their language. If confirmed, the detected language becomes the default value for the session.
Selected	Boolean indicating whether the multiple predicted intents shown to end users as matched topics were actually selected by the end users: *true* or *false*.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key fields in the Open NLU Predict Intent Feedbacks table (continued)

Field	Description
Shown	Boolean indicating whether the application (Virtual Agent) displayed the predicted intent as a choice for the end user to select: *true* or *false*.
Topic Switched	Name of the topic, if the user was prompted for confirmation (regardless of their choice, yes or no).
Utterance	Phrase entered by the end user in the chat client window.

Open NLU Predict Entity Feedbacks table

The Open NLU Predict Entity Feedbacks [open_nlu_predict_entity_feedback] table shows the entity (slot-filling) processing that an application (in this case Virtual Agent) performs in response to an NLU entity prediction result. For example, the goal of Virtual Agent is to map a predicted NLU entity to a Virtual Agent topic input variable.

To view the table, enter `open_nlu_predict_entity_feedback.list` in the navigation filter.

Key fields in the Open NLU Predict Entity Feedbacks table

Field	Description
App	Application using NLU. For example, VA (Virtual Agent).
App Document	sys_id of the application record. For example: *sys_cs_topic.sys_id*.
App Document Table	Table of the application record. For example: *sys_cs_topic*.
Auto Selected	Boolean indicating whether the application automatically chose to use the entity without notifying the user: *true* or *false*.
External Model Display Name	Name of the external NLU model. For example, the name of the IBM Watson Assistant NLU application.
Mapped	Boolean indicating whether the application (Virtual Agent) considered the prediction to be usable: *true* or *false*.
Mapped to	Item in the application that the entity was mapped to.
Model Display Name	Name of the ServiceNow NLU model.
Model ID	ID of the NLU model that the prediction was submitted for.
Model Name	Name of the NLU model that the prediction was submitted for.
Prediction	Name of the predicted entity.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key fields in the Open NLU Predict Entity Feedbacks table (continued)

Field	Description
Prediction Audit Log	Reference to the Open NLU Predict Logs [open_nlu_predict_log] table.
Prediction Confidence	Confidence value for the prediction.
Selected	Boolean indicating whether the application selected to use the entity: *true* or *false*.
Shown	Boolean indicating whether the application displayed the predicted entity to the end user as a choice to select: *true* or *false*.
Utterance	User phrase entered in the chat client window.
Value	Value of the predicted entity.

Open NLU Predict Logs

The Open NLU Predict Logs [open_nlu_predict_log] table provides a consolidated overview of the NLU prediction records for topics. Each record in the log identifies the utterance and corresponding intents (topics) and entities determined by the NLU service. Each record also includes the NLU prediction scores calculated during topic discovery (intent matching) and entity extraction.

Note:
NLU prediction node logs are generated automatically. If you're using node logs for debugging but you want to suppress the automatic generation of NLU prediction node logs, add the *com.glide.opennlu.predict.node_logging_enabled* system property and set the value to false.

To view the Open NLU Predict Logs, enter `open_nlu_predict_log.list` in the navigation filter.

Key fields in the Open NLU Predict Logs table

Field	Description
Async	Indicator for asynchronous prediction processing: *true* or *false*. True indicates that the prediction was performed asynchronously, allowing Virtual Agent worker threads to continue.
Created	Date and time the NLU prediction record was created.
Duration	Length of processing time for the prediction to return intent and entity values.
Language	The language of the NLU prediction request.
Level	Type of message: Information level.
Message	Prediction results returned: number of intents and entities.
Request	NLU prediction parameter that contains the utterance and NLU model for the recognized intent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key fields in the Open NLU Predict Logs table (continued)

Field	Description
Response	NLU prediction results, which contain 0 (none) or more scored intents and scored entities.
Source	Process or area: *OpenNLU - Predict*.
Utterance	User statement recognized by the bot, which maps to an intent defined in an NLU model.

Note:
You can view the detailed intent and entity results in the Open NLU Predict Intent Feedbacks and Open NLU Predict Entity Feedbacks tables.

Review HTTP connection information for Open NLU integrations

Use the Open NLU Driver HTTP Connection [open_nlu_driver_http_connection] table to quickly check the HTTP credentials, connection details, and methods for the intents, entities, NLU models, and predictions for your NLU service provider.

To view the table, enter `open_nlu_driver_http_connection.list` in the navigation filter.

Natural Language Understanding topic discovery logic in Virtual Agent

Understand how Virtual Agent returns intents and how it selects which intents to show to the user.

Prerequisites for topic discovery

Virtual Agent can discover a topic when the following conditions are met:

- The topic must be published and active.

  In the Topics [sys_cs_topic] table, the **Active**, **Published**, and **Is Topic Discoverable** values are set to *true*.

  Note:
  The **Is Topic Visible** column does not affect topic discovery.

- The topic must be discoverable.
- Topic conditions must evaluate to true at runtime.
- If any roles are configured for the topic, the requestor must have at least one of those roles.
- The topic's NLU model must have a binding for the session language.

NLU topic discovery logic

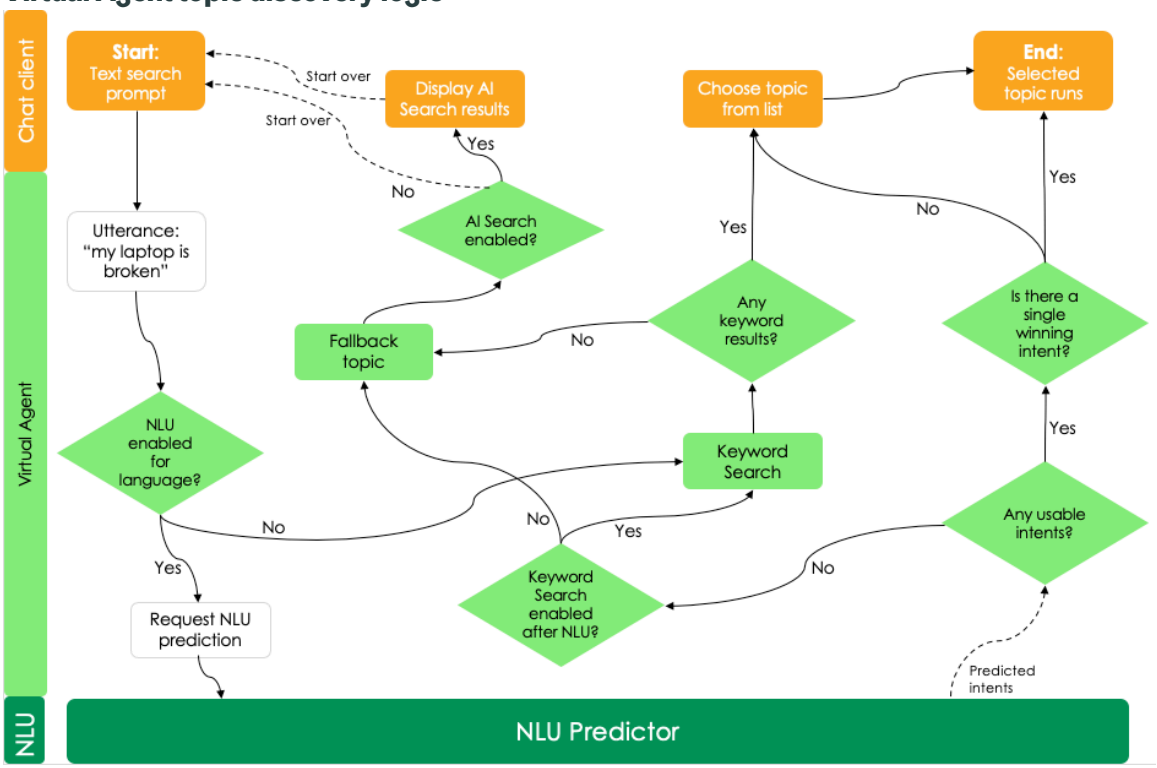
Virtual Agent sends a prediction request to the NLU provider. The request contains the utterance and all registered NLU model IDs that are bound to the session language. Matches return NLU intents that correspond with a topic. Virtual Agent then responds in one of the following ways:

- Automatically selects a topic for the requester, based on the confidence score.
- Prompts the requester to pick a topic from the returned list of matches.
- Finds no matching topics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If no matches are found but backup keywords are enabled (the *com.glide.cs.nlu.keywords.enabled* property is *true*), Virtual Agent searches for a topic based on keywords.

Virtual Agent topic discovery logic



Virtual Agent NLU confidence scores

Virtual Agent uses confidence scores to return predicted intents. To set the confidence value:

1. Navigate to **Conversational Interfaces** > **External NLU Integrations** > **Drivers**.
2. Select **ServiceNow NLU**. You can also select All and enter `open_nlu_driver.list`.
3. In the **Intent Confidence Threshold** field, enter the confidence threshold.

If an intent's confidence score is greater than or equal to the configured threshold, Virtual Agent considers it a good match.

Virtual Agent uses the following logic when selecting intents:

- Auto-selects the highest predicted intent.

  This occurs when only one intent is matched, or in the event of a tie-breaker, when the next closest match is a distant second.

  Note:
  If ServiceNow NLU is used and the **Intent Confidence Delta** field in the ServiceNow NLU driver table (open_nlu_driver.list) is set to *0*, there can be no tiebreaker.

- Returns a topic list for the requester to choose from.

  This occurs if auto-select is not applicable. The length of the list is determined by the *com.glide.cs.max_number_display_topics* system property.

- No intents are matched.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

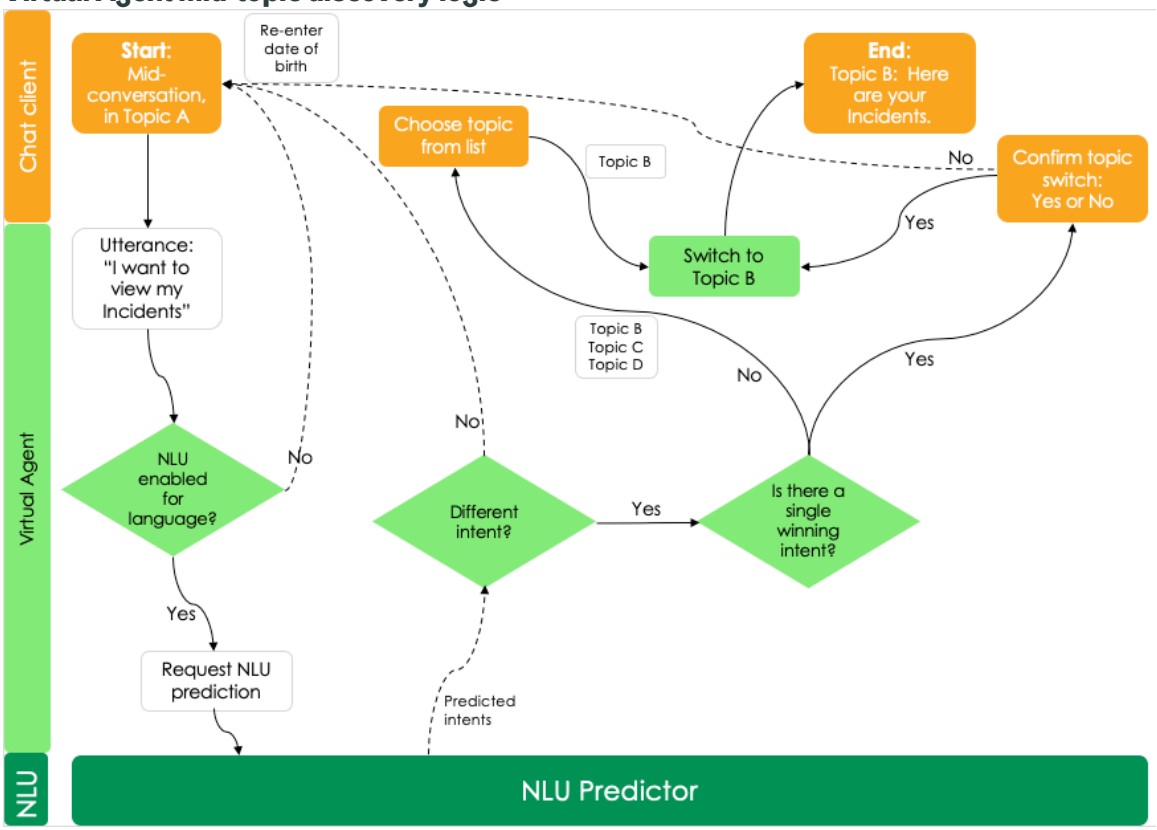
When zero NLU Intents are predicted with a confidence score greater than or equal to the configured threshold, Virtual Agent falls back to a keyword search if configured. (The *com.glide.cs.nlu.keywords.enabled* and *com.glide.cs.nlu.keywords.include_topics_bound_to_lang* system properties are *true*).

Mid-topic NLU topic discovery logic

While a topic is running, the requester can enter an utterance or phrase that results in a topic switch. For example:

1. The requester is in a Virtual Agent conversation, and Topic A is running.
2. Topic A prompts the user to enter their date of birth.
3. Instead of choosing a date, the requester types, "I want to view my Incidents."
4. Virtual Agent can't resolve this phrase to a date, so it issues an NLU prediction request.
5. The NLU predictor returns Intent B, and Virtual Agent sees that Topic B is bound to Intent B.
6. Virtual Agent switches the conversation to Topic B, which then presents information to the requester about their incidents.

Virtual Agent mid-topic discovery logic



Related topics

Resolve Natural Language Understanding (NLU) topic discovery issues

Publish a Virtual Agent topic

Deploy an inactive topic or an updated topic to save it and make it available to users on Virtual Agent clients.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

If you're using Natural Language Understanding (NLU) topic discovery, you can publish the model at the same time as the topic if the model meets publication criteria. Make sure that your model has passed through all phases of development and is ready to publish. If you haven't refined, tested, and optimized your model, you may not be able to publish it in Virtual Agent Designer. For more information, see Model management.

Role required: virtual_agent_admin or admin

About this task

You can also publish topic blocks and custom controls to make them available for use in calling topics.

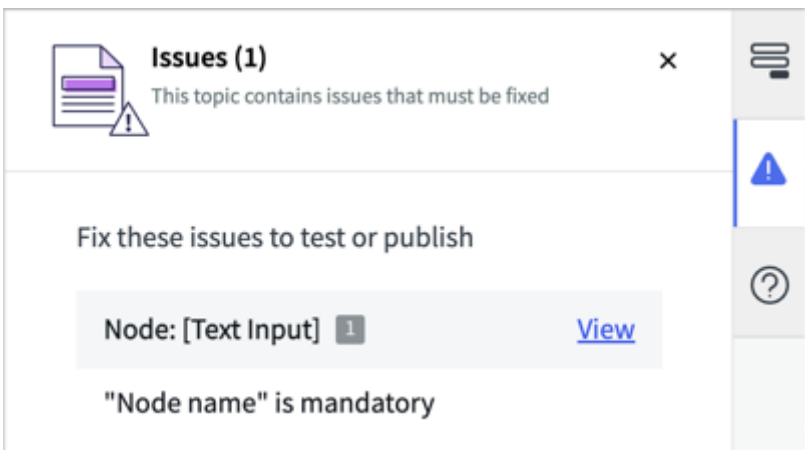
Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.

   Tip:
   If you need to work with NLU/keyword topics, select the **NLU/keyword** toggle.

2. , select the topic, topic block, or custom control to publish or republish.
3. In the topic header bar, select **Publish**.

   Selecting **Publish** when there are issues present opens a Validation Issues tab next to the property sheet, which counts up and details all issues needing correction. These details include a hyperlink for each incomplete item. If the issue is in a node, selecting the hyperlink opens the property sheet for that node. As each issue is resolved, the list on the shelf updates to show the remaining errors. Once there are no issues to resolve, the publishing dialog box opens.



   If you're using NLU topic discovery, the Choose what to publish dialog box appears. Select the available items to publish with the topic, such as the NLU model and language mappings, and then select **Publish**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If the **Publish** option is unavailable, the model may need some work. For example, the model may not have enough intents or may need more utterances for some intents. Fix these issues before proceeding. Also, if a model language is unavailable, the language-specific model has never been published. Publish it from the NLU Workbench. For more information, see Model management.

The topic header bar displays a `Saving in progress...` message. The toast message `Successfully saved your topic` appears in the lower-right corner afterward for four seconds, and can be closed by selecting the **X** in the message.

For topics, the topic state is Active and the Published state changes to Published just now.

4. Verify that your topics work as expected by opening them in a test conversation window in one of the following ways.

Option	Description
Topic properties tab	○ For NLU/keyword topics, select **Test**. ○ For LLM topics, select **Test** or open the drop-down menu and select **Preview in *Now Assist* panel**.
LLM home page	Under the **Select assistant** drop-down menu, choose the assistant associated with your top ic, then select **Test assistant**.
NLU/keyword home page	Select **Test active topics**.

Note:
For more information about testing Now Assist LLM topics, see Testing LLM topics. For NLU/keyword topics, enter keywords or NLU utterances that correspond to the topic intent. For the pre-built Virtual Agent topics, the bot returns a list of topics that match the entered keyword or utterance. See Testing NLU/Keyword topics for more information.

Result
The topic blocks and custom controls are published and are available for use in calling topics.

Note:
Active topics, including setup topics and small talk topics, can also be available for use after the topics are published. For more information, see Control topic discovery and visibility.

Delete a Virtual Agent topic

Delete a Virtual Agent topic that is no longer needed.

Before you begin
Role required: virtual_agent_admin or admin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

You can delete a topic using the **Delete** option in the Assistant Designer Asset library or in the topic header bar.

Note:

Sometimes, certain categories of topics can't be deleted, such as the Greeting, Survey, Live Agent, Error, Explore help, and Closing setup topics. Delete option is disabled for subflows, actions, and custom skills.

If you want to remove a topic from your Virtual Agent clients but don't want to delete it, consider making the topic inactive instead.

Procedure

1. If you're not working on the topic, navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Use one of the following methods based on either a record on the home page or the header inside a topic.
3. In the Confirm delete dialog box, select **Delete**.
   The tab closes and returns you to the home page.

Result

A toast message also appears for 4 seconds, confirming the topic has been deleted. You can close the message by selecting the dismiss alert icon .

If the topic was active and is no longer listed in the home page, the topic is immediately removed from Virtual Agent clients.

Promote or demote LLM conversational subflows, actions, and topics in Virtual Agent Designer

Promote assets including conversational subflows, conversational actions, and topics in Virtual Agent Designer, after associating them with a large language model (LLM) assistant, to have them suggested to the user by the LLM assistant.

Before you begin

Associate an LLM topic, conversational subflow, or conversational action with an LLM assistant. For more information, see Create a Virtual Agent topic, Managing conversational subflows in Assistant Designer, and Managing conversational actions in Assistant Designer.

Role required: virtual_agent_admin or admin

About this task

After you associate a conversational subflow, conversational action, or topic with an LLM assistant, you can promote the asset so that the LLM assistant suggests it to the users. Promoted assets can also be demoted to remove them from the list of suggested assets.

System topics, setup topics, topic blocks, custom controls, and small talk topics cannot be promoted.

Note:

You can also promote NLU/keyword topics by creating topic recommendations in Conversational Interfaces settings. For more information, see Using Virtual Agent Topic Recommendations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For promotion controls for LLM assets, you can check the asset's **Promoted** status under the Show actions for this row icon ⋮. The *Promoted* status shows a check mark when the topic is promoted.

For more information about LLM assistants, see LLM assistants.

Procedure

1. Navigate to **All** > *Virtual Agent* > **Designer**.
2. From the **Select assistant** drop-down menu, select the LLM assistant that will promote the asset.
   The list of assets reduces to LLM assets associated with the LLM assistant.
3. Find the asset that you want to promote or demote.
4. Select the Show actions for this row icon ⋮, and then select **Promote** to toggle the asset's *Promoted* status.

   If the asset is already promoted, the asset has a check mark next to the *Promoted* status. Demoting the asset removes the check mark.

Result

Example of promoted assets in a Virtual Agent chat

The asset is added to the list of assets promoted by the LLM assistant, while a demoted asset is removed from the list.

A toast message also appears for four seconds, confirming that the asset has been promoted or demoted. You can close the message by selecting the Close icon ✕.

What to do next

Reorder promoted LLM conversational subflows, actions, and topics in Virtual Agent. For more information, see Reorder promoted LLM conversational subflows, actions, and topics.

Reorder promoted LLM conversational subflows, actions, and topics

Rearrange LLM assets like conversational subflows, conversational actions, and topics to the desired order after promoting them for recommendation by the Virtual Agent.

Before you begin

Role required: virtual_agent_admin or admin

Promote the LLM assets that you want to reorder in Virtual Agent Designer. For more information on promoting assets, see Promote or demote LLM conversational subflows, actions, and topics in Virtual Agent Designer

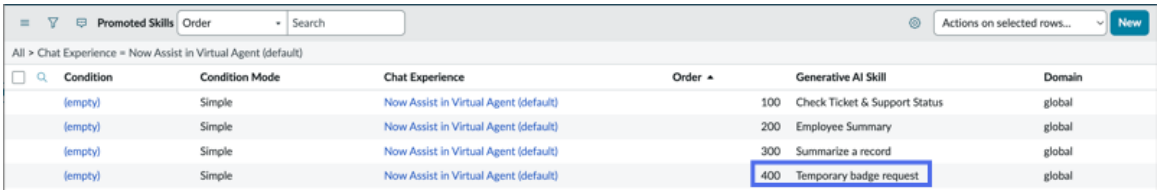
About this task

By default, promoted LLM assets are presented in alphabetical order in the assistant. You can rearrange promoted assets in any desired order by editing their records from the Promoted Skills [sys_cs_context_profile_promoted_skill] table. When conditions are applied to a promoted asset, and when the asset meets the condition, then it is displayed first by the assistant, irrespective of its set order.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure


1. Navigate to the Promoted Skills [sys_cs_context_profile_promoted_skill] table by selecting **All** and entering `sys_cs_context_profile_promoted_skill.list` in the filter.
2. For the LLM topic, conversational subflow, or conversational action that you want to reorder, select the **Order** value.



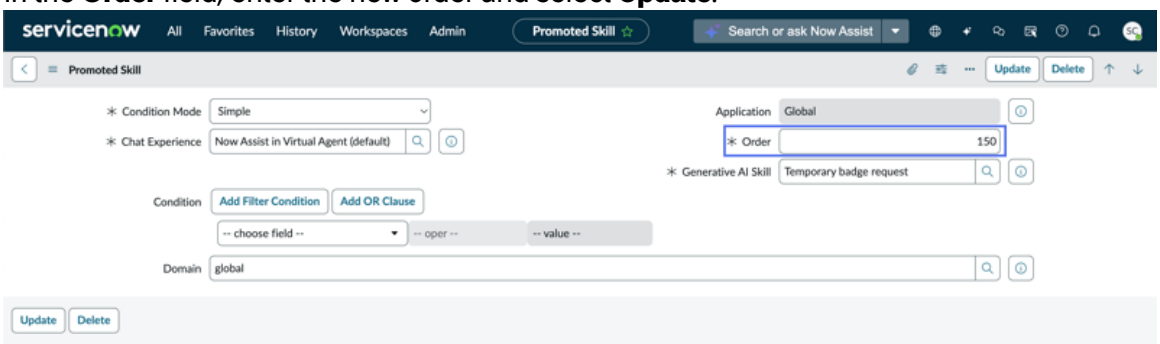
3. In the **Order** field, enter the new order and select **Update**.



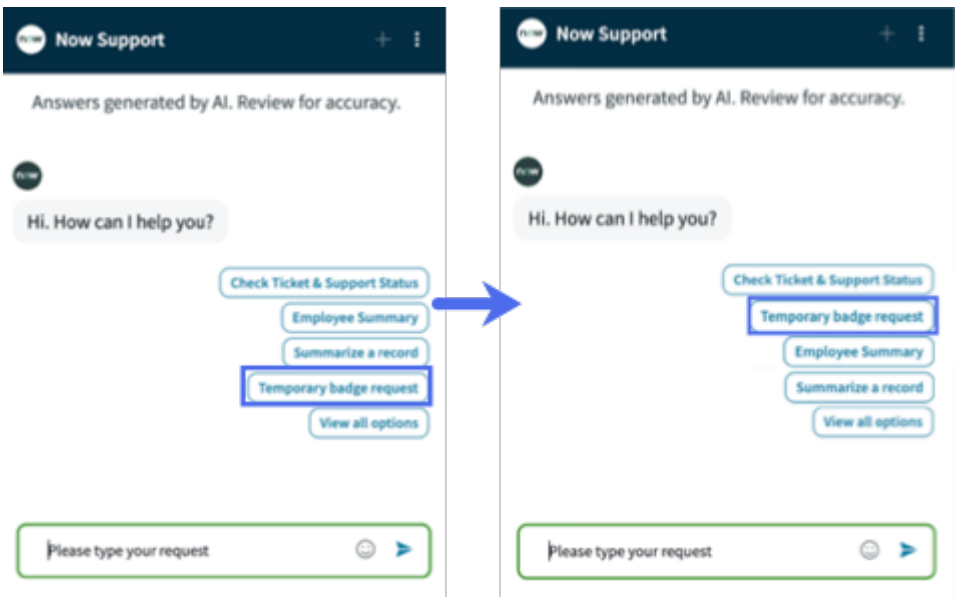In the assistant, the promoted skills will appear in the set order.




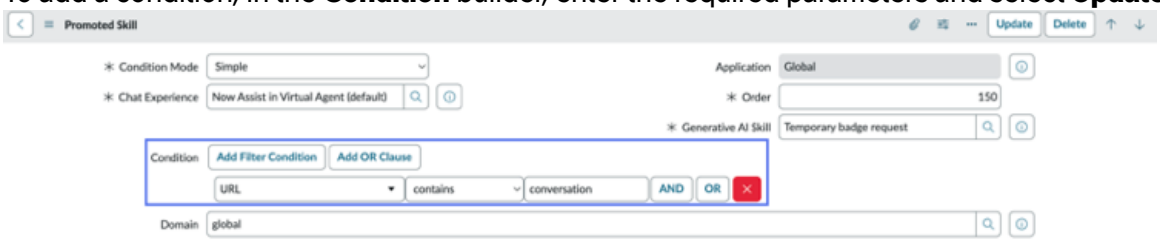4. To add a condition, in the **Condition** builder, enter the required parameters and select **Update**.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

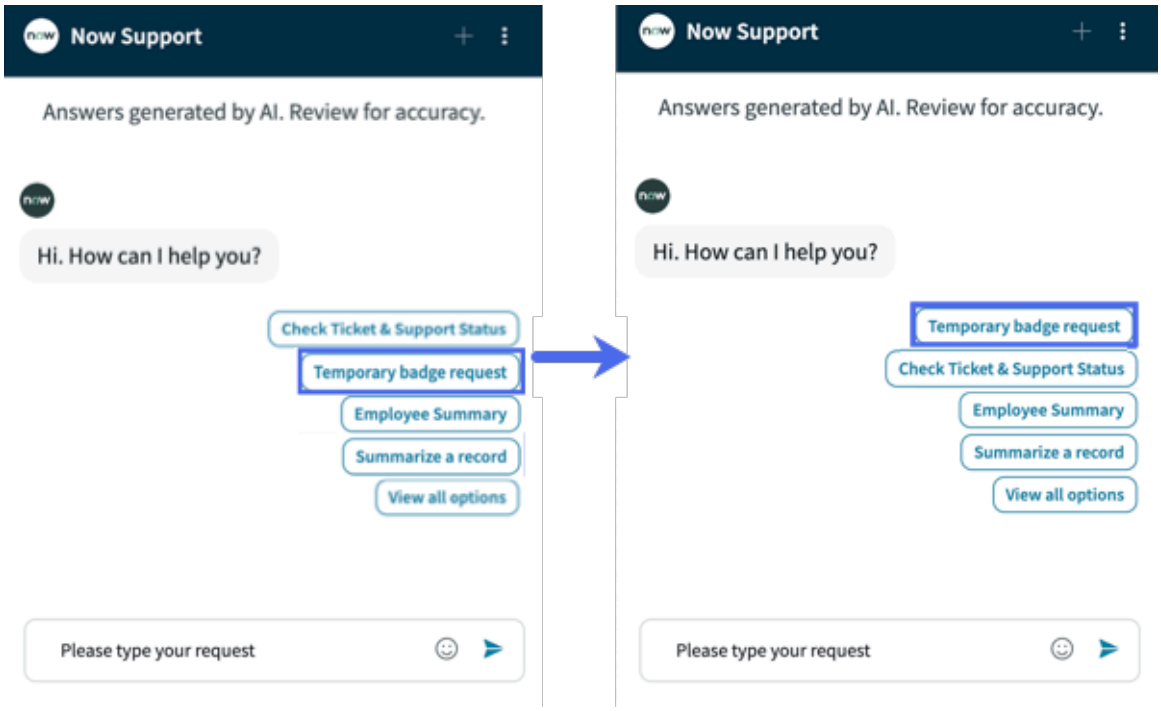In the assistant, the conditionally promoted skill will appear before the other assets.



Result
The list of promoted assets is presented in a Virtual Agent conversation based on the Order value of each asset and the conditions applied.

What to do next
Repeat the previous steps to adjust any other promoted assets to sort them in a preferred order.

Add a condition builder to promoted assets

You can define a condition for a given promoted Virtual Agent topic to bring it higher up on the list of promoted assets in a panel conversation.

Before you begin
Role required: virtual_agent_admin or admin.

To define a condition for a topic, you must promote it first. For more information, see Promote or demote LLM conversational subflows, actions, and topics in Virtual Agent Designer.

About this task
Add a condition to a chosen Virtual Agent topic to have it displayed higher on the list of promoted assets in a panel conversation. This condition overrides the *Number* value on the Promoted Skills [sys_cs_context_profile_promoted_skill_list] table.

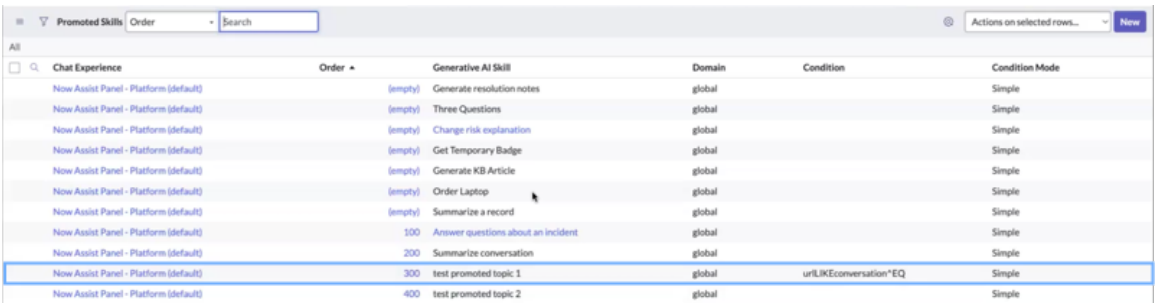
Procedure
1. Navigate to **All**, then enter `sys_cs_context_profile_promoted_skill.list` in the filter.
2. Select your chosen promoted asset from the list.
3. In the *Condition* field, set the chosen condition for your promoted asset.
   For example, URL `> contains > conversation`.
4. In the *Condition mode* field, select your condition.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
In the current release, *Simple* is the only available condition mode.


5. Select **Update**.

Result
The promoted asset's *Condition* on the Promoted Skills table shows the defined condition.



The promoted asset now shows *Condition defined* next to the *Promoted* checkmark.

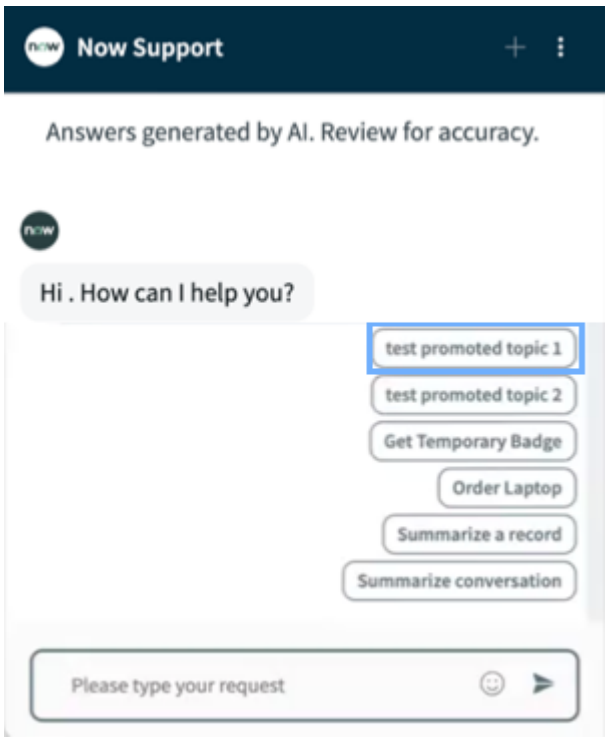The promoted asset also displays at the top of the list of promoted assets in a Virtual Agent Now Assist panel chat window.




Conversational settings for Assets in the Asset library

Manage asset settings from the Asset library for individual assets.


To manage the settings for an asset directly from the Asset library page, select the **Show actions for this row** icon ( ) and select **Conversational settings**.

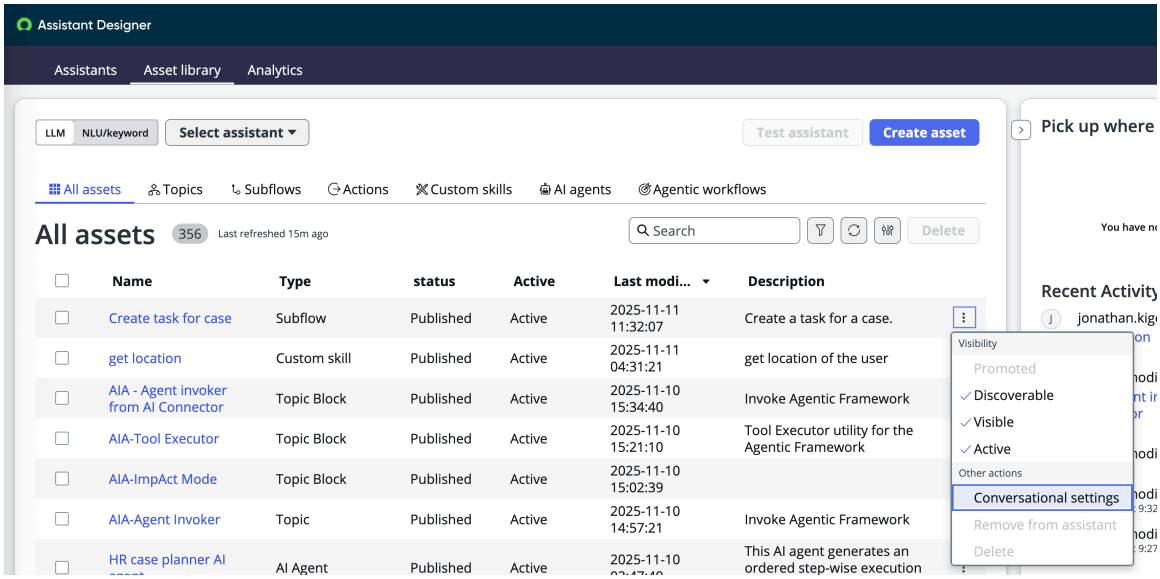© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Use the conversational settings module to edit the settings depending on your asset type. Asset settings vary depending on the asset type. The following table contains the editable settings for each asset type.

Asset type	Editable settings
Topics	Assistants, Roles, Discoverable (assistants), Visible (assistants)
Subflows	Assistants, Roles
Actions	Assistants, Roles
Now Assist Custom skills	Assistants, Roles, Discoverable (assistants), Visible (assistants)
AI Agents	Assistants, Roles, Discoverable (assistants), Visible (assistants)

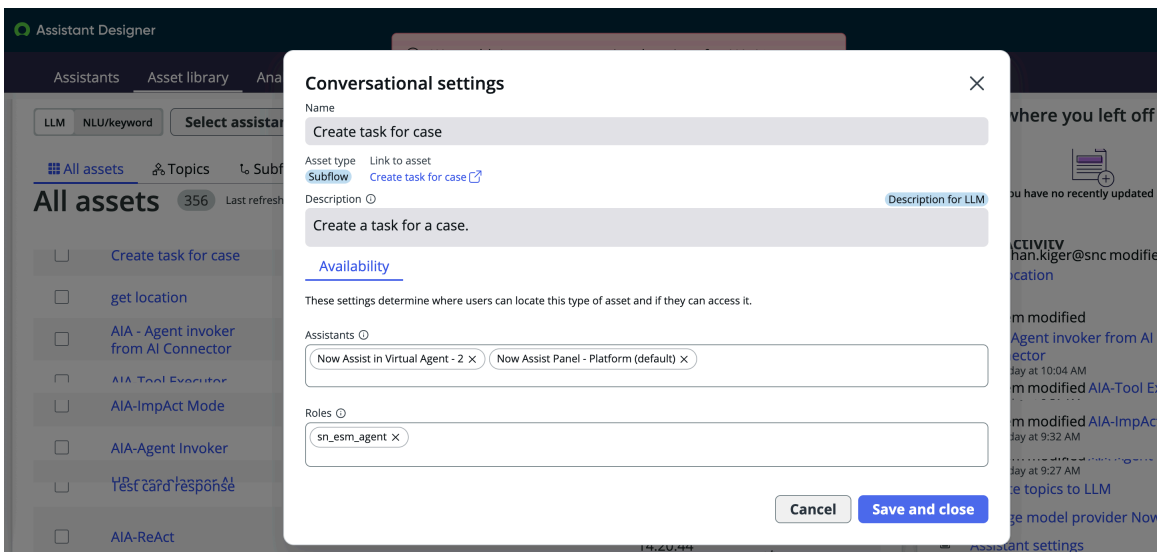

The following fields are available on the Conversational settings module. Depending on the asset type, you can update the various fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Name	Name of the asset given when creating or editing the asset.
Asset type	Type of the asset.
Link to asset	Select the link to open the asset.
Description	Description of the asset given when creating or editing the asset.
Availability	Availability settings allow you to select the assistants and roles that can access the asset. • Assistants: Select the assistants that can access the asset. If left empty, the asset can't be used by any assistants. • Roles: Select the roles end users must have to access the asset. If left empty, then the asset is available to all roles.
Findability	Findability settings determine whether you can invoke or look for the asset from the chat experience. • Discoverable: Select the assistants where the asset is discoverable. If an asset is selected as Discoverable, it's invoked when matched with the user's utterance. • Visible: Select the assistants where the asset is visible. If an asset is selected as Visible, it appears whenever the **Show me everything** option is selected in the conversation.

Managing conversational subflows in Assistant Designer

View and manage conversational subflows through Assistant Designer.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

When you have the admin or virtual_agent_admin role, you can work with conversational subflows in Assistant Designer.

Conversational subflows currently can't be created in Assistant Designer. You can only view and edit them in Assistant Designer. Conversational subflows can be created, tested, and deleted only in Workflow Studio. For more details on creating subflows, see Create a subflow in Workflow Studio.

When you open a subflow in Assistant Designer, a tab is displayed in the navigation header bar. This tab opens the subflow in Workflow Studio within the Assistant Designer environment. The following columns appear by default:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Column	Description
Name	Name of the subflow. Select the name of the subflow to work with that subflow directly in Assistant Designer.
Type	Subflow.
Status	Status type such as Published.
Active	Whether the GenAI skill is active or inactive.
Last modified	Time that the subflow was last modified.
Description	Description of the subflow.

Use the row actions icon ⋮ to work with visibility settings for **Promoted**, **Discoverable**, **Visible**, and **Active**.

Option	Description
Promoted	Option to toggle the subflow's *Promoted* status to show as a suggested conversational asset in the virtual assistant.
Discoverable	Option to toggle the subflow's *Discoverable* status. If discoverable, the subflow is invoked when matched with a user's utterance.
Visible	Option to toggle the subflow's visibility to users. If visible, the subflow appears whenever the **Show me everything** option is selected in the conversation.
Active	Option to toggle the subflow's active status. If active, the subflow is available within the conversation.
Delete	Option to delete the subflow is not applicable within Assistant Designer because subflows can only be deleted within Workflow Studio.

Conversational subflows and actions only appear to users during a Virtual Agent conversation if the Subflows and actions skill is turned on in Now Assist Admin. Conversational subflows and actions appear in Now Assist Panel as long as the Subflows and action skill is active.

- For more information on the Now Assist Panel, see Now Assist panel.
- For more information on conversational subflows, see Conversational subflows.
- For more information on integrating subflows that are not conversational into Virtual Agent Designer topics, see Integrating Virtual Agent with Workflow Studio workflows.

Managing conversational actions in Assistant Designer

View and manage conversational actions through Assistant Designer.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

When you have the admin or virtual_agent_admin role, you can work with conversational actions in Assistant Designer.

Conversational actions currently can't be created in Assistant Designer. You can only view and edit them in Assistant Designer. Conversational actions can be created, tested, and deleted only in Workflow Studio. For more details on creating actions, see Create an action in Workflow Studio.

When you open an action, a tab is displayed in the navigation header bar. This tab opens the action in Workflow Studio within the Assistant Designer environment. The following columns appear by default:

Column	Description
Name	Name of the action. Select the name of the action to work with that action directly in Assistant Designer.
Type	Action.
Status	Status type such as Published.
Active	Whether the GenAI skill is active or inactive.
Last modified	Time that the subflow was last modified.
Description	Description of the action.

Use the row actions icon to work with visibility settings for **Promoted**, **Discoverable**, **Visible**, and **Active**:

Option	Description
Promoted	Option to toggle the action's *Promoted* status to show as a suggested conversational asset in the virtual assistant.
Discoverable	Option to toggle the action's *Discoverable* status. If discoverable, the action is invoked when matched with a user's utterance.
Visible	Option to toggle the action's visibility to users. If visible, the action appears whenever the **Show me everything** option is selected in the conversation.
Active	Option to toggle the action's active status. If active, the action is available within the conversation.
Delete	Option to delete the action is not applicable within Virtual Agent Designer because actions can only be deleted within Workflow Studio.

Conversational subflows and actions only appear to users during a Virtual Agent conversation if the Subflows and actions skill is turned on in Now Assist Admin. Conversational subflows and actions appear in Now Assist Panel as long as the Subflows and action skill is active.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- For more information on the Now Assist Panel, see Now Assist panel.
- For more information on conversational actions, see Conversational actions.
- For more information on integrating actions that are not conversational into Virtual Agent Designer topics, see Integrating Virtual Agent with Workflow Studio workflows.

Managing custom skills in Assistant Designer Asset library

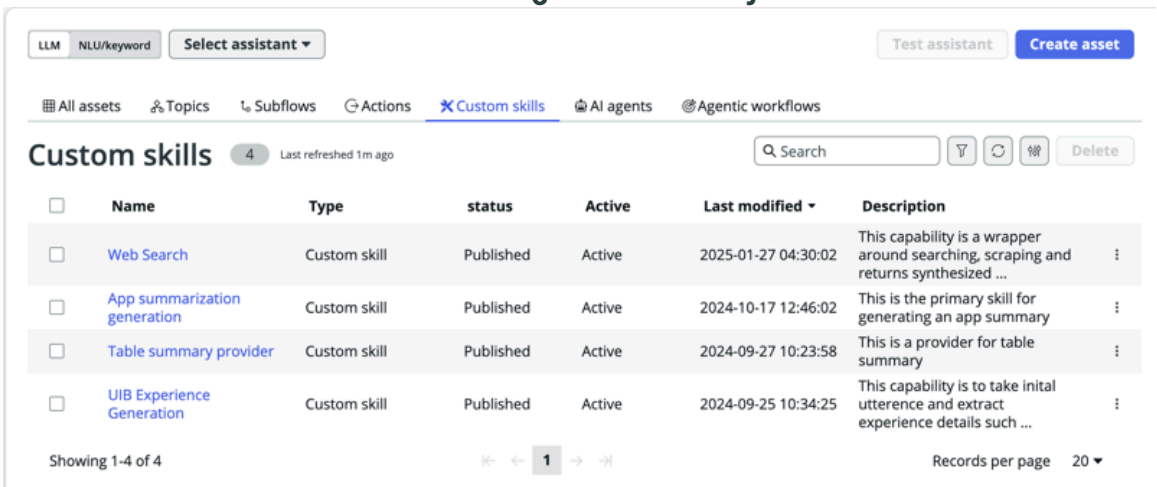
View custom skills through Assistant Designer Asset library.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

Role required: virtual_agent_admin

When you select a custom skill, it opens the skill in Now Assist Skill Kit. Custom skills currently can't be created in Virtual Agent Designer. You can only view them in Assistant Designer Asset library. The skills can be created, tested, and deleted only in Now Assist Skill Kit. For more details on creating skills, see Create a skill.

Custom skills as viewed in Assistant Designer Asset library



Column	Description
Name	Name of the skill. Select the skill to open it in Now Assist Skill Kit.
Type	Custom skill.
Status	Status type such as Published.
Active	Whether the skill is active or inactive.
Last modified	Time that the skill was last modified.
Description	Description of the custom skill.

Use the row actions icon ⋮ to work with visibility settings for **Promoted**, **Discoverable**, **Visible**, and **Active**:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Option	Description
Promoted	Option to toggle the skill's *Promoted* status to show as a suggested conversational asset in the virtual assistant.
Discoverable	Option to toggle the skill's *Discoverable* status. If discoverable, the skill is invoked when matched with a user's utterance.
Visible	Option to toggle the skill's visibility to users. If visible, the skill appears whenever the **Show me everything** option is selected in the conversation.
Active	Option to toggle the skill's active status. If active, the skill is available within the conversation.
Delete	Delete option for skills is inactive in Assistant Designer Asset library. The skills can only be deleted from Now Assist Skill Kit.

Custom skills become available in Assistant Designer Asset library based on the deployment settings in Now Assist Skill Kit.

1. Navigate to **Now Assist Skill Kit** > **Home** and select the skill.
2. Select **Skill settings** > **Deployment settings**.
3. For the skill to become available in Assistant Designer Asset library, the following options should be selected:
   - Select **Platform skills** in the **Feature** list.
   - Select the **Now Assist panel** card to enable the skill through the Now Assist Panel.

- For more information about the Now Assist Panel, see Now Assist panel.
- For more information about Now Assist Skill Kit, see Now Assist Skill Kit.

Managing AI agents in Assistant Designer

View AI agents created in AI Agent Studio through Assistant Designer.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

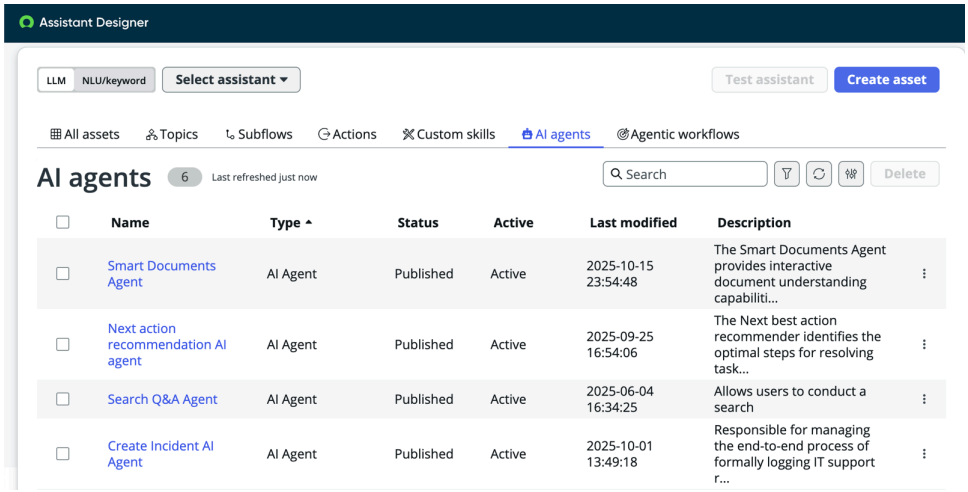
Role required: virtual_agent_admin

When you select an AI agent, it opens in AI Agent Studio. AI agents currently can't be created or edited in Virtual Agent Designer. You can only view them in Assistant Designer. They can be created, edited, tested, and deleted only in AI Agent Studio. For more details, see AI Agent Studio.

AI agents in Virtual Agent Designer

Select the **AI agents** option to see all the AI agents activated for Assistant Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Column	Description
Name	Name of the AI agent. Select the AI agent to open it in AI Agent Studio.
Type	AI agent.
Status	Status type such as Published.
Active	Whether the AI agent is active or inactive.
Last modified	Time when the AI agent was last modified.
Description	Description of the AI agent.


Use the row actions icon (⋮) to work with visibility settings for **Promoted**, **Discoverable**, **Visible**, and **Active**:

Option	Description
Promoted	Option to toggle the AI agent's *`Promoted`* status to show as a suggested conversational asset in the virtual assistant. You must first select an assistant to promote the AI agent.
Discoverable	Option to toggle the AI agent's *`Discoverable`* status. If discoverable, the AI agent is invoked when matched with a user's utterance.
Visible	Option to toggle the AI agent's visibility to users. If visible, the AI agent appears whenever the **Show me everything** option is selected in the conversation.
Active	Option to toggle the AI agent's active status. If active, the AI agent is available within the conversation.
Delete	Delete option for AI agent is inactive in Assistant Designer. The AI agent can only be deleted from AI Agent Studio.

AI agents become available in Assistant Designer based on the display settings in AI Agent Studio. To enable an AI agent to appear in Assistant Designer, perform the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

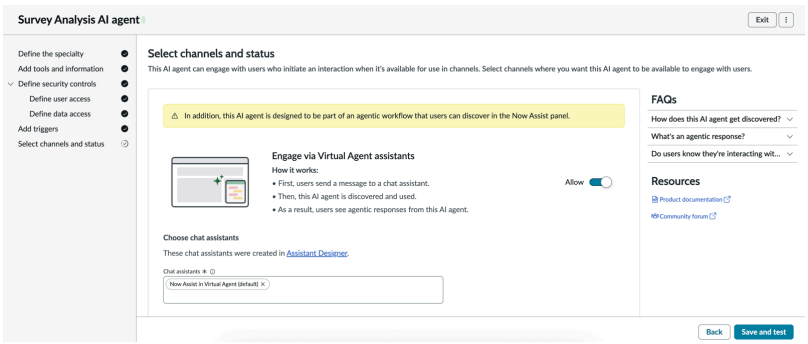1. Navigate to **All** > **AI Agent Studio** > **Overview** and select the AI agent.
2. Select the **Define availability** tab.
3. In the **Engage via Virtual Agent assistants** card:
   - Activate the **Allow** toggle switch.
   - Under *Choose chat assistants*, select the assistants where the AI agent becomes discoverable.



For detailed information about creating AI agents, see Create an AI agent.

Related topics

Agentic conversations in Virtual Agent

Using AI agents in Virtual Agent topics

Use an AI agent custom skill to have it perform a task passed to it, such as compiling info on a KB article.

Looking for an AI agent?

- There might be AI agents installed with the Now Assist application that are not used in agentic workflows. To learn how to see all agents that are available on your instance, see Find AI agents.
- To find agents that might not be installed on your instance, visit the AI Agent Marketplace on the ServiceNow Store.

An AI agent performs a task that you pass to it inside the AI Connector utility in Virtual Agent Designer. For more information on the AI Connector utility, see AI Connector utility.

For example, you can use the AI Agent in the AI Connector utility to get all data on a Knowledge Base article. The AI Agent provides the article if it is available or notifies you if it can't find it. The agent also provides data on the consolidation itself by way of its output mappings.

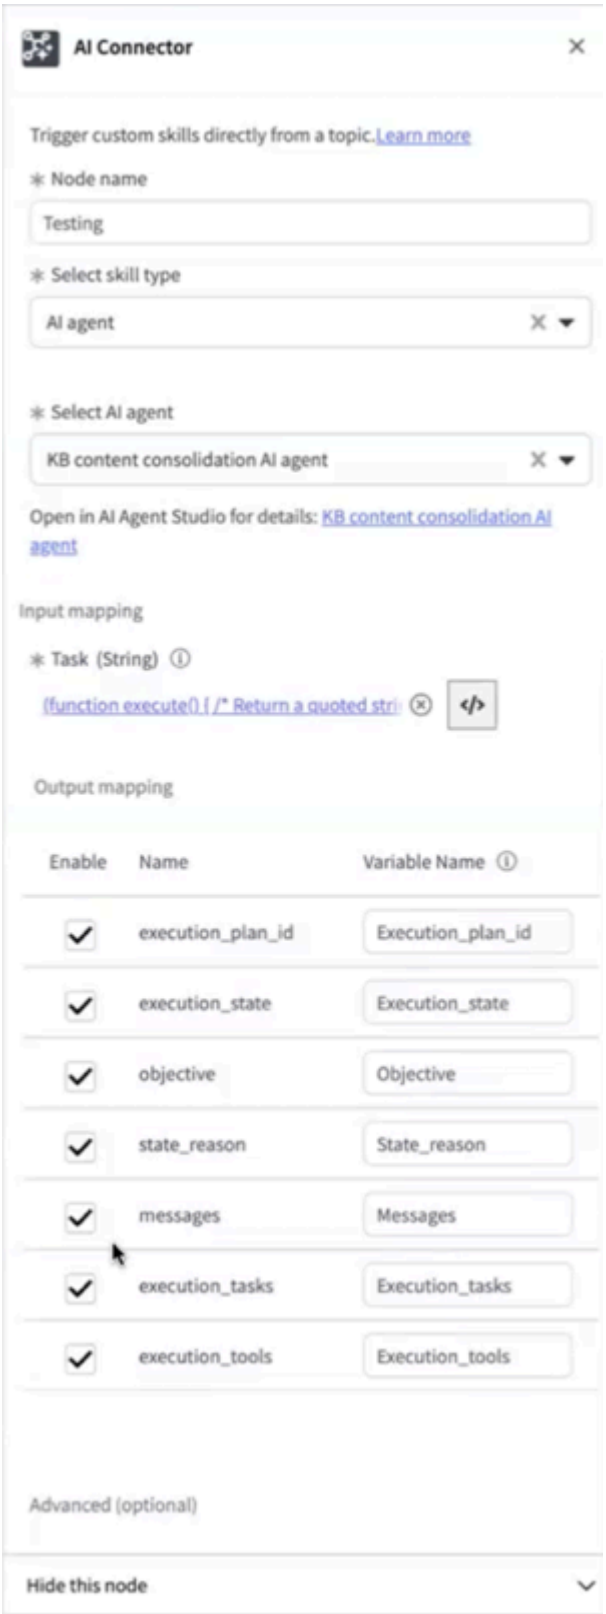
To see which AI agents are installed on your instance, see Find AI agents.

To use the AI agent, select it from the **Skill type** drop-down list in the AI Connector utility, then select the AI agent's type from the **Select AI agent** drop-down. For example, to have the AI agent consolidate a knowledge base article, select **KB content consolidation AI agent**.

Define the task for the AI agent by placing a value in the **Task** input mapping variable. You can define a condition, or enter a script or command. For example, enter `return KB00090;` to have the AI agent retrieve that knowledge base article and consolidate its information into a reply in the Virtual Agent chat.

The AI agent's output mapping properties are automatically defined when you select the AI agent type. All output mappings are returned in the chat when the AI agent completes the task.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



AI agent output mapping properties


Variable	Description
Execution plan ID	ID number of the execution plan.
Execution state	Current state of the execution plan.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

AI agent output mapping properties (continued)

Variable	Description
Objective	Intended task for the execution plan.
State reason	Reason for the execution plan's current state.
Messages	List of messages sent through the execution plan.
Execution tasks	List of tasks in the execution plan.
Execution tools	List of tools in the execution plan.

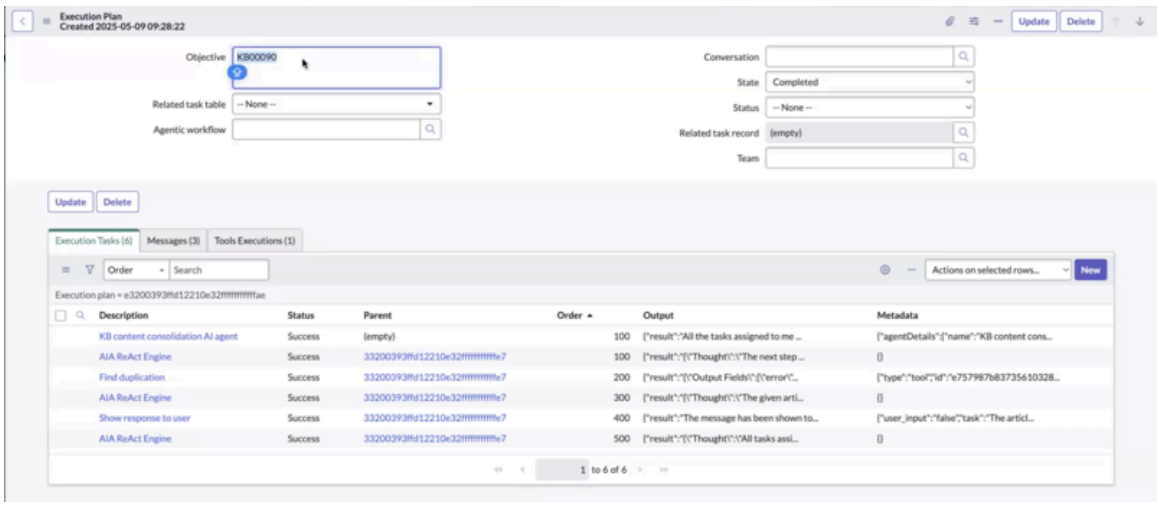When the AI agent performs its job, it generates the full plan showing the input and output mappings. Each plan shows the objective, all tasks performed for the objective, and any messages sent or tools used in the plan. All plans are listed in the Execution Plan [sn_aia_execution_plan_list] table.



Using Virtual Agent Topic Recommendations

Use the Topic Recommendations app to identify pre-built Virtual Agent topics that can be quickly implemented in your organization. Topic Recommendations uses Intent Discovery to analyze data from your organization and to find relevant pre-built topics that your organization can benefit from, and new topics that would be useful to create.

The Topic Recommendations app lets you evaluate the common use cases that Virtual Agent can help resolve or deflect. You can use Topic Recommendations with Virtual Agent topics that use either keyword or NLU topic discovery. Use it to do the following:

1. Choose the ServiceNow data to analyze (configure analysis).
2. Analyze your existing data (run the analysis you configured).
3. Review the analysis results and use pre-built solutions:
   - Duplicate a pre-built topic suggestion, such as a topic from ITSM Virtual Agent Conversations (available from the ServiceNow Store).
   - [NLU only] Add an intent to your model and a new empty topic. You must provide the flow for the new topic in Virtual Agent Designer.

The Topic Recommendations app requires NLU Workbench and ITSM Virtual Agent Conversations from the ServiceNow Store. The Yokohama release of Topic Recommendations supports only ITSM Virtual Agent recommendations. Although Topic Recommendations uses

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

NLU Workbench for machine learning purposes, it does not require that NLU be enabled in Virtual Agent.

For information about the apps that are automatically installed with Topic Recommendations, see Update Topic Recommendations.

Required plugins

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Topic Recommendations requires the following plugins and ServiceNow Store applications. Ensure that they are activated before you install Topic Recommendations.

Required ServiceNow plugins

Glide Virtual Agent (com.glide.cs.chatbot)

Activates all the plugins needed to run Virtual Agent Pro. For details, see Activate Virtual Agent.

> **Note:**
> Starting with the San Diego release, the Topic Recommendations app is automatically installed when you initially activate the Glide Virtual Agent plugin (com.glide.cs.chatbot). Subsequent updates for this app must be installed from the ServiceNow Store.

NLU Workbench (NLU topic discovery only)

Activates the plugins needed to run Natural Language Understanding in your instance. For more information, see Activate the NLU Workbench.

Required ServiceNow Store applications

Intent Discovery (NLU discovery only)

Identifies user intents from analyzing incident/case data. To learn more, see Intent Discovery.

ITSM Virtual Agent Conversations

Provides pre-built IT service management conversations to help your organization quickly deploy automated self-service conversations. For more information, see ITSM Virtual Agent.

Items installed with Topic Recommendations

The following items are installed with Topic Recommendations:

- Scheduled jobs: *`Run Topic Recommendation Reports`* for running Topic Recommendation reports at scheduled times.
- The following tables are installed:

Table	Description
Default settings for Topic Recommendations [sn_topic_recommend_default_setting]	The source data (table and text field), taxonomy, and filters used when running a Topic Recommendations analysis

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
Installed recommended topics [sn_topic_recommend_topic_staging]	Topics generated for recommended topics

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

What to do

- Get started with Topic Recommendations
- Define default recommendation settings
- Run a Topic Recommendation analysis
- Add recommended topics and intents to Virtual Agent
- Link a topic recommendation to an existing Virtual Agent topic
- Unlink a topic recommendation from an existing Virtual Agent topic
- Troubleshoot issues with Topic Recommendations

Update Topic Recommendations

You can install updates to the Topic Recommendations application (com.snc.va_topic_recommender) if you have the admin role.

Before you begin

Starting with the Tokyo release, the Topic Recommendations store app is automatically installed with Virtual Agent. When using Topic Recommendations, the app checks the ServiceNow Store and notifies you when an update is available.

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.
   If an update is available, a notification displays on the Topic Recommendations page.



2. Select **View update**.

   Note:
   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

3. Follow the instructions on the ServiceNow Store website to request an update for Topic Recommendations on your instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Quick start for Topic Recommendations

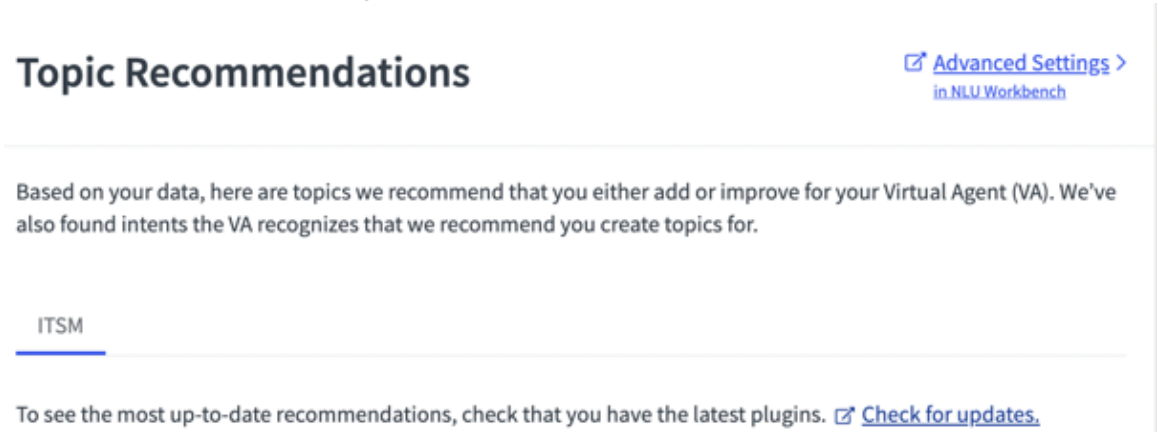
To get recommended topics based on your data, configure analysis reports, run the reports, and then review the results. You can either add new topics to Virtual Agent or link a recommendation to an existing topic.

The Topic Recommendations page appears in your instance at **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.

Step 1: Configure analysis reports based on ServiceNow data

Until you define analysis reports, the Topic Recommendations page is empty.

Topic Recommendations page with no reports defined



Each analysis report is based on the following:

- Data source: The ServiceNow data that you want to analyze. The options are: Incident [incident] table, Request [sc_request] table, Live Agent chat transcripts, and Virtual Agent fallback utterances.
- The field to analyze: A selected field (with a string data type) in the data source table to analyze. For example, the **Short description** field.
- Taxonomy: The business application that includes the data sets. When you install ITSM Virtual Agent Conversations, the Incident and Request data sets are installed by default. As additional data sets for applications become available, the data sets are displayed as a taxonomy on the page after they're installed on an instance.

You can also add conditions to your analysis reports and configure them to run on a schedule. When new recommendations are available, a notification appears in the Virtual Agent Designer Topics page.

Configure analysis reports for Topic Recommendations in Virtual Agent settings. For details, see Configure analysis reports for Topic Recommendations.

Step 2: Run an analysis report

Run all configured analysis reports together or selectively run one at a time from the Topic Recommendations page.

During analysis, the Topic Recommendations app does the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Uses Intent Discovery to review your data source, comparing your data source against the related taxonomy for your business application. Intent Discovery matches the data field specified in your data set to intents in the taxonomy.
- Maps the matched intents to pre-built topics in Virtual Agent. If intents don't have associated pre-built topics, the app recommends them as new topics that you can build because they were requested frequently enough by your users.
- Displays the analysis results as topic cards in the Topic Recommendations page.

For more information, see Run a Topic Recommendation analysis.

Step 3: Review report results and add or link topics and intents

Results are sorted into the following groups:

- Topics that Virtual Agent can handle: Recommendations in this group can be addressed with a pre-built topic.

  When you add this type of recommendation to Virtual Agent, the matched pre-built topic is duplicated in your instance. You can then modify, test, and publish the added topic using Virtual Agent Designer.

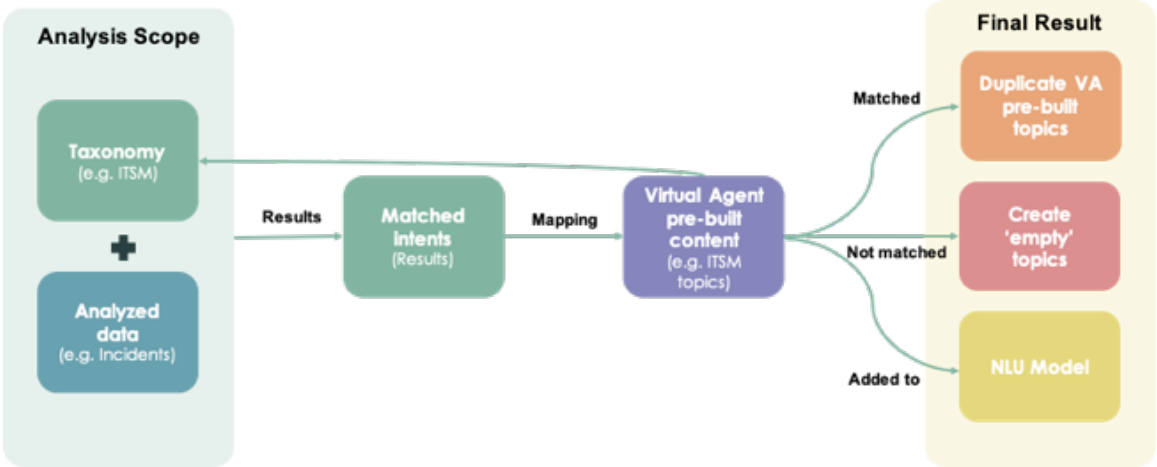
- User intents that need topic flows: Recommendations in this group match a ServiceNow NLU intent.

  When you add this type of recommendation to Virtual Agent, an empty topic is created and mapped to the matched intent in the model that you specify. You can then open the topic in Virtual Agent Designer and create a flow for the new topic.

The results are displayed in descending order of matches to your data source. The top 20 intent matches are displayed. If there are more than 20 intents, you can view them in NLU Workbench.

For more information about adding a recommendation to Virtual Agent, see Add recommended topics and intents to Virtual Agent. You can also link a recommendation to an existing topic.

Mapping recommendations to Virtual Agent topics



Configure analysis reports for Topic Recommendations

To generate Topic Recommendations, specify a default data source (ServiceNow table and field) and the conditions for filtering the data records.

Before you begin
Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

When configuring analysis reports, consider the following:

- You can define only one setting per data table and taxonomy pair.
- Two data sets for the ITSM taxonomy (Incident and Requests) are provided by default, but you can define your own data sources.
- In the Yokohama release, Topic Recommendations requires a minimum of 10,000 records in your analysis scope (data source). This minimum provides a reasonably sized data set to achieve a certain level of quality in the analyses.
- Keep your analysis scope (data source) under 300,000 records. In the Yokohama release, this is the maximum number allowed. This limit maximizes the performance of the analysis report.
- You can schedule analysis reports to run automatically at specified intervals.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Virtual Agent**.
3. Under Topic Recommendations, click **View all**.
4. Select **New**.
5. On the form, fill in the fields.
   For details, see Topic Recommendations settings.
6. Select **Save**.

Result

The data source that you defined for a given table and taxonomy displays as a section on the Topic Recommendations page. You can now run a topic recommendation analysis.

Run a Topic Recommendation analysis

Generate a report that analyzes a given data source and identifies the appropriate Virtual Agent pre-built topics that you can implement. For intents that do not have matching pre-built topics, the report identifies the user intents (topics) that you can create.

Before you begin

Verify that the appropriate Virtual Agent conversation plugins are activated so that the Topic Recommendations app can identify the appropriate pre-built topics.

You can use the **Check for updates** link on the Topic Recommendations page to check which plugins are installed.

Make sure you configure analysis reports first.

Role required: virtual_agent_admin or admin

About this task

The analysis process takes about 15 minutes or less to return recommendation results. In the Yokohama release, Topic Recommendations requires a minimum of 10,000 records in the data source and will only process a maximum of 300,000 records. Use filters in the settings page to reduce the number of records in the data source, if needed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.
2. In the Topic Recommendations page, go to the data source to be analyzed and trigger the analysis.
   - If the view is set to **All**, do the following:
     a. Select **Get new recommendations**.
     b. In the dialog box, select the sources you want to get reports for.

        If a check box is unavailable, a report may already be running, or the amount of data to analyze might be outside of the minimum or maximum allowed.

     c. Select **Get new recommendations**.
   - If the view is set to **By Source**, do the following:
     a. Select **Run analysis** or **Refresh** in the source status bar.
     b. Modify any settings in the dialog box, and then select **Get recommendations**.

   A message indicates that the topic-finding process has started and the approximate time for recommendation results. The page or status bar displays `Analysis in progress`. You can review other items while the analysis runs.

   Note:
   Changing the settings here affects only this analysis. The default settings for the recommendation are preserved. To change the default settings, see Configure analysis reports for Topic Recommendations.

3. When the report completes, review the analysis results for the data set.
   The results display as cards in two sections: **Topics that VA can handle** for pre-built topics and **User intents that need topic flows** for intents and corresponding topics that can be created.

   Tip:
   To view details about a pre-built topic or user intent, select the card, and then select the Info icon to open an overlay card. For more information, see Topic Recommendations cards.

What to do next

You can add a Topic Recommendation as a new topic or link it to an existing topic. You can also hide a recommendation from the list in aggregate view.

Add recommended topics and intents to Virtual Agent

After you run and review a Topic Recommendations report, select the pre-built topics and suggested intents to add to Virtual Agent.

Before you begin

Role required: virtual_agent_admin or admin

About this task

When you add a recommended topic to Virtual Agent, the Topic Recommendations app automatically does the following:

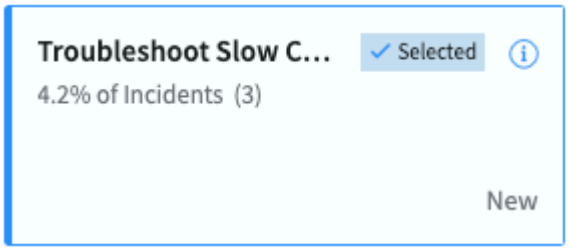
- Duplicates the pre-built topics that you selected.
- Creates empty topics for the intents you selected.
- If you're using ServiceNow NLU:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Creates a new NLU model if it doesn't exist.
- Updates and trains the NLU model with the added intents.

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.
2. Go to the analysis results for your data source.
3. Select one or more topic and intent cards to be added to Virtual Agent, and then select **Add to VA**.
   Selected cards are highlighted in blue and display as **Selected**, as shown in the following example.



4. If you're using ServiceNow NLU, select one of the following options in the **Model** list:
   - **Create new model**

     Select this option to create a new model group. If other languages are enabled for your instance, select the languages to add as secondary models in the group. Select **make primary** for the primary language in the group.

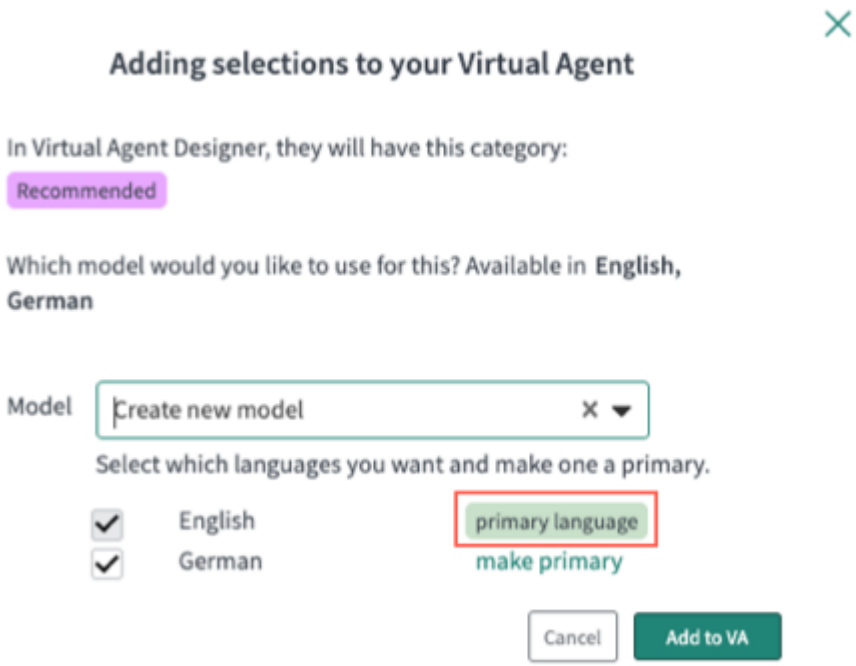     Adding selected recommendations to a new model group




     For more information about model groups, see Multilingual model management.

   - An existing model name

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If other languages are enabled for your instance, select the languages to add as secondary models in the group.

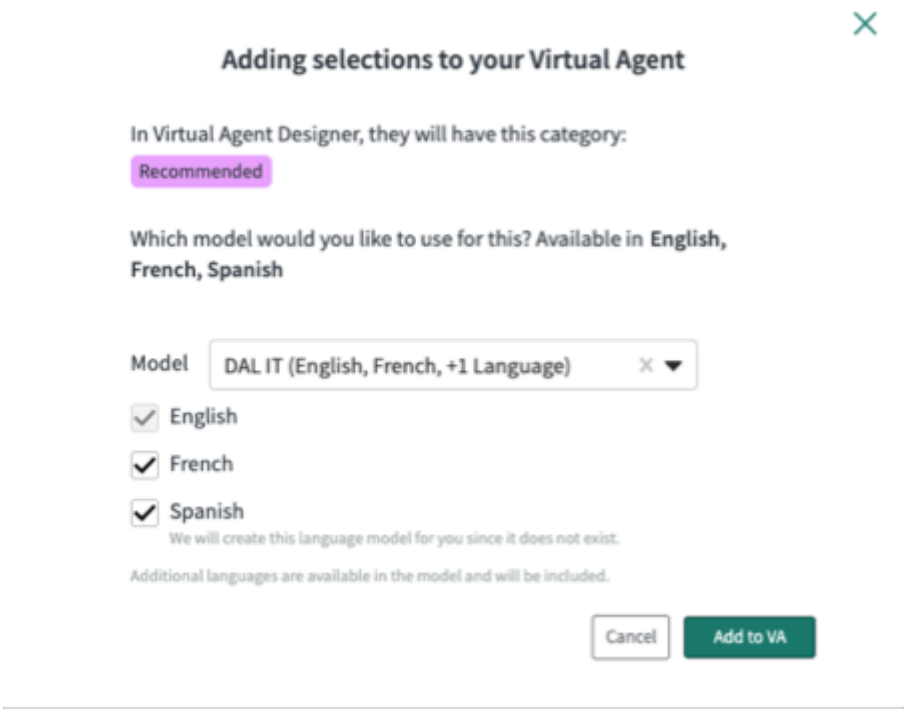Adding selected recommendations to an existing model group



5. Select **Add to VA**.

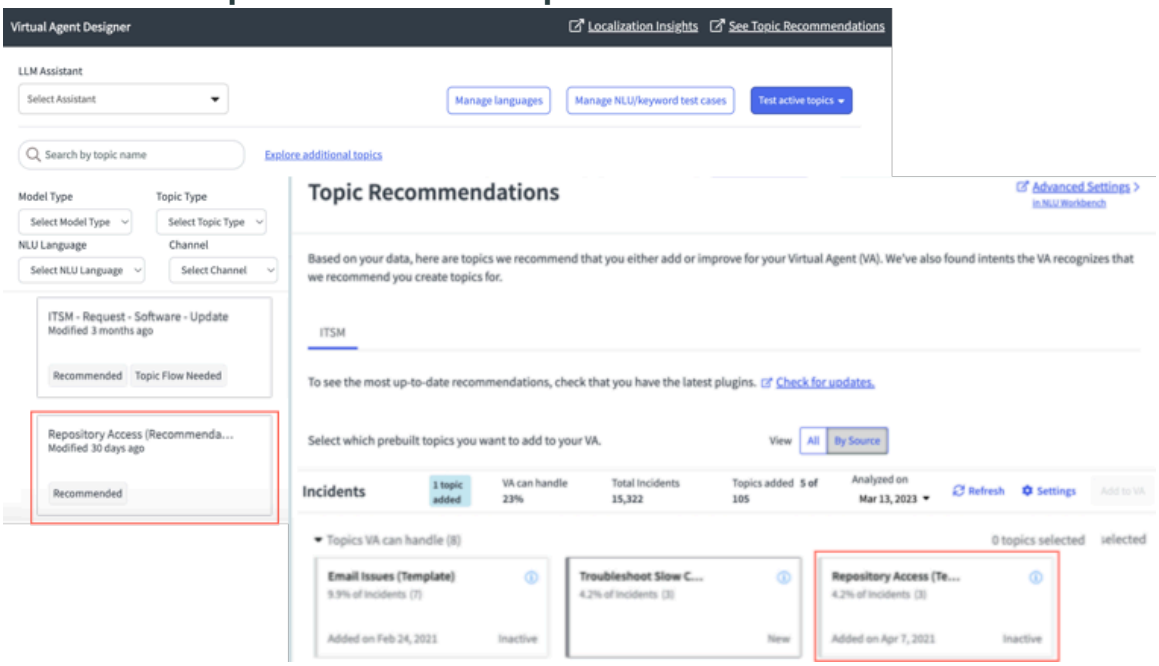
Result

For recommended pre-built topics, Virtual Agent duplicates the topic (but removes the *Template* portion of the file name). For recommended intents, Virtual Agent creates a new topic mapped to the intent. These topics are added to the **Recommended** category in the Virtual Agent Designer Topics page.

In the Topic recommendations page, the topic card shows the date it was added and its status (**Active** or **Inactive**). To open the new topic from the Topic Recommendations page, select the info icon to open the overlay card. Select the open link icon to open the topic in Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Recommended topic cards for an added topic



Link a topic recommendation to an existing Virtual Agent topic

Instead of creating a new topic from a topic recommendation, you can link it to an existing topic. This lets Virtual Agent know that you have a topic that addresses the recommendation.

Before you begin

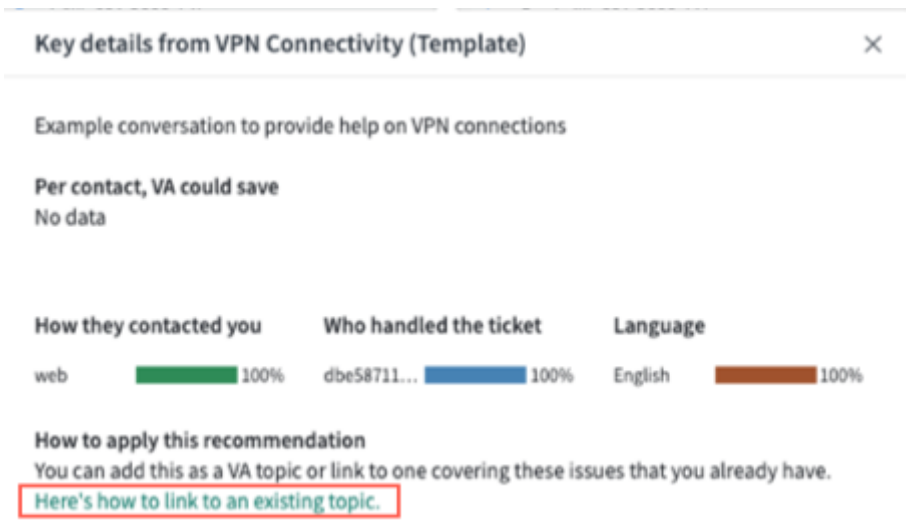
Role required: virtual_agent_admin or admin

About this task

If you continue to get recommendations for an active topic after linking it, the topic probably needs improvement.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.
2. Select the info icon ⓘ to open the overlay card for a topic that has a **New** status.
3. At the bottom of the overlay card, select **Here's how to link to an existing topic**.
   Select the link as shown in the following example.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. In the dialog box, select a topic in the **Find topic to link** list.
5. Select **Link topic**.

Result
The overlay card shows that the recommendation is linked, as well as the date this occurred.

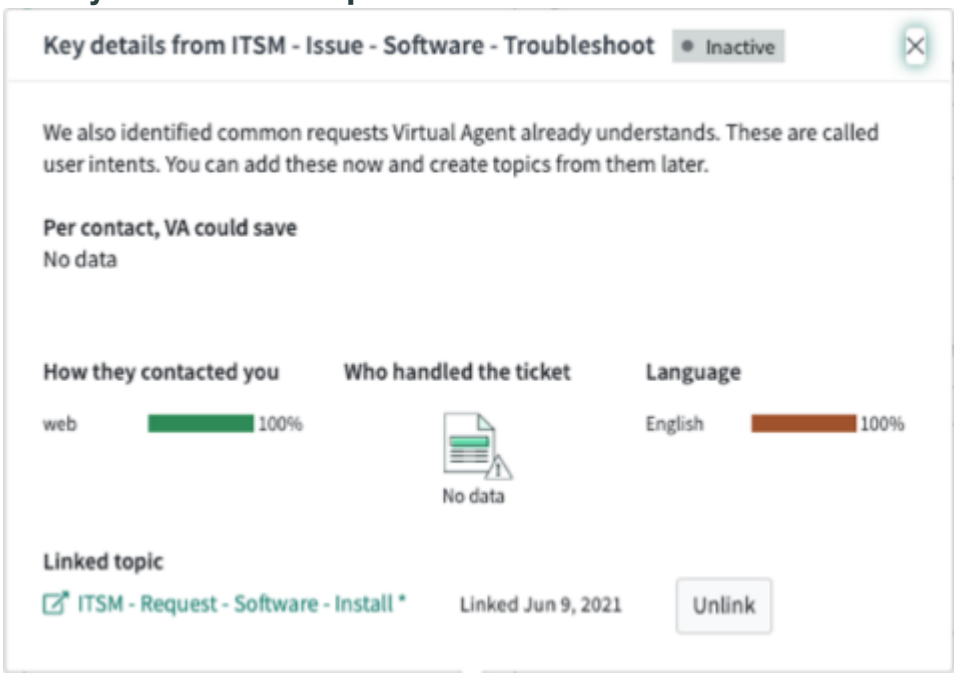Overlay card for a linked topic



If a topic recommendation continues to appear in your analysis results after you linked it to a topic, you may want to revisit the topic to improve its effectiveness.

You can also unlink a topic recommendation from a Virtual Agent topic.

Unlink a topic recommendation from a Virtual Agent topic

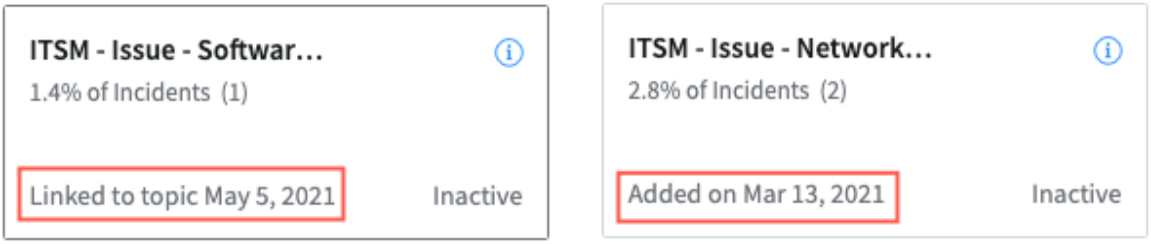
You can unlink a topic recommendation from a topic. This lets you link it to a new or alternate topic.

Before you begin
Role required: virtual_agent_admin or admin

About this task
You can either add a recommendation as a new topic or link it to an existing topic. If you link it to an existing topic, you can always unlink it later if you need to. Added topic recommendations create an empty topic that you provide with a workflow, so you can't unlink them using this method.
The following example shows the difference between a linked recommendation and an added recommendation.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of linked and added cards in the Topic Recommendations page



Procedure

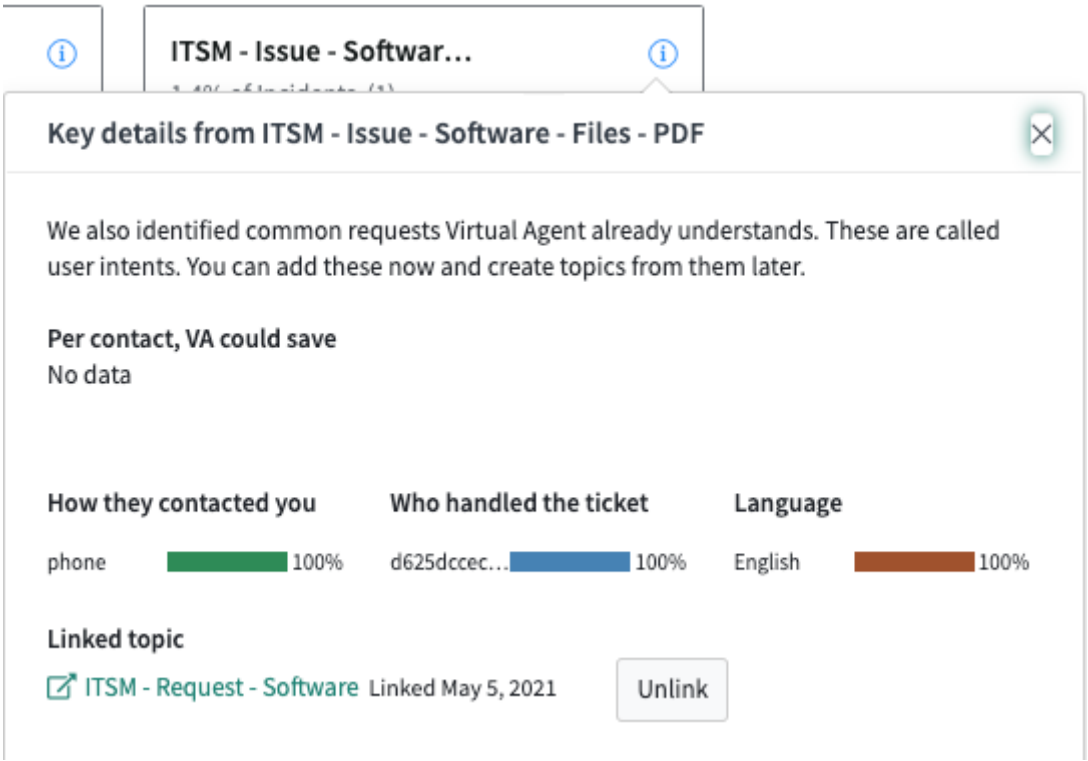1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.
2. Select the info icon to open the overlay card for a linked topic.



3. Select **Unlink**.

Result

Unlinked recommendations are set to **New** status. You can link it to another topic, or add it to Virtual Agent as a new topic.

Note:
If you added a topic to Virtual Agent for a recommendation, it is not shown as linked, so you can't unlink it. To reset an added recommendation as **New**, delete the topic that was added in Virtual Agent Designer.

Hide a topic recommendation

You can choose to ignore a topic recommendation by hiding it. Doing so hides it for everyone on the instance. You can still view hidden recommendations and show it again later.

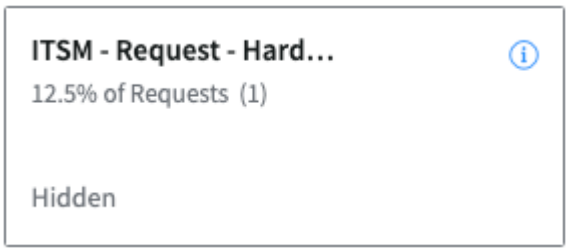
Before you begin

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Topic recommendations are hidden only when **View** is set to **All** (aggregate view). Hidden recommendation cards will still display when **View** is set to **By Source**. The status on the card is **Hidden**.




Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Topic Recommendations**.
2. Select the info icon to open the overlay card for a topic that has a New status.
3. Select **Hide**.

Result

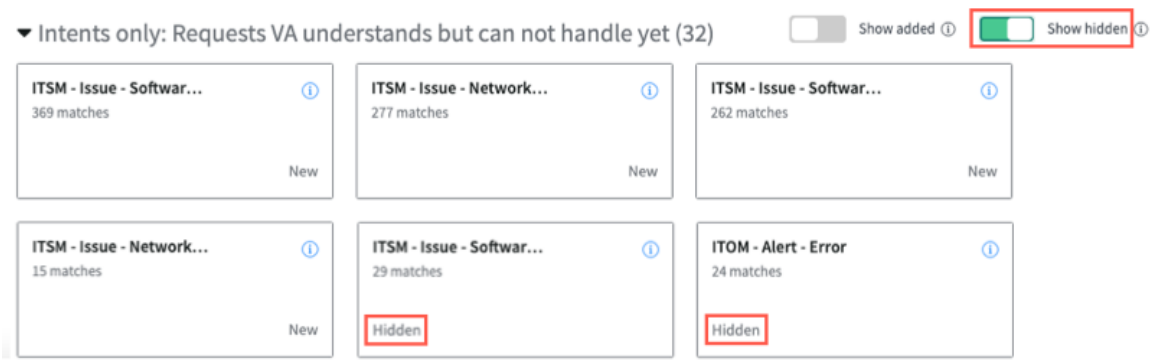The recommendation is hidden from the list. To view hidden recommendations, slide the **Show hidden** toggle switch to enable it.



To return a recommendation's status to New, select the info icon to open the overlay card for the topic, and then select **Don't hide**.

Troubleshoot issues with Topic Recommendations

Investigate and resolve unexpected behavior with Topic Recommendations, or find answers to common questions.

For information about using Topic Recommendations, see Quick start for Topic Recommendations.

Note:
Topic Recommendations tries to train the model when you add new topics to Virtual Agent. If an error occurs during training, the topic is still added, but the model remains in a draft state.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issue	Solution
Topic Recommendations page is blank	No analysis reports have been configured. Configure an analysis report. You can also install or activate ITSM Virtual Agent Conversations, which will add default configurations to Topic Recommendations. For more information, see Set up ITSM Virtual Agent.
Error when adding topics to Virtual Agent	Check the error log for details: 1. Navigate to **All** > **System Logs** > **System Log** > **Errors**. 2. Find the entry that has a value of **sn_topic_recommend** in the Source column. The Message field displays the error. **Note:** If model training fails while adding topics, Topic Recommendations will ignore those errors and continue to add your recommendations. In this case, you will be notified that the models are in draft state.
Reports have intent matches, but no pre-built topic matches	Make sure ITSM Virtual Agent Conversations is installed and activated for the instance. If the app is installed, then none of the pre-built topics address the issues found in your reports. For more information, see Set up ITSM Virtual Agent.
Analysis reports are not available in production instances	This is the expected behavior. Analysis reports and Intent Discovery are designed to live in one instance only. Added topics and NLU models are made available in a "new" instance, but the Topic Recommendations reports do not move between instances.
Analysis report is stuck and says "Analysis in progress"	Check the status in the Discovery Report Definitions table: 1. Navigate to **All** > **sn_nlu_discovery_report_definition.list**. 2. Sort the table on the Created column, and then find the name of the affected analysis definition. 3. If the Status column is empty, the analysis failed. Try running it again. You can also navigate to **NLU Workbench** > **Intent Discovery** to see if something went wrong in the intent discovery process. For more information, see Intent Discovery.
Adding new topics takes longer than expected	Try the following: • Navigate to **All** > **sn_topic_recommend_topic_staging.list** and view the Status column to see what stage topic generation is in. Training models can take some time. • Navigate to **All** > **System Logs** > **Events** to see which event ran last or if the event is queued.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issue	Solution
	• If the reason for failure is not clear, navigate to **All** > **sn_topic_recommend_topic_staging.list** and change the value of the Status field to `Error`. You can then try to add the recommendation again.
Can't generate a report with less than 10,000 or more than 300,000 records	Topic Recommendations currently supports a minimum of 10,000 records and a maximum of 300,000 records. This is done for performance and to ensure a statistically significant data set.
Model is not preselected in the app	If you are upgrading from Quebec and this is your use of the Topic Recommendations app, you must select a model. Once you select a model, Topic Recommendations preserves the selection.
Unmigrated model support	While you are encouraged to migrate your models to groups, Topic Recommendations does not require models to be grouped.
Unlinked topics	You don't have to link all recommendations. Topic linking is a way to "acknowledge" a recommendation if you have an existing topic.
The **Topics/ Requests VA Can Handle** tab is not displayed	System property `glide.ui.escape_all_script` is not set to True. Navigate to **ALL > sys_properties.list** (or **ALL sys_properties_list.do**). Search for and select `glide.ui.escape_all_script`, then set its Value to **True**.

Topic Recommendations interface reference

The Topic Recommendations app provides two main pages: a configuration page and the Topic Recommendations page, where you find any recommended topics.

For more information about the Topic Recommendations user interface, see the following topics:

- Topic Recommendations settings
- Topic Recommendations page
- Topic Recommendations cards

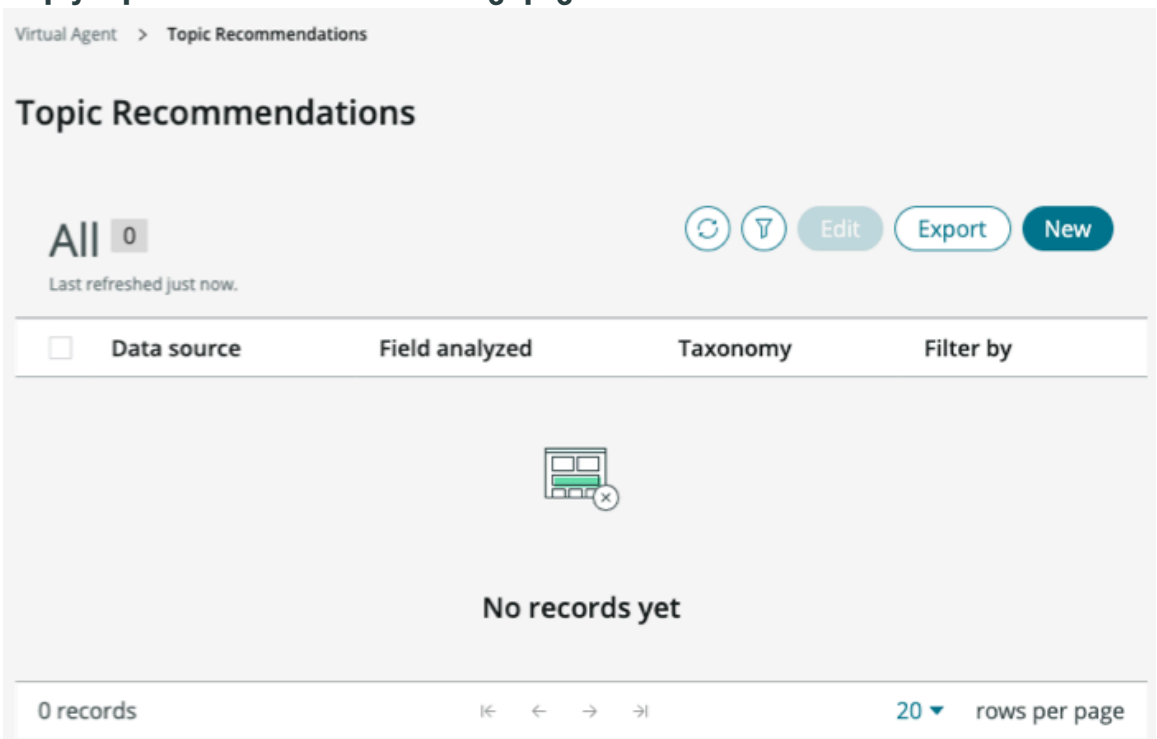
Topic Recommendations settings

Use the Topic Recommendations settings page to configure analysis reports based on your ServiceNow® data.

You can find the Topic Recommendations settings in the Conversational Interfaces Chat Settings (**All** > **Conversational Interfaces** > **Settings**) under Virtual Agent. When you first install Topic Recommendations, nothing is configured, so the settings page appears empty.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Empty Topic Recommendations settings page



Once configured, you can view or edit analysis reports on this page.

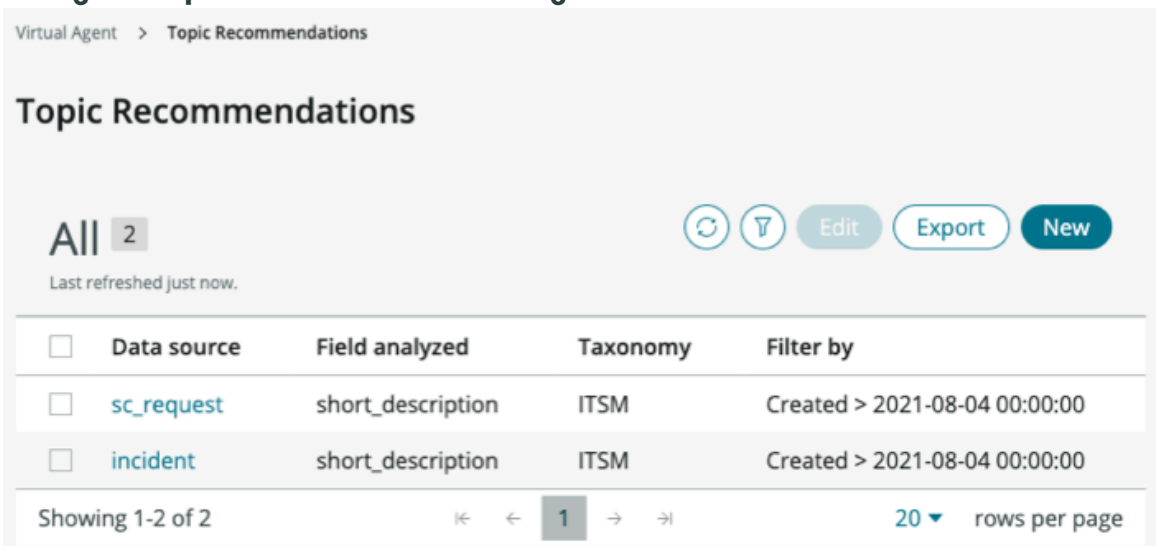Configured Topic Recommendations settings



Topic Recommendations analysis settings

When you create or edit a Topic Recommendations analysis record, specify the information in the following form.

Default settings for Topic Recommendations

Field	Description
Data source	ServiceNow table that contains the data to be analyzed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default settings for Topic Recommendations (continued)

Field	Description
Field analyzed	Field (string column) in the table to be analyzed. For example, the **Short description** in the Incident table.
Taxonomy	Comprehensive list of intents for a specific business application, such as ITSM.
Filter by	Condition builder for filtering the records to be analyzed. Click **Set conditions** to open the condition builder. The default filter is **[Created] [after] [Last 90 days]**.
Frequency	The schedule for running the analysis, which is triggered through the Run Topic Recommendation Reports scheduled job: • None • Every Month • Every 3 Months • Every 6 Months • Every 12 Months **Note:** If you're using a non-production instance for testing, set the analysis schedule in your production instance so that it and your analysis history are retained. The intent discovery process works best in a single instance, where data is not promoted between instances.

Related topics

Configure analysis reports for Topic Recommendations

Topic Recommendations page

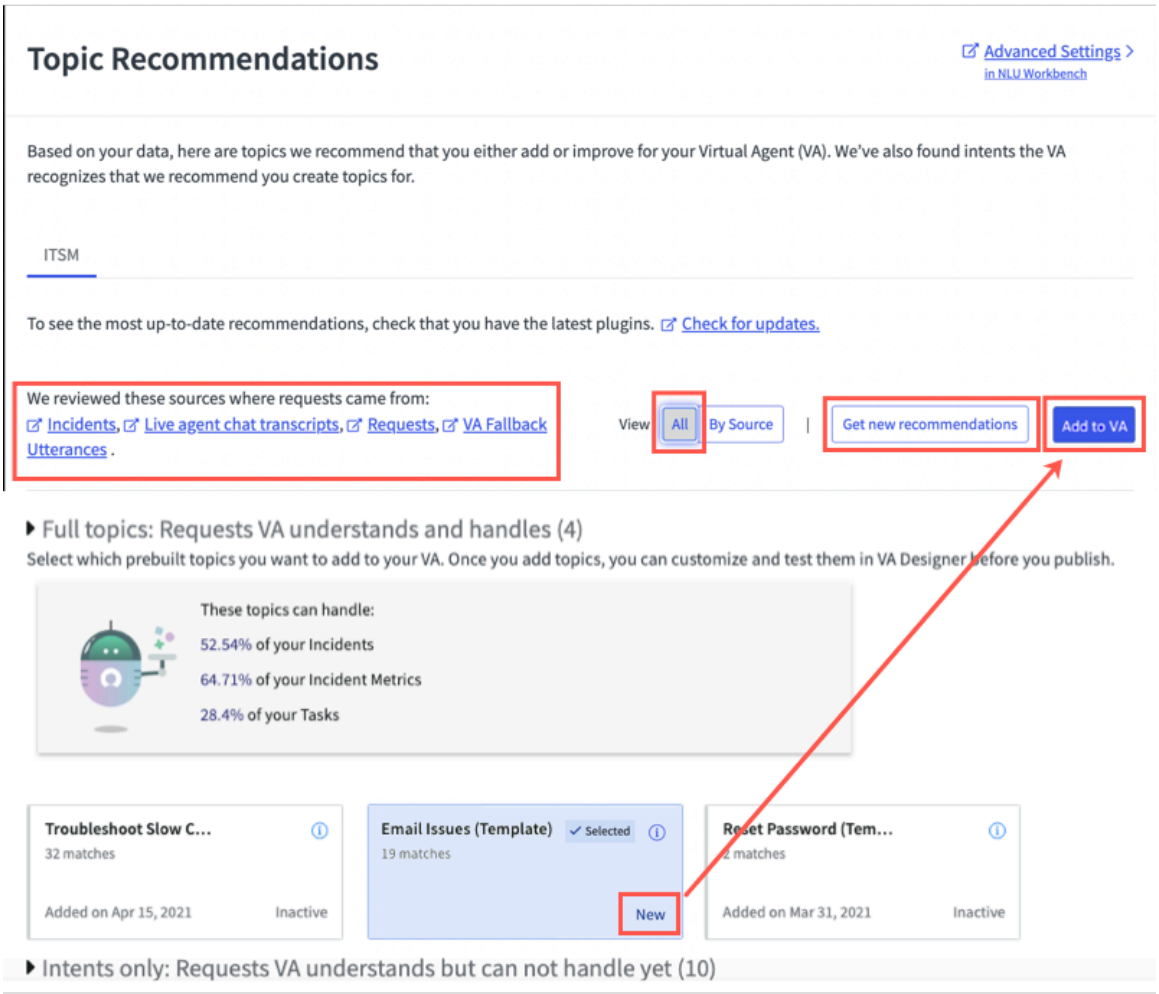
Use the Topic Recommendations page to run analysis reports, view recommendations, add topics to Virtual Agent, or link a recommendation to an existing topic.

View all recommendations (aggregate view)

Topic Recommendations shows all results in this view by default. This view allows you to run or refresh analysis reports for all configured sources at one time. The configured sources for the recommendations are listed as hyperlinks. Click the link to open the settings for the report. If a recommendation has a New status, you can select it, and then click **Add to VA**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default (aggregate) view




View recommendations by source

You can view topic recommendations by their data source. This lets you run a new analysis or refresh an existing analysis for a single data source, rather than running all of them at once. Click **Settings** to view the report's settings. If a recommendation has a New status, you can select it, and then click **Add to VA**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

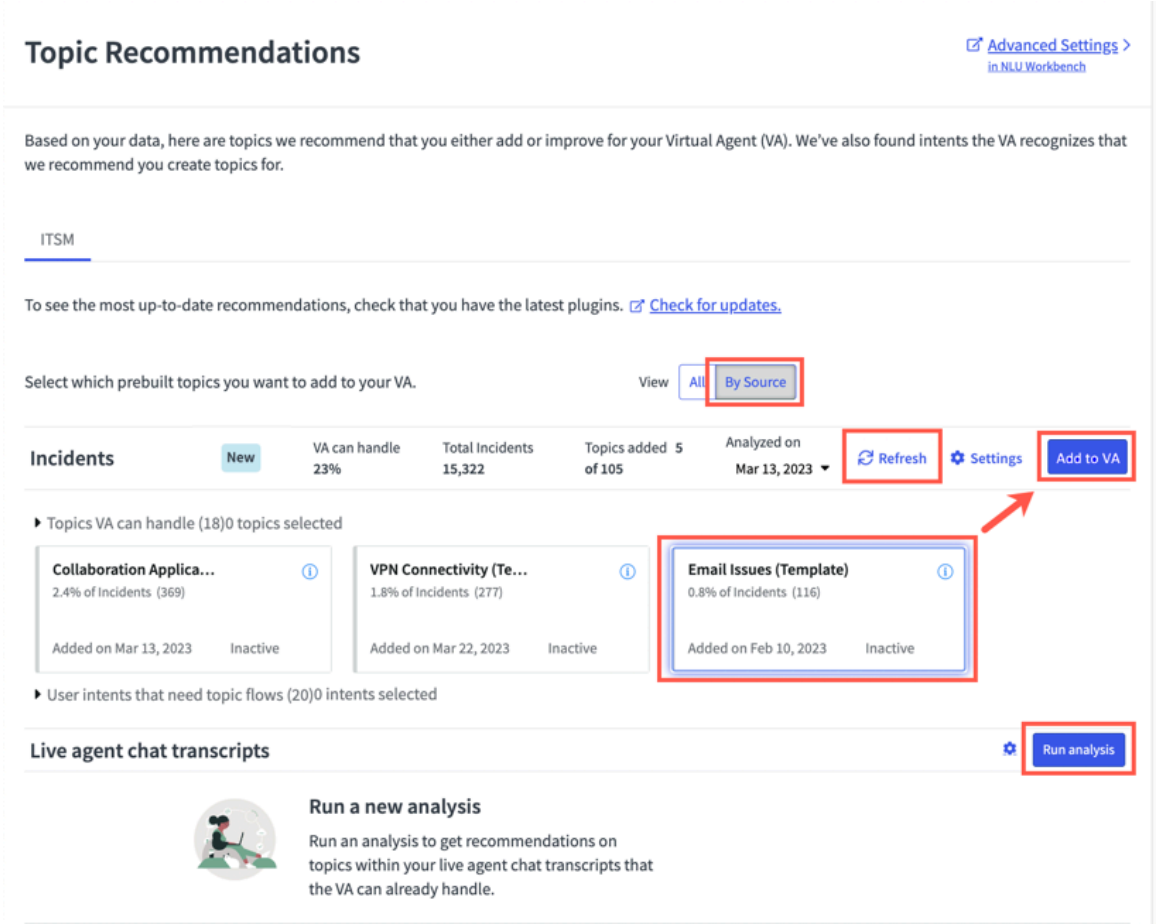Topic Recommendations page in source view




Topic Recommendations cards

Recommended topic and intent cards display the status of the recommendation, allowing you to track them more easily over time.

Card status

Topic and intent recommendations appear as cards. The status lets you know what action has been taken, if any, for each recommendation.

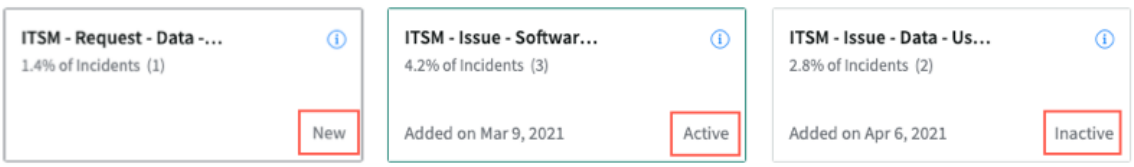Example intent recommendation cards



Topic and intent card statuses

Status	Description
New	Topic or intent has never been added to Virtual Agent. Cards with **New** status have a dark gray border.
Active	Topic or intent was added to Virtual Agent or linked to an existing topic and published. Cards with **Active** status have a green border.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic and intent card statuses (continued)

Status	Description
	If you keep getting recommendations for an Active topic, it probably needs improvement.
Inactive	Topic or intent was added to Virtual Agent but never published, or it was linked to an existing, unpublished topic. Cards with **Inactive** status have a light gray border. If you keep getting recommendations for an Inactive topic, take steps to publish it and make it active.
Hidden	Topic or intent was not added to Virtual Agent, but it was marked as hidden from the aggregate view and has a status of **Hidden**.

Overlay cards

To get more details about a pre-built topic or user intent, select the recommendation card, and then click the info icon to open an overlay card.


The overlay card includes a description of the pre-built topic or user intent and the following information, which can provide insight into why the topic or intent was recommended.

Label	Description
Per contact, VA could save	How long it takes for Virtual Agent to resolve an intent (displayed in minutes).
How they contacted you	The way in which users engaged with support. For example, **phone** or **email**.
Who handled the ticket	The assignment group.
Language	The languages of users interacting with support for this issue.
Topic completion	Graph that shows a snapshot of topic completion over a window of time. This information displays for active topics only.
Status area	
This section displays one of the following statuses.	
How to apply this recommendation	Suggestions for an unused recommendation. You can do one of the following: • Select the card, and then click **Add to VA** to create a new topic. • Link the recommendation to an existing topic.
Added topic recommendation	Displays the name of the topic that was added for the recommendation, as well as the date when it was added. Click the open link icon to view the topic in Virtual Agent Designer.
Linked topic	Displays the name of the topic that was linked, as well as the date when the recommendation was linked.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Label	Description
	Click the open link icon to view the associated topic in Virtual Agent Designer. You can also unlink the topic from the recommendation.

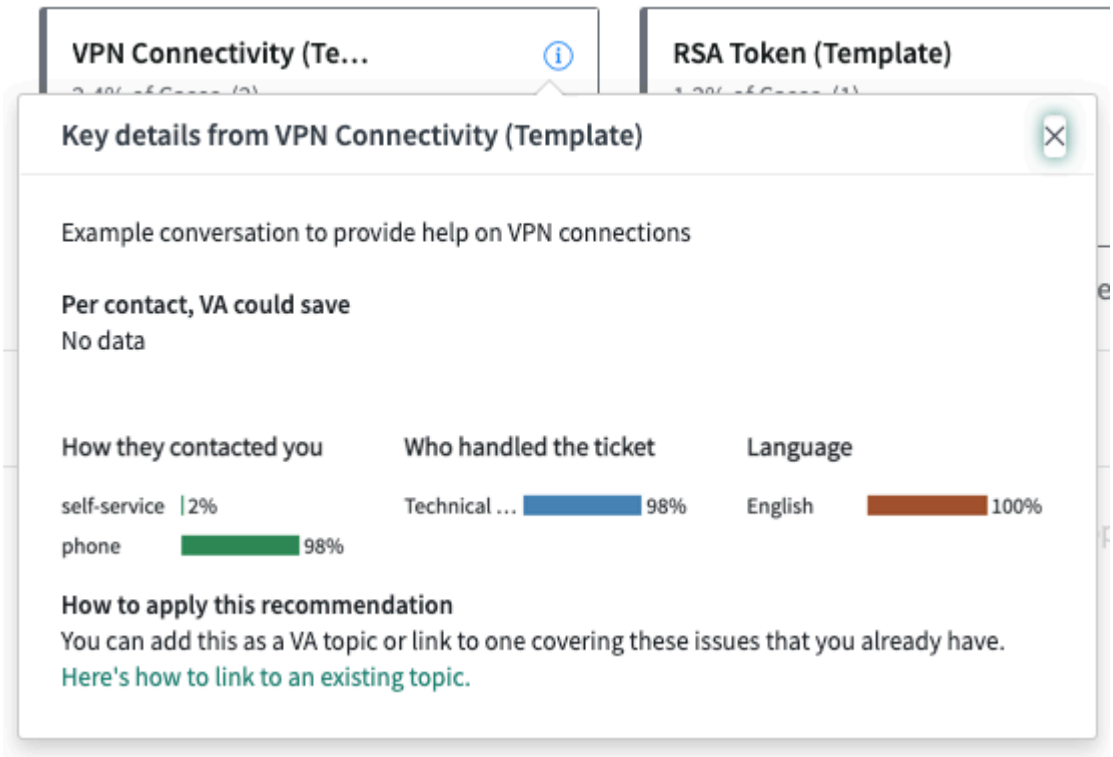Example overlay card



Using Issue Auto Resolution

You can proactively deflect issues and expedite the resolution process for your agent and user with the Issue Auto Resolution (IAR) application. Through machine learning and Natural Language Understanding (NLU), users get immediate self-service and can access Virtual Agent topics, Knowledge articles, and catalog items.

How Issue Auto Resolution works

When a user creates an issue, the Issue Auto Resolution application uses machine learning and NLU to identify the criticality of the issue, the intent, and an appropriate Virtual Agent topic for an automatic resolution. If a Virtual Agent topic isn't found, Issue Auto Resolution does an AI Search to return the most appropriate Knowledge articles, FAQs, or catalog content. The deflection content is then delivered to the user through the configured response channel, such as email, short messaging service (SMS), or Virtual Agent.

Issue Auto Resolution Admin Console

As an administrator, you use the IAR Admin Console to set up the Issue Auto Resolution application, review how configurations may perform based on historical data (simulations), and track performance. You can also see the total cases processed, the solutions identified by the Issue Auto Resolution application, and the cases closed by the user.

To view the IAR Admin Console, navigate to **All> Issue Auto Resolution> Overview**. The Overview page contains an FAQ section that provides tips for how certain features work. You can also find a section where you can upgrade your IAR.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issue Auto Resolution with custom NLU models

For information about using a custom NLU model and intents with Issue Auto Resolution, see the following post in ServiceNow Community: https://www.servicenow.com/community/virtual-agent-nlu-articles/how-to-configure-custom-intents-for-issue-auto-resolution-iar/ta-p/2638545.

Issue Auto Resolution agentic workflows

To learn more about the agentic workflows for Issue Auto Resolution for ITSM and HR Service Delivery, see Issue Auto Resolution for ITSM Virtual Agent and Issue Auto Resolution for HR Service Delivery.

Configure and run an Issue Auto Resolution simulation

Use the incident data from your organization to run simulations from the matching intents that the Issue Auto Resolution application based its predictions on from the case descriptions.

Before you begin

Role required: virtual_agent_admin or admin

About this task

You can run multiple simulations for a Issue Auto Resolution (IAR) configuration. You can also do the following tasks:

- Cancel a simulation: Stop a simulation in progress.
- Refresh simulation status: Check the status of a simulation in progress.
- Delete a simulation: Delete a simulation configuration, but not while a simulation is running.

Procedure

1. Configure and configure an IAR simulation.

   a. Navigate to **All** > **Issue Auto Resolution** > **Simulations** > **.**.

   b. Select **New** or **Create new simulation** if you don't have an existing simulation.

   c. On the form, fill in the fields.

Create new simulation

Field	Description
Name	Name of the simulation configuration.
Auto Resolution configuration	Table that contains the records to be simulated. The default configuration is for incidents.
State	Simulation status: ▪ **Ready**: Simulation is ready to run. ▪ **Running**: Simulation is in progress. ▪ **Canceled**: Simulation stopped.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	▪ **Complete**: Simulation finished. ▪ **Error**: Simulation encountered a processing error, but continues the simulation for the next set of records.
Record set	Condition that identifies the records evaluated in the simulation. For example: **[Active] [is] [true]**. This condition is automatically filled in with the conditions that you specify in your incident configuration, but you can modify the conditions as needed. **Note:** Record sets that return a large number of records can take longer to simulate. To reduce the simulation time, consider changing the record set to return a smaller number of records. 50,000 is the maximum record limit for each simulation run.

d. Select **Save**.

2. After the new simulation is created, select **Run**.
   The simulation may take a bit more time depending on the number of records that you have. After a run is completed, you see the **Latest resolution potential** and other simulation results.
3. To specify a time and schedule to run the simulation instead of manually running one, select **Enable scheduled job**.
   You can run the simulation on a daily, weekly, or monthly basis at a specific time, in hours, minutes, and seconds. After you set up the schedule, select **Save**. To cancel your scheduled job, disable **Automatically run this simulation**. For each simulation run, the following information is displayed:

Simulation results

Field	Description
Start time	Date and time that the simulation started.
Completed time	Date and time that the simulation ended.
Progress	Percentage of the simulation performed.
Latest trained version	Version number of the machine learning model used for the simulation.
State	Status of the simulation: ○ Complete: Simulation completed its run. ○ Ready: Simulation is ready to run. ○ Running: Simulation is in progress. ○ Canceled: Simulation stopped.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	○ Complete: Simulation finished. ○ Error: Simulation encountered an error.
Total records	Total number of records evaluated in the simulation.
Resolution rate (%)	Percentage of cases that the simulation has predicted that match active intents with active topics.

4. View the simulation details of the individual run by selecting the link within **Runs > Start time**.

Run details

Field	Description
Resolution potential	Percentage of incidents that have active intents and are mapped to active topics.
Inactive topics	Virtual Agent topics currently mapped to intents that aren't active and not visible to users. Select an active topic by using the intent to topic map table in the IAR configuration, or go to Virtual Agent Designer to activate the topic.
Mapped intents: Active	Intent that was successfully predicted from the case description and is active in your intent to topic map table.
Mapped intents: Inactive	Predicted intents that are available but not active in your intent to topic map table.
No intents found	Description in the records didn't match any of the intents available.
Unmapped intents	Intent that was successfully predicted from the case description, but the intent itself hasn't been added to the intent to topic map table in the configuration. To increase the coverage for those incidents, add those additional intents to the table.

Issue Auto Resolution configuration settings

Learn about the different configuration settings that you can use for the Issue Auto Resolution (IAR) application. For example, you can see the status of your Issue Auto Resolution configurations and decide to turn off or edit each configuration setting to fit your organization's needs.

The following tables show the configuration settings that are available for Issue Auto Resolution

Note:

To modify your settings, navigate to **All > Issue Auto Resolution> Settings**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Task configuration

Specify the tables, defaults, and task templates while processing the task.

Setting	Definition
Table	Name of the table for the Issue Auto Resolution application to process.
Invocation type	Trigger for theIssue Auto Resolution application either through a business rule when the case is created or an API on demand.
Assign to	Assignee for the case that is being processed by the Issue Auto Resolution application.
Requester	User requesting assistance on the issue.
Task assignment template	Template that sets the fields and values when it's being assigned to the user.
Task resolution template	Template that sets the fields and values when the user indicates that the issue is resolved.
Task completion template	Template that sets the fields and values during the interim state while the matched topic conversation flow runs.
Unresolved task template	Template that sets the fields and values when the end user requests agent assistance.

Entry & exit criteria

Set the entry & exit criteria for issues processed through an IAR.

Setting	Definition
Entry conditions	Records that are processed for the Issue Auto Resolution application. Only the issues that match the entry condition are processed by the Issue Auto Resolution application.
Exit conditions	Condition where the Issue Auto Resolution application stops processing when the machine learning process is complete.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Machine learning model settings

Select the machine learning models to be used by IAR. Choose a training language that you want to use and train the model for intent identification when required. The machine learning model contains English, Spanish, French, German, Japanese, Dutch, Italian, and Portuguese. To configure new languages for a user, add the language(s) in **Training detailsTraining language***, then select* **Train***. For more accurate intent prediction, tune and publish your model before turning on IAR. See Issue Auto Resolution Tuning in NLU*

Setting	Definition
Training language	Language in which the training must be performed for the machine learning model.
Configuration languages	Overview of the machine learning models associated with the Issue Auto Resolution configuration.
Retrain frequency	Interval in which the machine model must be retrained with the training data.
Advanced	Advanced settings that you can enable.
Prediction fields	List of fields used as input for processing the issue.
Pre-processing extension	Server script to perform data cleanup or manipulation on the issue before it's processed by machine learning APIs. The pre-processing script is available only when your enable the Advanced setting.
Post-processing extension	Server script to perform additional actions on the results from machine learning APIs. The post-processing script is available only when you enable the Advanced setting.

AI Search settings

Setting	Definition
Apply AI Search	AI search results that are delivered if relevant Virtual Agent topics aren't found.
Search application	Detailed AI search settings, including the search source, number of search results to retrieve, and more.
Search results portal	Portal to be used in links while delivering recommendations to the users on any response channel.
AI Search display topic	Virtual Agent topic that performs AI search and presents the results.
EVAM definition	Definition of how search results from different data sources are displayed for the end users in cards and lists.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Intent to topic map settings

Enter your intent and topic map to configure your resolutions using "true" or "false". Hover over and select "true" or "false" to edit.

Setting	Definition
Intent to topic map	List of intents and their associated Virtual Agent topics. When an issue is identified, the corresponding topic is delivered to the user for automatic resolution.

AI Search settings

Setting	Definition
Apply AI Search	AI search results that are delivered if relevant Virtual Agent topics aren't found.
Search application	Detailed AI search settings, including the search source, number of search results to retrieve, and more.
Search results portal	Portal to be used in links when delivering recommendations to the users on any response channel.
AI Search display topic	Virtual Agent topic that performs AI search and presents the results.
EVAM definition	Definition of how search results from different data sources are displayed for the end users in cards and lists.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response channels settings

Admin users and users with the iar_admin role can configure where to deliver the resolutions, using Virtual Agent, Email, or SMS.

When at least one intent to topic map is active, the VA response channel is mandatory. When AI Search is enabled, one of the three response channels needs to be mandatory: email, SMS, or VA.

When VA is selected as a response channel, the user will also receive an additional comment on the portal prompting them to open VA to respond to the notification. Email templates have also been updated to show a preview of AI Search topics to give end users a better idea of the content itself in the email.

These are the pre-requisites for response channels.

- **To add Virtual Agent as a response channel, install Glide Virtual Agent and enable Virtual Agent on Service Portal. Notifications must be enabled on at least one active channel. Depending on your organization's needs, admin users can also install Conversational Integration with Microsoft Teams on Slack.**
- **To add email as a response channel, ensure email sending is enabled in Notifications. To learn more about setting up email notifications, see Outbound mail configuration.**
- **To add SMS as a response channel, install the Twilio Notify app and set up the Conversational SMS Integration with Twilio.**

Setting	Definition
Follow up sequence	Options on how to deliver the deflection content to your users: • **All**: Delivers the deflection content to the user on all available response channels. • **First match**: Delivers the deflection content on an active channel where the user is available, in the order defined by the response channels list.
Response channels	List of available response channels to send the user deflection content. When you set the **Follow up sequence** to **First match**, the response channel order determines the channel that is used to contact the user. You can adjust the order number to change the priority sequence. You must set up the email properties to set **Email** as an active channel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response channels settings

Admin users and users with the iar_admin role can configure where to deliver the resolutions, using Virtual Agent, Email, or SMS.

When at least one intent to topic map is active, the VA response channel is mandatory. When AI Search is enabled, one of the three response channels needs to be mandatory: email, SMS, or VA.

When VA is selected as a response channel, the user will also receive an additional comment on the portal prompting them to open VA to respond to the notification. Email templates have also been updated to show a preview of AI Search topics to give end users a better idea of the content itself in the email.

These are the pre-requisites for response channels.

- **To add Virtual Agent as a response channel, install Glide Virtual Agent and enable Virtual Agent on Service Portal. Notifications must be enabled on at least one active channel. Depending on your organization's needs, admin users can also install Conversational Integration with Microsoft Teams on Slack.**
- **To add email as a response channel, ensure email sending is enabled in Notifications. To learn more about setting up email notifications, see Outbound mail configuration.**
- **To add SMS as a response channel, install the Twilio Notify app and set up the Conversational SMS Integration with Twilio.**

(continued)

Setting	Definition
	The Glide Virtual Agent plugin is required, and Virtual Agent notifications must be enabled to set Chatbot as an active response channel. You must configure Twilio Notify to set SMS as an active response channel.
Initial recommendation email	Email template used to deliver the deflection content to users when the AI search recommendations are found.
Catalog submitted email	Email template used to notify users when a catalog item is submitted from recommendations made by the Issue Auto Resolution application.
Notify SMS phone	Twilio Notify phone number to be used to deliver SMS to users.
Initial recommendation SMS	SMS template used to deliver the deflection content to users when AI search recommendations are found.
Catalog submitted SMS	SMS template used to notify users when a catalog item is submitted from

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response channels settings

Admin users and users with the iar_admin role can configure where to deliver the resolutions, using Virtual Agent, Email, or SMS.

When at least one intent to topic map is active, the VA response channel is mandatory. When AI Search is enabled, one of the three response channels needs to be mandatory: email, SMS, or VA.

When VA is selected as a response channel, the user will also receive an additional comment on the portal prompting them to open VA to respond to the notification. Email templates have also been updated to show a preview of AI Search topics to give end users a better idea of the content itself in the email.

These are the pre-requisites for response channels.

- **To add Virtual Agent as a response channel, install Glide Virtual Agent and enable Virtual Agent on Service Portal. Notifications must be enabled on at least one active channel. Depending on your organization's needs, admin users can also install Conversational Integration with Microsoft Teams on Slack.**
- **To add email as a response channel, ensure email sending is enabled in Notifications. To learn more about setting up email notifications, see Outbound mail configuration.**
- **To add SMS as a response channel, install the Twilio Notify app and set up the Conversational SMS Integration with Twilio.**

(continued)

Setting	Definition
	recommendations made by the Issue Auto Resolution application.

SLA & reminders

You can select if you wish to use the SLA engine versus the Task SLA.

Setting	Definition
Use SLA engine	Task-based SLA engine that provides additional flexibility and functionality.
Auto resolution reminders	List of reminders and the Email and SMS templates used to deliver reminders. SLA percentage at which to send the reminder using the Email and SMS templates. To send automatic resolution reminders, you must set **Use SLA engine** to **true**. **Note:**

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

SLA & reminders

You can select if you wish to use the SLA engine versus the Task SLA.

(continued)

Setting	Definition
	The SMS Notification template is only available when the Notify app is installed.
Task SLA	Duration that an issue is assigned to the Issue Auto Resolution application before it's automatically reassigned to a live agent, if not yet resolved.

Review

Setting	Definition
Review	Opportunity to review your configuration before you select **Enable IAR**.

Issue Auto Resolution diagnostic chat

Admin users can initiate a chat conversation to troubleshoot the settings and functionality of Issue Auto Resolution if an issue arises that wasn't addressed as expected.

Enabling diagnostic chat

To enable the Issue Auto Resolution diagnostic tool, an admin user must set certain Restricted Caller access records to **Allowed** on the Restricted Caller Access Privileges table.

To identify the records to allow, follow these steps:

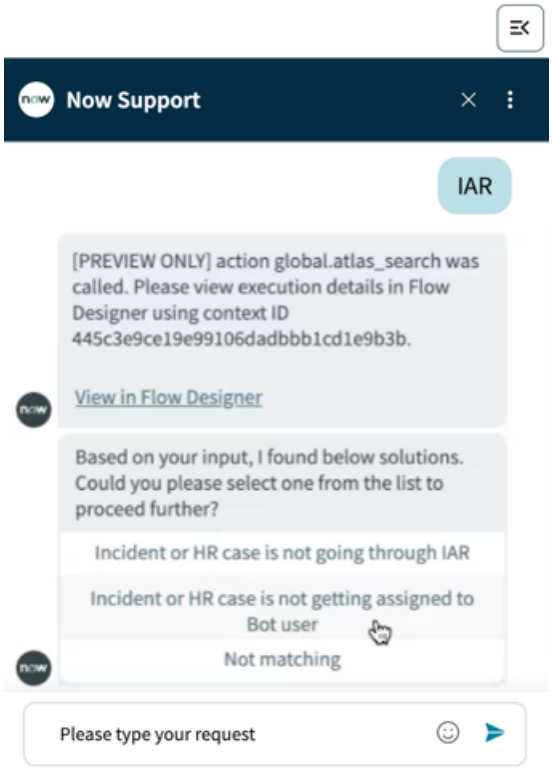
1. Navigate to **All** > **System Applications** > **Application Restricted Caller Access**.
2. Filter the records by `Source=76fec17dc0e1d5d0f877e9d0ea777a12` (Script Include: IARIssueNotAssignedDiagnostic).
3. Navigate to each record and change the status to **Allowed**.

Diagnostic conversation flows

The admin user enters `IAR` in the chat window to initiate a conversation about Issue Auto Resolution, and then selects one of two issues:


- An Incident or case isn't getting assigned to the Bot user.
- An Incident or case isn't going through Issue Auto Resolution.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Conversation flow: Incident or HR case is not getting assigned to bot user

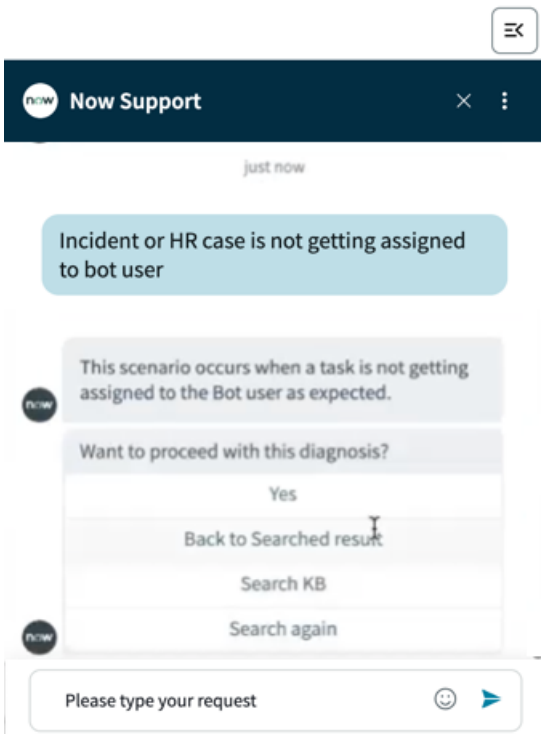1. Confirm your selection, return to search, or search KB articles.



2. Select the type of case or Incident with which you need help, or choose to search all Issue Auto Resolution configurations.

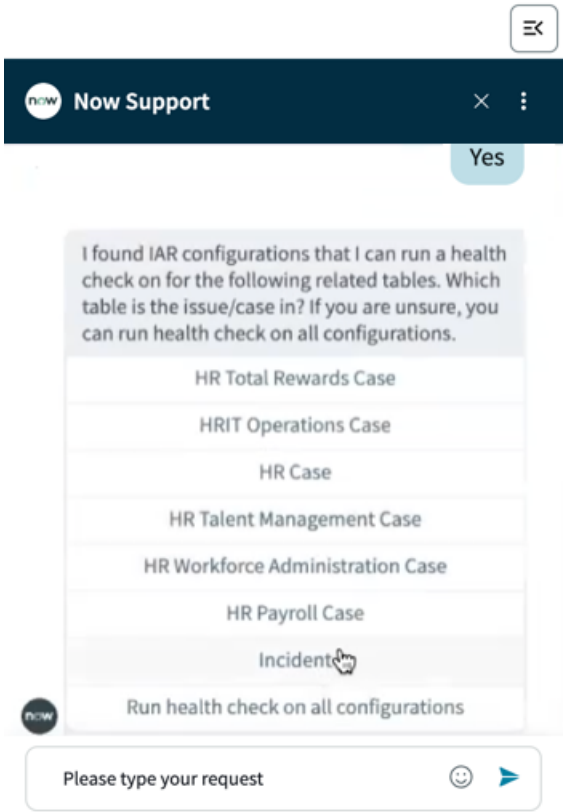© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




3. The diagnostic tool performs an analysis on Issue Auto Resolution configuration and settings and displays the results. The diagnostic confirms the following conditions:
   - The prediction server is up.
   - There are existing Issue Auto Resolution configurations.
   - The configurations are active.


   A health check for the selected configuration type also runs to determine if the Incident or case is properly configured for Issue Auto Resolution. The diagnostic for an Incident checks the following conditions:
   - Issue Auto Resolution configuration is active.
   - Language configuration is active.
   - There is an active response channel.
   - There is an active intent topic map for the Incident configuration.

   The diagnostic for a case additionally checks that AI Search has been enabled and doesn't check for an intent topic map. If all the settings are correct and the issue persists, the user can choose to continue the conversation.

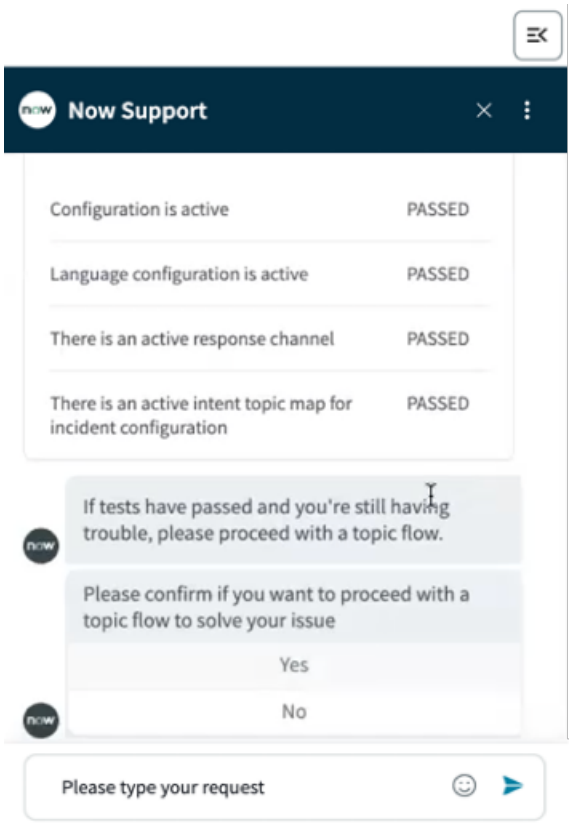© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



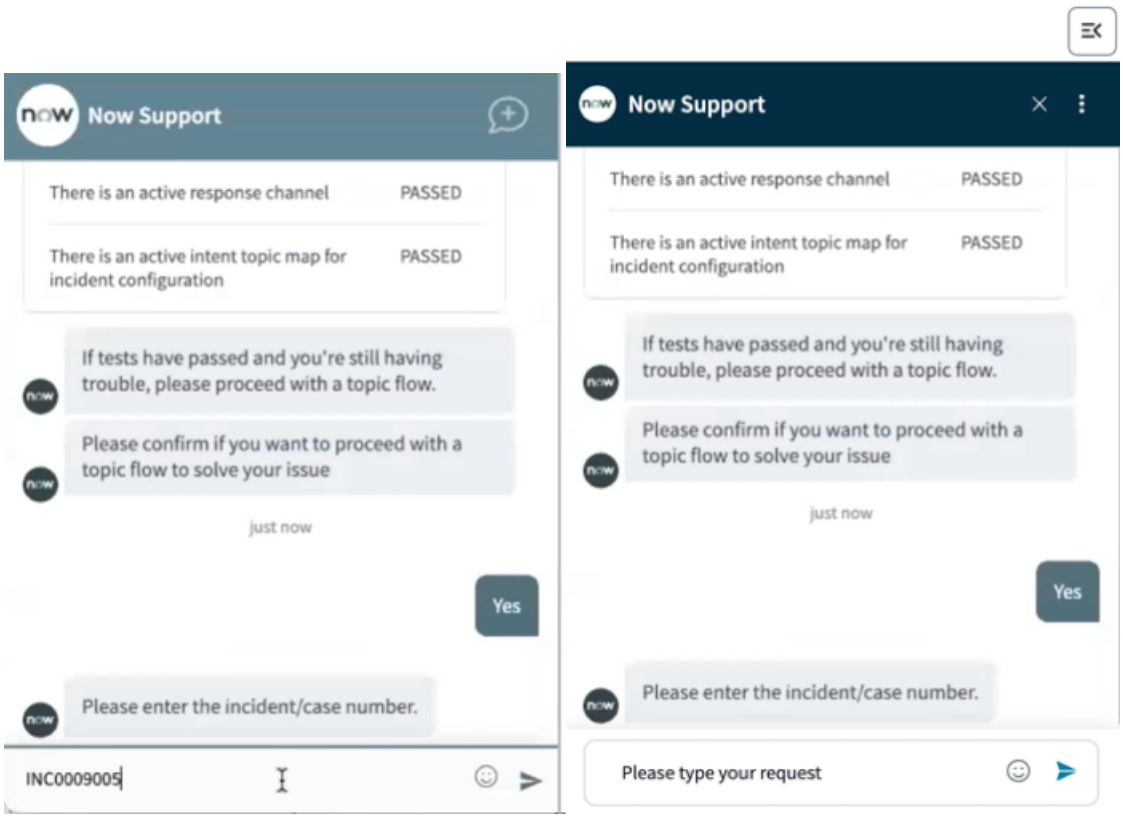4. Enter the Incident or case number and confirm it's correct.



The bot asks you to confirm the number you entered.

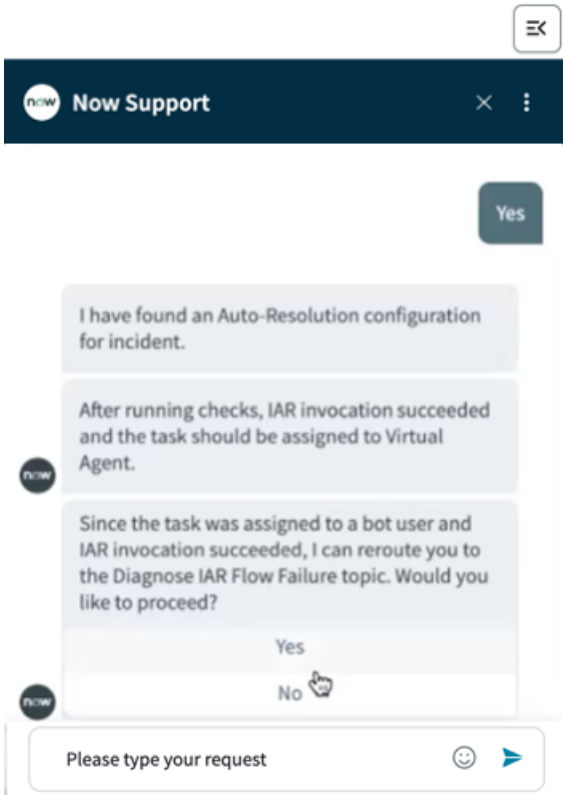
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. The diagnostic tool analyzes the issue to determine if the following conditions are met:
   - The trigger condition on the configuration matches the Incident or case values.
   - The business rule order is the highest.
   - There's only one trigger business rule for Issue Auto Resolution on the Incident or case table and it's active.

   If the suggestions don't resolve the issue, you can choose to run further analysis.

Conversation flow: An Incident or case is not going through Issue Auto Resolution


1. Confirm your choice to proceed diagnosing a functionality issue with Issue Auto Resolution.



2. The diagnostic tool checks the following conditions:
   - The intent prediction was successful (Incidents only).
   - The criticality is correct and AI Search is active (cases only).
   - A notification was sent.
   - The end user responded to the notification.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

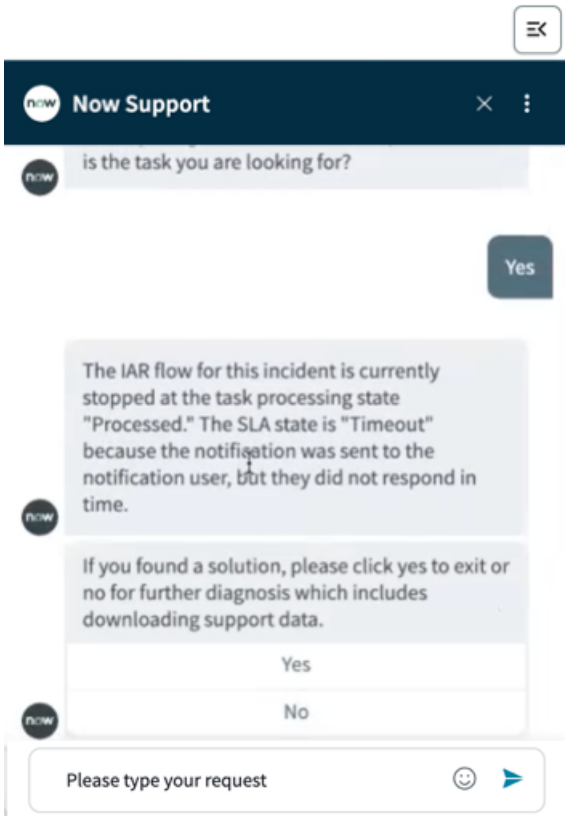If any of these checks reveal an issue, the diagnostic tool displays a possible solution. Indicate whether these solutions resolved the issue, or choose to perform further analysis.



Related topics

Conversational Interfaces Diagnostic Tool

Exploring other Virtual Agent features

After creating topics with the basic Virtual Agent Designer controls and scripting, you can also enhance conversation functionality and topic maintenance by using additional Virtual Agent features.

After learning the basics, here are some other Virtual Agent features that may help you improve your authoring and end-user experience.

Deploy Virtual Agent in other channels

By default, Virtual Agent runs in a chat widget, but you can also run it in other channels. While some features may not be available in certain channels (such as the carousel user input control), you can customize your conversation flow to accommodate these differences.

Use link unfurling in Virtual Agent

Virtual Agent supports link unfurling on the chat widget, mobile devices, and various channels. Link unfurling generates a content-rich preview when a supported link is shared in a conversation with a user, a virtual agent, or in a text-based bot response.

Improve the user experience with AI Search

What happens when a user utterance isn't matched to a keyword or intent? Enable AI Search as a fallback so that the user sees a list of search results as a response when no other match is found.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Maximize code reuse with topic blocks

Rather than duplicate common functionality in multiple topics, you can create reusable topic blocks that you can reference in many topics. This allows you to maintain frequently used functionality in one central location.

Customize Virtual Agent with custom controls

If a Virtual Agent Designer control doesn't quite work for what you want to achieve, create a custom control. You can create your own controls to accept input from the conversation, as well as custom response controls to handle the output. Use these controls within topics to handle specialized tasks.

Integrate Virtual Agent with Workflow Studio workflows

If your company is using Workflow Studio to create workflows, you can integrate them into Virtual Agent. You may need to do this if your conversations require you to pass secure inputs, such as a password. Workflow Studio actions and subflows support the password2 data type, which lets you pass the input securely.

Use Virtual Agent with Agent Chat

Customize Virtual Agent to hand off some conversations to a live agent when needed.

Use Virtual Agent for Incident Auto-Resolution

Initiate a Virtual Agent conversation with an end user after they submit an incident through email or the ServiceNow® Service Portal if an existing Virtual Agent topic can resolve the issue.

Localize Virtual Agent topics

Use the ServiceNow Localization Framework to translate topics and NLU models into other languages.

NLU Workbench - Advanced Features

Expand the functionality of NLU Workbench to help you manage and improve your models. NLU Workbench - Advanced Features is available from the ServiceNow Store.

Integrate Virtual Agent with other portals and apps

Integrate and extend the capabilities of Virtual Agent by connecting to your employees and customers where they already are.

Use Virtual Agent REST API in a standalone or multi-bot environment

Integrate any chat interface or bot using this REST API that is available in the ServiceNow Store.

Additional resources

Take advantage of the following ServiceNow® resources to help you customize your Virtual Agent:

- Virtual Agent and Natural Language Understanding (NLU) community forum
- Virtual Agent Academy

Deploying Virtual Agent topics in other channels

When creating a topic or topic block, you can specify the chat channels in which the topic or topic block will run. During conversation design, Virtual Agent Designer provides built-in guardrails to help you tailor your conversations to those channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

In Virtual Agent, a channel is a chat interface or application in which Virtual Agent interacts with end users. Default channels are the chat applications natively supported by Virtual Agent, such as the Slack, Microsoft Teams, Workplace, and Facebook Messenger applications, and the web and mobile clients. Virtual Agent also supports custom channels created through the conversational custom chat integrations feature, which enables third-party applications (other chat providers) to work in Virtual Agent.

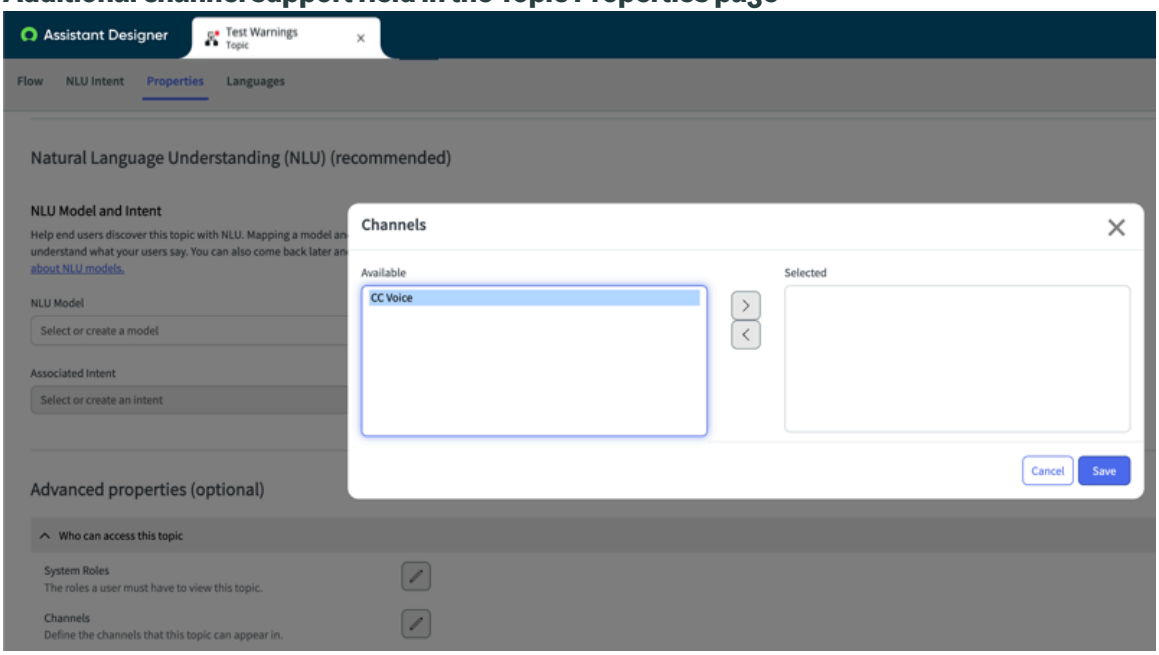
For example, admins can build a custom conversational chat integration for a specific messaging provider, such as Skype. Admins also define the controls that can be used in topics that run in these channels. For details about creating channels for chat providers and specifying the controls used in a channel, see Creating conversational custom chat integrations in Virtual Agent.

Specifying channels in your topics or topic blocks

When you create or edit a topic or topic block, you can specify the applicable channels in the **Channels** field under Advanced properties in the Topic Properties page. Applicable channels are the custom channels created for your instance through the conversational custom chat integrations. Use this field to specify chat clients in which the topic or topic block will run.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

Additional channel support field in the Topic Properties page



During conversation design, Virtual Agent checks the various controls used to build the conversation flow to confirm that the control is valid for the channels in which the topic or block will run.

Design checks for specified channels during conversation design

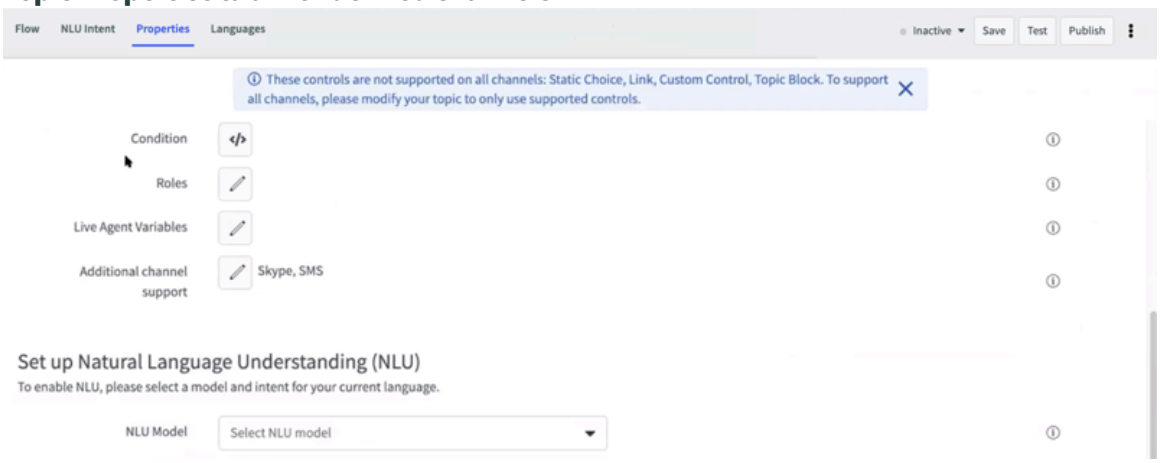
When you're designing your conversation, built-in guardrails identify the Virtual Agent Designer controls that are not suited for the custom channels that you specified in the Topic Properties page. These messages are displayed in the following views:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **Properties** tab (Topic Properties page)

  In the following example, Skype and SMS are the additional channels in which the topic will run. The banner message identifies the controls that are not supported on the channels for the topic. As you develop the conversation flow, you can revise your conversation so that it does not use any of the specified controls for your selected channels.

  Topic Properties tab with defined channels


  

- **Flow** tab (Virtual Agent Designer canvas)

  In the following example flow, the banner message identifies the controls that are not supported for the specified channels. The property sheet for the affected nodes also displays a message indicating that the control is not supported. For example, when you highlight a particular node (control) in the flow, the associated property sheet for the node indicates that the control is not supported in the Skype and SMS channels.

  If you have controls that cannot be used, you can branch the flow so that you can continue building the flow with the controls that are supported.

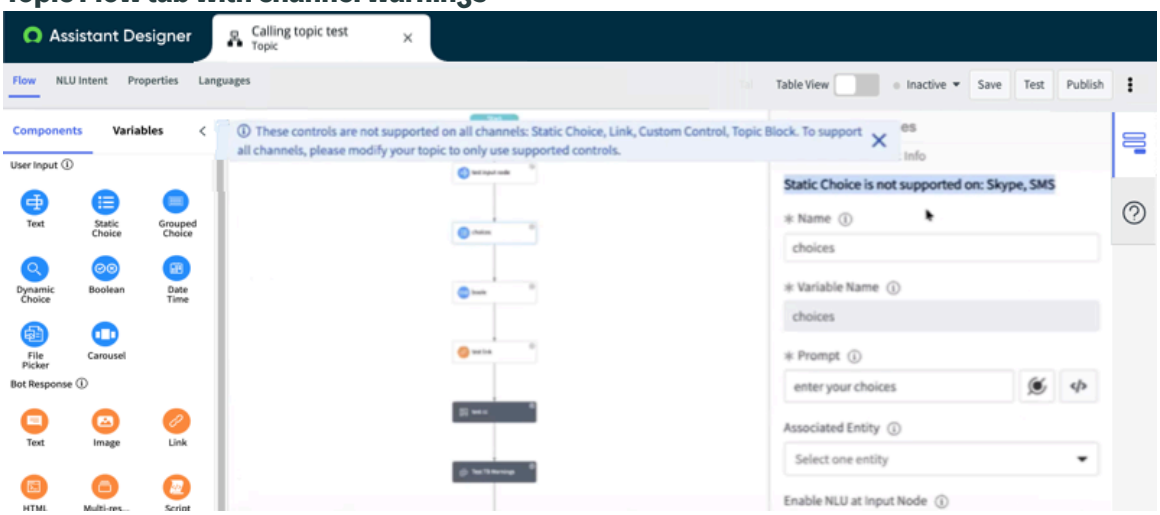  Topic Flow tab with channel warnings


  

Finding the channels available in your instance

To see a list of the available channels in your instance, use the filter icon ( ) in the Assistant Designer Asset library (**Conversational Interfaces** > **Virtual Agent** > **Designer**). The Messaging Channels [sys_cs_channel] table also shows the available channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

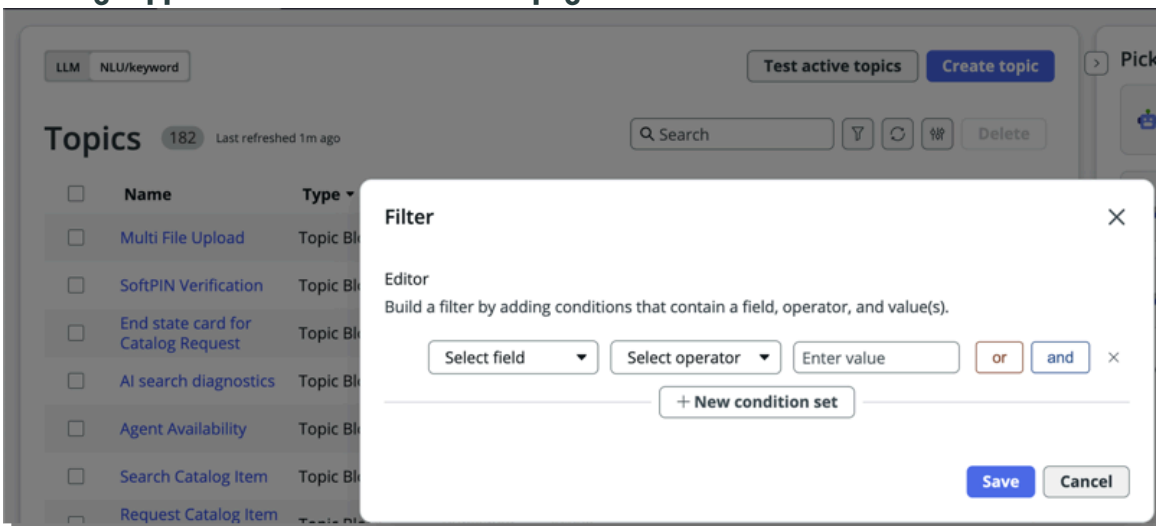Filtering supported channels in the home page



The default channels in Virtual Agent are the web chat and mobile clients and also the Virtual Agent messaging integrations for the Slack, Microsoft Teams, Workplace, and Facebook Messenger messaging applications. In the previous example, SMS is an available chat channel that was created for your instance through a conversational chat integration. When you choose a channel, the home page lists your topics (cards) by channel type. For more information, see Creating conversational custom chat integrations in Virtual Agent.

Using link unfurling in Virtual Agent

Virtual Agent supports link unfurling on the chat widget, mobile devices, and various channels. Link unfurling generates a content-rich preview when a supported link is shared in a conversation with a user, a virtual agent, or in a text-based bot response.

If the link is supported on the chat widget or channel, the generated content-rich previews can include text, images, and videos.

Note:
Factors such as website availability, security policies, or response time of the link you want to unfurl are unpredictable. As a result, link unfurling may be delayed or unavailable. However, these performance-related issues don't impact the user and don't affect the conversation flow.

How to determine if a link is supported

The ServiceNow user interface currently supports link unfurling for OG tags only. A link is supported only if all the following conditions are met:

- The host or domain is included in the Hostname allow list table.
- The link uses standard, compliant Open Graph (OG) tags in the page header as metadata. For example, og:image.
- The link was shared in a conversation with a user, a virtual agent, or in a text-based bot response.

Note:
These conditions apply only to the chat widget and mobile devices on the ServiceNow® platform. Support requirements and conditions for clients on other platforms can vary. For client-specific support and requirement conditions, see the documentation for the client you're using.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Tip:
Admins can add OG tags to ServiceNow UI pages by following the instructions in the Adding meta tags to ServiceNow UI Pages Knowledge Base article.

When a link meets the specified criteria, the ServiceNow software does the following:

- Asynchronously fetches, if available, the OG tag at the provided link.
- Attaches a card-based, content-rich preview of the link based on the OG tag.

The time required to complete these and any other required tasks can vary, depending on your network configuration and system performance.

Supported OG tags

The ServiceNow user interface supports image, video, and text-based OG tags. When both an image OG tag and a video OG tag are fetched, the video is used instead of the image in the card-based, content-rich preview.

Note:
The specific OG tags supported on channels can vary. For example, the OG tags supported on Slack may be different from the OG tags supported on Microsoft Teams, or Workplace from Facebook. For details about the OG tags supported on channels, see the documentation for the channel you're using.

Disabling link unfurling

Link unfurling is automatically enabled by default. To turn it off, Maint users change the *com.glide.cs.enable_link_unfurling* system property to *False*.

Configure link unfurling using the Hostname allow list table

Use the Hostname allow list [sys_cs_hostname_allow_list] table to identify the list of hosts and domains that can be unfurled.

Before you begin
For security reasons, only the hosts and domains in the Hostname allow list table can be unfurled.
The Hostname allow list table includes the following hosts and domains by default:

- Instance URL/hostname: <*instance*>.service-now.com or <*customURL*>.com
- Instance root domain: *service-now.com or *.<*yourdomain*>.com
- servicenow.com
- *.youtu.be
- *.youtube.com

Role required: admin

Procedure

1. Navigate to **All**, and then enter `sys_cs_hostname_allow.list` in the filter.
2. Click **New**.
3. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Active	Select this option to enable the host or domain that can be unfurled.
Hostname	Name of the host or domain that can be unfurled. You can use an asterisk (*) to specify a wildcard in the host or domain name. For example, enter `*.domain.com`.
Domain	Domain group. The default is global.

4. Click **Submit**.

Improving the user experience with AI Search

Virtual Agent uses the ServiceNow AI Platform® AI Search application to return search results in bot conversations as a fallback when there are no relevant topics to display to end users. Virtual Agent also provides a Run AI Search topic block that topic authors can use to generate search results in a topic.

How Virtual Agent uses AI Search

The AI Search application, which is included with the ServiceNow AI Platform, provides relevant search results for queries and uses Machine Learning to continuously improve search results based on end-user selections. To learn more about AI Search, see AI Search.

In addition to normal search results, AI Search can display Genius Result cards that show relevant catalog items, questions and answers (Q&A), and people (user) information. To learn more, see Genius Results.

Catalog Genius Results and Q&A Genius Results are automatically activated in the base system.

Virtual Agent uses AI Search to provide the following:

- The Run AI Search topic block, which calls the AI Search application in a conversation. Topic designers can add this block as a topic node, to generate and display search results in a conversation. For details about the Run AI Search block and other topic blocks provided with Virtual Agent, see Virtual Agent pre-built topic blocks.
- The AI Search Fallback setup topic that generates search results for end users when Virtual Agent can't determine an intent and topic or the keyword to display the appropriate conversation for user requests.

Virtual Agent provides base system (default) AI Search configurations that determine how search results are generated and displayed:

- Search application configuration that defines:
  - Index sources - Data sources to be used for search, such as catalog items or knowledge base (KB) articles.
  - Search profile - Index source to be used and the type of results to show in Genius Result cards.
- Entity View Action Mapping (EVAM) configuration that defines how search results and Genius Results are displayed.

The Virtual Agent search configurations are part of the default chat experience set in Virtual Agent Designer, through the Custom Greetings and Setup feature. Use this feature to specify the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

context for running Virtual Agent. The chat experience defines the setup topics used in Virtual Agent conversations and the search configuration that controls the AI Search experience. The AI Search Fallback setup topic controls the AI Search experience. For details, see Setting up chat experiences for Virtual Agent users.

Virtual Agent and Virtual Agent Lite use AI Search functionality. If you're a Virtual Agent Lite admin, you can deactivate setup topics such as the AI Search Fallback setup topic, but you can't change the Virtual Agent search configurations set in chat experiences, the Run AI Search topic block, nor the AI Search Fallback setup topic.

In order to use AI Search in Virtual Agent, you must request it for your instance. For more information, see Activate AI Search for Virtual Agent.

When Virtual Agent uses AI Search fallback

Virtual Agent uses AI Search fallback in the following instances:

- Topic discovery can't find any matching topics for the user query.

  Note:
  If you're using pre-built NLU conversations, such as ITSM Virtual Agent conversations, topic discovery finds the topics that match the keywords or intents provided with those conversations, before falling back to AI Search. If your users select **Ask something else** after suggested topics are displayed, Virtual Agent takes the additional input and reruns topic discovery AI Search to return relevant search results.

- Topic discovery returns too many topics for the user query. In this case, Virtual Agent can't determine the best topic to display to the end user.
- Topic suggestions are displayed to the user, but the user selects the **Ask something else** option.

Note:
If you deactivate the AI Search Fallback setup topic in a chat experience, the Virtual Agent runs the Fallback setup topic when it can't find a matching topic.

What the AI Search results look like

In Virtual Agent, the default chat experience or a custom chat experience determines the search experience, namely the search profile used and the format of the AI Search results displayed:

- The search application specified in the Virtual Agent default or custom chat experience defines certain aspects of the search experience, such as the search sources (searchable content) and synonyms used to improve search recall.
- The EVAM configuration for Virtual Agent controls the Genius card content presented in search results (Q&A, Catalog, and People). For information on how EVAM works, see Exploring Entity View Action Mapper.

The default AI Search results include these items:

Genius Result cards

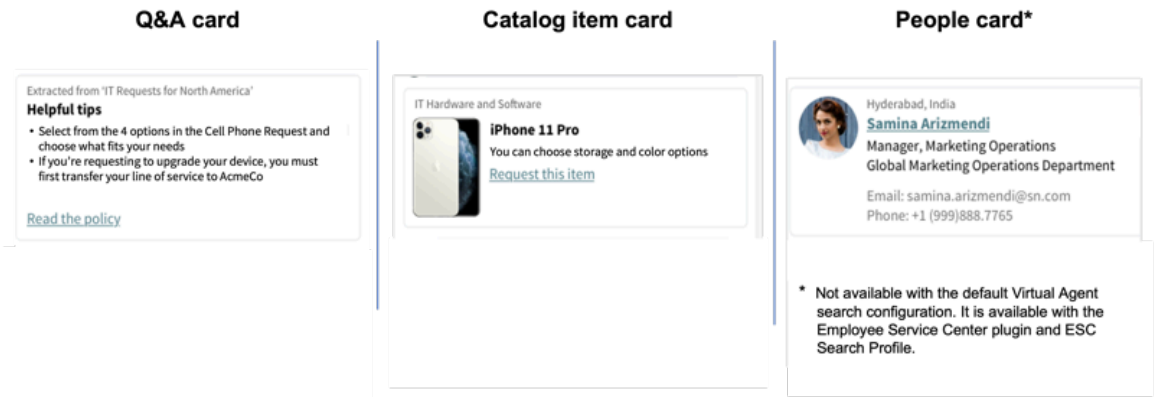
When AI Search generates a match (result) with a high confidence score, Virtual Agent displays a single Genius card with the result. The cards display information returned from AI Search:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Q&A - Provides an answer snippet from the Knowledge Base article determined as the top search result.
- Catalog items - Returns the most relevant catalog item with the related entities (catalog item name and catalog item category).
- People - Returns the relevant person with the related entities (name, department, city).

Note:
The default search application for Virtual Agent is configured to include Q&A (Knowledge Base) and Catalog results, but not People card results. The People card is not available with the default Virtual Agent search application. People card results are available if you're using the Employee Service Center (ESC) app and the ESC search profile, which can be specified in a Virtual Agent chat experience for ESC.

Genius card examples




List output

After a Genius Result is returned, users can indicate what they would like to do next. If they choose the option **Show me more on <search item>**, Virtual Agent displays search results as a list output, which includes:

- Knowledge articles
- Catalog items
- People
- Other - Generic results determined by EVAM, for example results from Microsoft SharePoint or Microsoft OneDrive connectors

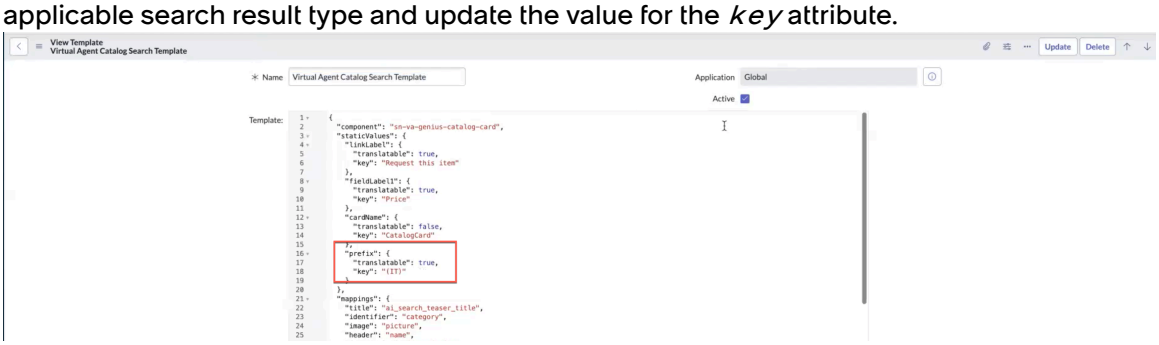Admins can edit the prefix of these search result titles by navigating to EVAM and searching for Virtual Agent templates. Select the template for the applicable search result type and update the value for the *key* attribute.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Admins can expand the number of search results displayed up to 10, using the *com.glide.cs.ai_search.max_regular_result* property. In order for the search results to display as expected, the search result limit in the search application configuration should be greater than or equal to the *com.glide.cs.ai_search.max_regular_result* system property.

Note:
When admins specify 10 for the maximum regular results, 12 choice options display (10 results plus the actions "I need more help" and "Ask something else"). However, the default total number of list options allowed on the chat widget is 10. In order for all 12 choices to display, the admin must adjust the *com.glide.cs.picker_page_limit* system property accordingly. For optimal user experience, fewer list options are recommended.

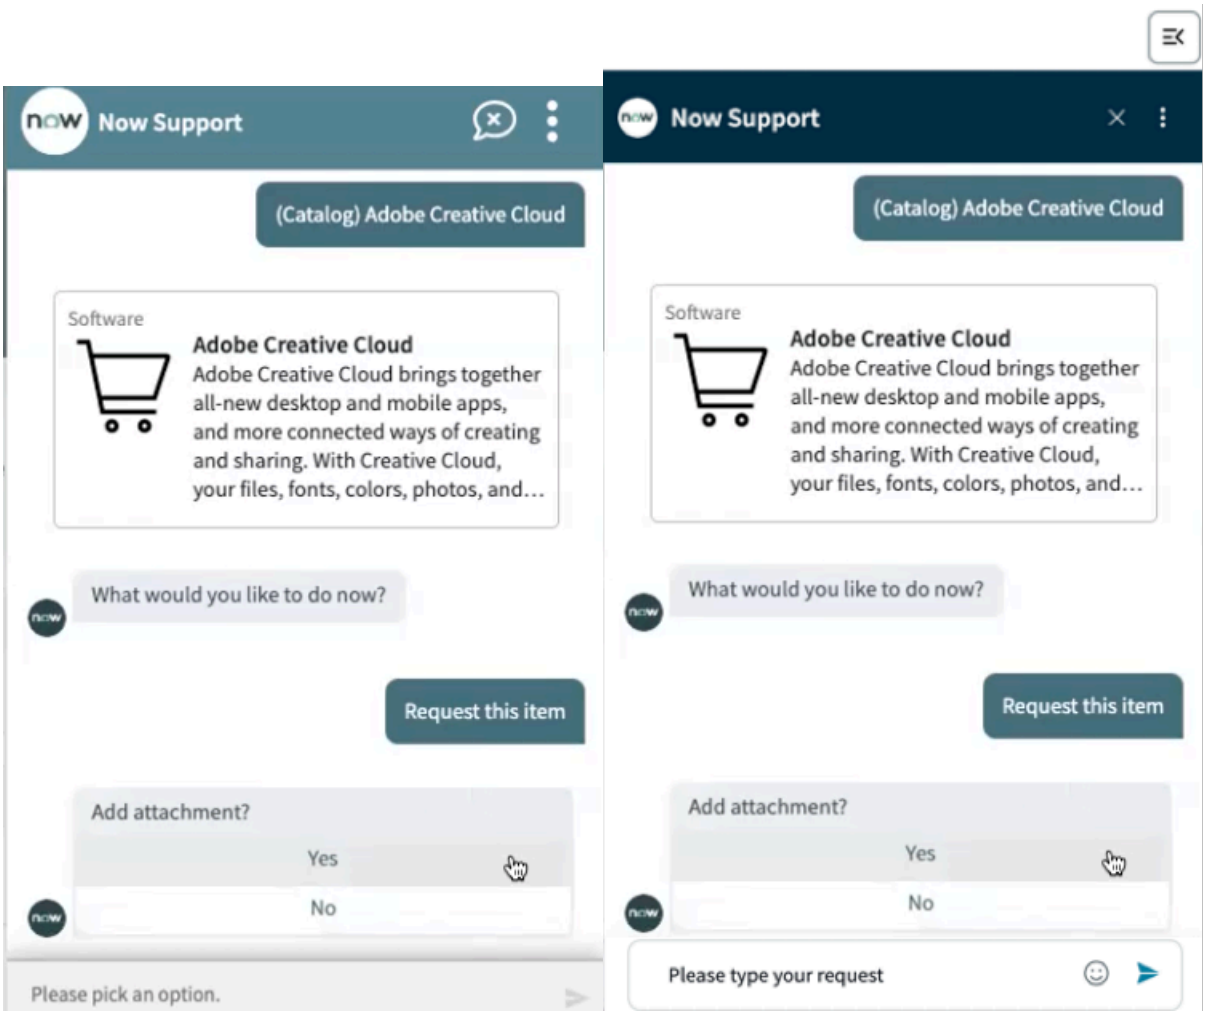Users can select a search result from the list and continue the Virtual Agent conversation. For example, when a user selects a catalog item from the search results list, Virtual Agent provides an option to request the item directly from the chat.



Portals that display AI Search links

Links in the Genius card and multi-link output search results are opened automatically in a portal that you can set in various ways. For example, you can use default or custom URL mappings to specify the portal in which links are opened. To learn more, see Configure URL navigation for chat links.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Custom search experiences

You can customize the AI Search experience in a conversation, for example to run searches that return results relevant to a particular business application. To control the AI Search results returned in a conversation, you can create a search application configuration that defines the search experience used by the AI Search topic block. For details, see Create a custom AI Search experience for Virtual Agent conversations.

Activate AI Search for Virtual Agent

Once activated, AI Search configurations that are part of the Virtual Agent default chat experience become available. The AI Search Fallback setup topic controls the AI Search experience.

Before you begin

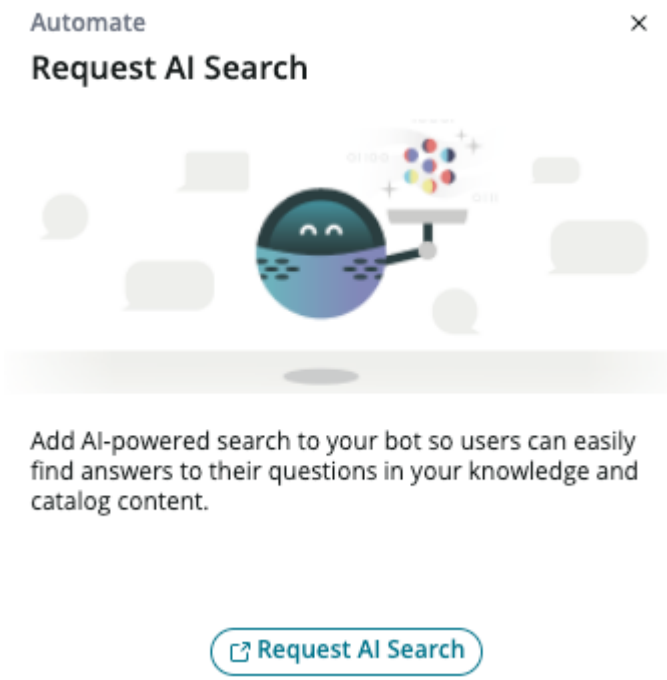
Role required: admin or virtual_agent_admin

About this task

The default chat experience is defined in the Custom Greetings and Setup settings area in the Conversational Interfaces admin console. The default experience uses the AI Search Fallback setup topic, which requires AI Search to be activated for Virtual Agent. You can request AI Search from the Conversational Interfaces admin console Home page.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. On the Home page, find the Request AI Search tile, and select **Request AI Search**.



3. On the page that opens, select **Request AI Search** to request provisioning.

Result

Your request will be processed. Once activated, enable the AI Search Fallback setup topic in the default or a custom chat experience. For instructions on configuring a chat experience, see Setting up chat experiences for Virtual Agent users.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If you want to customize the Virtual Agent AI Search results that are generated for your users, see Create a custom AI Search experience for Virtual Agent conversations.

Create a custom AI Search experience for Virtual Agent conversations

Define a custom AI Search experience in a conversation using the AI Search topic block. You create a Search Application Configuration used by the topic block to control the AI Search results returned in the conversation. Or you can use the Search Application Configuration to control AI Search results in a custom chat experience.

Before you begin

Create the search profile that defines the search experience to be used in the search application configuration. For details, see Search profiles and Search application configurations.

Role required: virtual_agent_admin or admin with the search application administrator [search_application_admin] role

About this task

A search application configuration specifies the AI Search profile used by the Run AI Search topic block or in a custom chat experience to control the search experience, such as the search source used to generate search results.

Note:
As of the Utah release, use the AI Search topic block when creating an AI Search application. (The Run AI Search topic block is used in releases from Rome to Tokyo.)

Procedure

1. Navigate to **All** > **AI Search** > **Search Experience** > **Search Applications** and select **New** to create the search application configuration.
2. On the form, fill in the fields.

Search Applications Configuration form

Field	Description
Name	Name for the search application to be used by the AI Search topic block.
Search Engine	Search engine to use in this search application. Use AI Search as the search engine.
Search Profile	Search profile that stores the search experience settings for generating AI Search results.
Search Results Limit	Maximum number of search results that the application should display.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: The search query in Virtual Agent returns 3 results per query. However, the limit can be changed by using the *com.glide.cs.ai_search.max_regular_resu* system property, for a maximum of 10 results. For more information, see Improving the user experience with AI Search.
Genius Results Limit	Maximum number of Genius Result cards to be displayed. **Note:** Virtual Agent supports only 1 or 0 card results per AI Search query. If you change this field to a different value, Virtual Agent still displays only 1 or 0 card results.
Enable Typo Handling	Option to auto-correct search query terms to match terms found in the search profile's typo handling dictionary. For Virtual Agent, turn off this option by deselecting it.

3. Select **Submit**.
4. Apply the custom Search Application Configuration to the AI Search topic block used in a conversation or to a custom chat experience.
   Your custom Search Application Configuration is used in the AI Search topic block in a conversation or a custom chat experience to generate the customized AI Search experience.

Maximizing code reuse with topic blocks

Topic blocks are reusable components that you can create to run common tasks and conversational elements in Virtual Agent conversations. Topic blocks simplify the topic authoring and maintenance process by enabling you to reuse standard procedures or actions across conversation topics.

How reusable topic blocks work

A topic block is basically a subflow that performs certain actions or conversational tasks in a topic. For example, you can build a topic block that creates or retrieves certain types of records. You create topic blocks with Virtual Agent Designer, similar to the way that you build conversation topics. With Virtual Agent Designer, you can do the following:

- Set topic block properties.
- Define the controls (nodes) used in the block.
- Test or preview the block.
- Publish the block to make it available for use in topics or other topic blocks.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Unlike topics, topic blocks are not discoverable by a large language model (LLM), Natural Language Understanding (NLU), or keywords. The topic block's functionality can only be accessed by a topic.

A conversation that uses (consumes) a topic block is referred to as the calling topic. A topic block can call another topic block, but it cannot call itself. You can "nest" topic blocks in this manner, even if the flow returns to the initial topic, as in this example:

Chain of nested topic blocks



Note:
If Virtual Agent detects an infinite loop, the conversation ends.

The Virtual Agent platform and applications provide pre-built topic blocks for common tasks or subflows. You can use these pre-built topic blocks in your conversation topics "as is" in the appropriate application scope by duplicating them. You can then customize these pre-built topic blocks as needed. Some of the common topic blocks include the following.


Examples of pre-built topic blocks

Pre-built topic blocks	Application scope
• Transfer to Live Agent: Transfers a bot conversation to a live agent. • Survey: Presents a survey for collecting feedback for an agent. • Geolocation: Gathers information about the user's location. • Pause: Insert a pause (in seconds) in the conversation. • Deflection: Tracks deflection metrics for the Virtual Agent.	Global. Provided with the Glide Virtual Agent plugin (com.glide.cs.chatbot).
Contextual search: Uses a search phrase to return search results in a card format, such as knowledge articles and catalog items.	Common topic block used by the CSM, HR Service Delivery, and ITSM business applications. Provided with the Service Management Virtual Agent Topic Blocks plugin (com.glideapp.cs.sm_topic_blocks). This plugin is included with the Virtual Agent conversation plugins for these business applications.


Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

On the home page, you can use the filter icon to filter and view only the topic blocks.

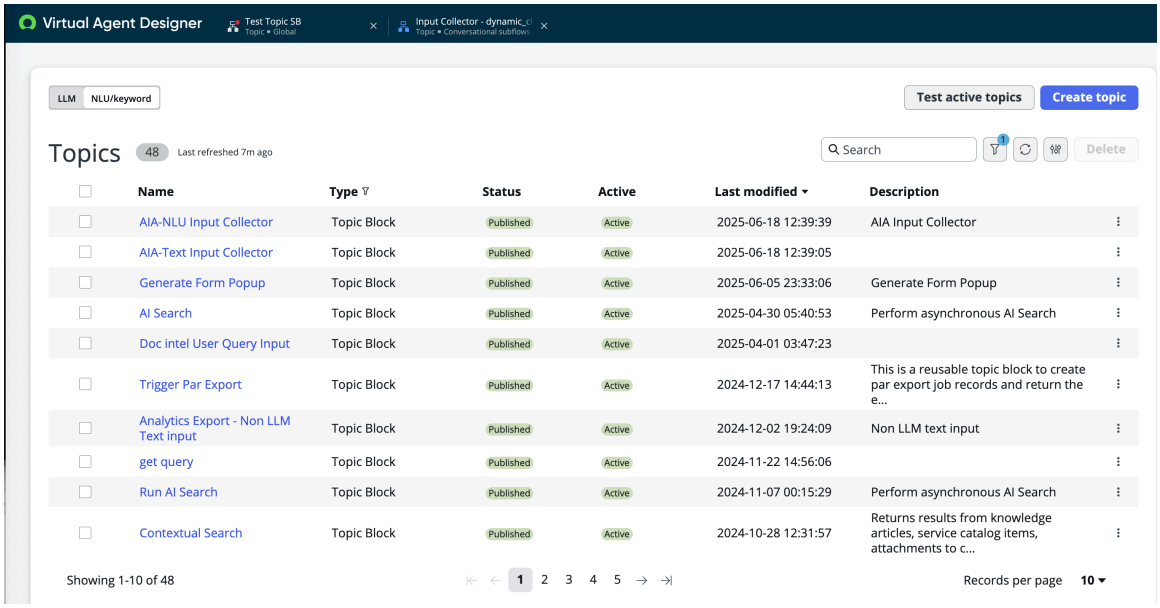© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



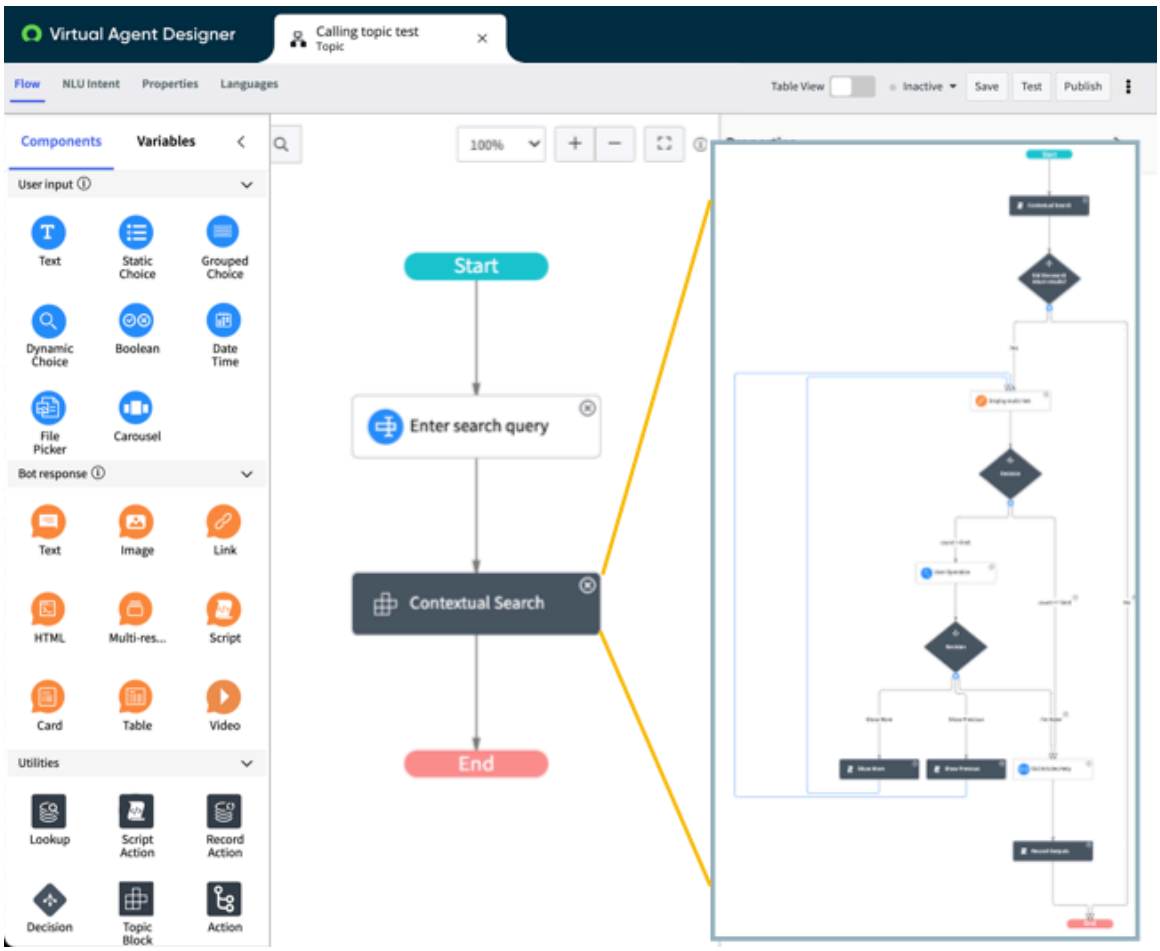After you create and publish a topic block, the block is available for use as a Topic Block utility in Virtual Agent Designer. You can add the topic block to a calling topic or to another topic block. In the following example, the calling topic uses the Contextual Search topic block. When a topic calls the Contextual Search topic block, the conversation flow contained in the topic block executes.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next

Working with topic blocks involves the following steps:

1. Create a reusable topic block.

   Build a conversation component that performs a common function that can be reused in Virtual Agent conversations.

2. Add a reusable topic block to a calling topic or topic block.

   To run a specific subflow, add a reusable topic block to a calling (parent) topic or topic block. Specify the inputs that are used in the topic block and review outputs that are returned from the topic block.

3. Maintain topic blocks and associated calling topics (as needed).

   When you update a published topic block, Virtual Agent Designer performs certain checks. Displayed messages inform you of changes that you may want to make to calling topics that use the updated block.

Create a reusable topic block

Build a reusable component that performs a specific subflow of tasks and conversational elements in Virtual Agent conversations.

Before you begin

Tip:
Developers and topic authors may need to access topic blocks created in other application scopes. To give them access, see Create cross-scope access privileges for topic blocks and custom controls.

Role required: virtual_agent_admin or admin

About this task

Use topic blocks to run common steps, such as retrieving certain records.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, do one of the following:
   - To create a topic block from scratch, select **Create**.
   - To create a topic block based on a pre-built topic block, open the topic block and do the following:
     a. In the header bar, select **Duplicate**.
     b. Enter the name of the new block and select **Save**.
3. On the sheet, fill in the fields.

Topic Block Properties sheet

Field	Description
Type	List of items that you can create in Virtual Agent Designer. Select **Topic Block** and define the additional properties.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: Once you set this topic as a topic block, you cannot change it to a regular topic.
Name	Unique name for the topic block that reflects its functional purpose. This name appears in the list of topic blocks that topic authors can choose from when creating or updating a topic.
Description	Brief explanation of the purpose of the topic block. For example, to retrieve records.
Advanced properties (optional)	
Who can access this topic	
Channels	Chat clients in which the topic or topic block will run. These channels are different from the default channels that are natively supported by Virtual Agent. Your instance may have additional channels for custom chat integrations created for it. For more information about channels, see Deploying Virtual Agent topics in other channels.
Live agent	
Live agent context variables	Live agent context variables that are defined in the General Chat Settings. Select the variables that provide dynamic context, which means information from the Virtual Agent chat. This information is transferred from the bot conversation to the live agent. For information about the default list of live agent variables, see Live agent chat context variables.
Available for Agent Autopilot	Toggle switch that determines whether the topic block is available to a live agent. When enabled, an agent can search for the topic and invoke the topic. For details, see Conversation Autopilot.
Available on the palette	
Enable	Toggle switch that determines whether the topic block appears as its own icon in the Utilities section of the palette on the **Flow** tab. This provides easy access to the topic block for other authors.
Additional	
Categories	Category that contains this block. You can define custom topic categories for your topic blocks.

4. Select **Create**.
   The **Flow** tab opens. The canvas displays a flow with a **Start** and **End** node.
5. To define an input to the block, do the following:

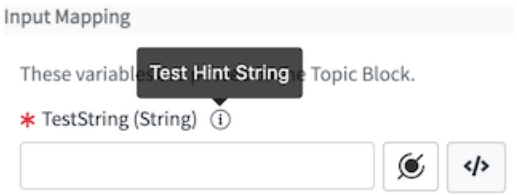
   a. Select the **Start** node in the canvas.

   b. In the Start Segment Properties sheet, select **+ Add**

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


c. On the sheet, fill in the fields.

Add input dialog box

Field	Description
Name	Name of the input variable that stores the input value.
Type	Type of data being passed to the topic block. For example, **String**, **Boolean**, and so on. The fields change according to your choice. For more information, see Input data types in Virtual Agent topics.
Required	Option to set the parameter as required.
Hint	Tooltip that is visible when authoring a calling topic. See the following example: 
Table	ServiceNow table that is used to query for input. This field is available only when **Reference** or **Array.Reference** is selected from the **Type** field.
Max Number of Rows	Maximum number of rows that the topic block is allowed to define. This field is available only when **Array** is selected from the **Type** field.
Default Value	Default value for the variable. This value can be used when previewing the block. Duplicate default values are not allowed for array data types.

Example
For example, the pre-built Contextual Search topic block provides the following input parameters:

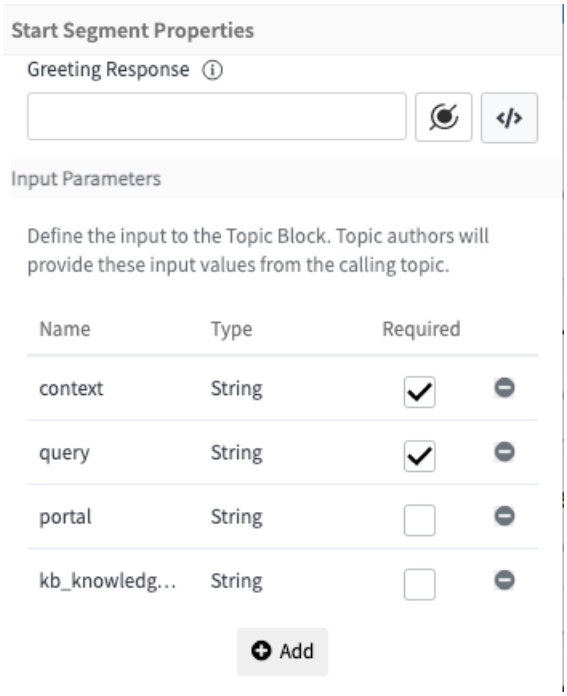© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



d. Select **Save**.

The calling topic or topic block passes input parameters to the topic block.

6. Drag Virtual Agent Designer controls onto the canvas.
These controls include the input, bot responses, and utilities. Use them in combination to define the logic that is run in the topic block. For more information, see Virtual Agent Designer controls.
7. To define the output returned from the topic block, do the following:

a. Select the **End** node in the canvas.

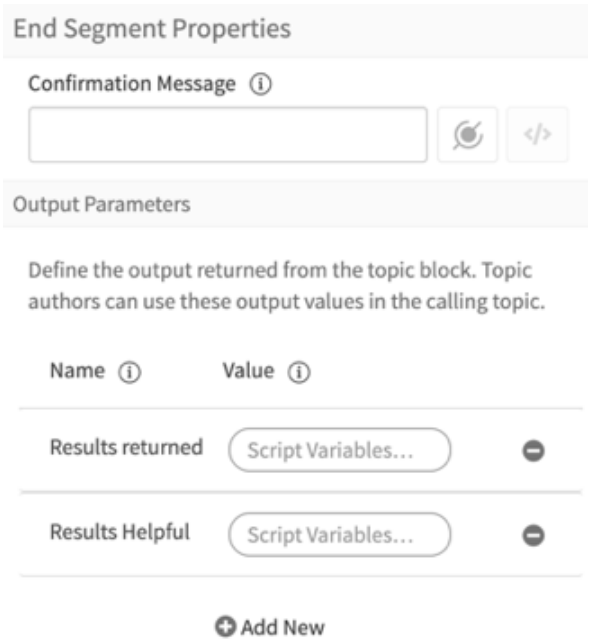
b. In the End Segment Properties sheet, select **+ Add New**.

c. On the sheet, fill in the following fields.

- **Name**: Name of the value returned from the topic block.
- **Value**: Either a string with variables or a script that can be used within the calling topic. The **Value** is presented as data pills for the input variables that you defined (the **Default Value** specified in the Input Parameters and the input values from the node in the topic block).

Example
For example, the pre-built Contextual Search topic block passes the following output parameters:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




d. Select **Save**.

When the topic block finishes running in the calling topic, it can pass output variables to the calling topic.

8. To see how the topic block runs, select **Test**.

Example
For example, the Contextual Search topic block returned the following results, including a preview-only message with the output values. The preview message helps you verify expected outputs and is not viewable to your users.

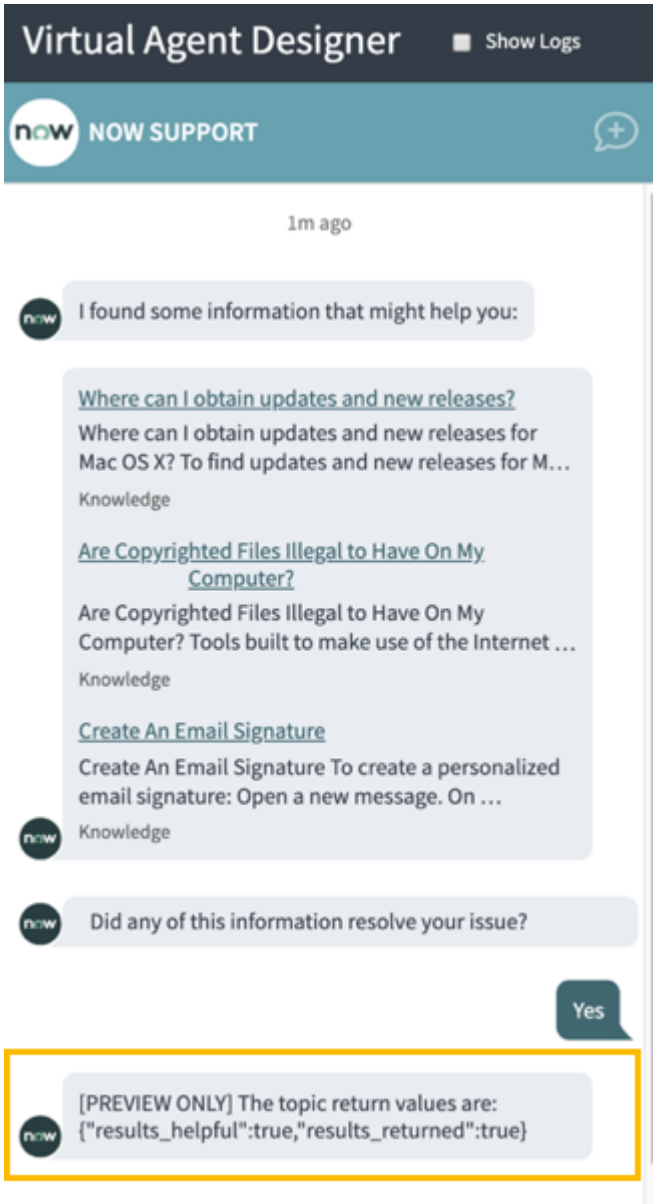© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



9. If you're ready to make the topic block available for use in calling topics, then do the following:
   a. Remove the default parameters that you used for testing.
   b. Select **Save**, and then select **Publish**.
   The topic block state changes to Active and is ready for use in calling topics.

What to do next

Add a reusable topic block to a calling topic or topic block.

Add a reusable topic block to a calling topic or topic block

Add a reusable topic block to a calling (parent) topic or topic block to run a specific function or task in the calling topic. You specify input parameters used in the topic block, and you specify output parameters that are used by the calling topic.

Before you begin

Review the topic blocks available on the home page in Virtual Agent. You can create a new topic block. You can also use a pre-built topic block, duplicate it, and customize it. Pre-built topic blocks are installed automatically with the Glide Virtual Agent plugin, as well as the Virtual Agent conversation plugins for Customer Service Management, HR Service Delivery, and ITSM.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Verify that the topic block you want to use is published and active.

Role required: virtual_agent_admin or admin

About this task

You can specify the following types of variables:

- Input variables that are passed to the topic block.
- Output variables that are returned from the topic block to the calling topic.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, select the calling topic or topic block in which you will include the topic block.
   The **Flow** tab displays the conversation flow.
3. Depending on the type of topic block you are adding, add the appropriate Virtual Agent controls (nodes) to the conversation.
   For example, if you are adding the Contextual Search topic block, you could add the Text user input control to request an item from the user. Drag that control before the node for the Contextual Search topic block.
4. From the Utilities section of the palette, drag the Topic Block control onto the canvas at the appropriate location in the conversation flow.
5. In the Topic Block properties sheet, select the name of the topic block that you want to add.
   The property sheet for the selected topic block displays the input and output parameters. The name of the selected topic block automatically pre-populates the **Node name** field. You can override the name if needed.
6. Set the required Input Mapping variables and, if applicable, the Output Mapping variables for the selected topic block.
7. In the header bar, select **Save**.
8. To preview your calling topic, select **Test** in the header bar.
   You can see how the calling topic runs in the chat window.

   If the Now Assist panel, Microsoft Teams application, or Slack application is configured for your environment, preview options for those channels are displayed in the Test button list. Select **Preview in Now Assist panel** or **Preview in Microsoft Teams** in the list to test your topic in those environments.
9. If no further changes are needed, select **Publish** in the header bar.

Maintain reusable topic blocks

When you update topic blocks, Virtual Agent Designer provides built-in checks to help you identify changes to topic blocks that affect the calling topics that use them. Updates include changing input and output parameters, deleting topic blocks, and publishing inactive and active topic blocks and calling topics.

To help you maintain your topic blocks and associated calling topics, Virtual Agent Designer provides alerts that serve as guardrails. These alerts have many functions, including the following:

- They warn you of topic block updates that affect associated calling topics.
- They help prevent you from making unintentional changes.
- They let you know that you may need to make changes in associated calling topics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

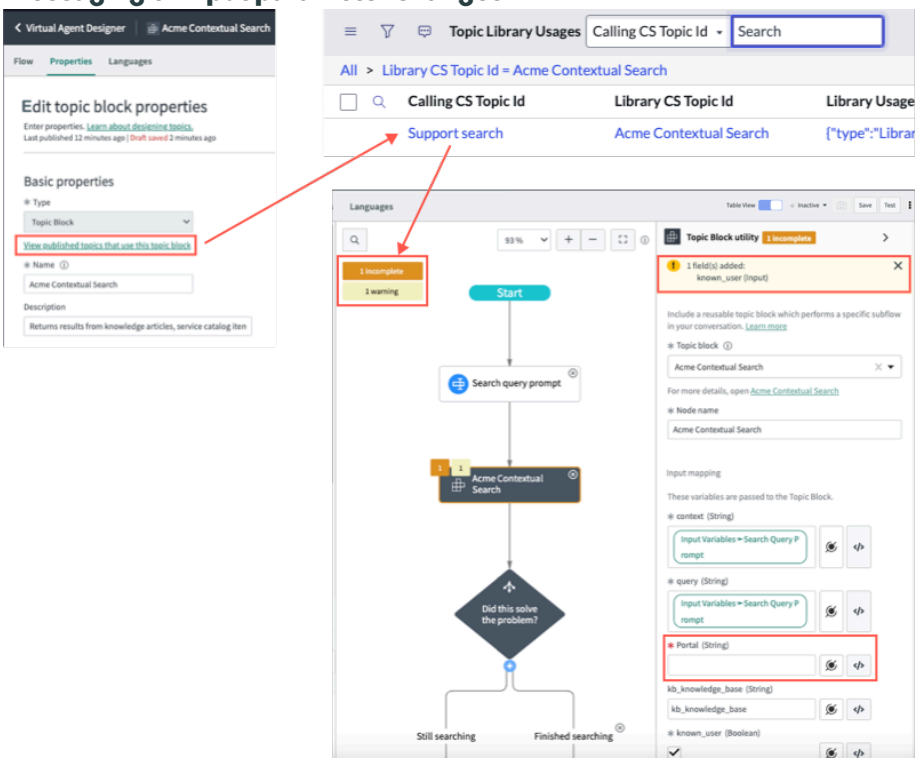
Changing the input or output parameters in a topic block that is used by calling topics

Virtual Agent Designer helps prevent you from deleting output parameters that are being used in calling topics. Virtual Agent Designer informs you that the changes will affect calling topics that use the topic block.

For example, suppose you added a new input parameter and made an existing parameter required in the Acme Contextual Search topic block. You can review the affected topics from a link on the topic block's **Properties** tab. The **View published topics that use this topic block link** opens the Topic Library Usages [sys_cs_topic_library_usage] table. This table lists the published calling topics that use the topic block.

When you open an affected topic, Virtual Agent Designer displays warnings and messages on the canvas indicating where you need to make changes. When you select the Topic Block node, warning messages are displayed in the properties sheet so that you can update parameters accordingly.

Messaging of input parameter changes



Virtual Agent pre-built topic blocks

Virtual Agent provides pre-built topic blocks that topic authors or admins can use to perform specific platform-related functions or tasks in bot conversations. For example, certain topic blocks enable you to check agent availability or generate AI Search results.

Overview of pre-built topic blocks

Certain pre-built topic blocks are included automatically with the Glide Virtual Agent (com.glide.cs.chatbot) plugin and Virtual Agent Lite. If you're using Virtual Agent Lite, you have read access to the topic blocks but you can't create topic blocks or add them to calling topics.

You can duplicate pre-built topic blocks and modify the duplicates by using Virtual Agent Designer. For information about working with topic blocks and how to add them to calling topics,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

see Maximizing code reuse with topic blocks and Add a reusable topic block to a calling topic or topic block.

The following sections describe the input and output parameters for calling different types of platform topic blocks. The topic block input parameters are passed from the calling topic, and the output parameters are returned from the topic block to the calling topic.

Note:
Upgrades to the default topic blocks are not applied to the duplicated topic blocks.

Agent Availability topic block

Use this topic block to get relevant live agent information for use in agent handoff conversations. This information includes agent availability, wait time (how long before an agent is available), and queue information. You can use the information returned, such as a long wait time for an agent, to initiate a case or customer callback.

This topic block requires the Agent Chat (com.glide.interaction.awa) plugin, which includes Advanced Work Assignment.

The following table lists the output parameters for this topic block.

Agent Availability output parameters

Parameter	Description
agentAvailable	Agent availability. The value is true if an agent is available for this queue. Otherwise, the value is false.
supportQueue	sys_id of the queue that is associated with the conversation. The value is null if an agent is not available or if there is no associated queue.
waitingTime	Average numeric wait time for the queue. The value is null if an agent is not available.

Deflection topic block

Use the deflection topic block in Virtual Agent conversation topics to track the issues that Virtual Agent helped to resolve or actually resolved for a user.

For example, the pre-built Auto Resolution Virtual Agent topic uses a deflection topic block to track deflections. For more information, see Tracking deflections in Virtual Agent using the deflection topic block.

The following table lists the input parameters for this topic block.

Deflection input parameters

Parameter	Description
Deflection Configuration	Group of deflection patterns.
Deflection Pattern	Deflection pattern in the deflection configuration that you have chosen.
Activity Table	Table where the deflection activity occurs. This table is associated with the primary activity table. For more information, see Create deflection configurations and patterns.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Deflection input parameters (continued)

Parameter	Description
Activity Ids	List of comma-separated activity system IDs. For example, incident ID or task ID. You can also add output from the AI Search or Contextual Search topic block to create a link between a deflection occurrence and the content that contributed to the same deflection.

FAQ Conversation Builder topic block

Use this topic block to build bot conversations that use your existing FAQ content. With this topic block, you can enable topic authors to build simple conversations by using existing knowledge articles that are published in the FAQ template or by using Q&A data that was imported from sources such as spreadsheets.

The FAQ Conversation Builder topic block uses contextual search to find an appropriate match in the FAQ content. FAQ content is access-controlled based on requester role, access rights, and context.

Activate the Knowledge Management Advanced plugin to use the FAQ Knowledge template.

Note:
The default length of an FAQ snippet that is returned in the conversation is 400 characters. The snippet length includes the HTML tags and links that are used in the snippet. To change the snippet length, change the value in the *com.glide.cs.faq.display_size* system property. In addition to applying the specified length, the system applies word-wrap logic to prevent words and links in the snippet from being truncated arbitrarily.

The following tables list the input and output parameters for this topic block.

FAQ Conversation Builder input parameters

Parameter	Description
query	Search term or phrase that is passed to the topic block. Select **Input Variables** or **Script Variables**.
portal	Context for the search. Select **Input Variables** or **Script Variables**.
kb_knowledge	Knowledge base for the search. Select **Input Variables** or **Script Variables**.

FAQ Conversation Builder output parameters

Parameter	Description
Results_Returned	Boolean value that indicates whether any results were returned from the query.
Results_Helpful	Boolean value that indicates whether the user found the results helpful.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Form Content Popup topic block

Use this topic block to open a form in a popup window from the chat widget. Once the user submits the required information, the record appears as a card in the Virtual Agent chat window. If a new record is created, the sys ID for that record is sent to the server so that the Virtual Agent topic has that information. For information about creating a pop-up window from a link, see Create a smart link preference.


Form Content Popup topic block input parameters

Parameter	Description
sysId	Sys ID of the record you want to display from the table specified in the *table* parameter. If you don't want a specific record, enter `-1`to create a new record.
table	Name of the table you want to query or create a record in.
view	Name of a view that you created for the table. If not specified, the default view is used.

Geolocation topic block

Use this topic block to retrieve information about the location of users, if the users agree to that. Before the topic block is called in a conversation, the users are asked if they want their location to be known. For example, the users see a prompt similar to the following:

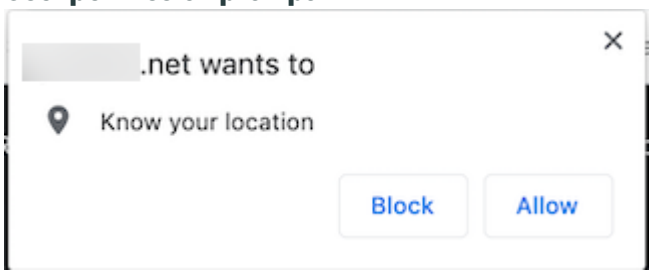
User permission prompt



Users can choose to block the request or allow their location to be known. If the users click **Allow**, they are later asked if they would like to share their location, as shown in the following example:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

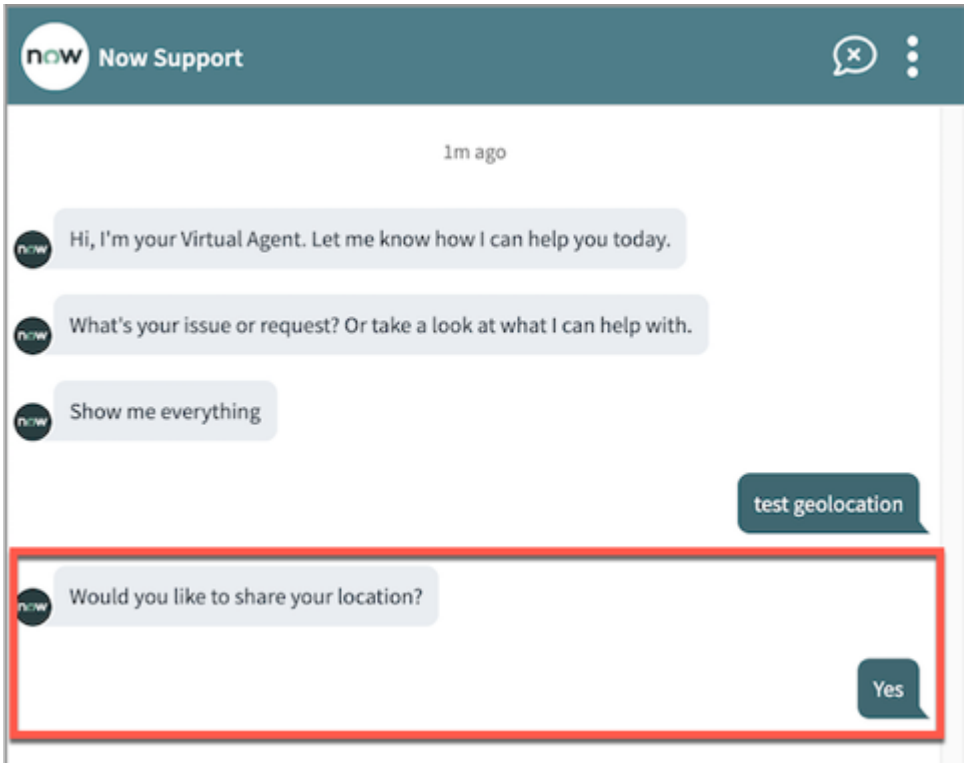Use of Geolocation in a chat



The following tables list the input and output parameters for this topic block.

Geolocation input parameters

Parameter	Description
permissionPrompt (String)	Text asking permission to use the user's location. This text is shown to the user.
isGeoPermissionGrantedForNextUse (Boolean)	Boolean value that determines if users have granted permission to retrieve their location coordinates if this request is asked more than once during the conversation. The variable can be set as follows: • *True*: Don't display permission prompt again because the user has granted permission on this device. • *False*: Display the permission prompt because the user has either denied permission or has allowed the coordinates to be retrieved one time only.

Geolocation output parameters

Parameter	Description
Latitude	Latitude coordinates.
Longitude	Longitude coordinates.
errormessage	Message that is associated with the error if there are any errors.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Geolocation output parameters (continued)

Parameter	Description
errortype	Variable that is returned from the topic block. Types of errors include: • PERMISSION_DENIED • POSITION_UNAVAILABLE • TIMED_OUT • UNKNOWN_ERROR
status	Variable that is returned from the topic block. The status can be: • OK: Location coordinates were retrieved successfully. • ERROR: Retrieval was unsuccessful.

Pause topic block

Use this topic block to create a pause to control the pacing of a conversation. To end users, this feedback is seamless and is displayed as a typing indicator.

For example, if the chat generated a list of knowledge base links, you may want to add a delay before continuing the conversation to give your end user time to read the information.

The Pause topic block appears on the Utilities section of the palette for easier access.

The following table lists the input parameter for this topic block.

Pause input parameter

Parameter	Description
Seconds	Number of seconds to wait before continuing the chat. The maximum value allowed is 60 seconds. If the value entered is 30 seconds (the default value) or less, the block should unpause in near real time. If the value entered is greater than 30 seconds, expect the unpause to occur with a maximum latency of +30 seconds. For example, if you set the value to 31 seconds, it could take up to 61 seconds to unpause (at most).

Run AI Search topic block

Note:
If you're upgrading from Rome or a prior release, you must replace the legacy AI Search topic block with the Run AI Search topic block in order for it to work.

Use this topic block to generate AI Search results in a conversation. This block doesn't require specific input parameters from a calling topic because it is controlled by the AI Search application in Virtual Agent. The default Virtual Agent Search Application and EVAM configuration set in the chat experience control how AI Search results are displayed in conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For information about how Virtual Agent uses AI Search, see Improving the user experience with AI Search. To learn more about Virtual Agent chat experiences and how to configure them, see Setting up chat experiences for Virtual Agent users.

You can control certain aspects of the Run AI Search topic block:

- Optionally customize the AI Search experience - You can customize the search experience by creating a custom Search Application Configuration to be used by the topic block, rather than the default Virtual Agent Search Application Configuration. The Search Application Configuration defines the search results returned in the conversation. For details on using a custom Search Application Configuration in the topic block, see Create a custom AI Search experience for Virtual Agent conversations.

  To use the default Virtual Agent configuration for AI Search, leave the **Search Application Configuration** field empty in the Topic Block Properties sheet when you're adding the Run AI Search topic block to a topic.

- Specify an AI Search flow action timeout value - The AI Search flow action in the topic block automatically times out at 10 seconds. You can change the length of time before this flow action times out by adding the system property *com.glide.cs.fdih.atlassearch.timeout* and setting these fields to change the timeout value:

System property fields for com.glide.cs.fdih.atlassearch.timeout

Field	Value
Name	Enter the system property name: `com.glide.cs.fdih.atlassearch.timeout`
Description	Enter an explanation for this property: `AI Search action timeout (in seconds)`
Type	Select `integer`.
Value	Enter the number of seconds before the AI Search action times out. The default value is 10 seconds.

The following tables list the input and output parameters for this topic block. For the output parameters, you have the option to deactivate any of the variables returned by the topic block.

Run AI Search input parameters

Parameter	Description
search_term	Phrase entered by a user during the conversation.

Run AI Search output parameters

Parameter	Description
genius_results	Variable that identifies the Genius Results returned.
search_results	Variable that identifies the regular search results (multi-list output) returned.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Run AI Search output parameters (continued)

Parameter	Description
search_metadata	Variable that identifies the search result metadata used for click metrics in Conversational Analytics, such as the search term used, query language, and more.

Runtime Language Detection topic block

Use this topic block to detect the user's language during a conversation and switch to that language mid-conversation if the language is supported in the ServiceNow AI Platform.

For example, in conversations where guest users are interacting with the bot in a language different from the current conversation language, you can use this topic block to change the language accordingly. This topic block enables your bot to:

- Detect the language in conversations across all supported Virtual Agent channels.
- Determine if the language is supported in the ServiceNow AI Platform, and if so, ask the user whether to switch to the detected language.
- Switch to the detected language during the conversation if the user agrees to the switch.

Activate the Virtual Agent Language Detection and Translation plugin [com.glide.cs.runtime_language_detection_translation] to use this topic block.

The following table lists the input parameters for this topic block.

Runtime Language Detection input parameters

Parameter	Description
utterance (String)	Text entered by the user.
Change language (Boolean)	Option that displays a message to the user that does the following: • Indicates the bot has detected that the user is typing in a different language. • Asks whether to continue the conversation in the supported language. If the user responds yes, the conversation changes to the supported language.

Using geolocation in Virtual Agent

Topic authors can include a pre-built topic block called Geolocation in conversations with users. The Geolocation topic block retrieves the latitude and longitude coordinates of the user's location.

Topic authors can add this topic block to larger conversation flows. With the user's permission, the topic block retrieves the user's latitude and longitude location coordinates. Knowing these coordinates can help topic authors respond to customer requests or issues faster and more efficiently.

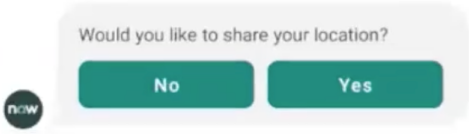
For example, you may need to send a technician to a customer site to resolve an incident. To quickly respond to the customer, you need to know which technicians are located nearby so you can dispatch the appropriate technician for the customer's location.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For general information about how geolocation is used on the ServiceNow platform, see Geolocation.

Share location details

The first time a user, such as a field technician, uses the Geolocation topic block in a conversation, they are asked if they would like to share details about their location.



Geolocation topic block flow


User choice	Topic block response
Yes	The topic block sends the user's latitude and longitude coordinates from the server to the user's device. If users want to allow the ServiceNow instance to access their location, users may then see operating system-specific or browser-specific prompts. Examples of such prompts include the following: • Allow (always) • Allow (one time only) • Block (don't allow) Depending on the user's response, they may see this prompt one or more times, or they may never see it.
No	The topic block does not retrieve user coordinates and displays a relevant error message for the topic author to resolve. The error is logged as an output parameter. For details, see Geolocation topic block parameters.

Modify the Geolocation topic block

If you are a topic author or an admin, you can modify the Geolocation topic block flow, as applicable. Simply duplicate the topic block and rename it. You can then use it as needed in the larger conversation flow you're designing.

The Geolocation topic block properties sheet lets topic authors specify the input and output mappings. You can also customize the prompt using data pills or scripts. For example, you can include an explanation or reason for asking the question. For information about using data pills and scripts, see Virtual Agent Designer controls.

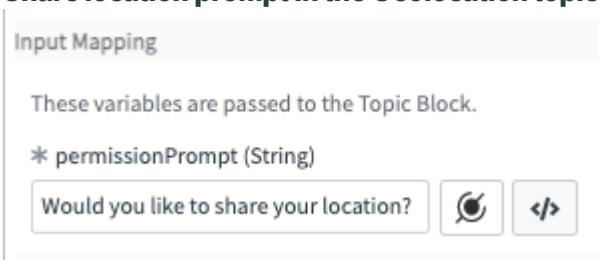Share location prompt in the Geolocation topic block properties




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use the input mappings to customize how Virtual Agent asks users for permission to share their location. The response is passed to the topic block.


Use the output mappings to specify the variables that are returned from the topic block in the conversation.

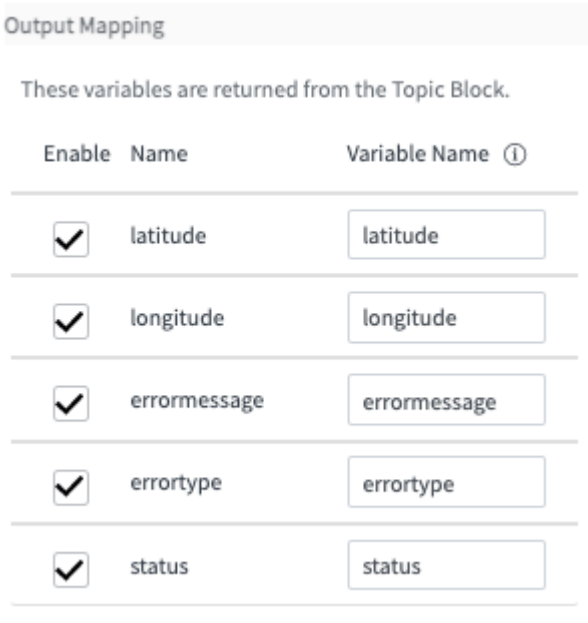Output mapping properties in the Geolocation topic block



All the variables are selected by default. Keep the default choices, or select the variables you want returned from the topic block. At a minimum, you should select the latitude and longitude coordinates. However, error messages, error type, and status details could be useful when resolving problems. The output mappings you select are stored as variables on the server.

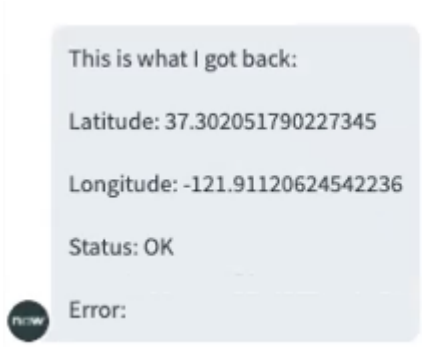Geolocation topic block results



For more information about the Geolocation topic block properties, see Geolocation topic block parameters.

Customizing Virtual Agent with custom controls

Custom controls are components that ServiceNow® developers can create for use in Virtual Agent topics or topic blocks. Such controls include sliders or video players. Custom controls complement the controls provided in Virtual Agent Designer.

Virtual Agent Designer provides a default set of controls that represent user inputs, bot responses, and utilities for building a Virtual Agent conversation. As a developer, you can use Virtual Agent Designer to create additional controls (interface components) for specific inputs or

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

output responses. For example, a slider is an example of a custom input control that enables end users to select a quantity.

Note:
Custom controls do not work on Internet Explorer version 11. Custom controls are also not supported for Microsoft Teams.

Before building a custom control

Custom controls are based on customizable Next Experience Components that you can create by using the Next Experience Design System.

Before building a custom component, you must have the following:

- Basic knowledge of the ServiceNow AI Platform® and application table structures.
- General knowledge of web component concepts, development, and design.
- JavaScript knowledge to define component behavior and that of the custom control.
- Knowledge of the design process for creating custom components for use in Virtual Agent Designer.

To learn more about developing custom components for Virtual Agent, see Develop a component for Virtual Agent.

How custom controls work

To add your custom control to Virtual Agent, follow these main steps:

1. Create a custom control definition.

   After building the custom component to be used for the control, create a custom control definition that maps an input or response control to the custom component.

2. Create a custom control using Virtual Agent Designer.

   A custom control is an input or response control. Developers build a custom control in Virtual Agent Designer by doing the following:

   - Selecting a custom control definition.
   - Defining the input parameters for using the control.
   - Specifying the output parameters returned by the control.

   An input control has callbacks that use input from the end user. A response control typically presents information to the end user and doesn't have callbacks.

3. Add a custom control to a topic or topic block.

   Topic authors, virtual agent admins, or admins can add a custom control utility to a topic or topic block.

Secure inputs

Beginning with the San Diego release, you can create custom input controls that can accept secure inputs, such as passwords, to pass through to Integration Hub actions or subflows. To enable this, slide the **Make inputs secure** toggle switch when you create your custom input control. For more information, see Create a Virtual Agent custom control.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a custom control definition

Define a custom input or response control definition that maps to a custom component.

Before you begin

A custom control definition needs a custom component. For example, a slider input control uses a custom slider component. To begin, create the customizable component that you will use for your control.

Role required: virtual_agent_admin or admin

About this task

For a given custom control, create a separate control definition for each channel in which the control will be used.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Custom Control Definitions**.
2. Select **New**.
3. On the form, fill in the fields.

Custom Control form

Field	Description
Name	Name of the custom control to be created.
Type	Type of custom control. Choices are as follows: ○ Input ○ Response
Domain	Domain in which this control is used.

4. Select **Submit**.
5. Open the custom control record that you just created.
6. In the Custom Control Definitions related list, select **New**.
7. On the form, fill in the fields.

Custom Control Definition form

Field	Description
Channel	Channels in which your control can be used. The channel is a chat client, such as a chat widget or messaging app, that is supported in Virtual Agent. If your control can be used in more than one channel, create a Custom Control Definition for each channel. If channels are defined, then the custom control can only run in the specified channels.
Application	Scope that this control belongs to.
UX Component Definition	List of custom components that are created for use as custom controls in Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Choose an optional component for your custom control.
Domain	Domain where this control is used.

8. Select **Submit**.

Result
The custom control definition is available for use. You can specify it when you create the appropriate control in Virtual Agent Designer.

What to do next
Create the custom control in Virtual Agent Designer.

Create a Virtual Agent custom control

Build a custom input or response control that topic authors can use in topics or topic blocks. In Virtual Agent conversations, an input control gathers information from end users, while a response control displays information to end users.

Before you begin
Create the custom control definition.

Important:
To implement secure (password2) inputs in your Virtual Agent custom control, you must adhere to the scoped application requirements in Workflow Studio. For details, see Workflow Studio scoped application requirements for secure inputs.

Tip:
Developers and topic authors may need to access custom controls created in other application scopes. To give them access, see Create cross-scope access privileges for topic blocks and custom controls.

Role required: virtual_agent_admin or admin

Procedure
1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, select **Create.**
3. On the form, fill in the fields.

Properties form

Field	Description
Type	List of assets that you can create in Virtual Agent Designer. Choose the type of custom control: ○ **Custom Input Control** ○ **Custom Response Control**
Name	Unique name for the custom control that reflects its purpose.
Description	Brief explanation of the purpose and functionality of the control.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Field	Description
Advanced properties (optional)	
Make inputs secure [Custom input controls only]	
Enable	Toggle switch that lets a custom input control pass secure inputs, such as passwords.
Available on the palette	
Enable	Toggle switch that determines whether the custom control appears as its own icon in the Utilities section of the palette on the **Flow** tab. This provides easy access to the control for other authors.
Additional	
Categories	List of categories. Categories identify and group related topics, topic blocks, or custom controls. If applicable, choose a category for your control.

4. Select **Create**.
   The **Flow** tab opens and displays an initial flow that contains a custom control node.
5. Select the **Start** node and define the input parameters to the control.
   Topic authors will provide these input parameters and values from the calling topic.

   a. Select **+ Add**.

   b. On the form, fill in the fields.

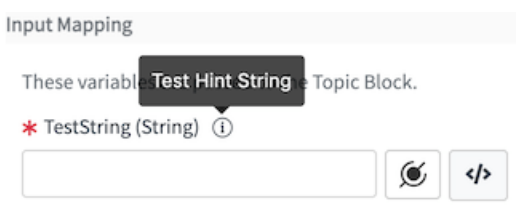Add input dialog box

Field	Description
Name	Name of the input variable that stores the input value.
Type	Type of data being passed to the topic block. For example, **String**, **Boolean**, and so on. The fields change according to your choice. For more information, see Input data types in Virtual Agent topics.
Required	Option to set the parameter as required.
Hint	Tooltip that is visible when authoring a calling topic. See the following example: 
Table	ServiceNow table that is used to query for input. This field is available only when **Reference** or **Array.Reference** is selected from the **Type** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Max Number of Rows	Maximum number of rows that the topic block is allowed to define. This field is available only when **Array** is selected from the **Type** field.
Default Value	Default value for the variable. This value can be used when previewing the block. Duplicate default values are not allowed for array data types.

c. Select **Save**.

d. Repeat these steps for additional parameters.

6. Select the **End** node and define the output parameters and values returned from the custom control.
   Topic authors can use the output value in the calling topic.
   a. Select **+ Add New**.
   b. Enter the name and value of the parameter.
   c. Repeat these steps for additional parameters.
   d. Select **Save**.
7. Select the custom control node and complete the property sheet as follows:
   - For a custom input control, fill in the Custom input properties sheet.
   - For a secure custom input control, fill in the Secure custom input properties sheet.
   - For a custom response control, fill in the Custom output properties sheet.
8. To create the control, select **Save** and then **Publish**.

Result

If you selected **Available on the palette** in the Properties page, the Custom Control icon displays as its own icon in the Utilities section of the palette. The control is listed on the Topics page, and you can use the Type menu to show only custom controls.

What to do next

Add a custom control to a Virtual Agent topic or topic block.

Add a custom control to a Virtual Agent topic or topic block

Add a custom control to a Virtual Agent topic or topic block. During the conversation, you can gather inputs from the user or display outputs to the user.

Before you begin

Do the following before you start this task:

- Create and publish the custom input or response control.
- Create a calling topic or topic block in which the custom control will be embedded.

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

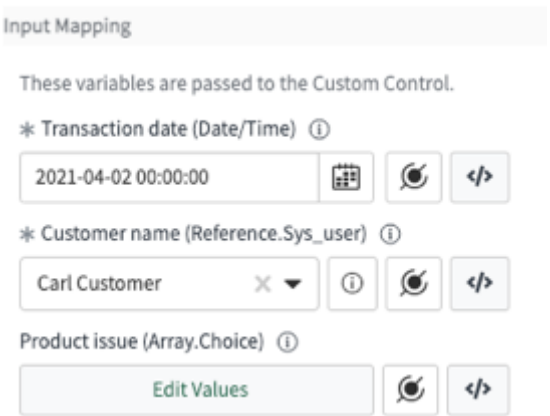
Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the home page, select the topic where you will add the custom control.
3. In the **Flow** tab, drag the Custom Control icon from the Utilities section of the palette to the appropriate position in the topic flow.


   Note:
   If you selected **Available on the palette** in the custom control Properties page, the Custom Control displays as its own icon in the Utilities section of the palette.

4. Select the custom control node.
5. On the form, fill in the fields.

Custom control utility properties sheet

Property	Description
Custom control	The name of a custom control asset that has been published in Virtual Agent Designer.
Node name	The name of the custom control you selected.
Input mapping	The variables to be used as input to the selected custom control. For example, the following image has example variables:  The contents of this area change according to the custom control you selected. Options may include string input, referenced records, scripts, and so forth.
Output mapping	The variables to be output by the selected custom control. For example, the following image has example variables that are enabled:

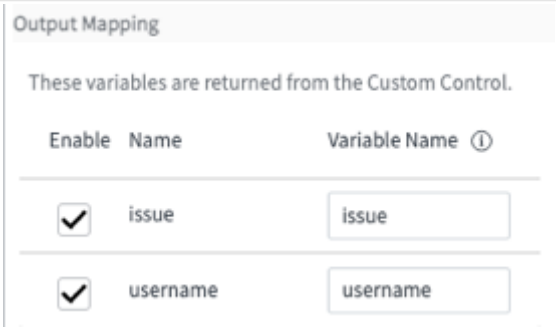© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	 The contents of this area change according to the custom control you selected.
Advanced	
Hide this node	
Conditionally use this node if	A no-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

6. Select **Save**.
7. To see how your custom control works in the topic, select **Test** in the header bar.
   Your topic runs in a chat test window.
8. If no further changes are needed, select **Publish** in the Virtual Agent Designer header bar.

Result

The topic is active. You can deploy it to your Virtual Agent clients.

Custom input properties sheet

Use this sheet to define a custom input control in Virtual Agent.

Custom input properties sheet

Custom input property	Description
Custom Control Definition	List of custom control definitions for the controls. Select the definition that defines how the control is rendered for the channel in which it runs. If you need to add a custom control definition, click the **Custom control definitions** link.
Generate Control Data Function	Script function that provides the data used to render the custom control. For example, if you're creating a slider input control, you would define the values for the slider. These values include the slider minimum and maximum values, slide default values, icon used in the slider, and so on.
Transcript Function	Script function that provides the message recorded in the transcript.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Custom input property	Description
	For example, a message for an input control could confirm that the control is rendered with specific data values.
Response Handler Function	Script function that defines how the input response is handled on the conversation server.
Response Transcript Function	Script function that provides the message for the input control response that is recorded in the conversation transcript.
Non-supported channel response message	Default fallback message that is displayed when a user is running the control on an unsupported channel.
Advanced (optional)	
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.

Secure custom input properties sheet

Use this sheet to specify secure inputs, such as a password, in a custom input control in Virtual Agent.

Important:
To implement secure (password2) inputs in your Virtual Agent custom control, you must adhere to the scoped application requirements in Workflow Studio. For details, see Workflow Studio scoped application requirements for secure inputs.

Secure custom input properties sheet

Secure custom input property	Description
Custom Control Definition	List of custom control definitions for the controls. Select the definition that defines how the control is rendered for the channel in which it runs.
Generate Control Data Function	Script function that provides the data used to render the custom control. For example, if you're asking for one or more passwords, you would define the values for each password.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Secure custom input property	Description
Transcript Function	Script function that provides the message recorded in the transcript. For example, a message for an input control could confirm that the control is rendered with specific data values.
Non-supported channel response message	Default fallback message that is displayed when a user is running the control on an unsupported channel.
Invoke Workflow Studio asset	The Workflow Studio action or subflow that secure inputs from the custom control can be passed into. For more information about Workflow Studio actions and subflows, see Actions and Subflows.
Spoke	Name of the scoped application that contains Workflow Studio content that is dedicated to a particular application or record type. For a list of default spokes, see Spokes.
Action / Subflow	The Workflow Studio action or subflow to be performed in the instance. The **Input mapping** and **Output mapping** areas change depending on your selection. For details about the action or subflow, click the link beneath your selection to view it in Workflow Studio.
Input mapping	Specifies the variables to be used as input to the selected action. The check boxes for secure fields (password2 type) are selected automatically, which makes them mandatory. If you select the check box for a String field, it will be mandatory, but not secure. Only fields that use the password2 data type are secure. For each selected field, provide the corresponding input response variable name that is specified in the action or subflow. For example, a Workflow Studio action contains an *oldPassword* input and a *newPassword* input. The input response object looks like this: `{ "old_password": "1234", "new_password": "5678" }` In this example, enter `old_password` for the *oldPassword* property, and then enter `new_password` for the *newPassword* property.
Output mapping	Specifies the variables to be output by the selected action. The contents of this area change according to the action you selected.
Advanced (optional)	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Secure custom input property	Description
Permissions	
Run as	Permissions to use for the action. Select one of the following options: • **User who initiates session**: When selected, the action runs using the same permissions that the current user has. • **System User**: When selected, the action runs using system privileges, some of which may be unavailable to the current user.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.

Related topics

- Workflow Studio Actions
- Workflow Studio Subflows
- Password (2 Way Encrypted) design considerations

Custom output properties sheet

Use this sheet to define a custom response control in Virtual Agent.

Custom output properties sheet

Custom response property	Description
Custom Control Definition	List of custom control definitions for the controls. Select the definition that defines how the control is rendered for the channel in which it runs.
Generate Control Data Function	Script function that provides the data used to render the custom control. For example, if you're creating a slider input control, you would define the values for the slider. These values include the slider minimum and maximum values, slide default values, icon used in the slider, and so on.
Transcript Function	Script function that provides the message recorded in the transcript. For example, a message for an input control could confirm that the control is rendered with specific data values.
Non-supported channel	Default fallback message that is displayed when a user is running the control on an unsupported channel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Custom response property	Description
response message	
Advanced (optional)	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Integrating Virtual Agent with Workflow Studio workflows

The workflows of ServiceNow® Workflow Studio can be integrated within ServiceNow Virtual Agent topics. You can then use these workflows in Virtual Agent conversations.

Note:
If you have turned on and set up Now Assist in Virtual Agent, you can use the base system conversational actions and subflows from the Assistant Designer Asset library. You currently can't create conversational subflows in Virtual Agent Designer; you can only view and edit them. Conversational subflows can be created, tested, and deleted only in Workflow Studio. For more information on conversational actions and subflows, see Conversational actions and Conversational subflows. You can still integrate actions and subflows that are not conversational from Workflow Studio into Virtual Agent topics through Virtual Agent Designer. The following content is only relevant to actions or subflows that cannot be made conversational in Workflow Studio.

You can integrate Workflow Studio actions and subflows as follows:

- Add the actions or subflows to Virtual Agent conversations.
- Use actions created for another product in Virtual Agent conversations.
- Create conversations that call workflows directly in the conversation. For example, users can place catalog requests, create incidents, or input information securely.

In Virtual Agent conversations, you can use actions to trigger workflows that are custom built in an application (such as Workflow Studio) or workflows of the third-party applications and products available in the Integration Hub. Integrations built using Workflow Studio and Integration Hub help to ensure a high level of resiliency and performance.

If an action in the workflow is slow to respond or appears to be waiting, topic authors see a relevant error message.

By default, a scheduled job checks the conversation flow every 120 seconds. For more information about scheduled jobs, see Scheduled jobs.

You can change this interval as needed. To change the interval, see Specify the action workflow timeout.

Integrate workflows of third-party products available on the Integration Hub

You can use the Integration Hub to create end-to-end digital workflows and automate processes that integrate the ServiceNow AI Platform® with any third-party application, platform, or data.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For example, you can use one of the 100 prebuilt spokes available on the ServiceNow Store. These prebuilt spokes include popular applications, such as Microsoft Azure, Workday, and Okta.

For more information about the ServiceNow Integration Hub, see ServiceNow IntegrationHub – natively integrate ServiceNow with anything.

Add actions or subflows to Virtual Agent topics

Use the Action utility to integrate ServiceNow Workflow Studio workflows in Virtual Agent topics. The Action utility node triggers the required Workflow Studio workflows used in the Virtual Agent conversation.

Before you begin

If you don't already have a Virtual Agent topic, create one. For more information, see Create a Virtual Agent topic.

Become familiar with the following features:

- Workflow Studio concepts and tasks. For more information, see Workflow Studio.
- Virtual Agent Designer utilities, such as the Lookup utility, and the Script Action utility.

  Use these utilities to control the actions within the Virtual Agent conversation. For more information about these utilities, see Virtual Agent Designer utilities.

- Virtual Agent controls. You may be asked to enter any of the following:
  - Text strings
  - Data pills
  - Strings with embedded data pills
  - Scripts that return strings

  For more information, see Virtual Agent Designer controls.

Note:
If you have turned on and set up Now Assist in Virtual Agent, you can work with conversational actions and subflows from the Virtual Agent Designer home page. For more information on conversational actions and subflows, see Conversational actions and Conversational subflows. You can still integrate actions and subflows that are not conversational from Workflow Studio into Virtual Agent topics via Virtual Agent Designer. The following content is only relevant to actions or subflows that can't be made conversational in Workflow Studio.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, and in the Asset library, select the topic that you want to use.
2. From the Utilities section of the palette, drag the Action utility icon onto the canvas at the appropriate location on the conversation flow.
   The Action utility is now a node in the conversation flow, and the Action utility properties panel appears.
3. On the properties sheet, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Action utility properties sheet

Property	Description
Node name	The name of this Action node.
Invoke Workflow Studio asset	Select one of the following Workflow Studio components: ○ **Action**: A reusable operation. ○ **Subflow**: An automated process that consists of a sequence of reusable actions, data inputs, and outputs.
Spoke	Name of the scoped application that contains Workflow Studio content that is dedicated to a particular application or record type. For a list of default spokes, see Spokes.
Action/ Subflow	The Workflow Studio action or subflow to be performed in the instance. The **Input mapping** and **Output mapping** areas change depending on your selection. For details about the action, select the link beneath your selection to view it in Workflow Studio.
Wait for response?	Toggle switch that determines whether Virtual Agent waits for a response from the specified action before continuing.
Input mapping	Specifies the variables to be used as input to the selected action. The contents of this area change according to the action that you selected. Options may include string input, referenced records, scripts, and so on. For options that require a password, enable the **Include a password input** toggle switch to prompt the user for a password. Secure inputs must use the password2 data type. Input is securely masked and not viewable by others. **Note:** The *Array.Reference* input data type in Virtual Agent Designer corresponds to the *List.[Table]* input data type in Workflow Studio. For more information, see Action input and output data types.
Output mapping	Specifies the variables to be output by the selected action. The contents of this area change according to the action that you selected.
Advanced (optional)	
Permissions	
Run as	Permissions to use for the action. Select one of the following options: ○ **User who initiates session**: When selected, the action runs using the same permissions that the current user has. ○ **System User**: When selected, the action runs using system privileges, some of which may be unavailable to the current user.
Hide this node	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

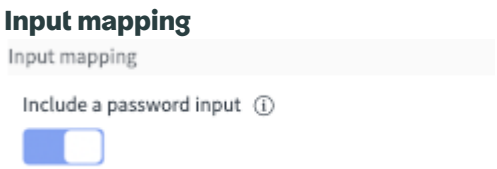
4. Select **Save**.

Virtual Agent secure password inputs

The **Include a password input** toggle switch on the Action utility properties sheet lets you enter passwords securely for use in Virtual Agent conversations.

If the workflow discovers a password2 type as an input, the Action utility properties sheet displays the **Include a password input** toggle switch.

Note:
In previous releases, inputs with a string data type would also display this toggle switch. Starting with the San Diego release, only password2 data types are supported. If you have existing actions that use password inputs, update them to use password2.




If you enable this toggle switch, you see messages about clients that are supported, along with fields that let you do the following:

- Designate the field you want to make secure
- Enter the text you want to use for the password-related prompt
- Enter the text for a confirmation prompt
- Enter the text to use for messages about channels that aren't secure

Important:
To implement secure (password2) inputs in your Virtual Agent custom control, you must adhere to the scoped application requirements in Workflow Studio. For details, see Workflow Studio scoped application requirements for secure inputs.

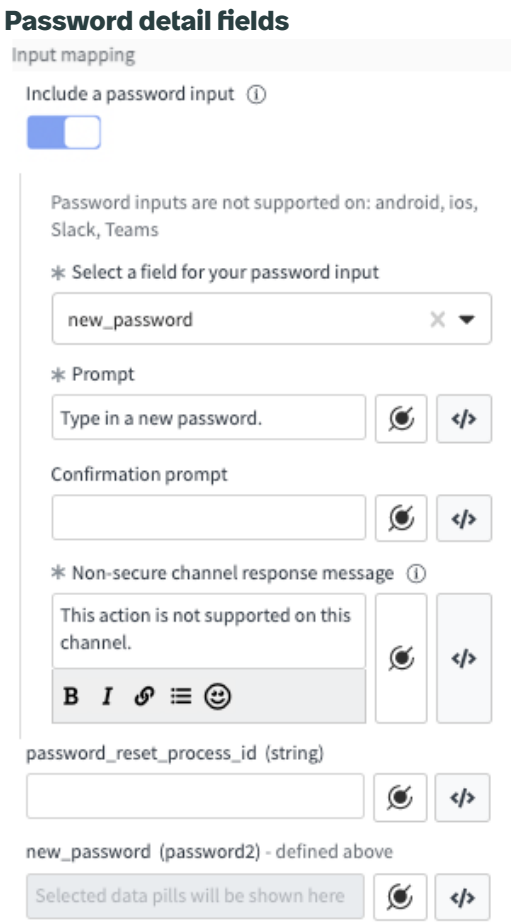© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



These password input type fields are dynamic in the sense that the fields you see map to the fields set for the action when it was created in Workflow Studio. Some of the password2 fields may also be read-only.

For password-related design considerations in Workflow Studio, see Password (2 Way Encrypted) design considerations .

Note the following points about how password-related inputs are handled securely:

- Only users can see the passwords. No one else can.
- The passwords are held in memory on the server and are passed securely to the Workflow Studio Action or Subflow.
- When users enter a password on a channel, users can toggle the Hide text icon to show or hide the password.
- ServiceNow admins can mark a specific channel as secure. If topic authors attempt to include a channel that isn't marked as secure, a warning message appears.

  For more information about creating secure channels, see Create a Virtual Agent conversational custom chat integration configuration.

- Passwords are masked (not readable) in queues, tables, and logs.

Workflow Studio scoped application requirements for secure inputs

Adhere to the following scoped application requirements to implement secure (password2) inputs in your Virtual Agent topics.

You can add secure inputs to Virtual Agent topics in two ways:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Create a secure custom input control that uses a Workflow Studio action or subflow with secure (password2 type) inputs.
- Add an Action utility node to a topic that refers to a Workflow Studio action or subflow that has a single password2 field as an input.

The Key Management Framework (KMF) must be installed and configured for your instance. The scoped application that uses the secure fields must also have the following:

- A *sys_kmf_crypto_module* record, with a related Symmetric Key Wrapping/Unwrapping *sys_kmf_module_crypto_spec* record
- A *sys_kmf_crypto_caller_policy* record with the following properties:
  - Policy name: <modify the auto-generated name>
  - Crypto module: *com_glide_cs_glideencrypter*
  - Type: *Scope*
  - Target Scope: <your application's scope>
  - Application: <the name of your scoped application>
  - Active: *true*
  - Result: *Track*
- A Workflow Studio action or subflow that accepts one or more password2 input fields
- A Script step in the Workflow Studio action that unwraps the password2/KMF passwords as follows:

```
var op = new
sn_kmf_ns.KMFCryptoOperation("global.com_glide_cs_glideencrypte
r","SYMMETRIC_UNWRAPPING").withAlgorithm("AES").withOutputForma
t("KMFNONE");
var old_pw_clear_data = op.doOperation(inputs.old_pw);
var new_pw_clear_data = op.doOperation(inputs.new_pw);
var new_pw_confirmed_clear_data =
 op.doOperation(inputs.new_pw_confirmed);
```

For more information about password2 encryption with KMF, see Password2 encryption with KMF.

Test the Action utility

Test the Action utility to make sure that the integrated action works as intended in the conversation.

Before you begin

Role required: virtual_agent_admin or admin

About this task

When you test the subflow or action associated with the Action utility, you see a test results preview pane that includes preview-only messages. These messages include a link called **View in *Workflow Studio***. This link takes you to the execution details. You can use the execution details to do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Verify what is being returned to Virtual Agent.

  Note:
  Only topic authors have access to the **View in** *`Workflow Studio`* link. In non-production environments, this link is available by default. In production environments, topic authors must enable access to this link by creating a record in the [sys_flow_execution_setting] table for each Workflow Studio asset. This link is not available in conversations where password2 input is used.

- View the subflow or action execution details.

Topic authors can also see the test results in the Conversation Task FDIH Invocations [sys_cs_fdih_invocation_list] table.

Note:
If you have turned on and set up Now Assist in Virtual Agent, you can work with conversational actions and subflows from the Assistant Designer home page. For each assistant, you can test topics, subflows, and actions by using the Assistant Designer home page **Test Assistant** button. Assistant Designer opens a Workflow Studio tab where you can test subflows and actions. For more information on conversational actions and subflows, see Conversational actions and Conversational subflows. You can still integrate actions and subflows that are not conversational from Workflow Studio into Virtual Agent topics via Assistant Designer. The following content is only relevant to actions or subflows that can't be made conversational in Workflow Studio.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. In the Asset library, open the topic with the Action utility that you want to test.
3. Select **Test**.
   If an action or subflow in the test window is slow to respond or appears to be waiting, you see a relevant error message.

   By default, a scheduled job checks the conversation flow every 120 seconds. For more information about scheduled jobs, see Scheduled jobs.

   You can change this interval, as needed. To change the interval, see Specify the action workflow timeout.
4. Troubleshoot the Action utility node:
   - View the execution details.
   - Look at the Conversation Task FDIH Invocations [sys_cs_fdih_invocation_list] table.
5. Select **Save** when you're finished.

Specify the action workflow timeout

Set the length of time before the Workflow Studio Integration Hub action workflow times out.

Before you begin
Role required: admin

Procedure

1. Navigate to **All**.
2. Enter `sys_properties.list` in the filter.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. Select **New** to add the *com.glide.cs.fdih.interactive.timeout* property.

   a. On the form, fill in the fields.

Field	Value
Name	Enter the system property name: `com.glide.cs.fdih.interactive.timeout`.
Description	Enter an explanation for this property, such as: `Virtual Agent Workflow Studio IntegrationHub workflow timeout (in seconds)`.
Type	Enter `integer`.
Value	Enter the number of seconds before the workflow action times out. The default value is 120 seconds. This value should not exceed the value set in the *com.glide.cs.convesation_idle_timeout* system property. The *com.glide.cs.convesation_idle_timeout* property's default timeout value is 7,200 seconds.

   b. Select **Submit**.

Using Virtual Agent with a live agent

Sometimes a conversation requires human intervention. When this occurs, you can transfer the user to a live agent in Agent Chat.

Transferring Virtual Agent conversations to a live agent

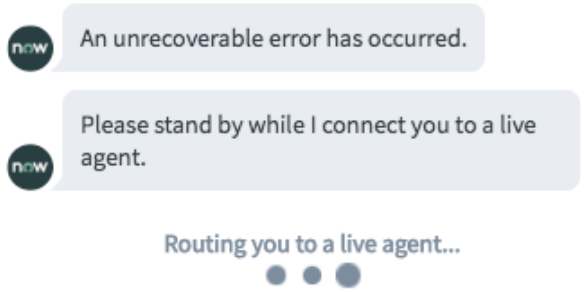
Manage live chat support, including the chat support interface used when a Virtual Agent conversation is transferred to a live agent.

> **Note:**
> The Glide Virtual Agent plugin (com.glide.cs.chatbot) automatically activates the Glide Conversation Server plugin (com.glide.cs) for chat support.

Conversations in Virtual Agent are transferred to a live agent in several ways. This transfer happens automatically when an unrecoverable error occurs, but it can also be triggered by a script in a topic, when a user manually selects that option, or when a user inputs the request during an LLM conversation.

Automatic transfer to a live agent when an error occurs

When a conversation encounters an error, the conversation automatically transfers to a live agent.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If you don't plan to use Agent Chat, be sure to deactivate it in the Agent Chat settings. For more information, see Setting up Agent Chat.

Automatic transfer to a live agent that is triggered by a script in a topic

In situations where you want a support agent to handle the conversation, you can create a script in your topic that uses the `vaSystem.connectToAgent()` method. This method triggers a transfer to a live agent. This option can be useful for conversations involving negative customer sentiment, high priority requests, or requests outside the scope of your topic process. For example:

```
(function execute() {
    if (vaInputs.urgency == 1 && vaInputs.impact == 3)
        if(vaSystem.isLiveAgentAvailable()) {
           vaSystem.connectToAgent()
        }
    })()
```

This script action control transfers the conversation to a live agent based on the incident impact and user urgency. The script uses the `vaSystem.isLiveAgentAvailable()` method as follows:

- In Agent Workspace, the `vaSystem.isLiveAgentAvailable()` method checks the queue schedule and whether agents are online.
- In Connect Support, the `vaSystem.isLiveAgentAvailable()` method only checks the queue schedule.

Note:
The `vaSystem.isLiveAgentAvailable()` method only checks whether agents are online, regardless of their skill set.

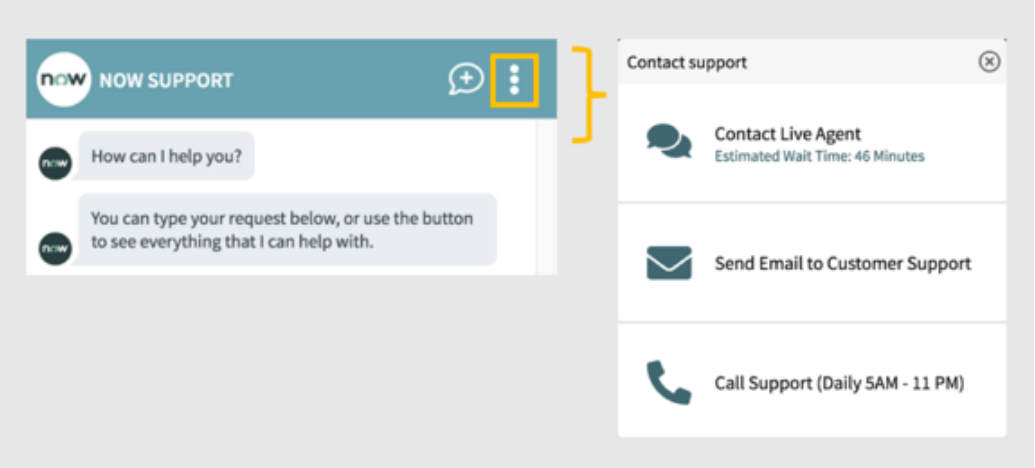
Manual transfer to a live agent using the Contact support option

You can choose the **Contact support** option and then select **Contact Live Agent** to transfer the conversation to a live agent.

Note:
Users running a Virtual Agent messaging integration must enter the command `Hi` or `agent` to access the live agent transfer option. If your environment isn't configured for live agents, the `agent` command doesn't work. For more information, see Integrating Virtual Agent with messaging apps.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Contact Support options in Virtual Agent



Manual transfer to a live agent in LLM conversations

In a Virtual Agent conversation using LLM topics, you can enter a statement such as `I need to talk to a live agent`, `transfer me to a live agent`, or other similar statements. The LLM then turns your chat over to an available live agent.

How Virtual Agent conversation transfers work

For a user engaged in a Virtual Agent conversation, the switch to a live agent is a seamless transfer. When a transfer is triggered, either automatically or by a user manually, the conversation is automatically routed to the appropriate chat support interface, based on your Agent Chat settings. In Agent Chat settings, admins also define the general messages that users see during live agent transfers.

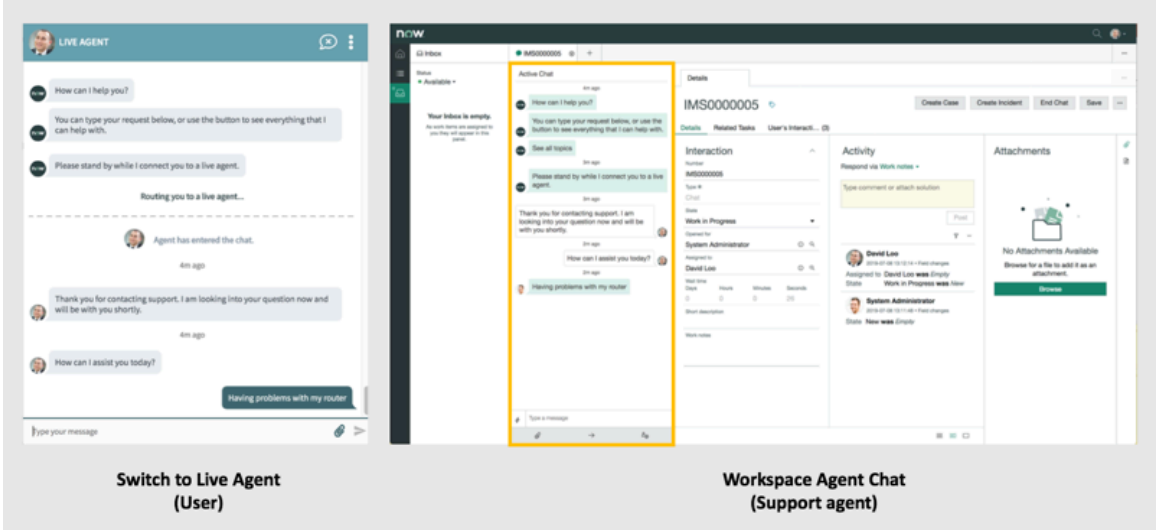
If you're using Agent Workspace, the conversation is automatically routed and assigned to an available live agent. If you're using Connect Support, the conversation is routed to the chat support queue that you specify.

Note:
At least one live agent must be available when transferring from Virtual Agent, otherwise the end user is presented with a `no agents available` message and their conversation isn't transferred.

Transfer to a live agent in Agent Workspace

If you're using Agent Workspace, the Virtual Agent conversation is automatically transferred to a qualified available agent, based on the Chat service channel configuration and the queues that the agent supports, as defined in Advanced Work Assignment.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Switch to Live Agent (User)

Workspace Agent Chat (Support agent)

For the user, the conversation with the agent continues in the Virtual Agent (client) interface. In Agent Workspace, the chat assignment appears in the agent's inbox. When an agent accepts the assignment, the agent joins the conversation and interacts with the user.

Transfer to a live agent in Connect Support

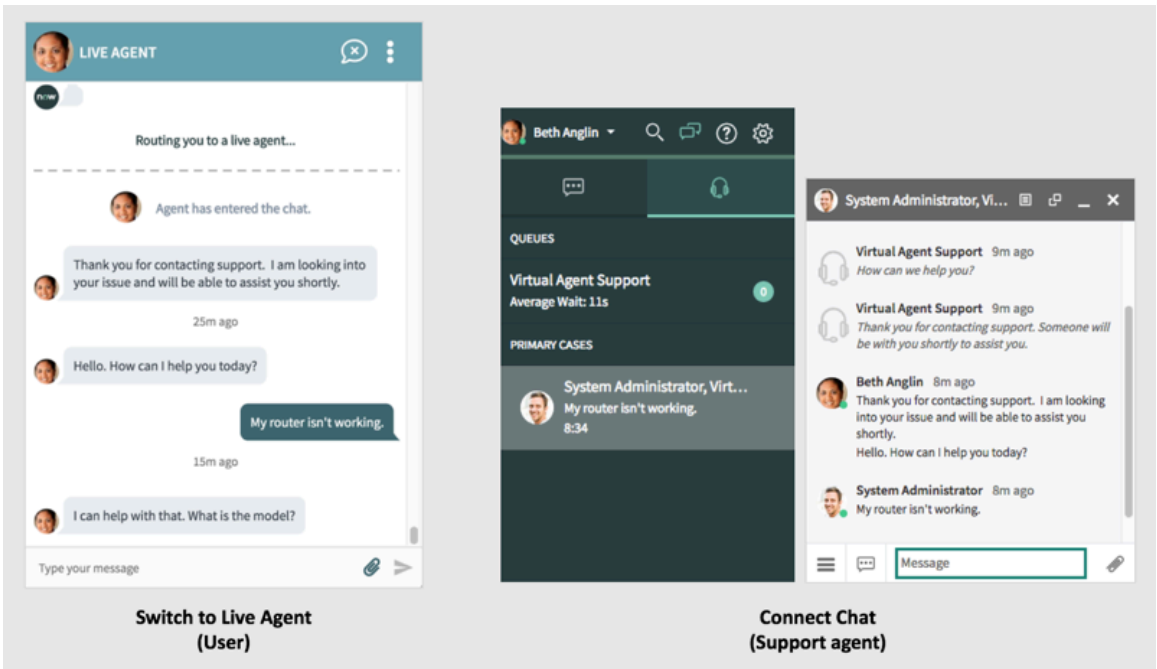If you're using Connect Support, the virtual agent conversation is routed to the appropriate chat support queue. For the user, the conversation with the agent continues in the Virtual Agent client interface. In Connect Support, the agent accepts the queue with the transferred user to join the conversation and interact with the user.



Switch to Live Agent (User)

Connect Chat (Support agent)

In earlier releases, admins used the Chat Setup form to assign the default chat queues for Customer Service Management, HR Service Delivery, and IT Service Management or a global queue to which Virtual Agent conversations were automatically routed if default queues weren't assigned. These queues, which admins defined in Connect Support, are stored in the Chat Queues [chat_queue] table. If you're using Connect Support as the fulfiller interface and must change chat settings, see Setting up Agent Chat for details.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User sentiment

When configured, user sentiment analysis is performed on Virtual Agent and live agent conversations. The user sentiment is stored in the Interaction Insights [sys_cs_interaction_insight] table. For details, see Interaction Insights table.

Closing Virtual Agent and Agent Chat conversations

Virtual Agent and Agent Chat conversations that are abandoned by requesters remain open until they are automatically closed by the scheduled job, *Time Out Abandoned VA Conversations*. This job runs hourly each day.

The default timeout period for abandoned Virtual Agent and live agent conversations is two hours (7200 seconds). The *Time Out Abandoned VA Conversations* job runs hourly to find and close any conversations that have been open longer than the default (or configured) timeout period.

As admins, you can change the default timeout period for closing Virtual Agent and live agent conversations by adding the system property *com.glide.cs.conversation_idle_timeout*. The timeout value that you specify in this property applies to all conversations in supported Virtual Agent and live agent channels, including chat channels (such as Microsoft Teams, Slack, and Workplace from Facebook) and messaging channels (such as SMS). For details, see Change the timeout period for Virtual Agent and live agent conversations.

If you're using Virtual Agent and Agent Chat on multiple chat channels, you can add a channel-level idle timeout value that overrides the timeout value set in the *com.glide.cs.conversation_idle_timeout* property for chat channels. For details, see Override the conversation timeout period by channel.

If needed, you can also change the time at which the Time Out Abandoned VA Conversations job runs.

Note:
If you're using NLU/keyword, you can initiate the Closing Conversation topic with phrases tied to the intent (End Conversations) such as `Bye` or `Exit`. If the chat isn't closing when you enter an appropriate phrase, the NLU model for the setup topics might not be published or assigned.

Closing the conversation in an LLM chat works similarly to NLU/keyword chat. You enter a phrase such as `Bye` or `Exit`, the LLM recognizes the statement, and closes the conversation.

Change the timeout period for Virtual Agent and live agent conversations

Add the *com.glide.cs.conversation_idle_timeout* property to the System Property [sys_properties] table to specify the length of time that an abandoned Virtual Agent or Live Agent conversation remains open (idle). When the *Time Out Abandoned VA Conversations* job runs hourly, it closes any Virtual Agent and Live Agent conversations that have been open longer than the specified time.

1. In the navigation filter, enter `sys_properties.list`.
2. Click **New**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Complete these fields:

Field	Value
Name	Enter the system property name: `com.glide.cs.conversation_idle_timeout`
Description	Enter an explanation for this property: `Idle timeout period (in seconds) for all conversations`
Type	Select `integer`.
Value	Enter the number of seconds that abandoned Virtual Agent or Live Agent conversations remain open, after the requester's last response. This value must be less than 7200 seconds, since the *`Time Out Abandoned VA Conversations`* job runs every 3600 seconds (hourly) to close idle conversations. For example, a value of 1800 seconds (30 minutes) means that an abandoned conversation remains open for 1800 seconds (30 minutes). When the *`Time Out Abandoned VA Conversations`* job runs, it closes any conversations that have been idle longer than 1800 seconds.

b. Click **Submit**.

Override the conversation timeout period by channel

You can set the conversation timeout value for a channel by adding a channel-specific conversation timeout value that overrides the *`com.glide.cs.conversation_idle_timeout`* property. When the *`Time Out Abandoned VA Conversations`* job runs hourly, it closes any Virtual Agent or Live Agent conversations in the channel that have been open longer than the specified time.

1. In the navigation filter, enter `sys_cs_channel.list`.
2. In the Messaging Channels table, locate the channel record to be changed and double click the **Conversation Idle Timeout** field.
3. Enter the number of seconds that abandoned Virtual Agent or Live Agent conversations remain open in the channel, after the requester's last response.

   For example, a value of 1800 seconds (30 minutes) means that an abandoned conversation in the channel remains open for 1800 seconds (30 minutes). When the *`Time Out Abandoned VA Conversations`* job runs, it closes any conversations that have been idle longer than 1800 seconds.
4. Save the value.

Change the Time Out Abandoned VA Conversations scheduled job

To change the time that this hourly scheduled job runs or to make other adjustments to the scheduled job:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. Navigate to **All** > **System Definition** > **Scheduled Jobs** and open the Time Out Abandoned VA Conversations record.
2. In the Scheduled Script Execution form, change the **Time** at which the scheduled job runs. Or, depending on how you want to adjust the timing, change other fields in the form as needed.

   For example, to change the interval at which the job runs, in the **Run** field, select **Periodically**. You then specify the **Repeat Interval** (**Days** and **Hours**) that the job runs and the **Starting** date for the interval. For a description of the other fields that you can change in this form, see Automatically run a script of your choosing.
3. Click **Update**.

   The job runs at the specified time and frequency.

Tracking deflections in Virtual Agent using the deflection topic block

Use the pre-built deflection topic block in ServiceNow® Virtual Agent to track the issues that Virtual Agent helped to resolve or actually resolved for a user. Incident deflection patterns and metrics can help you optimize and analyze the effectiveness of Virtual Agent.

A deflection occurs when Virtual Agent automatically redirect users to self-service options or knowledge base articles that can help them solve their problems without requiring the assistance of a live agent. As a result, the user might not need to create an incident. If necessary, however, Virtual Agent can ask relevant questions and then create an incident in the correct assignment group. This workflow becomes more efficient because no live agent has to get involved.

The Virtual Agent deflection tracking is enabled by default, but you must set up the deflection configuration and deflection patterns to capture certain deflection metrics. For more information, see Create deflection configurations and patterns.

You use deflection configurations to group deflection patterns. A deflection configuration can consist of one or more deflection patterns. Deflection patterns categorize Virtual Agent activities in conversations for tracking deflection metrics. For example, let's say that Virtual Agent adds a user to an email list without creating a task in the Task table to complete the workflow. You can categorize this activity as a self-resolving deflection pattern.

You can view the deflection metrics for each deflection pattern. A deflection pattern can lead to these deflection outcomes in a conversation:

- Confirmed deflection: Virtual Agent provided a resolution to the user, which prevented the user from creating an incident or transferring to a live agent.
- Potential deflection: It is unclear whether Virtual Agent provided a resolution to the user. An example is when search results are displayed to a user in a conversation.
- No deflection: Virtual Agent did not provide a resolution, and the user created an incident or transferred to a live agent.

You can either create new deflection patterns, or use these pre-built deflection patterns in the **VA Default** deflection configuration:

Deflection pattern	Activity	Outcome
VA-Search-served	Virtual Agent showed search results to the user.	Potential deflection
VA-Triage & Created	Virtual Agent creates an incident in the correct assignment group. This	Confirmed deflection

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Deflection pattern	Activity	Outcome
	action improves the assignment accuracy. For example, Virtual Agent identifies a reimbursement-related intent in a user conversation and creates a reimbursement incident instead of a general incident.	
VA-Self-Resolving	Virtual Agent completes the workflow on its own without creating an incident. For example, Virtual Agent adds a user to a distribution list.	Confirmed deflection
VA-Intercept & Resolved	Virtual Agent intercepts an incident that was created by a user and provides a resolution to close the incident. An example is when Incident Auto Resolution resolves an incident.	Confirmed deflection

The deflection configuration and deflection pattern that you create in the deflection settings are mapped to the deflection topic block. For example, the pre-built Issue Auto Resolution topic uses a deflection topic block to track deflections. For more information, see Maximizing code reuse with topic blocks and Virtual Agent pre-built topic blocks.

The deflection metrics are generated and stored in the Deflection Metric [ssa_deflection_metric] table. To view the deflection metrics, navigate to the Deflection Metrics module in the Self-Service Analytics framework.

Note:
The Self-Service Analytics framework requires the Self-Service Analytics Core plugin (com.snc.self_service_analytics_core). For more information, see Activate Self-Service Analytics.

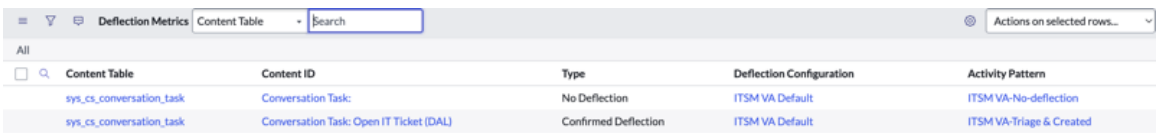Deflection metrics



You can also view the visualization for deflection metrics in the **Overview** tab of the Conversational Analytics Dashboard. For more information, see Legacy - Conversational Analytics Dashboard.

Create deflection configurations and patterns

Set up deflection settings to create deflection configurations and deflection patterns that you can map to deflection topic blocks in Virtual Agent conversation topics. These deflections help you to track the issues that Virtual Agent helped to resolve or actually resolved for a user.

Before you begin

Review Tracking deflections in Virtual Agent using the deflection topic block.

Watch this video for more information about deflection tracking. Virtual Agent Academy: Measure success and user journey in Conversational Analytics

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
For information about configuring components of the Virtual Agent Analytics dashboard (such as Performance Analytics widgets), see Add and configure components.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
   The **Conversational Interfaces Settings** page opens in a new tab.
2. Navigate to **Virtual Agent** > **Deflection metrics** > **View all**.
3. To enable tracking of deflection metrics, turn on the toggle under **Activate**.
4. To create new Deflection Configurations, click **New**.
5. In the Create Deflection Configuration form, enter these deflection configuration properties:

Field	Description
Name	Short and meaningful name for the deflection configuration.
Description	Short description about the deflection configuration.

6. Click **Save**.
   A new Deflection Configuration is created.
7. To add new deflection patterns to a deflection configuration, select the deflection configuration in which you want to add the deflection pattern.
8. Click **New**.

   In the Create Deflection Pattern form, enter these deflection pattern properties:

Field	Description
Name	Short and meaningful name for the deflection pattern.
Outcome	Result of the deflection in a Virtual Agent conversation.
Primary Activity Table	Table that is associated with the activity that you are categorizing in the deflection pattern. For example, if the Virtual Agent is helping to prevent the creation of a task for the activity, then you can specify the task table.

Note:
If you are creating a generic pattern that is used for tracking different deflections, you can leave the **Primary Activity Table** field empty.

The primary activity table that is associated with each activity helps in calculating the deflection rate for a particular business area. For example, if Virtual Agent resolves 42 VPN

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

issues and overall 100 VPN incidents are created, the deflection rate for VPN issues is 42/142 or 30 percent.

9. Click **Save**.

Using Virtual Agent API

Use the ServiceNow® Virtual Agent API app to integrate any chat interface or a bot with ServiceNow® Virtual Agent or Agent Chat. The app is available from the ServiceNow® Store.

Overview of the Virtual Agent API

The Virtual Agent API is a REST API. This API is built on the conversational custom chat integration framework that is provided with Virtual Agent starting in the Paris release. The API enables ServiceNow developers, advanced users, and admins to use Virtual Agent in either of the following ways:

Standalone bot

Use Virtual Agent as a standalone bot that you integrate with enterprise or with any other third-party chat interface that supports conversational interfaces.

Your end users can interact with the Virtual Agent and Agent Chat through multiple channels by using this integration.

Secondary bot

Use Virtual Agent as a secondary bot in an environment that has multiple, specialized bots managed by a primary bot.

In this scenario, a primary bot manages communication with secondary bots on behalf of the end user. A primary bot could be IBM Watson Assistant, Microsoft LUIS, or a homegrown primary bot.

Your secondary bots, such as the ServiceNow bot, might handle specific types of end-user requests, such as service tickets or reservations.

Bot Interconnect

Use Virtual Agent Bot Interconnect as the primary bot in a diverse chat environment. Bot Interconnect creates a unified chat experience and gives your end users access to multiple channels and a wide variety of enterprise tasks that are available from ServiceNow.

The Virtual Agent API is useful for creating server-to-server integrations. However, for integrations that require the transformation of unsupported controls that must be rendered in your existing chat interface, consider using the Custom Chat Integration Framework.

For information about features such as the URL format and the supported request and response parameters in the Virtual Agent API, see Virtual Agent Bot Integration API.

Augment your experiences with the Virtual Agent API (Virtual Agent Academy video)

How the Virtual Agent API works


The following diagram shows how the REST API processes user input from a third-party chat interface or a primary bot, and then generates a bot response.

1. The user provides input to a primary bot or third-party chat interface.
2. The bot sends a POST request JSON to the inbound REST endpoint (via scripted REST API).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. The ServiceNow AI Platform authenticates and processes the request, which is sent to Virtual Agent or a live agent.
4. The ServiceNow AI Platform sends a POST response JSON from the outbound REST endpoint (via REST API) back to the bot.
5. The primary bot or third-party chat interfaces displays the response to the user.

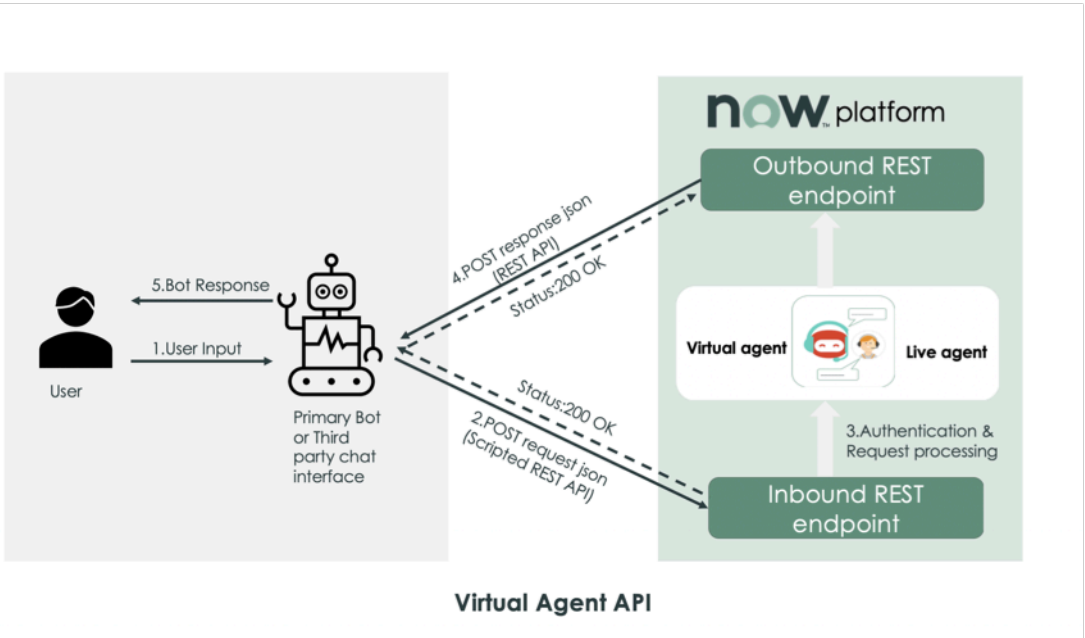Inbound and outbound REST endpoints in the Virtual Agent API



To see a demonstration of the Virtual Agent API and an FAQ, see Getting Started with Virtual Agent APIs on the Community site.

Limitations

The Virtual Agent API does not support the following features:

- Chat branding through this Virtual Agent API integration

Version and release compatibility

Virtual Agent API version and release compatibility

Version	Compatible Releases
3.14.3	Yokohama
3.14.2	Xanadu
3.14.1	Xanadu
3.10.0	Washington DC
3.9.x	Vancouver
3.8.x	Vancouver
3.7.x	Utah
3.5.x	Tokyo
3.0.x	San Diego

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Virtual Agent API version and release compatibility (continued)

Version	Compatible Releases
2.0.x	Rome A subset of features is compatible with Quebec.
1.3.0	Quebec
1.0.12	Quebec
1.0.9	Paris

Note:
The Virtual Agent API requires a Pro license similar to that of Virtual Agent.

Virtual Agent API features

You can use the Virtual Agent API to integrate many of the same features that are available in Virtual Agent and Agent Chat into your chat environment. Feature support varies depending on your ServiceNow release and the Store app version number of the API.

For information about the request and response templates for Virtual Agent API, as well as examples of common use cases, see Virtual Agent Bot Integration API.

Key features

The main features in Virtual Agent API starting with version 1.0.9 include the following:

- Provider authentication using static, hash, and token-based authentication
- Auto-linking user IDs to ServiceNow accounts for a personalized experience
- Virtual Agent transfer to a live agent in Agent Chat
- Intent classification in bot-to-bot integrations through the following strategies:
  - The primary bot determines the user intent and sends the user request to Virtual Agent so that the corresponding topic is displayed to the user.
  - The primary bot sends the user utterance to Virtual Agent so that it can discover the intent and return a prediction confidence score. A higher confidence score indicates that the predicted topic more accurately matches the user utterance.

Version 1.0.12 features

Automatically close idle bot-to-bot conversations

You can automatically close conversations that have been idle for more than one hour. The *Time Out Abandoned B2B Conversations* job runs hourly each day and automatically closes idle conversations that requesters have abandoned.

Conversation states and reason codes in Virtual Agent interaction records

When a user or primary bot ends a conversation, Virtual Agent records the state and reason codes in the interaction records. For example, an end user can type **End** to stop the conversation or click the **X** button to close the chat.

Notifying when a conversation ends

The primary bot is notified when Virtual Agent or Agent Chat conversations end. The primary bot is also notified when it must take control of a conversation. Virtual Agent uses the following flags:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- *completed*: Sent when the conversation with Virtual Agent or a live agent is finished.
- *takeControl*: Sent when the primary bot must take control. This typically occurs when Virtual Agent can't determine the conversation intent after two consecutive attempts (the default value). You can add the *va.bot.to.bot.take.control_times* system property to change the default number of attempts that Virtual Agent tries to determine the conversation intent.

For more information, see Virtual Agent Bot Integration API.

Changes with intents

- Share the NLU confidence score for an intent match if NLU is enabled in Virtual Agent.
- Enable end users to jump directly into a topic based on intent matching by the primary bot.

Version 1.3.0 features

Starting with version 1.3.0, Virtual Agent API supports logging as a system property (*va.bot.to.bot.logging_enabled*).

Virtual Agent API features available in Store release 2.0.x

Virtual Agent API version 2.0.x provides access to more of the same features that are available in Virtual Agent and Agent Chat, including rich control support and notifications.

Support for additional rich controls

Virtual Agent API now supports the following rich controls.

Boolean controls

Boolean controls return responses as strings (either *Yes* or *No*) for easier localization.

For more information about topic localization, see Localizing Virtual Agent conversations.

Virtual Agent API sends the following example JSON for a boolean control:

```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
    "text": "7a36412253a13010ff59ddeeff7b12fb",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "Boolean",
      "group": "DefaultPicker",
      "required": true,
      "nluTextEnabled": false,
      "label": "Sample Response for boolean control",
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
      "options": [
        {
          "label": "Yes"
        },
        {
          "label": "No"
        }
      ]
    }
  ],
  "score": 1
}
```

Custom controls

Topics that use custom controls are now supported. For more information about custom controls, see Customizing Virtual Agent with custom controls.

Table bot response controls

Topics that use table bot response controls are now supported. For more information, see Table bot response control.

All records are returned from Virtual Agent API at once. Virtual Agent will wait for a response from the API client to send the next control. Use the *paginationBreak* property to display records in chunks to the user. For example, if *paginationBreak* is set to 10, the user will see 10 records at a time. When the client is ready to move to the next control, it should send *DONE*.

Virtual Agent API sends the following example JSON for a table bot response control:

```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
    "text": "Yes",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "OutputTable",
      "group": "DefaultOutputTable",
      "label": "Sample Table Rich control",
      "headers": [
        "Number",
        "Short description"
      ],
      "data": [
        [
          "INC0000005",
          "CPU load high for over 10 minutes"
        ],
        [
          "INC0000015",
          "I can't launch my VPN client since the last
 software update"
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
        ],
        [
          "INC0000025",
          "Need to add more memory to laptop"
        ],
        [
          "INC0000035",
          "Reset my password"
        ],
        [
          "INC0000055",
          "SAP Sales app is not accessible"
        ],
        [
          "INC0009005",
          "Email server is down."
        ]
      ],
      "paginationBreak": 10,
      "totalSearchResultsCount": 6,
      "navigationBtnLabel": "Click for more"
    }
  ],
  "score": 1
}
```


HTML bot response controls

Topics that use HTML bot response controls are now supported. For more information, see HTML bot response control.

Virtual Agent API sends the following example JSON for an HTML bot response control:


```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
    "text": "Yes",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "OutputHtml",
      "group": "DefaultOutputHtml",
      "style": "inline",
      "height": 100,
      "width": 100,
      "value": "<html> <body> Sample Response for Html
 control </body> </html> ",
      "imageUrl": null,
      "imageHeight": 0,
      "imageWidth": 0,
      "links": null
    },
```


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
    {
      "uiType": "InputText",
      "group": "DefaultText",
      "required": true,
      "nluTextEnabled": false,
      "label": "some text",
      "maskType": "NONE"
    }
  ],
  "score": 1
}
```

Multi-response bot response controls

Topics that use multi-response bot response controls are now supported. For more information, see Multi-response bot response control.

Virtual Agent API sends the following example JSON for a multi-response bot response control:

```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
    "text": "Done",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "MultiPartOutput",
      "group": "DefaultMultiPartOutput",
      "navigationBtnLabel": "Click for more",
      "content": {
        "uiType": "OutputText",
        "value": "Text response from multiflow control
 example",
        "maskType": "NONE"
      }
    }
  ],
  "score": 1
}
```

Rich text support

Topics that use rich text are now supported. Rich text includes bold or italicized text, hyperlinks, bulleted lists, and emojis.

Additional Agent Chat features

The Virtual Agent API now supports the following features when transferring to Agent Chat.

Pass agent name and avatar

When the primary bot transfers a chat to a live agent, Virtual Agent can send the agent name and avatar to the primary bot. To enable this, activate **Agent names and avatars** in Agent Chat settings.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

An example message payload might look like this:

```
{
"requestId":"f42f3550-5b44-4cde-aa52-9b6756b3131c",
"clientSessionId":"U94CSJLEN",
"message":{
"text":"Live Agent support.",
"typed":true
},
"userId":"U94CSJLEN",
"body":[
{
"uiType":"OutputText",
"group":"DefaultText",
"agentInfo":{
"sentFromAgent":true,
"agentName":"Beth Anglin",
"agentAvatar":"ee4eebf30a0004d963b5c5ac0d734dc4.iix?t=s
mall"
},
"value":"Thank you for contacting support. I am looking
 into your question now and will be with you shortly."
}
],
"agentChat":true,
"score":1
}
```

For more information, see Configure Agent Chat.

Live agent wait time

When transferring to a live agent, the primary bot can receive the wait time and display this to the user. To enable this, select **Wait Time** in the **Live chat wait status** field in Agent Chat settings. The *spinnerType* value is set to *wait_time*. If the **Live chat wait status** is set to **None**, the *spinnerType* value is *none*.

Virtual Agent API sends the following example JSON in the *body* parameter of the payload.

```
{
"uiType":"ActionMsg",
"actionType":"StartSpinner",
"spinnerType":"wait_time",
"message":"Routing you to a live agent...",
"waitTime":"8 Seconds"
}
```

For more information, see Configure Agent Chat.

Send chat history from the primary bot to Virtual Agent

The primary bot can pass chat history to a live agent so that the agent can see the context of the conversation.

Virtual Agent converts the message history to HTML and then to an image.

- The converted image is sent to the live agent as the first message of the chat.
- The primary bot should send the message history in the first request. In any other request after the first request, the message history payload will be ignored.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Only text messages are supported.
- The primary bot can pass any URL as a value in the text message, but the live agent can only view it as part of the image. The live agent will not be able to click the link.

Example message payload:

```
{
   "value": "Help me with password reset",
   "displayName": "able",
   "type": "text"
   "isBotMessage": false,
  }
```

Note:
In the previous example, *type* is case sensitive and should have a value of *text*.

Enriched requests from the primary bot

The Virtual Agent API now supports the following requests from the primary bot.

System parameters and context variables

The primary bot can pass system parameters and context variables as input, and Virtual Agent will honor these#parameters. System parameters such as *liveagent_devicetype*, *liveagent_requester_session_language*, *liveagent_topic*, *topic*, *live_agent_only*, and *liveagent_devicetimezone* are supported. Custom context variables and Agent Chat context variables are also supported.

Example message payload:

```
{
"requestId": "f42f3550-5b44-4cde-aa52-xxxxxxxxxx",
"clientSessionId": "xxxxxxxxxx",
"token": "abcd",
"message": {
  "text": "Test",
  "typed": true
},
"contextVariables": {
  #"requester_session_language": "es"
},
"userId": ""abel.tuter",
"emailId": "abel.tuter@example.com"
}
```

For more information, see Live agent chat context variables and Configure context variables for storing chat-related information.

User timezone

Set the user's timezone by passing it in the request payload. Once set, that timezone setting is retained until it is reset.

Example message payload:

```
{
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
  "requestId": "xxxxxx-xxxxxx-xxxx-xxxx-xxxxxxxxxx",
  "clientSessionId": "xxxxxxxx-xxxx",
  "token": "xxxxx",
 ##"action" : "SET_USER_TIMEZONE",
  "userId": "able.tuter",
  "emailId": "abel.tuter@example.com",
  #"timezone":"Asia/Kolkata"
}
```

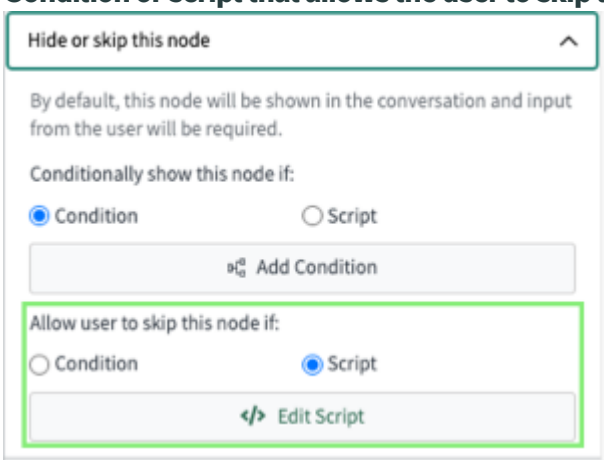
When using this functionality, consider the following:

- The conversation must be open (current) in order to convert date and time to the user's timezone.
- The primary bot must send date and time in one of the following formats:
  - Timezone name. For example, *Asia/Kolkata* or *America/New_York*.
  - Date Time 24-hour format. For example: *YYYY-MM-DD HH:MM:SS*
- The Virtual Agent API uses the timezone specified by the primary bot, even if the timezone it sets differs from the value stored in the [sys_user] table.
- To set the user timezone, send the *SET_TIMEZONE* action. If the timezone name is not valid, the timezone value defaults to UTC time. For example, *2021-02-16 20:13:13*.

Support for node skipping

Virtual Agent API supports skipping a node if it is designed to do so in the topic. For example, in Virtual Agent Designer, you can designate a user input control as skippable in the **Advanced** > **Hide or skip this node** area of the property sheet.

Condition or script that allows the user to skip the node



For more information about defining a node as skippable, see Virtual Agent Designer user input controls.

If a node is marked as skippable, the bot will present that option to the user. If the user skips it, the primary bot should pass the skip command as depicted in the following example.

```
{
"requestId": "f42f3550-5b44-4cde-aa52-9b6756b3131c",
"clientSessionId": "835607",
"token": "snow",
"message": {
"text": "_skip_",
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
"typed": false
},
"emailId": "beth.anglin@example.com",
"userId": "beth.anglin"
}
```

Synchronous handshake support

Note:
These requirements apply to version 2.0.x of the Virtual Agent API. For greater synchronous handshake functionality, upgrade to version 3.0.x, which supports live agent transfer and other enhancements. For details, see Synchronous handshake enhancements.

When enabled, Virtual Agent delivers responses to the primary bot synchronously. If you want to enable communication with Virtual Agent in synchronous mode, you must manually turn off the following features in order for the handshake to work:

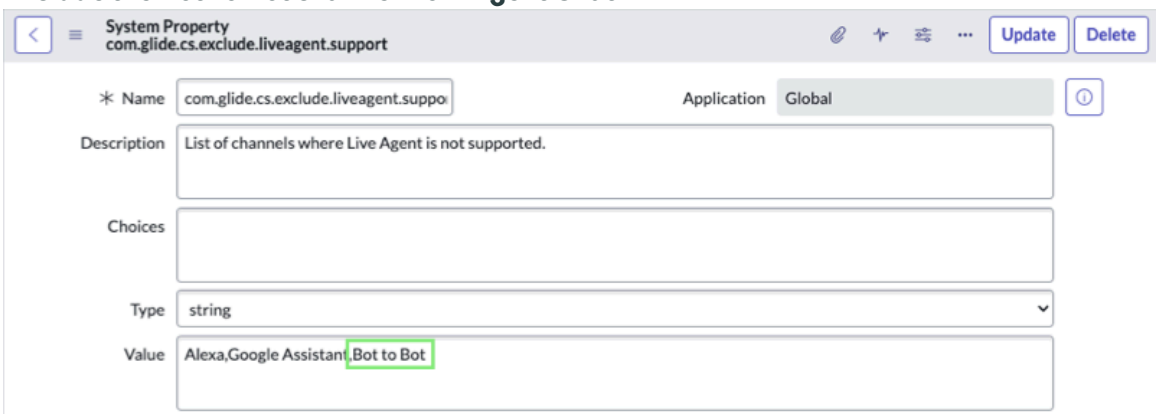
- Agent Chat
- Notifications
- Typing indicators

Note:
Topics that use the following features are not supported in synchronous mode: file upload, the Action utility, and the Pause topic block.

To disable these features and enable synchronous support, follow these steps:

1. Exclude the Bot to Bot channel from Agent Chat.
   a. Navigate to **All**, and then enter `sys_properties.list` in the filter.
   b. Select the *`com.glide.cs.exclude.liveagent.support`* system property to open it.
   c. Add *`Bot To Bot`* to the **Value** field.

Exclude the Bot To Bot channel from Agent Chat




   d. Click **Update**.
2. Navigate to **All**, and then enter `sys_cs_channel.list` in the navigation filter.
3. Select the Bot to Bot record.
4. Clear the **Enable Notifications** check box to disable it.
5. Clear the **Support typing indicator** check box to disable it.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

6. Select the **Synchronous** check box.

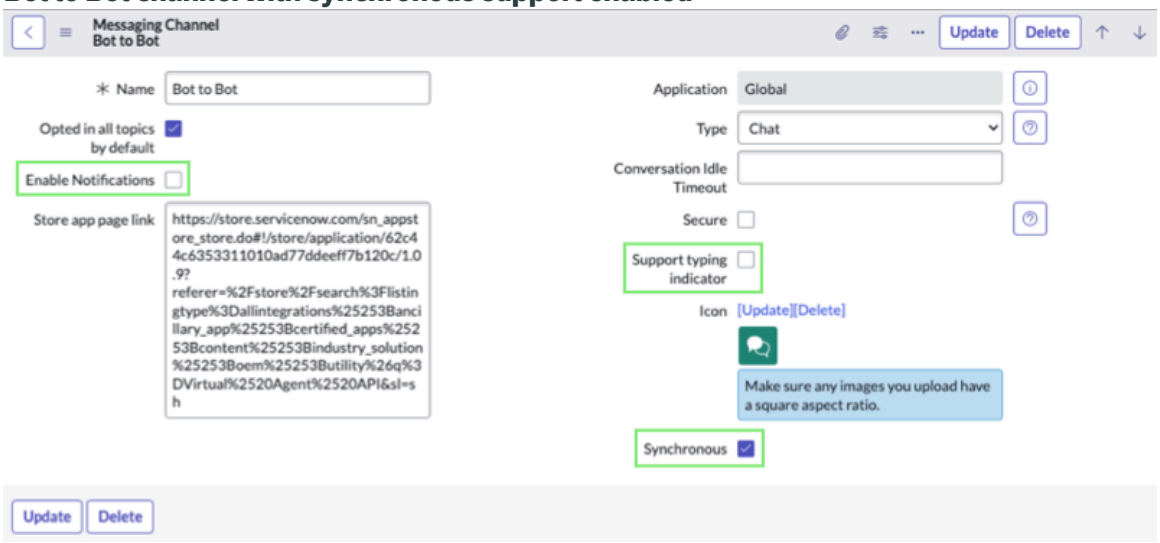Bot to Bot channel with synchronous support enabled



Note:
If the **Synchronous** field is not visible, you can configure the form layout to show it.

7. Click **Update**.

Notifications support

Use Virtual Agent API to send the following types of notifications in the Bot to Bot channel when it is enabled in asynchronous mode:

- Simple: Text-only notifications. Simple notifications are delivered as soon as they arrive.
- Image Card: An image that is uploaded to the server or specified with a URL.
- Record Card: Specified columns from a record in a table.
- Actionable: Provides the user with the opportunity to perform certain actions. Actionable notifications are queued. The user can retrieve them on demand by sending the *Show Notification* command.

For more information, see Configuring Virtual Agent notifications.

Virtual Agent API sends the following example JSON for a simple notification:

```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
    "text": "Done",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "OutputCard",
      "group": "DefaultOutputCard",
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
      "templateName": "Notification",
      "data":
 "{\"sys_id\":null,\"recordDisplayValue\":null,\"messageHead
ing\":\"[Heading]A notification has arrived. You
 can continue the conversation after viewing the
 notification.\",
\"imageUrl\":null,\"tableLabel\":null,\"enableLink\":false,\"mes
sage\":\"[message]A notification has arrived. You
 can continue the conversation after viewing the
 notification.\",\"fields\":[],\"table_name\":null,\"url\":
\"http://192.168.1.9:8080/null.do?sys_id=null\"}"
    }
  ],
  "completed": true,
  "score": 1
}
```


Virtual Agent API sends the following example JSON for an Image Card notification:


```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
    "text": "Done",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "OutputCard",
      "group": "DefaultOutputCard",
      "templateName": "Notification",
      "data":
 "{\"sys_id\":null,\"recordDisplayValue\":null,\"messageHead
ing\":\"[Heading]A notification has arrived. You
 can continue the conversation after viewing the
 notification.\",\"imageUrl\":
\"http://xxxxxx.service-now.com/2b2d0d2653a13010ff59ddeeff7b120d
.iix\",\"tableLabel\":null,\"enableLink\":false,\"message\":
\"[message]A notification has arrived. You can
 continue the conversation after viewing the
 notification.\",\"fields\":[],\"table_name\":null,\"url\":
\"http://192.168.1.9:8080/null.do?sys_id=null\"}"
    }
  ],
  "completed": true,
  "score": 1
}
```


Virtual Agent API sends the following example JSON for a Record Card notification:


```
{
  "requestId": "asd2423-wrr434-weruyt-1234567",
  "clientSessionId": "",
  "nowSessionId": "",
  "message": {
```


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
    "text": "Done",
    "typed": false,
    "clientMessageId": "ABC-123"
  },
  "userId": "beth.anglin",
  "body": [
    {
      "uiType": "OutputCard",
      "group": "DefaultOutputCard",
      "templateName": "Notification",
      "data":
 "{\"sys_id\":
\"552c48888c033300964f4932b03eb092\",\"recordDisplayValue\":
\"INC0010112\",\"messageHeading\":\"[Heading]A notification has
 arrived. You can continue the conversation after viewing the
 notification.\",\"imageUrl\":null,\"tableLabel\":\"Incident\",
\"enableLink\":true,\"message\":\"[message]A notification has
 arrived. You can continue the conversation after viewing the
 notification.\",\"fields\":[{\"fieldLabel\":\"Number\",
\"fieldValue\":\"INC0010112\"},{\"fieldLabel\":\"Short
 description\",\"fieldValue\":\"Assessment : ATF
 Assessor\"}],\"table_name\":\"incident\",\"url\":
\"http://192.168.1.9:8080/incident.do?sys_id=552c48888c033300964
f4932b03eb092\"}"
    }
  ],
  "completed": true,
  "score": 1
}
```


Notifications for the Bot to Bot channel are disabled by default. To enable them, do the following:

1. Navigate to **All**, and then enter `sys_cs_channel.list` in the navigation filter.
2. Open the Bot to Bot record.

   If prompted, enable editing on the record.
3. Select the **Enable Notifications** check box.
4. Click **Update**.

Admins can limit the number of recipients per notification by modifying the *com.glide.cs.per_notification_user_limit* property. The default value is 1000.

Topic switching using the topic name

In addition to using the topic ID or topic intent ID to switch topics, you can use the topic or topic intent name. It is recommended that you only send either the topic ID or the topic name. Currently, if either is incorrect or if the bot is already in the specified topic, Virtual Agent does not send any response. Usage depends on the mode you are using, as follows:

- NLU topic discovery: Use the topic intent name or ID.
- Keyword topic discovery: Use the topic name or ID.

The primary bot can send the *SWITCH* action along with the topic name to switch directly to a #particular#topic.

Example message payload:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
{
  "requestId": "xxxx-xxxx-xxxx-xxxx",
  "clientSessionId": "xxx-xxx-xxx-xxx",
  "action":"SWITCH",
  "topic":{
   "name": "Topic Name"
  #},
  "userId": "beth"
}
```

Typing indicator support

You can enable typing indicators for users and live agents. Currently, typing indicators are displayed as follows:

- Displayed to the agent when the user is typing
- Displayed to the user when the bot is preparing a response

When the typing indicator is enabled, Virtual Agent API sends the **StartTypingIndicator** and **EndTypingIndicator**#actions in the response payload. For example:

```
{
    "uiType":"ActionMsg",
    "actionType":"StartTypingIndicator"
}
```

To send the user typing indicator to a live agent, the client should send#the *TYPING*# action. When the user finishes typing, the #client should# send the*VIEWING*#action. For example:

```
{
  "requestId": "xxxxxx-xxxxxx-xxxx-xxxx-xxxxxxxxxx",
  "clientSessionId": "xxxxxxxx-xxxx",
####"action": "TYPING/VIEWING",
  "userId": "able.tuter",
  "emailId": "abel.tuter@example.com",
  "timezone":"Asia/Kolkata"
}
```

To enable typing indicators, follow these steps.

1. Navigate to **All**, and then enter `sys_cs_channel.list` in the navigation filter.
2. Select the Bot to Bot record.
3. Select the **Support typing indicator** check box.
4. Click **Update**.

Virtual Agent API features available in Store release 3.0.x

Virtual Agent API version 3.0.x provides access to more of the same features that are available in Virtual Agent and Agent Chat, including the ability to upload files from a private URL and synchronous handshake enhancements.

Ending abandoned Virtual Agent conversations

If a conversation is incomplete due to an error, Virtual Agent can ask the primary bot to take control. If the *takeControl* flag is *true*, Virtual Agent (as the secondary bot) will close the conversation automatically. If the primary bot wants to start a conversation, it can send the following action message: `"hi"/START_CONVERSATION`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You can ask the primary bot to take control in the following situations:

- Idle time out: Interaction State is `Closed Abandoned`. State Reason is `No Activity`.
- Technical issues: Interaction State is `Closed Abandoned`. State Reason is `Bot issues`.
- Invalid user input: Interaction State is `Closed Abandoned`. State Reason is `Invalid user input`.

To request that the primary bot take control, send the *`takeControl`* flag in the body of the payload to the primary bot with a value of *`true`*.

Example message payload:

```
{
  "requestId": "xxxx-xxxx-xxxx-xxxx",
  "clientSessionId": "xxx-xxx-xxx-xxx",
   "message": {
      "text":"invalid3",
       "typed":true
       }
   "body":[{
       "uiType":"OutputText",
       "group":"DefaultText",
       "value":"Sorry, I didn't get that. Could you help me by
 answering this?"
       },
       {
       "uiType":"Boolean",
       "group":"DefaultPicker",
       "required":true,
       "nluTextEnabled": false,
       "label":"Choose a value",
       "options":[
          {"label":"Yes"},
          {"label":"No"}
          ]
       }],
    "takeControl":true,
    "score":0
}
```

Improved Virtual Agent API response time

Virtual Agent API responses include parameters like Take Control and NLU Score. These parameters are processed while preparing the response.

Starting with version 3.9.0, you can exclude the Take Control and/or NLU Score parameters from the Virtual Agent API response to improve the response time.

To exclude Take Control and NLU Score parameters from the Virtual Agent API response, complete the following steps:

1. Navigate to **All** > **sys_cs_custom_adapter_property.list**.
2. Search for *`enable_take_control`* and *`send_nlu_score`* properties.
3. Set the value of *`enable_take_control`* property to false to exclude Take Control setting and *`send_nlu_score`* property to false to exclude NLU Score calculation while processing the response. These properties are set to true by default.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Improved topic switching errors and troubleshooting

Topic switching may fail for any of the following reasons:

- The request includes both the topic name and topic ID (keyword topic discovery) or the topic intent name and topic intent ID (NLU topic discovery). Specify one or the other.
- The request includes an invalid topic or intent name or ID.
- The topic/intent name or ID is valid, but Virtual Agent can't run it because it's inactive or not a topic. For example, if the name or ID refer to a topic block or custom control asset.
- The requested topic is already running.
- The requested topic is valid, but a security condition is preventing access. For example, the topic may not be permitted to run in the channel or some other access-control condition may apply.

If topic switching fails, Virtual Agent API responds in the following ways, whether you're using it synchronously or asynchronously:

- If topic switching fails, the conversation is closed with a message stating that the conversation cannot continue. The conversation will no longer remain in an open state.
- The previous request is marked as processed so that a new request can be made without waiting for a timeout.
- The reason for the failure is logged in the system log table (**Automated Test Framework** > **System Logs** > **Errors**).

Synchronous handshake enhancements

Starting with version 3.0.x, Virtual Agent API can transfer to a live agent synchronously. When a user or agent finishes a conversation, the transfer back to Virtual Agent is done synchronously as well. Some system messages and wait time messages are also sent synchronously.

To use synchronous transfer to a live agent, be aware of the following guidelines:

- Configure the Virtual Agent response endpoint. Agent Chat messages will be delivered to the endpoint you specify.
- You must manually turn off Notifications for the instance.
- If you are using synchronous transfer to a live agent, Virtual Agent API sends the typing indicator if it is enabled:

```
{
  "uiType": "ActionMsg",
  "actionType": "StartTypingIndicator",
}
```

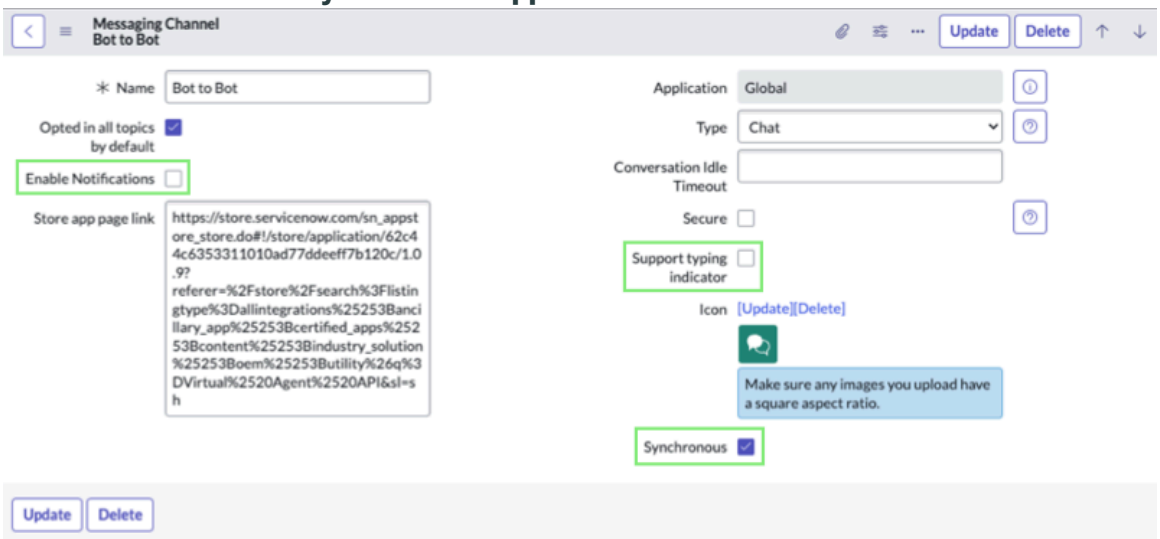
- Topics that use the following features are not supported in synchronous mode: file upload, the Action utility, and the Pause topic block.

To disable these features and enable synchronous support, follow these steps:

1. Navigate to **All** > **sys_cs_channel.list**.
2. Select the Bot to Bot record.
3. Clear the **Enable Notifications** check box to disable it.
4. If you will not be transferring to a live agent in synchronous mode, clear the **Support typing indicator** check box to disable it.
5. Select the **Synchronous** check box.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Bot to Bot channel with synchronous support enabled



6. Click **Update**.

Support for action messages

In addition to passing messages to a ServiceNow® Virtual Agent secondary bot, the primary bot or chat client can pass messages to an agent through Agent Chat. Use the *`action`* parameter passed in the request body to specify how the content should be handled.

Virtual Agent API supports the following action message types:

Supported action message types

actionType value	Description
ChatSubHeader	Outbound message indicating one of the following occurred: • Dynamic translation failed. • Live agent autopilot was initiated and completed.
StartSpinner	Outbound message that starts a spinner when a message is in the pending state due to asynchronous processes, such as AI Search or the profanity filter.
EndSpinner	Outbound message that stops the spinner that was sent previously.
StartTypingIndicatorActionMsg	Outbound message indicating that a user or agent has begun to type (after an agent has accepted the chat).
EndTypingIndicatorActionMsg	Outbound message indicating that a user or agent has stopped typing.
SubscribeToSupportQueue	Indicates that the conversation is set to the support queue.
SubscribeToChatPresence	Outbound message indicating that a live agent conversation has begun.
SwitchToLiveAgent	Outbound message indicating that a live agent has accepted the conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported action message types (continued)

actionType value	Description
SwitchToVirtualAgent	Outbound message indicating that the live agent session has ended, and the conversation is returned to Virtual Agent.
SwitchConversation	Outbound message indicating that a notification was sent. This creates a new conversation, so Virtual Agent switches to the new conversation.
System	Outbound message indicating one of the following: • A live agent has entered the cat. • Either the live agent or the user closed the chat. • The conversation with a live agent has timed out.

Support for silentMessage flag

A silent message is a message that does not require a response. If Virtual Agent receives a request with *`silentMessage=true`*, all subsequent bot messages are suppressed until Virtual Agent receives a request to turn off silent mode (*`silentMessage=false`*).

Example message payload from the primary bot:

```
{
   "token": "BOT_TOKEN",
   "botToBot": true,
   "clientSessionId": "8845022147303010 27f83ee4070f589a",
   "clientVariables": {},
   "requestId": "48450221d23030107300b7756770bc9b",
   "silentMessage": "true",
   "timestamp": 1623916324820,
   "timezone": "GMT",
   "userId": "abel.tuter",
   "emailId": "abel.tuter@example.com"
}
```

Note:
If *`silentMessage=true`*, notifications are not delivered.

Secure file uploads from a private URL

Virtual Agent API supports file uploads up to 1 GB in size from a private URL. The primary bot must pass the user ID, optional provider application ID, and the name of the file. Observe the following guidelines:

- Provider application ID is optional.
- The user ID and provider application ID should be sent before the file name in the payload.
- The end user must have a role specified in the *`glide.attachment.role`* property. For more information, see Require a role to attach files.
- Basic or OAuth authentication is supported, but Message Authentication is not.

Example message payload from the primary bot:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
curl -X POST \
  https://instance.service-now.com/api/now/v1/cccif/media/upload
 \
  -H 'authorization: Basic YWRtaW46YWRtaW4=' \
  -H 'content-type: multipart/form-data; \
  -F user_id=xxxxxx \
  -F provider_application_id=optionalId \
  -F 'file=@SomeFile.png'
```

Virtual Agent API sends the following example JSON:

```
{
  "result": {
    "mediaUrl":
 "http://123.456.7.8:8080//api/now/v1/cs/media/string",
    "name":"imagefile.png",
    "state":"pending",
    "attachmentId":"abcdefghijklmno12345"
  }
}
```

Support for transformation of Virtual Agent API request and response

Virtual Agent API supports transformation of request and response payloads to and fro Virtual Agent API. This is helpful in cases where the primary bot has a common response template across all secondary bots. See Transform Virtual Agent API request and response for more information.

Support for configuring multiple provider applications

Virtual Agent API enables configuration of multiple provider applications to support use cases where there are multiple primary bots using Virtual Agent API and you need to distinguish between them. See Configure multiple provider applications for more information.

Support for Now Assist experience

Now Assist experience in Virtual Agent API offers generative AI skills across multiple provider channels. See Enable Now Assist experience in Virtual Agent APIfor more information.

Agent Chat enhancements in Virtual Agent API version 3.14.3

- When the primary bot transfers a chat to a live agent, Virtual Agent API sends the agent Id, in addition to agent name and avatar, to the primary bot.
- Virtual Agent API sends chat history from primary bot to live agent anywhere in the request during an ongoing conversation. This behavior is controlled by the following system property: allow_storing_history_in_ongoing-conversation. Set the value of the property to true to send chat history anywhere in the request.
- Interaction record contains transcript of chat history along with timestamp of individual messages.

Install the Virtual Agent API

Install the Virtual Agent API app to integrate any chat interface or a bot with ServiceNow® Virtual Agent or Agent Chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

If you're upgrading from a version prior to version 2 and if authentication is required for your instance, you must revert the customization before upgrading. For these versions, the upgrade skips the Scripted REST Service when authentication is turned on. For more information, see Revert a customization.

You must meet the following requirements:

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Review the Virtual Agent API application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.
- Ensure that you activated the Glide Virtual Agent (com.glide.cs.chatbot) plugin, which activates the Conversational Custom Chat Integration (com.glide.cs.custom.adapter) plugin.

  For more information about this plugin, see Activate Virtual Agent.

Note:
The Virtual Agent API requires a Pro license similar to that of Virtual Agent.

Role required: admin or virtual_agent_admin

About this task

The Bot to Bot Control [sys_cs_bot_to_bot_control] table is installed with the Virtual Agent API. This table tracks the number of times that a particular task in a topic is executed. You can use this table for debugging. For example, use it to determine whether Virtual Agent is stuck on a particular control or topic.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Virtual Agent API application using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you may have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.
4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.

What to do next

Review the inbound REST endpoint and configure inbound authentication

Review the inbound REST endpoint and configure inbound authentication

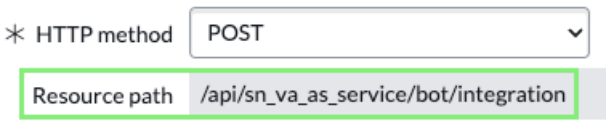
After you install the Virtual Agent API, navigate to the Scripted REST API resource to review the endpoint and set up authentication.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin


Procedure
1. Navigate to **All** > **System Web Services** > **Scripted Web Services** > **Scripted REST APIs**.
2. Select the **VA Bot Integration** record to open it.
3. In the **Resources** tab, open the **BOT Integration** record.
4. Review the inbound REST API resource details.

   The format is: `https://<customer instance>/api/sn_va_as_service/bot/integration`



   For a description of the request parameters and an example send request, see Virtual Agent Bot Integration API.

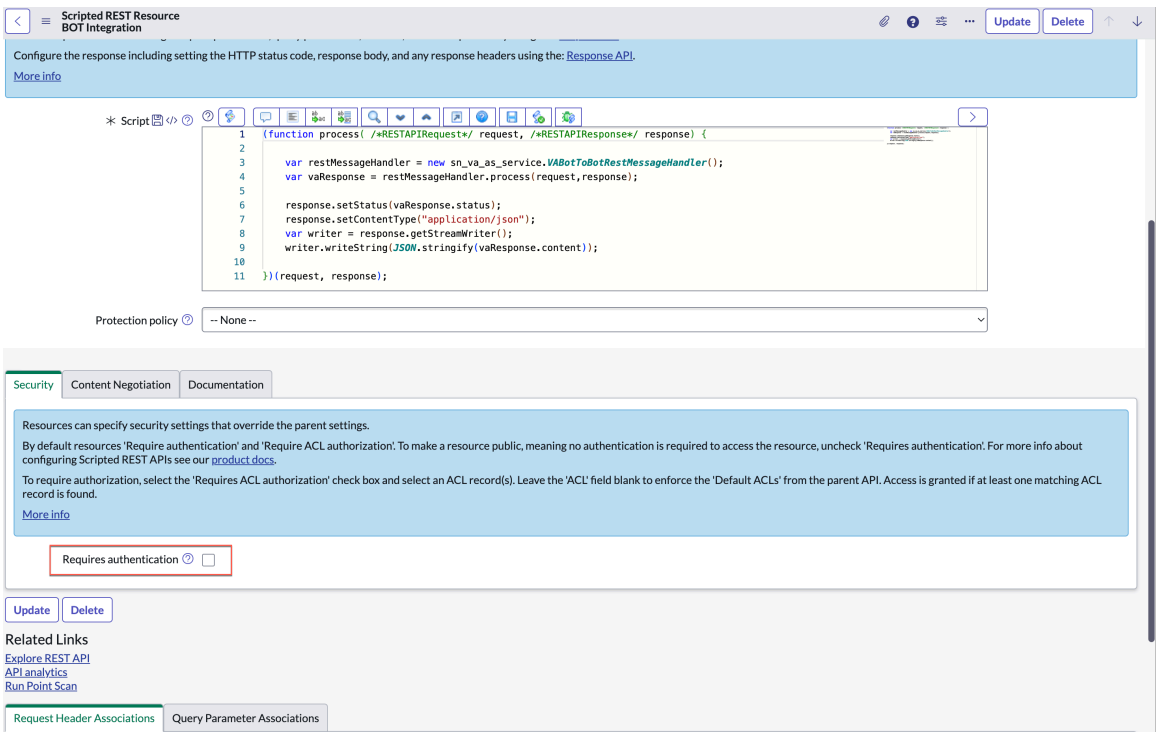5. In the **Security** tab on the same page, select the **Requires authentication** check box.



6. Set up Provider Authentication using any of these methods: Basic, OAuth, Hash, or Static Token.

> **Note:**
> Guest usage via Basic or OAuth is already supported out-of-box when you select **Requires authentication**. To support user account linking, you must use Static or Hash token-based authentication. You can use token-based authentication (Static or Hash) with or without Basic or OAuth authentication. The token can be passed in either the request body or the header. If the token is specified in both places, the one in the header is accepted.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Do one of the following:

- Set up Basic or OAuth authentication.

  To learn more about OAuth authentication and the possible security configurations for scripted REST APIs, see Enable OAuth with inbound REST.

- Set up Message Authentication, which involves configuring either Static or Hash tokens, setting up Provider Authentication, and setting the channel identity. For details, see Configure Message Authentication for inbound communication.

What to do next

If you are using Message Authentication, Configure Message Authentication for inbound communication.

Configure the output response REST endpoint and outbound authentication for the Virtual Agent API.

Configure Message Authentication for inbound communication

You can configure Message Authentication for the Virtual Agent API instead of Basic or OAuth. Message Authentication involves configuring either Static or Hash tokens, setting up Provider Authentication, and setting the channel identity.

Before you begin

Follow the steps in Review the inbound REST endpoint and configure inbound authentication.

Role required: admin

Procedure

1. Configure the token by doing one of the following, depending on the token type:
   - Static token:
     a. Navigate to **All**, and then enter `token_verification.list` in the filter.
     b. Click **New**.
     c. On the Token Verifications form, fill in the fields.

Field	Description
Name	Name of the authentication token, such as `B2BTestAppAuthToken`.
Description	Description of the authentication token, such as `B2B Testing application Auth Token`.
Token	Enter an authentication token that you generated using any general programming or scripting language, or click **Generate Secure Token** in the Related Links.

     d. Click **Submit**.
   - Hash token:
     a. Navigate to **All**, and then enter `hash_message_verification.list` in the filter.
     b. Click **New**.
     c. On the Hash Message Verification form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Fields	Description
Name	Name of the authentication token, such as `B2BTestAppAuthToken`.
Description	Description of the authentication token, such as `B2B Testing application Auth Token`.
Secret	Authentication token (random string).

d. Click **Submit**.

2. Set up Provider Authentication for token-based authentication.

a. Navigate to **All**, and then enter `message_auth.list` in the filter.

b. Click **New**.

c. On the Message Auths form, fill in the fields.

Field	Description
Name	Name of the message authentication, such as `B2B Auth token`.
Provider	Name of the provider.
Group name	Not required.
Service Portal	Not required.
Inbound message verification	Select the Static token or Hash message token that you created.
Outbound message creation	This field is currently not supported in the Virtual Agent API. Select the Static token or Hash message token that you created.
Outbound service token	This field is currently not supported in the Virtual Agent API.

d. Click **Submit**.

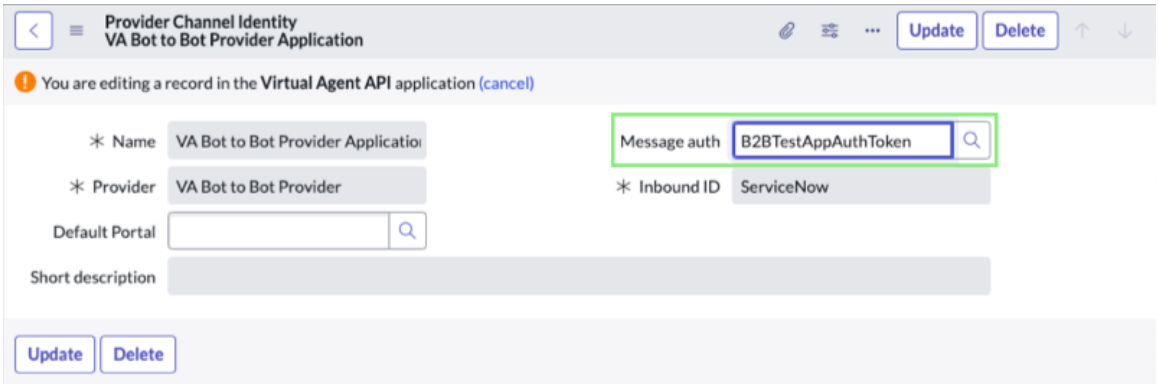
3. Set the channel identity.

a. Navigate to **All**, and then enter `sys_cs_provider_application.list` in the filter.

b. Select the **VA Bot to Bot Provider Application** record to open it.

c. In the Provider Channel Identity form, locate the **Message auth** field and select the message auth that you set up previously.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



d. Click **Update**.


4. For Hash token-based authentication only, send the **x-b2b-signature** in the request headers. The value is the *HmacSHA1* encoded value of the request payload, which uses the token created in the ServiceNow instance. For example, in Postman, follow these steps:

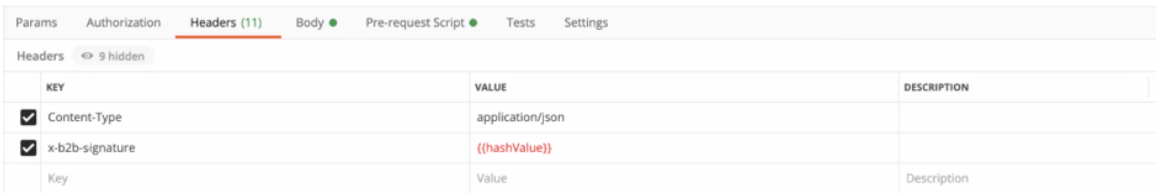   a. In the Headers, set the **x-b2b-signature** to `{{hashValue}}`.



   b. In the Pre-request Script area, set the token as follows:
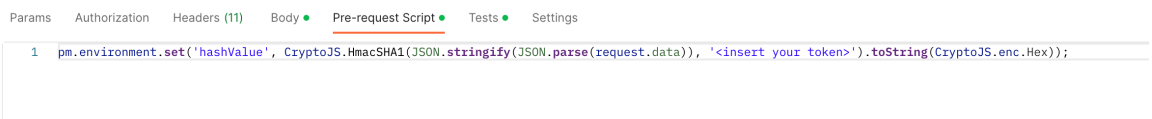
```
pm.environment.set('hashValue',
 CryptoJS.HmacSHA1(JSON.stringify(JSON.parse(request.data)),
 '<insert your token>').toString(CryptoJS.enc.Hex));
```



What to do next

Configure the output response REST endpoint and outbound authentication for the Virtual Agent API

Configure the output response REST endpoint and outbound authentication for the Virtual Agent API

Specify the outbound endpoint URL to which the Virtual Agent responses are posted. Configure outbound authentication.

Before you begin

If needed, specify the Message Authentication for token validation in the Provider Channel Identities [sys_cs_provider_application] table.
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

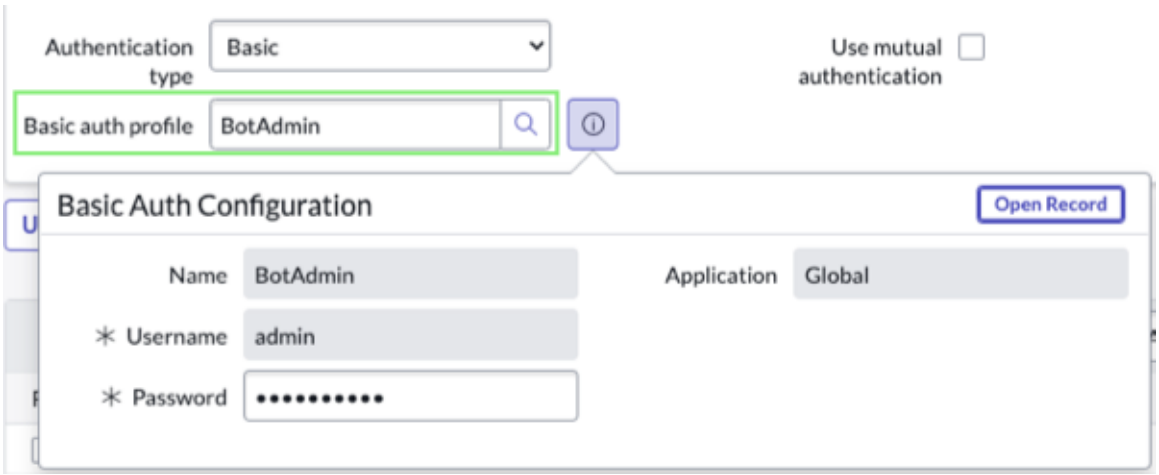
Procedure

1. Navigate to **All** > **System Web Services** > **Outbound** > **REST Message.**
2. Select the **VA Bot to Bot** record to open it.
3. In the **Endpoint** field, enter the response endpoint for the third-party bot, and then click **Update**.

   This is the endpoint for the primary bot server, where the response will have to be sent from the ServiceNow bot to another bot or another ServiceNow instance.

   For example: `http://<customer instance>/demo/rest/service/nowbot/processResponse`
4. In the **Authentication** tab, set the **Authentication type** field to either **Basic** or **OAuth 2.0**, and then click **Update**.

   - **Basic:** In the **Basic auth profile** field, select or create a Basic auth profile. It will contain a username and password.

   - **OAuth:** In the **OAuth profile** field, select or create an OAuth profile. After saving your changes, click **Get OAuth Token** in the related links list.

   For details about configuring basic authentication, see Configure a REST message with basic auth. For information about configuring OAuth 2.0, see Configure a REST message with OAuth.
5. Review the JSON response returned from the endpoint call.
   For a description of the Virtual Agent API response parameters and an example of a successful response, see Virtual Agent Bot Integration API.

Virtual Agent bot-to-bot integration

The Virtual Agent API supports environments that use multiple bots. In this situation, a primary bot communicates with third-party secondary bots, such as a ServiceNow bot.

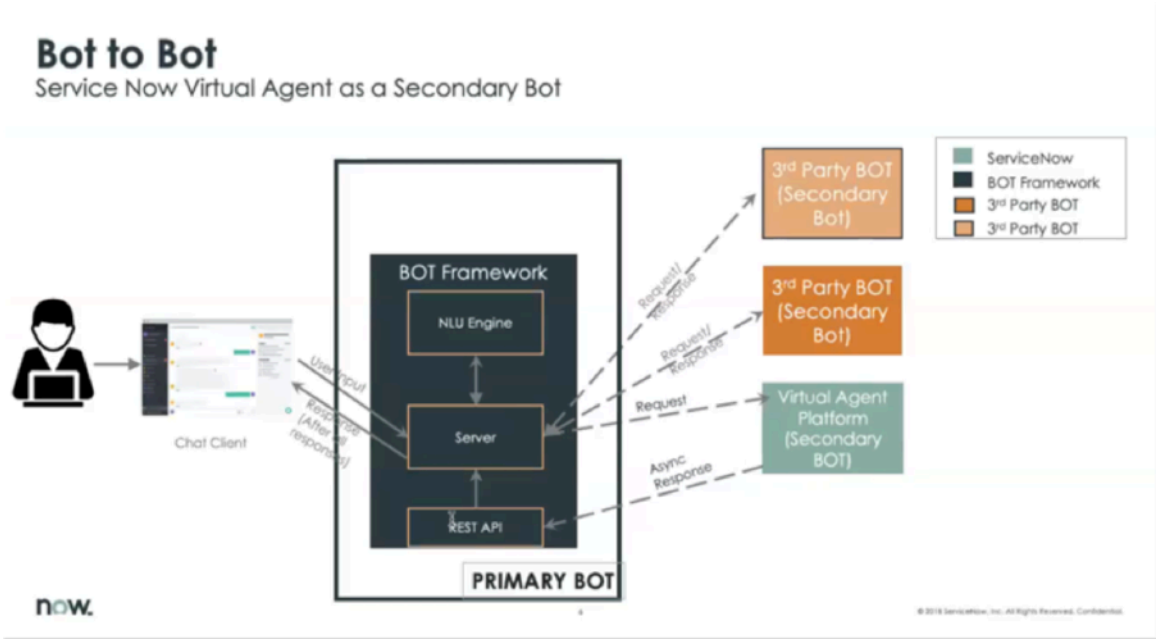
There are two types of bot communication with the primary bot:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- If the primary bot understands an end user's request (intent), the primary bot routes the request to the appropriate secondary bot, which displays the corresponding topic.
- If the primary bot cannot determine where to route a user request, the primary bot can broadcast a user's request to all secondary bots. Each secondary bot returns a prediction confidence score for determining the end user's intent. The primary bot then routes the request to the secondary bot with the highest prediction confidence score.

In both scenarios, the ServiceNow bot informs the primary bot when the request is completed or when it cannot continue handling the request. The primary bot can then determine whether to inform the end user that the conversation is complete or provide further assistance.

Bot-to-Bot ecosystem with ServiceNow Virtual Agent as a secondary bot



The ServiceNow secondary bot uses a standard request and response through REST endpoints. When the request is received through the Bot Framework or an enterprise app seeking to integrate with the ServiceNow bot, the response for a request is sent asynchronously via the API to the requesting system. Virtual Agent supports Live Agent in the channel as well.

Properties for bot-to-bot integrations

You can add system properties to configure the following:

- Starting with version 1.3: Logging for the Virtual Agent API
- Number of times that the Virtual Agent bot tries to get a response
- Bot normalization score

Bot-to-bot properties

Property	Description	Default value
va.bot.to.bot.logging_enabled	Starting with version 1.3: Option that enables logging for the Virtual Agent API. To enable logging, set the value to *True*.	False
va.bot.to.bot.take.control_times	Number of times that Virtual Agent tries to get a response,	2

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Bot-to-bot properties (continued)

Property	Description	Default value
	after which control is returned to the primary bot.	
va.bot.to.bot.score.normalization_factor	A value used to normalize the prediction confidence score returned by Virtual Agent, if the primary bot does not use intents to route requests to the appropriate bot.	1

Closing idle bot-to-bot conversations

In bot-to-bot integrations (Virtual Agent API), abandoned conversations that are "idle" for more than an hour are automatically closed by the scheduled job, *`Time Out Abandoned B2B Conversations`*. This job runs hourly each day.

The default timeout period for abandoned bot-to-bot conversations is one hour (3600 seconds). The *`Time Out Abandoned B2B Conversations`* job closes any bot-to-bot conversations that have been open longer than one hour (3600 seconds). You (admins) can change the default timeout period for idle bot-to-bot conversations by adding the system property *`com.glide.cs.b2b_conversation_idle_timeout`*.

The timeout value that you specify in this property applies to all bot-to-bot conversations involving the Virtual Agent.

Change the timeout period for idle bot-to-bot conversations

Add the *`com.glide.cs.b2b_conversation_idle_timeout`* property to the System Property [sys_properties] table to specify the length of time that an abandoned bot-to-bot conversation remains open (idle). When the *`Time Out Abandoned B2B Conversations`* job runs hourly, it closes any bot-to-bot conversations that have been idle longer than the specified time.

1. Navigate to **All**, and then enter `sys_properties.list` in the navigation filter.
2. Click **New**.
3. On the form, fill in the fields.

Field	Value
Name	Enter the system property name: *`com.glide.cs.b2b_conversation_idle_tim`
Description	Enter an explanation for this property: `Idle timeout period (in seconds) for all bot-to-bot conversations`
Type	Select `integer`.
Value	Enter the number of seconds that the abandoned bot-to-bot conversations remain open, after the requester's last response. For example, a value of 1800 seconds (30 minutes) means that an abandoned bot-to-bot conversation remains open for 1800

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Value
	seconds (30 minutes). When the *`Time Out Abandoned B2B Conversations`* job runs, it closes any conversations that have been idle longer than 1800 seconds.

4. Click **Submit**.

Change the Time Out Abandoned B2B Conversations scheduled job

To change the time that this hourly scheduled job runs or to make other adjustments to the scheduled job:

1. Navigate to **All** > **System Definition** > **Scheduled Jobs** and open the Time Out Abandoned B2B Conversations record.
2. In the Scheduled Script Execution form, change the Time at which the scheduled job runs. Or, depending on how you want to adjust the timing, change other fields in the form as needed.

   For example, to change the interval at which the job runs, in the **Run** field, select **Periodically**. You then specify the **Repeat Interval** (**Days** and **Hours**) that the job runs and the **Starting** date for the interval. For a description of the other fields that you can change in this form, see Automatically run a script of your choosing.
3. Click **Update**.

   The job runs at the specified time and frequency.

Configure multiple provider applications

You can configure multiple provider applications to support AI agents where there are multiple primary bots using Virtual Agent API and you need to distinguish between them.

Before you begin

Role required: admin

Be sure you are in Virtual Agent API application scope.

Procedure

1. Navigate to **All** > **sys_cs_provider_application**.
2. Click **New** to create a new provider application.
3. On the form, fill in the fields.

Field	Description
Name	Name of the provider application, such as `VA API Custom Bot`.
Provider	Select the provider as **VA Bot to Bot Provider**.
Inbound Id	Unique inbound Id used in the request message, for example, custom_1.
Message Auth	Configure Message Authentication with a token for inbound communication. See Configure Message Authentication for inbound communication for more details.

4. Click **Submit**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. Navigate to **All** > **System Web Services** > **REST Message**.
6. Click **New** to create a new REST Message record.
7. In the REST Message record, fill in the form fields.

Field	Description
Name	Name of the REST Message record. This should be the same as the newly created provider application.
Endpoint	The response endpoint of the primary bot.

8. Click **Submit**.
9. In the HTTP Methods section, click New to create a new method or you can override the default GET method.

Field	Description
Name	Name of the HTTP Method. Enter `postMessage`.
HTTP method	Select **POST**.
Endpoint	Enter the response endpoint of the primary bot.
Authentication Type	Configure Basic or OAuth 2.0 authentication as per your requirement. For details about configuring basic authentication, see Configure a REST message with basic auth. For information about configuring OAuth 2.0, see Configure a REST message with OAuth.

10. To use the newly created provider application, pass the Inbound Id of the provider application in the *appInboundId* parameter of the Virtual Agent API request.
    You need to pass the Inbound Id of the provider application in the *appInboundId* parameter for every Virtual Agent API request. The following is a sample Virtual Agent API request that uses the newly created provider application.

```
{
    "userId": "adminuser1",
    "emailId": "admin@example.com",
    "action": "START_CONVERSATION",
    "message": {
        "text": "",
        "typed": true
    },
    "appInboundId": "custom_1",
    "contextVariables": {
        "app_name": "test"
    }
}
```

    You can test the configuration by viewing the outbound HTTP logs to verify that your response endpoint was called.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Transform Virtual Agent API request and response

You can transform Virtual Agent API request and response into supported formats through the scripted extension points provided in Virtual Agent API.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **System Extensions Points** > **Scripted Extension Points**
   - The sn_va_as_service.va_api_payload_transformation extension point transforms primary bot payload into standard Virtual Agent API supported format before processing the request. The sn_va_as_service.va_api_output_transformation extension point transforms Virtual Agent API response into a format supported by the primary bot.
   - Both the scripted extension points have two parameters: *shouldTransform* and *transform*. *shouldTransform* is used to determine whether the implementation is executed. *transform* is used to transform the request or response.
2. If you want to transform the request payload, complete the following steps.
   a. Select sn_va_as_service.va_api_payload_transformation extension point
   b. In the Related Links section, click **Create implementation**.
   c. Update the extension point script as per your requirements.
   In sn_va_as_service.va_api_payload_transformation extension point, the request parameter is an object with two keys: *payload* and *headers*. *payload* is the request payload received from the primary bot, and *headers* are the headers sent in the request payload. The following is a sample implementation.

```
var va_api_payload_transformation = Class.create();
va_api_payload_transformation.prototype = {
    initialize: function() {},

    shouldTransform: function(request) {
        return request.payload.caller === "examplebot";
    },

    /*
    return object for transform function should be in the
 following format
    transformedRequest = {
    payload: request.payload,
    headers: request.headers
    };
    */transform: function(request) {
    var payload = request.payload;
    var headers = request.headers;

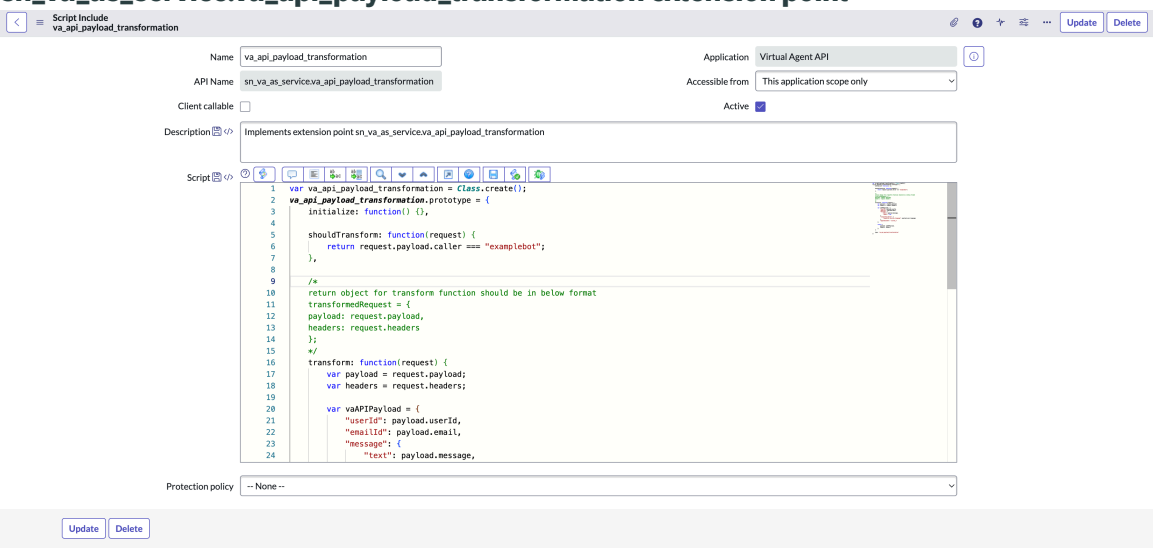
    var vaAPIPayload = {
"userId": payload.userId,
"emailId": payload.email,
"message": {
    "text": payload.message,
    "typed": true
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
 },
 "contextVariables": {
     "requester_session_language": payload.user_language
 },
 "appInboundId": "custom_1"
    };

    return {
 payload: vaAPIPayload,
 headers: headers
    };
},
```

sn_va_as_service.va_api_payload_transformation extension point



d. Click **Update**.

3. If you want to transform the response payload, complete the following steps.

a. Select sn_va_as_service.va_api_output_transformation extension point

b. In the Related Links section, click **Create implementation**.

c. Update the extension point script as per your requirements.
In sn_va_as_service.va_api_output_transformation extension point, the response parameter is an object with two keys: inputPayload and responsePayload. *`inputPayload`* is the request payload received from Virtual Agent API, and *`responsePayload`* is the response from Virtual Agent API which you can use to build the transformed response. Use the appInboundId field of the request payload to determine whether to return true or false. The following is a sample implementation.

```
var va_api_output_transformation = Class.create();
va_api_output_transformation.prototype = {
    initialize: function() {},

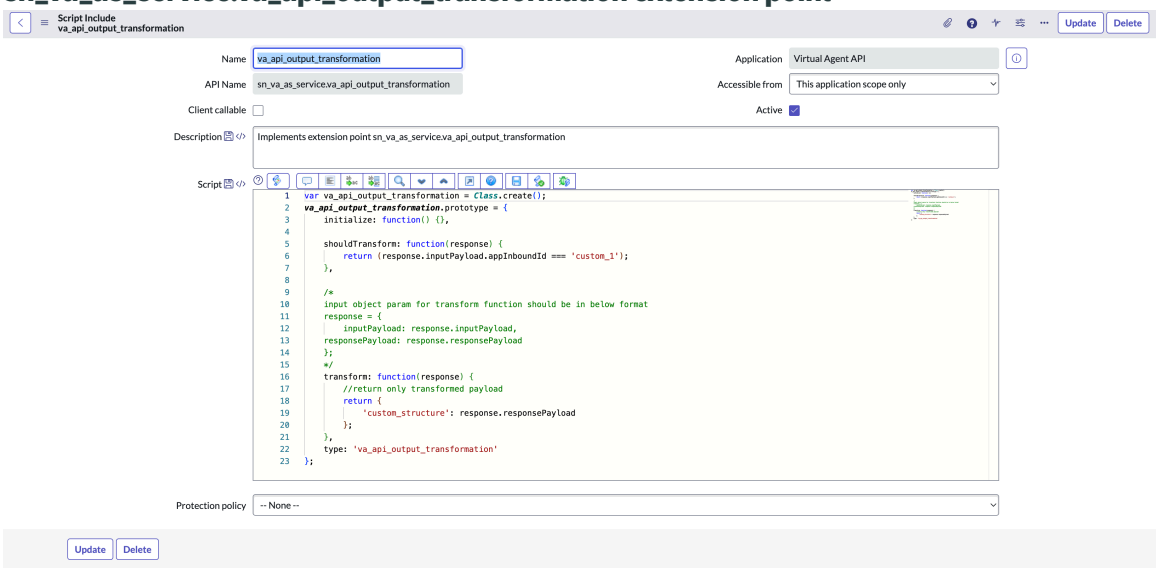
    shouldTransform: function(response) {
 return (response.inputPayload.appInboundId === 'custom_1');
    },
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
    /*
    input object param for transform function should be in
 the following format
    response = {
        inputPayload: response.inputPayload,
 responsePayload: response.responsePayload
    };
    */
    transform: function(response) {
 //return only transformed payload
        return {
     'custom_structure': response.responsePayload
 };
    },

    type: 'va_api_output_transformation'
};
```

sn_va_as_service.va_api_output_transformation extension point



d. Click **Update**.

Enable Now Assist experience in Virtual Agent API

Enable Now Assist experience in Virtual Agent API to support generative AI skills across multiple provider channels.

Before you begin

Set up Now Assist in Virtual Agent. See Configuring assistants overview for more information.

Role required: admin

Procedure

1. Navigate to **All**, and then enter `sys_now_assist_deployment_channel.list` in the navigation filter.
2. Click **New**.
3. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Value
Document Table	Select Provider Channel Identity from the dropdown.
Document Id	Select the Provider Channel Identity [sys_cs_provider_application] record corresponding to Virtual Agent API.
Now Assist Deployment	Select Now Assist for Virtual Agent.
Active	Select the **Active** checkbox.

4. Click **Submit**.

Using Virtual Agent Bot Interconnect in your configuration

Use Virtual Agent Bot Interconnect to create a unified chat experience across multiple channels. You can support secondary bots, such as Google Dialogflow, Microsoft Power Virtual Agents, and ServiceNow® Virtual Agent.

Virtual Agent Bot Interconnect functions as the primary bot in a diverse chat environment. It can help you reduce complexity and create a unified chat experience for your end users. Virtual Agent Bot Interconnect gives your end users access to multiple channels and a wide variety of enterprise tasks that are available from ServiceNow.

Bot Interconnect provides the following benefits:

- Ready integration with third-party bots such as Google Dialogflow and Microsoft Power Virtual Agents.
- Easy integration with ServiceNow Virtual Agent bots on other instances.
- The ability to add any other third-party bot as a secondary bot in the system.
- User authentication and account linking in Bot Interconnect.
- Intent discovery in Bot Interconnect across all skills that are supported by the primary and secondary bots.
- LLM topic conversations across primary and secondary bots
- Conversations occur with one bot at a time.
- Bot Interconnect provides a common conversation model and data storage, which unifies reporting and analytics.

Note:
The Virtual Agent Bot Interconnect requires a Pro license similar to that of Virtual Agent.

Supported Controls

All input controls and bot response controls are supported.

Features and default behavior

Language support

Responses in Bot Interconnect are not translated. Bot Interconnect passes the user language to the secondary bot and expects the secondary bot to return any responses in that language. For example, if the primary bot has a German-speaking

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

user and the secondary instance is localized in German, then German responses are returned to the primary bot.

Timeout value from the secondary bot

The timeout value is the maximum time the primary bot waits for a response from the secondary bot. You can pass a custom timeout value (in milliseconds) in the Bot Interconnect Topic Block properties to override this.

1. Select the **Bot Interconnect Topic Block** node in the shell topic on your primary instance.
2. In the **Additional Params (String)** area, select the script icon </>.
3. Add the following script:

```
return JSON.stringify({ timeout : 30000 })
```

   In this example, 30000 equals 30 seconds.
4. Save and publish the topic.

Closed conversations

Conversations are closed on the secondary bot when a user closes the conversation on Bot Interconnect or when the Bot Interconnect conversation times out.

Note:
Conversations always remain open in Microsoft Power Virtual Agents.

Debug logs

To enable debug logs in the Bot Interconnect instance, set the *sn_va_bot_ic.bot_interconnect.enable.logging* system property to *true*. You will see a conversation ID attached to most logs, as well as the file name.

Pass output from the secondary bot topic to the primary bot

You can apply custom logic to the output of the secondary bot conversation in the Bot Interconnect shell topic.

Support for custom transformation maps

Developers can pass a custom transformation map using the *getTransformerMap* method. A custom transformation map lets you override the default transformation logic.

Example in the DialogflowInboundTransformer script include for Google Dialogflow:

```
/** Custom transformation map based on control types in
 DialogFlow messenger **/

getTransformationMap: function() {
 return {
  'text': 'transformText',
  'info': 'transformInfoCards2',
  'description': 'transformDescription',
  'button': 'transformButtonLink',
  'image': 'transformImage',
  'chips': 'transformChips',

  /* fallback logic in case VA API response format is
 mentioned in Dialogflow custom response payload */
  'servicenow': 'transformServiceNowResponse'
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
  };
},
```

In this example, `text`, `info`, `description`, and so forth are the control types that correspond to the secondary bot. The specified method (such as *`transformText`*) is called to do the transformation for the control type. For each secondary bot response, Virtual Agent uses the *`getControlType`* method to return the control type specified in the transformation map for the secondary bot message. The inbound transformer in Google Dialogflow provides a good example for how to use this.

If the transformation method called does not exist, Virtual Agent API logs it as an error.

Live agent connection

You can enable live agent connection to route a Virtual Agent interaction in the primary instance to a live agent on the secondary instance. The following are the possible connection scenarios.

- If there are no matching agents available in the primary instance to cater to the interaction, Bot Interconnect will evaluate the matching conditions configured in the live agent connection and route the interaction to the appropriate live agent in the secondary instance.
- If there is only one matching connection, the interaction is routed to that connection and agent availability is checked in the secondary instance.
- If there are multiple matching connections, the user is presented with options in the order defined and is connected to the selected connection.
- If there are no matching agents available in the secondary instance, the following message is displayed: "There are no agents available. Please try again later.".
- If there are matching agents available in the secondary instance, the user is redirected to the available live agent who can cater to the interaction.

Autopilot mode is currently not supported in the secondary instance when the conversation is initiated on the primary instance. Live agent connection in the secondary instance works only when the secondary instance is in asynchronous mode.

Install Virtual Agent Bot Interconnect

You can install the Bot Interconnect application if you have the admin role. The application is available from the ServiceNow® Store.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Review the Bot Interconnect application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Bot Interconnect application (sn_va_bot_ic) using the filter criteria and search bar.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

In the list next to the **Install** button, the versions that are available to you are displayed.

3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.

4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
5. Select **Install**.

Using Google Dialogflow as a secondary bot with Virtual Agent Bot Interconnect

With Bot Interconnect, you can use ServiceNow® Virtual Agent as the primary bot with a Google Dialogflow secondary bot. All of the skills and topics available to Google Dialogflow are made available to and executable from channels that are configured for ServiceNow® Virtual Agent.

Prerequisites

This bot configuration requires the following:

- A Yokohama ServiceNow instance
- Virtual Agent Bot Interconnect Store application
- A Google Dialogflow account

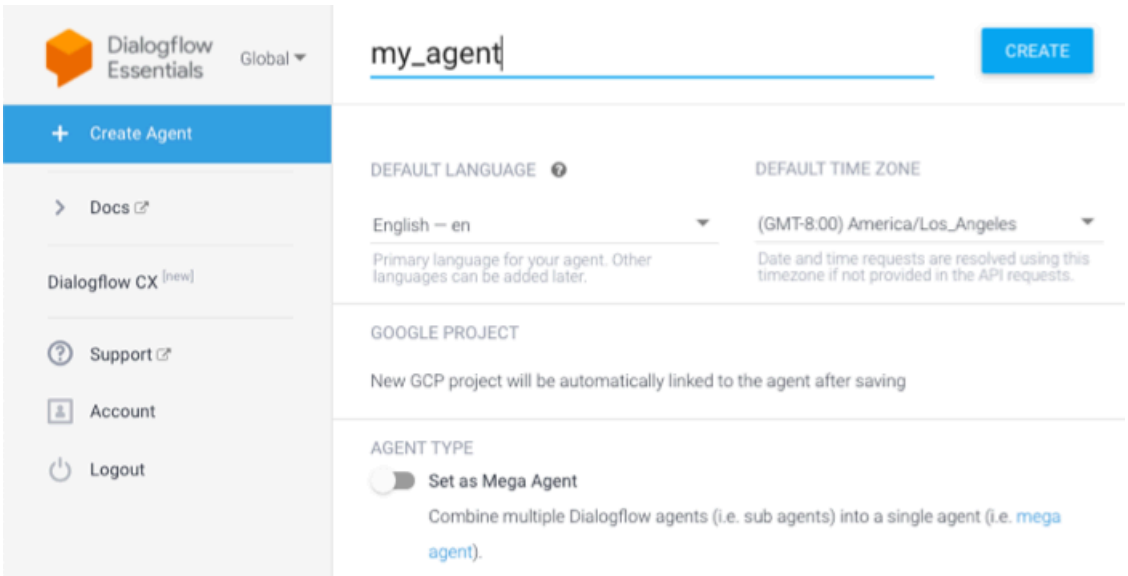
Create a new agent in Google Dialogflow

To use Google Dialogflow with Virtual Agent Bot Interconnect, you must first create a new agent in Google Dialogflow.

Before you begin
Role required: admin

Procedure


1. Create a new agent in Google Dialogflow: https://dialogflow.cloud.google.com/#/newAgent



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

This also creates a new Google project.

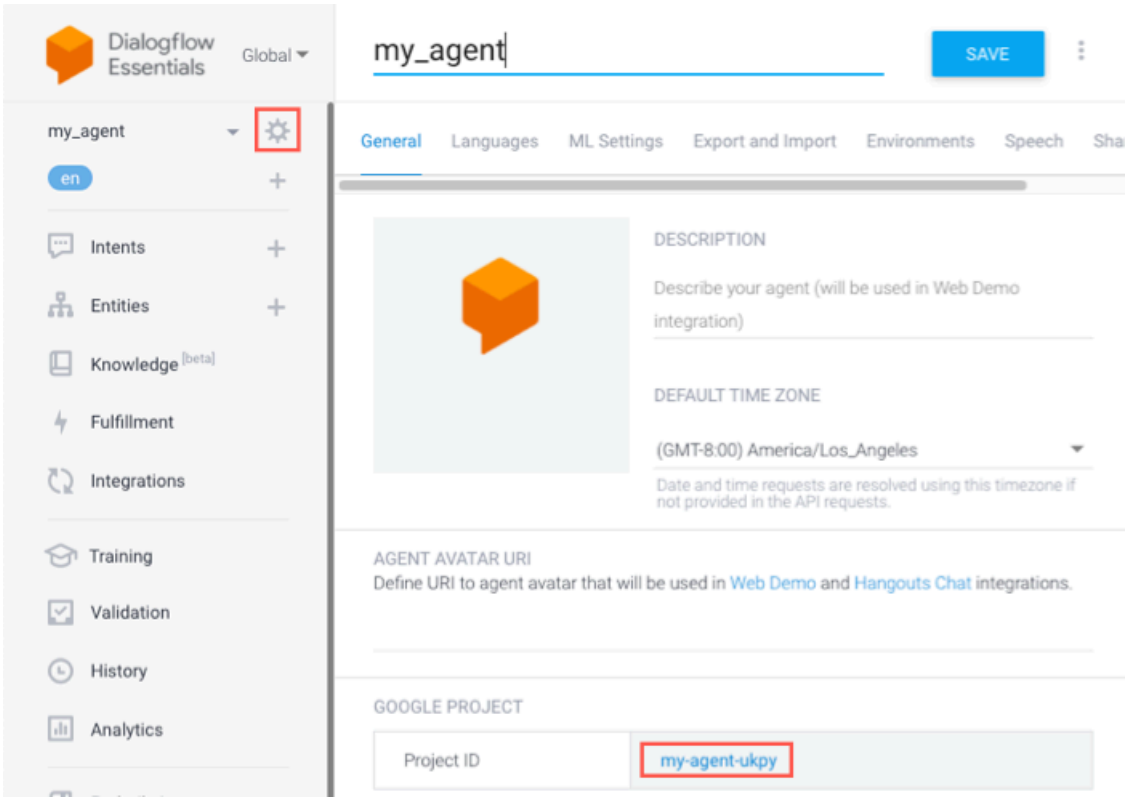2. Select the agent settings icon, and then find the project ID on the **General** tab.



3. Select the Project ID.
   The project dashboard opens.

Create a service account and private key for the Google Dialogflow project

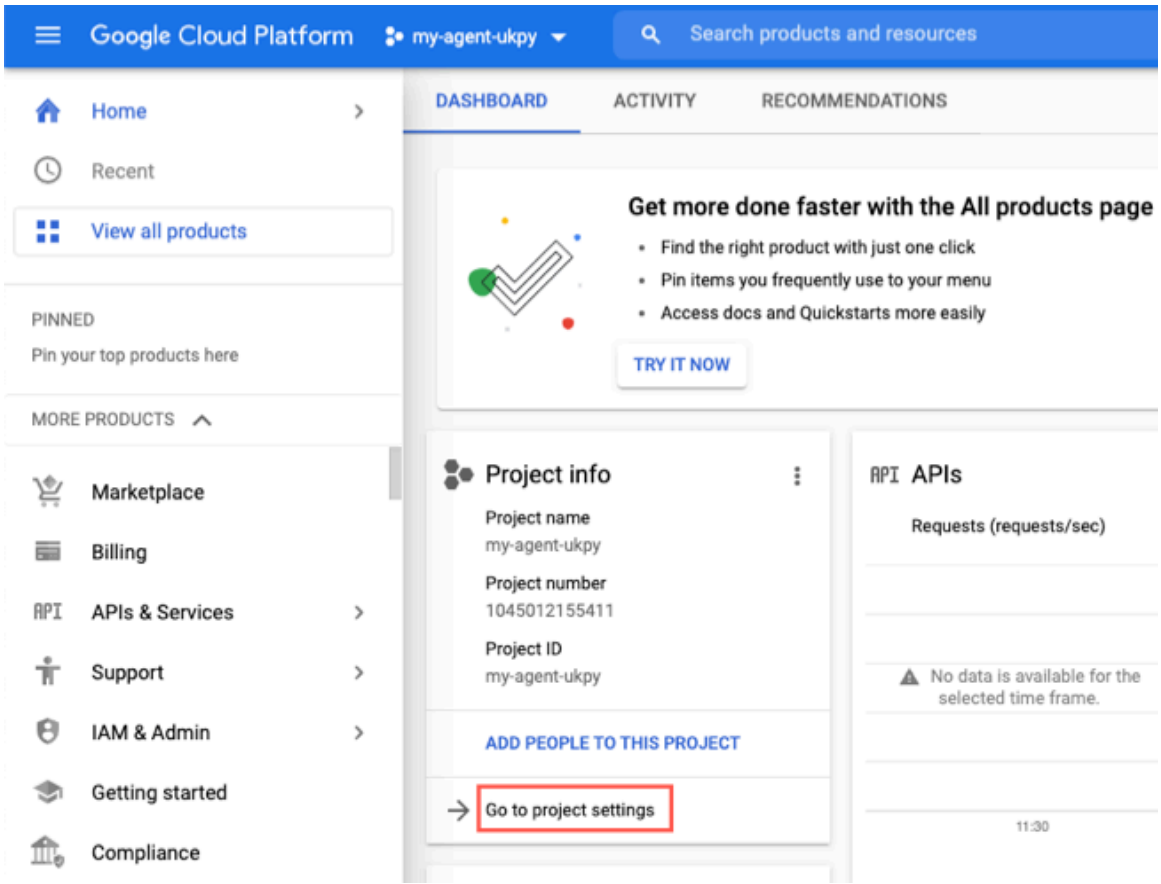
To use Google Dialogflow with Virtual Agent Bot Interconnect, the second step is to create a service account and private key for the new agent in Google Dialogflow.

Before you begin
Role required: admin


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. On the project dashboard page, click **Go to project settings**.




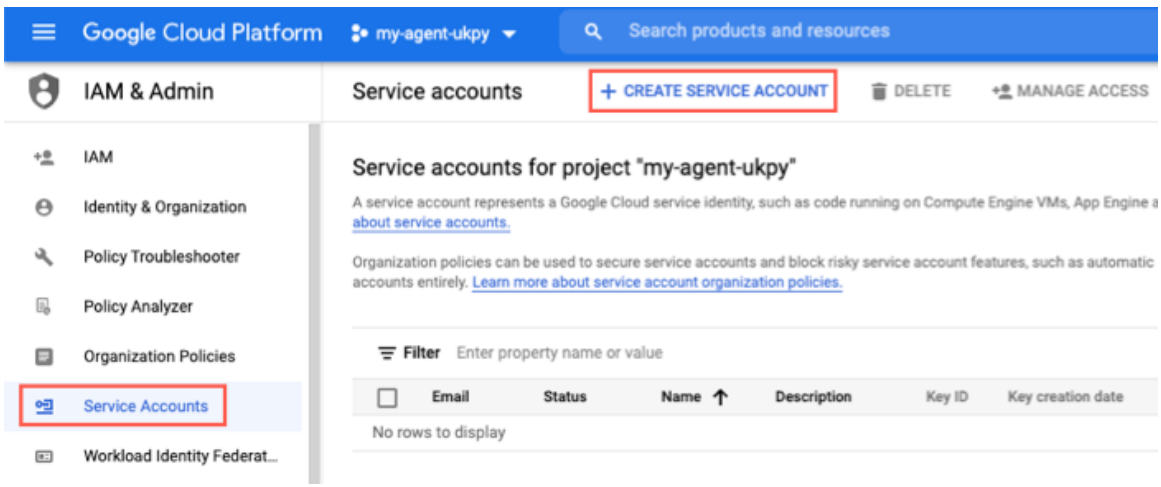2. On the IAM & Admin page, click **Service Accounts**.
3. Click **+ Create Service Account**.




4. Provide a name, and then click **Create and Continue**.
5. Under Select a role, select **Dialogflow** > **Dialogflow API Client**.
6. Click **Continue**.

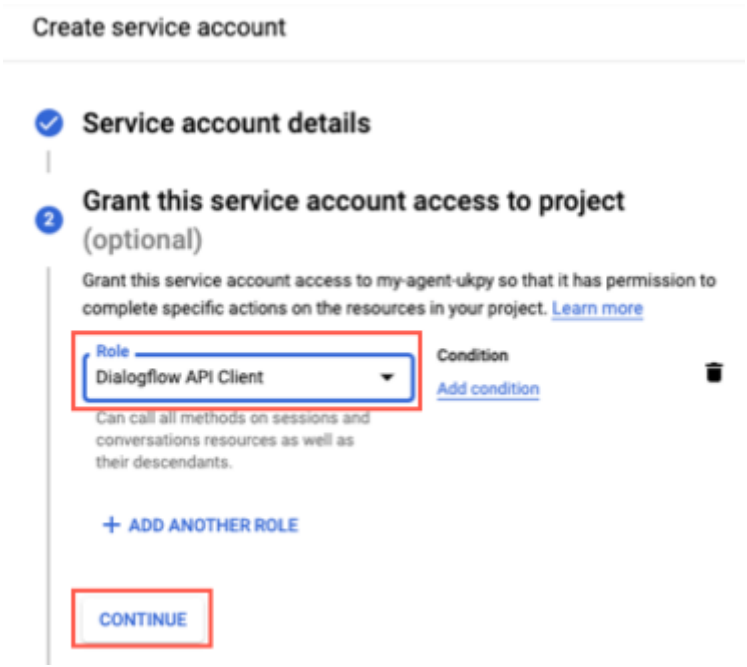© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



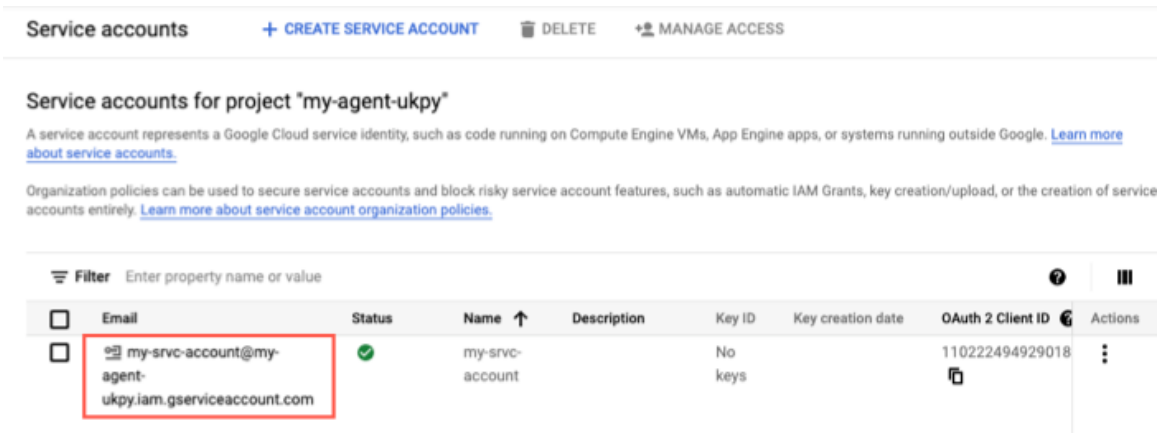
7. Click **Done**.
8. Click the link for the record in the **Email** column.



The Service account details page opens.

9. Click the **Keys** tab.
10. Click **Add Key** > **Create new key**.

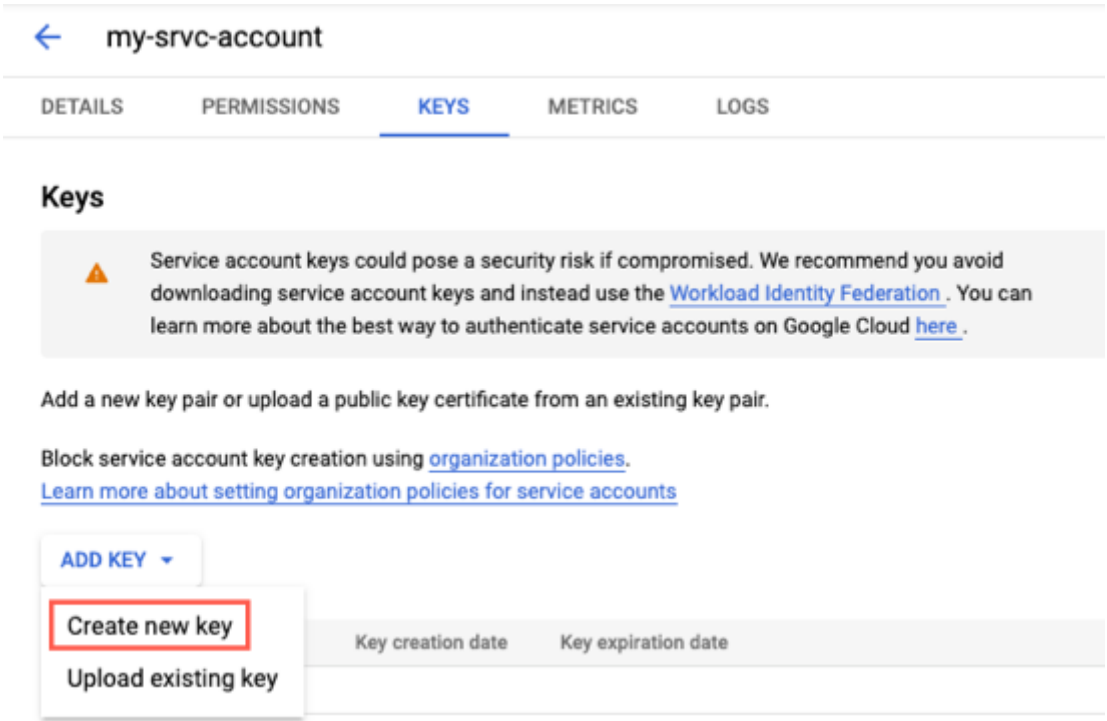© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



11. When prompted for the key type, select **JSON**, and then click **Create**.
    The JSON file is downloaded to your computer.

Generate a Java Keystore file from the JSON private key file

To use Google Dialogflow with Virtual Agent Bot Interconnect, the third step is to generate a JKS file from the JSON private key you created in the previous step.

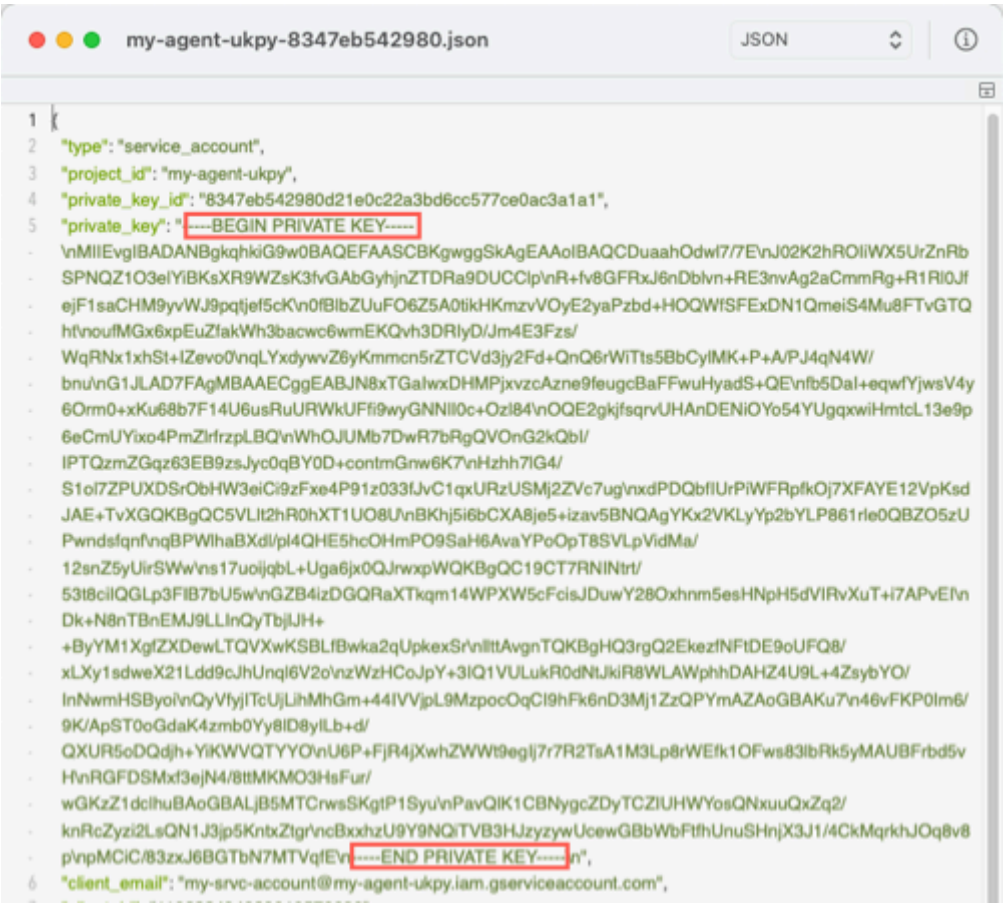
Before you begin

Role required: admin

Procedure

1. In a text editor, open the JSON private key file you downloaded in the previous procedure.
2. Copy the private key text, starting with the BEGIN PRIVATE KEY section and ending with the END PRIVATE KEY section.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



3. Remove the line return characters (\n) from the key:
   a. Paste the key text in a text editor, such as TextEdit or Notepad.
   b. Click **Edit** > **Find** > **Find & Replace** or **Edit** > **Replace**.
   c. In the **Find** field, type `\n`.
   d. In the **Replace** field, press `Ctrl + Enter` or `Alt + Enter`.
   e. Click **Replace All**.
   The key text will be formatted with line breaks.
4. Save the formatted private key text as a `.pem` file.
   For example, `privatekey.pem`.
5. In a web browser, open the URL that is listed in the JSON file for the *`client_x509_cert_url`* parameter.
   For example, https://www.googleapis.com/robot/v1/metadata/x509/my-srvc-account%40my-agent-ukpy.iam.gserviceaccount.com. The certificates page opens.
6. Copy the certificate that has the same private key ID that appears in the JSON file.
7. Replace \n with line breaks in the certificate, as described in step 3.
8. Save the formatted certificate as a `.pem` file.
   For example, `certificate.pem`.
9. Navigate to the folder that contains both the private key and certificate files.
10. Open a terminal window:
    a. In Mac OS, right-click or ctrl-click the folder and select **New terminal at folder**.
    b. In Windows, right-click the folder and select **Open in terminal**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

11. At the terminal's command prompt, create the JKS file as follows:

    a. Enter the following command:

    ```
    openssl pkcs12 -export -in [certificate file name] -inkey
    [private key file name] -certfile [certificate file name] -out
    testkeystore.p12
    ```

    For example, if certificate.pem is the name of the certficate and privatekey.pem is the name of the private key:

    ```
    openssl pkcs12 -export -in certificate.pem -inkey
    privatekey.pem -certfile certificate.pem -out testkeystore.p12
    ```

    b. When prompted for a password, enter the password of your choice using a minimum of six characters.

    A PKCS 12 file is created with the name `testkeystore.p12`.

    c. Enter the following command:

    ```
    keytool -importkeystore -srckeystore testkeystore.p12
    -srcstoretype pkcs12 -destkeystore dialogflow.jks
    -deststoretype JKS
    ```

    You will be prompted for a password multiple times. Use the same password you created in the previous step.

Result
A JKS file is created.

Configure connections to Google Dialogflow in your Virtual Agent Bot Interconnect instance

To use Google Dialogflow with Virtual Agent Bot Interconnect, the fourth step is to configure the connection in your ServiceNow® instance.

Before you begin
Generate a Java Keystore file from the JSON private key file.

Role required: admin

Procedure
1. Navigate to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
2. On the Connection & Credential Aliases page, click the **Bot Interconnect Dialogflow Integration** record.
3. Under Related Links, click **Create New Connection & Credential**.
4. Use the JSON file you downloaded in a previous step to fill in the form.

Connection & Credential Aliases New record form

Field	Description
Connection Name	A name for your credential. For example, `Dialogflow Connection`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Project ID (project_id)	The value that corresponds with the *project_id* parameter in the JSON file. For example, *my-agent-ukpy*.
Service Account Email (client_email)	The value that corresponds with the *client_email* parameter in the JSON file. For example, *my-srvc-account@my-agent-ukpy.iam.gserviceaccount.com*.
Private Key ID (private_key_id)	The value that corresponds with the *private_key_id* parameter in the JSON file. For example, *8347eb542980d21e0c22a3bd6cc577ce0ac3a1a1*.
Keystore Password	The password that you used when you created the Java Keystore (JKS) file in a previous step.
Keystore	Select the JKS file you created in a previous step.

5. Click **Create and Get OAuth Token**.

Create a Virtual Agent Bot Interconnect shell topic to call Google Dialogflow topics

To access topics in the Google Dialogflow secondary bot, you must create at least one Virtual Agent Bot Interconnect topic.

Before you begin

Create one or more intents in Google Dialogflow. For details, refer to the Dialogflow documentation.

Configure connections to Google Dialogflow in your Virtual Agent Bot Interconnect instance.

Role required: virtual_agent_admin or admin

About this task

There are two ways to integrate Google Dialogflow intents with Bot Interconnect

- Create one Virtual Agent Bot Interconnect topic per Dialogflow intent.

  In case of NLU topics, each Virtual Agent topic has the same name as a single Dialogflow intent. For example, if you have two Dialogflow intents named **order a drink** and **book a ticket**, then you would create two Virtual Agent topics also named **order a drink** and **book a ticket**.

  In case of LLM topics, each Bot Interconnect topic has the same name and description as the corresponding Google Dialogflow topic.

- Map multiple Dialogflow intents to a single Virtual Agent Bot Interconnect topic. This scenario is applicable only for NLU topics.

  Create a Virtual Agent topic for your Dialogflow intents and name it accordingly. For example, **DG ordering issues**. In this scenario, the Dialogflow intents are mapped to the topic as either keywords or utterances, depending on your method of topic discovery. So if you have two Dialogflow intents named **order a drink** and **book a ticket**, you would add both phrases to the topic as keywords or you would add them as utterances to the topic's corresponding intent.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Create a topic for your Dialogflow intents.
   In case of NLU topics, include the Dialogflow intent names as either keywords or utterances in the corresponding ServiceNow Virtual Agent intent. In case of LLM topics, the topic name and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

description of the Bot Interconnect topic should match the topic name and description of the Google Dialogflow topic.

3. On the **Flow** tab, drag a Topic Block utility node onto the canvas.
4. Select the node, and then fill in the form as follows:

Topic Block Properties form

Property	Description
Topic Block	Select **Bot Interconnect** topic block for NLU topics and **Bot Interconnect - LLM** topic block for LLM topics.
Action Name	Enter: `sn_va_bot_ic.dialogflow_bot_interconnect_integration`
Action Type	Enter `subflow`.

5. Click **Save**.
6. Click **Publish**.

What to do next

Test your configuration. You can execute the topics that are available in the secondary bot from channels where Bot Interconnect is deployed.

Using Microsoft Power Virtual Agents as a secondary bot with Virtual Agent Bot Interconnect

With Bot Interconnect, you can use ServiceNow® Virtual Agent as the primary bot with a Microsoft Power Virtual Agents secondary bot. All of the skills and topics available to Power Virtual Agents are made available to and executable from channels that are configured for ServiceNow® Bot Interconnect.

Prerequisites

This bot configuration requires the following:

- A Yokohama ServiceNow instance
- Virtual Agent Bot Interconnect Store application
- A Microsoft Power Virtual Agents account for testing

Create a JavaScript function in Microsoft Azure using Visual Studio Code

To use Power Virtual Agents with Virtual Agent Bot Interconnect, you must create a JavaScript function in Microsoft Azure using the sample code files in Bot Interconnect.

Before you begin

You will need a Microsoft Azure account.

Role required: admin

Procedure

1. Sign into Microsoft Azure and create a JavaScript function.
   This involves configuring your environment and creating a local project. Refer to the Microsoft documentation for details.
2. Go to Create an Azure Function for Microsoft Power Virtual Agents as Secondary bot with ServiceNow Bot Interconnect setup (KB1112368), and then do the following:
   You need to login to the Support portal to access the knowledge article.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Copy the code in the `index.txt` file in the Attachments section into the `index.js` file in your Azure project.

b. Copy the code in the `function.txt` file in the Attachments section into the `function.json` file in your Azure project.

c. Save both files.

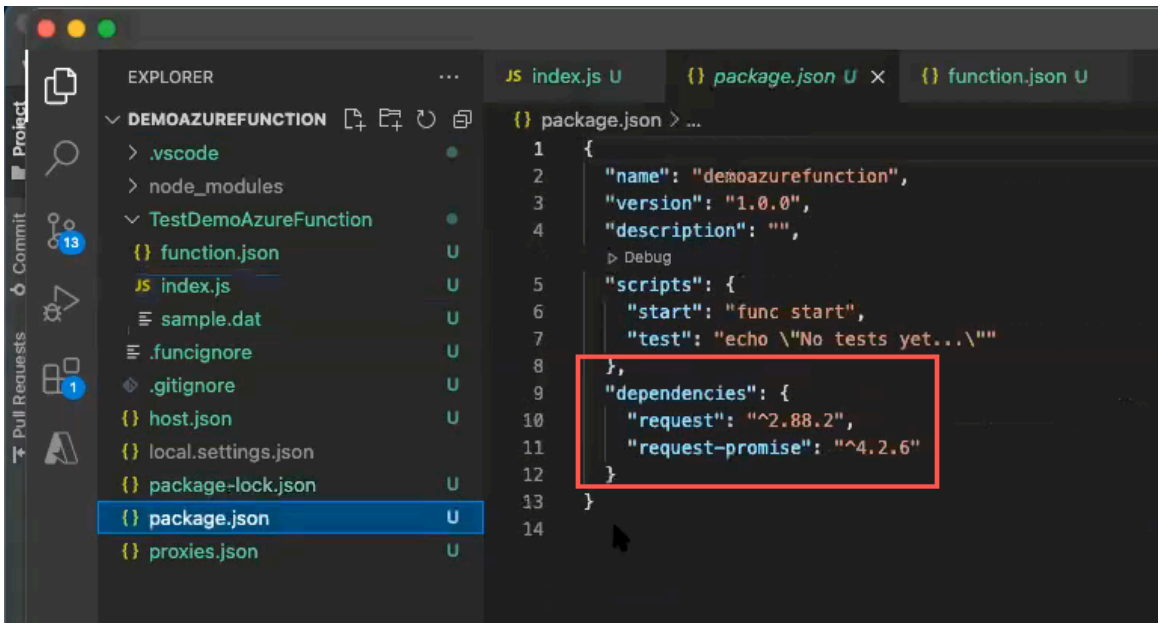
3. Install the *`request-promise`* libraries.

a. In a command line window, change directories to the folder where you created the Azure project.
For example, enter `cd DemoAzureFunction`.

b. At the prompt, enter: `npm install --save request`

c. At the prompt, enter: `npm install --save request-promise`

The dependencies are added to the `package.json` file in your project.




4. Deploy the project to Azure as described in the Microsoft documentation.

5. From the Azure portal, navigate to **All Resources**.

6. Select the name of the function app that you've created.

7. On the Overview page, select the function you've created in the Functions tab, and copy the function URL from the Get function URL option.

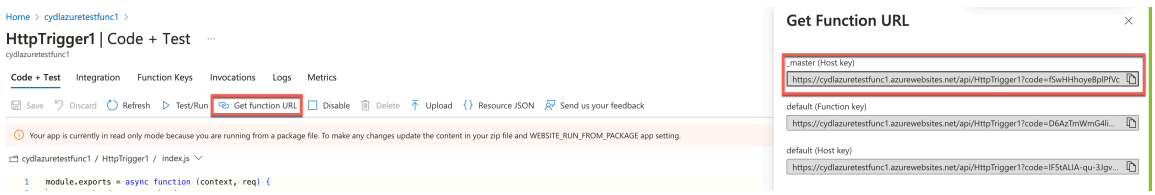The Azure function URL will be used as the secondary bot endpoint in your ServiceNow instance.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Locate and copy the Direct Line secret key in Microsoft Power Virtual Agents

To use Power Virtual Agents with Virtual Agent Bot Interconnect, you must locate and copy the Direct Line security key in your Power Virtual Agents account.

Before you begin

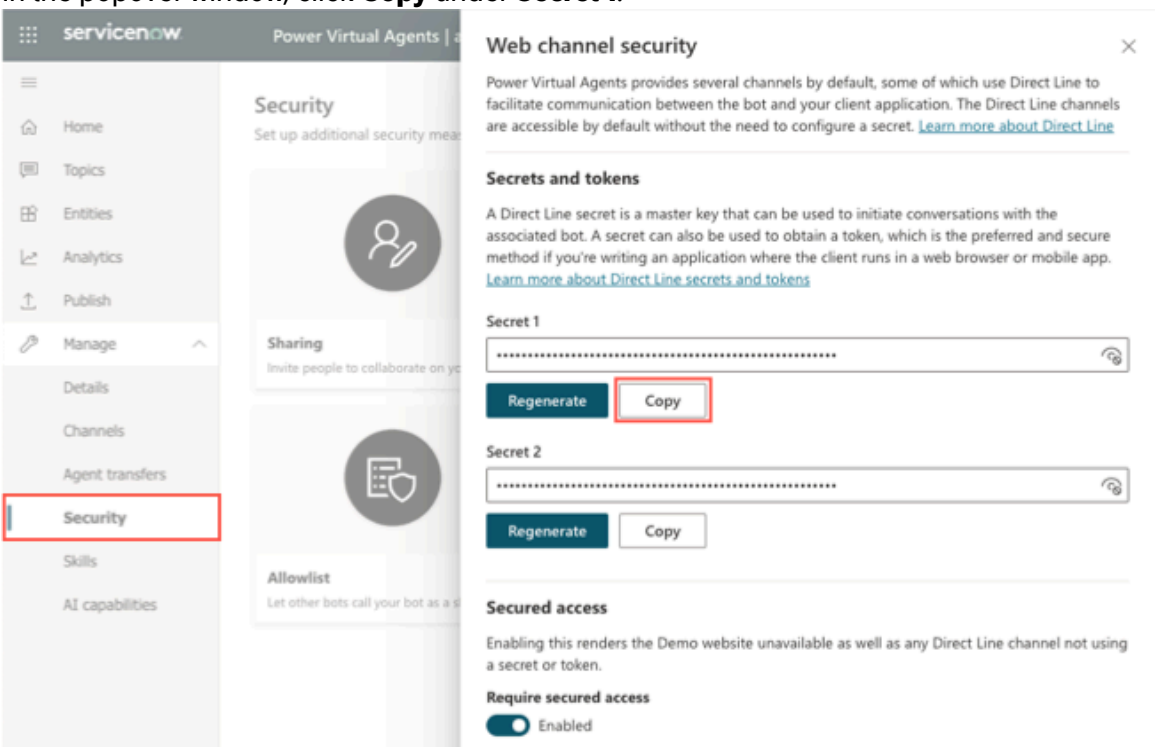
You must have a Microsoft Power Virtual Agents account with at least one bot.

Create a JavaScript function in Microsoft Azure using Visual Studio Code.

Role required: admin

Procedure

1. Log into your Microsoft Power Virtual Agents account.
2. Navigate to **Manage** > **Security**.
3. Click the **Web channel security** tile.
4. In the popover window, click **Copy** under **Secret 1**.



Add the Direct Line secret key to your Virtual Agent Bot Interconnect instance

To use Power Virtual Agents with Virtual Agent Bot Interconnect, you must add the Direct Line security key as a credential in your Bot Interconnect instance.

Before you begin

Locate and copy the Direct Line secret key in Microsoft Power Virtual Agents.

Role required: admin

Procedure

1. Navigate to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
2. Click the **Bot Interconnect DirectLine Credentials** record to open it.
3. On the Credentials related list, click **New**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. When prompted for the type of credential to create, click **Bot Interconnect Static Token Credential**.
5. On the form, fill in the fields as follows:

Field	Description
Name	Any unique name for the credential, such as `Power VA Direct Line key`.
Header	Leave as **Authorization**.
Static Token	Enter `Bearer ` , with a white space, followed by the Direct Line secret key from Power Virtual Agents. For example, enter: `Bearer 4km3D8s_6lY.rDVmxVm3k123nWibx3ciJeed2AKled9_ADuwsaN5uCA`

6. Click **Submit**.
7. Return to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
8. Click the **Bot Interconnect DirectLine Fetch Msgs** record to open it.
9. Under Related Links, click **Create New Connection & Credential**.
10. In the dialog box, fill in the form.

Field	Description
Secondary Bot Name	Any unique name that refers to the Power Virtual Agents bot.
Secondary Bot Endpoint	The Azure function URL that you copied in a previous step. For example, enter `https://demoazurefunctionreceivemsgapp.azurewebsites.net`.
Header	Enter: `dlsecret`
Static Token	The Direct Line key that you copied from Power Virtual Agents in the previous step.

11. Click **Create**.

Create a Virtual Agent Bot Interconnect shell topic to call Microsoft Power Virtual Agents topics

To access topics in the Power Virtual Agents secondary bot, you must create at least one Virtual Agent Bot Interconnect topic.

Before you begin
Create one or more topics in Microsoft Power Virtual Agents.

Add the Direct Line secret key to your Virtual Agent Bot Interconnect instance.

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

There are two ways to integrate Microsoft Power Virtual Agents topics with Bot Interconnect:

- Create one Virtual Agent Bot Interconnect topic per Power Virtual Agents topic.

  In case of NLU topics, each Virtual Agent topic has the same name as a single Power Virtual Agents topic. For example, if you have two Power Virtual Agents topics named **order a drink** and **book a ticket**, then you would create two Virtual Agent topics also named **order a drink** and **book a ticket**.

  In case of LLM topics, each Bot Interconnect topic has the same name and description as the corresponding Power Virtual Agents topic.

- Map multiple Power Virtual Agents topics to a single Virtual Agent Bot Interconnect topic. This scenario is applicable only for NLU topics.

  Create one Virtual Agent topic for your Power Virtual Agents topics and name it accordingly. For example, **PVA ordering issues**. In this scenario, the Power Virtual Agents topics are mapped to the topic as either keywords or utterances, depending on your method of topic discovery. So if you have two Power Virtual Agents topics named **order a drink** and **book a ticket**, you would add both phrases to the topic as keywords or you would add them as utterances to the topic's corresponding intent.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Create a topic for your Power Virtual Agents topics.
   In case of NLU topics, include the Power Virtual Agents topic names as either keywords or utterances in the corresponding ServiceNow Virtual Agent intent. In case of LLM topics, the topic name and description of the Bot Interconnect topic should match the topic name and description of the Power Virtual Agents topic.
3. On the **Flow** tab, drag a Topic Block utility node onto the canvas.
4. Select the node, and then fill in the form as follows:

Topic Block Properties form

Property	Description
Topic Block	Select **Bot Interconnect** topic block for NLU topics and **Bot Interconnect - LLM** topic block for LLM topics.
Action Name	Enter: `sn_va_bot_ic.direct_line_bot_interconnect_integration_handler`
Action Type	Enter `subflow`.

Additional Params (String)	Follow these steps:
	a. Select the script icon </>.
	b. In the Additional Params (String) window, add this code:
	`(function execute() {`
	`  return JSON.stringify({'quick': false});`
	`})()`
	c. Select **Save**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. Select **Save**.
6. Select **Publish**.

What to do next

Test your configuration. You can execute the topics that are available in the secondary bot from channels where Bot Interconnect is deployed.

> **Note:**
> Conversations always remain open in Power Virtual Agents.

Using ServiceNow Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect

Virtual Agent Bot Interconnect enables you to use ServiceNow® Virtual Agent as the primary bot with a ServiceNow Virtual Agent secondary bot.

Prerequisites

In order to configure ServiceNow Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect, you require the following setup:

- Two Yokohama ServiceNow instances.
- On the primary instance: Virtual Agent Bot Interconnect Store application
- On the secondary instance:
  - Virtual Agent API v3.8.x or later
  - Virtual Agent API on the secondary instance must be in synchronous mode or asynchronous mode.

Use ServiceNow Virtual Agent as a secondary bot in synchronous or asynchronous mode

Use ServiceNow Virtual Agent as a secondary bot in synchronous or asynchronous mode with Bot Interconnect.

You can use ServiceNow Virtual Agent as a secondary bot in synchronous or asynchronous mode. See Enable synchronous mode on the secondary ServiceNow Virtual Agent instance or Enable asynchronous mode on the secondary ServiceNow Virtual Agent instance.

Enable synchronous mode on the secondary ServiceNow Virtual Agent instance

Enable synchronous mode on the secondary ServiceNow Virtual Agent instance to use ServiceNow® Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect.

Before you begin

Role required: admin

Procedure

1. On the secondary instance, navigate to **All**, and then enter `sys_cs_channel.list` in the navigation filter.
2. Select the Bot to Bot record.
3. Select the **Synchronous** check box.
4. Click **Update**.

Enable asynchronous mode on the secondary ServiceNow Virtual Agent instance

Enable asynchronous mode on the secondary ServiceNow Virtual Agent instance to use ServiceNow® Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin
Role required: admin

Procedure

1. On the secondary bot instance, navigate to **All** > **System Web Services** > **Outbound** > **REST Message**.
2. Select the VA Bot to Bot record.
3. In the Endpoint field, specify the outbound endpoint URL of the primary ServiceNow® instance to which the Virtual Agent responses are posted. `http://<primary instance>/api/sn_va_bot_ic/bot_interconnect/va_api_response`
4. In the Authentication tab, set the Authentication type field to either Basic or OAuth 2.0. For more information on configuring a basic authentication profile and OAuth 2.0 profile, see Configure a REST message with basic auth and Configure a REST message with OAuth respectively.
5. Click **Update**.
6. In the HTTP Methods section, select the postMessage method and specify the endpoint URL. `http://<primary instance>/api/sn_va_bot_ic/bot_interconnect/va_api_response`
7. Click **Update**.

Create a connection and credential in Virtual Agent Bot Interconnect

To use ServiceNow® Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect, configure the connection and credential records in the Bot Interconnect (primary) instance.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
2. Click the **Bot Interconnect VA API Integration** record to open it.
3. In the Connections related list, click **New**.
4. On the form, fill in the fields.

Field	Description
Name	Enter a unique name, such as `SNow Secondary Bot`.
Credential	Leave this blank for now.
Connection alias	Use the default value.
Connection URL	Enter the URL for Virtual Agent API on your secondary instance. For example, enter `https://secondary-instance-name.service-now.com/api/sn_va_as_service/bot/integration`.

5. Click **Submit**.
6. Navigate to **All** > **Connections & Credentials** > **Credentials**.
7. On the Credentials page, click **New**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


8. Click either **Bot Interconnect Hash Token Credential** or **Bot Interconnect Static Token Credential** as the type.
9. On the form, fill in the fields.

Field	Description
Name	Enter a unique name for the credential. For example, `SNowSecondaryBotToken`.
Static token	
Header	Enter `Token`.
Static Token	Enter a password.
Hash token	
Header	Enter `x-b2b-signature`.
Algorithm	Select **HmacSHA1**.
Hash Secret	Enter the hash secret.
Authorization Algorithm	Select the algorithm to use. For example, **Secondary Bot Hash Token Auth**.

10. Click **Submit**.
11. Navigate to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
12. Click the **Bot Interconnect VA API Integration** record to open it.
13. In the Connections related list, open the new connection record you created in an earlier step.
14. In the **Credential** field, enter the name of the record that contains the static token or hash token.
    For example, `SNowSecondaryBotToken`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

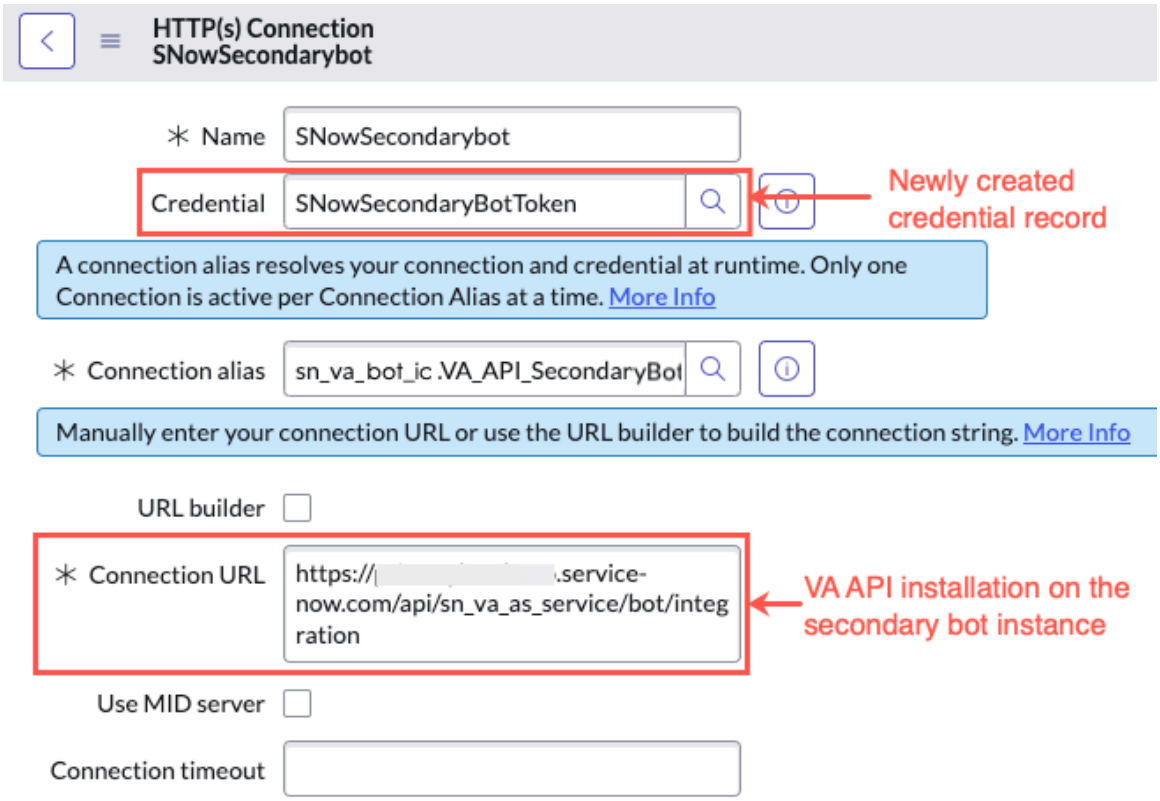Connection and credential record in the ServiceNow Bot Interconnect instance



15. Click **Update**.

Create a connection and credential in Virtual Agent Bot Interconnect

Create a connection and credential in Virtual Agent Bot Interconnect (primary instance) to enable uploading of attachments in the secondary bot.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
2. Click the **Bot Interconnect VA API Attachment** record to open it.
3. In the Connections related list, click **New**.
4. On the form, fill in the fields.

Field	Description
Name	Enter a unique name, such as `SNowSecondaryBotAttachment`.
Credential	Leave this blank for now.
Connection alias	Use the default value.
Connection URL	Enter the URL of your secondary instance. For example, enter `https://secondary-instance-name.service-now.com/`.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. Click **Submit**.
6. Navigate to **All** > **Connections & Credentials** > **Credentials**.
7. On the Credentials page, click **New**.
8. Click either **Basic Auth Credentials** or **OAuth 2.0 Credentials** as the type.
9. On the form, fill in the fields.

Field	Description
Name	Enter a unique name for the credential. For example, `SNowSecondaryBotAttachmentToken`.
Basic Auth Credentials	
Username	Enter the username you want to send as basic authentication credential..
Password	Enter the password you want to send as basic authentication credential.
OAuth 2.0 Credentials	
OAuth Entity Profile	In the OAuth profile field, select the OAuth 2.0 profile that specifies the credentials you want to send.

10. Click **Submit**.
11. Navigate to **All** > **Connections & Credentials** > **Connection & Credential Aliases**.
12. Click the **Bot Interconnect VA API Attachment** record to open it.
13. In the Connections related list, open the new connection record you created in an earlier step.
14. In the **Credential** field, enter the name of the record that contains the static token or hash token.
    For example, `SNowSecondaryBotAttachmentToken`.

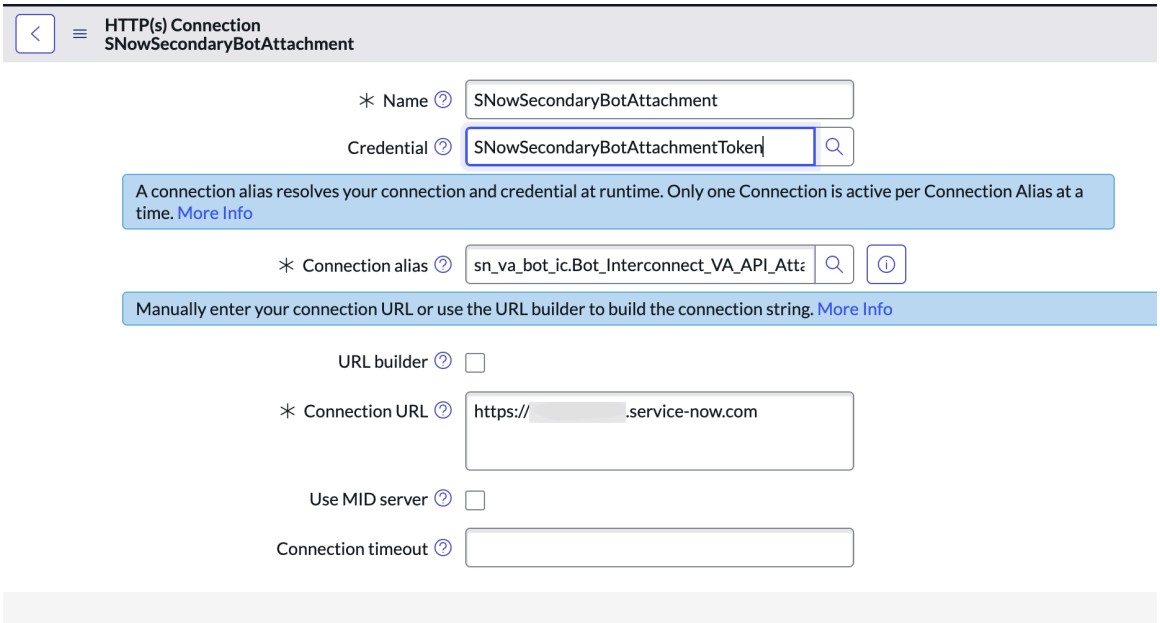Connection and credential record in the ServiceNow Bot Interconnect instance



15. Click **Update**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create an auth token in the ServiceNow secondary instance

To use ServiceNow® Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect, create an authentication token in the secondary instance.

Before you begin

Create a connection and credential in Virtual Agent Bot Interconnect.

Role required: admin

About this task

Ensure that the type of authentication (Static or Hash) and token or hash secret in the secondary instance is the same as the type and token or hash secret in the Bot Interconnect instance.

Procedure

1. Navigate to **All**, and then enter `token_verification.list` in the filter.
2. On the Token Verifications page, click **New**.
3. On the form, fill in the fields.

Token Verification form

Field	Description
Name	A unique name for the authentication token, such as `SNSecondaryBotToken`.
Token	The static token or hash secret you provided in the Bot Interconnect (primary) instance.

4. Click **Submit**.
5. Navigate to **All**, and then enter `message_auth.list` in the filter.
6. On the Message Auth page, click **New**.
7. On the form, fill in the fields.

Message Auth form

Field	Description
Name	Name of the message authentication, such as `SNtoSNAuthtoken`.
Provider	Name of the provider, such as `ServiceNowProvider`.
Group name	Name used to classify the provider.
Service Portal	Set this field to link users on Virtual Agent integrations such as Slack and Microsoft Teams to a service portal login page. If the field is empty, Virtual Agent redirects the users to the instance login page.
Inbound message verification	The name of the authentication token you created in the secondary instance. For example, `SNSecondaryBotToken`.
Outbound message creation	The name of the authentication token you created in the secondary instance. For example, `SNSecondaryBotToken`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Outbound service token	The name of the authentication token you created in the secondary instance. For example, `SNSecondaryBotToken`.

8. Click **Submit**.
9. Navigate to **All**, and then enter `sys_cs_provider_application.list` in the filter.
10. Open the VA Bot to Bot Provider Application record.
11. In the **Message auth** field, select the name of the message authentication record you created. For example, select **SNtoSNAuthtoken**.
12. Click **Update**.

Create a Virtual Agent Bot Interconnect shell topic to call Virtual Agent secondary topics

To use ServiceNow® Virtual Agent as a secondary bot with Virtual Agent Bot Interconnect, you must create at least one shell topic in Bot Interconnect.

Before you begin

Create and publish topics in the secondary instance of ServiceNow Virtual Agent.

Enable synchronous or asynchronous mode on the secondary ServiceNow Virtual Agent instance.

Role required: virtual_agent_admin or admin

About this task

There are two ways to integrate secondary Virtual Agent topics with Bot Interconnect:

- Create one Virtual Agent Bot Interconnect topic per secondary Virtual Agent topic.

  In case of NLU topics, each Bot Interconnect topic has the same name as the corresponding secondary Virtual Agent topic. For example, if you have two secondary Virtual Agent topics named **order a drink** and **book a ticket**, then you would create two Virtual Agent Bot Interconnect topics also named **order a drink** and **book a ticket**.

  In case of LLM topics, each Bot Interconnect topic has the same name and description as the corresponding secondary Virtual Agent topic.

- Map multiple secondary Virtual Agent topics to a single Virtual Agent Bot Interconnect topic. This scenario is applicable only for NLU topics.

  Create one Virtual Agent Bot Interconnect topic and name it accordingly. For example, **SVA ordering issues**. In this scenario, the secondary Virtual Agent topics are mapped to the Bot Interconnect shell topic as either keywords or utterances, depending on your method of topic discovery. So if you have two secondary Virtual Agent topics named **order a drink** and **book a ticket**, you would add both phrases to the Bot Interconnect topic as keywords or you would add them as utterances to the Bot Interconnect topic's corresponding intent.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Create a topic in your primary instance of Virtual Agent.
   In case of NLU topics, include the secondary Virtual Agent topic names as either keywords or utterances in the corresponding Bot Interconnect intent. In case of LLM topics, the topic name

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

and description of the Bot Interconnect topic should match the topic name and description of the secondary Virtual Agent topic.

3. On the **Flow** tab, drag a Topic Block utility node onto the canvas.
4. Select the node, and then fill in the form as follows:

Topic Block Properties form

Property	Description
Topic Block	Select **Bot Interconnect** topic block for NLU topics and **Bot Interconnect - LLM** topic block for LLM topics.
Action Name	○ If the secondary bot is configured in synchronous mode, enter `sn_va_bot_ic.va_api_bot_interconnect_integration_handler` ○ If the secondary bot is configured in asynchronous mode, enter `sn_va_bot_ic.va_api_bot_interconnect_async_integration_handler`
Action Type	Enter `subflow`.
Async Response Transformer	If the secondary bot is configured in asynchronous mode, enter `sn_va_bot_ic.va_api_bot_interconnect_async_response_handler`

5. Click **Save**.
6. Click **Publish**.

Enable live agent connection on the primary instance

Enable live agent connection on the primary instance to route an interaction to a live agent on the secondary instance.

Before you begin

Be sure to enable *com.glide.cs.external.agent.chat.enabled* system property. It's not enabled by default.

Role required: admin or virtual_agent_admin

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Live Agent Connections**.
2. Select **New** to create a connection.
3. On the form, fill in the fields.

Live Agent Connection form fields

Field	Description
Name	Name of the connection
Active	Check box to enable the connection
Order	If there are multiple matching live agent connections, the value entered in this field determines the order in which the matching connections are displayed to the user.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Advanced	Selecting this check box opens the **Script** field. You can specify conditions using JavaScript in the script editor.
Condition Table	Table used for selecting the matching condition. **Interaction** table is selected by default.
Matching Condition	Conditions to route the interaction to this live agent connection. Use the condition builder to add conditions. The fields used in the condition are from the Interaction table.
Script	JavaScript script that specifies the conditions for the interaction to be routed to this live agent connection. The condition in the script editor must evaluate to true. This field is enabled only when you select the **Advanced** check box.
Subflow	Subflow transforms the request into the secondary instance request format and routes the request to the secondary instance. Select **VA API Bot Interconnect Integration Handler**.

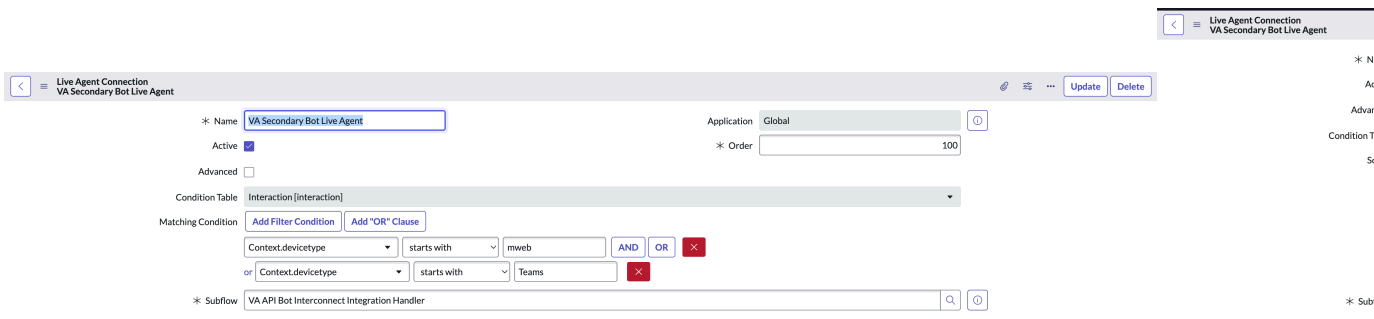

4. Click **Submit**.

Debug Virtual Agent Bot Interconnect with a ServiceNow Virtual Agent secondary bot

Debug Workflow Studio executions of your Virtual Agent Bot Interconnect and Virtual Agent secondary bot integration.

Before you begin

Enable the following system properties:

- *sn_va_bot_ic.bot_interconnect.enable.logging* = true
- *glide.outbound_http_log.override* = true
- *glide.outbound_http_log.override.level* = all

For more information, see Add a system property.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. In the Bot Interconnect instance, modify the shell topic you created in Virtual Agent:

   a. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.

   b. Open the shell topic you created in a previous step.

   c. On the **Flow** tab, select the Bot Interconnect Topic Block.

   d. In the **Additional Params (String)** field, select the Script icon </>, and then add the following code:

   ```
   (function execute() {
     return JSON.stringify({quick: false});
   })()
   ```

   e. Select Save.

   f. Save the topic.

2. Enable execution context debugging in Workflow Studio.

   a. Navigate to **All** > **Process Automation** > **Process Automation Designer** > **Flow Administration** > **Settings**.

   b. On the Settings page, select **New**.

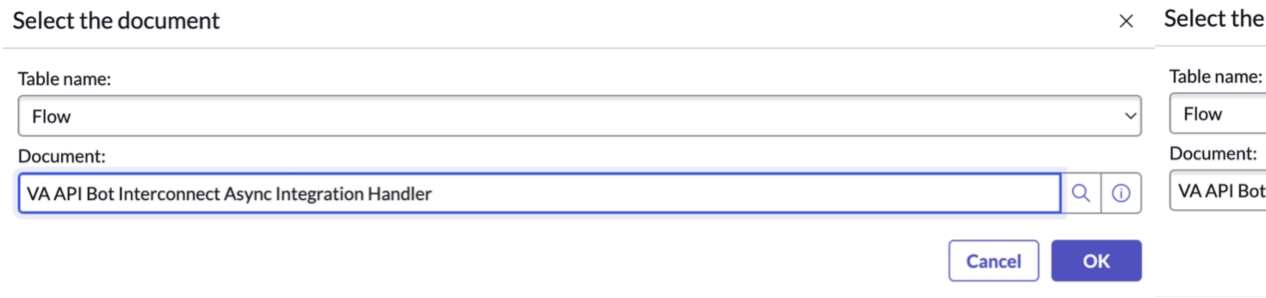
   c. In the **Flow/Subflow/Action** field, select the Search icon.

   d. On the Select the document form, fill in the fields.
   Add the following Flow Designer document settings if your secondary bot is in synchronous mode.



   Add the following Flow Designer document settings if your secondary bot is in asynchronous mode.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



e. Select **Ok**.

f. In the **Reporting** field, select **Developer Trace**.

g. Select **Submit**.

Result
You can view additional logs and Workflow Studio executions for debugging purposes.

Localization options for Virtual Agent

The ServiceNow platform provides several methods for serving your international Virtual Agent users, regardless of their language and locale. Professionally localize your conversations, use dynamic machine translation, or a combination of the two.

Direct and dynamic language support

If your chat audience is diverse, you want to support them in their own language whenever possible. One option is to localize everything professionally using linguists who can translate your topics into the desired languages. While this option produces the best user outcomes, it is often the most expensive. Another option available to you is language detection combined with dynamic machine translation. Instead of using translated topics and models, dynamic translation connects to a third-party machine translator. During the conversation, user utterances and responses are translated into the primary language on the instance, and all results are translated back into the user's language for the session. There are benefits and drawbacks for all options, as described in the following list. Before activating machine translations, you should carefully weigh the costs and benefits and set proper expectations for your deployment objectives.

Direct language support (professional localization)

A direct language strategy employs an expert linguist to configure entities, intents, strings, keywords, and vocabulary, which are then used to match user utterances with configured content. Since an expert provides translations that directly match the conversation's content, the accuracy of the translated content will be high. In addition to the translations themselves, experts can use the NLU vocabulary feature to further define words and phrases that it may encounter from your users. For example, a user may enter an acronym such as `MS`, which you can define as the vocabulary item `Microsoft`.

Professional translations are implemented directly in Virtual Agent Designer. For details, see Localizing Virtual Agent conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using translations from professional linguists and corresponding ServiceNow language plugins

Benefits	Constraints
• More accurate translations • For supported languages, NLU intents and entities are localized	• Requires more resources to build and maintain • Longer completion time • Higher implementation costs • 5 languages have NLU intent and entity support • 12 languages have NLU intent support only • Increased coverage is not typically scalable • Not easily extensible For more information, see Language support for NLU services.

Dynamic language detection and machine translation

Dynamic machine translation relies on the translation service to translate all content in real time. The accuracy of the translations is dependent on the translation service. Although translation services typically leverage algorithms to translate words based on the context of the conversation or sentence, there may be times when there is minimal context for the algorithm to leverage. Accuracy may be diminished in this situation. Check with your translation service provider about the ability to exclude words from translation or associate vocabulary with specific synonyms.

Using dynamic translation with the supported ServiceNow language plugins

Benefits	Constraints
• Lower implementation costs • Faster completion time • Less human maintenance • ServiceNow provides 22 language plugins with basic translations	• Limited scalability • Limited extensibility • 5 languages have NLU intent and entity support • 12 languages have NLU intent support only For more information, see Language support for NLU services.

Dynamic machine translation for languages that are not supported on the ServiceNow platform provides coverage, but the quality of the user experience may be lower.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using dynamic translation with unsupported languages

Benefits	Constraints
• Lower implementation costs • Faster completion time • Less human maintenance • Support for many languages • Highly scalable • Highly extensible	• User experience may vary • Potential for mistranslation may reduce user outcomes

Multi-language deployment strategies

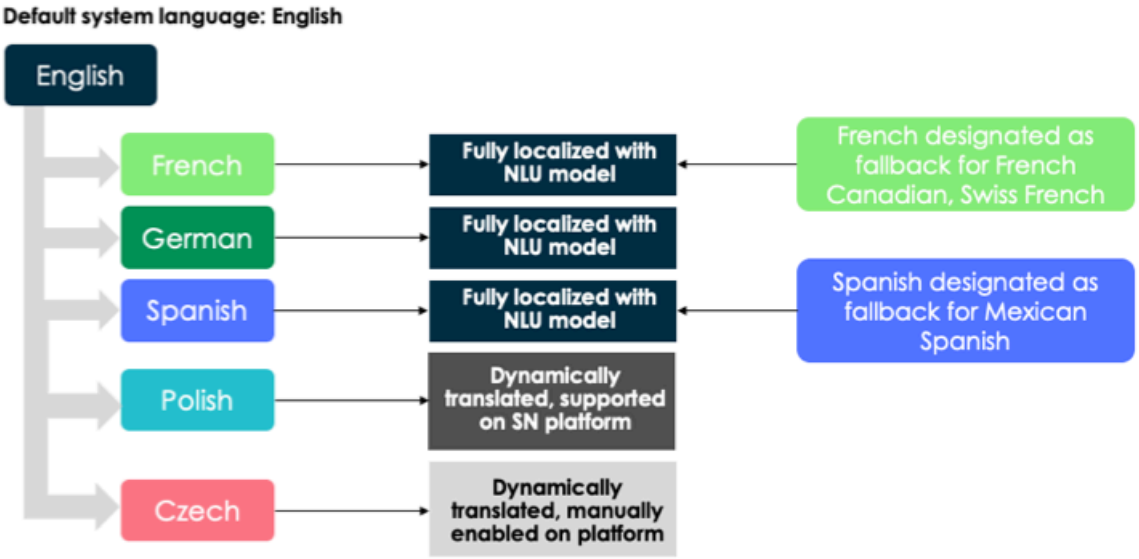
Depending on the needs of your user base, you may want a mix of solutions to maximize both user experience and access. For example, you may choose to professionally localize prioritized languages and dynamically translate others. For example, if 95% of your users speak six languages, you may decide to use a linguist to translate your topics into those six. You might then use Dynamic Translation for the remaining five percent.

You can also enable locale support by designating translated languages as fallback languages. For example, you can support Mexican Spanish users by designating Spanish as the fallback language for that locale.

In the following example, French, German, and Spanish are professionally localized, including the NLU models, intents, and entities. This localized content provides the best user experience. Polish is supported as a language on the ServiceNow platform, and when the plugin is installed and activated, it includes some translated content. In this imaginary scenario, the business decision was made to dynamically translate Polish content because it accounts for a smaller percentage of users. The quality of this experience may vary since NLU models are not localized. Instead, utterances are dynamically translated to English, and NLU topic discovery is run through the English model. Since Czech is currently not a supported language on the ServiceNow platform, dynamic machine translation is the only option. Admins can add Czech as a language and enable Dynamic Translation for the language in Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example language support strategy



Localization insights

You can view dynamic translation and localization insights from the Virtual Agent Designer page. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, and select **Localization Insights** from the list of links in the side panel.

For more information, see Localization Insights dashboard.

Using language detection and dynamic machine translation in Virtual Agent enhanced chat conversations

Enable a combination of language detection and machine translation for Virtual Agent to improve the chat experience for diverse users. You can designate fallback languages for locales or dynamically translate languages that are not professionally localized or are not supported in topic discovery.

Chat users are more comfortable having conversations in their preferred language. Their preferred language is set in the user's profile language preference. For example, Virtual Agent greets users in the preferred language specified in their user profile. But if a user responds in another language, Virtual Agent can detect the change. Depending on your user experience, users either receive a prompt regarding whether they'd like to switch the conversational language to the detected language or the conversational language updates automatically to the detected language. After the language is switched to the detected language, that language becomes the conversation's language for the remainder of the conversation. But in many cases users don't have control over their preferred language, particularly if they are guest users.

Guest conversations do not support language detection if resumable guest sessions are not enabled. This is why language detection and dynamic machine translation can improve the chat experience, particularly if you have conversations that have not been localized in some languages. For example, your organization may routinely localize into Spanish and French, but you may also want to support Dutch and Danish. You can enable Dynamic Translation on your ServiceNow® instance for those languages.

You can use language detection to support custom or locale-specific language codes as well. For example, you could designate Spanish (es) as the fallback language for Mexican Spanish (es-mx) to ensure that those users have a good customer experience.

Virtual Agent conversations can be dynamically translated. Virtual Agent uses platform translations and if no platform translations are found, then Dynamic Translation is used instead.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If some conversations have been professionally translated, you should disable dynamic translation for those specific languages. Expert translations may be more accurate and of higher quality than machine translations. Prior to making a dynamic translation call, the Text Translations for Dynamic Translation [sys_cs_dynamic_translation_text] and Message [sys_ui_message] tables are checked to see if the text has been previously translated or already has a localization record. A dynamic translation call is only made if no translation exists in either table. After a dynamic translation call is made and that text is translated, that translated text is stored in the Text Translations for Dynamic Translation [sys_cs_dynamic_translation_text] table for future use. This table is cleared every 24 hours to ensure that the most up-to-date translations stored in the Message [sys_ui_message] table are being referenced. Storing previously translated text results in fewer dynamic translation calls to third-party translation services. For more information about localizing Virtual Agent conversations, see Localizing Virtual Agent conversations.

You can use Dynamic Translation during the localization process as well. If you are localizing conversations with professional linguists, you can enable Dynamic Translation while some topics and strings remain untranslated. When your deployment in that language is complete, you can disable Dynamic Translation, since professional translations are likely more accurate.

Virtual Agent Academy: Dynamically translate languages in Virtual Agent Watch this video for a demonstration of using Virtual Agent with Dynamic Translation.

Note:
You can use language detection independently of Dynamic Translation. Language detection only occurs at the beginning of the conversation, while a Topic Picker is present. It doesn't apply when a user tries to switch the language in the middle of a topic.

Language detection and Dynamic Translation process in Virtual Agent enhanced chat conversations

When you enable language detection and Dynamic Translation for Virtual Agent for other languages, a variety of diverse users gain access to your Virtual Agent chat environment.

For more information on enabling language detection, see Enable Dynamic Translation for languages in Virtual Agent. For more information on enabling dynamic translation, see Configure multilingual service for Now Assist applications.

Language detection is only applicable to the first utterance entered into the conversation. Conversational language switching cannot occur mid-conversation. During LLM enhanced chat conversations, the conversational language automatically switches to the user's detected language. This automatic switch can occur when a user enters an utterance at the start of a new conversation or within the home page's search field. If the conversational language does not automatically switch to the detected language, the preferred conversational language continues. The following list details the few exceptions in an enhanced chat conversation that would not automatically switch the conversational language:

- The language plugin for the user's detected language is not installed.
- The language plugin for the user's detected language was not installed and dynamic translation wasn't turned on.
- The confidence level of the detected language didn't meet the threshold.

Note:
If the conversational language does not automatically switch to the detected language, restart the conversation and try entering a more specific utterance. Entering a more specific utterance may improve the confidence score and lead to an automatic switch to the user's detected language.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

When language detection is turned off, no conversational language switching can occur.

The default system language sets all users' default session language. That user's default session language is what sets the conversational language. When a user types an utterance that is not recognized as the system language, the results depend upon your configuration for that language.

The following examples show how a conversational language can be impacted depending upon the language detection and dynamic translation settings:

Note:
If you create exclusion rules for Dynamic Translation, those excluded terms are honored during Dynamic Translation. For more information about the Exclusion Framework, see Exclusion Framework in Dynamic Translation.

Language detection and Dynamic Translation configuration settings and results

Language configuration	Results in Virtual Agent LLM enhanced chat conversations
Language detection is enabled, but not Dynamic Translation	Language responses can show up differently depending on whether localization was done or not for those topics. The conversation language may continue in the detected language based on whether localization records for those topics were previously included. If localization records are not provided, the conversation language would continue in the preferred conversational language. If the detected language is a locale or other language code that has been configured with a fallback language, the conversational language would either switch to a previously localized language, or the conversation would continue in the preferred conversational language.
Language detection and Dynamic Translation are enabled	If the detected language is enabled for dynamic translation in Virtual Agent Chat Settings and the confidence level is met, the conversation automatically switches to the detected language. For example, the preferred conversational language is in English but the user types an utterance in Spanish. The conversation language automatically switches to Spanish. The user sees the whole conversation in Spanish even though only the Virtual Agent response is dynamically translated and not the user's utterance. When the user starts a new chat, the preferred conversational language resumes. In this example, English would be the conversational language and the user must enter an initial utterance in Spanish to trigger language detection so that they can have another conversation in Spanish.

The language detection and dynamic machine translation process operates according to the following principles:

- Language detection occurs only once per conversation, at the initial utterance.

  If a user tries to change the language in the middle of a conversation, Virtual Agent returns an `I didn't understand` message.

- When the conversation has closed and restarted, the language used in the next conversation is the preferred conversational language.
- If a user's detected language is the same as the preferred language, the user does not switch languages.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- If a user's detected language has no fallback language specified and dynamic translation is not enabled for it, the conversation continues in the preferred language.
- If a user's detected language is not activated on the instance, the conversation continues in the preferred language. For more information, see Activate a language.

Note:
AI Search results are not translated.

Dynamic Translation and Agent Chat

If Dynamic Translation is enabled on Virtual Agent but turned off for Agent Chat, the live agent will see what the user sees. If the user started the conversation in another language and the conversational language switches, then the live agent will see the conversation in the user's detected language. This may cause some confusion for both the agent and the customer. To resolve this issue, consider turning on Dynamic Translation for Agent Chat as well. For details, see Configuring Dynamic Translation for Agent Chat.

Supported languages

For better results, install the ServiceNow language plugins for each language that uses dynamic translation. For a detailed list of language plugins, see Activate a language.

You can enable dynamic translation for languages that are not currently supported on the ServiceNow platform. For details, see Enable Dynamic Translation for an unsupported language.

Supported channels

Dynamic Translation for Virtual Agent is currently supported in the following channels:

- ServiceNow chat widget
- Microsoft Teams
- Slack
- Workplace from Facebook
- Facebook Messenger

Note:
The Virtual Agent topic test window may identify user utterances from Microsoft Teams or other adapters as `sysparm_search_text`. Dynamic Translation will translate this content as well.

The following channels do not support Dynamic Translation for Virtual Agent:

- ServiceNow mobile client
- WhatsApp
- LINE
- Twilio SMS
- Alexa
- Google Assistant
- Siri

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using language detection and dynamic machine translation in Virtual Agent NLU and LLM standard chat conversations

Enable a combination of language detection and machine translation for Virtual Agent to improve the chat experience for diverse users. You can designate fallback languages for locales or dynamically translate languages that are not professionally localized or are not supported in topic discovery.

Chat users are more comfortable having conversations in their preferred language. Their preferred language is set in the user's profile language preference. For example, Virtual Agent greets users in the preferred language specified in their user profile. But if a user responds in another language, Virtual Agent can detect the change. Depending on your user experience, users either receive a prompt regarding whether they'd like to switch the conversational language to the detected language or the conversational language updates automatically to the detected language. After the language is switched to the detected language, that language becomes the conversation's language for the remainder of the conversation. But in many cases users don't have control over their preferred language, particularly if they are guest users.

Guest conversations do not support language detection if resumable guest sessions are not enabled. This is why language detection and dynamic machine translation can improve the chat experience, particularly if you have conversations that have not been localized in some languages. For example, your organization may routinely localize into Spanish and French, but you may also want to support Dutch and Danish. You can enable Dynamic Translation on your ServiceNow® instance for those languages.

You can use language detection to support custom or locale-specific language codes as well. For example, NLU topic discovery doesn't support Mexican Spanish (es-mx), but it does support Spanish (es). You can designate Spanish as the fallback language for Mexican Spanish, ensuring that these users have a good customer experience.

Virtual Agent conversations can be dynamically translated. Virtual Agent uses platform translations and if no platform translations are found, then Dynamic Translation is used instead. If some conversations have been professionally translated, you should disable dynamic translation for those specific languages. Expert translations of your NLU models, keywords, and topics may be more accurate and of higher quality than machine translations. Prior to making a dynamic translation call, the Text Translations for Dynamic Translation [sys_cs_dynamic_translation_text] and Message [sys_ui_message] tables are checked to see if the text has been previously translated or already has a localization record. A dynamic translation call is only made if no translation exists in either table. After a dynamic translation call is made and that text is translated, that translated text is stored in the Text Translations for Dynamic Translation [sys_cs_dynamic_translation_text] table for future use. This table is cleared every 24 hours to ensure that the most up-to-date translations stored in the Message [sys_ui_message] table are being referenced. Storing previously translated text results in fewer dynamic translation calls to third-party translation services. For more information about localizing Virtual Agent conversations, see Localizing Virtual Agent conversations.

You can use Dynamic Translation during the localization process as well. If you are localizing conversations with professional linguists, you can enable Dynamic Translation while some topics and strings remain untranslated. When your deployment in that language is complete, you can disable Dynamic Translation, since professional translations are likely more accurate.

Virtual Agent Academy: Dynamically translate languages in Virtual Agent Watch this video for a demonstration of using Virtual Agent with Dynamic Translation.

Note:
You can use language detection independently of Dynamic Translation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Language detection and Dynamic Translation process in Virtual Agent NLU and LLM standard chat conversations

When you enable language detection and Dynamic Translation for Virtual Agent for other languages, a variety of diverse users gain access to your Virtual Agent chat environment.

Language detection for NLU and LLM conversations are enabled in the same location. For more information on enabling language detection, see Enable Dynamic Translation for languages in Virtual Agent. Dynamic Translation for NLU and LLM conversations are enabled in different locations. For more information on enabling dynamic translation, see Enable Dynamic Translation for languages in Virtual Agent and Configure multilingual service for Now Assist applications.

Language detection is only applicable to the first utterance entered into the conversation. Conversational language switching cannot occur mid-conversation. Language detection prompts users with a question regarding whether they'd like to switch the conversational language during Virtual Agent NLU or LLM standard chat conversations.

When language detection is turned off, no conversational language switching can occur.

The default system language sets all users' default session language. That user's default session language is what sets the conversational language. It is also the preferred language in your NLU model, if NLU is enabled. When a user types an utterance that is not recognized as the system language, the results depend upon your configuration for that language.

The following examples show how a conversational language can be impacted depending upon the language detection and dynamic translation settings:

Note:
If you create exclusion rules for Dynamic Translation, those excluded terms are honored during Dynamic Translation. For more information about the Exclusion Framework, see Exclusion Framework in Dynamic Translation.

Language detection and Dynamic Translation configuration settings and results

Language configuration	Results in Virtual Agent NLU or LLM standard chat conversations
Language detection and Dynamic Translation are not configured.	For unlocalized conversations, the language the topics appear in is dependent on the language they were authored in. Typically, the default system language is used for topics and topic discovery.
Language detection is enabled, but not Dynamic Translation	Language responses can show up differently depending on whether localization was done or not for those topics. The conversation language may continue in the detected language based on whether localization records for those topics were previously included. If localization records are not provided, the conversation language would continue in the preferred conversational language. If the detected language is a locale or other language code that has been configured with a fallback language, Virtual Agent asks the user if they want to switch the conversation to the fallback language. For example, if the detected language is Mexican Spanish (mx-es), and Spanish (es) has been designated as the fallback language, Virtual Agent asks: `I have`


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Language detection and Dynamic Translation configuration settings and results (continued)

Language configuration	Results in Virtual Agent NLU or LLM standard chat conversations
	`detected you are typing in Spanish. Would you like to switch the conversation to Spanish? (Yes/No)` If the user selects **Yes**, the fallback language is used for topic discovery and topic display. This continues until the conversation ends. If the user selects **No**, Virtual Agent will not prompt them again during the conversation.
Language detection and Dynamic Translation are enabled	If the detected language is enabled for dynamic translation in Virtual Agent Chat Settings, Virtual Agent asks the user if they want to switch the conversation to the detected language. For example, the preferred conversational language is in English but the user types an utterance in Spanish. The user receives a prompt asking whether they'd like to switch the conversation to Spanish. The prompt reads, `I have detected you are typing in Spanish. Would you like to switch the conversation to Spanish? (Yes/No)` If the user selects **No**, Virtual Agent will not prompt them again during the conversation and the conversation continues in English. If the user selects **Yes**, the utterance is translated to the default language. The default language for NLU conversations is within the *`glide.sys.language`* system property. The default language for LLM conversations is within the *`com.glide.cs.llm.default.Language`* system property. All topic matches are translated dynamically into the user's conversation language and displayed. In this example, the conversation will now continue in Spanish and Virtual Agent expects the user to continue chatting in Spanish. After the conversation ends and the user restarts a new conversation by reloading their browser or initially navigating to a portal with no conversation in progress, the prior conversational language (Spanish in this example) continues.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

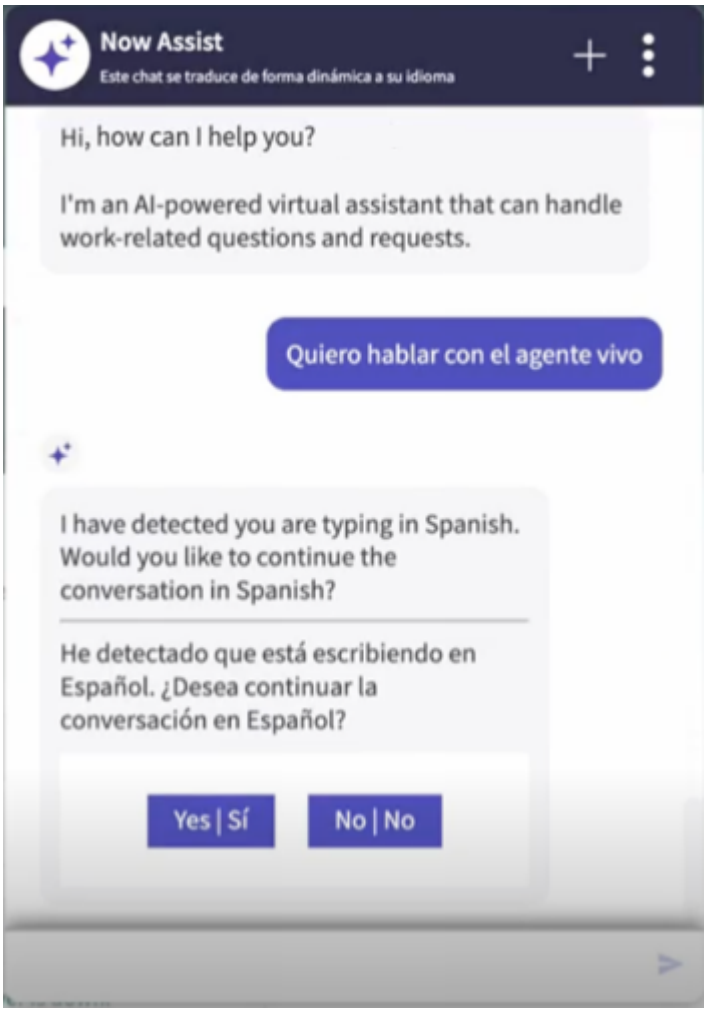Example of a Virtual Agent LLM standard chat conversation using language detection



The language detection and dynamic machine translation process operates according to the following principles:

- Language detection occurs only once per conversation, at the initial utterance.

  If a user tries to change the language in the middle of a conversation, Virtual Agent returns an `I didn't understand` message.

- When the conversation has closed and restarted, the language used in the next conversation varies depending on how the user restarted the conversation. If the user restarted the conversation by reloading their browser, the preferred language is restored in the next conversation. If the user restarted the conversation by using the chat widget's restart feature, the previous conversational language is restored in the next conversation. Regardless of how a conversation has closed and restarted for NLU or LLM standard chat conversations, if a user did not accept to switch languages after a different language was detected in the previous conversation, the preferred language is restored in the next conversation.
- If a user's detected language is the same as the preferred language, the user is not asked to switch languages.
- If a user's detected language has no fallback language specified and dynamic translation is not enabled for it, the conversation continues in the preferred language.
- If a user's detected language is not activated on the instance, the conversation continues in the preferred language. For more information, see Activate a language.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
AI Search results are not translated.

Dynamic Translation and Agent Chat

If Dynamic Translation is enabled on Virtual Agent but turned off for Agent Chat, the live agent will see what the user sees. If the user started the conversation in another language and the conversational language switches, then the live agent will see the conversation in the user's detected language. This may cause some confusion for both the agent and the customer. To resolve this issue, consider turning on Dynamic Translation for Agent Chat as well. For details, see Configuring Dynamic Translation for Agent Chat.

Supported languages

For better results, install the ServiceNow language plugins for each language that uses dynamic translation. For a detailed list of language plugins, see Activate a language.

You can enable dynamic translation for languages that are not currently supported on the ServiceNow platform. For details, see Enable Dynamic Translation for an unsupported language.

Supported channels

Dynamic Translation for Virtual Agent is currently supported in the following channels:

- ServiceNow chat widget
- Microsoft Teams
- Slack
- Workplace from Facebook
- Facebook Messenger

Note:
The Virtual Agent topic test window may identify user utterances from Microsoft Teams or other adapters as `sysparm_search_text`. Dynamic Translation will translate this content as well.

The following channels do not support Dynamic Translation for Virtual Agent:

- ServiceNow mobile client
- WhatsApp
- LINE
- Twilio SMS
- Alexa
- Google Assistant
- Siri

Prerequisites for using Dynamic Translation in Virtual Agent

To enable dynamic machine translation, install ServiceNow® language plugins and Dynamic Translation plugins. Then configure Dynamic Translation for your instance.

Before you can enable dynamic machine translation for a language, you must install and configure Dynamic Translation on your instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. As an admin, install the following plugins:
   - Glide Virtual Agent (com.glide.cs.chatbot)
   - Dynamic Translation for Virtual Agent (com.glide.cs.dynamic.translation.virtual_agent)
2. Activate language plugins for each language that you want to deploy with dynamic translation.

   Note:
   Languages for Dynamic Translation are stored in the sys_cs_dynamic_translation_virtual_agent table.

3. (Optional) Enable NLU languages in Virtual Agent settings, if you are using NLU topic discovery.

   Note:
   NLU detection and discovery values are stored in the sys_cs_general_settings table. As of Vancouver, ServiceNow NLU is the available NLU driver.

4. (Optional) Enable LLM languages in Now Assist Admin if you are using Now Assist in Virtual Agent.
5. (Optional) Create exclusion rules for specific terms and content patterns within the Exclusion Framework.

The following translation service providers are pre-configured once the plugins are installed:

- Microsoft Azure
- Microsoft Azure OEM
- Google Translate

Configuring other translation service providers

Note:
The following content is only relevant to NLU conversations and live agent LLM conversations that use Dynamic Translation for Agent Chat.

You can configure any other translation service provider in the Dynamic Translation application as follows:

1. Integrate with a translation service provider.
2. Create a translator configuration in Dynamic Translation.
3. (Optional) Create a language code mapping to map translator language codes to the ServiceNow® language codes.

Next step

Configure Dynamic Translation service integration credentials

Configure Dynamic Translation service integration credentials

Configure the credential and connection for your translation service.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Note:
The following content is only relevant to NLU conversations and live agent LLM conversations that use Dynamic Translation for Agent Chat.

Complete the prerequisites for using Dynamic Translation in Virtual Agent.

Role required: admin

Procedure

1. Create a credential for the translator service alias.
   For detailed information, see the following topics:
   - Create a credential for the MicrosoftTranslation alias
   - Configure the credential for the GoogleTranslation alias
2. Create a connection for the translator service alias.
   For detailed information, see the following topics:
   - Create a connection for the MicrosoftTranslation alias
   - Configure the connection attributes for the GoogleTranslation alias

What to do next

Activate your translation service in Dynamic Translation

Activate your translation service in Dynamic Translation

Activate your preferred Dynamic Translation provider and mark it as the default service for both translation and language detection.

Before you begin

Note:
The following content is only relevant to NLU conversations and live agent LLM conversations that use Dynamic Translation for Agent Chat.

Complete the prerequisites for using Dynamic Translation in Virtual Agent.

Configure Dynamic Translation service integration credentials.

Role required: admin

Procedure

1. Navigate to **All** > **Dynamic Translation** > **Translator Configurations**.
2. Select the name of the translation service to open the record.
3. On the Translator Configuration form, select the **Active** check box.
4. On the Preferences tab, select **Mark as default for translation**.
5. On the Preferences tab, select **Mark as default for detection**.
6. Select **Update**.

What to do next

Enable Dynamic Translation for languages in Virtual Agent

Enable Dynamic Translation for languages in Virtual Agent

Enable Dynamic Translation for one or more languages in Chat Settings for Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Install and configure the plugins for Dynamic Translation, as described in Prerequisites for using Dynamic Translation in Virtual Agent. If these prerequisites aren't completed, the Multi language support card described in the following steps doesn't appear.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Virtual Agent**.
3. On the Multi language support card, do the following:

   a. Turn on the **Language Detection** toggle switch to enable it.

   Turning on this toggle is applicable to both NLU and LLM conversations.

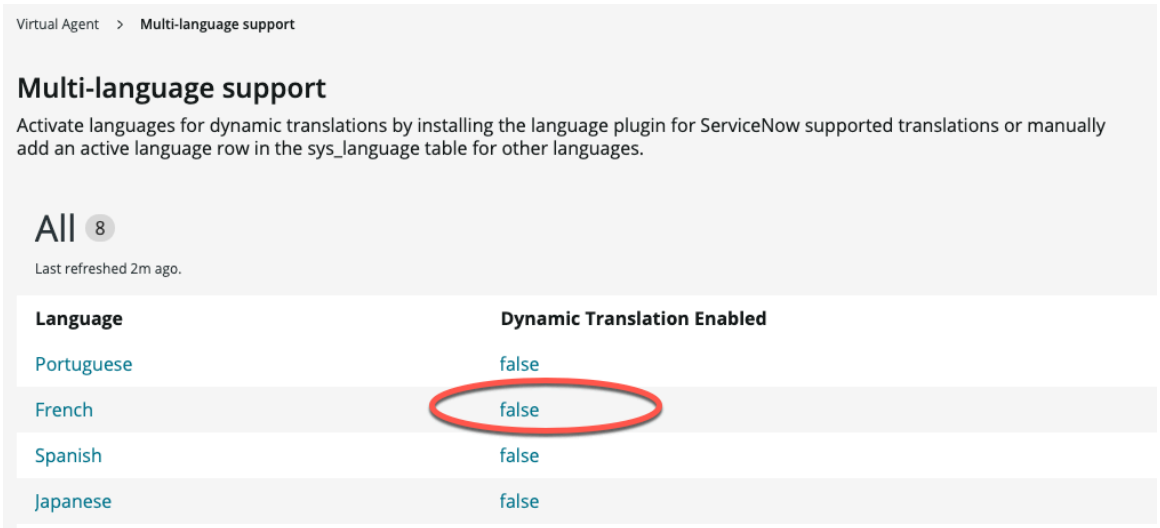
   b. Turn on the **Dynamic language translation** toggle switch to enable it.

   Turning on this toggle is only applicable to NLU conversations. For more information about turning on translation for LLM conversations, see Configure multilingual service for Now Assist applications.


   c. Select **View All**.

   The Multi-language support page opens. All languages that are installed on the instance are listed.

4. In the **Dynamic Translation Enabled** column, select **false** for the language you want to enable.



   a. If prompted, select **Edit record**.



   b. Select **Dynamic Translation Enabled**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. Select **Update**.

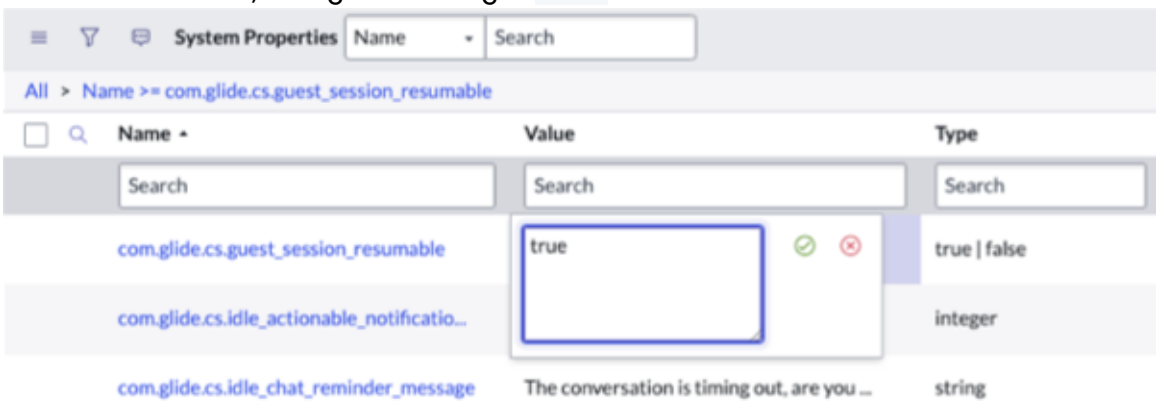
d. Return to the Multi-language support page and repeat these steps for any other language you want to enable.

5. **Optional:** Enable language detection for guest users.
If this system property is set to **off**, Dynamic Translation will not work for guest users.

a. Navigate to **All**, and then enter `sys_properties.list` in the filter.

b. In the **Name** field, search for *`com.glide.cs.guest_session_resumable`*.

c. In the **Value** column, change the setting to `true`.



Configure multilingual service for Now Assist applications

Turn on multilingual service for user-entered text with native translation or Dynamic Translation in Now Assist applications.

Before you begin

To see a list of all available languages supported in Now Assist, see Multilingual service for Now Assist.

To use Dynamic Translation, you must install and activate the application and install at least one language pack. For more information, see Activate Dynamic Translation and Activate a language.

Note:
Dynamic Translation is not supported in regulated markets.

If you don't see a language and region section of your Now Assist Admin console, make sure that you have installed at least one Now Assist application. This installs or updates the required dependencies to the latest version.

Role required: sn_generative_ai.nsa_admin

About this task

There are two translation services available to translate user-generated content in Now Assist applications. For more information on the differences between the two, see Multilingual service for Now Assist. In that documentation, you can also find the steps for adding another language to your service if it is not preconfigured.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

After you have enabled either Dynamic Translation or native translation, translations will be available for in-product experiences, Virtual Agent, and the Now Assist panel.

Procedure

1. Navigate to **All** > **Now Assist Admin** > **Settings**.
2. On the left-hand panel, select the **Multilingual service**.
3. In the native translation or Dynamic Translation tab, toggle the switch to **On**.
   A modal displays, confirming your choice and stating that Now Assist streaming of LLM (large language model) responses will be unavailable when Dynamic Translation is active.

   Note:

   When Dynamic Translation is inactive, Now Assistant streaming becomes available. The modal message displayed will change according to the status of the Dynamic Translation.

4. You can enable both Dynamic Translation and native translation.
   Native translation is applied first. If the language is not supported through native translation, then Dynamic Translation will be applied.
5. **Optional:** To enable the preferred language from the available languages supported in the model providers selected in AI Control Tower, select **Edit** and then select the check-box next to the languages you want to use for translation.

   (Optional) See Multilingual service for Now Assist for more information about adding new languages for your preferred model to support.

   To update your choice, select **Save**.

Result
Multilingual service is enabled for Now Assist applications.

Enable Dynamic Translation for an unsupported language

The ServiceNow® platform supports several languages, but you can enable dynamic machine translation for additional languages in Virtual Agent.

Before you begin
Install and configure the plugins for Dynamic Translation, as described in Prerequisites for using Dynamic Translation in Virtual Agent.

Role required: virtual_agent_admin or admin

About this task
You can configure Dynamic Translation for any installed language plugin on the ServiceNow® platform. Once installed, the language is available for configuration in the Multi language support card in Virtual Agent Chat Settings. But if you want to support a language that doesn't have a plugin, you can add it to the Languages [sys_language] table. Once added, you can enable dynamic machine translation for that language.

For more information about multi-language support options and their tradeoffs, see Localization options for Virtual Agent. For more information about custom localizations, see Custom translations.

Procedure

1. Navigate to **All**, and then enter `sys_language.list` in the filter.
2. On the Languages page, click **New**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. On the form, fill in the fields.

Field	Description
Name	Name and locale of the language, if applicable. For example, **Spanish (Mexican)**.
Active	Check box indicating that the language is enabled on the instance.
ID	The BCP 47 code for the language. For example, **es-MX**.
Text Direction	Direction of text for the language. Options are **Left-to-Right** or **Right-to-Left**.
Fallback	Language to be used if a translation is not available. The language plugin must be installed on the instance and activated for NLU, if you are using NLU topic discovery. For example, if the language is Mexican Spanish, you can specify **Spanish** as the fallback language.

4. Click **Submit**.
5. **Optional:** For a better user experience, translate some of the Virtual Agent system messages into the new language.

   a. Navigate to **All**, and then enter `sys_ui_message.list` in the filter.

   b. Translate the following Keys:
   - Are you sure you want to end the current conversation?
   - Click here to start a new conversation
   - Close contact options
   - [language name] (for example, **English** or **German**)
   - Disable audio notifications
   - End conversation
   - I have detected you are typing in {0}. Would you like to continue the conversation in {0}?
   - Just now
   - No
   - No Chat Agents Currently Available
   - Please pick an option.
   - Please type your request
   - Please type your response here
   - Send
   - Start a new conversation
   - Start typing to filter the list of topics below...

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Support options
- Yes

Note:
If you specify a supported fallback language for the language you're adding, you do not need to translate Keys in the Messages table. For example, if you add Mexican Spanish as a language, you can specify Spanish as the fallback language. The Spanish language plugin already contains translations of these messages. For more information, see Specify a fallback language for locale-specific languages and NLU prediction.

6. When the languages have been added, enable Dynamic Translation.
   For more information on enabling Dynamic Translation, see Enable Dynamic Translation for languages in Virtual Agent and Configure multilingual service for Now Assist applications.

Specify a fallback language for locale-specific languages and NLU prediction

Provide language locale support by specifying a fallback language for Virtual Agent to use for topics, keywords, and NLU prediction. For example, the ServiceNow® platform doesn't support Mexican Spanish (mx-es), but it does support Spanish (es), which you can designate as the fallback language for a better user experience.

Before you begin

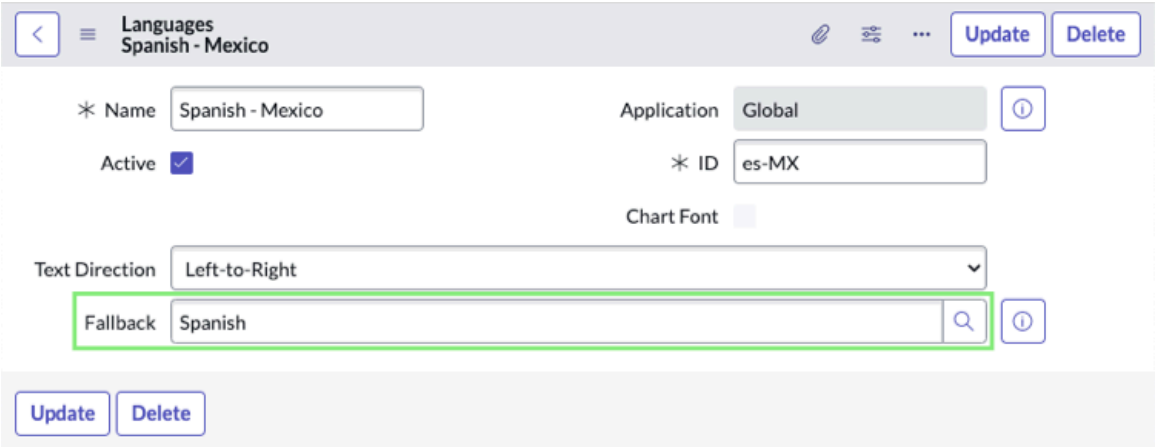
Note:
The fallback language plugin must be installed on the instance. Once installed, the language is available in the Languages [sys_language] table. If Now Assist in Virtual Agent is on and you work with LLM-enabled conversations, you can only establish a fallback language in the Languages [sys_language] table rather than use the following steps.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Virtual Agent**.
3. On the Multi language support card, slide the **Language Detection** toggle switch to enable it.
4. Select **View All**.
5. Select the name of a language to open the record.
6. Select **Edit Record** at the top of the page.
7. In the **Fallback** field, select the Search icon ( ) and select an available language.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



8. Select **Update**.

Result

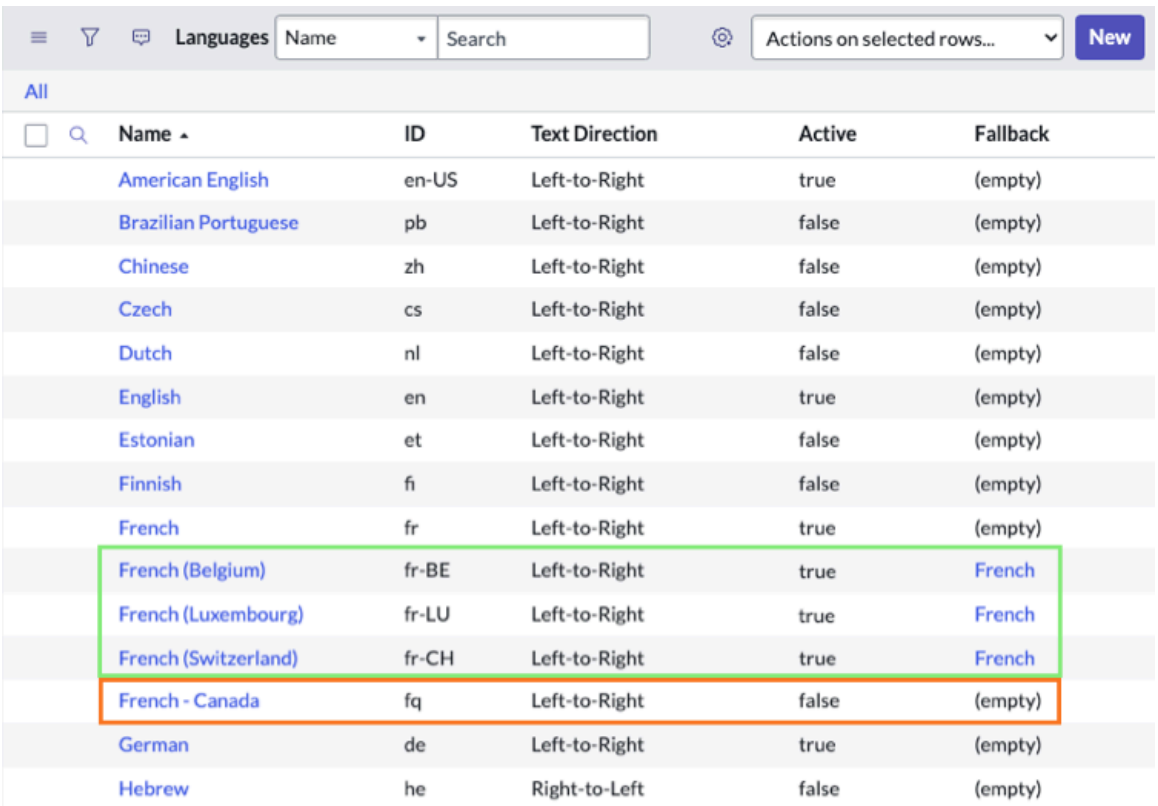Custom locales appear in the Languages [sys_language] table, along with their fallback language. The language code (ID) indicates a language that Virtual Agent can detect. In the following example, three French locales use French as the fallback language. Only French Canadian remains unconfigured.



Name	ID	Text Direction	Active	Fallback
American English	en-US	Left-to-Right	true	(empty)
Brazilian Portuguese	pb	Left-to-Right	false	(empty)
Chinese	zh	Left-to-Right	false	(empty)
Czech	cs	Left-to-Right	false	(empty)
Dutch	nl	Left-to-Right	false	(empty)
English	en	Left-to-Right	true	(empty)
Estonian	et	Left-to-Right	false	(empty)
Finnish	fi	Left-to-Right	false	(empty)
French	fr	Left-to-Right	true	(empty)
French (Belgium)	fr-BE	Left-to-Right	true	French
French (Luxembourg)	fr-LU	Left-to-Right	true	French
French (Switzerland)	fr-CH	Left-to-Right	true	French
French - Canada	fq	Left-to-Right	false	(empty)
German	de	Left-to-Right	true	(empty)
Hebrew	he	Right-to-Left	false	(empty)

Localizing Virtual Agent conversations

The ServiceNow platform provides several methods for localizing Virtual Agent conversations, depending on your needs. Use the Localization Framework to manage all aspects of the translation process, whether you are using machine translation, a third-party provider, or both.

Use the ServiceNow Localization Framework to standardize and track the translation process for Virtual Agent topics. The framework enables you to define the business process for translating your conversations. Use it to configure the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- How localization requests are fulfilled.

  Options include machine translation, a translation management system (TMS), and exporting and importing files.

- Who is responsible for each step in the process.

  Virtual Agent uses the following roles:

  - Localization requestor
  - Localization fulfiller
  - Localization editor

- Business rules for the process:
  - Auto translation and publication
  - Approval required for translation and publication

To learn more, see Localization Framework. To learn more about localization roles, see Localization roles for Virtual Agent.

Localizing topics

The localization process flow depends on the method of topic discovery that you are using for your topics. The following types of topic discovery are supported using the Localization Framework.

- Keyword topic discovery

  When you use the Localization Framework, the chat conversation and the keywords associated with the topic are translated.

- Natural Language Understanding (NLU) topic discovery

  If your topics use NLU, both the topic and the model group must be localized. When you request a translation from Virtual Agent Designer, the topic and any optional keywords are translated. You must request translation for model groups from NLU Workbench. For more information about that process, see Translate a multilingual model.

  Once the topic and secondary models are localized, you may need to map the models to the topic before publishing them.

Prerequisites

Important:
Currently, translatable strings such as topic text and bot responses cannot contain embedded quotes. Strings that contain embedded quotes cannot be localized.

Do the following before you begin managing translations:

- Activate the ServiceNow plugin for each language you want to support.

  The Localization Framework is also installed by default. For more information, see Activate a language.

- Configure the translation mode that you want to use in the Localization Framework.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You can configure machine translation, a translation management system (TMS), or send via email. For more information, see Translation modes.

- If you are using Natural Language Understanding (NLU), enable languages in Virtual Agent settings.

  For more information, see Enable NLU languages in Virtual Agent settings.

- If necessary, add secondary languages to your NLU model group. For more information, see Multilingual model management.
- Assign localization roles to team member groups.

  Users are assigned different roles based on their responsibilities for the translation process. For more information, see Localization roles for Virtual Agent.

Manage languages by model

If NLU is enabled for your instance, you can view and manage translations by model and language. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, and then click **Manage languages**. Choose a model and a language, and then you can do the following:

- View translation status
- Request translations
- View or edit translations
- Test translations

Click **Manage NLU translations** for easy access to the model management page in NLU Workbench.

For more information, see Localize Virtual Agent topics that use NLU topic discovery.

Enable NLU languages in Virtual Agent settings

If you plan to use language-specific NLU models, you must enable the installed languages in the Supported NLU Languages list. A language is enabled if the **Enabled** column displays true. English language is enabled by default.

Before you begin

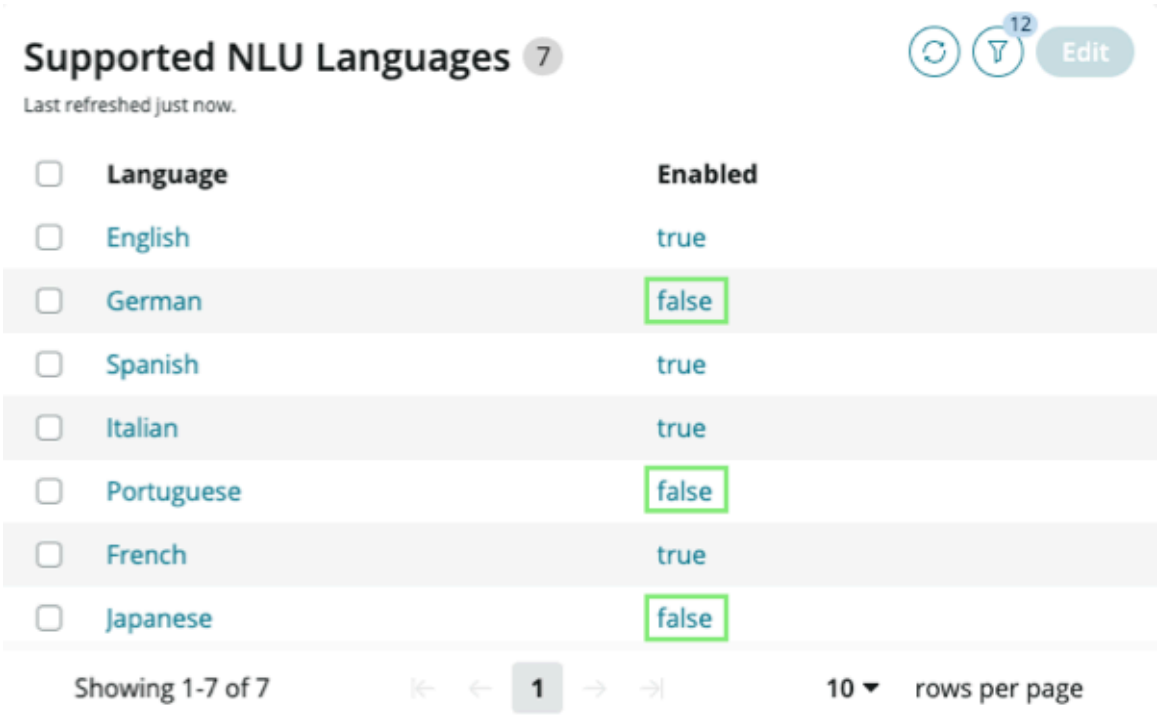
Activate the ServiceNow plugin for each language you want to support. For more information, see Activate a language.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Click **Virtual Agent**.
3. Under Natural Language Understanding (NLU), click **View settings**.
4. Find the languages in the Supported NLU Languages list.
5. If the Enabled column displays **false** for a language, select the link to open the language NLU properties.
   For example, in the following image, German, Portuguese, and Japanese are not enabled.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



6. Select the **Enabled** check box.
7. Click **Save**.

Localize Virtual Agent topics that use keyword topic discovery

Use the ServiceNow Localization Framework to manage the process of localizing Virtual Agent conversations and keywords.

Before you begin

Check the prerequisites for translating Virtual Agent components. For more information, see Localizing Virtual Agent conversations.

Make sure that your Virtual Agent topics are published and performing the way you want them to. Make any adjustments before you send them to localization.

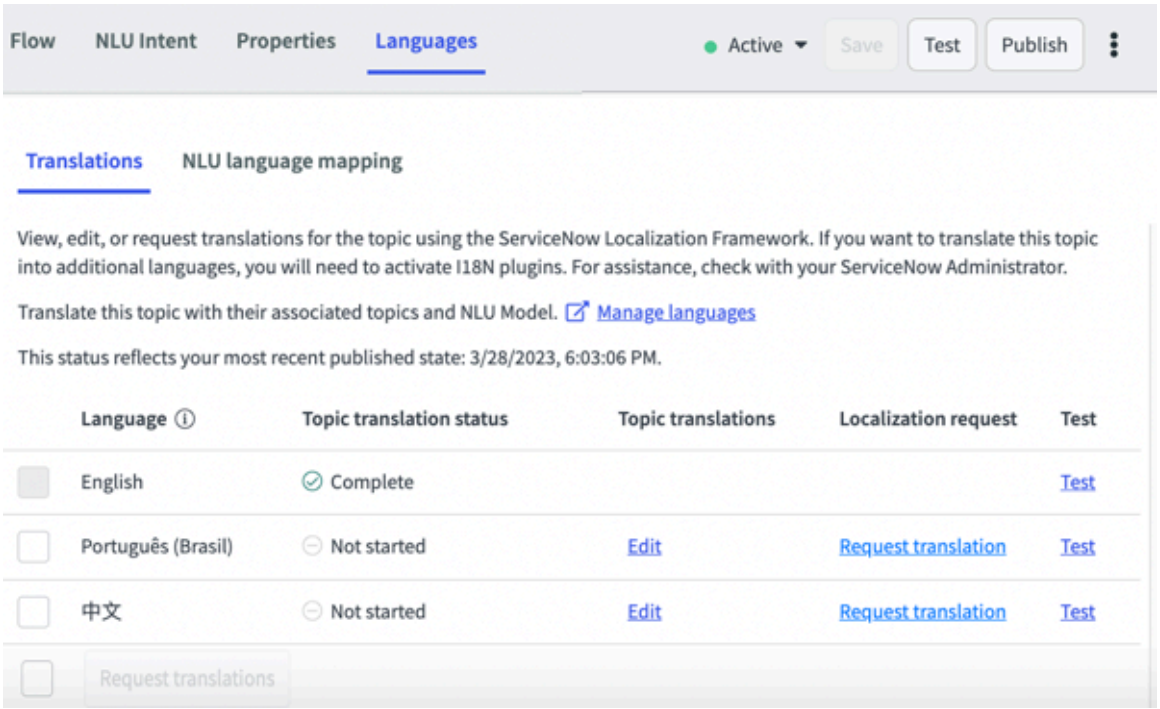
Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Select the **NLU** toggle, and open the topic that you want to translate.
3. Select the **Languages** tab.
   Only languages that are installed and activated are displayed. To learn how to activate localization plugins, see Activate a language.

> **Note:**
> The ServiceNow AI Platform provides translations for interface features and pre-built topics. So in some topics, languages may display as partially translated.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



4. Do one of the following:
   - Request translation:
     a. Select the applicable check boxes, and then click **Request translations**.
     b. When prompted, confirm your choice.

        A translation record is created, and the translation status changes to **In progress**. The translation task is assigned to a user with the localization fulfiller role. For information about the fulfillment process in the Localization Framework, see Fulfill a localization task.
   - Edit translations directly in Virtual Agent Designer.

Result

When translations are complete, Virtual Agent admins can view, unlock, or edit them from the topic Languages tab or the Manage languages page.

Once translations are published, they are made available to Virtual Agent topics that use keywords dynamically.

Localize Virtual Agent topics that use NLU topic discovery

Use the ServiceNow Localization Framework to manage the process of localizing Virtual Agent conversations that use Natural Language Understanding (NLU).

Before you begin

Check the prerequisites for translating Virtual Agent components. For more information, see Localizing Virtual Agent conversations.

Make sure that your Virtual Agent topics are published and performing the way you want them to. Make any adjustments before you send them to localization.

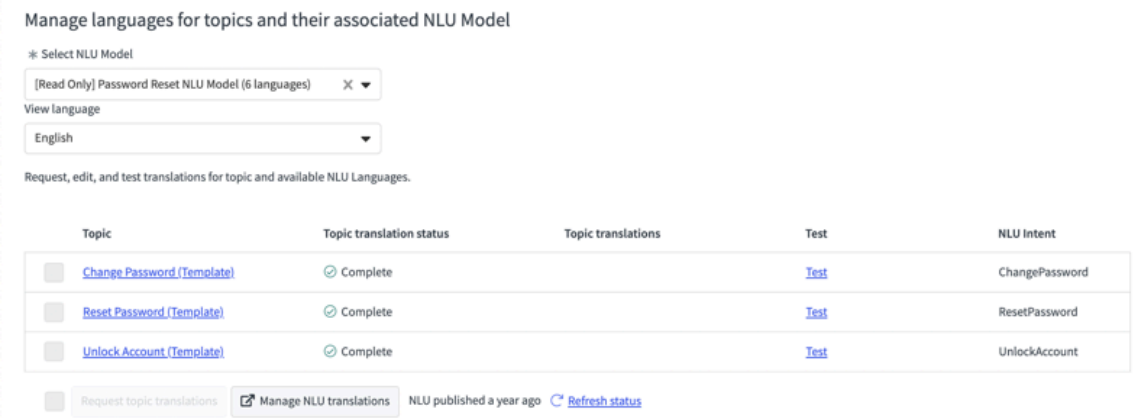
Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Slide the disovery type toggle switch to **NLU/Keyword**, then select **Manage Languages**
3. In the **Select NLU Model** list, select the model group you want to manage.
   Intents that are mapped to a topic display on the page.
4. In the **View language** list, select a language.
   The translation status of each topic in the chosen language displays on the page. Select a topic name to open the topic in Virtual Agent Designer, view or edit translations, or test translated content. The **Topic translation status** column shows the current status of the topic in the localization process.

   Manage languages page

   If the **Topic translation status** column shows **Needs publishing**, you must publish the topic before you can submit it for translation.

   > **Note:**
   > The ServiceNow AI Platform provides translations for interface features and pre-built topics. So in some topics, languages may display as partially translated.

5. Do one of the following:
   - Select the check boxes for the topics you want to translate, and then click **Request topic translations**. When prompted, confirm your choice.

     A translation record is created, and the translation status changes to **In progress**. The translation task is assigned to a user with the localization fulfiller role. For information about the fulfillment process in the Localization Framework, see Fulfill a localization task.

     > **Note:**
     > If a topic is already in localization, the corresponding check box is not available.

   - Edit translations directly.
6. Click **Manage NLU translations**.
   The model opens in NLU Workbench. Request translations for your model group. For more information, see Translate a multilingual model.

Result

When translations are complete, Virtual Agent admins can view, unlock, or edit them from the topic Languages tab or the Manage languages page.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Once translations are published, they are made available to Virtual Agent topics that use keywords dynamically. However, language-specific intent matching is not available until model groups are also translated and published.

What to do next

You may need to map a topic to secondary models or a language-specific model.

When translations are done, you can test localized NLU models.

Map a topic to a secondary NLU model

Map a Virtual Agent topic to a secondary model in the model group or to a standalone, single-language NLU model for each supported language.

Before you begin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

If you're using ServiceNow NLU, review NLU model mapping in Virtual Agent Designer for an understanding of NLU model groups.

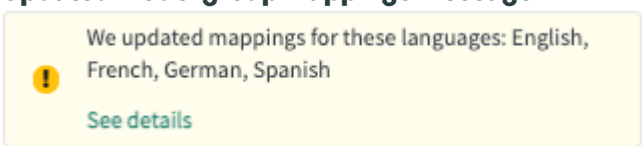
If necessary, add secondary languages to the model group in NLU Workbench to create language-specific versions of the model. For more information, see Multilingual model management.

Role required: virtual_agent_admin or admin


About this task

If you select a secondary model for a language that is part of a different model group, the mapping changes for the entire topic. Secondary models must be part of the same model group as the primary language. You can select a different model and intent for a secondary language when it is the only language in the model (and therefore the primary language).

Updated model group mappings message



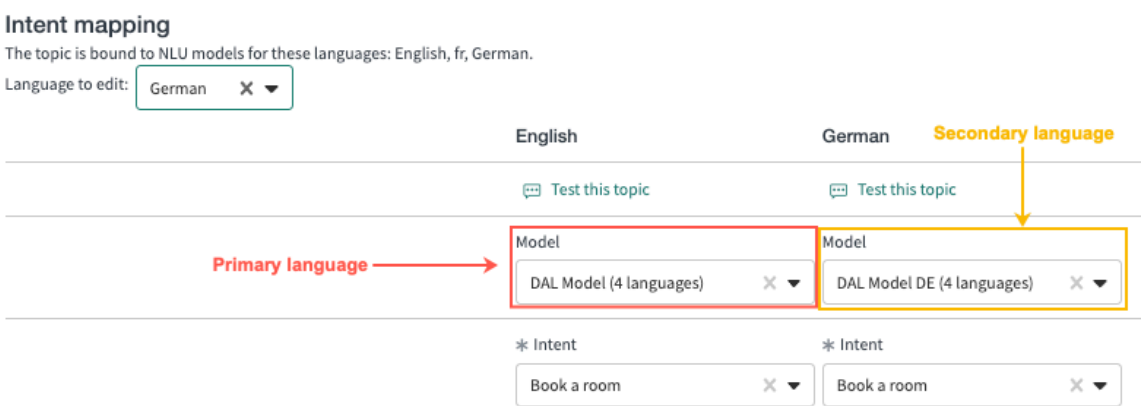Topic mapped to a model group with primary and secondary languages




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For more information, see NLU model mapping in Virtual Agent Designer.

Procedure

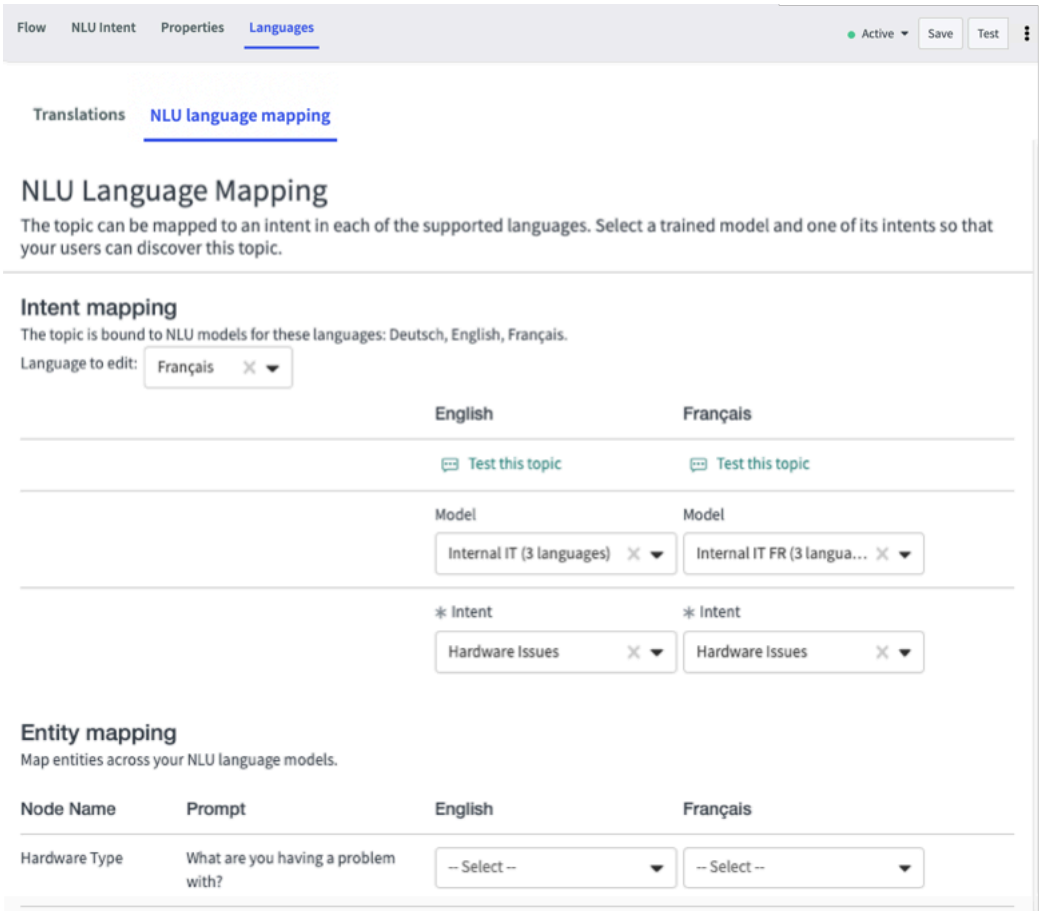1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Slide the discovery type toggle switch to **NLU/keyword** toggle, and open a topic.
3. Open the **Languages** tab, and then select the **NLU language mapping** tab.
   The first column is the NLU mapping that is based on your current session language. For example, if you're using English, the first column is **English**.
4. In the **Language to edit** list, select the language to map.
   The languages listed are based on the NLU languages that you enabled in Virtual Agent settings. After you select a language, a column displays in the Intent mapping section and, if applicable, in the Entity mapping section. For example, if you select **Français**, a French language column displays.



5. Update the Intent mapping section.
   a. In the Model row, select an NLU model for the language that you selected.
   b. In the Intent row, select an NLU intent for the language that you selected.
6. If applicable, update the Entity mapping section.
   For each language, map an entity from the model to an input node in the topic. In a conversation, these nodes are populated automatically with the entity value.
7. Click **Save**.

What to do next

Test topic and NLU model translations

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Test topic and NLU model translations

Test a translated Virtual Agent topic and the localized NLU model to ensure that it works as expected in a conversation.

Before you begin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

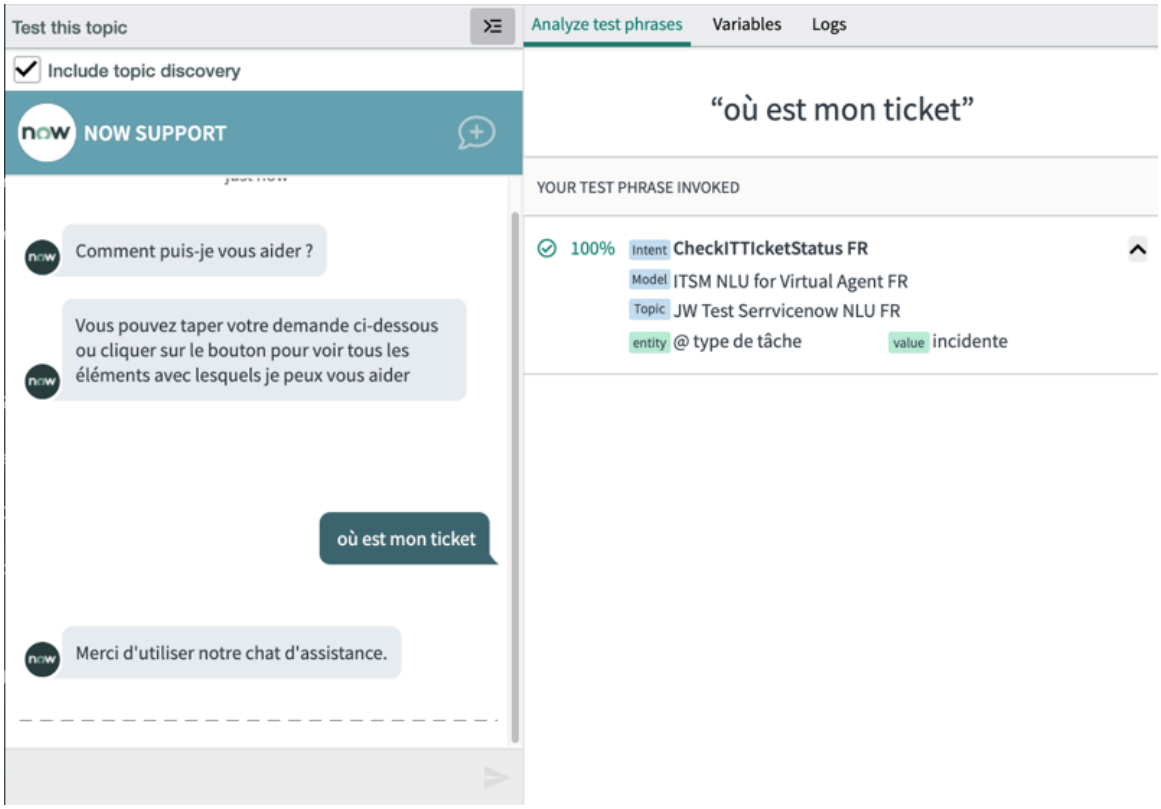
Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. Set the discovery type toggle switch to **NLU/keyword**, followed by the NLU topic you want to test.
3. Under the Languages tab, select **Manage languages**.
4. In the **Select NLU Model** list, select the model group to test.
5. In the **View language** list, select a language.
6. In the **Test** column for an intent, select **Test**.
7. On the test window, run the conversation and review the results in the test tabs.
   For more information about using the chat test window, see Testing NLU/Keyword topics.

   Example
   The following image illustrates how you can test a French translation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



8. End the test by closing the window.

What to do next

Use the test results to modify the topic as needed. Continue testing as you adjust your topic and the NLU language mappings.

When the topic is ready, publish the topic to make it available to users. You can publish all or some of the NLU mappings. For more information about publishing a topic, see Publish a Virtual Agent topic.

Tip:
You can view localization insights from the **Manage languages** page and the Virtual Agent Designer home page. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, and then select **Localization Insights** from the Resources.

Edit translations for Virtual Agent topics

A Virtual Agent admin user can edit and publish translations directly in Virtual Agent Designer.

Before you begin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

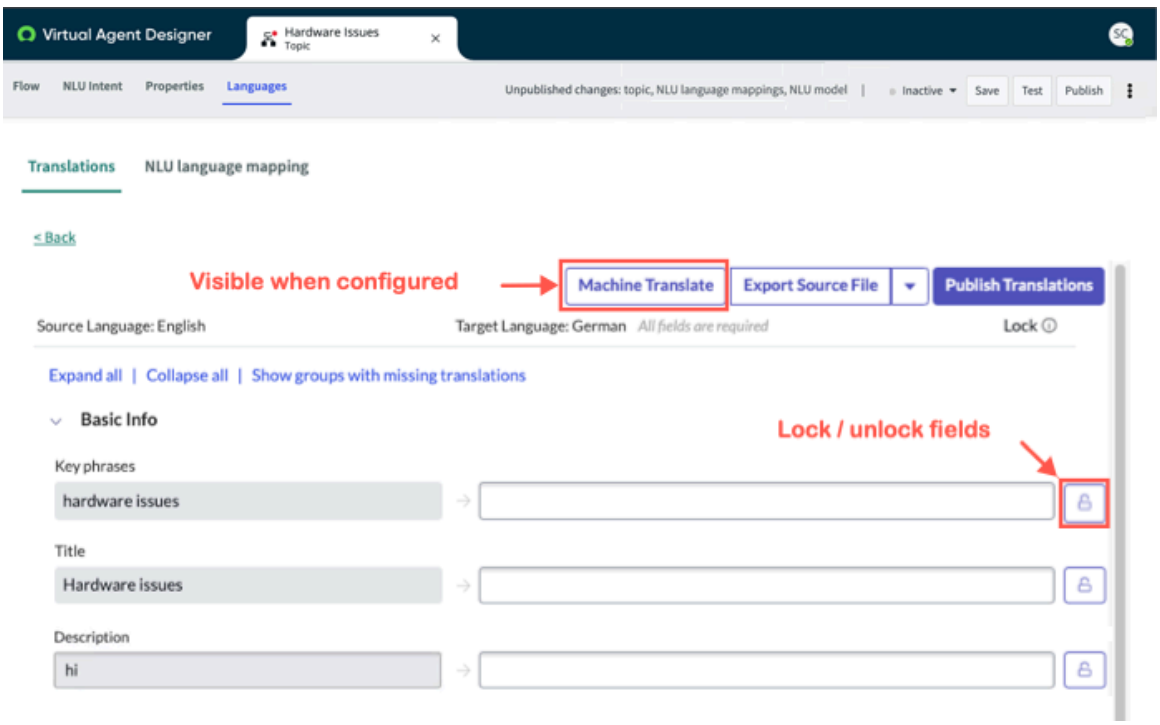
Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Do one of the following:
   - Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, open a published topic, and then select the **Languages** tab.
   - (NLU only) Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**, and slide the discovery type toggle switch to **NLU/keyword**. Select **Manage languages** from Resources, and then choose a model, language, and topic.
2. In the **Topic translations** column, select **Edit**.

   Example
   The Edit Translations form opens.



3. On the Edit Translations form, you can do any of the following:
   - Unlock fields and enter translations directly on the form.
   - If it is configured in the Localization Framework, use machine translation to fill in the fields.

     To set up machine translation, see Create a translator configuration.
   - Export files to send to a third party for translation.

     Select **Export Source File**, and then choose the file type. Select **Export File** to begin the download.
   - Import translated files received from a translation service.

     From the Export Source file list, select **Import Translated File**.
4. When translations are ready to publish, select **Publish Translations**.

Result

Once translations are published, they are made available to Virtual Agent topics that use keywords dynamically.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If your topic uses Natural Language Understanding (NLU), train your localized models. You may also need to map them to the topic. Then test and publish your localized models to ensure that native speakers can access localized intents. For more information, see Map a topic to a secondary NLU model and Test topic and NLU model translations.

Request bulk translations for multiple topics

If you need to translate many Virtual Agent topics across multiple models at one time, you can use the [sys_cs_topic] table list view to request translations.

Before you begin

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > **sys_cs_topic.list**.
2. Select the topic records you want to translate.
3. From the **Actions on selected rows** list at the bottom of the page, select **Request Translations**.
4. In the Request Translations dialog box, select the languages.

   Only languages that are installed and activated in the Localization Framework are displayed. To learn how to activate localization plugins, see Activate a language.
5. Click **Submit**.

Authoring Virtual Agent conversations for localization

Use localization methods in your Virtual Agent scripts to ensure that the content can be translated. Localization methods are designed to show the original text when no translation is found. These methods can be applied to your code before you have created translations.

Localization method for message content

The `gs.getMessageLang` method checks the Message table [sys_ui_message] for a translated version of the text in the language selected for the current user. If a translated version isn't found, the default language (English) is returned.

This code provides a greeting that dynamically adds the value of the `first_name` variable.

```
(function execute() {
        return 'Hi there ' + vaInputs.first_name;
})()
```

The following example shows that same code rewritten for localization.

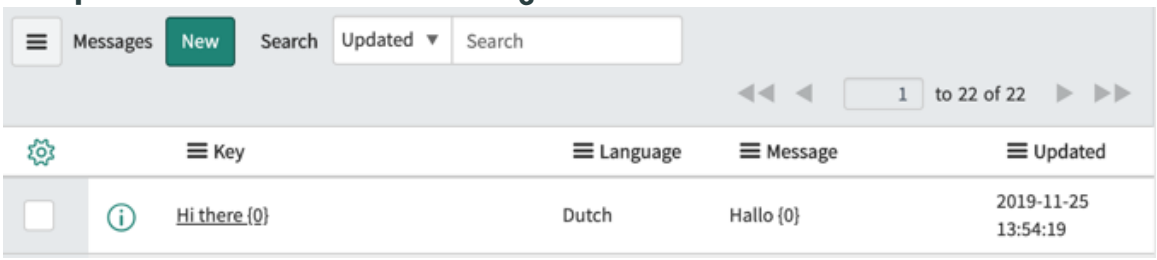
```
(function execute() {
         return gs.getMessageLang('Hi there {0}',
 vaContext.getRequesterLang()), [vaInputs.first_name]);
})()
```

The second example uses the `gs.getMessageLang` method. The text is the same as the previous example, but the format is changed. The number in brackets acts as a placeholder for the variable, which is then listed in an array after the comma: `[vaInputs.first_name]`. The `gs.getMessageLang` method searches for a record on the Message table with a key value matching `Hi there {0}` and a language value matching the requester's language. The method returns the translated version of the text, which is stored in the **Message** field of the record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Language values use ISO standard two-character language codes. For more information, see ISO 639.1 language codes.

Example translation record in the Message table



Note:
Content is translated only for published topics. Content does not appear translated when previewing unpublished topics.

Language support for NLU services

Entity extraction is supported on ServiceNow® NLU models for specific languages only. The remaining languages support intent matching only. If you are using IBM Watson Assistant or Microsoft LUIS, supported languages vary.

You can see the list of currently supported languages in the Open NLU Driver Languages [open_nlu_driver_language] table.

The VA NLU Languages [sys_cs_nlu_language] table lists the languages that are currently enabled in Virtual Agent.

Note:
If you choose a language that doesn't support full entity extraction, an error message appears.

For unsupported language codes, you can specify a fallback language for NLU prediction. For example, if a user's language detected language is Mexican Spanish (es-mx), you can specify Spanish (es) as the fallback language, if it is enabled on your instance. For more information, see Specify a fallback language for locale-specific languages and NLU prediction. You can also enable Dynamic Translation for Virtual Agent. For details, see .

Note:
This content focuses specifically on NLU language support. For more information on LLM language support for Now Assist in Virtual Agent, see Multilingual service for Now Assist.

Supported NLU languages

Service	Supported languages
ServiceNow NLU	For intent matching and entity recognition: • English • French • German • Japanese • Spanish For intent matching only:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported NLU languages (continued)

Service	Supported languages
	• English • Chinese (Simplified) • Danish • Dutch • Finnish • French • French (Canadian) • German • Italian • Japanese • Korean • Norwegian • Polish • Portuguese (Brazilian) • Spanish • Swedish
IBM Watson Assistant	• English • Chinese (Simplified) • Dutch • French • German • Italian • Japanese • Korean • Portuguese • Spanish
Microsoft LUIS	• English • Chinese (Simplified) • Dutch • French • French (Canadian) • German • Italian • Japanese

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported NLU languages (continued)

Service	Supported languages
	• Korean • Portuguese (Brazilian) • Spanish • Turkish
Google Dialogflow ES	• English • Chinese (Simplified) • Chinese (Traditional) • Dutch • Finnish • French • French (Canadian) • German • Italian • Japanese • Korean • Norwegian • Polish • Portuguese • Portuguese (Brazilian) • Russian • Spanish • Swedish • Thai • Turkish

Localization roles for Virtual Agent

Assign localization roles according to a user's scope in the localization process. Users may request translations, fulfill translation requests, and edit translations, based on their role.

The localization process follows this basic flow:

1. Topics are developed and released in the source language (for example, English).
2. Topics are translated, either by request or by editing them directly in Virtual Agent Designer.

   If you are using NLU models, the models must be translated as well. For more information about that process, see Multilingual model management.
3. Translations are tested and published.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Virtual Agent role privileges vary with the user's function in this process. These roles are also defined in the Localization Framework. For more information, see Localization Framework roles.

To learn more about managing subscriptions, see Managing per-user subscriptions in Subscription Management and contact your account representative.

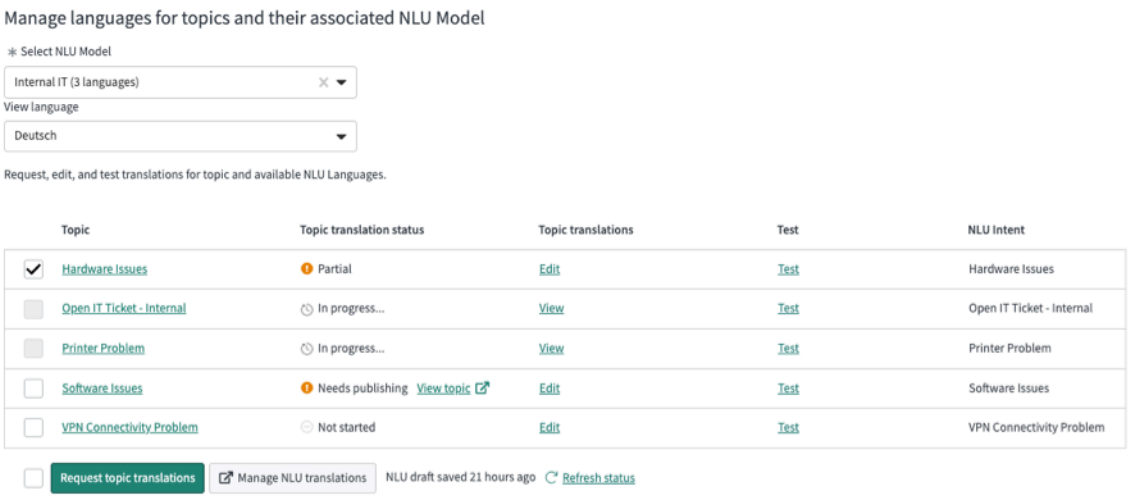
Virtual Agent admin permissions

The Virtual Agent admin role contains the localization requestor and localization editor roles by default. Users can do the following:

- Request translations
- View existing translated content
- Unlock and edit translated content (unless translation is in process)

The localization task is not available to this user.

Manage languages page with the Virtual Agent admin role




Localization fulfiller permissions

The localization fulfiller role may not have Virtual Agent privileges. In that case, the user would only have access to assigned Localization Framework tasks.

If a Virtual Agent admin has the localization fulfiller role, the **Manage languages** page lets the user view the localization task that was created.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

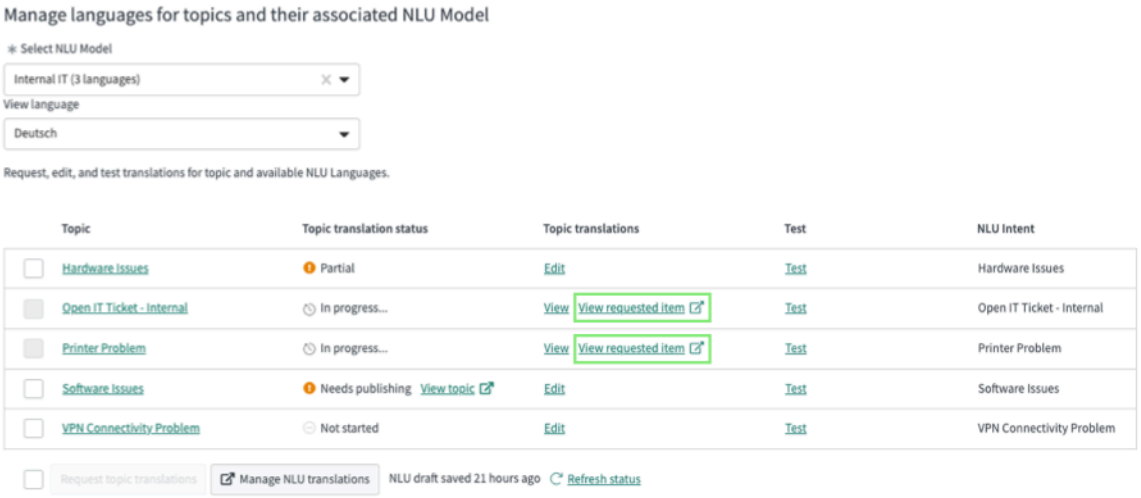Manage languages page with Virtual Agent admin and localization fulfiller roles



Click **View requested item** to open the localization fulfillment task in a new window.

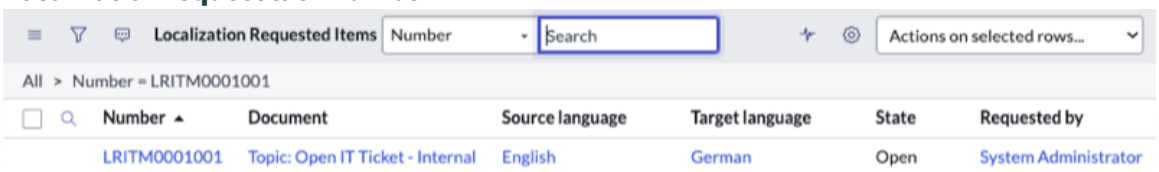Localization request task number



Localization requestor [localization_requestor]

Requests translations for all the Virtual Agent components into one or more languages. Can also view localization insights. The Virtual Agent admin [virtual_agent_admin] role contains this role by default.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Localization fulfiller [localization_fulfiller]

Provides translations for the requested Virtual Agent topics. Depending on the flow, duties may include editing the translations in the Localization Framework task, interacting with third parties, and loading, verifying, and publishing translations.

Contains Roles

List of roles contained within the role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Localization editor [localization_editor]

Edits the translations directly in Virtual Agent Designer. The NLU admin [nlu_admin] and Virtual Agent admin [virtual_agent_admin] roles contain this role by default.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Virtual Agent admin [virtual_agent_admin]

Contains the localization requestor and localization editor roles by default.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Virtual Agent translation tables

Virtual Agent uses the [sys_translated_text] and [sys_ui_message] tables to store translated text.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Translation tables used by Virtual Agent

Table	Description
Translated Text [sys_translated_text]	Stores translations for fields with the field type translated_text or translated_html (see the dictionary entry). The [sys_cs_topic] table contains the English keywords and topic titles. It pulls translations from the [sys_translated_text] table. For details about translating text content into different languages, see Translated text table and Translating text fields.
Message [sys_ui_message]	Stores expert translations for messages in Virtual Agent topics. Pre-built topics have already been translated, but you must provide translations for any content you create for your instance. For more information about the Message table, see Message table.
Text Translations for Dynamic Translation [sys_cs_dynamic_translation_text]	Stores copies of the translations found in the Message [sys_ui_message] table and previously dynamically translated messages. This view-only table is only available when the Dynamic Translation for Virtual Agent plugin is installed and the Dynamic Translation in Virtual Agent feature is enabled. This table is cleared every 24 hours to ensure that the most up-to-date translations stored in the Message [sys_ui_message] table are being referenced. For more information about how the Text Translations for Dynamic Translation [sys_cs_dyamic_translation_text] table works with Dynamic Translation in Virtual Agent, see .

Integrating Virtual Agent with other channels

Integrate and extend the capabilities of Virtual Agent by connecting to your employees and customers where they already are. They are engaged in web portals, Now® Mobile apps, and collaboration tools such as Slack, Microsoft Teams, Facebook Messenger consumer app, Workplace enterprise messaging app, and any other popular chat or messaging app.

Creating conversational custom chat integrations in Virtual Agent

Conversational custom chat integration framework is a powerful framework consisting of scriptable APIs and configurations to bring the ServiceNow® Virtual Agent to any conversational interface.

How custom chat integrations work

Virtual Agent Chat Server (VACS) supports the following chat client integration without enhancements or plugins:

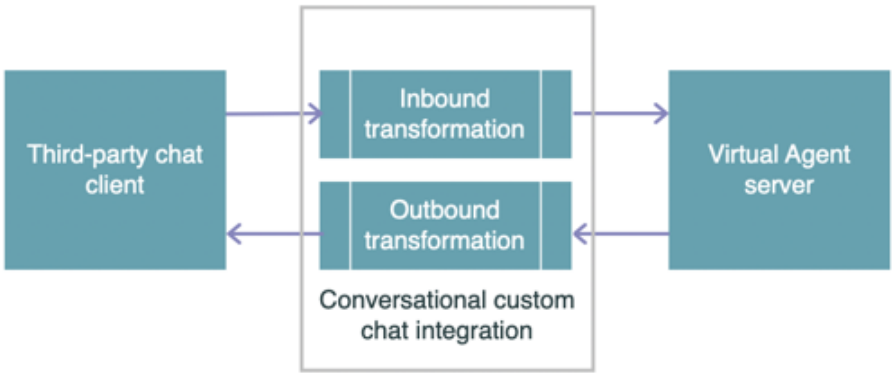
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Microsoft Teams
- Slack
- Workplace
- WhatsApp
- LINE
- Facebook Messenger
- Twilio
- Alexa
- Amazon Connect
- Google Assistant
- ServiceNow® Service Portal
- ServiceNow® Now Mobile
- Apple Messages for Business

If you're using a chat client that is not in the list, you can create a custom integration using conversational custom chat integration framework.

You can use any channels that support conversational interfaces, such as Web Portals, Mobile Apps, Slack, Microsoft Teams, SMS, and any other channel and add ServiceNow® Virtual Agent to them.

With a conversational custom chat integration, you can manage and control how your end users' chat experience. The framework helps transform messages from a chat client to VACS, and VACS back to the chat client in a format that renders well on your chat interface.



The transformation is carried out through a set of Workflow Studio scripts. If you want more information on how to use Workflow Studio, see Workflow Studio.

Basic integration using conversational custom chat integration framework

You can use the following links to configure a basic custom chat integration.

To see an example of a custom chat integration using Telegram Messenger, see the Telegram demo and integration on the ServiceNow Developer Site. (You may need to log in to access the demo.)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a Virtual Agent conversational custom chat integration configuration

Use the Custom Chat Configuration Integration Framework (CCCIF) to create a conversational custom chat integration to support third-party chat clients so they can connect to the Virtual Agent Chat Server (VACS).

Before you begin

Activate the Glide Virtual Agent plugin (com.glide.cs.chatbot) if it's not already activated. This plugin automatically activates the Conversational Custom Chat Integration plugin (com.glide.cs.custom.adapter) for custom chat integrations.

Role required: admin

About this task

To integrate chat clients with Virtual Agent, follow these configuration steps and add action scripts to Workflow Studio.

Note:
The CCCIF uses Integration Hub. Transactions count against your Integration Hub quota.

Procedure

1. Create a new channel or update an existing channel for the integration.
2. Configure a new provider for the integration.
3. Set up message authentication.
4. Create a channel identifier.
5. Select rich controls for inbound (user input) and outbound (bot response) transformation.
6. Create and configure a scripted REST API for your custom chat integration.
7. Create the action scripts.

Create a new channel for your custom chat integration

Create a new channel or update an existing channel for your custom chat integration. Channels are defined in the Messaging Channels [sys_cs_channel] table.

Before you begin

Activate the Glide Virtual Agent plugin (com.glide.cs.chatbot) if it's not already activated. This plugin automatically activates the Conversational Custom Chat Integration plugin (com.glide.cs.custom.adapter) for custom chat integrations.

Note:
The Conversational Custom Chat Integration Framework (CCCIF) uses Integration Hub. Transactions count against your Integration Hub quota.

Role required: admin

Procedure

1. Navigate to **All**, and then enter `sys_cs_channel.list` in the navigation filter.
2. On the Messaging Channels page, select **New**.
   Alternatively, select an existing channel to open it.
3. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Name	Name of your channel, such as Mobile App or SMS.
Opted in all topics by default	Option to make all topics available in this channel.
Enable Notifications	Option to turn notifications on or off on this channel.
Live Agent Only	Option to initiate conversations with live agents, bypassing the Virtual Agent bot.
Store app page link	This field should be left empty.
Type	Channel type. ○ **Chat**: Standard chat experience ○ **Messaging**: Long-running conversation ○ **Phone**: Phone (audio) conversation ○ **Walk-up**: In-person conversation
Conversation Idle Timeout	Number of seconds that abandoned Virtual Agent and Agent Chat conversations remain open in the channel, after the requester's last response. This channel-specific value overrides the following settings: ○ Default idle conversation timeout value, which is 7200 seconds ○ Idle conversation time-out value set through the *com.glide.cs.conversation_idle_timeout* system property to override the default timeout value For more information about conversation idle timeouts, see Closing Virtual Agent and Agent Chat conversations.
Secure	Option for the channel to be secure to support handling of sensitive data such as passwords.
Support typing indicator	Option to display typing indicators for this channel. Flag applies to both agent and bot indicators.
Icon	This field should be left empty.

4. Select **Submit**.

What to do next

Configure a provider for your custom chat integration

Configure a provider for your custom chat integration

Create a new provider for your custom chat integration. Providers are defined in the Connections [sys_cs_provider] table.

Before you begin

Create a new channel for your custom chat integration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: admin

About this task

Configure a new provider for each integration that you set up.


Procedure

1. Navigate to **All**, and then enter `sys_cs_provider.list` in the filter.
2. On the Connections page, select **New Custom**.
3. On the form, fill in the fields.

Field	Description
Name	Name of your provider application. For example: `VA SMS Twilio Adapter`
Provider attributes action	Name of the provider attributes action script. The provider attributes action script can return a Provider auth token, a user identifier, user input, and context variables.
Response processor action	Name of the response processor action script. The Response processor action script performs platform actions. For example, updating a message status based on the response received for an outbound message.
Version	The version of the provider. The framework is able to send the expected inputs to actions and subflows and handle the expected outputs. There are 2 versions: ○ **1.0.0**: The assumed version unless explicitly defined on the provider. ○ **1.1.0**: The `outbound_token` input parameter (from the provider channel identity) was added to invocations of the sender subflow/action.
HTML to Image conversion required	Option to convert an HTML bot response into an image and link. Used for chat interfaces that do not support HTML rendering.
Allow account linking	Option to link your account to an existing ServiceNow® profile.
Channel	Channel that this provider supports and the one to which the integration is being built.
Sender action	The sender action script. The sender action script bundles the request and then sends the response via Workflow Studio or Integration Hub asynchronously.
Sender subflow	The sender subflow bundles the request and sends the response via Workflow Studio (FD) or Integration Hub (IH) asynchronously.
Contextual action	Name of the contextual action script. The contextual action script supports custom contextual actions.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

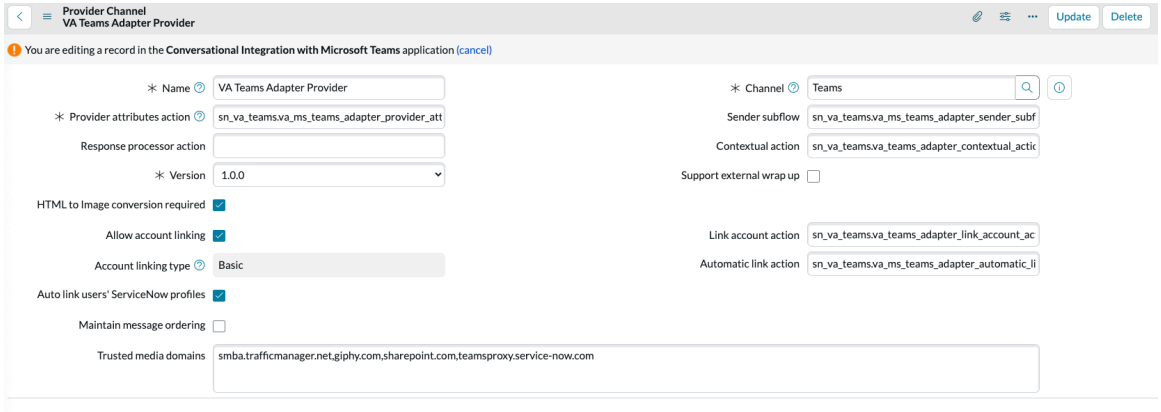4. Click **Submit**.



What to do next

Set up message authentication for your custom chat configuration

Set up message authentication for your custom chat configuration

Create a Hash Message Verification record and Message Auth record to set up message authentication for your custom chat integration. This is configured in the Hash Message Verifications [hash_message_verification] table.

Before you begin

Configure a provider for your custom chat integration.

Role required: admin

About this task

You can create a Hash Message Verification record and Message Auth record to set up message authentication.

Procedure

1. Navigate to **All**, and then enter `hash_message_verification.list` in the filter.
2. On the Hash Message Verifications page, click **New**.
3. On the form, fill in the fields.

Field	Description
Name	Name of the authentication token, such as TwilioSMSTestAppAuthToken.
Description	Description of the authentication token, such as "Twilio SMS Testing application Auth Token."
Secret	Authentication token (random string).

4. Click **Submit**.
5. Navigate to **All**, and then enter `message_auth.list` in the filter.
6. On the Message Auths page, click **New**.
7. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Name	Name of the message authentication, such as VA Twilio SMS Test App Message Authentication.
Provider	Provider, such as Twilio.
Group name	Name of the group or team of the provider channel.
Service Portal	Option to redirect users to a service portal for authentication during account linking.
Inbound message verification	Hash message token that was created.
Outbound message creation	Hash message token that was created.
Outbound service token	Token passed to the sender subflow that is used to invoke REST endpoint for the chat client. Use the outbound token to send a message using the REST API.

8. Click **Submit**.

What to do next

Create a channel identifier for your custom chat integration

Create a channel identifier for your custom chat integration

Create a channel identifier for your custom chat integration in the Provider Channel Identities [sys_cs_provider_application] table.

Before you begin

Set up message authentication for your custom chat configuration.

If you're using domain separation, change the scope to the domain you want to use before you create the channel identifier. The domain ID will be stored in the [sys_cs_provider_application] table and passed to the Virtual Agent server as a context parameter, which will set the domain for the user.

Role required: admin

Procedure

1. Navigate to **All**, and then enter `sys_cs_provider_application.list` in the filter.
2. On the Provider Channel Identities page, click **New**.
3. On the form, fill in the fields.

Name	Name of the channel identity. For example: `VA SMS Twilio Adapter`
Provider	Select the name of your provider application that you set up in a previous step. For example: `VA SMS Twilio Adapter Pro`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default Portal	Portal in which chat links to ServiceNow records are opened by default, including links in cards used for Virtual Agent notifications and AI Search results.
Message auth	Select message authentication for the channel identifier that you set up in a previous step.
Inbound ID	Identifier for your bot. For example, the phone number.
Short description	Description for your channel identifier.

4. Click **Submit**.
5. **Optional:** Follow these steps again to create additional channel identifiers.

What to do next
Map rich controls to the channel in your custom chat integration

Map rich controls to the channel in your custom chat integration

Create records for rich controls in the Custom Adapter Configurations [sys_cs_custom_adapter_config] table. If a rich control is missing an outbound transformer implementation, a response is not served to the end user and that user may get an unsatisfactory chat experience.

Before you begin
Create a channel identifier for your custom chat integration.

Role required: admin

About this task
You must create a mapping for any rich controls your conversations will use in the channel. For example, you may need a mapping for *DefaultText*, which supports input and output text response, along with file upload and image response. If your channel doesn't support a control, then you won't need to map it. For example, SMS doesn't support video responses. For a description of each default rich control, see Default input and output rich controls for a custom chat integration.

Procedure
1. Navigate to **All**, and then enter `sys_cs_custom_adapter_config.list` in the filter.
2. On the Custom Adapter Configurations page, click **New**.
3. On the form, fill in the fields.

Field	Description
Provider	Provider that you created.
Control type	Default rich control type. For example, the DefaultPicker rich control type maps to File Picker, Topic Picker, and Boolean For more information about the types of controls, see Default input and output rich controls fo custom chat integration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Inbound transformer action	Name of the inbound transformer action script for this rich control. For example: `sn_va_sms_twilio.va_sms_twilio_adapter_input_text_inbound_transf`
Outbound transformation action	Name of the outbound transformer action script for this rich control. For example: `sn_va_sms_twilio.va_sms_twilio_adapter_input_text_outbound_trans`

4. Click **Submit**.

What to do next

Create and configure a scripted REST API for your custom chat integration

Create and configure a scripted REST API for your custom chat integration

Create a scripted REST API, add a scripted REST resource, set security and content negotiation, and set REST API rate limits.

Before you begin

Map rich controls to the channel in your custom chat integration.

Role required: admin

Procedure

1. Create the REST API.

   a. Navigate to **All** > **System web services** > **Scripted Web Services** > **Scripted REST APIs**.

   b. Click **New**.

   c. On the form, fill in the fields.

Field	Description
Name	Name of your API. For example, `ACME Mobile App Chat Adapter`.
API ID	API identifier. For example, `acme_chat`.
Protection policy	The protection policy for the script. ▪ **Read-only**: Script is viewable only. ▪ **Protected**: Users with password permissions can edit the script.
Application	The application containing the script record. **Global** is selected by default.
API namespace	The namespace the API belongs to. The value depends on the current application scope.

   d. Click **Submit**.

   e. **Optional:** Open the new record, navigate to **Related Links** and click **Enable Versioning**, and then click **OK**.
   Click **Update** to save your changes.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

2. Add a scripted REST resource to your new REST API.
   The scripted REST resource defines the scripted REST API definition that you created.

   a. Open the REST API record you created, and then navigate to the **Resources** tab under **Related Links**.

   b. Click **New**.
   Retrieve the payload from the request, and then write it to a hybrid queue.

   c. On the form, fill in the fields.

Field	Description
API Definition	Name of the parent API.
Application	The application containing the script record.
Name	Name of your API REST Resource. For example, **ACME chat**.
API version	API version. For example, **v1**. This field displays only if you enabled versioning for the REST API.
Active	Option to make the REST resource active.
HTTP method	HTTP method, such as POST, GET, and so forth.
Relative path	Relative path to the resource.
Script	Script for the REST resource.
Protection policy	The protection policy for the script. ▪ **Read-only**: Script is viewable only. ▪ **Protected**: Users with password permissions can edit the script.

Example of a scripted REST resource:

```
(function process(/*RESTAPIRequest*/
 request, /*RESTAPIResponse*/ response) {
    var body = request.body;
    var queryParams = request.queryParams; // incoming
 content is application/x-www-form-urlencoded in this example
    // get the provider application sys id. this can be done
 via a glide query using incoming data such as where the
 original message is being sent to. or it can be hard-coded
 such as this example.
    var providerAppId = "a5f8b75b7377001042281188caf6a73a";
    // the time of receipt is recorded for analytics purposes
    var d = new Date();
    var logTime = d.getTime();
    // add this message to the VA Server queue for processing
    var queued =
 sn_cs.VASystemObject.enqueueCustomAdapterMessage(providerApp
Id, JSON.stringify(queryParams),
 JSON.stringify(request.headers), logTime);
    if (queued == false) {
 response.setError(new sn_ws_err.BadRequestError('Failed to
 process the request.'));
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
    }
})(request, response);
```

3. Set security and content negotiation for your scripted REST resource.
   Choose to set authentication and request formats. If your custom integration does not rely on authentication, you may want to remove it as follows.
   a. In the new record for the Scripted REST Resource, navigate to the **Security** tab.
   b. Clear **Requires authentication**.
   c. Click the **Content Negotiation** tab, and then select **Override supported request formats**.
   d. Click **Submit**.
4. Set REST API rate limits to define the rate of incoming requests.
   a. Navigate to **All** > **System web services** > **REST** > **Rate Limit Rules**.
   b. Click **New**.
   c. On the form, fill in the fields.

Field	Description
Name	Unique name for the rate limit rule.
REST API	REST API that you created in an earlier step.
Version	Version of the REST API. Values listed depend on the selected REST API.
Resource	Resource for the specified Version. Values listed depend on the selected Version.
Active	Check box to indicate that the rate limit rule is active. Rate limit rules are activated by default as soon as you create them. You can deactivate rate limit rules to stop enforcing a rate limit or activate rate limit rules to resume enforcing a rate limit.
Request limit per hour	Maximum number of requests allowed per hour. **Note:** Whenever you update the value of this field, the ServiceNow AI Platform resets the count of requests to 0 and deletes all violations for the current hour.
Apply to	Users restricted by this rule. Select **All users**.

   d. Click **Submit**.

What to do next

Create the action scripts for your custom chat integration

Create the action scripts for your custom chat integration

Set up the transforms that your custom chat integration needs to communicate through the chat process.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Create and configure a scripted REST API for your custom chat integration.

Note:
All action messages relevant to the chat client are displayed to requesters during live agent conversations.

Role required: admin

Procedure

1. Navigate to the **All** > **Process Automation** > *Workflow Studio*.
2. Click the **Actions** tab.
3. Create the actions you require to complete the conversational custom chat integration. For details about the input and output used in action scripts, along with script examples, see Virtual Agent action scripts.

Default input and output rich controls for a custom chat integration

Input and output rich controls must be mapped to your custom chat integration in the Custom Adapter Configurations [sys_cs_custom_adapter_config] table. If a rich control is missing an outbound transformer implementation, a response is not served to the end user and that user may get an unsatisfactory chat experience.

The following default rich controls map to input and output rich controls. The *uiType* parameter refers to a topic control used to build conversations in Virtual Agent Designer.

Default input and output rich controls

Rich control	Description
ActionRichControl	This component handles the different events and actions that occur in a conversation. Some actions may not apply to all channels. For example, StartSpinnerActionMsg is ignored in SMS. ServiceNow® Virtual Agent produces the following types of action messages through this framework. The custom chat interface only recognizes certain action message types. • SeparatorActionMsg ||actionMsg instanceof • SystemActionMsg ||actionMsg instanceof • TopicFinishedActionMsg ||actionMsg instanceof • SwitchToVirtualAgentActionMsg ||actionMsg instanceof • SwitchConversationActionMsg ||actionMsg instanceof • ChatSubHeaderActionMsg ||actionMsg instanceof • StartSpinnerActionMsg ||actionMsg instanceof EndSpinnerActionMsg • SubscribetoSupportQueue ||actionMsg instanceof • SubscribeToChatPresence ||actionMsg instanceof • SwitchToLiveAgentActionMsg ||actionMsg instanceof

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default input and output rich controls (continued)

Rich control	Description
	ActionRichControl wraps these messages inside the *actionMsg* element. So, a single outbound transformer for ActionRichControl can handle all of these messages. There is no need for an inbound transformer for this component.
agentInfo parameter	If the rich control is sent from a live agent, then the *agentInfo* attribute is added to the rich control. Example: `{ uiType: "someType", group: "someGroup" agentInfo: { sentFromAgent: true } // please note that this object may contain more info in subsequent releases. ... }`
DefaultPicker	Maps to File Picker, Topic Picker, and Boolean controls. Example: `{ uiType: "Picker/TopicPicker/Boolean", group: "DefaultPicker", nluTextEnabled: true/false, promptMsg: "", // optional (needed for TopicPicker) label: "The question for the list", // always filled itemType: "Picture/List" // needed to user key to expect picture attached options: [{ label: "display label prompt", value: "the value required to satisfy the question", description: "a description of value_1 item" attachment: "www.foo", enabled: true/false }, ...] }` The optional *order* parameter lets you specify the order in which promoted topics should display. For example:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default input and output rich controls (continued)

Rich control	Description
	`"options": [{ label: "Check IT Ticket Status", value: "55720b465bf0201024f11fc40a81c72d", order: 100, enabled: true }, { label: "Live Agent Support", value: "ce2ee85053130010cf8cddeeff7b12bf", order: 200, enabled: true }, { label: "Open IT Ticket 2", value: "2a46cffbc7602010v088bbf603c260a7", order: 300, enabled: true }]`
DefaultText	Maps to Input Text, Output Text, and File Upload controls. Example: `{ uiType: "InputText/OutputText/FileUpload/Picture", group: "DefaultText", required: true/false, nluTextEnabled: true/false, itemType: "file/image/inputtext/outputtext", maskType: "SECURE/SENSITIVE/NONE" // null except for InputText/OutputText label: "The Question?" }`
DefaultDate	Maps to Date and Time controls. `{ uiType: "Date/DateTime/Time", group: "DefaultDate", required: true/false, nluTextEnabled: true/false, label: "The Question?" }`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default input and output rich controls (continued)

Rich control	Description
DefaultOutputLink	Maps to link response controls. Example: `{ uiType: "OutputLink", group: "DefaultOutputLink", label: "link label", header: "link header", type: "link", value: { action: "www.foo", } } }`
DefaultOutputImage	Maps to image response controls. Example: `{ uiType: "OutputImage", group: "DefaultOutputImage", value: "www.foo" }`
DefaultOutputCard	Maps to card response controls. Example: `{ uiType: "OutputCard", group: "DefaultOutputCard", templateName: "Card", data: "some json data string" }`
DefaultOutputHtml	Maps to HTML response controls. Example: `{ uiType: "OutputHtml", group: "DefaultOutputHtml", style: "inline", height: 100, width: 100, value: "<div>html</div>" }`
DefaultOutputTable	Maps to table response controls. Example: `{ uiType: "OutputTable",`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default input and output rich controls (continued)

Rich control	Description

	<pre>{
	    group: "DefaultOutputTable",
	    label: "Table Title",
	    headers: ["Column 1", "Column 2"],
	    navigationBtnLabel: "See next",
	    data: [
	        ["foo1", "foo2"],
	        ["bar1", "bar2"]
	    ]
	}</pre>

DefaultGroupedPartsOutputControl	Maps to multi-response controls.
	
	Example:
	<pre>{
	    uiType:
	 "GroupedPartsOutputControl",
	    group:
	 "DefaultGroupedPartsOutputControl"
	    groupPartType: "Link",
	    header: "header message",
	    values: [
	 {
	     action: "www.foo",
	     description: "description",
	     label: "link_1 label",
	     context: "ITSM"
	 },
	 ...
	    ]
	}</pre>

DefaultMultiPartOutput	Maps to multi-response controls.
	
	Example:
	<pre>{
	    uiType: "MultiPartOutput",
	    group: "DefaultMultiPartOutput"
	    navigationBtnLabel: "Go next",
	    content: {
	        uiType: "OutputHtml",
	        style: "inline",
	        type: "html",
	        height: 100,
	        width: 100,
	        value: " html "
	     }
	}</pre>

DefaultCustomControl	Maps to custom controls. Example:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Default input and output rich controls (continued)

Rich control	Description
	`{ uiType: "CustomControl", group: "DefaultCustomControl", name: "The name of the Custom Control (sys_cs_custom_control.name)", required: true/false, uxComponentDefinitionSysId: "seismicComponentId" // or null if not isInput: true/false, // whether to wait for a response value or if just output serializedControlData: "User defined JSON from generateControlData function"; }`

Modify adapter card styles for Virtual Agent

Adapter cards are defined in the Adapter Cards [sys_cs_adapter_card] table. Each card has a template for each supported channel to ensure it displays correctly. You can modify the channel templates to accommodate your organization's style requirements.

Before you begin

Adapter card templates are stored in the Adapter Card Templates [sys_cs_adapter_card_template] table, which is available from the Adapter Cards table as a related list. For example, the YouTube Video Card adapter has three default templates, for the chat widget, iOS, and Android devices.

Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All**, and then enter `sys_cs_adapter_card.list` in the navigation filter. The Adapter Cards page opens.
2. Select an entry in the **Card Name** column.
3. In the **Adapter Cards Template** related list, select the channel you want to view or modify. For example, select the active link for **Chat Widget** or **Android Device** to view the corresponding style sheet.
4. Make any changes in the **Template Definition** field.
5. Select **Update**.

Supported Virtual Agent and Agent Chat features for custom chat integrations

The chat integrations framework supports a multitude of Virtual Agent and Agent Chat features to provide a robust conversational experience.

User authentication, authorization, and secure connection setup

Synchronous authentication of messages

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Provider authentication is synchronous. They will get an immediate response with the request successful or failure code.

Note:
As of the Paris release, asynchronous authentication is no longer supported.

Account auto-linking

Allow a user's third-party account to be auto-linked to their ServiceNow® profile. This feature bypasses the prompt for the user to link their accounts manually. Without account linking, conversations will take place in Guest mode. For configuration information, see Account linking in pre-built messaging integrations.

Configure the output response REST endpoint and outbound authentication for the Virtual Agent API

Specify the outbound endpoint URL to which the Virtual Agent responses are posted and configure outbound authentication.

Secure data transfer

Sensitive data such as passwords can be masked and transferred via the integration framework securely.

Trusted media domains

Use trusted media domains to check the URLs of attachment files before uploading them. For configuration information, see Set up trusted media domains for secure file upload.

Rich control transformation

Design a rich and unique conversational experience for a channel through rich control transformation via inbound and outbound transformation scripts. All standard rich controls are supported. For detailed information about Virtual Agent controls, see the following sections:

- Virtual Agent Designer user input controls
- Virtual Agent Designer bot responses
- Virtual Agent Designer utilities

Supported Virtual Agent chat features

No configuration or scripting required to implement these features in Custom Chat Integration Framework.

Support for all standard Virtual Agent controls

- Pass context variables, system parameters, or a user's time-zone along with user input.
- By default the Virtual Agent processes only one user request at a time. If a user sends a second request before the first request is finished, the second request is ignored. This does not apply when the user is connected to a live agent.
- Ignore duplicate requests from client.

Topic discovery using keywords or Natural Language Understanding

Custom chat integrations can avail topic discovery via keywords or NLU depending on how Virtual Agent is set up on your instance.

Standard chat and long-running conversations

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channels can be set up as either chat or messaging. For more information on long-running conversations, see Using Asynchronous Chat in messaging channels.

Custom Virtual Agent chat experiences

Define a custom chat experience for a specific context in which your users run Virtual Agent.

Dynamic translation

Display a message in chat client that messages are being translated if dynamic translation is enabled.

Customize Virtual Agent and Agent Chat system messages

System messages are a set of pre-built messages that can be served as bot response in common conversation scenarios such as greeting a user or transferring to a live agent. Admins can override the message text to suit their business needs.

Notifications

Deliver both simple and actionable notifications via the integration framework.

Standard timeouts for idle agent conversations

You can change the default timeout period for closing Virtual Agent and live agent conversations by adding the system property `com.glide.cs.conversation_idle_timeout`.

Virtual Agent interaction records

The channel (sys_cs_channel.Name), channel type (sys_cs_channel.Type), provider (sys_cs_provider.Name), provider identifier name (sys_cs_provider_application.Name) and provider channel id (sys_cs_provider_application.InboundID) fields are available for reporting.

API rate limiting

Ability to control the rate at which API calls are made via the platform rate limiting feature.

API versioning

Specify the version of the provider. The framework is able to send the expected inputs to actions and subflows and handle the expected outputs. See Configure a provider for your custom chat integration for more information.

Specify the default portal for URL navigation at the Provider Channel Identities level

For a provider channel, specify the portal in which chat links, including links in output cards and cards for Virtual Agent notifications and AI Search results, are opened. For details on setting the default portal in the Provider Channel Identities [sys_cs_provider_application] table, see Create a channel identifier for your custom chat integration. To learn more about URL navigation, see Configure URL navigation for chat links.

Supported Agent Chat features

Support for all standard live agent controls

- Transfer to live agent from Virtual Agent or directly by user
- Persistent messages after live agent is initiated
- Interaction history (chat transcripts) for live agents
- Channel-level flag to initiate conversations with live agents, bypassing Virtual Agent

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Live agent status for end users

- Agent availability
- Wait time for next agent
- Display agent name and avatar, if enabled in Agent Chat settings.

Channel-level flag to initiate conversations with live agents, bypassing Virtual Agent

Enable the **Live Agent Only** option in the Messaging Channels [sys_cs_channel] table to route conversations directly to a live agent and skip the Virtual Agent conversation greeting. If an agent isn't available, the message **No agent available** is displayed to the user. For channel configuration information, see Create a new channel for your custom chat integration.

Pass the agent avatar and name if enabled in Agent Chat settings

When the **Agent Names and Avatars** field is enabled in Agent Chat settings, the Custom Chat Integration Framework supports the display of the agent name and avatar in the chat. For more information, see Setting up Agent Chat.

Pre-chat and post-chat surveys

After an agent ends a chat, the post-chat survey runs automatically when the following criteria are met:

- The Virtual Agent Feedback setup topic is enabled.
- The chat service channel and the queues that your live agents support are configured in Advanced Work Assignment.

Message delivery order

Control message delivery order by enabling the **Maintain message ordering** option in the Provider Channel [sys_cs_provider] table. You can view the message order and status in the Custom Adapter Message [sys_cs_ca_message] table.

When you enable the **Maintain messaging order** option in the Provider Channel table, a Sender Subflow occurs only after the previous Sender Subflow completes to ensure that messages are delivered in the order that they were sent.

Messages are stored in the Custom Adapter Message [sys_cs_ca_message] table, which is cleaned nightly. If the Custom Chat Integration Framework client is not receiving any messages, you can use this table to check the message delivery status:

- Processing
- Pending - not yet processed
- Completed
- Error - problem with processing an outbound message, possibly due to Integration Hub issues that could occur when the Sender Subflow is invoked

Virtual Agent action scripts

You need to write a set of mandatory Workflow Studio action and subflow scripts to pass the user data to VACS, apply transformations and send the response back to your chat interface endpoint.

Provider and inbound/outbound scripts

A provider, such as Twilio, provides the chat capability. User action scripts perform provider actions, as well as conversational custom chat integration configuration for inbound and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

outbound transformer actions for your chatbot or custom conversations. Examples of each script are provided. They include a description of what each script does, as well as the action input and action output. You also see examples of the script JSON.

You use Workflow Studio to build these scripts to transform server and client messages. The provider, sender, and inbound/outbound transformer scripts are required. You can use the additional scripts to add more functionality to your chat.

Scripts

Script name	Purpose	Required (Y/N)
Provider attribute	Contains a Provider Auth token, a user identifier, user input, and context variables.	Y
Sender action	Bundles the request, and sends a response asynchronously via Workflow Studio or Integration Hub.	Y
Response processor	Performs platform actions, such as an update message status, that's based on a response received for an outbound message.	N
Contextual action	Supports contextual actions.	N
Link account action	Provides a callback about whether account linking was successful or not.	N
Outbound transformer	Transforms a chat server's supported control to chat interface-specific rendering.	Y
Inbound transformer	Optional. You can use the default rich controls if they apply to your chat provider. You do not need to provide a separate inbound transform for each input control. If a default behavior does not work, you can override the default with your own inbound transform for a specific Virtual Agent server control.	Y

Provider attributes action script

The provider attributes action script extracts data from the incoming message. The script knows about the conversational custom chat integration protocol and outputs the content of the incoming message, the user ID of the sender, and an optional authentication token.

Note:
If your provider attributes action script has a contextual action, your script must have both the request_context.contextual_action and request_context.typed_value so that the user input (which is matched to a contextual action) is included in the transcript. If you do not set the request_context.typed_value, that message content does not appear in the transcript.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Provider attributes action script input/output

Input	Output


• Headers (JSON) - Request headers
• Payload (JSON) - Request body
	• Token (String) - Authentication token.
	• provider_user_id (String) - Name of the sender, for example, a user name in a Slack message.
	• request_context (JSON) - Actual content received.
	  ○ typed_value - Typed content such as an answer to a question.
	  ○ attachment_value.url - URL of the attachment.
	  ○ attachment_value.content_type - Content type of the attachment.
	  ○ attachment_value.name - File name of the attachment.
	  ○ contextual action - Action to perform, such as END_CONVERSATION, START_CONVERSATION, AGENT. This script looks at the incoming message. If there is a recognized keyword, then one of the actions can be set, such as outputs.request_context.contextual_action = "END_CONVERSATION";. The framework recognizes this keyword and invokes the contextual action script.
	  ○ context_vars - Contextual variables to pass into a conversation, such as `outputs.request_context.context_vars = {language: "en"};`.

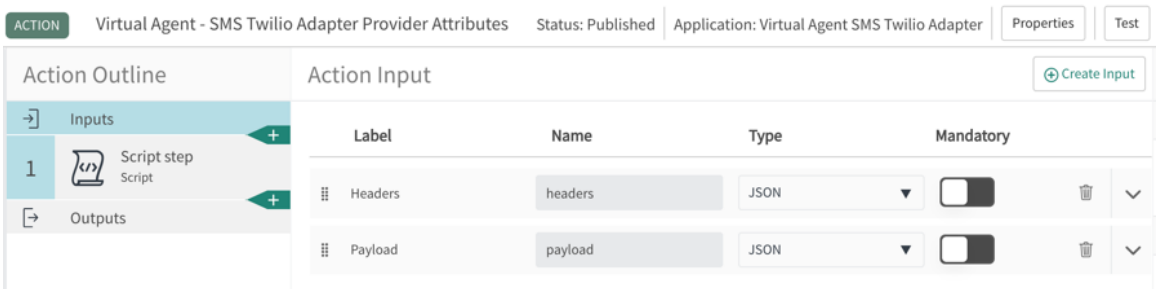Example: Workflow Studio provider attributes action script input, including headers and payload



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

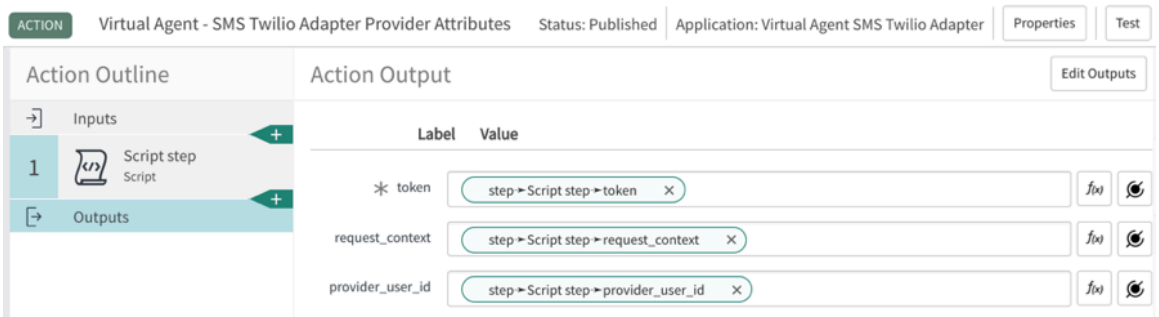Example: Workflow Studio provider attributes action script output, including token, request_context, and provider_user_id



Example: Provider attributes action script.

```
(function execute(inputs, outputs) {
    var headers = (inputs.headers);
    var payload = (inputs.payload);

    // check if an authentication token was included. this is
 optional.
    var smsUtil = new VASMSTwilioUtil();
    outputs.token = JSON.stringify(smsUtil.getToken(headers,
 payload));

    var data = payload.data;
    var request_context = {};
    // inspect the actual message. it could be an MMS
 (attachment) or raw text
    if (data['MediaUrl0']) {
        var attachment_value = {};
        attachment_value.url = data['MediaUrl0'];
        attachment_value.content_type =
 data['MediaContentType0'];
        attachment_value.name =
 smsUtil.getFileName(attachment_value.url ,
 attachment_value.content_type);
        request_context.attachment_value = attachment_value;
    } else {
       request_context.typed_value = data['Body'];
    }

    // set the mandatory outputs
    outputs.request_context = request_context;
    outputs.provider_user_id = data.From;
})(inputs, outputs);
```

Sender subflow

Instead of a script, the sender subflow handles the process of sending a message to a provider. The message is contained in a *payload* string as part of the subflow. The sender has a *service_url* and *origin_service_url*, while the outbound URL varies depending on the provider. For example, a message sent through MS Teams uses the value *tenant_id*. When the Virtual Agent sends the message containing options, the recipient selects an option. The subflow updates the message display based on their choice and removes the options. The conversation continues based on the user's selected option. The Virtual Agent is freed to continue processing messages rather than trying to send external requests. When creating

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a subflow do not have an action call an action within the subflow. For more information on subflows, see .

Contextual action script

The contextual action script performs special keyword actions such as typing `agent` while inside a Virtual Agent topic to get immediately handed off to a live agent.

Contextual action script Input

Input	Output
• conversation_id (String) - The conversation ID. • request_context (JSON) - Request passed from the provider attribute script that contains the action to perform, such as (END_CONVERSATION, START_CONVERSATION, AGENT).	None

Example: Contextual action script.

```
(function execute(inputs, outputs) {
  var contextual_action =
 inputs.request_context.contextual_action;
  if (contextual_action === "END_CONVERSATION") {

 sn_cs.VASystemObject.endConversation(inputs.conversation_id);
  } else if (contextual_action === "AGENT") {

 sn_cs.VASystemObject.switchToLiveAgent(inputs.conversation_id);
  } else if (contextual_action === "START_CONVERSATION") {

 sn_cs.VASystemObject.startConversation(inputs.conversation_id);
  }
})(inputs, outputs);
```

Link account action script

The link account action script contains identifiers for the user who is linking. The script also contains the account that it is linked to.

Link account action script Input

Input	Output
• provider_user_id (String) - Identifier of the user who is linking, such as a phone number in an SMS case. • status (String) - Success/failure. • user_id (String) - ServiceNow user_sys_id for the account that was linked to.	None

Example: Link account action script.

```
(function execute(inputs, outputs) {
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
  var richControl = (inputs.rich_control);
  var value = richControl.value;
  outputs.result = richControl.header + ': ' + value.action;

})(inputs, outputs);
```

Response processor action script

The response processor action script performs specialty actions that are based on the response to a send message request. The framework already does basic message status tracking.

Response processor account action script input

Input	Output
• message_id (String) - Identifier of sys_cs_message record that is associated with this response. • headers (JSON) - Headers that are received. • body (String) - Body that is received. • status code (Integer) - The HTTP status code that is received.	None

Example: Response processor action script.

```
(function execute(inputs, outputs) {
    gs.debug("Response from provider: message_id = " +
 inputs.message_id + ", status_code = " +
      inputs.status_code + ", headers = " +
 JSON.stringify(inputs.headers) + ", body = " + inputs.body);
})(inputs, outputs);
```

Outbound transformer scripts

The outbound transformer scripts convert outgoing Virtual Agent messages to a protocol that is related to the conversational custom chat integration.

Input.

- rich_control (JSON) - Virtual Agent server rich control component that must be transformed.
- payload (JSON) - Last response that was received from a requester.

Output.

result (String) - Provider-appropriate component message to send.

Examples: Outbound transformer scripts

Outbound transformer name	Script example

Virtual Agent - SMS Twilio Adapter Default Text Outbound Transformer	`(function execute(inputs, outputs) {`
	`  var rich_control =`
	`inputs.rich_control;`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Examples: Outbound transformer scripts (continued)

Outbound transformer name	Script example
	`outputs.result = rich_control['label'];` `})(inputs, outputs);`

Virtual Agent - SMS Twilio Adapter Default Link Outbound Transformer	`(function execute(inputs, outputs) {`
	`var richControl = (inputs.rich_control);`
	`var value = richControl.value;`
	`outputs.result = richControl.header + ': ' + value.action;`
	`})(inputs, outputs);`

Virtual Agent - SMS Twilio Adapter Default Picker Outbound Transformer	`(function execute(inputs, outputs) {`
	`var rich_control = inputs.rich_control;`
	`var options = rich_control['options'];`
	`if (options && options.length > 0) {`
	`var optionsLength = options.length;`
	`var picker = rich_control['label'] || "";`
	`for (var x = 0; x < optionsLength; x++) {`
	`picker += "\n" + (x+1) + ": " + options[x].label;`
	`}`
	`}`
	`outputs.text_message = picker;`
	`})(inputs, outputs);`

Virtual Agent - SMS Twilio Adapter Default Multi Link Outbound Transformer	`(function execute(inputs, outputs) {`
	`var rich_control = inputs.rich_control;`
	`var linkResult = rich_control['header'];`
	`var totalValues = rich_control['values'].length;`
	`for (var i = 0; i < totalValues; i++) {`
	`linkResult = linkResult + '\n';`
	`var linkValue = rich_control['values'][i];`
	`linkResult = linkResult + '\n' + linkValue['description'] + ': ' + linkValue['action'];`
	`}`
	`outputs.result = linkResult;`
	`})(inputs, outputs);`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Examples: Outbound transformer scripts (continued)

Outbound transformer name	Script example

Virtual Agent - SMS Twilio Adapter Default Card Outbound Transformer	(function execute(inputs, outputs) {
	  var richControl =
	 (inputs.rich_control);
	  var data =
	 JSON.parse(richControl.data);
	  var tableTitle = data.title;
	  var fields = data.fields;
	  var subtitle = data.subtitle;
	  var url = data.url;
	  var message = subtitle ?
	 getCardLine(tableTitle, subtitle) :
	 tableTitle + "\n";
	  for (var i= 0; i<fields.length; i++)
	 {
	  message +=
	 getCardLine(fields[i].fieldLabel,
	 fields[i].fieldValue);
	  }
	  message += url;
	  outputs.result = message;
	
	  function getCardLine(key, value) {
	  if (value == '' || value == null
	 || key == '' || key == null)
	  return;
	  return key + ": " + value +
	 "\n";
	  }
	})(inputs, outputs);

Inbound transformer scripts

The inbound transformer scripts convert incoming conversational custom chat integration messages to a protocol that the Virtual Agent recognizes. It determines the required value to be injected into the rich control that is presented to the user.

Input.

- request_context (JSON) - The request passed from the Provider Attribute script.
- rich_control (JSON) - The last rich control sent to the requester that contains the original "question".

Output.

result (JSON) - The result expected by the Virtual Agent server. If the requester is responding to a topic picker, it is the sys_id of the topic. If the requester is responding to an input text, it is the text response.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- value - sys_id or text value.
- search_text - Text that is used if the requester selected something that was unexpected. For example, a user typed something that the NLU could assist with, such as, "None of these options match what I want" in response to a topic picker component.

Examples: Inbound transformer scripts

Inbound transformer name	Script example

Virtual Agent - SMS Twilio Adapter Default Text Inbound Transformer
 	
Purpose: Find the text response to the InputText question posed
	(function execute(inputs, outputs) {
	  var requestContext = inputs.request_context;
	  var richControl = inputs.rich_control;
	  var typedValue = requestContext['typed_value'];
	  var attachmentValue = requestContext['attachment_value'];
	  var smsUtil = new VASMSTwilioUtil();
	  var result = {};
	  if(richControl['itemType'] == 'image' || richControl['itemType'] == 'file') {
	  if (attachmentValue && attachmentValue.content_type.includes('image')) {
	  result.url = attachmentValue.url;
	  result.content_type = attachmentValue.content_type;
	  result.name = attachmentValue.name;
	  result.headers = attachmentValue.headers;
	  } else if (typedValue) {
	  result.url = typedValue;
	  var contentType = smsUtil.getContentType(typedValue);
	  if (typeof contentType === 'undefined')
	  gs.error('Please enter a valid image link. Inbound image link: {0}', typedValue);
	  else
	  result.content_type = contentType;
	  } else {
	  gs.error('Please upload an image or enter a valid image link.');
	  }
	  }
	  result['value'] = typedValue;
	  result['search_text'] = '';

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Examples: Inbound transformer scripts (continued)

Inbound transformer name	Script example
	`  outputs.result = result;` `})(inputs, outputs);`

Virtual Agent - SMS Twilio Adapter Default Picker Inbound Transformer
 	
Purpose: Find the sys_id of the option that the user selected for this picker question. This script uses the same algorithm of the outbound transformer. If no options are selected, and the user typed something instead, then the "search_text" is set and fed into NLU if it is enabled on this instance.
	`(function execute(inputs, outputs) {`
	`  var request_context =`
	`inputs.request_context;`
	`  var rich_control =`
	`inputs.rich_control;`
	`  var selectedValue =`
	`request_context["typed_value"];`
	`  var result = {};`
	`  result["value"] = "";`
	`  result["search_text"] = "";`
	`  if (rich_control['options']) {`
	`  var options =`
	`rich_control['options'];`
	`  var optionsLength =`
	`options.length;`
	`  selectedValue ===`
	`Number(selectedValue)`
	`  if (selectedValue > 0 &&`
	`selectedValue <= optionsLength) {`
	`  var selectedOption =`
	`options[selectedValue - 1];`
	`  result["value"] =`
	`selectedOption.value;`
	`  } else {`
	`  result["search_text"] =`
	`request_context["typed_value"];`
	`  }`
	`  }`
	`  outputs.result = result;`
	`})(inputs, outputs);`

Set up trusted media domains for secure file upload

Virtual Agent uses trusted media domains to check the URLs of attachment files before uploading them. If a URL is not from a trusted domain, Virtual Agent will not upload the attachment.

Before you begin

Role required: admin

About this task

For custom chat integrations, specify trusted media domains in either the Provider [sys_cs_provider] table or the Provider Channel Identity [sys_cs_provider_application] table. The trusted media domain values in the Provider Channel Identity table override the corresponding values in the Provider table.

Pre-built integrations, such as Slack, Microsoft Teams, and Workplace from Facebook, have default trusted media domain values set at the provider level, in the Provider [sys_cs_provider]

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

table. To change the default trusted values, specify the different trusted media domains in the Provider Channel Identity [sys_cs_provider_application] table.

Procedure

1. Navigate to **All** > **sys_cs_provider_application.list** > **Provider Channel Identity** and click **New**.
2. On the form, fill in the fields.

Provider Channel Identity form

Name	Name of the channel identity. For example: `VA SMS Twilio Adapter`
Provider	Select the name of your provider application that you set up previously. For example: `VA SMS Twilio Adapter Pro`.
Message auth	Message authentication for the channel identifier.
Inbound ID	Identifier for your bot. For example, the phone number.
Trusted media domains	Comma-separated list of one or more trusted domains for the provider. For example: `twilio.com`, `slack.com` **Note:** Subdomains under a trusted domain are also trusted. You do not need to specify subdomains in this list. If this field is not visible, you can configure the form layout to show it. For security reasons, Virtual Agent checks that the URLs for attachments in conversations are from trusted domains specified here. If the URL is not for a trusted domain, Virtual Agent doesn't upload the attachment. If an attachment upload fails because Virtual Agent didn't trust the domain, Virtual Agent does not inform the end user why the attachment upload failed. **Note:** For Trusted Domains In custom chat integrations, the values specified in the Trusted media domains field of the Provider Channel Identities table [sys_cs_provider_application] takes precedence over the Connections table [sys_cs_provider] and hence overrides.
Short description	Description for your channel identifier.

3. Click **Submit**.
4. **Optional:** Create additional channel identifiers using the same procedure.

Create bot messages

Create channel-specific bot messages.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Channel Integrations** > **Connections** and select a connection.
2. In the **Provider Channel Identity** tab, select a provider channel identity.
3. Select **New** in the **Bot Messages** table.
4. In the form, fill in the fields.

Bot Messages Form

Field	Description
Name	Name of your bot message
Value	Text displayed when a bot message is triggered
Description	Description of the bot message, such as Welcome message or Instructional message for image upload
Message Type	Default selection is Bot Message
Provider Channel Identity	Select the Provider Channel Identity

5. Select **Submit**.

Bot message implementation

Use the bot messages API to implement channel-specific bot messages.

Bot message API

Use the following API to incorporate bot messages into your custom chat integration.

Example: Bot message implementation

```
function getBotMessage(providerId, inboundId, botMessageName) {
    // fetch the bot message using bot messages api
    var botMessages =
 sn_cs.VASystemObject.getAllBotMessages(providerId, inboundId);
    if (botMessages && botMessages[botMessageName]) {
        var botMessage = botMessages[botMessageName];
        botMessage = botMessage.trim();
        if (botMessage) {
            return botMessage;
        }
    }
}
```

Integrate custom controls

Implement and leverage custom controls built using the custom control framework in your integration.

Before you begin

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Map custom controls to a provider channel.

Implement custom controls created in Workflow Studio

Use the example script to implement custom controls created in Workflow Studio.

Example: Custom controls support

```
{
    uiType: "CustomControl",
    group: "DefaultCustomControl",
    name: "The name of the Custom Control
 (sys_cs_custom_control.name)",
    required: true/false,
    uxComponentDefinitionSysId: "seismicComponentId" //
 or null if not
    isInput: true/false, // whether to wait for a
 response value or if just output
    serializedControlData: "User defined JSON from
 generateControlData function";
}
```

Example: Custom controls script

```
(function execute(inputs, outputs) {
    var rich_controls = inputs.rich_control;
    //this is the data returned from the 'serialized
 control data function' defind in designer
    var serializedControlData =
 rich_control['serializedControlData'];
    // if this rich control will require a response to
 move forward in topic flow
    var isInput = rich_control['isInput'];
    // if the component is suggesting using a Seismic
 control (web) that handles this
    var uxComponentDefinitionId =
 rich_control['uxComponentDefinitionSysId'];
    // the name of the custom control
    var name - rich_control['name'];

    // 1) now perform some logic to transform this
 data into a custom ui (slack/facebook/sms ascii
 art/html/etc)
    // 2) attach to outputs, i.e.
 outputs.text_message='foo :)'; for sms twillio

    // basic flow is to take the
 serializedControlData/Name/compId(optional) and create
 a custom UI component here
    // that your client understands (i.e. a slack rich
 form payload)
})(inputs, outputs);
```

Implement a provider-specific transformation of a custom control

You can implement a provider-specific transformation for each custom control by using the **Sub type** field in the Custom Adapter Configuration [sys_cs_custom_adapter_config] table. You can publish a newer version of a custom control or a pre-built, ServiceNow custom control, also referred to as a default

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

custom control, if needed. This involves publishing the appropriate Inbound and Outbound Workflow Studio action scripts and updating the configuration in the Custom Adapter Configuration [sys_cs_custom_adapter_config] table.

- If you're publishing your own version of a ServiceNow custom control, overwrite the custom control record in the Custom Adapter Configuration table with your own Inbound and Outbound action script names.
- Only one record with the same **Sub type** is allowed. If the same custom control is implemented by two different parties, only one can update the existing record with new Inbound and Outbound transformers.

Note:
Once you override an existing custom control record, the system uses the new version of the custom control. For example, transformation scripts can transform multiple custom controls, such as Time Picker and Auth. If you add a Time Picker control with different inbound and outbound transforms, the newer Time Picker control is used. You cannot revert to the original version of the custom control.

Procedure

1. Navigate to **All**, and then enter `sys_cs_custom_adapter_config.list` in the filter.
2. Select **New**.
3. On the form, fill in the fields.

Custom Adapter Configurations form

Field	Description
Provider	The name of the channel identifier for your custom chat integration. For details, see Create a channel identifier for your custom chat integration.
Control type	Select the custom control that you designed. For custom controls, the type is always DefaultCustomControl. To learn more about custom controls, see Customizing Virtual Agent with custom controls.
Sub type	Name of the custom control.
Inbound transformer action	Name of the inbound transformer action script for this rich control, such as, sn_va_sms_twilio.va_sms_twilio_adapter_input_text_inbound_transformer.
Outbound transformation action	Name of the outbound transformer action script for this rich control, such as, sn_va_sms_twilio.va_sms_twilio_adapter_input_text_outbound_transformer.

4. Select **Submit**.

Multi-step responses

An example of multi-step response is a set of images in a carousel or a date control.

Multipart Control richControl has the following attributes, which can be used to transform control.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- content: Rich Control which must be presented in current step.
- navigationBtnLabel: Label for "next" or "more" button for user to click to move to next step.

Example:

```
{
        uiType: "MultiPartOutput",
        group: "DefaultMultiPartOutput",
        navigationBtnLabel: "Go next",
        content: {
                uiType: "OutputHtml",
                style: "inline",
                type: "html",
                height: 100,
                width: 100,
                value: "<div>html</div>"
        }
}
```

Outbound transformation script

```
(function execute(inputs, outputs) {

    try{
      var richControl = inputs.rich_control;
      var payload = inputs.payload;

      var content = richControl.content;
      var navigationBtnLabel = richControl.navigationBtnLabel;
      var uiType = content.uiType;
      var partResult = null;

      switch (uiType) {
        case "OutputText":
          partResult =
 sn_fd.FlowAPI.executeActionQuick('example_default_text_outbound
_transformer', {
              rich_control : content,
              payload : payload
            });
          break;
        case "OutputLink":
          partResult =
 sn_fd.FlowAPI.executeActionQuick('example_default_output_link_o
utbound_transformer', {
              rich_control : content,
              payload : payload
            });
          break;
        case "OutputImage":
          partResult =
 sn_fd.FlowAPI.executeActionQuick('example_default_image_outboun
d_transformer', {
              rich_control : content,
              payload : payload
            });
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
          break;
        case "OutputHtml":
          partResult =
 sn_fd.FlowAPI.executeActionQuick('example_default_html_outbound
_transformer', {
              rich_control : content,
              payload : payload
            });
          break;
        default:
          break;
      }
      partResult =  partResult +
 addButtonMore(navigationBtnLabel)
      outputs.result = JSON.stringify(outActivity);
    }
    catch(e){
      gs.error("Error in default multipart outbound
 transformer : " + e.message);
      throw e;
    }

  })(inputs, outputs);
```

Inbound transformation script

```
  (function execute(inputs, outputs) {
    try {
      var requestContext = inputs.request_context;
      var typedValue = requestContext.typed_value;
      outputs.result = typedValue;
    } catch(e) {
       gs.error("Error in default multipart inbound
 transformer : " + e.message);
       throw e;
    }
  })(inputs, outputs);
```

Multi-response output controls

Implement controls that involve multiple steps to get user input.

Use the following API to configure context data for multi-output controls.

Common use cases

1. To achieve pagination of pickers: page_no, pagination_length updated in inbound based on next/previous button is read in outbound.
2. Step by step response of date picker like first year, then month, and then date selection.

The following APIs are only available in inbound and outbound transformers.

```
sn_cs.VASystemObject.setProviderUserContext( key, contextData,
 providerAppId, providerUserId);
sn_cs.VASystemObject.getProviderUserContext(key, providerAppId,
 providerUserId);
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
sn_cs.VASystemObject.removeProviderUserContext(key,
 providerAppId, providerUserId);
sn_cs.VASystemObject.removeAllProviderUserContext(providerAppId,
 providerUserId)
```

The outbound transformer of the picker control can store current page details in user contextData.

```
 var paginationData = {
          "page_index": 1,
          "pagination_length": 2
    }
};
sn_cs.VASystemObject.setProviderUserContext("picker_pagination",
 paginationData, providerAppId, providerUserId, );
```

The inbound transformer of picker control can get current page details from user contextData.

```
var paginationData =
 sn_cs.VASystemObject.getProviderUserContext("picker_paginatio
n", providerAppId, providerUserId);
```

Example code for picker control outbound transformer

```
(function execute(inputs, outputs) {
    var control = inputs.rich_control;
    var payload = inputs.payload;
    var appId = payload.appId;
    var userId = payload.userId;

    var paginationData =
 sn_cs.VASystemObject.getProviderUserContext('picker_control',
 appId, userId);
    paginationData = JSON.parse(paginationData);
    //First time when the outbound picker is called when
 selecting the topic.
    if (paginationData == null) {
        paginationData = {
            'page_index': 1,
            'pagination_length': 5
        };

 sn_cs.VASystemObject.setProviderUserContext('picker_control',
 paginationData, appId, userId);
    }

    var page_index = paginationData['page_index'];
    var pagination_length = paginationData['pagination_length'];
    var start = (page_index - 1) * pagination_length;
    var end = page_index * pagination_length;

    if (control['options']) {
        var options = control['options'];
        var optionsLength = options.length;
        if (end > optionsLength)
            end = optionsLength;
        var picker = control["label"] + ":";
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
        if (start > 0)
            picker += "\n" + "*" + ": " + "prev";
        for (var x = start; x < end; x++) {
            gs.log("here " + x + " : " + options[x]);
            picker += "\n" + (x + 1) + ": " + options[x].label;
        }
        if (end < optionsLength)
            picker += "\n" + "#" + ": " + "next";
    }
    outputs.text_message = picker;
})(inputs, outputs);
Example Picker Control Inbound Tranformer
(function execute(inputs, outputs) {

    var request_context = inputs.request_context;
    var rich_control = inputs.rich_control;
    var appId = request_context.appId;
    var userId = request_context.userId;

    var selectedValue = request_context["typed_value"];
    var result = {};
    result["value"] = "";
    result["search_text"] = selectedValue;

    var options = rich_control['options'];

    var paginationData =
 sn_cs.VASystemObject.getProviderUserContext('picker_control',
 appId, userId);
    paginationData = JSON.parse(paginationData);

    switch (selectedValue) {
        case 'prev': {
            --paginationData["page_index"];
            result["send_prev_control"] = true;
        }
        break;
    case 'next': {
        ++paginationData["page_index"];
        result["send_prev_control"] = true;
    }
    break;
    default: {
        var selectedIndex = Number(selectedValue) - 1;
        if (paginationData["page_index"] != undefined &&
 paginationData["pagination_length"] != undefined) {
            var highestOptionInPage =
 paginationData["page_index"] *
 paginationData["pagination_length"];
            if (selectedIndex >= 0 && selectedIndex <
 highestOptionInPage) {
                var selectedOption = options[selectedIndex];
                result["value"] = selectedOption.value;
                result["search_text"] = "";
            }
        } else {
            var selectedOption = options[selectedIndex];
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
            result["value"] = selectedOption.value;
            result["search_text"] = "";
        }
    }
    }

 sn_cs.VASystemObject.setProviderUserContext('picker_control',
 paginationData, appId, userId);
    outputs.result = result;
})(inputs, outputs);
```

Send previous control to client

Provide the ability to send previous control to client.

There are two ways to send previous control back from the server when a client requests:

- In inbound transformation, set `validation_message` in result. Previous control will be sent again with message provided in `validation_message`.
- In inbound transformer, set `send_prev_control` in result to true, previous control will be sent again. Use this method for Multi-Step controls.

Example script:

```
(function execute (inputs, outputs) {
  var result = {};
  var request_context = inputs.request_context;
  var typed_value = request_context ['typed_value'];
  if (typed_value.indexOf("#") > -1)
    result["validation_message"] = "Invalid character, please
 don't enter special character '#'";
  result["value"] = typed_value;
  result["search_text"] = "";
  outputs.result - result;
})(inputs, outputs);
```

Implement a skip option

Use a rich control to provide the option for users to skip a question.

Use the rich control `\nType SKIP to skip question` to provide the option for a user to skip a question. There are two ways to configure a skip option:

- In the provider attributes script, use `_skip_internal` to trigger a contextual action service to skip the question.
- Map a contextual action for the provider and use `//request_context.contextual_action = "SKIP"` to skip the question. See Contextual actions for custom chat integrations to learn more about mapping user inputs to contextual actions.

Example script:

```
va_sms_twilio_adapter_default_text_outbound_transformer
(function execute(inputs, outputs) {
  try {
    var richControl = inputs.rich_control;
    outputs.result = richControl['label'];
    if (richControl['required'] === false &&
 richControl['uiType'] != "OutputText") { // new
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
      outputs.result += "\nType SKIP to skip question"; // new
    } // new
  } catch(e){
    gs.error('Error in default text outbound transformer: ' +
 e.message);
    throw e;
  }
})(inputs, outputs);
va_sms_twilio_adapter_provider_attributes
(function execute(inputs, outputs) {
    try {
        var headers = (inputs.headers);
        var payload = (inputs.payload);
        var smsUtil = new VASMSTwilioUtil();
        outputs.token = JSON.stringify(smsUtil.getToken(headers,
 payload));
        var data = payload.data;
        var request_context = {};
        if (data['MediaUrl0']) {
            var attachment_value = {};
            attachment_value.url = data['MediaUrl0'];
            attachment_value.content_type =
 data['MediaContentType0'];
            attachment_value.name =
 smsUtil.getFileName(attachment_value.url ,
 attachment_value.content_type);
            request_context.attachment_value = attachment_value;
        } else {
           var b = data['Body']; // new
           request_context.typed_value = b; // new
           if (b === "SKIP") { // new
             request_context.typed_value = "_skip_internal"; //
 new
             //request_context.contextual_action = "SKIP"; //
 new
           } // new
        }
        outputs.request_context = request_context;
        outputs.provider_user_id = data.From;
    } catch (e) {
        gs.error("Error in
 va_sms_twilio_adapter_provider_attributes : " + e.message);
    }
})(inputs, outputs);
contextual_action (all new)
(function execute(inputs, outputs) {
  var contextual_action =
 inputs.request_context.contextual_action;
  if (contextual_action === "SKIP") {

 sn_cs.VASystemObject.skipOptionalQuestion(inputs.conversation_i
d);
  }
})(inputs, outputs);
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Pass branding to a chat client

Pass custom branding to your custom chat integration.

See Set up your Virtual Agent bot's branding for more information about branding. Use `sn_cs.VASystemObject.getSettings` to apply branding.

Example script:

```
va_sms_twilio_adapter_default_text_outbound_transformer
(function execute(inputs, outputs) {
  try {
    var richControl = inputs.rich_control;
    var branding =
 sn_cs.VASystemObject.getSettings("default_branding"); // new
    var header = "(" + branding["header_label"] + ") "; // new
    outputs.result = header; // new
    outputs.result += richControl['label'];
  } catch(e){
    gs.error('Error in default text outbound transformer: ' +
 e.message);
    throw e;
  }
})(inputs, outputs);
```

Contextual actions for custom chat integrations

Commands with a pre-defined behavior can be mapped to certain user-friendly keywords and passed as user input. This input is mapped to supported contextual actions for the most appropriate response in the chat.

Getting started with contextual actions

User inputs can be mapped to a contextual action in two ways.

- UI-based mapping of comma-separated keywords to available contextual actions. For example: Hi, Hola - Start Conversation
- Script-based mapping of user actions to available contextual actions. For example: User clicks "Start" menu - Start Conversation

Available contextual actions

Pre-built contextual actions

Name	Description
Agent	Command to request transfer to a live agent
Bye	Command to end a conversation with a live agent or a virtual agent whenever you are outside of a topic-selection prompt
Help	Command to request help using the bot
Hi	Command to start or end a conversation
Logout	Command to unlink the user messaging account from ServiceNow

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Pre-built contextual actions (continued)

Name	Description
Notifications	Command to subscribe or unsubscribe from receiving notifications
Restart	Command to end a bot conversation that is either in progress or runs into an error, and then begin a new conversation

Contextual action mapping

Map user inputs to base system contextual actions.

Before you begin

Role required: admin

About this task

Use the Contextual Actions [sys_cs_contextual_action] table to review the commands used in the chat integrations. You can add more keywords for a command. Each record for a pre-built command has this information:

Contextual Actions fields

Field	Description
Name	Name of the command.
Commands	Keyword for the command. You can add multiple keywords, separated by commas.
Description	Explanation of the command
Applicability	Application in which the command is used: • Virtual Agent only • Agent Chat only • Virtual Agent and Agent Chat

Procedure

1. Navigate to **All**, and then enter `sys_cs_contextual_action.list` in the filter.
2. Select a contextual action from the list.
3. Add comma-separated keywords to the **command** field.
   For example: `Agent, Live Agent, Transfer to agent`.
4. **Optional:** Exclude specific messaging channels from contextual actions.
   a. Select the **Insert a new row...** text.
   b. Select the magnifying glass.
   c. Select the messaging channel you would like to exclude from the contextual action.
   d. Select the green checkmark to save.
5. Select **Update**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next
Create bot messages specific to each channel.

Typing indicators

Display a typing indicator when a bot or live agent is preparing a response to a requester.

When Virtual Agent processes a request, the Start typing indicator action is called. When Virtual Agent completes the request processing, the End typing indicator action is called before Virtual Agent processes any output or input controls.

These actions call the defaultText control outbound transformation. The following example shows how the typing indicator is handled in the defaultText control outbound transformation.

Example: Typing indicator script

```
(function execute(inputs, outputs) {
    try {
        var richControl = inputs.rich_control;
        var actionType = richControl.type;
        if(actionType == 'StartTypingIndicatorActionMsg'){
            outputs.result = '{activity:{type: "typing" }}'
        }else if(actionType == 'EndTypingIndicatorActionMsg'){
            outputs.result = '{activity:{type: "message" , text:
 "Finished typing"}}'
        }
       /* Handle other type of control */
    } catch (e) {
        gs.error("Error in default action outbound transformer :
 " + e.message);
        throw e;
    }
})
```

Integrating Virtual Agent with messaging apps

Enable users to run Virtual Agent bot conversations in supported third-party messaging apps. Use the Conversational Integration apps for Slack, Microsoft Teams, and Workplace that are available from the ServiceNow Store to configure these messaging apps on your ServiceNow instance.

Note:
Conversational Integration apps for Slack, Microsoft Teams, and Workplace, other consumer apps and voice apps are not supported for on-prem instances.

Admin setup

Use the Virtual Agent Conversational Integration apps to configure the messaging applications for your instance. Perform these basic installation steps to set up the Virtual Agent bot.

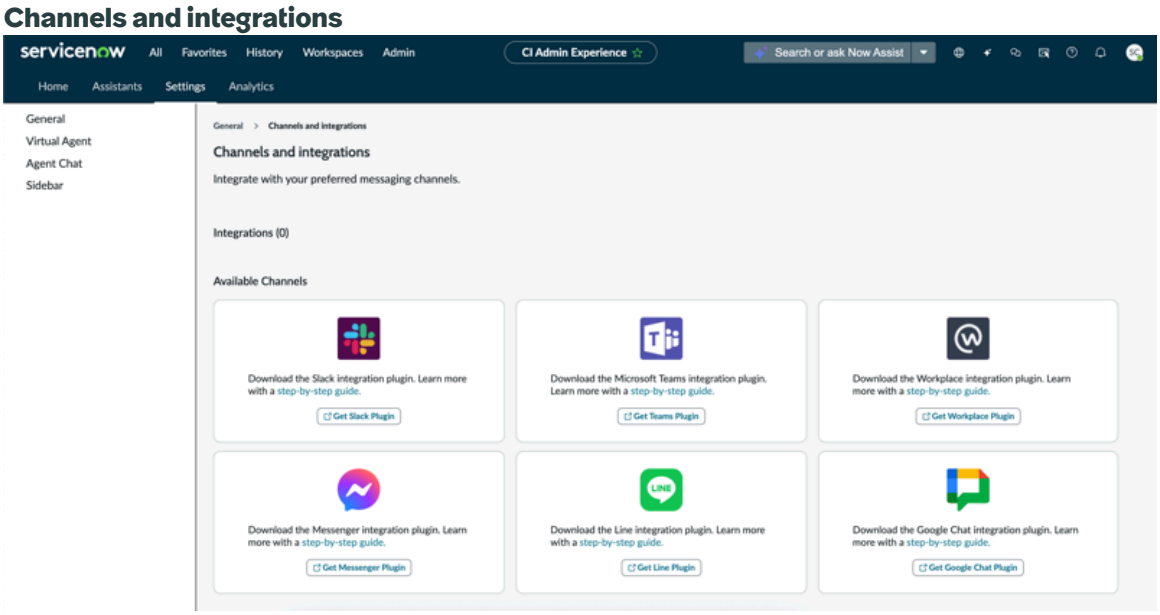
1. Install the Conversational Integration messaging apps, that are pre-built with ServiceNow Virtual Agent from the ServiceNow Store and then associate the app with your own ServiceNow instance.

   For details, see Integrating Virtual Agent with messaging apps.

2. Install the Conversational Integration apps for Slack, Microsoft Teams, and Workplace, LINE, Twilio, WhatsApp, Facebook Messenger, Alexa, Google Assistant, Amazon Connect, on your

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

ServiceNow instance once they become available for installation after installing from the ServiceNow Store.



3. If needed, configure the system messages that users see in Virtual Agent conversations. You can also customize the common commands used in these messaging integrations.

Conversational interface in messaging integrations

The Virtual Agent interface for the Conversational Integration apps (Slack, Microsoft Teams, and Workplace) is similar to the web-based interface. However, there are some differences, such as commands used and how certain interface controls are displayed in these third-party messaging apps.

Common commands in messaging integrations

Command	Description
`Hi`	Begin a new conversation or end a conversation.
`agent`	Begin a new conversation or request a transfer to a live agent.
`bye`	Leave a live chat conversation at any time, for example before engaging with a live agent, during a live chat, or when live chat is about to end.
`help`	Displays a short list of useful commands.
`logout`	Unlink your ServiceNow account from a messaging integration.
`notification or notifications`	Subscribe to or unsubscribe from notifications.
`restart`	End the current conversation and begin a new one.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

After you install the integration, you can customize these commands by using the **Configure** button for the installed teams/communities in the channel specific pages.

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, click **View All**.
3. On the Channels and integrations page, you can see the number of integrated channels and available channels for installation on your instance.
4. Click the **Manage** button in the specific channel and navigate to the Settings tab.
5. Click the **view settings** button against Contextual Actions.
6. Select the command record to be changed and update as needed.

Configuring Virtual Agent system messaging in the Conversational Integration apps

You can modify the default messages displayed to your users in Virtual Agent and Agent Chat conversations. For details on customizing them, see Change Virtual Agent and Agent Chat system messages.

Rendering of input controls and bot responses in conversations

Input controls in Virtual Agent Designer, such as the Carousel render differently in bot conversations in messaging apps than in the web-based interface. For example, the Date Time picker control in Workplace presents buttons for users to select a date and time. Similarly, certain bot response controls, such as the Image response and Multi-response controls, also render differently in third-party messaging apps. For details on these differences, see the descriptions of the Virtual Agent Designer input controls, bot responses, and utilities.

Attachments

In live agent conversations, users and agents can upload and exchange any type of attachment file when prompted.

Now Assist support

Existing channel integrations	Supports Now Assist	Supports synthesized response
Microsoft Teams/Copilot	Yes	Yes
Slack	Yes	Yes
WhatsApp	Yes	No
SMS/Twilio	Yes	No
IVR with Amazon Connect	Yes	No
AWS end user messaging	Yes	No
Workplace by Facebook	No	No
Facebook Messenger	No	No
Apple Business Chat	No	No
LINE	No	No
IBM Watson Assistant	No	No
Alexa	No	No

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Redirect user authentication to a Service Portal

After installing a pre-built Conversational Integration (for messaging apps, Consumer apps or voice apps), you can specify a Service Portal in which unauthenticated end users complete the user authentication step (user account linking), instead of in their ServiceNow instance. Users who do not have linked accounts complete authentication before continuing with the virtual agent in the messaging application.

Before you begin

Install the Virtual Agent messaging integrations for your instance. The system creates a record in the Provider Auth [provider_auth] table for each integration that you install (Slack, Microsoft Teams, and Workplace, LINE, Twilio, WhatsApp, Facebook Messenger, Alexa, Google Assistant, Amazon Connect). You use the Provider Auth table to specify the Service Portal in which user authentication occurs.

Role required: admin

Procedure

1. In the navigation filter, type `provider_auth.list`.
2. In the Provider Auth table, open the record for the messaging integration you installed.
3. In the **Service Portal** field, select the Service Portal in which user authentication occurs.
4. Click **Update**.

Result

When unauthenticated users start a conversation with the virtual agent for the first time in the messaging integration, they are redirected to the Service Portal specified for the provider in the Provider Auth table. After they log in to the Service Portal, they are prompted to link their ServiceNow account to the messaging application.

Account linking in pre-built messaging integrations

In Virtual Agent, account linking maps the users of a supported chat or messaging application to their ServiceNow user profile. Account auto-linking authenticates your messaging users, which enables users to automatically access Virtual Agent topics that involve ServiceNow records. If needed, users can also manually unlink from or link to their ServiceNow accounts.

How account auto-linking works

In the Conversational Integrations for Slack, Microsoft Teams, and Workplace from Facebook, you have the option to enable account auto-linking, which automatically links messaging users to their ServiceNow accounts. If you enable the account auto-linking feature on the Messaging Apps Integration page, your users are not prompted to link to their ServiceNow accounts when they engage with the virtual agent.

In earlier releases, messaging users were prompted to link to their ServiceNow accounts or continue as guests. However, for the Conversational Integrations for Slack, Microsoft Teams, and Workplace, if you enable account auto-linking, your users do not manually link their messaging accounts to their ServiceNow accounts, provided that they use the same email account for their messaging and ServiceNow accounts. During auto-linking, Virtual Agent maps the email accounts of messaging users to their email accounts defined in their profiles in the Users [sys_user] table. When the email accounts match, the user is automatically linked (authenticated) and they do not see the **Link to ServiceNow** button when they begin a bot conversation.

In messaging integrations, your users can still use the **logout** command during bot conversations to unlink from their ServiceNow accounts. However, in all subsequent conversations after

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

unlinking, Virtual Agent prompts them to link their accounts. When they engage with the virtual agent, they are prompted to link to their ServiceNow account or continue as a guest user.

Account auto-linking

You can allow a user's 3rd party accounts to be auto-linked to their ServiceNow® profile.

You can enable account auto-linking in the sys_cs_provider.list. This feature bypasses the prompt for the users to link their accounts manually.

Note:
Account linking is possible only for users who belong to the same domain that was used for installing Microsoft Teams on an instance. To auto-link users from other domains, ensure that Microsoft Teams installation is done using the global domain.

In the navigation filter type `sys_cs_provider.list`. Select the connection record you wish to link. Check the **Allow account linking** box, then check the **Auto link users' ServiceNow profiles** box that appears. Fill in the **Automatic link action** field with the corresponding account linking script.

Example: Account auto-linking script

```
var response_body = inputs['response_body'];
var status_code = inputs ['status_code'];
var email_id = '';
if(status_code>200 && status_code<=210){
    email_id = response_body &&
 JSON.parse(response_body).userPrincipalName;
}
var sysUserId = null;

if(email_id){
    var gr = new GlideRecord("sys_user");
    gr.addQuery("email",email_id);
    gr.query();
    while(gr.next()){
        sysUserId = gr.getUniqueValue();
    }
}
if(sysUserId){
    outputs['status'} = 'Success';
    outputs['userid'] = sysUserId;
}
else{
    outputs['status'] = 'Failure';
}

})(inputs,outputs);
```

Unlink your ServiceNow user account from a messaging application for Virtual Agent conversations

If needed, you can unlink your ServiceNow user account from a messaging app used for the Now Virtual Agent.

Before you begin
Role required: user

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Unlinking your account from a selected Conversational Integration for Slack, Microsoft Teams or Workplace, deactivates the association between your ServiceNow account and the messaging app. After you unlink your account, you can no longer engage in Virtual Agent conversations that query or change records in the ServiceNow database.

Procedure

1. From within the messaging app, type `logout`.
2. From the application navigator, navigate to **Self-Service** > **My Profile**.
3. Click the **View Linked Accounts** related link.
4. In the Linked Accounts page, select the check box for the messaging integration to be unlinked.
5. Select **Actions on selected rows**, then click **Unlink account**.
   The link between your ServiceNow account and the Virtual Agent messaging integration becomes inactive.

   Note:
   Even though you unlinked your account, you can still run public Virtual Agent conversations.

6. To link your account again, repeat steps 1 through 3 for the associated messaging integration and in the **Actions on selected rows...**, click **Link account**.

Link your ServiceNow user account to a messaging application for Virtual Agent conversations

Link your ServiceNow account to a third-party messaging application to access non-public Virtual Agent topics that use ServiceNow records.

Before you begin

Role required: user

About this task

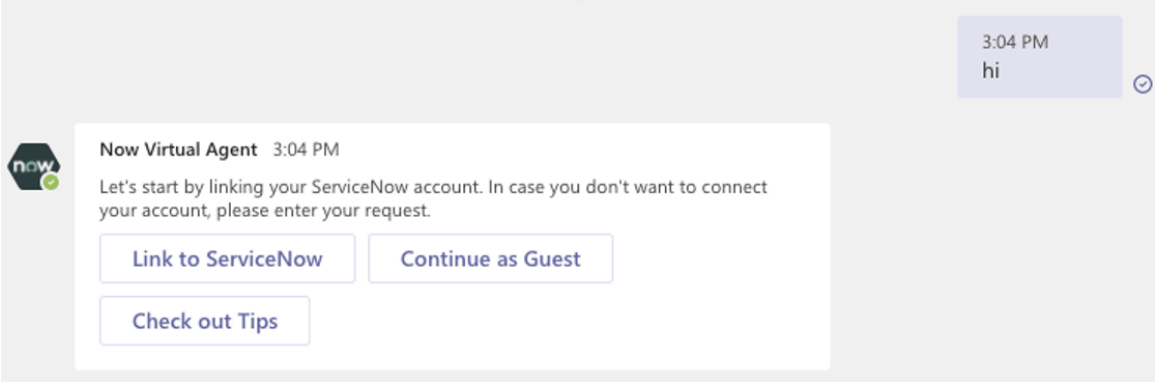
If the same email account is defined for both your messaging and ServiceNow accounts, then when you first use the Virtual Agent, your messaging account is automatically linked to your ServiceNow account.

However, after you unlink your messaging account from your ServiceNow account (using the **logout** command), then each time you start a new Virtual Agent session, the bot gives you the option to link to your ServiceNow account or continue as a guest. The authentication step (linking) occurs in your instance or in a specific Service Portal, as set by your admin.

Procedure

1. Open the messaging application.
2. Find your Virtual Agent bot.
3. Start a conversation with your Virtual Agent bot.
   The bot then presents a prompt that provides options to authenticate (**Link to ServiceNow**), **Continue as Guest**, or use the **Check out Tips**.
4. Select **Link to ServiceNow** to authenticate.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Authentication directs you to your instance or a specific Service Portal set by your admin. If you're not already logged in to your instance or a Service Portal, you're prompted to enter your login credentials.

Note:
If a user is unlinked or continued as a guest, notifications are disabled. Also, only the public topics are discoverable.

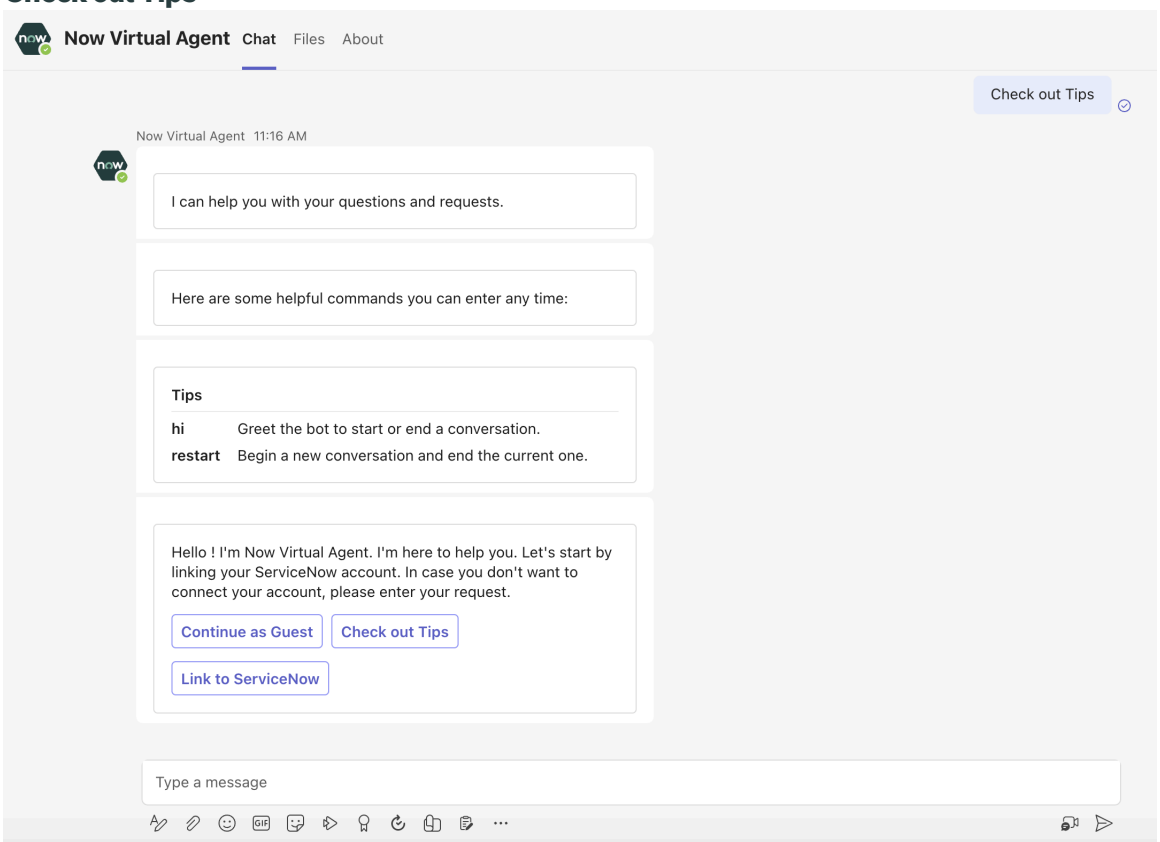Check out Tips



5. In the confirmation that appears prompting you to *Confirm* or *Deny* linkage between your accounts, select *Confirm* to enable the account link.
6. After confirmation, you're directed to your instance user record.

   A confirmation message is displayed at the top of the screen.

Related topics

Redirect user authentication to a Service Portal

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Control topic visibility in Virtual Agent messaging channels

Suppress the display of a topic in a Virtual Agent messaging channel by using a condition script that excludes the topic from a channel.

Before you begin

Roles required:

- virtual_agent_admin or admin
- Administrator for third-party applications

About this task

In your condition script for the topic, use a context variable to identify the messaging channel that excludes this topic.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.
2. On the Virtual Agent Designer home page, select the topic for updating or create a new topic.
3. Navigate to the **Properties** page, and open **Who can access this topic** under Advanced properties.
4. In the Context section, select **Condition** followed by **Add Condition**.
5. Enter a condition script that identifies the messaging channel (Slack, Microsoft Teams, Workplace from Facebook, or Facebook Messenger) from which the topic will be excluded.

   You can use the following example script, which contains the *vaContext.deviceType* variable, to identify the messaging channel that excludes the topic: Slack, Microsoft Teams, Workplace, and Facebook Messenger.

```
(function execute()
{ if(vaContext.deviceType === 'Slack' || vaContext.deviceType
 === 'Teams' || vaContext.deviceType=='Facebook' ||
 vaContext.deviceType=='Messenger'){
return false;
}
return true;
})()
```

6. To save the topic properties, click **Save**.

Result

Publishing the topic deploys it to the Virtual Agent messaging channels, except for the Virtual Agent channels that you specified in the topic condition script. A keyword or an intent (if using NLU) does not trigger the topic.

Integrating Virtual Agent with Apple Messages for Business

The Conversational Integration with Apple Messages for Business application allows customers to engage with your business using their Apple devices. Conversational Integration with Apple Messages for Business provides rich messaging capabilities such as Apple pay, forms, time picker, and authentication.

Enable requesters to interact in a Apple Messages for Business chat with a virtual agent or live agent using the ServiceNow® Conversational Integration with Apple Messages for Business application. The application connects a requester with a virtual agent or live agent using your company's Apple Messages for Business account. To get started with the Conversational

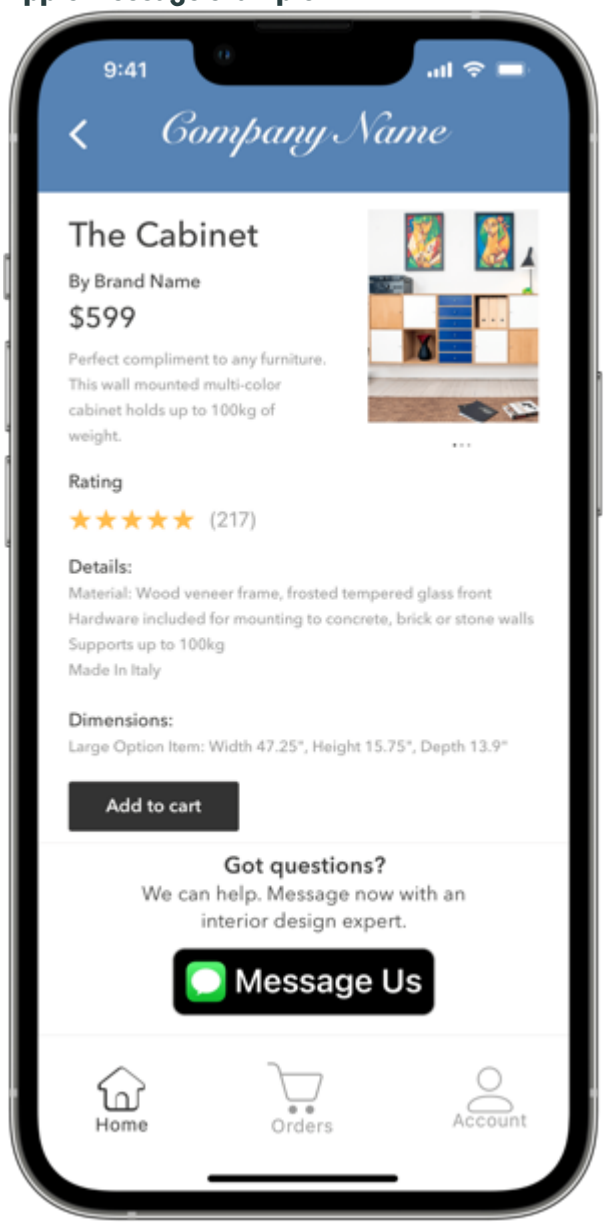
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Integration with Apple Messages for Business application, see Install Conversational Integration with Apple Messages for Business.

Apple Messages for Business entry points

Customers can start a conversation with an agent from a variety of entry points. From each of these entry points, customers can launch the Apple messages app and compose a message. You can add custom buttons to a website, app, or social media page, so that customers can start a conversation with a Virtual Agent or live agent. For a full overview of the options available, see the Apple documentation.

Apple message example



- iMessage
- Apple Maps
- Apple Pay
- Search
- Apple apps

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- QR codes
- Social media

Apple Messages for Business interactive features

Apple Messages for Business includes a set of interactive features such as list picker, time picker, authentication, and Apple pay.

Interactive features

Feature	Description
Rich links	Adds a picture or video preview to a URL
Quick replies	The user can make an inline choice with a single tap. This includes responses like star ratings or thumbs up or down.
List pickers	Gives the user a list of options to choose from. For example, a travel site can show flights, accommodations, car rentals, and bookings.
Time pickers	Provides time slots for users to choose for appointments, deliveries, and services. To use time pickers, you must have Conversational Appointment Booking installed.
Apple Pay	Send Apple Pay requests over Messages. For more information on setting up Apple Pay, refer to the Apple documentation.
Authentication	Apple Messages for Business supports OAuth2 protocol to integrate sign-in authentication to the Messages app.
iMessage App	Users can interact with your business directly from the Messages app on their iPhone, where they are accustomed to messaging their contacts.
Image sharing	Users or live and virtual agents can send photos during a chat.
Video sharing	Users or live or virtual agents can send videos during a chat.
Document attachments	Users or live or virtual agents can send PDF documents during a chat.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Configure Conversational Integration with Apple Messages for Business

Install and set up the Conversational Integration with Apple Messages for Business application to enable requesters to interact with virtual and live agents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

This task provides the general steps to integrate Apple Messages for Business with your ServiceNow instance using the Conversational Integration with Apple Messages for Business application.

1. Install Conversational Integration with Apple Messages for Business.
2. Set up the integration on Apple Messages for Business.
3. Capturing information from a user in a Apple Messages for Business chat conversation.
4. Enable authentication with your Identity Provider (IdP) by configuring the OAuth setup for Apple Messages for Business
5. Enable Apple Pay on Apple Messages for Business interactions.
   - Refer to the Apple documentation for details about configuring your Apple merchant account.
   - Refer to Complete the Payment Provider Configuration to to connect your payment provider information to your ServiceNow® instance.

Install Conversational Integration with Apple Messages for Business

Install the Conversational Integration with Apple Messages for Business so that your business can interact with requesters on the Apple Messages for Business app. The application installs related ServiceNow Store applications and plugins if they are not already installed.

Before you begin

- Review the Conversational Integration with Apple Messages for Business application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.
- Create an Apple Messages for Business account at Apple Business Register.

Role required: admin

About this task

The following applications or plugins are installed with Conversational Integration with Apple Messages for Business:

Conversational Custom Chat Integration (com.glide.cs.custom.adapter)

Provides custom chat integration framework of scriptable APIs to enable the Virtual Agent application on any conversational interface.

For more information on this plugin, see Creating conversational custom chat integrations in Virtual Agent.

ServiceNow IntegrationHub Runtime (com.glide.hub.integration.runtime)

Enables execution of Integration Hub actions and flows.

IHUB Spoke Util Pack (com.snc.ihub_spoke_util_pack)

Enables utility or global scripts that can be invoked from the Integration Spokes.

Conversational Messaging (com.glide.messaging.awa)

Enables messaging actions that are performed when an event occurs.

The following applications and plugins are not installed with Conversational Integration with Apple Messages for Business, but are required in order to use specific features.

Conversational Appointment Booking (sn_va_appt_schedul)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Book, reschedule, and cancel appointments from Virtual Agent conversations. This application is required in order to use the time picker feature in Apple Messages for Business.

Payment framework for conversational channels (sn_va_payment_ctrl)

Enables the payment framework custom control for live agent and virtual agent conversations in Apple Messages for Business.

Procedure

1. Make sure that your Apple Messages for Business account is set up and active.
   See the Apple documentation for more information.
2. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
3. Find the Conversational Integration with Apple Messages for Business application (sn.va.abc.adapter) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   In the list next to the **Install** button, the versions that are available to you are displayed.
4. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.
5. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.
6. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
7. Select **Install**.

Set up the integration on Apple Messages for Business

To integrate Apple Messages for Business with your ServiceNow® instance, you need to set up your Apple Messages for Business account, and then link your Apple Messages for Business messaging service provider account to your ServiceNow® instance.

Before you begin

- Role required: admin
- If your business doesn't already have an Apple ID, create one. Make sure to use the ServiceNow® Messaging Service Provider (MSP).

  Note:
  For more information about creating a business Apple ID, refer to the Apple documentation.

- Create a Apple Messages for Business account.

Procedure

1. Go to Apple Messages for Business (register.apple.com).
2. Click **Messages for Business Accounts** to go to your business account.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. Click **Test your Messaging Service Provider connection**, and **Connect**.
   You are redirected to your Now Support portal. Log in if necessary.
4. On your Now Support portal, complete the connection of your Apple Messages for Business account with your ServiceNow instance.

   a. Use the dropdown to select the instance that you want to connect to your Apple Messages for Business account.
   Ensure that the instance has the Conversational Integration with Apple Messages for Business application installed.

   b. If the connection is successful, the message "Your request on the instance <instance name> is successfully submitted" displays.
   If the connection is not successful, you are redirected to the landing page on Now Support. Try again by repeating the connection steps.

5. Once the connection is complete, click **Go to instance** to go to your customer instance and log in if necessary.
6. On the Apple Messages for Business account page, enter the Provider Application name.
   This should be a name that will help you identify this connection on your instance.
7. Click **Complete installation**.
   If the installation was successful, you are redirected to the instance homepage and the following message displays: “Bot registration successful. View the provider record here.”

What to do next

If you want to integrate your Identity Provider (IdP), go to: OAuth setup for Apple Messages for Business.

OAuth setup for Apple Messages for Business

Integrate your Identity Provider (IdP) with Apple Messages for Business using OAuth2 authentication.

Connect Apple Messages for Business to your ServiceNow® instance

Complete the following steps on the Apple Messages for Business site to connect your Apple Messages for Business account to your ServiceNow® instance.

1. Go to the Apple Messages for Business page (register.apple.com) and log in to your Messages for Business account.
2. Go to the **Integrated OAuth2 Authentication** section.
3. Add the Authorization URL from your Identity Provider (IdP) to the **OAuth URL** field.
4. Add the Token URL from your IdP to the **Token URL** field.
5. Add the Client ID from your IdP to the **Client Identifier** field.
6. Refer to the Apple documentation for further instructions on configuring OAuth2 authentication on your Apple Messages for Business account.

Set up OAuth on your ServiceNow® instance

1. Go to your ServiceNow® instance to set up OAuth.
2. Create a new record in the Application Registries (oauth_entity) table using these instructions: Use a third-party OAuth provider.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Use the grant type **Authorization code**.
- Add the **Token URL**.

3. Create a new record in the OAuth Entity Scopes (oauth_entity_scope) table using these instructions: Specify an OAuth scope. If you have multiple scopes, then add a new record for each scope, and create a corresponding Entity Profile Scope record for each scope.
4. Create a new record in the Connection and Credential Aliases (sys_alias) table using these instructions: Create a Connection & Credential alias. This connection alias is used for fetching the http connection record which you create in the next step.
5. Create a new record in the HTTP(s) Connection (http_connection) table using these instructions: Create an HTTP(s) connection.
   - Type of connection - Select HTTP(s) Connection
   - Set the Connection alias to the `sys_alias` record created in previous step.
   - Set the connection url to fetch the user information API as per your IdP. (For example: `https://<your-idp-app>.com/api/v1/users`)
6. Create a Profile Parser Action using Workflow Studio. See the code snippets shown here for an example: Create a profile parser action for Apple Messages for Business. See Building actions for more details.
7. Create a new record in the Provider Application Authentications (sys_cs_provider_app_authentication) table using these instructions:
   - Set the Provider Channel Identity to your provider app (`sys_cs_provider_application`)
   - Set the OAuth Entity Profile to the `oauth_entity_profile` record created with your OAuth Provider (`oauth_entity`) record.
   - Set the Profile API Connection to the `http_connection` record created previously.
   - Set the Profile Response Parser Action to the `sys_hub_action_type_definition` record that you have defined.

Create a profile parser action for Apple Messages for Business

Create an action to parse the user information response and find the corresponding user on the ServiceNow® instance for Conversational Integration with Apple Messages for Business using the information provided here.

Before you begin

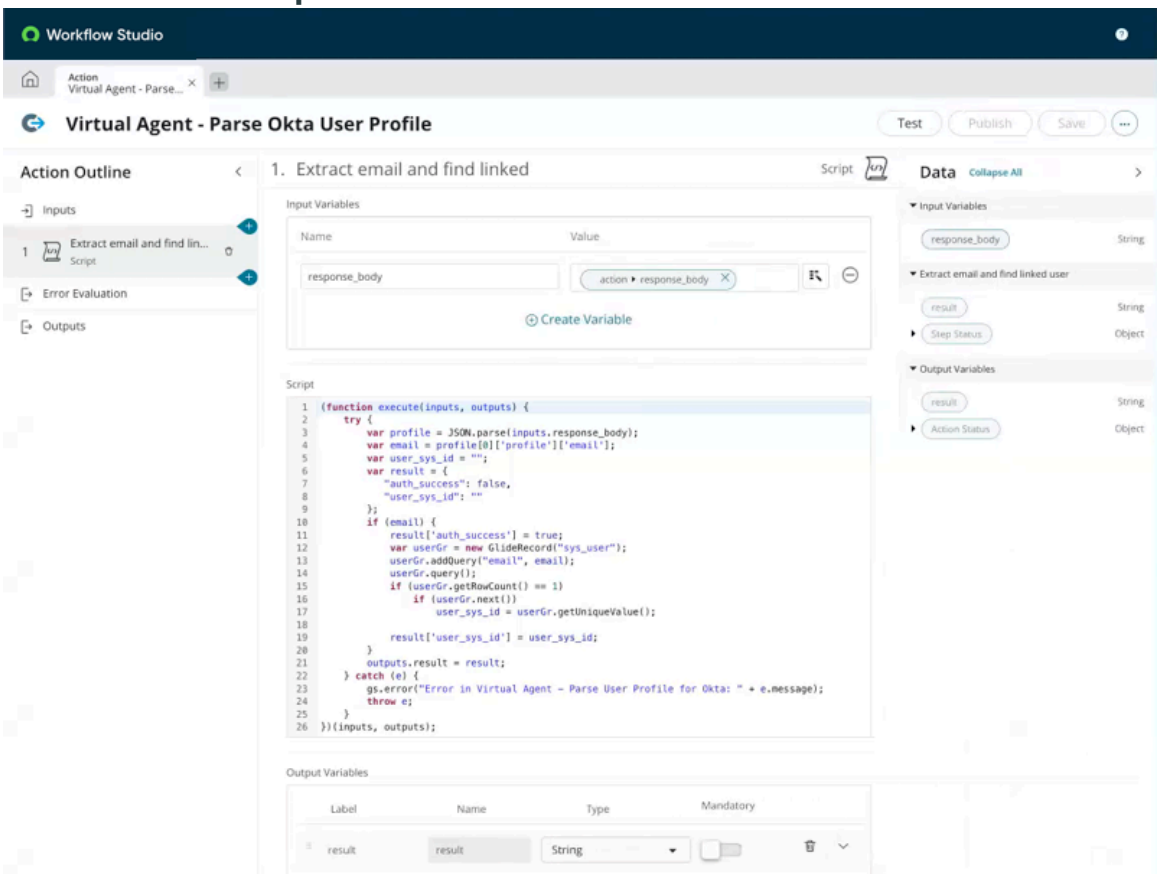
Role required: admin

Procedure

1. Refer to the following procedure to create a new action. Create an action in Workflow Studio.
2. In the Workflow Studio integration hub, set the **Input** field to `response_body (string)`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Workflow Studio example



3. You can use the following example script to help create your script for the action.

```
(function execute(inputs, outputs) {
    try {
        var profile = JSON.parse(inputs.response_body);
        var email = profile[0]['profile']['email'];
        var user_sys_id = "";
        var result = {
            "auth_success": false,
            "user_sys_id": ""
        };
        if (email) {
            result['auth_success'] = true;
            var userGr = new GlideRecord("sys_user");
            userGr.addQuery("email", email);
            userGr.query();
            if (userGr.getRowCount() == 1)
                if (userGr.next())
                    user_sys_id = userGr.getUniqueValue();

            result['user_sys_id'] = user_sys_id;
        }
        outputs.result = result;
    } catch (e) {
        gs.error("Error in Virtual Agent - Parse User Profile:
 " + e.message);
        throw e;
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
    }
})(inputs, outputs);
```

4. Set the **Output** field to the following:

```
result = {
    "auth_success": false,
    "user_sys_id": "1234"
    };
```

Complete the Payment Provider Configuration

Fill out the information in the Payment Provider Configuration table to connect your payment provider information to your ServiceNow® instance.

Before you begin

Role required: admin

About this task

Each payment provider has their own procedures for certification, or configuration of your merchant profile. Refer to the payment provider's documentation for more details.

Procedure

1. Navigate to `sn_va_payment_ctrl_payment_provider_configuration.list`.
2. On the form, fill in the fields.

   All information must match the information you have input with the payment provider.

Payment Provider Configuration form

Field	Description
Name	The name of the payment provider. For example: Apple Pay, Google Pay, Stripe
Merchant Name	Your merchant name from your payment provider.
Merchant Identifier	Your merchant id from your payment provider.
Payment Gateway URL	The URL for the payment gateway you host which processes the customer credit card details.
Merchant Capabilities	The types of payment you can accept. For example: Debit, credit, 3DS
Supported Networks	The types of credit cards supported by the payment provider. For example: Mastercard, Visa, American Express
Protocol Profile	The name of the profile you have configured for processing payments.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Order Tracking URL	The URL that the user can access to track their order.
Shipping Contact Update URL	This URL allows the user to update their shipping contact information.
Fallback URL	An alternate URL to allow the user to access the order information.
Payment Method Update URL	This URL allows the user to update their payment method preference.
Supported Countries	Countries that you sell to.
Shipping Method Update URL	This URL allows the user to update their shipping method preference.

3. Click **Update**.

Remove the integration for Apple Messages for Business

To remove the integration of Apple Messages for Business with your ServiceNow® instance, you need to log in to your Apple Messages for Business account, and then unlink your Apple Messages for Business partner account from your ServiceNow® instance.

Before you begin

- Role required: admin

Procedure

1. Go to Apple Messages for Business (register.apple.com).
2. Click **Messages for Business Accounts** to go to your business account.
3. Select the Business Account that you want to unlink from your ServiceNow® instance.
4. Click **Test your Messaging Service Provider connection**, and **Connect**.
   You are redirected to your Now Support portal. Log in if necessary.
5. On the **Remove Apple Messages for Business Account connection** page, click **Delete connection**.
   A new tab opens to confirm you want to remove the connection.
6. Click **Remove connection**.
7. Upon successful deletion, you are redirected to your the instance homepage and shown this message: “Business account registration was successfully deleted."

Capturing information from a user in a Apple Messages for Business chat conversation

Virtual Agent Designer is a diagram tool for creating and managing topics, which are blueprints for conversations between a virtual agent and user.

Use the collection of input controls provided by the Virtual Agent Designer to prompt and capture information from a requester in a Apple Messages for Business chat conversation. For more information, see Getting started with Virtual Agent Designer.

For more information about displaying images along with external links, see Using link unfurling in Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Apple Messages for Business has an array of interactive features that are native to the app. For more information about these interactive features, see Integrating Virtual Agent with Apple Messages for Business.

User notification consent

Note:

Notifications are turned off by default for the Apple Messages for Business channel. Make sure to enable notifications at the channel level.

Users must opt in to receive notifications. No notifications can be delivered until the user grants consent.

There are two ways for users to grant consent to receive notifications:

- The user can enter `Notification` into the Apple Messages for Business chat to get a bot response with the option to subscribe or unsubscribe from receiving notifications for your business on Apple Messages for Business.
- As the administrator, you can set up the option for users to subscribe or unsubscribe from notifications from your portal. See Subscription-based notifications for more information.

User input controls

The Conversational Integration with Apple Messages for Business application supports the following user input controls in Virtual Agent Designer.

Supported user input controls

User input control	Description
Text	User enters a plain text string in the conversation.
Static Choice	User selects an item from a predefined list.
Dynamic Choice	User selects an item from a list that is created dynamically. For example, the user can select from a list of cases that they opened.
Boolean	User enters a Boolean response to the bot. For example, the user can reply `Yes` or `No` in a chat conversation.
File Picker	User sends a file to the bot.
Date Time	User selects a calendar date, time (hours and minutes), or both.
Carousel	User selects a single item from the carousel.

For more information about configuring user input controls, see Virtual Agent Designer user input controls.

The Conversational Integration with Apple Messages for Business application supports the following bot responses in Virtual Agent Designer.

Supported bot responses

Bot response	Description
Text	Bot sends a plain text string to the user.
Image	Bot sends an image to the user.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported bot responses (continued)

Bot response	Description
Link	Bot sends a web link to the user. **Note:** Any URLs must be added to the allowed domain list (`sys_cs_hostname_allow_list`) table.
Table	Bot sends information in a table format so that users can see information in a more organized way. For example, you can organize and display information such as the following: • Planned service changes • Company holidays • Contact information • Testing sites
Card	Bot uploads and displays selected information from a record on your instance. You can choose a record card, video card, or small or large image card.

For more information about configuring bot responses, see Virtual Agent Designer bot responses.

Transfer Apple Messages for Business chat conversations to live agents

Configure the Advanced Work Assignment application to transfer a Apple Messages for Business chat conversation initiated by a requester to a live agent.

Before you begin

Your administrator must have completed the following tasks:

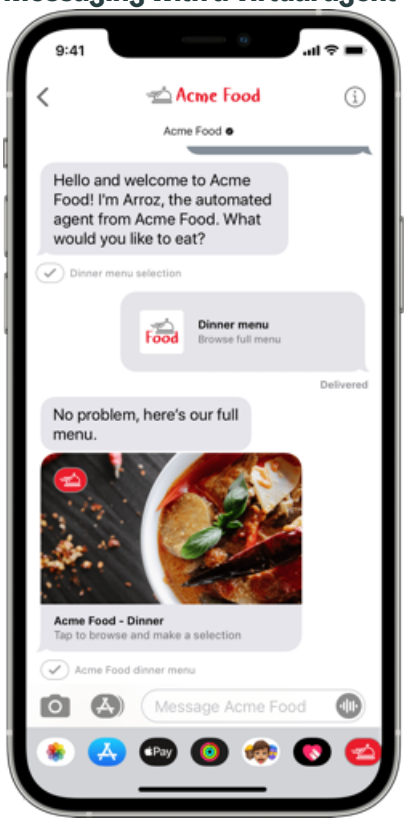
- Activate Advanced Work Assignment.
- Set the application scope to Conversational Integration with Apple Messages for Business using the application picker. For more information, see Application picker.
- Activate the Conversational Messaging plugin (com.glide.messaging.awa). For more information, see Activate Conversational Messaging.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Messaging with a virtual agent



Messaging with a live agent



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Enable the Apple Messages for Business service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Service Channels**.
   b. In the **Name** column of the Queues list, search for `Apple Messages for Business`.
   c. Select **Apple Messages for Business**.
   d. On the Service Channel form, select the **Active** check box.
   e. Select **Update**.
   f. Add agents to the `Agent Apple Messages for Business Queue`.
   For more information, see Service channels.
2. Automatically route work items for Apple Messages for Business chat conversations to agents by configuring the queue for the Apple Messages for Business service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Queues**.
   b. In the **Name** column of the Queues list, search for `Apple Messages for Business Queue`.
   c. Select **Agent Apple Messages for Business Queue**.
   d. On the Queue form, select the **Active** check box.
   e. Select **Update**.

   Note:
   By default, the *`Apple Messages for Business - Most Capacity`* assignment rule is associated with the Agent Apple Messages for Business Queue. You can create another assignment rule and associate it with the queue. For more information, see Configure agent assignment rules and Work item queues.

3. Configure agent presence states for the Apple Messages for Business service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Presence States**.
   b. In the **Name** column of the Presence States list, select an existing state.
   c. In the Apply to groups section of the Presence State form, select the add icon > to move the Agent Apple Messages for Business Group group from the Available column to the Selected column.

      Note:
      You can ignore this step if you have selected the **Apply to all groups** check box.

   d. Select **Update**.

   For more information, see Configure agent presence states.

Using Conversational Integration with Apple Messages for Business

Enable a requester to converse with an agent using Apple Messages for Business chat conversations. An administrator can configure the Conversational Integration with Apple Messages for Business application for integrating the Apple Messages for Business messaging app with a ServiceNow application.

Agents and requesters can do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- A requester can initiate Apple Messages for Business chat conversations with a virtual agent or live agent.
- A live agent can accept Apple Messages for Business chat conversations as work items from their Agent Workspace Inbox to converse with a requester.
- A live agent can continue to interact with a customer conversation in Apple Messages for Business for as long as the customer would like.

For more information, see Integrating Apple Messages for Business with Customer Service Management.

Accepting Apple Messages for Business chat conversations

As a live agent interacting with a requester over the Apple Messages for Business service channel, you can do the following:

- Converse with the requester through text messages or iMessages.
- Share a knowledge article displayed as a link to the requester.
- Share a record. For example, a customer service case.
- Share any URLs as links with photo or video previews.
- Share photos or videos.
- Share any files as attachments.

Note:
If an administrator has configured the Apple Messages for Business service channel for transfer of chat conversations, then you can accept a work item from the Apple Messages for Business chat conversation in your Agent Workspace Inbox. For more information, see Transfer Apple Messages for Business chat conversations to live agents and Service channels.

Integrating the Conversational Integration with Apple Messages for Business app with other applications

Other ServiceNow applications and features can use the Conversational Integration with Apple Messages for Business application.

As a live agent, when you accept a request from the Apple Messages for Business service channel, you can converse with the requester within the same channel.

Integrating with Customer Service Management

Integrate the Conversational Integration with Apple Messages for Business application with the ServiceNow® Customer Service Management application to enable your customer contacts and consumers to initiate a Apple Messages for Business chat conversation with a virtual agent or live agent. An agent can accept a conversation initiated from a Apple Messages for Business chat conversation.

Integrating Virtual Agent with Facebook Messenger

Engage with requesters including customer contacts and consumers who prefer the Facebook Messenger app to chat with an agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Enable your users to initiate a Facebook Messenger chat conversation with a virtual agent by using the Conversational Integration with Facebook Messenger application. The application connects a requester with a virtual agent or live agent using your company's Facebook Messenger account. To get started with the Conversational Integration with Facebook Messenger application, see Configure Conversational Integration with Facebook Messenger.

Notice regarding use by customers

Customers are solely responsible for the implementation of the Conversational Integration with Facebook Messenger application. The use of this application in a Facebook app requires a review of the app by the Facebook Developer Support team. It is the responsibility of customers to complete this app review process. The following links from the Facebook site provide guidance on how to complete the app review process:

1. Facebook Platform Policy Overview: https://developers.facebook.com/docs/messenger-platform/policy/policy-overview
2. Facebook Pre-Launch Checklist: https://developers.facebook.com/docs/messenger-platform/prelaunch-checklist
3. Facebook review and submission process for applications: https://developers.facebook.com/docs/messenger-platform/#review---submission-process

Configure Conversational Integration with Facebook Messenger

Install and set up the Conversational Integration with Facebook Messenger application to enable your users to interact with virtual and live agents.

Before you begin

Role required: admin

About this task

This task provides the general steps to integrate the Facebook Messenger messaging app with a ServiceNow application using the Conversational Integration with Facebook Messenger application.

Procedure

1. Install Conversational Integration with Facebook Messenger.
2. Set up Conversational Integration with Facebook Messenger.
3. Design virtual agent topics to capture information from a Facebook Messenger chat conversation.
4. **Optional:** Close idle Facebook Messenger chat conversations.
5. **Optional:** Transfer Facebook Messenger chat conversations to live agents.

Install Conversational Integration with Facebook Messenger

You can install the Conversational Integration with Facebook Messenger application (sn_va_fb_messenger) if you have the admin role. The application includes demo data and installs related ServiceNow® Store applications and plugins if they are not already installed.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

The following applications or plugins are installed with Conversational Integration with Facebook Messenger:

Conversational Custom Chat Integration (com.glide.cs.custom.adapter)

Provides custom chat integration framework of scriptable APIs to enable the Virtual Agent application on any conversational interface.

For more information on this plugin, see Creating conversational custom chat integrations in Virtual Agent.

ServiceNow IntegrationHub Runtime (com.glide.hub.integration.runtime)

Enables execution of Integration Hub actions and flows.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Conversational Integration with Facebook Messenger application (sn_va_fb_messenger) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. In the Application installation dialog box, review the application dependencies.

   Dependent plugins and applications are listed if they will be installed, are currently installed, or need to be installed. If any plugins or applications need to be installed, you must install them before you can install Conversational Integration with Facebook Messenger.
4. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
5. Select **Install**.

Set up Conversational Integration with Facebook Messenger

Integrate Facebook Messenger with your ServiceNow instance using the Conversational Integration with Facebook Messenger application. Use the application to engage customers in conversations with bots.

Before you begin

- Get ServiceNow entitlements for the following products and applications:
  - Integration Hub
  - Conversational Integration with Facebook Messenger

  For more information, see Get entitlement for a ServiceNow product or application.
- Install the following applications on your ServiceNow instance:
  - Integration Hub
  - Conversational Integration with Facebook Messenger

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Complete Facebook Messenger settings.
  1. Set up a Facebook developer account.
  2. Create a Facebook app.
  3. Review the Messenger Platform Policy and Pre-Launch Checklist prior to submission.
  4. Submit the app for review.
  5. Create a Facebook page within the Facebook app you created earlier.
  6. Enable Facebook Messenger.

Role required: external_app_install_admin or va_admin

Procedure

1. Connect your company's Facebook Messenger service with your ServiceNow instance.

   a. Log in to your Facebook developer account and open the Facebook app you created.

   b. Enable your Facebook app to send data to your ServiceNow instance by entering the webhook URL.

      i. Click **Add Callback URL** in the Webhooks section of the app.

      ii. In the Edit Callback URL dialog box, fill in the fields.

Field	Description
Callback URL	Public URL for webhook. Enter the webhook URL in the following format: `https://<instance-name>.service-now.com/api/now/v1/cs/adapter/messenger/message`
Token	Token for webhook. By default, the token for ServiceNow webhook is `nowbot`. As a user with the admin role, you can set the *`glide.cs.facebook_messenger_verify_token`* system property to a desired value and then enter that value in this field. Because the *`glide.cs.facebook_messenger_verify_token`* system property isn't available by default, you must add it with the data type set to string. For more information, see Add a system property.

      iii. Click **Verify and Save**.

   c. Make a note of your Facebook page ID and access token.

      i. Click **Add or Remove Pages** and select your Facebook page.

      ii. Make a note of the page ID displayed below the page name.

      You can click the page ID to copy the ID to your clipboard.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

iii. In the Access Tokens section, click **Generate Token** for the Facebook page you created.

> **Note:**
> Make note of the page access token used later for authenticating the Facebook Messenger on your ServiceNow instance.

d. Subscribe your Facebook app to your Facebook page.

i. In the Webhooks section, click **Add Subscriptions**.

For each authorized Page, the Webhooks section contains the fields the app can subscribe to.

ii. In the Edit Page Subscriptions dialog box, select **messages** and **messaging_postbacks**.

iii. Click **Save**.

e. Make a note of the App secret and App ID from Basic Settings.

f. **Optional:** Send messages with timestamp in the customer's time zone by navigating to **Page settings** > **Advanced messaging**, selecting the **Time zone** option in the Requested Features section, and clicking **Request** displayed next to the selected option.

2. On your ServiceNow® instance, go to **All** > **Conversational Interfaces** > **Channels and Integrations**.
3. On the Facebook Messenger integration section, click **Add**.
   The Facebook Messenger Channel integration page opens.
4. Click the three dots on the right hand side and choose **Edit Integration**.
5. On the form, update the name of the bot if desired.
6. Fill in the following fields
7. Enter the callback URL and the token from your Facebook Messenger account.
8. Click **Submit**.
   A success message displays confirming the integration with the Facebook Messenger app.

Capturing information from a user in a Facebook Messenger chat conversation

Use the collection of input controls provided by the Virtual Agent Designer to prompt and capture information from the user in a Facebook Messenger chat conversation.

Virtual Agent Designer is a diagram tool for creating and managing topics, which are blueprints for conversations between a virtual agent and user. For more information, see Getting started with Virtual Agent Designer.

The Conversational Integration with Facebook Messenger application supports the following user input controls in Virtual Agent Designer.

Supported user input controls

User input control	Description
Text	User enters a plain text string in the conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported user input controls (continued)

User input control	Description
	The maximum character limit is 5000 characters.
Static Choice	User selects an item from a predefined choice list. In a quick reply, the label has the maximum character limit of 20 characters. At a time, a user can view only 13 quick replies. If there are more than 13 quick replies, the pagination format is used to view more options. The default value of the maximum number of replies for a page is set in the *sn_va_fb_messenger.max_quick_replies* system property (location: System Property [sys_properties] table).
Boolean	User enters a Boolean response to the bot. For example, the user can reply `Yes` or `No` in a chat conversation.
File Picker	User sends a file to the bot. The supported file types are JPG, PNG, BMP, and MP4. Note the following points about the maximum size limit for a file type: • For images, the maximum size limit is 10 MB. • For videos, the maximum size limit is 200 MB.
Date Time	User selects a calendar date, time (hours and minutes), or both. **Note:** If your administrator has set the option to request time zone from the customer, the selected date and time reflect customer's time zone. Else, they appear in the UTC time zone. For more information about the time zone setting, see 1.f.
Carousel	User selects a single item from the carousel. In a carousel, the title for an image has maximum limit of 40 characters and the text for the image has maximum character limit of 60 characters. At a time, a user can view only 10 images. If there are more than 10 images, the pagination format is used to view more options. The default value of the maximum number of images in a carousel for a page is set in the *sn_va_fb_messenger.max_carousel_cards* system property (location: System Property [sys_properties] table).

For more information about configuring user input controls, see Virtual Agent Designer user input controls.

The Conversational Integration with Facebook Messenger application supports the following bot responses in Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported bot responses

Bot response	Description
Text	Bot sends a plain text string to the user.
Image	Bot sends an image to the user.
Link	Bot sends a web link to the user. **Note:** The web link appears as a URL button in the conversation.
Card	Bot sends selected information from a record on your instance.

Note:
You can also return search results as bot responses in Facebook Messenger chat conversations when there are no relevant topics to display to end users. For more information, see Improving the user experience with AI Search.

For more information about configuring bot responses, see Virtual Agent Designer bot responses.

Closing idle Facebook Messenger chat conversations

Enable agents to effectively manage their active Facebook Messenger chat conversations by automatically closing conversations after they have been inactive for a pre-configured amount of time.

The Virtual Agent conversations are configured for the Facebook Messenger app. By default, any conversations abandoned by requesters remain open or idle until they are automatically closed daily by the *Time Out Abandoned VA Conversations* scheduled job. For more information, see Closing Virtual Agent and Agent Chat conversations.

As an administrator, you can change the default timeout period for idle Virtual Agent conversations configured for the Facebook Messenger app by setting the *com.glide.cs.facebook_messenger_idle_timeout* system property to the number of seconds that abandoned conversations remain open after the requester's last response. The system property value must be less than the time interval set for the *Time Out Abandoned VA Conversations* scheduled job, set to two hours (7200 seconds) by default. Because the *com.glide.cs.facebook_messenger_idle_timeout* system property isn't available by default, you must add it with the data type set to integer. For more information, see Add a system property.

Transfer Facebook Messenger chat conversations to live agents

Configure the Advanced Work Assignment application to transfer a Facebook Messenger chat conversation initiated by a requester (customer contact or consumer) to a live agent.

Before you begin
Your administrator must have completed the following tasks:

- Activate Advanced Work Assignment.
- Install Conversational Integration with Facebook Messenger.
- Set the application scope to Conversational Integration with Facebook Messenger using the application picker. For more information, see Application picker.
- Activate the Conversational Messaging plugin (com.glide.messaging.awa). For more information, see Activate Conversational Messaging.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: admin

About this task

Procedure

1. Enable the Facebook Messenger service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Service Channels**.
   b. In the **Name** column of the Queues list, search for `Line`.
   c. Select **Facebook Messenger**.
   d. On the Service Channel form, select the **Active** check box.
   e. Select **Update**.
   For more information, see Service channels.
2. Automatically route work items for Facebook Messenger chat conversations to agents by configuring the queue for the Facebook Messenger service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Queues**.
   b. In the **Name** column of the Queues list, search for `Agent Facebook Messenger Queue`.
   c. Select **Agent Facebook Messenger Queue**.
   d. On the Queue form, select the **Active** check box.
   e. Select **Update**.

   Note:
   By default, the *`Facebook Messenger - Most Capacity`* assignment rule is associated with the Agent Facebook Messenger Queue. You can create another assignment rule and associate it with the queue. For more information, see Configure agent assignment rules and Work item queues.

3. Configure agent presence states for the Facebook Messenger service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Presence States**.
   b. In the **Name** column of the Presence States list, select an existing state.
   c. On the Presence State form, in the Service channels section, select the add icon > to move the Facebook Messenger service channel from the Available column to the Selected column.
   d. In the Apply to groups section of the Presence State form, select the add icon > to move the Agent Facebook Messenger Group group from the Available column to the Selected column.

      Note:
      You can ignore this step if you have selected the **Apply to all groups** check box.

   e. Select **Update**.

   For more information, see Configure agent presence states.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using Conversational Integration with Facebook Messenger

Enable a requester to converse with an agent using the Facebook Messenger chat conversations.

An administrator can configure the Conversational Integration with Facebook Messenger application for integrating the Facebook Messenger app with a ServiceNow application. For more information, see Integrating the LINE messaging app with other applications.

A requester can initiate Facebook Messenger chat conversations with a virtual agent or live agent.

A live agent can accept Facebook Messenger chat conversations as work items from their Agent Workspace Inbox to converse with a requester.

Accepting Facebook Messenger chat conversations

As a live agent interacting with a requester over the Facebook Messenger service channel, you can:

- Converse with the requester through text messages.
- Share a knowledge article displayed as a link to the requester.
- Share a record, for example, a customer service case.
- Share any URLs as links.
- Share any files as attachments.

Note:
You accept a work item from the Facebook Messenger chat conversation in your Agent Workspace Inbox when an administrator has configured the Facebook Messenger service channel for transfer of chat conversations. For more information, see Transfer Facebook Messenger chat conversations to live agents and Service channels.

Integrating the Facebook Messenger messaging app with other applications

Review this topic to see which ServiceNow applications and features can use the Conversational Integration with Facebook Messenger application.

As an administrator, you can use the Conversational Integration with Facebook Messenger application to integrate the Facebook Messenger messaging app with other ServiceNow applications and enable requesters to converse with agents using the Facebook Messenger messaging app.

Integrating with Customer Service Management

Integrate the Conversational Integration with Facebook Messenger application with the ServiceNow® Customer Service Management application to enable your customer contacts and consumers to initiate a Facebook Messenger chat conversation with a virtual agent or live agent. For more information, see Integrate Facebook Messenger with Customer Service Management.

Set up the Virtual Agent integration with Facebook Messenger (Legacy)

Configure the Virtual Agent integration for Facebook Messenger and associate the app with your instance.

Before you begin
You should already have the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Facebook page (see https://www.facebook.com/pages/creation/ for more information)
- Facebook developer account (see https://developers.facebook.com/ for more information)
- Facebook app (see https://developers.facebook.com/quickstarts for more information, make note of the app secret that is generated)

Roles required:

- virtual_agent_admin and external_app_install_admin or admin
- Administrator for third-party applications

Procedure

1. In Facebook developer, navigate to **Messenger** > **Settings**.
   a. Locate the Token Generation section.
   b. From the page list, select the Facebook page you created and make note of the Page Access Token that is generated.
   c. Locate the Webhooks section and click **Setup Webhooks**.
   d. On the New Page Subscription pop-up window that displays, enter these fields:

Field	Value
Callback URL	Your ServiceNow instance URL followed by `/api/now/v1/cs/adapter/messenger/message`
Verify Token	`nowbot`
Subscription Fields	Select **messages** and **messaging_postbacks**

   e. Click **Verify and Save**.
2. In your ServiceNow instance, enter `hash_message_verification.list` in the Filter navigator.
   a. In the Hash Message Verifications form, click **New** to create a new record.
   b. Enter these fields:

Field	Value
Name	Name that helps to identify this record. This field may default to `sample-fb-messenger-inbound-app-token` but this default can be changed.
Description	Description for the record

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Value
Secret	App secret of your Facebook Messenger app (the secret was generated when you created the app)

c. Click **Submit**.

3. In your ServiceNow instance, enter `token_verification.list` in the Filter navigator.

   a. In the Token Verifications form, click **New** to create a new record.

   b. Enter these fields:

Field	Value
Name	Name that helps to identify this record. This field may default to `sample-fb-messenger-outbound-app-token` but this default can be changed.
Description	Description for the record
Token	Page access token of your Facebook Messenger app (from step 1b of this procedure)

   c. Click **Submit**.

4. In your ServiceNow instance, enter `message_auth.list` in the Filter navigator.

   a. In the Message Auth page, click **New** to create a new record.

   b. Enter these fields:

Field	Value
Name	Name that helps to identify this record. This field may default to `sample-fb-messenger-app` but this default can be changed.
Provider	Name of the provider
Inbound message verification	Name specified on the Hash Message Verifications form (this token verifies if the request is actually from the provider)
Outbound message creation	Name specified on the Token Verification form (this token interacts with the provider on behalf of the user)

   c. Click **Submit**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

5. In your ServiceNow instance, enter `sys_cs_adapter_configuration_page_messenger.list` in the Filter navigator.

   a. In the Facebook Messenger Adapter Configuration Page, click **New** to create a new record.

   b. Enter these fields:

Field	Value
App Type	Defaults to Facebook Messenger and cannot be changed
Messenger Page ID	Your page ID (the page ID can be found in the URL of the Facebook page)
Name	Name that helps to identify this record. This field may default to `sample-fb-messenger-app` but this default can be changed.
Provider Auth	Name specified on the Message Auth page

6. Click **Submit**.
7. Configure whether users should be prompted to link their profile to their ServiceNow profile.

   a. In the Navigation filter, enter `sys_properties.list`.

   b. Navigate to and click *`va.messenger.account.auth`*.

   c. In the **Value** field, enter **true** or **false**.

true	Prompt users to link their account to their ServiceNow profile. Users who link their account to their ServiceNow profile can access all topics and also chat with a live agent. Users who do not link their account can access only guest topics.
false	Do not prompt users to link their account to their ServiceNow profile. Users can access only guest topics but can still chat with a live agent.

   d. Click **Update**.

Configure the help link for the Virtual Agent Facebook Messenger integration (Legacy)

Use the *`va.messenger.help.url`* system property to create the link that opens a web help page when requesters use the **Help** command in the Virtual Agent Facebook Messenger integration.

Before you begin

- Determine the web page that provides the help content that your Facebook Messenger users need.
- Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Set the application scope to **Global**.
2. In the Navigation filter, enter `sys_properties.list`.
3. Click **New**.
4. Complete the following:
   a. In the **Name** field, enter the system property name: *`va.messenger.help.url`*.
   b. In the **Description** field, enter a brief explanation of this property.
   c. In the **Value** field, enter the URL of the website page that the link opens.
   d. Click **Submit**.

Result

When your Facebook Messenger users type `help`, they are directed to the URL of the website specified in the *`va.messenger.help.url`* property.

Remove Conversational Integration with Facebook Messenger

Users can remove the Conversational Integration with Facebook Messenger application when the app is no longer needed.

Before you begin

Role required: admin

Procedure

1. Go to **All** > **Conversational Interfaces** > **Channels and Integrations**.
2. On the Facebook Messenger integration section, click **Manage**.
   The Facebook Messenger Channel integration page opens.
3. Click the three dots on the right hand side and choose **Remove Integration**.
   A confirmation message displays.
4. Click **Remove**.
   The Facebook Messenger application and all of its data is removed.

Conversational Integration with Google chat

Enable requesters to chat with Google chat or live agents using the Google chat application. Use the Conversational Integration with Google chat app, available from the ServiceNow Store, to associate your instance with Google chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Get started with Conversational Integration with Google chat

Explore	Configure	Integrate
		
Learn more about Conversational Integration with Google chat	Install Conversational integration with Google chat.	Integrate Conversational Integration with Google chat.

Exploring Conversational Integration with Google chat

Use the Conversational Integration with Google chat application to connect your end users with Virtual Agent or live agents through your Google chat account.

Conversational Integration with Google chat overview

Enable requesters to chat with Google chat or live agents using the Google chat application. Use the Conversational Integration with Google chat app, available from the ServiceNow Store, to associate your instance with Google chat.

Conversational Integration with Google chat users

Users

User	Description
admin or virtual_agent_admin	Create and publish Virtual Agent conversations.
admin.google.com	A Google account with admin privileges is required to integrate Virtual Agent in Google.

Follow these steps to add Conversational Integration with Google chat:

1. Plugins for Conversational Integration with Google chat
2. Installing Conversational Integration with Google chat
3. Integrating Virtual Agent with Google chat

Plugins for Conversational Integration with Google chat

Activate the Glide Virtual Agent [com.glide.cs.chatbot] plugin and the Conversational Integration with Google chat [sn_va_google-chat] plugin.

You must have either the virtual_agent_admin or admin role and the external_app_install_admin role to activate these additional plugins. For details, see Activate a plugin.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Ensure that you have performed the following steps before verifying the activation of additional plugins required for Google chat.

- Installing of the Glide Virtual Agent [com.glide.cs.chatbot] plugin.

  For more information about activating the Glide Virtual Agent plugin, see Activate Virtual Agent.

- Downloading the Google chat app from the ServiceNow® Store.

  For more information about downloading the app, Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

- Installing the Google chat [sn_va_google-chat] plugin in your ServiceNow instance.

  For more information about installing Google chat, see Installing Conversational Integration with Google chat.

Installing Conversational Integration with Google chat

Install the Google chat (sn_va_google-chat) application so that Now Virtual Agent and Google chat users can interact with each other.

Before you begin

- Roles required:
  - virtual_agent_admin and external_app_install_admin or admin.
  - Google chat administrator (one of the following): Global administrator, Application administrator, or Cloud Application administrator.

Procedure

1. On the Google workspace, navigate to Build a Google Chat app with Google Apps Script.
2. Verify that you have fulfilled the prerequisites.
3. Follow the instructions in the Open your Cloud project in the Google Cloud console section.
4. Follow the instructions in the Turn on the Chat API section.
5. Navigate to https://console.cloud.google.com/.
6. Select **APIs & Services** from the Quick Access view or from the side menu.
7. In the list of APIs, select **Google Chat API**.
8. On the Google chat API screen, select the **Configuration** tab.
9. Verify **Build this Chat app as a Workspace add-on** is selected.
10. Complete the Application info fields:

Field	Description
App name	Application name.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Avatar URL	Publicly accessible avatar image for the application.
Description	Application description.

11. In the Interactive features section, verify **Enable interactive features** is selected.
12. In the Connection Settings section, select **HTTP endpoint URL**.
13. In the Triggers section, select **Use a common HTTP endpoint URL for all triggers**.
14. In the HTTP endpoint URL field, enter the instance name and the URL extension: `<instance url>/api/sn_va_google_chat/va_google_chat_inbound/events`.
15. In the Visibility section, select **Make this Chat app available to specific people and groups in servicenow.**
16. In the Enter email addresses to add individuals and groups in your domain field, enter your email address.
17. Select **Save**.
18. Scroll back to the top of the screen.
19. In the Connection settings section, find and note the Service Account Email - this is your Inbound Service Account Email.
20. In the side menu, navigate to Credentials.
21. In the Service Accounts section, select **Manage service accounts**.
22. Select **+ Create service account**.
23. On the Create service account screen, fill out the fields:

Field	Description
Service account name	Name for the service account.
Service account ID	This will be automatically generated for you.
Service account description	Description for the service account.

24. Find and note the email account under the Service account ID field - this is your Outbound Service Account email.
25. Select **Done**.
26. On the Service Accounts screenn,navigate to the Manage Keys page and select your new outbound service account.
27. Select the Keys tab.
28. From the Add Key drop-down list, select **Create new key**.
29. On the Create private key for 'Outbound Service Account' window, select **P12**.
30. Select **Create** - this automatically downloads a file to your machine.
31. On the Private key saved to your computer window, enter a private key password.

What to do next

Integrating Virtual Agent with Google chat

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Integrating Virtual Agent with Google chat

Add the Virtual Agent bot to your ServiceNow instance to integrate with Google chat.

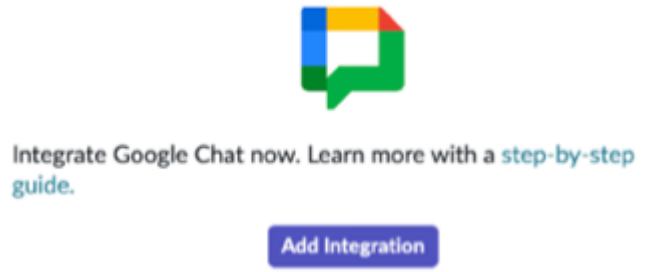
Before you begin

Ensure that you've installed the Google chat plugin [sn_va_google-chat] on your ServiceNow instance before adding any integrations.

Role required: admin

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Channels and Integrations**.
2. In the Available Channels section, select **Add Integration** on the Google chat



tile.

> **Note:**
> **Add Integrations** is available only after installing the Google chat plugin (sn_va_google-chat) on your ServiceNow instance.

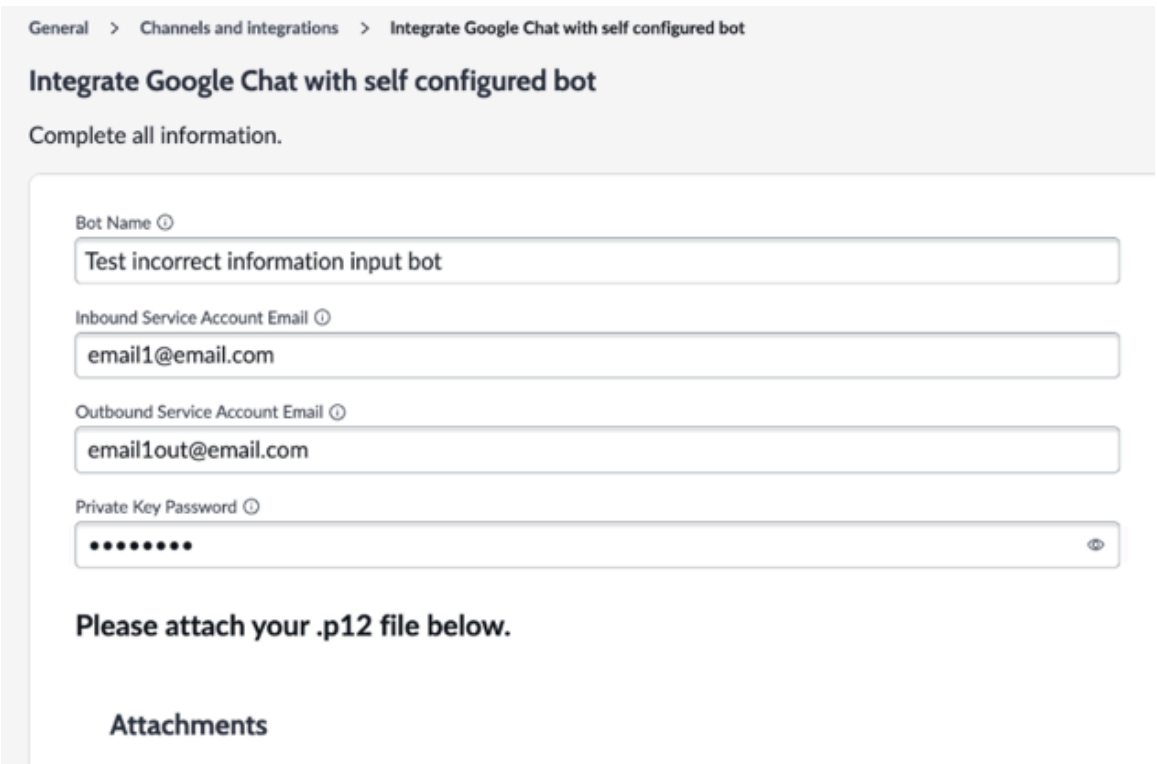3. On the Integrate Google chat with self configured bot screen, complete the information:



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Bot Name	Name for the bot.
Inbound Service Account Email	Enter the inbound service account email from Installing Conversational Integration with Google chat.
Outbound Service Account Email	Enter the outbound service account email from Installing Conversational Integration with Google chat.
Private Key Password	

4. In the Attachments section, drag or select your .p12 file.
5. Select **Submit**.
6. Navigate to Google chat.
7. Select **New Chat**.
8. Enter the app name and select it.
   If an automated welcome message displays in the chat window, you are all set to use Google chat with Virtual Agent.

Integrating Virtual Agent with IBM Watson Assistant

Set up the IBM Watson Assistant topic to run dialog skills (conversations created in IBM Watson Assistant) in the web-based chat client. This topic returns information exchanged during the virtual agent conversation to IBM Watson Assistant.

Before you begin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

- In IBM Watson Assistant:
  - Create the dialog skill (conversation) in your IBM Watson Assistant workspace. The skill includes the dialog and any intents and entities that you define.
  - Navigate to your skill tile and in the tile menu, select **View API Details**. View the Skill Details and Service Credentials. Copy the following items: **Skill ID**, **Workspace ID**, **Username**, and **Password**. You need these items when setting up this integration.
- Activate the IBM Watson Assistant Integration plugin (com.glide.cs.ibm.watson.assistant).

Role required: virtual_agent_admin or admin

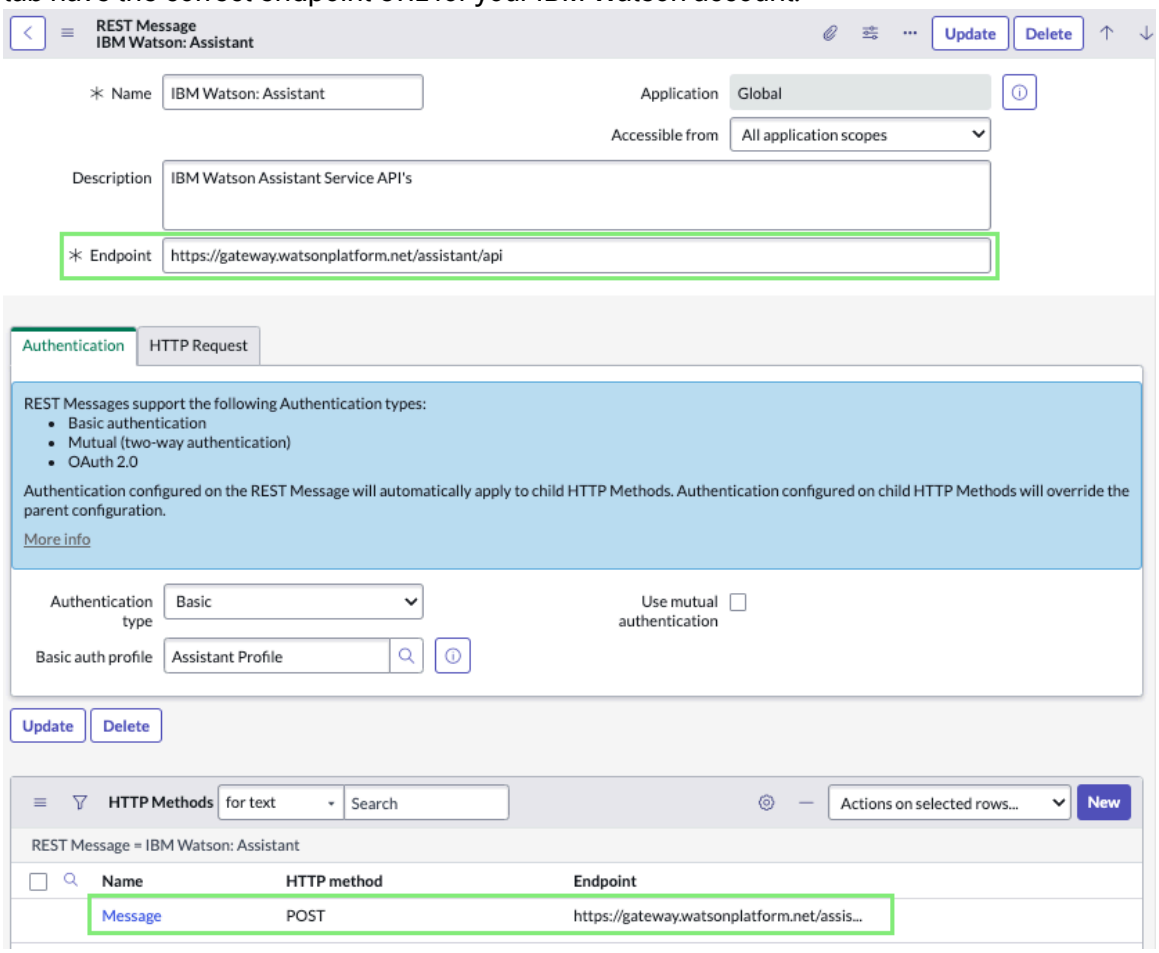
About this task

This topic runs an IBM Watson Assistant dialog in Virtual Agent. It doesn't require enabling Natural Language Understanding (NLU) or setting IBM Watson Assistant NLU as the NLU service provider for Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Procedure

1. In your ServiceNow instance, update the watson_assistant.workspaceID system property.
   a. In the navigation filter, enter `sys_properties.list`.
   b. In the System Properties [sys_properties] table, locate the watson_assistant.workspaceID property.
   c. Replace the existing **Value** with the **Workspace ID** for your skill, and select **Update**.
2. Verify that the REST message for IBM Watson Assistant provides the correct authentication endpoint for your IBM skill:
   a. Navigate to **System Web Services** > **Outbound** > **REST Message**.
   b. Select the IBM Watson Assistant record to open the REST Message IBM Watson Assistance form.
   c. Confirm that the **Endpoint** field and the **Endpoint** column displayed on the **Authentication** tab have the correct endpoint URL for your IBM Watson account.



3. In the **Basic auth profile** field on the **Authentication** tab, open the Assistant Profile record.
4. In the Basic Auth Configuration form, enter the **Username** and **Password** values from your IBM Watson Assistant Service Credentials, then select **Update**.

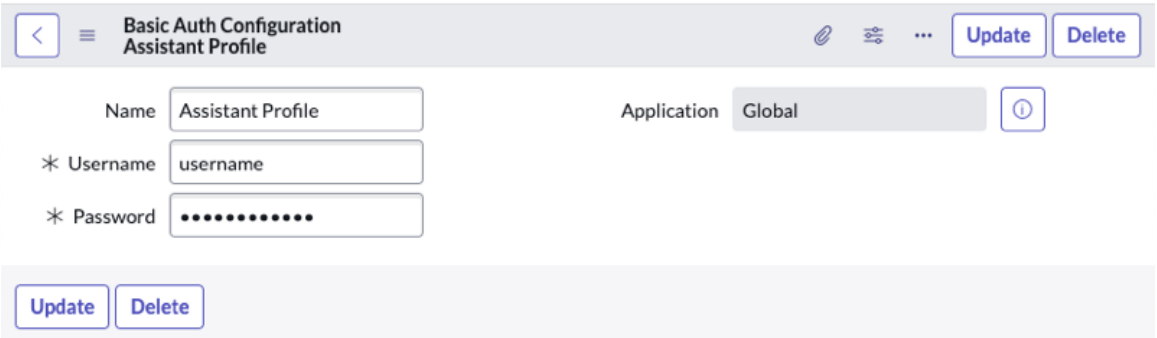© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



5. Publish the IBM Skill topic:

   a. Navigate to **Conversational Interfaces** > **Virtual Agent** > **Designer**, and then slide the discovery type toggle switch to **NLU/keyword**.

   b. On the Virtual Agent Designer home page, select the IBM Watson Assistant topic to open the Topic Properties page.
   Notice that the **Keyword** for this topic is IBM Watson Assistant and the **Category** is IBM.

   c. In the Topic Properties page, select **Publish** to deploy the topic to your Virtual Agent chat widget.

6. Configure the default topic for the Virtual Agent chat widget in one of the following ways:
   - Provide the URL that specifies the IBM Watson Assistant topic as the default topic that opens in the Service Portal client:

     For example: `https://<Your instance URL>$sn-va-web-client-app.do?sysparm_skip_load_history=true&sysparm_topic=<sys_id>` where *<sys_id>* is the sys_id of the published IBM Watson Assistant topic. The `sysparm_skip_load_history` parameter doesn't load the conversation history in the chat widget.

   - Configure the Service Portal widget by selecting the edit (pencil) icon in the upper right corner of the Virtual Agent widget.

     To set the default topic using the widget instance parameters, enter `sysparm_topic=sys_id` (where *<sys_id>* is the sys_id of the published IBM Watson Assistant topic) in the **Virtual Agent Client URL Parameters** field, and select **Save**.

     Note:
     You can find the sys_id of a topic in the Topics [sys_cs_topic] table.

Important:

Use the `sysparm_topic` parameter only to load the given topic in the Service Portal chat client or when using the IBM Watson Assistant chat integrations (com.glide.cs.ibm.watson.assistant.topic and com.glide.cs.ibm.watson.assistant.topicV2 plugins). This parameter doesn't allow users to start a new conversation or transfer to a live agent. It also disables the context menu and doesn't support other third-party chat clients.

Integrating Virtual Agent with IBM Watson Assistant for Assistant V2 API

Configure the IBM Watson Assistant Chat Integration to run a dialog skill (conversation) created in IBM Watson Assistant with the Assistant V2 API. The V2 API enables the Virtual Agent chat

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

widget to run a topic that uses Watson Assistant's intent disambiguation feature to improve topic discovery.

Before you begin

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

With the IBM Watson Assistant v2 API chat integration, the chat widget communicates with an assistant instead of with a workspace. Workspaces are referred to as dialog skills. For information on IBM Watson Assistant, see Migrating to the v2 API in the IBM Watson Assistant documentation.

Role required: virtual_agent_admin or admin

About this task

This integration runs an IBM Watson Assistant dialog as a Virtual Agent topic in the chat widget. It doesn't require enabling Natural Language Understanding (NLU) or setting IBM Watson Assistant NLU as the NLU service provider for Virtual Agent.

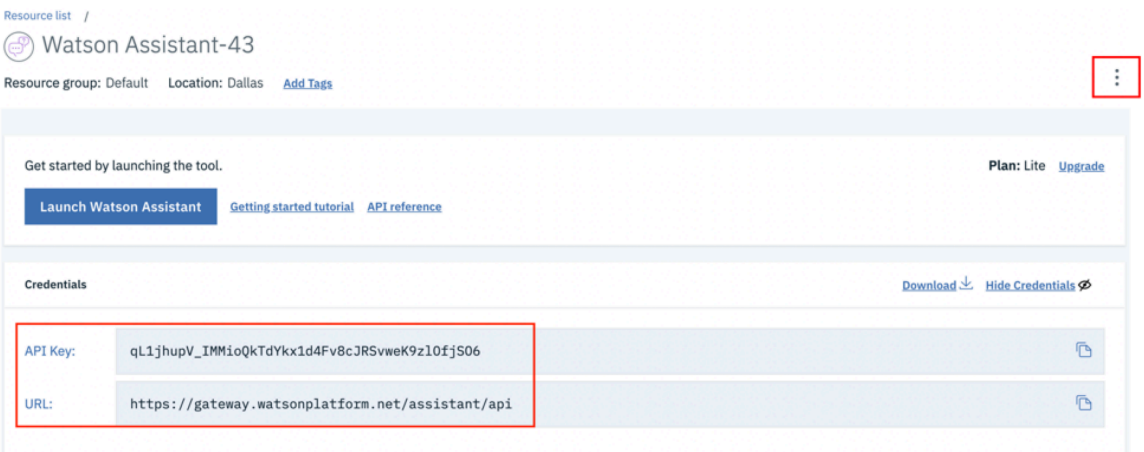
The IBM Watson Assistant V2 API enables the chat widget to use the Watson Assistant intent disambiguation feature, which can potentially reduce false-positive intent predictions. If a user's utterance is ambiguous, IBM Watson Assistant suggests additional intents that might better match the user's true intention. For example, if the user utterance is `restaurant`, IBM Watson Assistant can suggest other possible intents, such as `book a restaurant` or `restaurant reviews`.

Procedure

1. Configure IBM Watson Assistant.

   a. Create your assistant, then add a dialog skill.
   For details, see Creating an assistant in the IBM Watson Assistant documentation.


   b. On the Resource list page, locate and record your API key and URL, which you need to set up the chat integration:



   c. Select the three vertical dots icon and select **Settings**.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

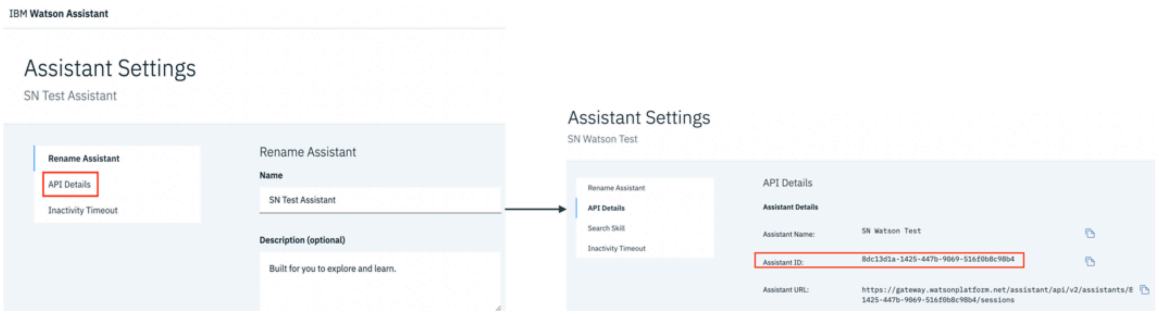- Select the **API Details** tab.
- On the Assistant Settings page, find the **Assistant ID** key.



2. Enable the disambiguation feature in IBM Watson Assistant (for premium and plus users only). You can enable (or disable) disambiguation for each skill, and also specify a disambiguation message and the number of suggestions to be displayed to the end user.

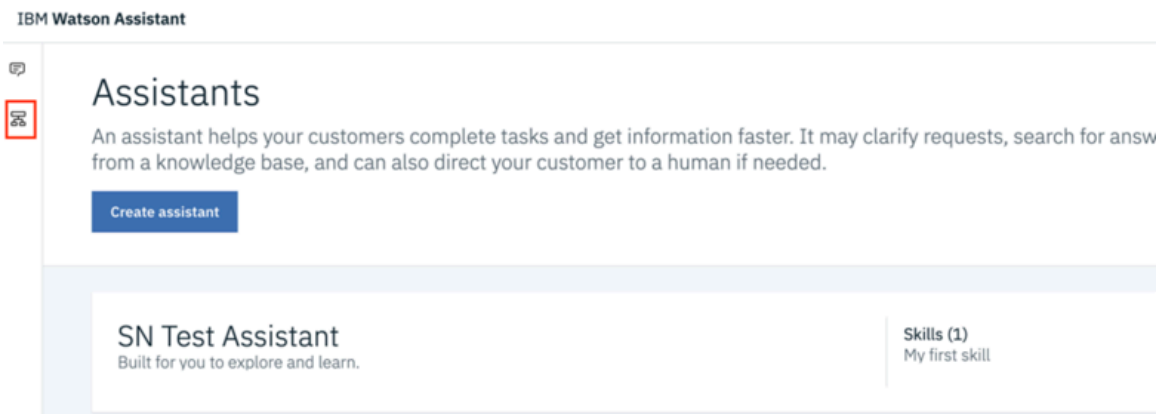
   a. Access your skill by selecting the skill tree icon in the panel.



   b. Navigate to **Options** > **Disambiguation** to enable disambiguation and set the disambiguation features.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

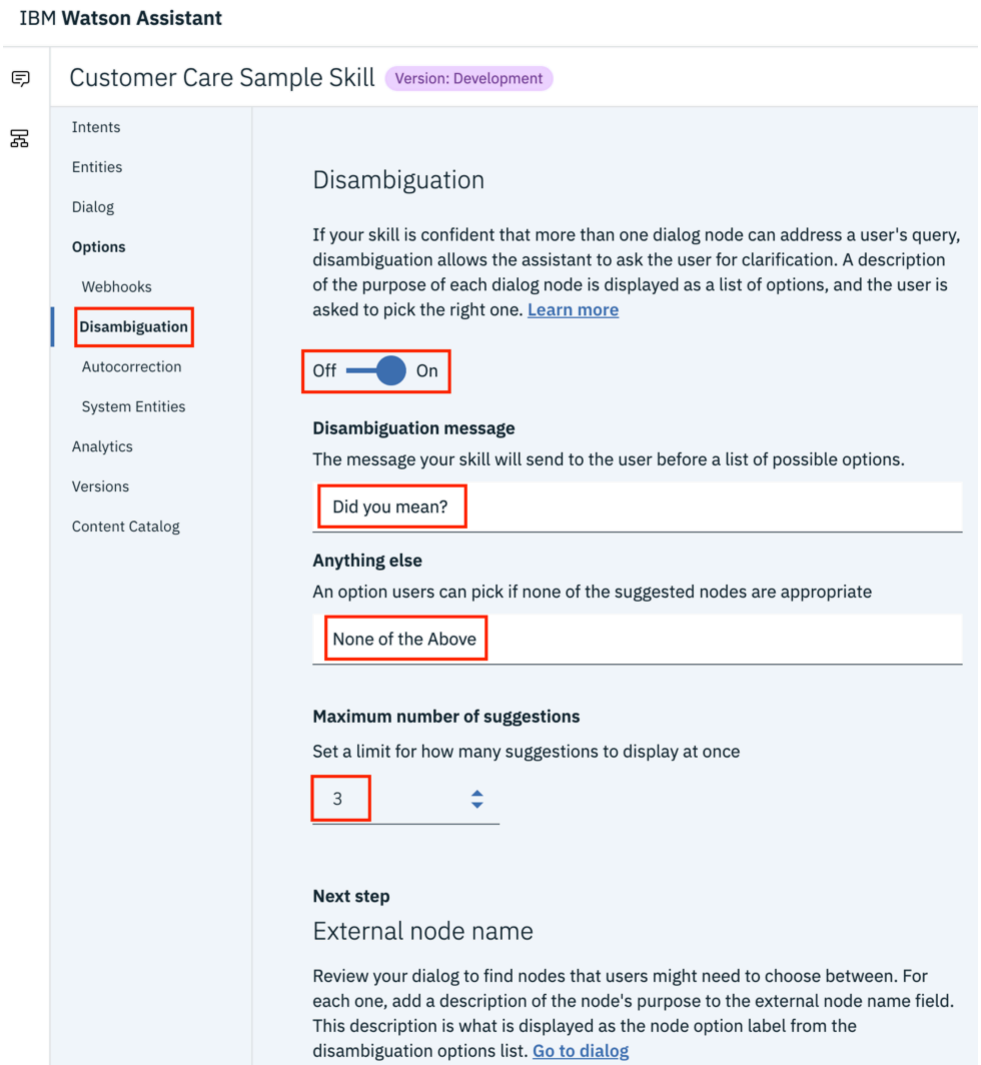The following example shows the disambiguation features that can be set, such as the disambiguation message and the number of suggested intents to be displayed to the end user.



3. Navigate to **Dialog**, select a node to which the disambiguation feature will apply, and provide a summary of the node that will be displayed to users if it's one of the intent suggestions.

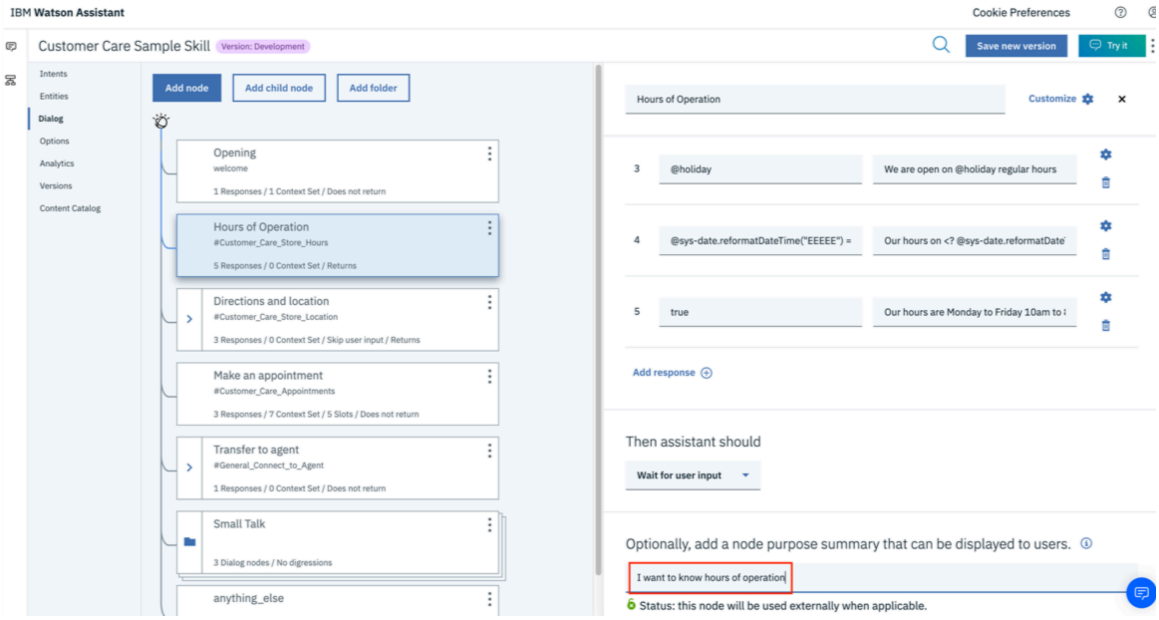© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



4. In your ServiceNow instance, activate these plugins:
   - Glide Virtual Agent (com.glide.cs.chatbot), if not already activated (requires a subscription)
   - IBM Watson Assistant Integration V2 plugin (com.glide.cs.ibm.watson.assistant.topicV2)
5. In Virtual Agent Designer, publish the IBM Watson Assistant V2 topic:

   a. Navigate to **Conversational Interfaces** > **Virtual Agent** > **Designer** and select the **NLU/ keyword** toggle.**All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.

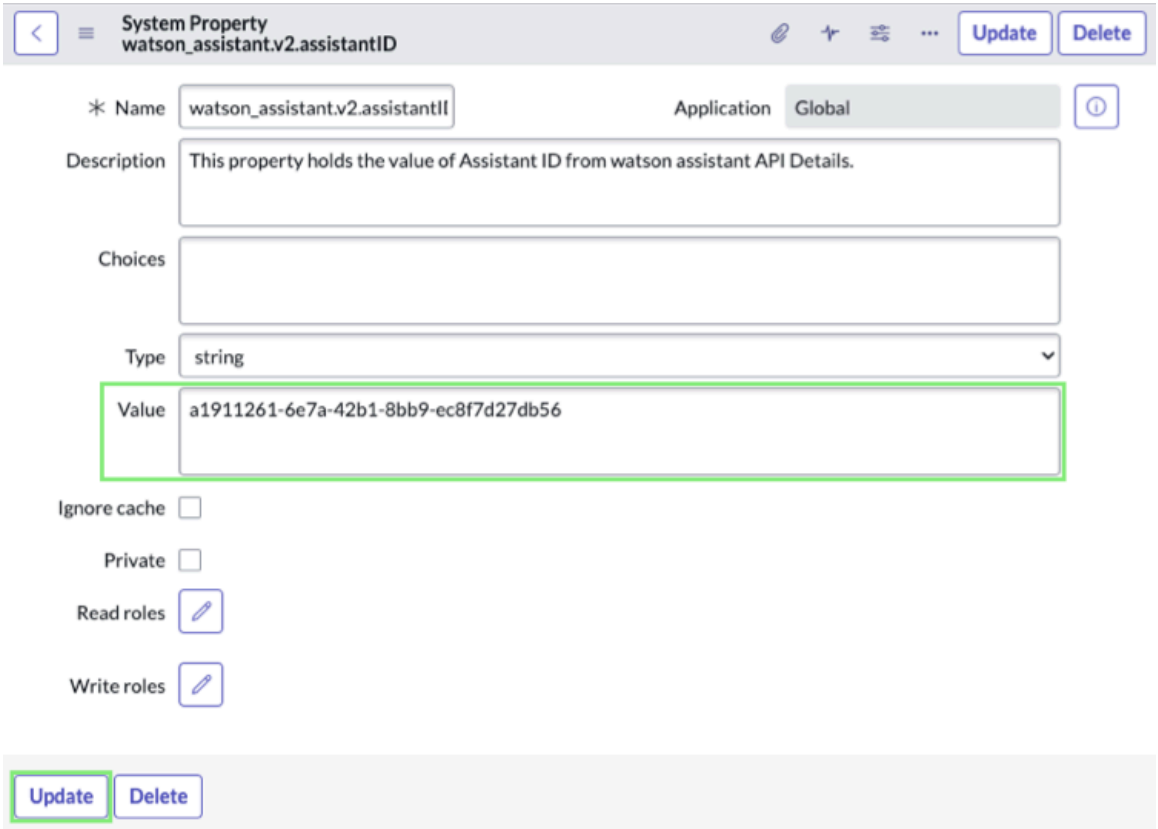
   b. In the Virtual Agent Designer home page, select the IBM Watson Assistant V2 topic to open the Topic Properties page.
   Notice that the **Keyword** for this topic is IBM Watson Assistant V2.

   c. In the Topic Properties page, select **Publish** to deploy the topic to your Virtual Agent chat widget.

6. Navigate to **All**, and then enter `sys_properties.list` in the filter.
7. Update the following properties.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- *watson_assistant.v2.assistantID* — In the **Value** field, enter the Watson Assistant ID for your assistant and select **Update**.



- *watson_assistant.v2.service_endpoint* — In the **Value** field, replace the existing value with your Watson Assistant URL and select **Update**.

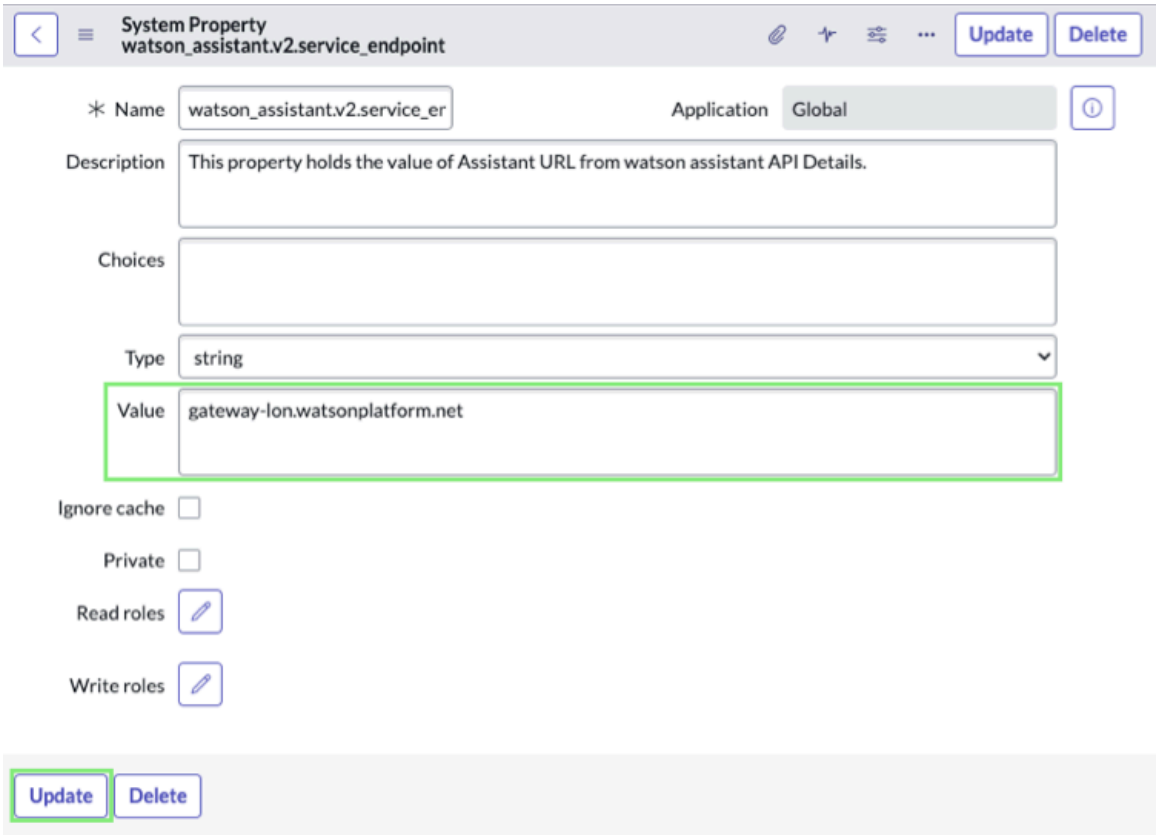© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Note:
You can specify just the location portion of the service instance URL in the **Value** field. For example, if the base URL for the IBM Watson service endpoint is https://gateway.watsonplatform.net/assistant/api, you can enter just the location of the service instance, `gateway.watsonplatform.net` in the **Value** field.

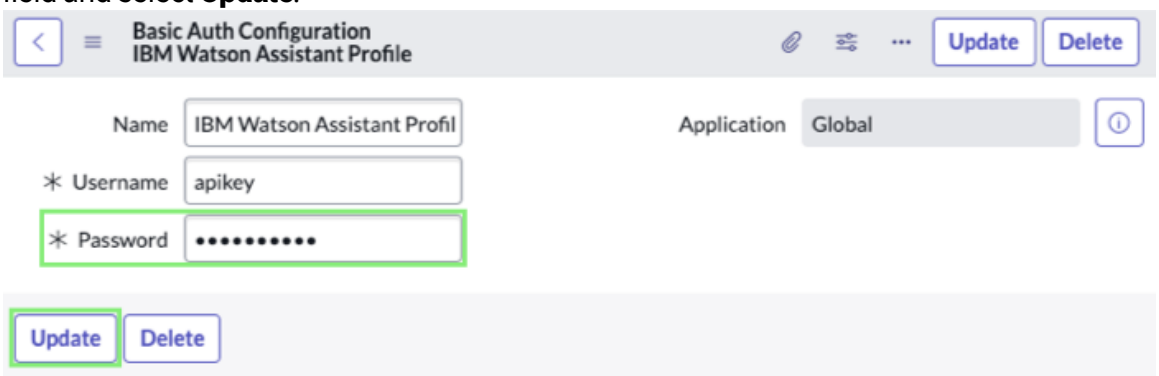
If your Watson Assistant is hosted in a data center other than Dallas, such as Washington DC, your base URL is https://gateway-wdc.watsonplatform.net/assistant/api. You would enter `gateway-wdc.watston.platform.net` in the **Value** field.

8. Set the Watson Assistant API key as the password in the IBM Watson Assistant Profile.

   a. Navigate to **All**, and then enter `sys_auth_profile_basic.list` in the filter.

   b. Open the IBM Watson Assistant Profile record.

   c. In the Basic Auth Configuration form, enter the Watson Assistant API key in the **Password** field and select **Update**.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

9. Add the Virtual Agent (web chat) client to the Service Portal.

   a. Navigate to **Service Portal** > **Service Portal Configuration**.

   b. Select **Designer**, and then select the **Service Portal** landing page.

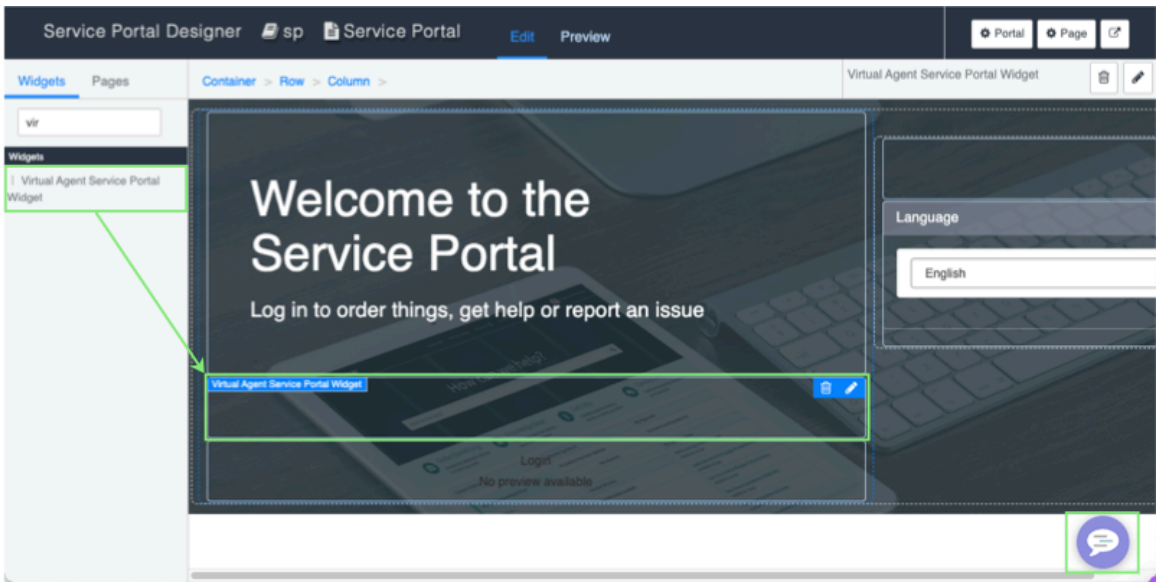   c. Search for the Virtual Agent widget and drag the widget into the outlined area.
   The purple chat icon appears in the bottom right corner.



10. Configure the Virtual Agent widget by selecting the edit icon in the upper right corner to set the URL parameters passed to the chat client and change the color of the floating chat button.

    a. In the **Virtual Agent Client URL Parameters** field, enter the *sysparm_skip_load_history=true* parameter so that the topic history doesn't display in the chat client and the *sysparm_topic* parameter with the sys_id of the published IBM Watson Assistant V2 topic to be run.
    You can find the sys_id of a topic in the Topics [sys_cs_topic] table.

    If you don't configure the instance behavior in Service Portal, you can specify your instance URL with the *sysparm_topic* and *sysparm_skip_load_history* parameters when you open the chat chat widget. For example: `https://<Your instance URL>$sn-va-web-client-app.do?sysparm_skip_load_history=true&sysparm_topic=<sys_id>` where *<sys_id>* is the sys_id of the published IBM Watson Assistant V2 topic to be run.

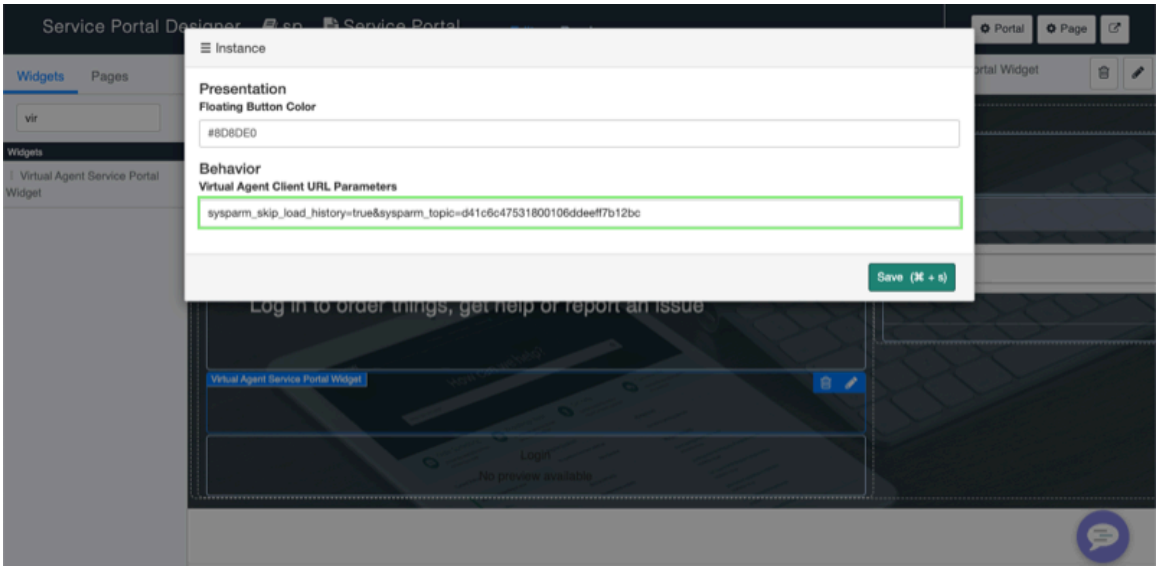
    Important:

    Use the `sysparm_topic` parameter only to load the given topic in the Service Portal chat client or when using the IBM Watson Assistant chat integrations (com.glide.cs.ibm.watson.assistant.topic and com.glide.cs.ibm.watson.assistant.topicV2 plugins). This parameter doesn't allow users to start a new conversation or transfer to a live agent. It also disables the context menu and doesn't support other third-party chat clients.

    b. To change the floating button color, enter the new color (RGB hex format) in the **Floating Button Color** field.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. Select **Save**.




11. Test that the disambiguation feature is working for your topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Be sure that disambiguation is enabled for your Watson Assistant skill and at least two dialog nodes. In the following example, the virtual agent provides four additional intents that the user can select.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

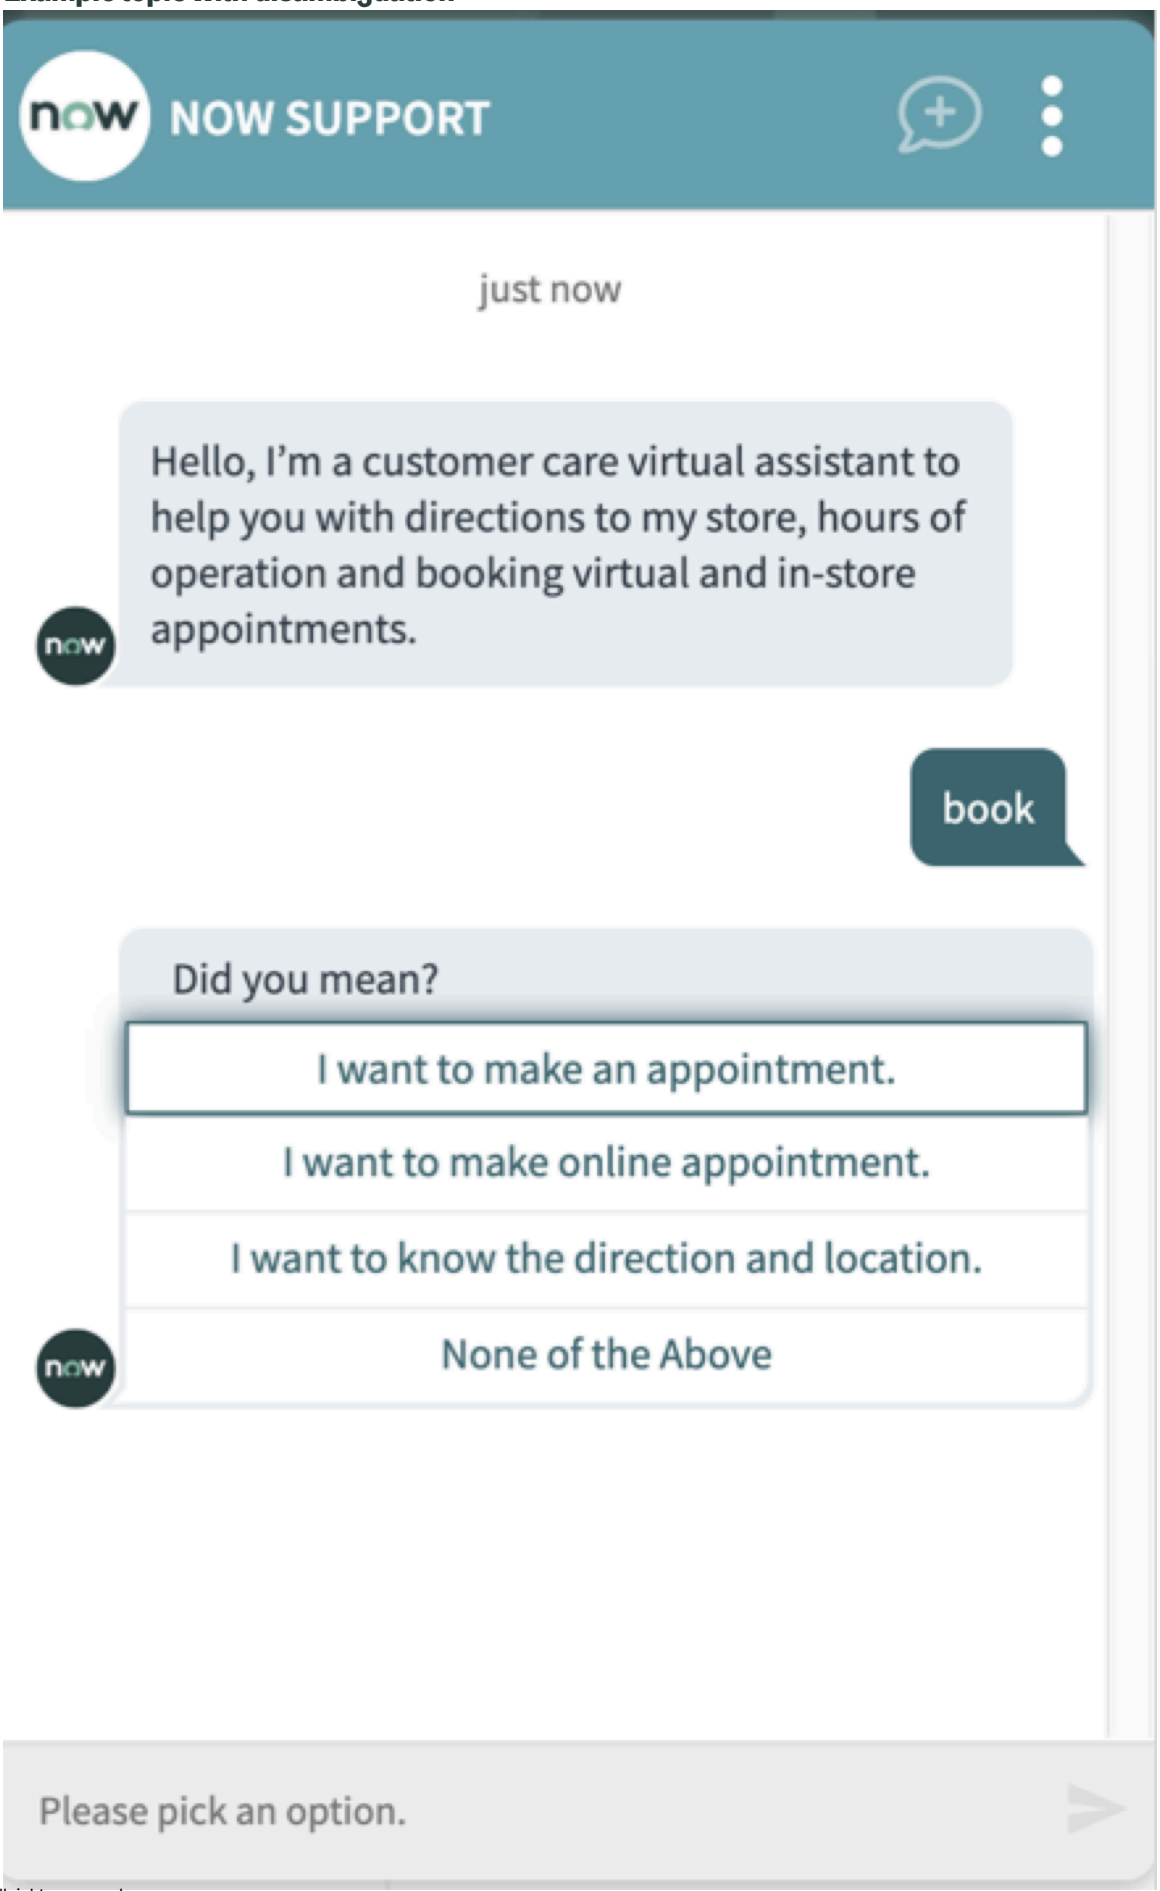Example topic with disambiguation



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Integrating Virtual Agent with LINE

Engage with requesters who prefer the LINE messaging app to interact with your business. Requesters include customer contacts and consumers.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Overview of Integrating Virtual Agent with LINE

Conduct user-initiated, system-initiated, or agent-initiated conversations using the Conversational Integration with LINE application. The application connects a requester with a virtual agent or live agent using your company's LINE account. To get started with the Conversational Integration with LINE application, see Configure Conversational Integration with LINE.

Configure Conversational Integration with LINE

Install and set up the Conversational Integration with LINE application to enable your users to interact with virtual and live agents.

Before you begin

Role required: admin

About this task

This task provides the general steps to integrate the LINE messaging app with a ServiceNow application using the Conversational Integration with LINE application.

Procedure

1. Install Conversational Integration with LINE.
2. Set up Conversational Integration with LINE.
3. Design virtual agent topics to capture information from a LINE chat conversation.
4. **Optional:** Close idle LINE chat conversations.
5. **Optional:** Transfer LINE chat conversations to live agents.

Install Conversational Integration with LINE

Install the Conversational Integration with LINE so that your business can interact with requesters on the LINE app. The application includes demo data and installs related ServiceNow Store applications and plugins if they are not already installed.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- For existing customers, ensure that you install the Conversational Integration with LINE application on ServiceNow instances that have been upgraded to at least the Rome release.

Role required: admin

About this task

The following applications or plugins are installed with Conversational Integration with LINE:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational Custom Chat Integration (com.glide.cs.custom.adapter)

Provides the custom chat integration framework of scriptable APIs to enable the Virtual Agent application on any conversational interface.

For more information on this plugin, see Creating conversational custom chat integrations in Virtual Agent.

ServiceNow IntegrationHub Runtime (com.glide.hub.integration.runtime)

Enables execution of Integration Hub actions and flows.

IHUB Spoke Util Pack (com.snc.ihub_spoke_util_pack)

Enables utility or global scripts that can be invoked from the Integration Spokes.

Agent-Initiated Messaging Interface (sn_agent_initiated)

Provides configurations for the agent-initiated messaging capabilities.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Conversational Integration with LINE application (sn_va_line) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. In the Application installation dialog box, review the application dependencies.

   Dependent plugins and applications are listed if they will be installed, are currently installed, or need to be installed. If any plugins or applications need to be installed, you must install them before you can install Conversational Integration with LINE.
4. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
5. Select **Install**.

Set up Conversational Integration with LINE

Set up the Conversational Integration with LINE application so that you can engage customers in conversations with bots.

Before you begin

Before you begin, do the following:

- Get ServiceNow entitlements for the following products and applications:
  - Integration Hub
  - Conversational Integration with LINE

  For more information, see Get entitlement for a ServiceNow product or application.
- Install the following applications on your ServiceNow instance:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Integration Hub
- Conversational Integration with LINE

- Activate the IHUB Spoke Util Pack plugin (com.snc.ihub_spoke_util_pack). For more information, see Activate a plugin.
- Get a developer account in the LINE Developers console.

Role required: external_app_install_admin or va_admin

About this task

The LINE messaging app supports only one LINE channel for a ServiceNow instance. If you would like to configure a different LINE channel for your ServiceNow instance, you must first remove the previously configured LINE channel, and then set up the new channel.

Procedure

1. Connect your company's LINE account with your ServiceNow instance.
   a. Log in to your LINE Developers Console.
   b. Create a channel on the LINE Developers Console.
   c. Take note of the channel secret and the channel access token.
   You will use later use this information for authenticating the LINE account on your ServiceNow instance.
   d. To enable your LINE account to send data to your ServiceNow instance, enter the webhook URL and click **Verify**
   You specify the webhook URL in the **Webhook URL** field on the Messaging API tab of the LINE Developers Console. Use the following format for the URL: `https://<instance-name>.service-now.com/api/sn_va_line/va_adapter_line`.
2. On your ServiceNow® instance, go to **All** > **Conversational Interfaces** > **Channels and Integrations**.
3. On the LINE integration section, click **Manage**.
   The Line Channel integration page opens.
4. Click the three dots on the right hand side and choose **Edit Integration**.
5. On the form, update the name of the bot if desired.
6. Enter the channel secret and the access token from your LINE account.
7. Click **Submit**.
   A success message displays confirming the integration with the LINE app.

Capturing information from a user in a LINE chat conversation

Use the collection of input controls provided by the Virtual Agent Designer to prompt and capture information from the user in a LINE chat conversation.

Virtual Agent Designer is a diagram tool for creating and managing topics, which are blueprints for conversations between a virtual agent and user. For more information, see Using Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User notification consent

Users must opt in to receive notifications. No notifications can be delivered until the user grants consent.

There are two ways for users to grant consent to receive notifications:

- The user can enter `Notification` into the LINE chat with your business. The user gets a bot response with the option to subscribe or unsubscribe from receiving notifications for your business on LINE.
- As an administrator, you can set up the option for users to subscribe or unsubscribe from notifications from your portal. See Subscription-based notifications for more information.

User input controls

The Conversational Integration with LINE application supports the following user input controls in Virtual Agent Designer.

Supported user input controls

User input control	Description
Text	User enters a plain text string in the conversation. The maximum character limit is 5000 characters.
Static Choice	User selects an item from a predefined list. In a quick reply, the label has the maximum character limit of 20 characters. At a time, a user can view only 13 quick replies. If there are more than 13 quick replies, the pagination format is used to view more options. The default value of the maximum number of replies for a page is set in the *sn_va_line.max.picker.choices* system property. The property is located in the System Property [sys_properties] table.
Boolean	User enters a Boolean response to the bot. For example, the user can reply `Yes` or `No` in a chat conversation.
File Picker	User sends a file to the bot. The supported file types are JPG, PNG, BMP, and MP4. Files have a maximum size limit based on file type: • For images, the maximum size limit is 10 MB. • For videos, the maximum size limit is 200 MB.
Date Time	User selects a calendar date, time (hours and minutes), or both.
Carousel	User selects a single item from the carousel. In a carousel, the title for an image has a maximum limit of 40 characters and the text for the image has a maximum character limit of 60 characters. At a time, a user can view only 10 images. If there are more than 10 images, the pagination format is used to view more options. The default value of the maximum number of images in the carousel for a page is set in the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported user input controls (continued)

User input control	Description
	sn_va_line.max.carousel.cards system property. The property is located in the System Property [sys_properties] table.

For more information about configuring user input controls, see Virtual Agent Designer user input controls.

The Conversational Integration with LINE application supports the following bot responses in Virtual Agent Designer.

Supported bot responses

Bot response	Description
Text	Bot sends a plain text string to the user.
Image	Bot sends an image to the user.
Link	Bot sends a web link to the user.
Web UI image card output	Bot sends content from a record in a compact format, including an image with text.
Table	Bot response is displayed as a table.

For more information about configuring bot responses, see Virtual Agent Designer bot responses.

Closing idle LINE chat conversations

Enable agents to effectively manage their active LINE chat conversations by automatically closing conversations after they have been inactive for a pre-configured amount of time.

The Virtual Agent conversations are configured for the LINE messaging app. By default, any conversations abandoned by requesters remain open or idle until they are automatically closed daily by the *Time Out Abandoned VA Conversations* scheduled job. For more information, see Closing Virtual Agent and Agent Chat conversations.

As an administrator, you can change the default timeout period for idle Virtual Agent conversations configured for the LINE messaging app by setting the *com.glide.cs.line_idle_timeout* system property to the number of seconds that abandoned conversations remain open after the requester's last response. The system property value must be less than the time interval set for the *Time Out Abandoned VA Conversations* scheduled job, set to two hours (7200 seconds) by default. Because the *com.glide.cs.line_idle_timeout* system property isn't available by default, you must add it with the data type set to integer. For more information, see Add a system property.

Transfer LINE chat conversations to live agents

Configure the Advanced Work Assignment application to transfer a LINE chat conversation initiated by a requester (customer contact or consumer) to a live agent.

Before you begin

Your administrator must have completed the following tasks:

- Activate Advanced Work Assignment.
- Install Conversational Integration with LINE.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Set the application scope to Conversational Integration with LINE using the application picker. For more information, see Application picker.
- Activate the Conversational Messaging plugin (com.glide.messaging.awa). For more information, see Activate Conversational Messaging.

Role required: admin

About this task

Procedure

1. Enable the Line service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Service Channels**.
   b. In the **Name** column of the Queues list, search for `Line`.
   c. Select **Line**.
   d. On the Service Channel form, select the **Active** check box.
   e. Select **Update**.
   For more information, see Service channels.
2. Automatically route work items for LINE chat conversations to agents by configuring the queue for the Line service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Queues**.
   b. In the **Name** column of the Queues list, search for `Agent Line Queue`.
   c. Select **Agent Line Queue**.
   d. On the Queue form, select the **Active** check box.
   e. Select **Update**.

   Note:
   By default, the *`Line - Most Capacity`* assignment rule is associated with the Agent Line Queue. You can create another assignment rule and associate it with the queue. For more information, see Configure agent assignment rules and Work item queues.

3. Configure agent presence states for the Line service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Presence States**.
   b. In the **Name** column of the Presence States list, select an existing state.
   c. On the Presence State form, in the Service channels section, select the add icon > to move the Line service channel from the Available column to the Selected column.
   d. In the Apply to groups section of the Presence State form, select the add icon > to move the Agent Line Group group from the Available column to the Selected column.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
You can ignore this step if you have selected the **Apply to all groups** check box.

e. Select **Update**.

For more information, see Configure agent presence states.

Using Conversational Integration with LINE

Enable a requester to converse with an agent using the LINE chat conversations.

An administrator can configure the Conversational Integration with LINE application for integrating the LINE messaging app with a ServiceNow application. For more information, see Integrating the LINE messaging app with other applications.

The following options are available:

- An administrator can configure system-initiated messages to be delivered as LINE chat conversations.
- A live agent can initiate LINE chat conversations with a requester.
- A requester can initiate LINE chat conversations with a virtual agent or live agent.
- A live agent can accept LINE chat conversations as work items from their Agent Workspace Inbox to converse with a requester.

Initiating LINE chat conversations

As a live agent, you can initiate LINE chat conversations with a requester in two ways:

- Send a message from either an active interaction record, a contact record, or a consumer contact record.
- Set up notifications to be sent to the requester when a business event occurs or when a record is updated. See Create a provider notification.

Note:
The requester must subscribe and opt in to receive notifications.

Accepting LINE chat conversations

As a live agent interacting with a requester over the LINE service channel, you can do the following:

- Converse with the requester through text messages.
- Share a knowledge article displayed as a link to the requester.
- Share a record, for example, a customer service case.
- Share any URLs as links.
- Share any files as attachments.

Note:
If an administrator has configured the Line service channel for transfer of chat conversations, then you can accept a work item from the LINE chat conversation in your Agent Workspace Inbox. For more information, see Transfer LINE chat conversations to live agents and Service channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Integrating the LINE messaging app with other applications

Other ServiceNow applications and features can use the Conversational Integration with LINE application.

As an administrator, you can use the Conversational Integration with LINE application to integrate the LINE messaging app with other ServiceNow applications. You can enable requesters and agents to converse with an agent using the LINE messaging app.

Integrating with Customer Service Management

Integrate the Conversational Integration with LINE application with the ServiceNow® Customer Service Management application to enable your customer contacts and consumers to initiate a LINE chat conversation with a virtual agent or live agent. An agent can initiate a conversation, or accept a conversation initiated from a LINE chat conversation. For more information, see Integrate LINE with Customer Service Management.

Remove Conversational Integration with LINE

Users can remove the Conversational Integration with LINE application when the app is no longer needed.

Before you begin

Role required: admin

Procedure

1. Go to **All** > **Conversational Interfaces** > **Channels and Integrations**.
2. On the LINE integration section, click **Manage**.
   The Line Channel integration page opens.
3. Click the three dots on the right hand side and choose **Remove Integration**.
   A confirmation message displays.
4. Click **Remove**.
   The Facebook Messenger application and all of its data is removed.

Integrating Virtual Agent with Microsoft Teams

Enable requesters to chat with Microsoft Teams or live agents using the Microsoft Teams application. Use the Conversational Integration with Microsoft Teams app, available from the ServiceNow Store, to associate your instance with Microsoft Teams.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

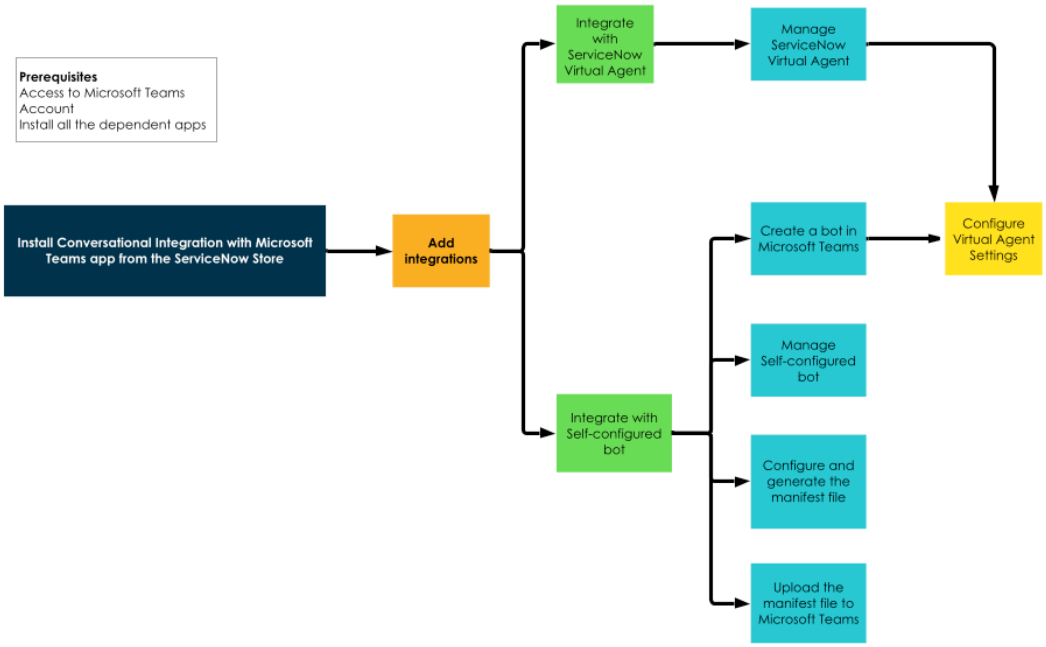
Use the Conversational Integration with Microsoft Teams application to connect your end users with Virtual Agent or live agents through your company's Microsoft Teams account. To get started, see Install Conversational Integration with Microsoft Teams.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

- If your instance is in our GovtCommunityCloud (GCC) environment, see to Integrating Virtual Agent with Microsoft Teams using the self-configured bot for more information.
- If your instance is in our Australia SPP (ServiceNow Protected Platform) environment, see Enable Microsoft Teams integration in ServiceNow Protected Platform (SPP) for more information.
- The Microsoft Teams Graph spoke consumes Integration Hub transactions, thus, usage of Virtual Agent in Microsoft Teams does count against Integration Hub transactions. Microsoft is also monetizing Microsoft Teams API usage, therefore such usage will also count against their Microsoft 365 subscription. For further information, see Sidebar and Microsoft Teams.

Workflow of Conversational Integration with Microsoft Teams



Integrating ServiceNow Virtual Agent with Microsoft Teams

Enables ServiceNow Virtual Agent to integrate with Microsoft Teams application.

Install Conversational Integration with Microsoft Teams

You can install the Microsoft Teams (sn_va_teams) application to integrate with Now Virtual Agent if you have the admin role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

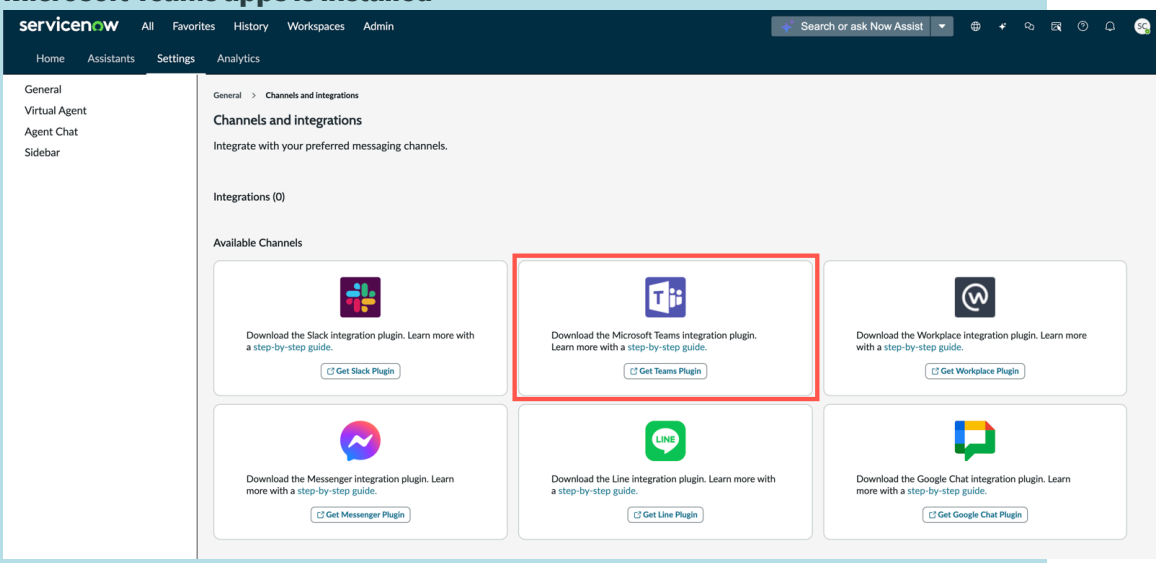
- Roles required:
  - virtual_agent_admin and external_app_install_admin or admin.
  - Microsoft Teams administrator (one of the following): Global administrator, Application administrator, or Cloud Application administrator.

    Note:
    These aren't necessarily required. Microsoft allows non-admin users to give consent to some or all requested permissions. Granting non-admin consent is not recommended, as this may cause unexpected behavior in the Now Now Virtual Agent application. Please review your user consent policies by consulting: https://learn.microsoft.com/en-us/entra/identity/enterprise-apps/configure-user-consent?pivots=portal

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- If you're using an earlier release of Virtual Agent, you must upgrade to the 2023, February store release to use the features supported in this channel integration.
- Conversational Integration with Microsoft Teams requires the Glide Virtual Agent plugin (com.glide.cs.chatbot) to activate full functionality in Virtual Agent or the Virtual Agent Lite plugin (com.glide.cs.chatbot.lite) to activate a limited version of Virtual Agent. Activate the appropriate plugin before you install the integration.
- Install the Conversational Integration with Microsoft Teams app from the ServiceNow® Store.

Important:
Installing the Conversational Integration with Microsoft Teams app from the ServiceNow Store activates the app for integration on your ServiceNow instance. If you have not installed the integration app, the Microsoft Teams app is listed in the Available Channels section.

Channels and integrations page before Conversational Integration with Microsoft Teams apps is installed



After you install the Conversational Integration with Microsoft Teams app, Microsoft Teams is seen in the Integrations section, and you can proceed with the configuration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Review these guidelines for using Virtual Agent with Microsoft Teams.

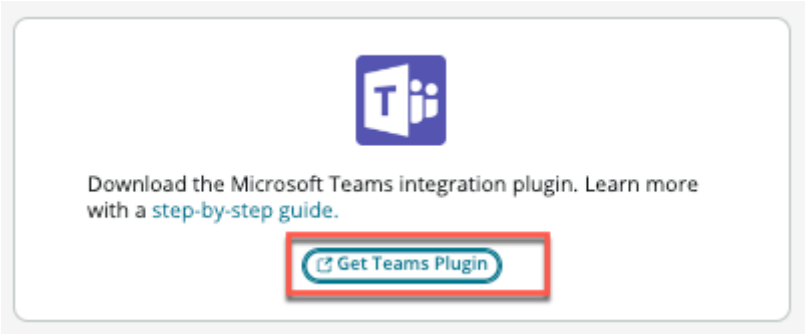
- The Microsoft Teams app creates a one-to-one association between the ServiceNow instance that you're installing from and the Microsoft Teams tenant in which the integration runs.

  Use a separate Microsoft Teams tenant for each instance that you plan to install the integration in. If you plan to test with a non-production instance and clone the instance, be sure to run the configuration steps again on the clone target to associate the bot to the new instance. Running the steps again disassociates the integration between the original non-production instance and the tenant.

- The Microsoft Teams app doesn't support the Microsoft Teams premium account, which enables user email accounts other than Microsoft Office 365 accounts.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Channels and integrations**.
2. On the Channels and integrations page, in the Microsoft Teams card, select **Get Teams plugin**.



   You're redirected to the Conversational Integration with Microsoft Teams ServiceNow Store page.

3. Select **Get**.

   Note:
   You must be logged in to the ServiceNow Store portal to get the plugin.

4. On the Conversational Integration with Microsoft Teams ServiceNow Store page, select **Request Install**.
5. On the Request Install screen, provide the **Instance Name** and **Reason for request**.
   You can also validate the instance that you provided by selecting **Validate Instance**.
6. Select **Request**.
   A message pops up on the Request Install screen that your request has been auto-approved.

What to do next

Integrate ServiceNow Virtual Agent with Microsoft Teams.

Integrate ServiceNow Virtual Agent with Microsoft Teams

Add the Now Virtual Agent bot to your ServiceNow instance to integrate with Microsoft Teams.

Before you begin

Install the Conversational Integration with Microsoft Teams plugin (sn_va_teams) on your ServiceNow instance before adding any integrations.

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
This activity requires the Application Administrator or Global Administrator roles, but only to accept one-time permissions for the application on behalf of the customer.

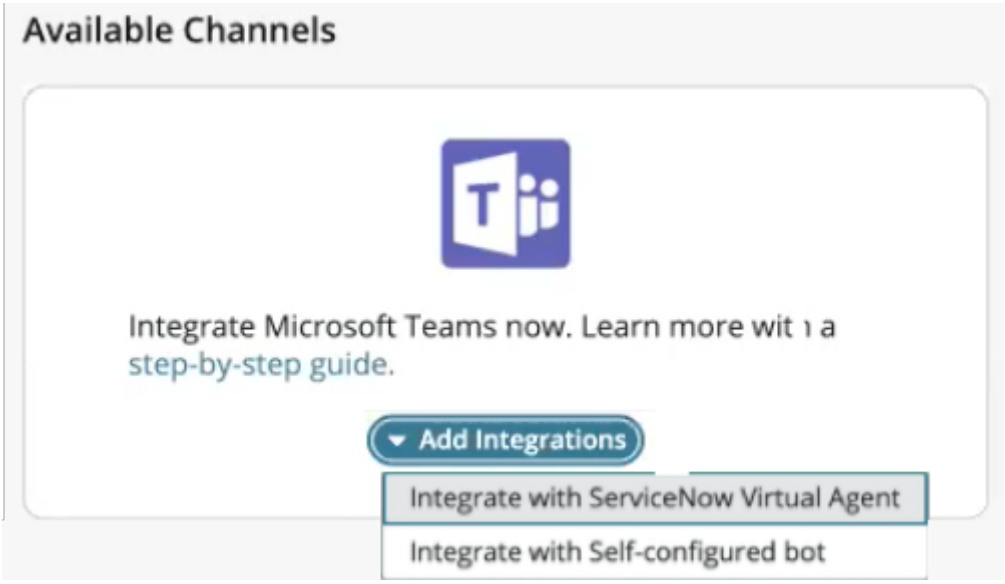
About this task

Any time you create and publish a bot, every user receives all changes you've made. If you create a self-configured bot, the configuration includes a snapshot of the Microsoft Teams integration. Only the changes you make are added when you download the manifest. Re-upload your manifest to push through the changes. You can then use the bot when you publish it in the Microsoft Teams store page. The store page describes how to use the Now Virtual Agent app. If you install the Now Virtual Agent production bot, it will stay up-to-date on all the changes you make.

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Channels and Integrations**.
2. Under All integrations in the Microsoft Teams tile, select **Add Integration**.

Note:
The **Add Integration** drop-down menu is available only after installing the Conversational Integration with Microsoft Teams plugin (sn_va_teams) on your ServiceNow instance.




3. From the **Add Integration** drop-down menu, select **Integrate with Now Virtual Agent**.
4. In the Microsoft Pick an account screen, select a Microsoft Teams account that you would like to use for the integration.

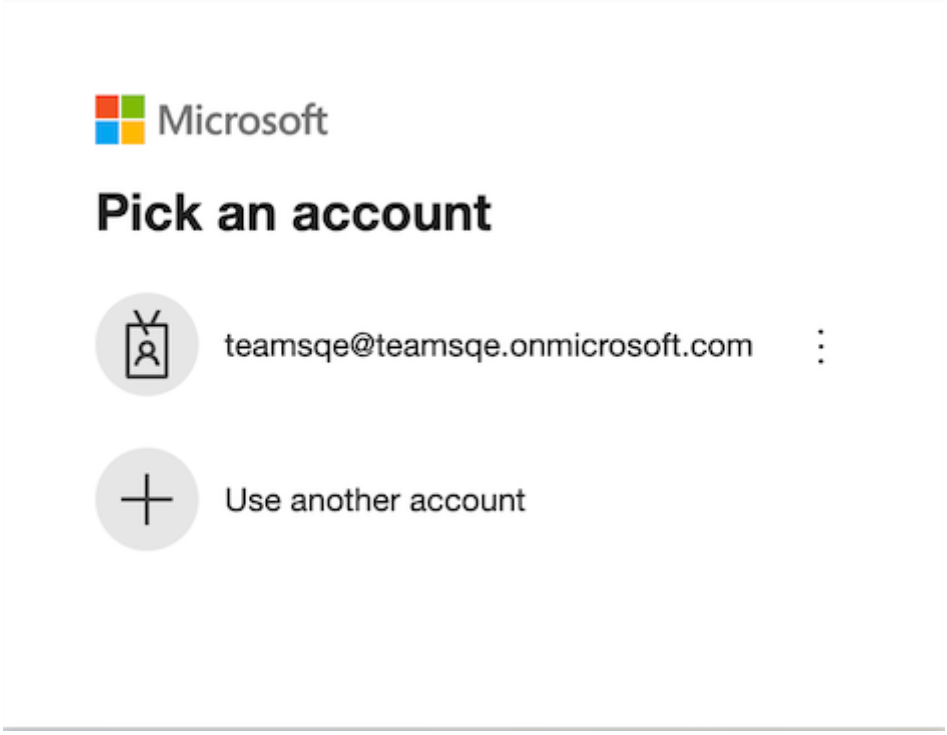© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



5. Log in to the selected Microsoft Teams account.
6. In the ServiceNow Virtual Agent screen, select **Accept** to accept the permissions for the app.

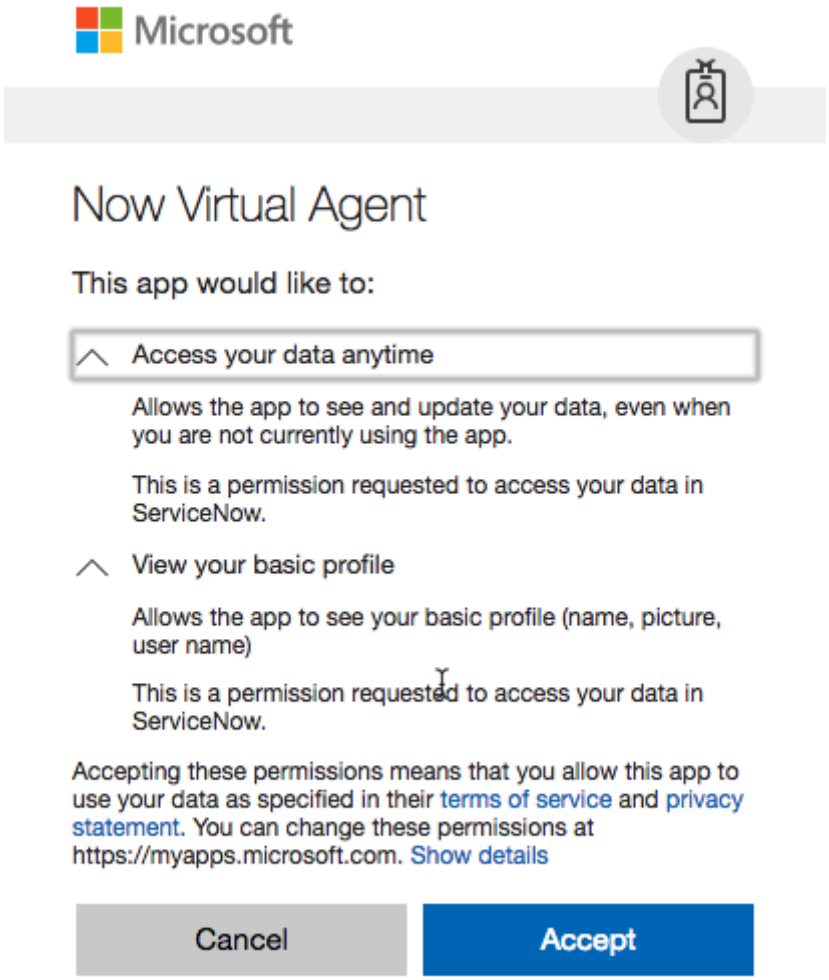
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




7. If the selected tenant has already been assigned to Virtual Agent, you must first uninstall from the previously associated instance.

Note:
Starting from Tokyo release, if your Microsoft Teams tenant is already associated with another ServiceNow instance. If you intend to associate it with a new instance, then you're asked to contact the administrator to first uninstall it from the previously associated instance. For more information, see Override Microsoft Teams integration.

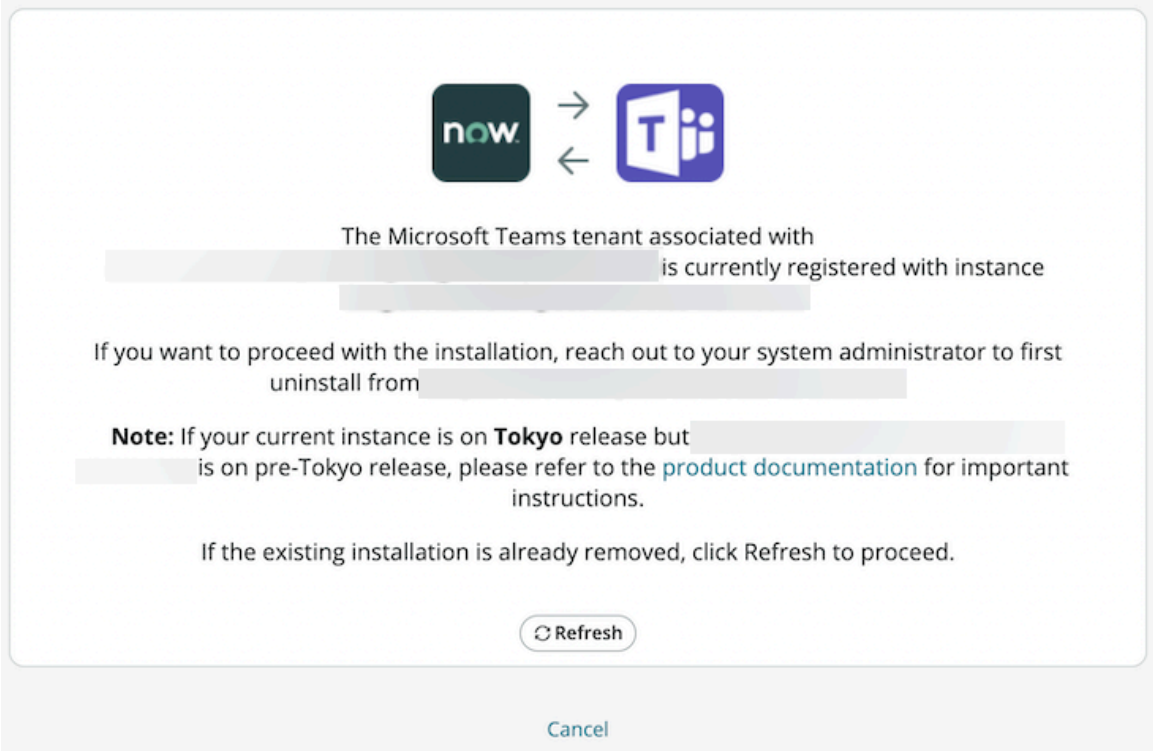© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



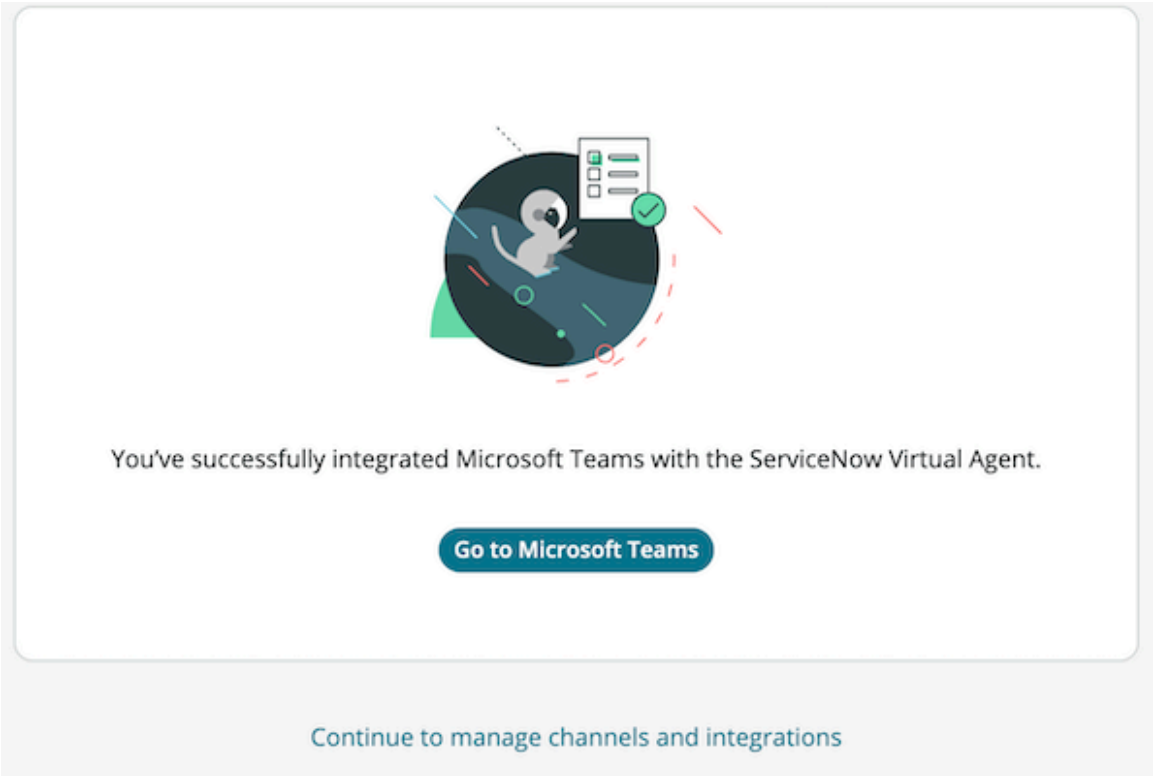Installation starts in the background. After the installation completes, a message confirms that you successfully installed the Now Virtual Agent integration for Microsoft Teams.




8. Select **Go to Microsoft Teams** to manage your Microsoft Teams app.
9. Select **Continue to manage channels and integrations** to manage the integration on your ServiceNow instance.

   The Microsoft Teams application appears in the list of integrations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next

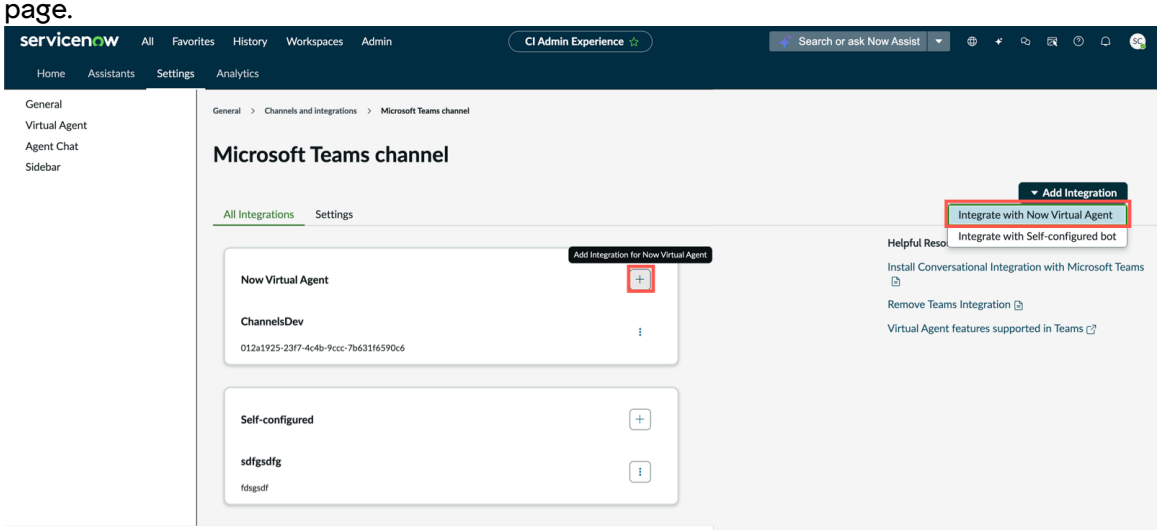If you would like to integrate your ServiceNow® instance with another Microsoft Teams bot, select the Add Integration for ServiceNow® Virtual Agent icon against the ServiceNow® Virtual Agent bot or select the **Add integration** drop-down menu on the Manage Microsoft Teams channel page.



.

For more information, see Manage the ServiceNow Virtual Agent integration with Microsoft Teams.

Override Microsoft Teams integration

Override Virtual Agent integration with Microsoft Teams.

Before you begin

Role required: admin or virtual_agent_admin

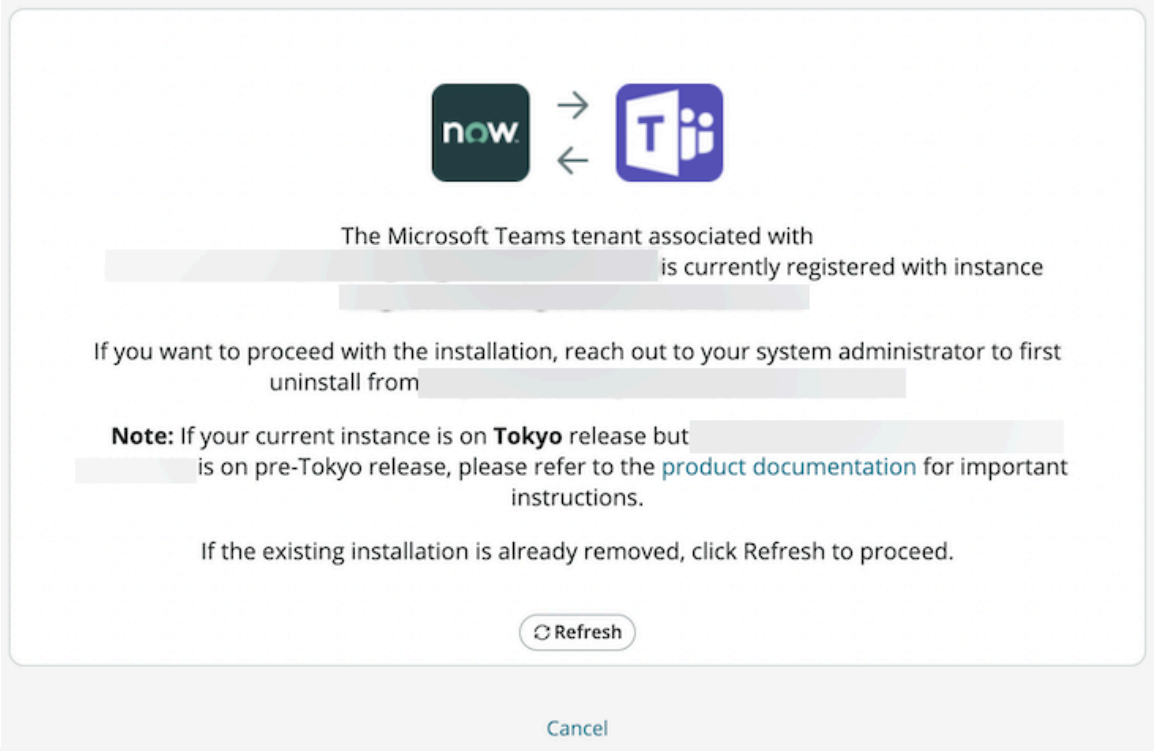
About this task

Before Tokyo release, an admin was able to override a Microsoft Teams installation that is associated with an instance with a different ServiceNow instance.

Starting from Tokyo release, if you intend to associate your Microsoft Teams tenant with a new ServiceNow instance, contact the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

administrator to uninstall the tenant from the previously associated instance.



Important:
The instructions in Remove Conversational Integration with Microsoft Teams are only applicable when both instances are compatible with Tokyo and following releases. If one of your ServiceNow instances is on the Tokyo release and another on a release prior to Tokyo, use the following steps.

Procedure

1. In the left navigation filter of your ServiceNow instance, enter `sys_properties.list`.
2. Search and open the *`sn_va_teams.enable_va_override`* system property.

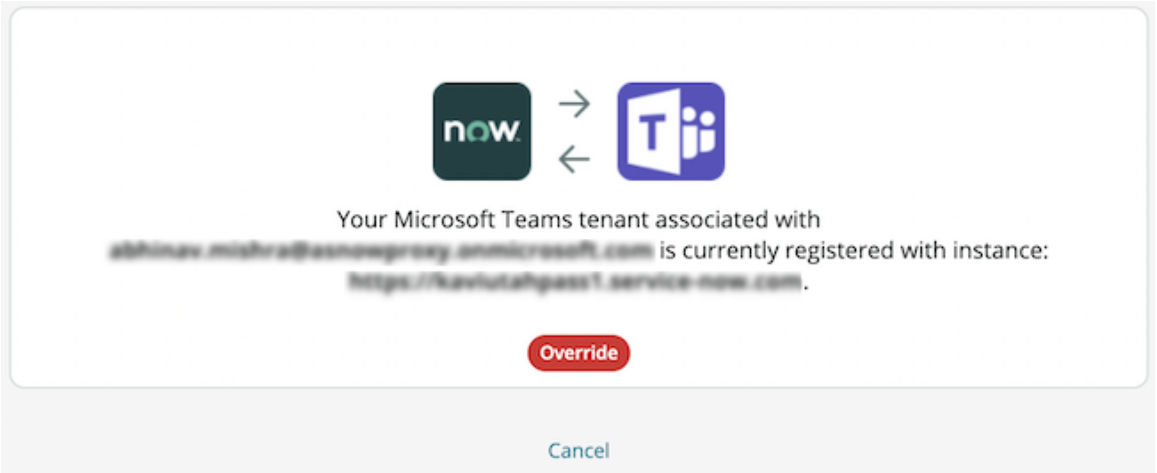
   Note:
   If you don't find this system property, you (as an admin) must create one.

3. Set the system property value to **true** to enable the **Override** button.

   Note:
   By default, the value of the system property is **false**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Select **Override** to associate the instance with a new tenant.



Manage the ServiceNow Virtual Agent integration with Microsoft Teams

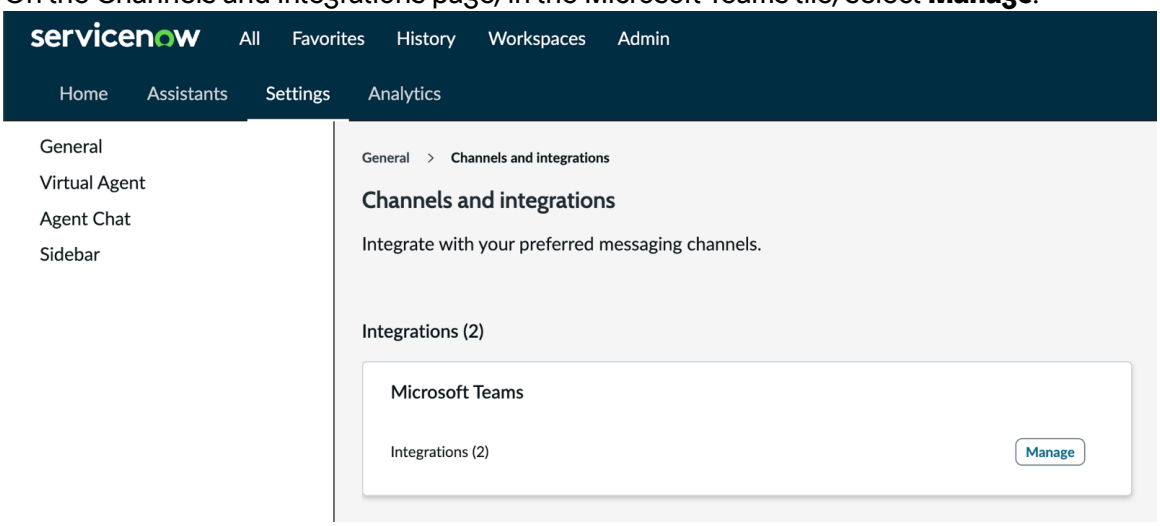
Manage your ServiceNow® Virtual Agent bot branding and customize the bot messages in your ServiceNow instance after integration with Microsoft Teams.

Before you begin

- Roles required:
  - virtual_agent_admin and external_app_install_admin or admin
  - Microsoft Teams administrator (one of the following): Global administrator, Application administrator, or Cloud application administrator

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
3. On the Channels and integrations page, in the Microsoft Teams tile, select **Manage**.



When you select **Manage**, you're redirected to the Manage Microsoft Teams channel page where you can manage the bots.

4. To integrate your ServiceNow instance with another Microsoft Teams bot, select the Add integration for ServiceNow Virtual Agent icon against the ServiceNow Virtual Agent bot or

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

select the **Add integration** drop-down on the top-right of the Manage Microsoft Teams channel page and select **Integrate with ServiceNow Virtual Agent**.

5. Select the Manage Bot icon and select **Manage Virtual Agent**.
   You're redirected to the Bot Configuration page for the selected bot.
6. Select the **Branding** tab to brand your Now Virtual Agent bot.
   For more information about branding your bot, see Configure branding for your ServiceNow Virtual Agent bot in Microsoft Teams.
7. Select the **Bot Messages** tab to create and edit a bot message.
   For more information, see Create bot messages.

Specialized Virtual Agent integrations for Microsoft Teams

The specialized Virtual Agent integrations for Microsoft Teams support different users as per their need.

- If both your environments are commercial, with `.com` as the suffix, follow both the self-configured and pre-published setup. instructions
- If your ServiceNow environment is `.us` and your Microsoft environment is `.com`, this is the GCC setup. Follow the self-configured bot setup instructions.
- If both your environments are `.us`, follow the GCC-H or DoD based instructions.

Integrating multiple ServiceNow instances with a single Microsoft Teams tenant

Enables ServiceNow® Virtual Agent to allow multiple ServiceNow instances to integrate with single Microsoft Teams tenant.

The Virtual Agent integration with Microsoft Teams creates a one-to-one association between the ServiceNow instance that you are installing from and the Microsoft Teams tenant in which the integration runs. By default, Virtual Agent supports one-select installation that integrates one Microsoft Teams tenant with one ServiceNow instance. By enabling this integration, Virtual Agent allows integrating multiple ServiceNow instances with a single Microsoft Teams tenant. You can integrate multiple ServiceNow instances with a single Microsoft Teams tenant by creating a bot for each of the instances on the Microsoft Teams tenant.

What to do next

1. Plugins for Conversational Integration with Microsoft Teams
2. Create a Bot in Microsoft Teams
3. Integrate your Self-configured bot with single Microsoft Teams tenant
4. Auto-generate the manifest file for uploading on Microsoft Teams
5. Upload the manifest package file to publish your bot

Create a Bot in Microsoft Teams

You must create a bot in Microsoft Teams to be able to integrate with the Virtual Agent.

Before you begin
Role required: Microsoft Teams admin, Global Administrator, or roles containing Application Administrator.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Login into Microsoft Teams and navigate to Developer Portal.
2. On the Developer Portal page, navigate to the **Tools** > **Bot Management**.
3. Select **Create a New bot** and provide a bot name of your choice and select **Add**.
4. Open the bot that you created and select the **Configure** tab.
5. Under Endpoint address, specify the following URL:
   For example: `https://<instancename>.service-now.com/api/now/v1/cs/adapter/msft/events`

   Note:
   Replace the <instancename> with the name of your ServiceNow instance where you are integrating with Microsoft Teams. In case of multi-instance single tenant integration, use the secondary ServiceNow instance for integrating with a bot on Microsoft Teams tenant.

6. Select **Save**.
7. Navigate to **Client secrets** and select **Add a client secret for your bot**.
8. Copy the value of the client secret from the **New client secret generated** pop-up for later use as it is displayed only during this step and select **OK**.
9. Navigate to **Developer Portal** > **Tools** > **Bot management** and copy the Bot ID of the bot you created.
10. Retrieve the following details of your bot in Microsoft Teams to integrate with Virtual Agent.

    - Tenant ID: Follow the instructions on Microsoft Teams documentation, to fetch the Tenant ID.
    - Client ID (App ID): Client ID is the Bot Id that you have copied as mentioned in Step 8.
    - Client Secret: It is the secret that you have copied as mentioned in Step 7.
    - Bot Name: The name of the bot that you entered in Step 3.
    - Select the **Single tenant** check box.

      Note:
      If you created your bot before October 2025, you don't need to select the **Single tenant** check box.

11. Press **Enter** to save.

What to do next

Integrate your Self-configured bot with single Microsoft Teams tenant.

Integrate your Self-configured bot with single Microsoft Teams tenant

Integrate multiple ServiceNow instances with a single Microsoft Teams tenant by creating multiple bots on the Microsoft Teams tenant. Use your ServiceNow Virtual Agent application, which supports multiple bots on a single Microsoft Teams tenant, to install Conversational Integration with Microsoft Teams application.

Before you begin

Role required: virtual_agent_admin or admin and Microsoft Teams Tenant admin

This installation requires a ServiceNow instance other than the one integrated with the production bot to integrate with one bot (of the multiple bots) on a single Microsoft Teams tenant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The ServiceNow instance that you will use to integrate with a single Microsoft Teams tenant must not be an instance that you have used for installing Conversational Integration with Microsoft Teams in the primary method where you can integrate only one ServiceNow instance with one tenant.

Ensure that you created a bot on the Microsoft Teams tenant for each ServiceNow instance to be integrated. For more information, see Create a Bot in Microsoft Teams.

Procedure

1. Fetch the Tenant ID, Client ID (App ID), Client Secret, and Bot Name details for your bot created in Microsoft Teams.
   For more information, see Retrieve bot details.

   Note:
   Use this information when setting up the bot in your ServiceNow instance.

2. As a ServiceNow admin, set up the bot on the ServiceNow instance in the global scope.

   Note:
   The virtual_agent_admin can install bots with multiple instances or bots apart from production in the ServiceNow instance and avail all the features of Virtual Agent and the flexibility to integrate one of the multiple ServiceNow instances with a bot on a single Microsoft Teams tenant.

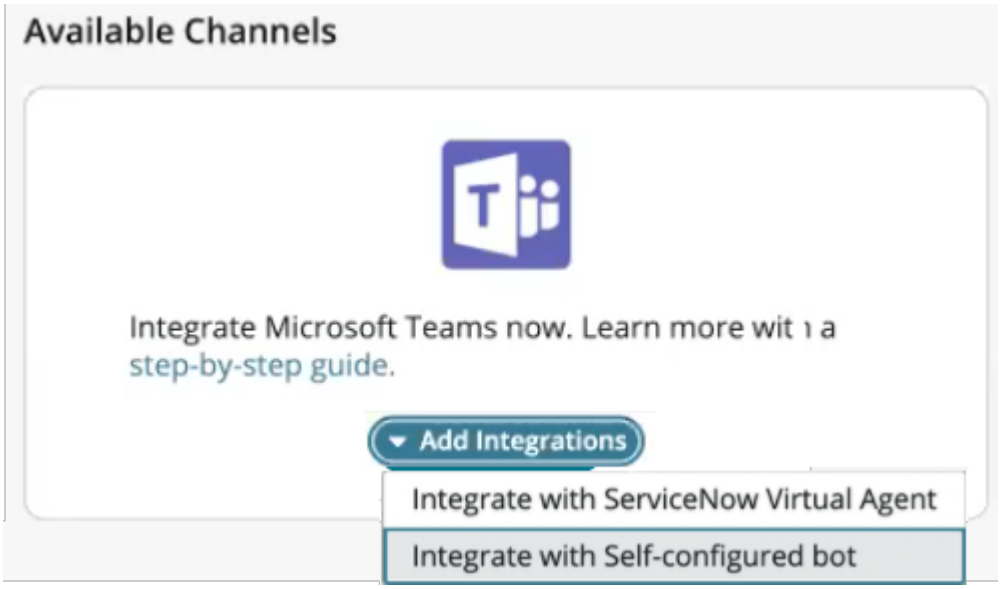
   a. Log in to your ServiceNow instance (secondary instance for integrating with a bot on single Microsoft Teams tenant) and navigate to **All** > **Conversational Interfaces** > **Channels and Integrations**.

   b. In **General Settings** under **Channels and integrations**, select **View All**.
   The Channels and integrations page opens.

   c. Under the Available Channels section in the Microsoft Teams tile, select **Add Integrations**.


   Note:
   The **Add Integrations** drop-down is available only after installing the Conversational Integration with Microsoft Teams plugin (sn_va_teams) on your ServiceNow instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



d. From the **Add Integrations** drop-down, select **Integrate with Self-configured bot**.

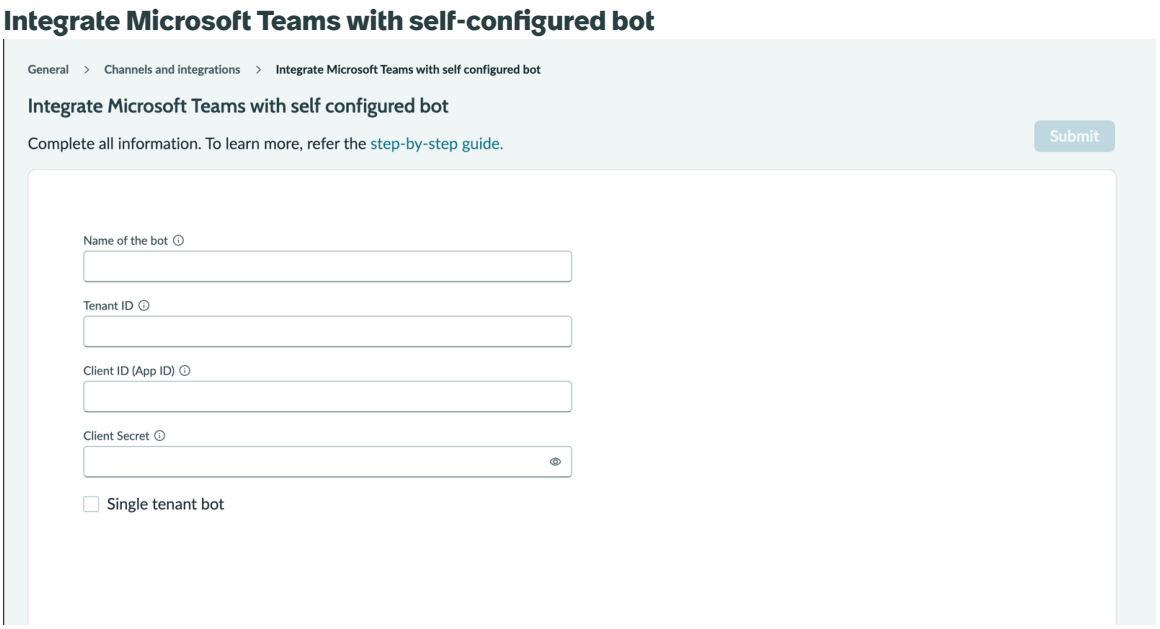
e. In the Integrate Microsoft Teams with self-configured bot page, enter the **Name of the bot**, **Tenant ID**, **Client ID (App ID)**, and **Client Secret** from creating the Microsoft Teams bot, and select the **Single tenant bot** check box before selecting **Submit**.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
For each additional bot to be integrated, repeat steps 1 and 2. If you created your bot before October 2025, you don't need to select the **Single tenant box** check box.

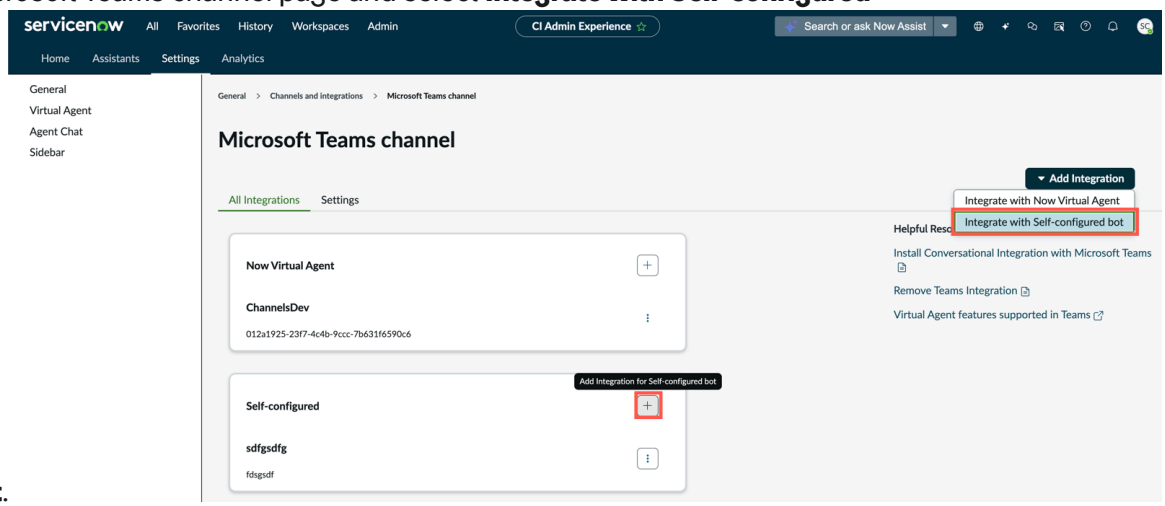If you would like to integrate your ServiceNow instance with another Microsoft Teams bot, select the Add integration for Self-configured bot icon against the Self-configured bot or select the **Add integration** drop-down on the Manage Microsoft Teams channel page and select **Integrate with Self-configured bot**.



User receives a message that the installation is successful.

What to do next

- Auto-generate the manifest file for uploading on Microsoft Teams.
- Upload the manifest package file to publish your bot

Integrating Virtual Agent with Microsoft Teams using the self-configured bot

You can integrate Virtual Agent with Microsoft Teams by configuring your own bots. The self-configured method provides another way for customers to enable the integration without installing the default Now Virtual Agent app that is published on the Microsoft Store. Unlike the pre-published app, the self-configured bot bypasses the collaboration proxy architecture.

The self-configured method offers a solution for the following cases:

- Commercial customers with a ServiceNow instance running far away from the United States who may be having issues using the collaboration proxy.
- ServiceNow Government Community Cloud (GCC) customers.

Note:
Microsoft Azure supports the bot framework in GCCHIGH and DOD (US Department of Defense). For more information about the bot framework support, see Integrating Virtual Agent with Microsoft Teams for GCC-H or DoD.

If you are a commercial customer who has already installed a pre-published bot but would like to integrate with multiple ServiceNow instances within a single Microsoft Teams tenant, see Integrate your Self-configured bot with single Microsoft Teams tenant.

Prerequisites

Before integrating Virtual Agent with your Microsoft Teams tenant, ensure that the following prerequisites are met:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Verify that your ServiceNow instances have been upgraded to the San Diego release.
- If you are a commercial user, verify that your Microsoft 365 is on the commercial environment. If you are a regulated market user, verify that your Microsoft 365 is on the GCC environment.
- You have not attempted previous installations of the Conversational Integration with Microsoft Teams in your instances.

  If you previously tried to install the integration in Quebec and the above releases, refer to this Knowledge Base article to remove the residual installation items.

  If you previously tried to install the integration in a release prior to Quebec, contact Customer Service and Support for help with cleaning up your instance manually.

- Verify that you have the admin permissions on ServiceNow and Microsoft Azure instances.

What to do next

1. Plugins for Conversational Integration with Microsoft Teams
2. Create a Bot in Microsoft Teams
3. Auto-generate the manifest file for uploading on Microsoft Teams
4. Upload the manifest package file to publish your bot

Plugins for Conversational Integration with Microsoft Teams

Activate the Glide Virtual Agent [com.glide.cs.chatbot] plugin, the Conversational Integration with Microsoft Teams [sn_va_teams] plugin, and verify its additional plugins to enable other features for conversation design.

You must have either the virtual_agent_admin or admin role and the external_app_install_admin role to activate these additional plugins. For details, see Activate a plugin.

Note:
Ensure that you perform the following steps before verifying the activation of additional plugins required for Microsoft Teams.

- Install the Glide Virtual Agent [com.glide.cs.chatbot] plugin.

  For more information about activating the Glide Virtual Agent plugin, see Activate Virtual Agent.

- Download the Conversational Integration with Microsoft Teams app from the ServiceNow® Store.

  For more information about downloading the app, Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

- Install the Conversational Integration with Microsoft Teams [sn_va_teams] plugin in your ServiceNow instance.

  For more information about installing Conversational Integration with Microsoft Teams, see Install Conversational Integration with Microsoft Teams.

Verify the following plugins for Conversational Integration with Microsoft Teams.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Microsoft Teams Graph Spoke [sn_msteams_ahv2]: Plugin is auto installed as part of [sn_va_teams]. In your ServiceNow instance, navigate to **All** > **sys_plugins.list** and search for [sn_msteams_ahv2] to locate the plugin. If it hasn't been installed, you might have to request from the ServiceNow Store first and install the plugin in your ServiceNow instance.
- MS Teams - App Core [com.snc.msteams.app.core]: Plugin is auto installed as part of [sn_va_teams]. In your ServiceNow instance, navigate to **All** > **sys_plugins.list** and search for [com.snc.msteams.app.core] to locate the plugin. If the plugin is installed, you are all set to move forward. If it was not installed, reach out to Customer Service and Support.

Auto-generate the manifest file for uploading on Microsoft Teams

Auto-generate the manifest file and customize the branding of your Microsoft Teams app so that you can make Virtual Agent available in your organization.

Before you begin

Role required: virtual_agent_admin or admin

About this task

An automated manifest file generator on the new Microsoft Teams UI automatically fills in the bot ID and updates the other settings (such as branding) based on input from you, the administrator. The manifest file generator also enables a one-select download of the manifest package.

- Before you generate a manifest file, you must create a self-configured bot (or ensure that one has already been created) in the ServiceNow instance. You can then generate a manifest package for each self-configured bot that you create.
- After you save the manifest form, you can download the manifest zip package, which contains the following three files:
  - manifest.json
  - color.png
  - outline.png

  You can edit the manifest form and redownload it as many times as you want.

Note:
This feature is only applicable when you're setting up the Virtual Agent integration with Microsoft Teams. If you intend to use ServiceNow for Microsoft Teams with ITSM or HR capabilities, select the **Learn more** link next to **Planning to enable additional ITSM and HR integrations** on the Bot Configuration page. That way, you can configure the manifest in a separate module instead of continuing to configure the manifest here. For more information, see Create and download the manifest file.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings**, in the Channels and routing section, select **View All**.
3. On the Channels and integrations page, in the Microsoft Teams tile, select **Manage**.
4. In the Self-configured bot section, select the **Manage Bot** icon.
   If you haven't enabled Message Extension and you are accessing it for the first time, you see a Turn on new feature alert message that informs you that the Message Extension feature for your Microsoft Teams integration is now available to be turned on.
5. On the **Configuration** tab, select **Edit configuration** and on the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Configure your Bot - VA Microsoft Teams Manifest

Field	Description
Short Name	Short display name for your app. **Note:** Ensure that the name doesn’t exceed 30 characters.
Full Name	Full name of your app. Use the full name if the short name of the app exceeds 30 characters. **Note:** Ensure that the full name doesn’t exceed 100 characters.
Bot (Client) ID	Unique Microsoft generated identifier. This field is automatically tied to the bot creation step and can't be altered.
Short description	Short description of your app experience. Use a short description when space is limited. **Note:** Ensure that the short description doesn't exceed 80 characters.
Full description	Full description of your app. **Note:** Ensure that the full description doesn't exceed 4000 characters.
Valid domains	List of valid domains for websites that your app expects to load in Microsoft Teams. **Note:** Currently only the ServiceNow domain is supported.
Version	Specific version of your app to track the incremental manifest submission to Microsoft Teams. For example, 1.0.0. Use a maximum of 2 digits after each decimal. **Note:** Ensure that you put a higher number for each new version.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Accent color	Color to use as a background for your outline icons. **Note:** The value must be a valid HTML color code starting with a hash-tag (#). For example, #293E40.
Color icon	Icon of your app that you want to appear in most Microsoft Teams scenarios. You can select the following options: ○ **Use Default icon**: Changes the color of the icon back to the default color icon. ○ **Use Custom icon**: Changes the color icon with an icon color of your choice. **Note:** Ensure that you upload only the `.png` image files that have fewer than 192x192 pixels to change the color of the icon.
Outline icon	Icon that is seen on the app bar when the app is in use. You can select the following options: ○ **Use Default icon**: Changes the outline icon back to the default outline icon. ○ **Use Custom icon**: Changes the outline icon with an icon of your choice. **Note:** Ensure that you upload only the `.png` image files that have fewer than 32x32 pixels to change the outline icon.
Message Extension	Message extension that lets users search and share the results through the compose message area of the Microsoft Teams client. If you are going to use this bot for Microsoft Copilot, then ensure that

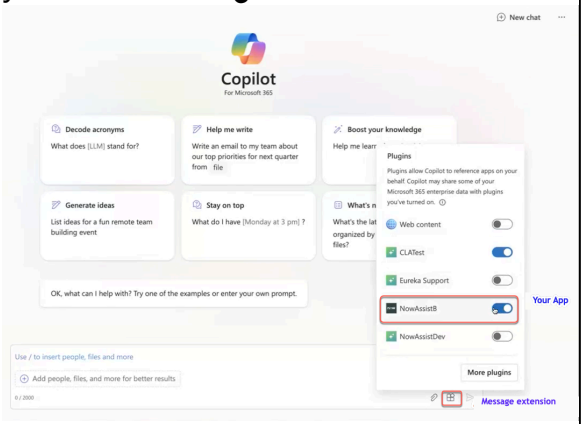© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	you enable **Message Extension**.  By enabling Message Extension for an app or bot, you will see the same app or bot in the message extension area while your conversation with the Now Assist using Microsoft Copilot.

For more details about each field, refer to Microsoft Teams documentation.

6. Select **Save**.
   You're redirected to the Bot configuration page where the manifest file is saved and ready for you to download.

   Note:

   You can also edit the manifest file by selecting **Edit configuration** on the download page and downloading the file as many times as you would like. With each new manifest, ensure that you enter a higher version number in the **Version** field so that the updated form can be saved successfully.

7. In the Bot configuration page, under Your package, select the **Download** button to download your package file.

   Note:

   You can also edit the manifest file by selecting **Edit configuration** on the download page and downloading the file as many times as you would like. However, with each new manifest, ensure that you enter a higher version number in the **Version** field so that the updated form to be saved successfully.

What to do next

Upload the manifest package file to publish your bot.

Upload the manifest package file to publish your bot

Upload the manifest file that you generated to the Microsoft Teams and test your app experience to make it be available in the Microsoft global app store.

Before you begin

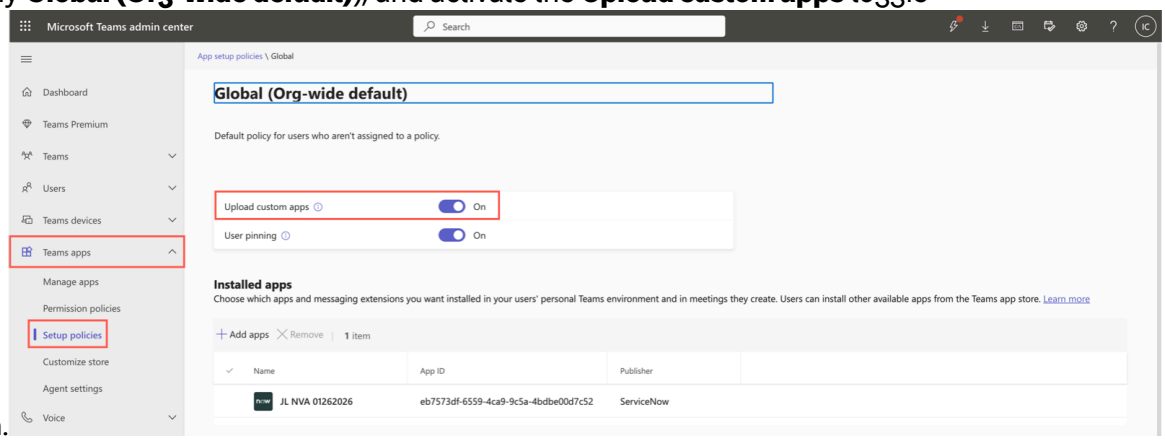
Role required: Microsoft Teams admin, Global Administrator, or roles containing Application Administrator.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


The self-configured bot that you created will not be available in the Microsoft global app store unlike the ServiceNow pre-published app - ServiceNow Virtual Agent. To test your app experience within Microsoft Teams, you must upload your app to Microsoft Teams. Uploading adds the app to the team that you selected and your team can participate in the end-to end conversations with the bot.

Procedure

1. Log in to the Microsoft Teams Admin Center using the admin credentials and navigate to **Teams apps** > **Setup policies**.
2. Under **Manage policies**, select the policy you are uploading your manifest under (usually **Global (Org-wide default)**), and activate the **Upload custom apps** toggle switch.



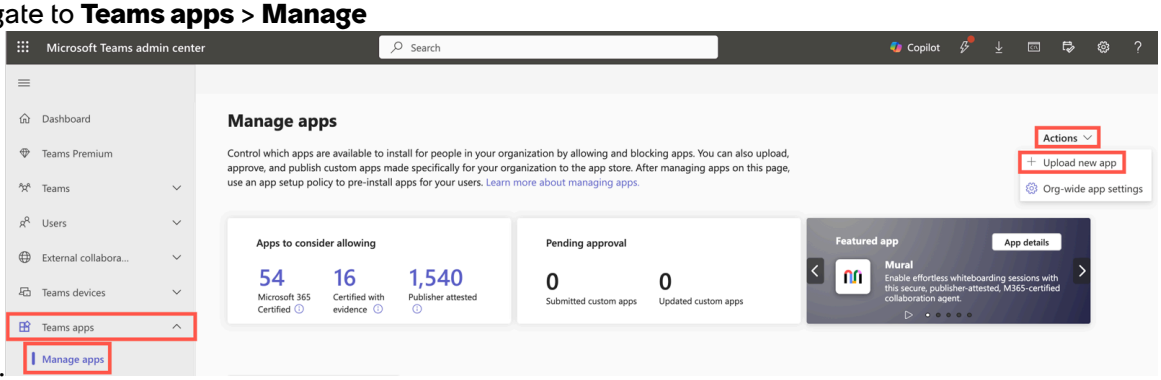3. Navigate to **Teams apps** > **Manage apps**.




4. Under the **Actions** drop-down menu, select **Upload new app**, then select **Upload** and add your manifest zip file.
   Your manifest file is uploaded and appears on the list of store apps.

> **Note:**
> If you receive any errors, correct the listed errors in your manifest, then download the zip file and upload it through this page again. If you activated Microsoft Copilot in your manifest, the Custom Engine Agent (CEA) is also uploaded with it. For more information on activating Copilot, see Activate Now Assist in Virtual Agent for Microsoft Teams.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

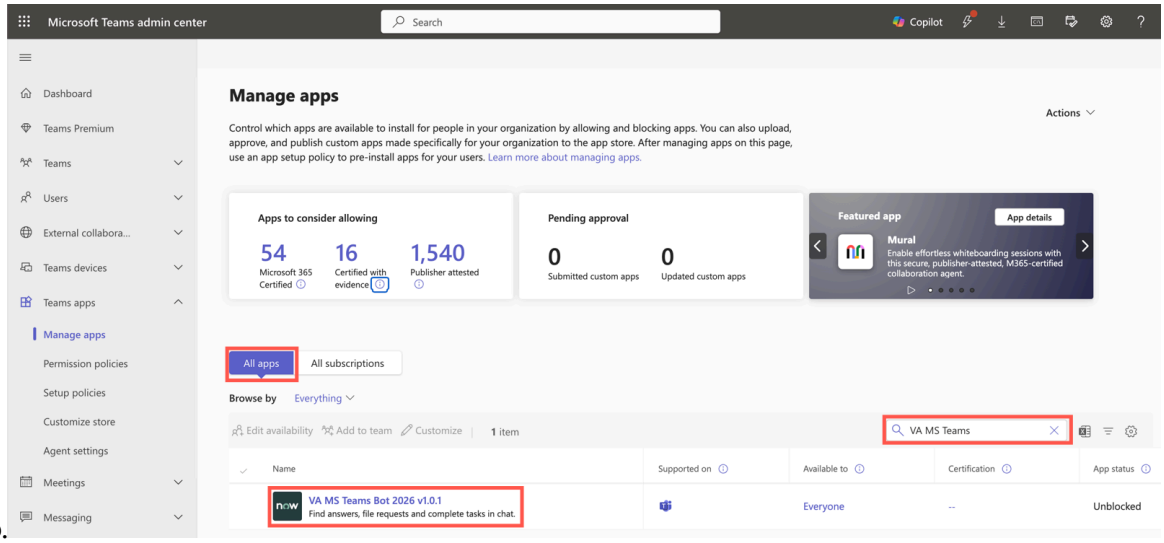5. After you successfully published the bot, select the **All apps** tab and use the search bar to find your app.




You have successfully published the bot on Microsoft Teams. It should now be available for your organization and you can start interacting with the bot.

6. Perform the following steps on the Microsoft Teams Admin center.

> **Note:**
> If you have enabled pre-linking by turning on **Automatically Link ServiceNow user profiles** on the Messaging App Integration UI page, users are pre-linked without typing hi. For more information about pre-linking your accounts, see Installing Microsoft Teams for all Virtual Agent users. If you have turned off the check box, use the following manual account linking process described.

a. Type `hi` to start interacting with the bot.
The bot presents a prompt that provides options to authenticate, such as **Link to ServiceNow**, **Continue as Guest**, and **Check out Tips**.

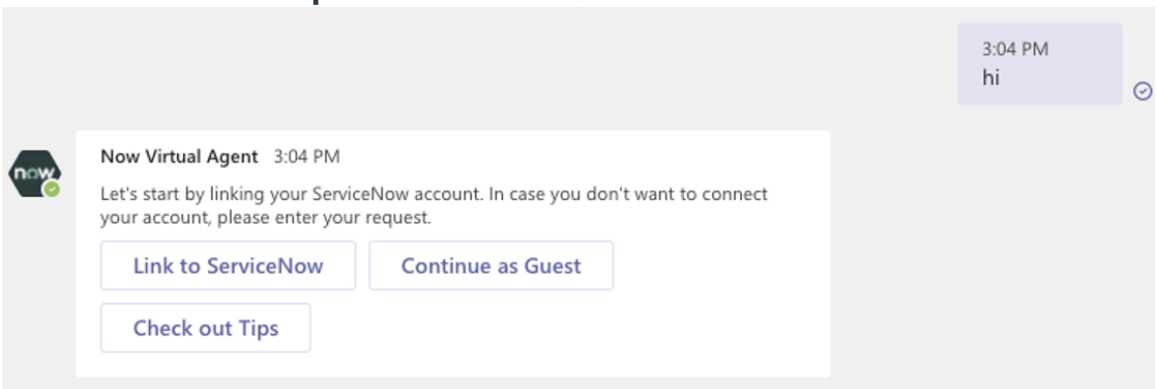
Microsoft Teams bot responses



The **Link to ServiceNow** option requires users to enter their ServiceNow instance credentials. If you choose to link to your ServiceNow account, the following screen is displayed asking you to confirm the account linking.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

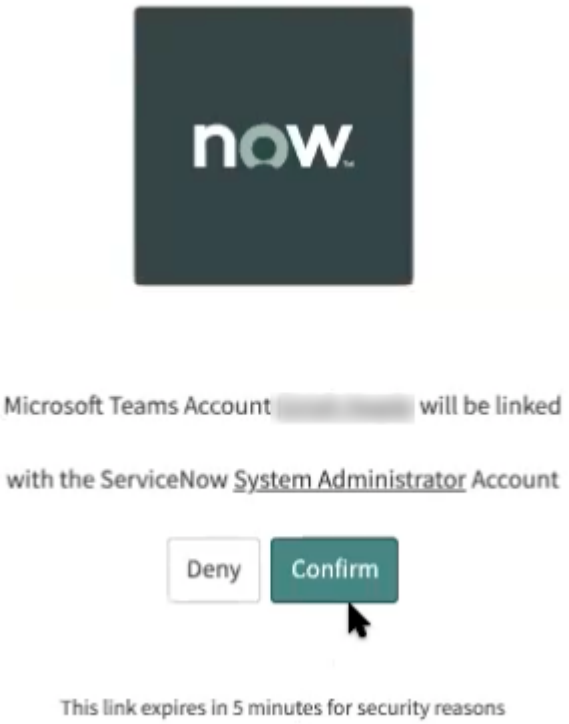Linking Microsoft Teams account with ServiceNow account



Account linking associates your Microsoft Teams account with your ServiceNow account for the ServiceNow instance that is integrated with the Conversational Integration with Microsoft Teams. Users with linked accounts can run Virtual Agent topics that use ServiceNow information and records.

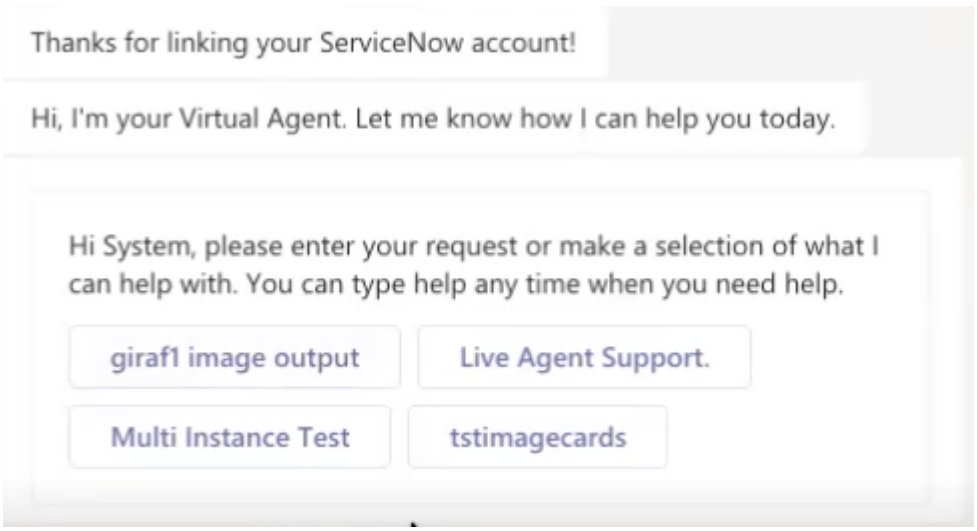ServiceNow account linked with Microsoft Teams tenant



If your users do not link their ServiceNow accounts, they can access and run only the public topics.

b. Configure the bot on your ServiceNow instance.
For more information, see Integrating Virtual Agent with messaging apps.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next

You have successfully integrated Virtual Agent with Microsoft Teams using the self-configured method. If you are interested in getting additional ITSM and HR capabilities in Microsoft Teams, see these instructions for using a self-configured bot with ServiceNow for Microsoft Teams.

Integrating Virtual Agent with Microsoft Teams for GCC-H or DoD

You can integrate Virtual Agent with Microsoft Teams for GCC-H (Government Community Cloud - High) or DoD (Department of Defense) customers by configuring your own bots. The self-configured method provides another way for customers to enable the integration without installing the default Now Virtual Agent app that is published on the Microsoft Store. The self-configured bot bypasses the collaboration proxy architecture.

If you are a commercial customer who has already installed a pre-published bot but would like to integrate with multiple ServiceNow instances within a single Microsoft Teams tenant, see Integrate your Self-configured bot with single Microsoft Teams tenant.

If you are a Microsoft GCC (GovtCommunityCloud) customer, do not follow this step. Instead, refer to Integrating Virtual Agent with Microsoft Teams using the self-configured bot.

Prerequisites

Before integrating Virtual Agent with your Microsoft Teams tenant, ensure that the following prerequisites are met:

- Verify that your ServiceNow instances have been upgraded to the San Diego release.
- Verify that you have not previously attempted installing the Conversational Integration with Microsoft Teams app on your instances.

  If you previously tried to install the integration in Quebec and the above releases, refer to this Knowledge Base article to remove the residual installation items.

  If you previously tried to install the integration in a release prior to Quebec, contact Customer Service and Support for help with cleaning up your instance manually.

- Verify that you have the admin permissions on ServiceNow and Microsoft Azure instances.

What to do next

1. Plugins for Conversational Integration with Microsoft Teams.
2. Create a bot in Microsoft Teams for GCC-H or DoD.
3. Integrate your Self-configured bot with Microsoft Teams for GCC-H or DoD.
4. Auto-generate the manifest file and upload it into Microsoft Teams for GCC-H or DoD.

Create a bot in Microsoft Teams for GCC-H or DoD

Create a self-configured bot with Microsoft Teams for GCC-H or DoD customers to be able to integrate with the Virtual Agent.

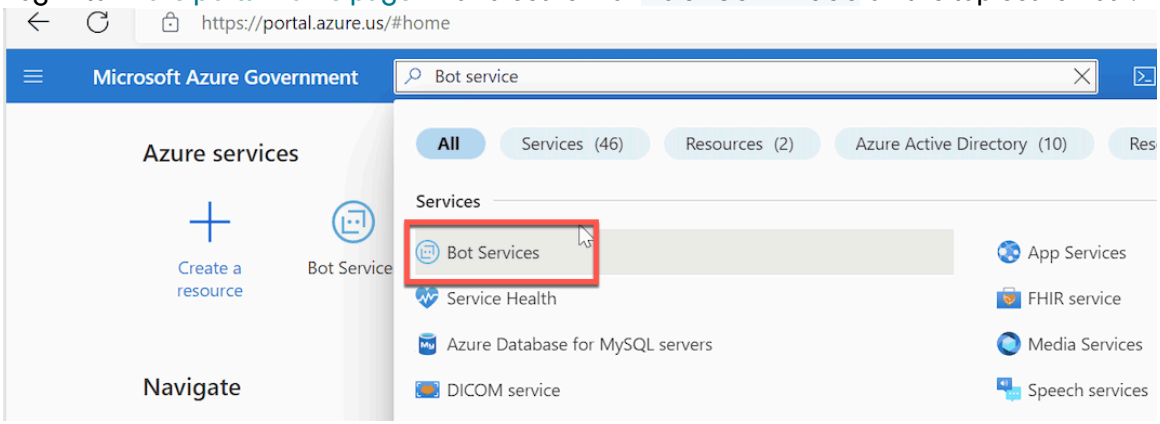
Before you begin

Role required: none


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Log in to Azure portal home page and search for `Bot Services` on the top search bar.




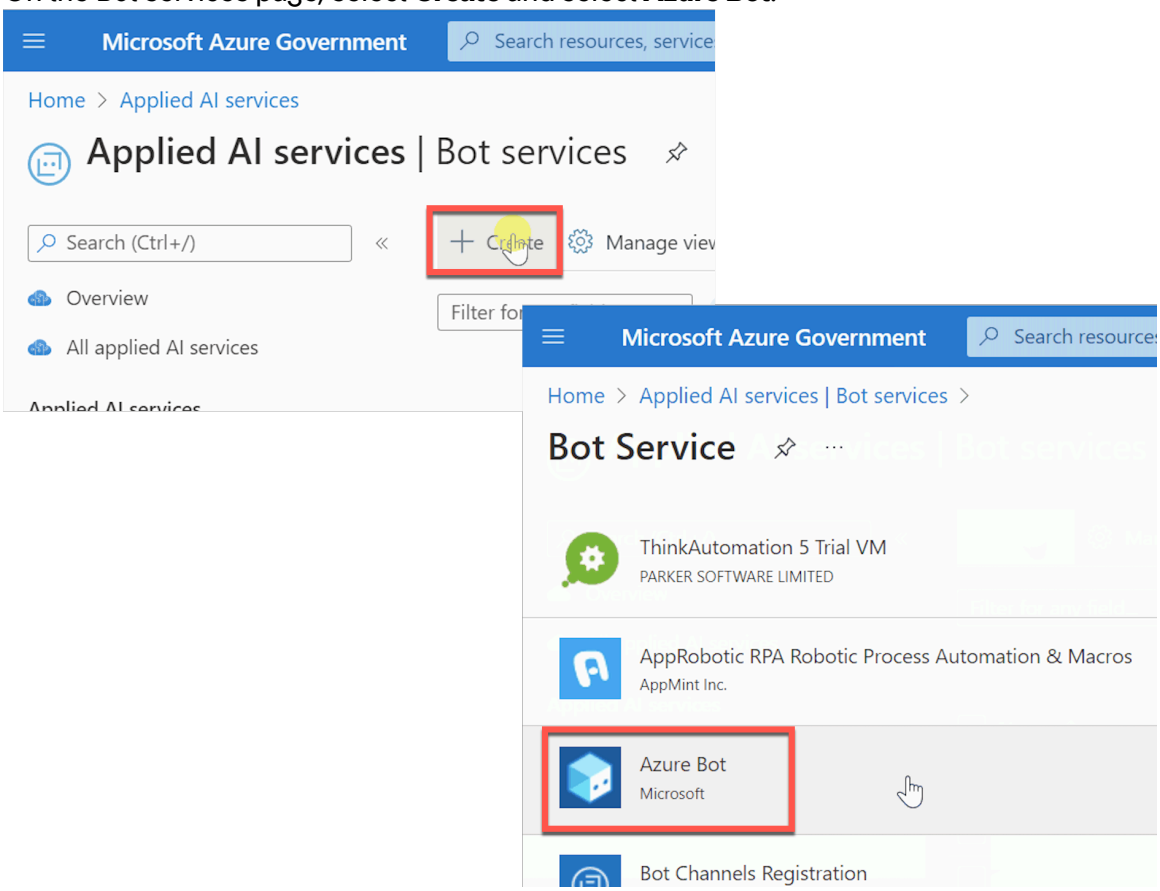2. On the Bot services page, select **Create** and select **Azure Bot**.




3. On the Azure Bot page, select **Create** next to the Plan menu.

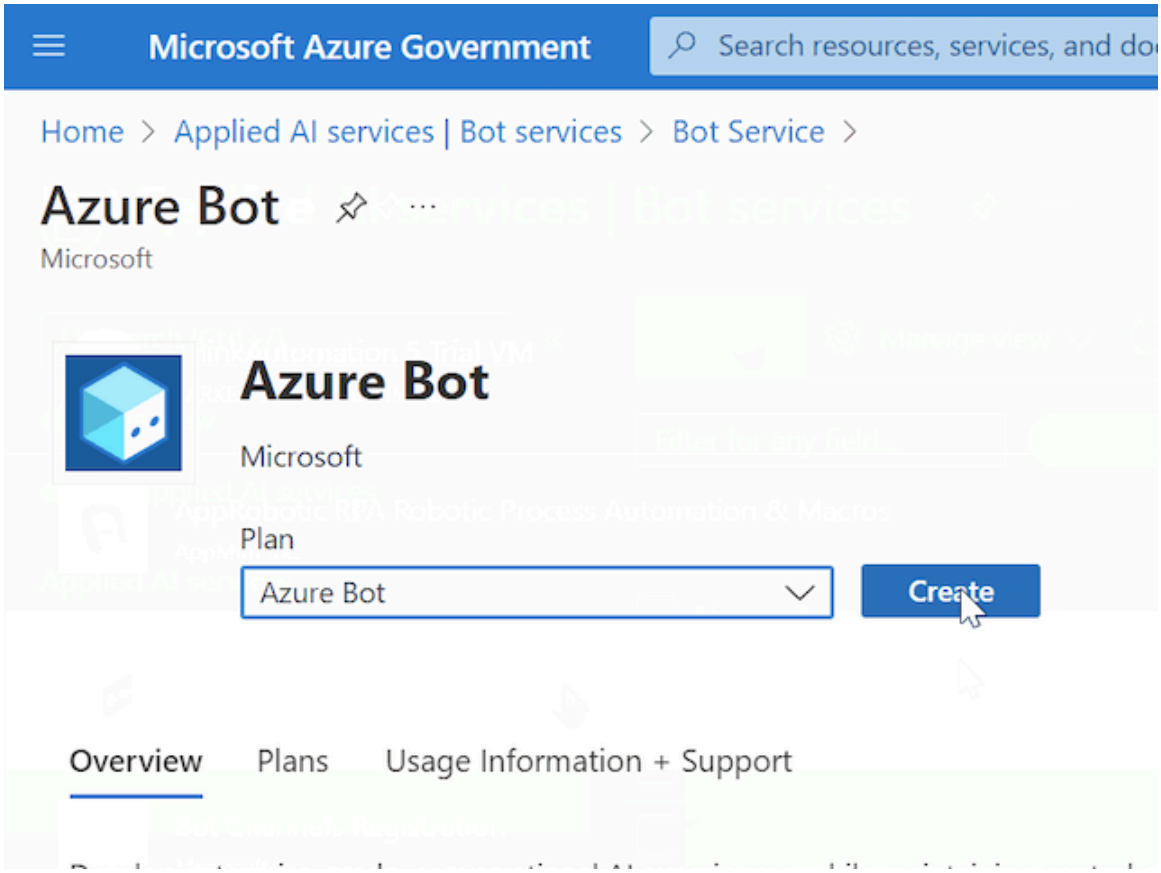© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



4. On the form, fill in the **Bot Handle**, **Subscription**, **Resource group**, **New resource group location**, and **Pricing** details.

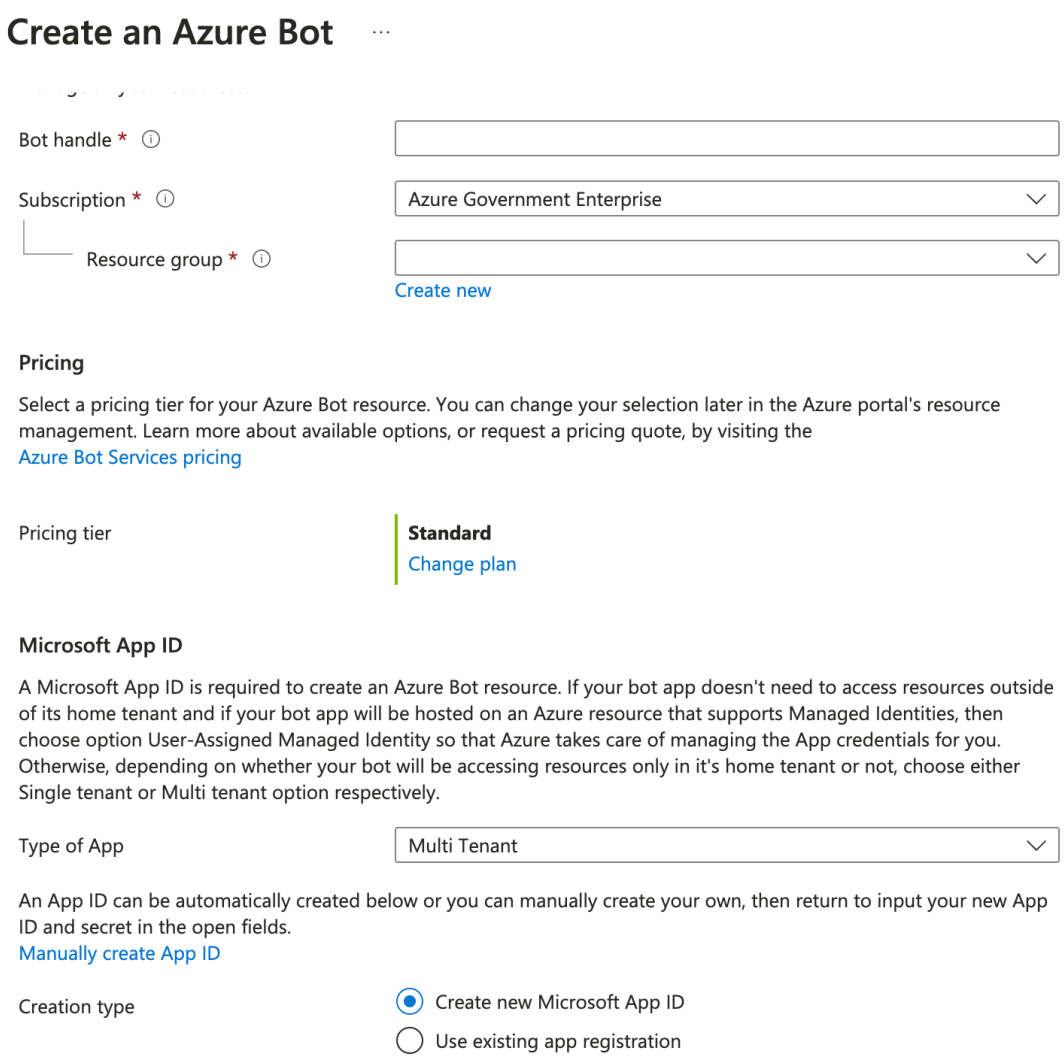© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




5. Under **Microsoft App ID**, select the type of application from the Type of App list.
   You can create a multi tenant app or a single tenant app.
6. Select the **Creation type** radio button.


> **Note:**
> If an existing app is being used, make sure that the type of app is the same as the type of bot you're creating. This verification is important because a multi tenant app will work with a multi tenant Microsoft Teams bot and vice versa.

7. Select **Review + create**.
8. Review the Basic bot details provided and select **Create**.
   When the bot is successfully created, you will receive the `Deployment succeeded` message.
9. On the left navigation, select **Channels** and select the Microsoft Teams icon under **Add a featured channel**.

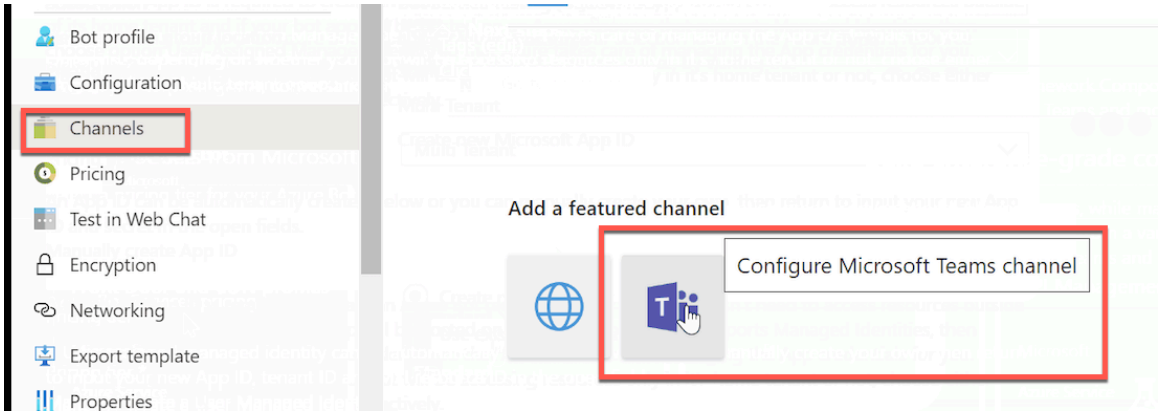© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



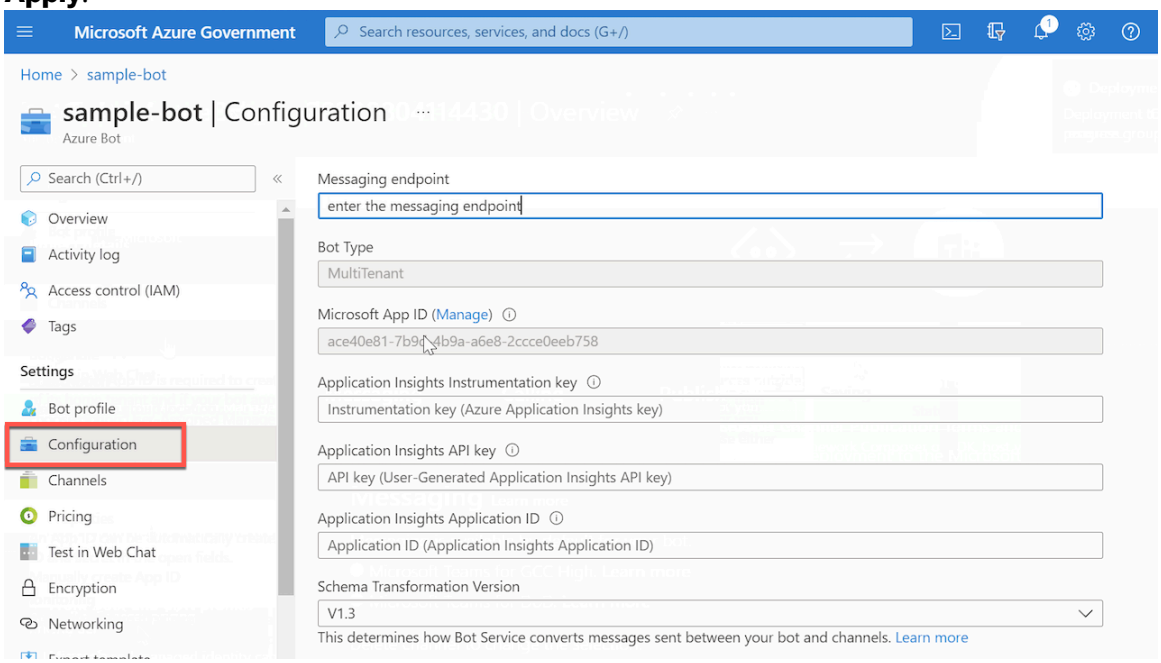10. On the Terms of Service pop-up, select **Save** and select **Agree**.
The channel gets saved.
11. On the left navigation, select **Configuration**, complete the configuration form, and select **Apply**.



Note:
In the **Messaging endpoint** field, provide the instance URL address.

For example: `https://<instancename>.service-now.com/api/now/v1/cs/adapter/msft/events`.

The domain might not be `service-now.com` and could be different. For example, the domain for GCC is `servicenowservices.com`.

Replace the <instancename> with the name of your ServiceNow instance where you are integrating with Microsoft Teams.

12. On the left navigation, select **Overview**.
You can also get to the Overview page by navigating to **Azure Services** > **Azure Active Directory** > **Manage** > **App Registrations** and locate your application from the list to retrieve the following details.
13. Perform the following steps to retrieve the secret value code:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Copy the **Application (client) ID** and **Directory (tenant) ID** of your application and make a note of it.

b. On the left navigation bar under **Manage**, select **Certificates & Secrets**.

c. Select **+ New client secret**, add your **Description** and **Expiration**, and select **Add**.

d. Copy the secret value code in the **Value** field and make a note of it.

> **Note:**
> The secret value code is visible only once.

Integrate your Self-configured bot with Microsoft Teams for GCC-H or DoD

Link your registered Microsoft Teams bot with your ServiceNow instance to integrate it with the Virtual Agent. Use your ServiceNow Virtual Agent application to install and configure Conversational Integration with Microsoft Teams.

Before you begin

Role required: virtual_agent_admin or admin and Microsoft Azure admin.

Procedure

1. Fetch the Tenant ID, Client ID (Application ID), Client Secret, and Bot Name details for your bot created in Microsoft Teams.
   For more information, see Retrieve bot details.

   > **Note:**
   > Use this information when setting up the self-configured bot in your ServiceNow instance.

2. As a ServiceNow admin, set up the self-configured bot on the ServiceNow instance in the global scope.

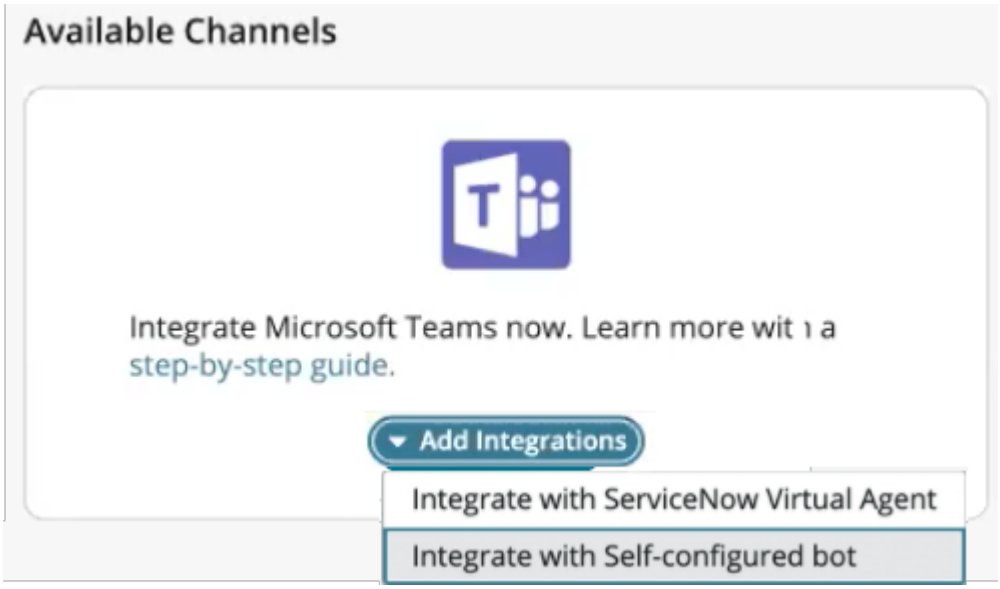
   a. Log in to your ServiceNow instance and navigate to **All** > **Conversational Interfaces** > **Settings**.

   b. In **General Settings** under **Channels**, select **View All**.
   The Channels and integrations page opens.

   c. Under the Available Channels section in the Microsoft Teams tile, select **Add Integrations**.


   > **Note:**
   > The **Add Integrations** drop-down is available only after installing the Conversational Integration with Microsoft Teams plugin (sn_va_teams) on your ServiceNow instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



d. From the **Add Integrations** drop-down, select **Integrate with your self-configured bot**.

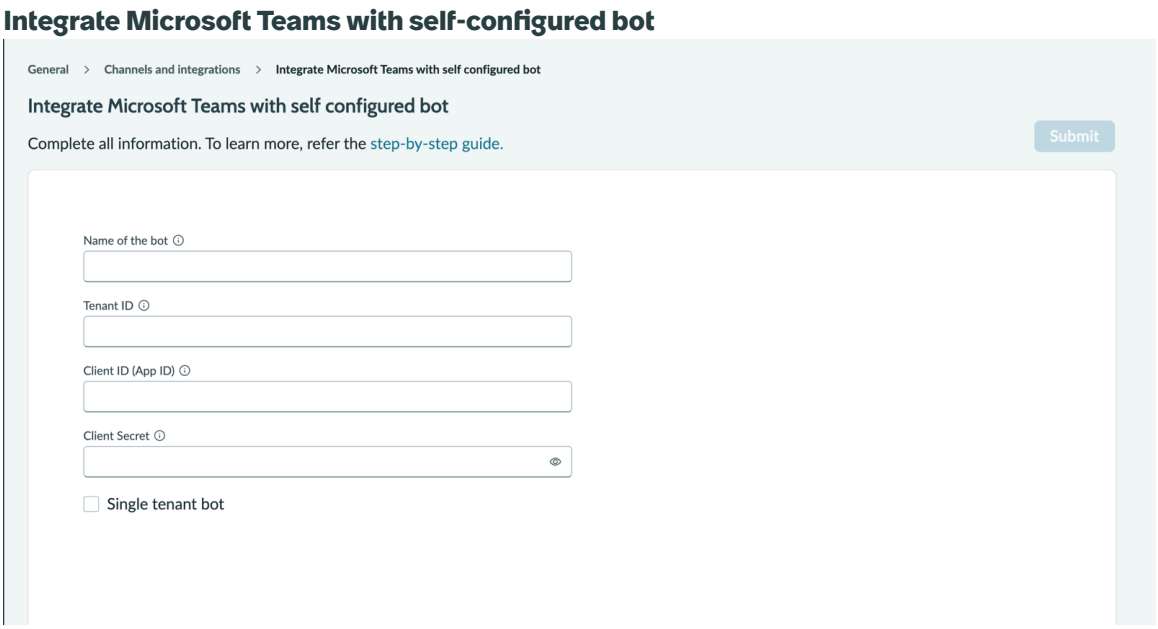
e. In the Integrate Microsoft Teams with self-configured bot page, provide the **Name of the bot**, **Tenant ID**, **Client ID (App ID)**, and **Client Secret** that you made a note while creating the Microsoft Teams bot and select **Submit**.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If you own multiple ServiceNow instances and would like to integrate additional bots for additional instances, repeat the preceding steps to add and integrate with bots.

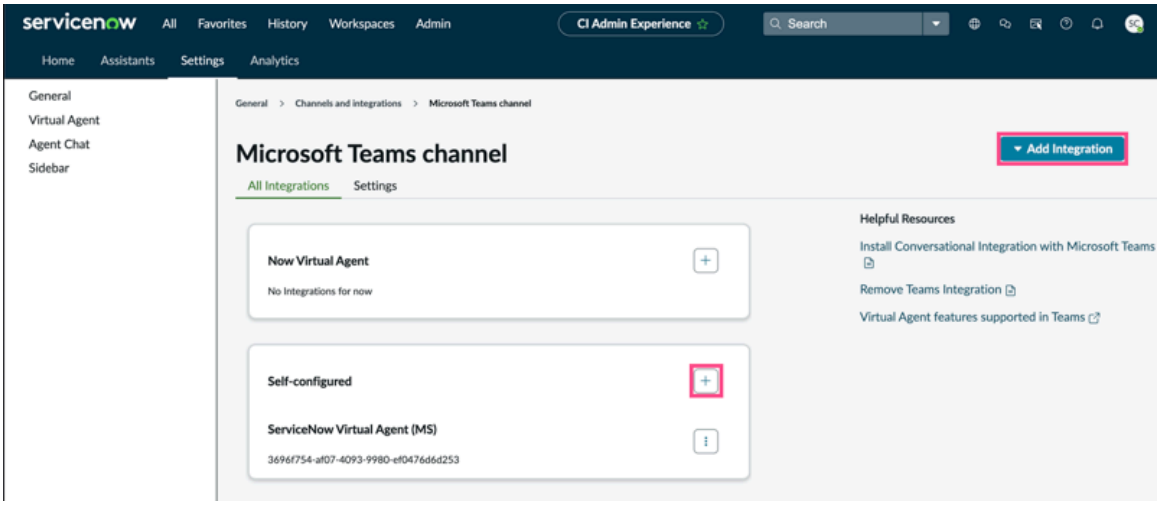
If you would like to integrate your ServiceNow instance with another Microsoft Teams bot, select the Plus icon against the Self-configured bot or select the **Add integration** drop-down on the Manage Microsoft Teams channel page and select **Integrate with your self-configured bot**.



For more information, see Manage the ServiceNow Virtual Agent integration with Microsoft Teams.

User receives a message that the installation is successful.

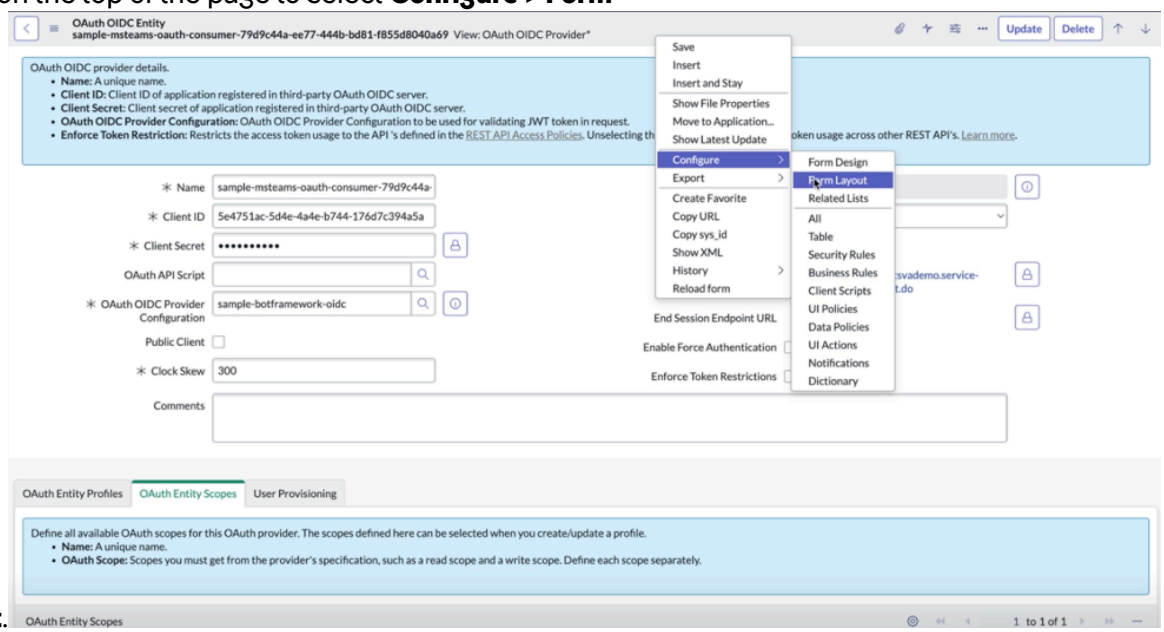
3. In your ServiceNow instance, navigate to **System OAuth** > **Application Registry** and open the record that contains the **sample-msteams-oauth-consumer**.
4. Right-select on the grey bar header titled **OAuth OIDC Entity** on the top of the page to select **Configure** > **Form Layout**.



5. Search for **Token URL** from the **Available** field, add it to the **Selected** field, and move it under **Redirect URL**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

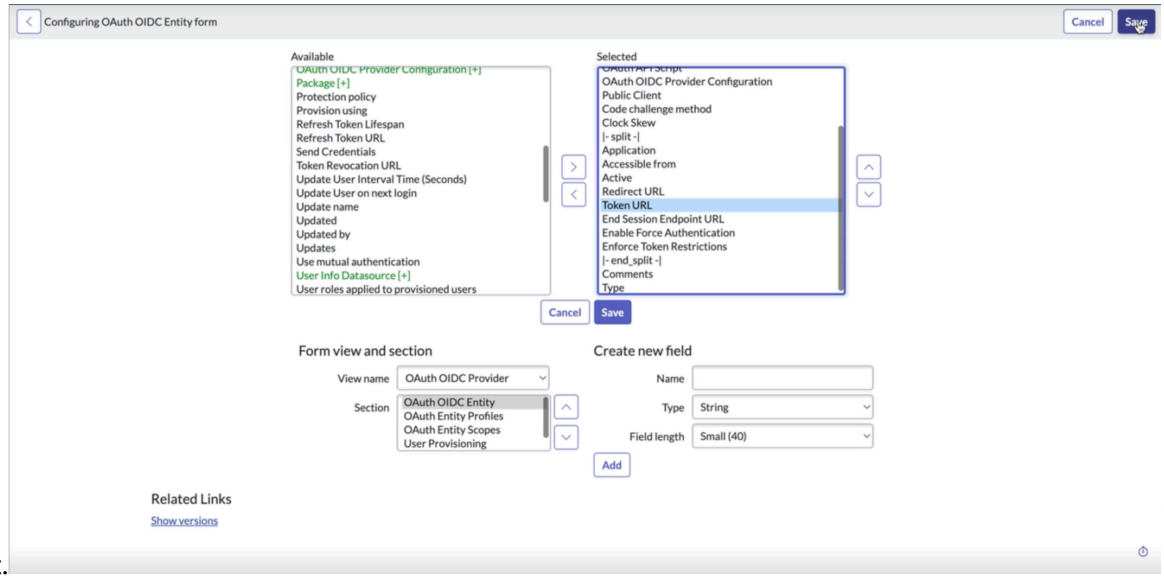6. Select **Save** to save the layout.



You're redirected to the OAuth OIDC Entity record.

7. On the OAuth OIDC Entity form, select the lock icon to unlock the **Token URL** field, and then update the default value:
   - For multi-tenant application: `https://login.microsoftonline.us/MicrosoftServices.onmicrosoft.us/oauth2/v2.0/token`
   - For Single-tenant application: `https://login.microsoftonline.us/<Tenant-ID>/oauth2/v2.0/token`
8. Scroll down the OAuth OIDC Entity form, select the **OAuth Entity Scopes** tab, and update the OAuth scope's default value to `https://api.botframework.us/.default`.
9. On the OAuth OIDC Entity form, select the information icon next to the **OAuth OIDC Provider Configuration** field and select **Open Record**.
10. On the OIDC Provider Configuration form, update the **OIDC Metadata URL** to `https://login.botframework.azure.us/v1/.well-known/openidconfiguration` and select **Update**.

Auto-generate the manifest file and upload it into Microsoft Teams for GCC-H or DoD

After you complete integrating the bot on the ServiceNow instance, configure the manifest file, auto-generate it, and upload the package file to Microsoft Teams to start conversing with the Virtual Agent.

Before you begin

Role required: admin

About this task

The self-configured bot that you created is not available in the Microsoft global app store, unlike the ServiceNow pre-published app - ServiceNow Virtual Agent. You must upload your app to Microsoft Teams. Uploading adds the app to the team that you select and you and your team can participate in the end-to end conversations with the bot.

Note:

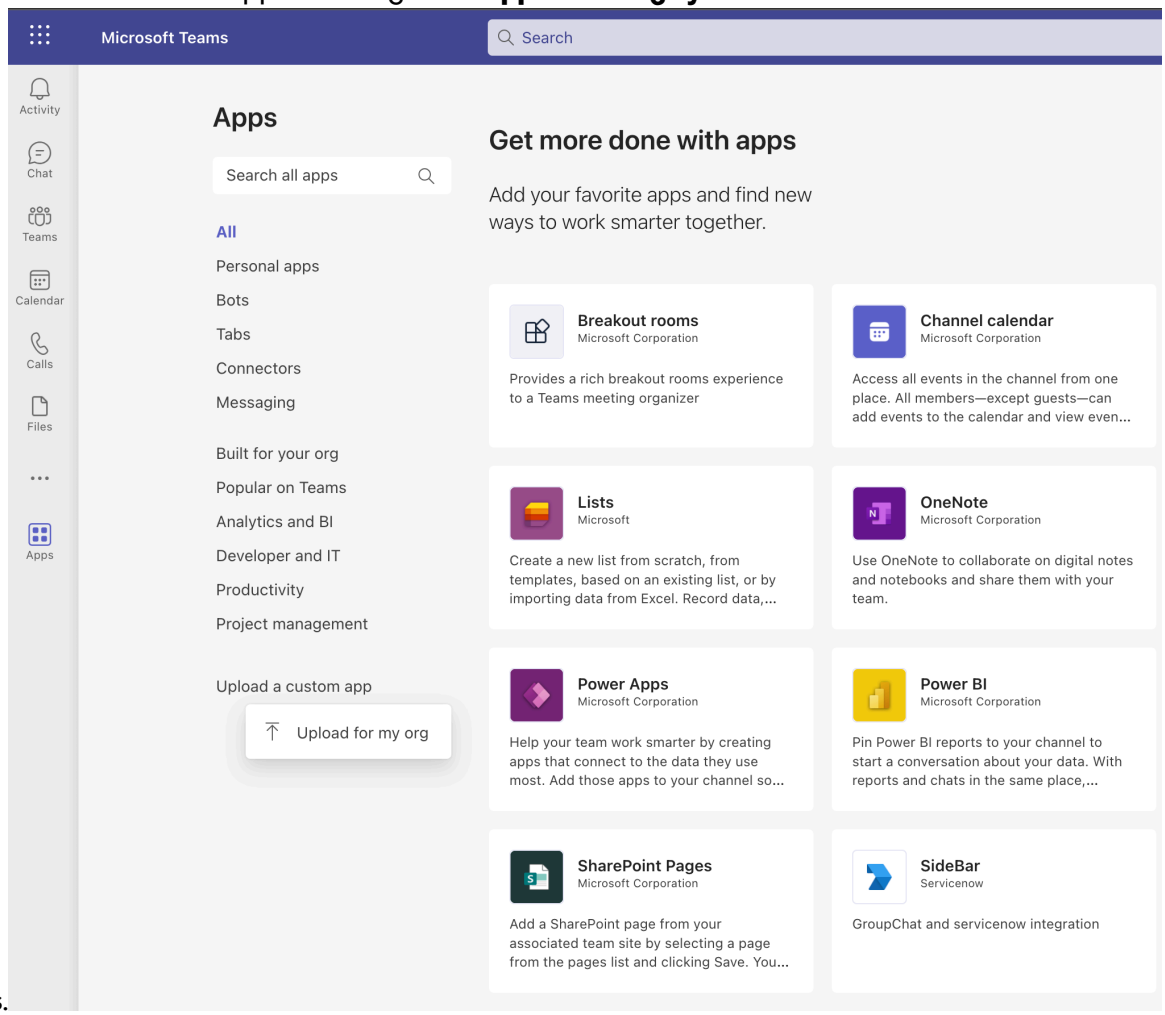
You need permission to upload custom apps in Microsoft Teams. To learn how to enable it, refer to the Microsoft documentation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. To configure the bot, auto-generate the manifest file, and download the manifest configured file in your ServiceNow instance, see Auto-generate the manifest file for uploading on Microsoft Teams.
2. To publish the manifest file, from Microsoft Teams, perform the following steps:

   a. Open Microsoft Teams app and navigate to **Apps** > **Manage your apps**.



   b. Select **Upload an app to your org's app catalog** to release the self-configured bot to the entire organization.

   c. Upload the zip file and select **Add/Install**.

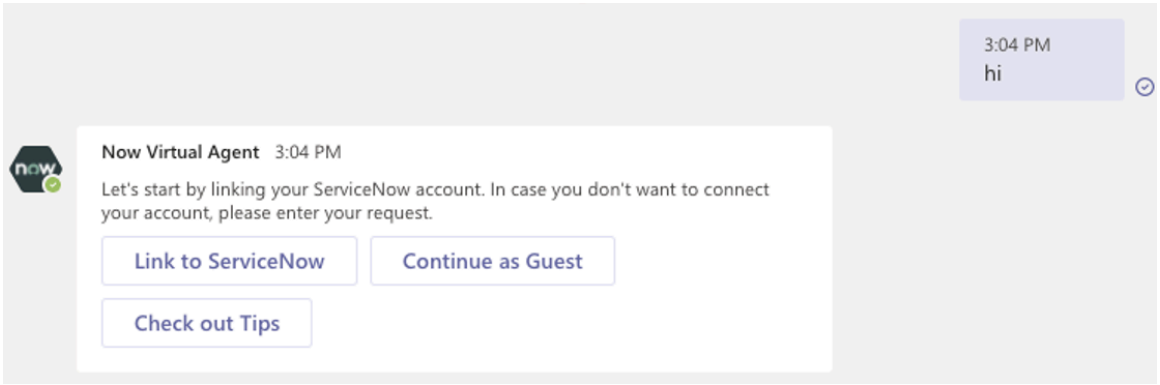
   d. After you successfully published the bot, select the 3-dot menu on the left pane to locate your app (search in the Find an app bar).
   You have successfully published the bot on Microsoft Teams. It should now be available for your organization and you can start interacting with the bot.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. **Note:**
   If you have enabled pre-linking by turning on **Automatically Link ServiceNow user profiles** on the Messaging App Integration UI page, users are pre-linked without typing hi. For more information about pre-linking your accounts, see Installing Microsoft Teams for all Virtual Agent users. If you have turned off the check box, use the following manual account linking process described.


Type `hi` to start interacting with the bot.
The bot presents a prompt that provides options to authenticate, such as **Link to ServiceNow**, **Continue as Guest**, and **Check out Tips**.

Microsoft Teams bot responses



The **Link to ServiceNow** option requires you to enter their ServiceNow instance credentials. If you choose to link to your ServiceNow account, the following screen is displayed asking you to confirm the account linking.

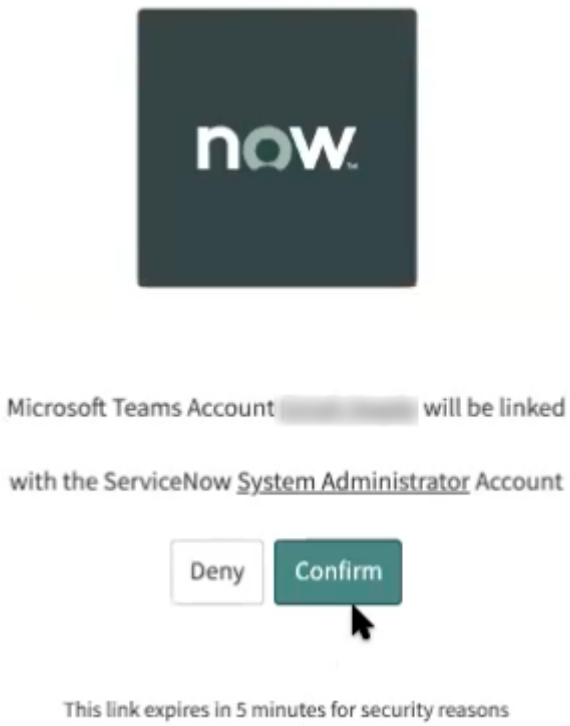
Linking MS Teams account with ServiceNow account



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Account linking associates your Microsoft Teams account with your ServiceNow account for the ServiceNow instance that is integrated with the Conversational Integration with Microsoft Teams. If your account is linked, you can run Virtual Agent topics that use ServiceNow information and records.

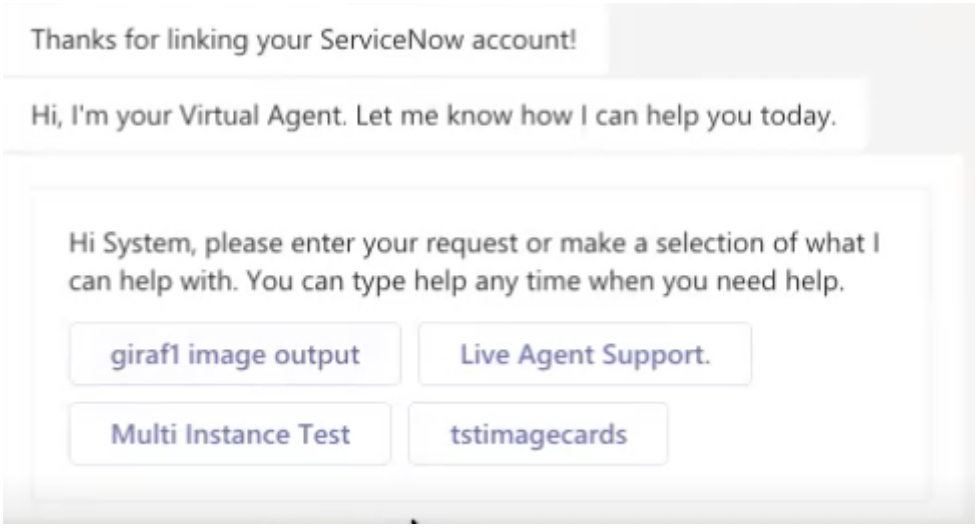ServiceNow account linked with Microsoft Teams tenant



If you do not link your ServiceNow accounts, you can access and run only the public topics.

4. Configure the bot on your ServiceNow instance.
   For more information, see Integrating Virtual Agent with messaging apps.

What to do next

You have successfully integrated Virtual Agent with Microsoft Teams using the self-configured method. If you are interested in getting additional ITSM and HR capabilities in Microsoft Teams, see these instructions for using a self-configured bot with ServiceNow for Microsoft Teams.

Limitations in GCC-H or DoD for Microsoft Teams integration with Virtual Agent

Learn about the limitations for Microsoft Teams Government Community Cloud - High (GCC-H) or the US Department of Defense (DoD) Microsoft Teams integration with Virtual Agent.

Limitations

1. **Manifest version**: Up to v1.10. Ensure that the template that you create has version 1.10 or an earlier version.
2. **Adaptive Cards**: Enable the *sn_va_teams.send_image_as_data* system property to upload images to your conversation on Microsoft Teams that is integrated with GCC-High. Apply this system property to image and card controls. If you're using an image URL, ensure that its source is a ServiceNow instance.

Deactivate streaming for all GCC customers in Microsoft Teams

Control streaming in Microsoft Teams for any and all Government Community Cloud (GCC) varieties.

Before you begin

Role required: admin or virtual_agent_admin.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

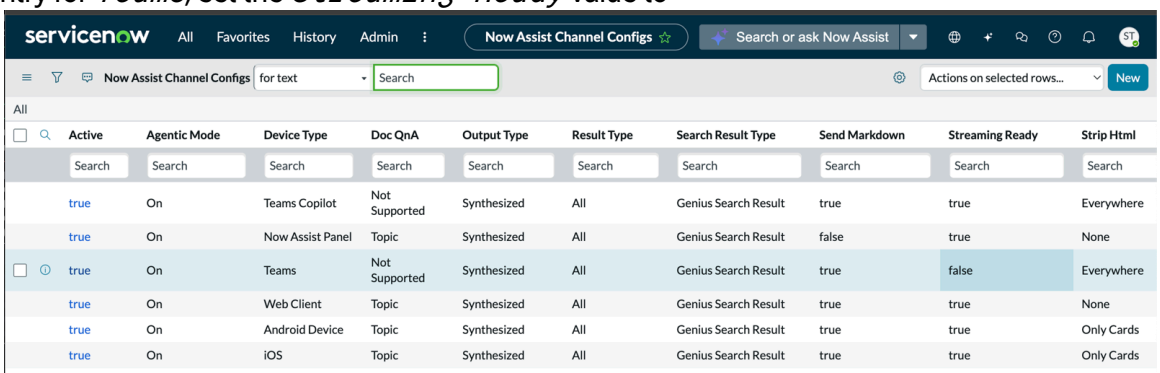
Note:
Custom Engine Agent (CEA) is replacing Declarative Agent (DA), the prior Microsoft Copilot integration. The CEA enables Virtual Agent to be discoverable by Microsoft Copilot, with full functional access to Now Assist in Virtual Agent and multi-turn conversations.

You must have version 10.1.1 or higher of the Microsoft Teams plugin to have CEA support. In version 10.2 of the Microsoft Teams plugin, streaming is inactive by default and CEA is active by default.

You can deactivate streaming as needed with this procedure, by setting values in the Now Assist Channel Configs [sys_now_assist_channel_config] and Custom Adapter Properties [sys_cs_custom_adapter_property] tables. You can use these instructions with all Government Community Cloud types: GCC, GCC-H, and GCC-DoD.


Procedure

1. Navigate to **All** > **sys_now_assist_channel_config.list**.
2. In the entry for *Teams*, set the *Streaming Ready* value to



`false`.

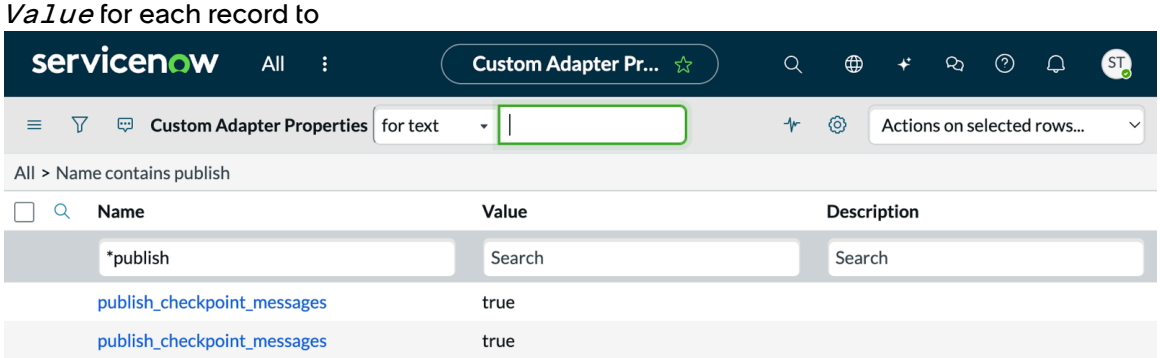3. Navigate to **All** > **sys_cs_custom_adapter_property.list**.
4. In the search bar, select the search value **for text** from the drop-down menu, and enter `sys_cs_custom_adapter_property`.
   One or more records for `sys_cs_custom_adapter_property` appear.
5. Set the *Value* for each record to



`false`.

Result
Streaming is disabled for your version of GCC in your instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If you want to reactivate streaming, repeat these steps, but set the *Value* for all entries to `true`.

Create and integrate a self-configured bot for a single tenant page

Create a self-configured single tenant bot with Microsoft Teams for integration with Virtual Agent.

Before you begin
Role required: virtual_agent_admin or admin and Microsoft Azure admin.

About this task
Creating and integrating a single tenant bot is similar to creating a GCC-H or DoD bot, with minor adjustments.

Procedure
1. Follow the instructions in Create a bot in Microsoft Teams for GCC-H or DoD, with the following changes.
   a. Follow steps 1 through 4 as normal.
   b. In step 5, select **Single tenant**.
   c. Follow the remaining steps as normal.
2. Follow the instructions in Integrate your Self-configured bot with Microsoft Teams for GCC-H or DoD, with the following changes.
   a. Follow steps 1 through 6 as normal.
   b. In step 7, select **Single tenant**, and add your tenant ID, but keep the `.com` domain, for example: `https://login.microsoftonline.com/<tenant-id>/oauth2/v2.0/token`.
   c. Follow steps 8 through 10 as normal.

Result
Your single-tenant bot is ready for use in Virtual Agent.

Enable Microsoft Teams integration in ServiceNow Protected Platform (SPP)

When installing Conversational Integration with Microsoft Teams, the ServiceNow AI Platform® makes the instance configuration simpler by dynamically determining the bot type for commercial and SPP (ServiceNow Protected Platform) environments from the Tokyo release.

The process of installing and configuring Microsoft Teams integration with Virtual Agent in an SPP environment is similar to that of the installation and configuration of the pre-published bot in a commercial environment. But it is the environment in which you are installing makes the difference and the bot is available based on the installation environment.

After you complete the Microsoft Teams integration with Virtual Agent in an instance with SPP environment, the **Now VirtualAgent Australia SPP** bot is available for Australian Govt customers.

For more information on the installation and configuration, see Install Conversational Integration with Microsoft Teams.

Configure Virtual Agent for Microsoft Teams

Configure your Microsoft Teams bots that are integrated with Virtual Agent to enable notifications, to link ServiceNow user profiles, and to set up system messages and contextual actions.

Before you begin
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
3. On the Channels and integrations page, in the Microsoft Teams tile, select **Manage**.
4. Select the **Settings** tab.
5. In the Enable Link Authentication section, configure the different link opening experiences using Smart Links.

   For more information about enabling link authentication for your Microsoft Teams bots, see Configure link authentication and opening experience in Microsoft Teams.

6. Swipe to the left the **Enable Notification for all users** toggle button to disable notifications for the linked users.

   Note:
   The **Enable Notification for all users** toggle button is selected by default.

   The **Automatically Link ServiceNow user profiles** toggle button is selected by default and disabled for any further change. This option links all the active ServiceNow accounts automatically to the associated Microsoft Teams bot.

7. Set up the **Global Messaging Settings**.

   Note:
   Any changes made to these settings will reflect in all the channels.

   - **System Messages**: Customize the default system messages displayed during Virtual Agent conversations.

     For more information about changing or updating a system message, see Change system messages.

   - **Contextual Actions**: Customize the supported actions per user command inputs.

     For more information about updating a contextual action, see Contextual actions for custom chat integrations.

What to do next

The Virtual Agent bot and Microsoft Teams tenant are now integrated for use on your ServiceNow instance. Your messaging users are automatically linked to their ServiceNow accounts.

- Notify your users that the Virtual Agent bot for Microsoft Teams is available for use.
- To improve the live agent experience for your users, you can activate the display of the estimated wait time for live chat support. When a user asks to chat with a live agent, a card shows the approximate wait time to talk with an agent, and gives the user the option to cancel the chat. For details on activating this feature, see Configure Agent Chat.

Configure branding for your ServiceNow Virtual Agent bot in Microsoft Teams

Enable users to configure branding for the published Microsoft Teams bot app, the ServiceNow® Virtual Agent. Users are provided with the flexibility to customize the default ServiceNow branding for the Microsoft Teams production bot name and icon.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- Ensure that you have the admin access to your Microsoft Teams tenant and Microsoft Teams admin center.
- Ensure that Virtual Agent is installed on your instance.
- Ensure that the Conversational Integration with Microsoft Teams store app is installed.

Role required: admin

Procedure

1. Log in to Microsoft Teams admin center.
2. Navigate to **Teams apps** > **Manage apps**.
3. In the list of apps, search for the Now Virtual Agent app using the Search bar and open it.
4. Select **Customize** to customize the app.
5. In the Customize panel, you can edit the app name, short description, color icon, outline icon, and accent color.

   Note:
   Follow the tool tips for file size and format restrictions for each field. You can also refer to Microsoft documentation on further details on the app customization functionality.

6. Select **Apply**.
   You will see the **Publish application** pop-up.
7. Select **Publish**.

   Note:
   Please note that the changes you made to the app may take up to 24 hours to reflect.

Configure link authentication and opening experience in Microsoft Teams

Link authentication and opening experience in Microsoft Teams provides a seamless experience for end users to interact with ServiceNow links when you use Virtual Agent on Microsoft Teams.

Before you begin

Role required: virtual_agent_admin or admin

Ensure that your Microsoft Teams integration is available in the All Integrations tab of the Channels and integrations page before enabling link authentication.

Ensure that your#Microsoft Teams email ID matches with one of the system users' email.

Ensure that you are in the#Conversational Integration with Microsoft Teams scope while completing this step (instead of the Global scope).

About this task

To configure smart links to open in a pop-up or Microsoft Teams tab, admins must first complete the following link authentication steps before moving on to configure smart links.

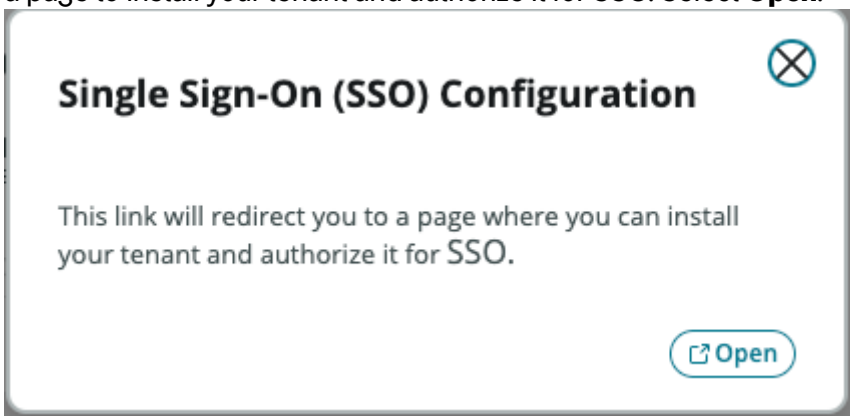
Note:
When the status of link authentication is inactive, the link opening behavior falls back to New Browser Tab even when admins configure a link to be opened in a pop-up or Microsoft Teams tab. Therefore, activating link authentication is a pre-requisite of using a pop-up and Microsoft Teams tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:
Be informed that Smart Links do not work for Now Virtual Agent if your instance has a custom domain.

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and routing**, select **View All**.
3. On the Channels and integrations page, in the Microsoft Teams tile, select **Manage**.
4. In the Manage Microsoft Teams channel page, select the **Settings** tab.
5. In the Enable Link Authentication section, under **Step 1. Configure SSO for tenant**, select the **Configure SSO** button.
   The Single Sign-On (SSO) Configuration pop-up opens to inform you that the link directs you to a page to install your tenant and authorize it for SSO. Select **Open**.



   For more information about configuring Single Sign-On, see Grant permissions to required Microsoft Azure apps.

   Note:
   - SSO can only be enabled on one Microsoft Teams tenant at any given time. If SSO is already enabled on another tenant, make sure to switch the tenant so that SSO can be enabled on the new tenant.
   - If you have already configured a tenant and would like to change it to another tenant, then you can do so by selecting **Change tenant**. Once you confirm to change the tenant, you are directed to the Microsoft Teams login page for changing the tenant.

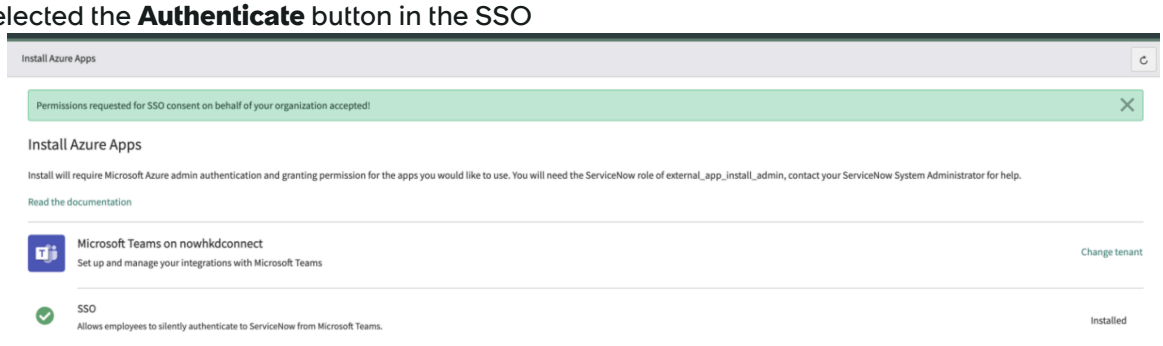
   After entering the tenant information, ensure that you have selected the **Authenticate** button in the SSO section.



6. After you have configured SSO, you must enter an APP ID.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

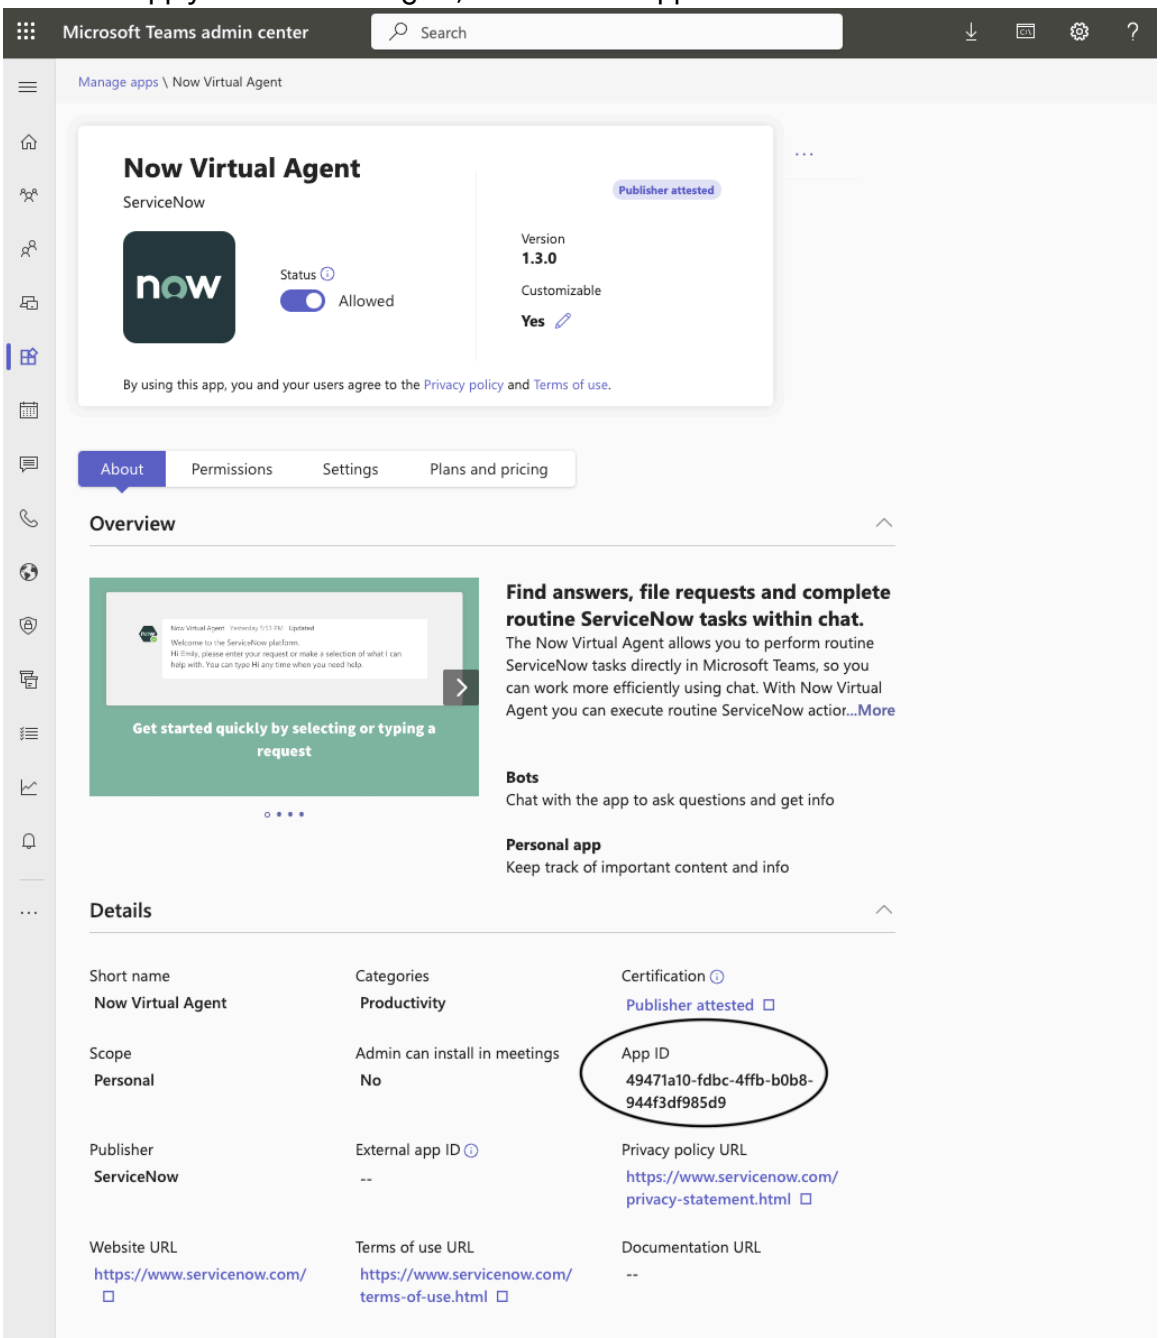To Find your APP ID, log into the Microsoft Teams admin center, navigate to **Manage apps**, select the app you'd like to configure, and fetch the app ID.



Note:
If you are using ServiceNow for Teams app, search for the app ID for ServiceNow for Teams and make sure not to use External App ID.

7. On the Link Authentication section, at **Step 2. Enter App ID**, enter the app ID that you fetched from your Microsoft Teams admin center, and select **Save**.
You receive a confirmation that your app ID has been saved successfully. You notice that the status of against SSO is green.

Configuring smart links in Microsoft Teams

Configure smart links for your Virtual Agent app in Microsoft Teams to enable different link opening experiences.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

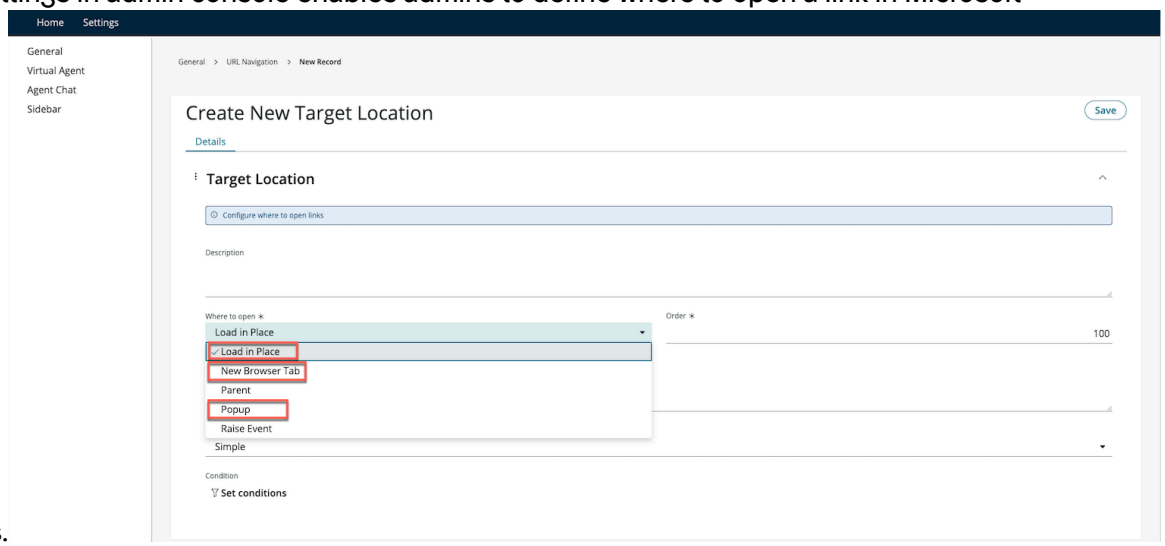
Smart link settings in the admin console enable admins to define one of the three link opening options in Microsoft Teams.

1. Microsoft Teams task module/pop-up
2. Microsoft Teams tab
3. New browser tab

Through link authentication and Single Sign-On (SSO) support, link content can be rendered in a pop-up, Microsoft Teams tab, or a new browser tab.

You can configure smart links for Microsoft Teams from the URL navigation system action under **Target Location**. For more information about configuring smart links, see Create a smart link preference.

There are three valid link opening options that are applicable to Microsoft Teams and the smart link settings in admin console enables admins to define where to open a link in Microsoft Teams.



1. **Load in Place**: Links open inside a Microsoft Teams tab.

   Note:

   - Only ServiceNow links are supported currently.
   - While **Load in Place** is always an option for admins to choose from, this functionality is only supported when admins have already installed an additional tab within Microsoft Teams (for example, Employee Center tab as part of the ITSM/HR plugins).
   - Admins must ensure that the following steps are complete:
     - MS Teams - App Core (com.snc.msteams.app.core) plugin is installed as part of ITSM/HR plugins and additional tab has already been enabled.
     - The *sn_va_teams.view_msft_tab* system property is set to true.
     - The link authentication status on your ServiceNow instance is green.

2. **New Browser Tab**: Links open in a new browser tab (a new tab in Google Chrome, Safari, etc.).
3. **Popup**: Links open in a pop-up/task module in Microsoft Teams. When pop-up is selected, admins also have the option of selecting a pop-up size of Small, Medium, or Large. The default size is Large.

   Before you start configuring pop-up using Target location, double check that the value of *sn_va_teams.view_non_video_msft_task_module* system property is **true**. When the link authentication status is active from the previous step, the value is automatically set to

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

true. When this system property is true, you can use the pop-up. If you want to disable pop-up in Microsoft Teams, you can manually set this property to **false**.

Note:
Only ServiceNow links are supported currently.

When no conditions are specified on the Target Location record, the valid link opening mechanism applies to both chat widget and Microsoft Teams in a way that makes sense to its host application. For example, if admins specify a URL pattern to be opened using **Load in Place** without any conditions, the link on chat widget opens by refreshing the topmost browser frame (chat widget's unique behavior). However, the same link opens in a Microsoft Teams tab.

If both chat widget and Microsoft Teams are valid channels for the customer, then admins can define different target locations for each channel by specifying the device type in the condition field (such as Teams and mweb). If the device type is specified as Teams and no other device types are specified, then that particular target location record will only be applied in Microsoft Teams.

Installing Microsoft Teams for all Virtual Agent users

Pre-link your Virtual Agent requesters to a ServiceNow instance before they run the Conversational Integration with Microsoft Teams. Batch pre-linking enables your Virtual Agent users to immediately chat with a virtual agent and receive notifications without going through the initial authentication linking process.

Before you begin

Note:
In order to send notifications to users, the app must be installed to all users. The recommended approach for installing the app to users is Microsoft Teams App Setup Policy. When a user gets added to the policy, Microsoft will install the app to the user, and send us an `installationUpdate` event. When the event is received, the conversation with the user starts and contains the welcome message.

To install the app otherwise, use the following directions.

- Install Conversational Integration with Microsoft Teams, with the **Automatically Link ServiceNow user profiles** option enabled.
- Set up Microsoft Teams Graph spoke.
- Set up Microsoft Active Directory spoke.

Roles required:

- virtual_agent_admin
- external_app_install_admin
- One of the following Microsoft Teams administrator roles:
  - Global Administrator
  - Application Administrator
  - Cloud Application Administrator
- admin or schedule_admin to change the scheduled job script

About this task

When the **Automatically Link ServiceNow user profiles** option is enabled on the Settings page of the Manage Microsoft Teams channel, a batch of up to 10,000 users is automatically pre-

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

linked to a ServiceNow instance. Your existing users are pre-linked during the initial run. Newly added users are pre-linked during subsequent daily runs.

To prevent automatic batch pre-linking, disable the **Automatically Link ServiceNow user profiles** option on the Messaging Apps Integration UI page.

Batch pre-linking of your Virtual Agent users to a ServiceNow instance before integrating with Microsoft Teams includes the following benefits:

- Notifications are proactively sent by Virtual Agent to users when their identity in Microsoft Teams is associated with their identity in a ServiceNow instance. This is also true when the user is already linked with ServiceNow Virtual Agent.
- If a user is pre-linked, and when Microsoft Teams notifications are enabled in the app, notifications are pushed to the app even when a user is not logged into a Microsoft Teams account.

Batch pre-linking happens automatically via the **MS Teams Daily Pre Install Job** scheduled job. This job runs by default daily at 1:00 a.m., but you can change the time, if desired. To modify the default scheduled job run time or time zone, access the **MS Teams Daily Pre Install Job** Scheduled Script Execution form.

Procedure

1. Navigate to **All** > **System Definition** > **Scheduled Jobs**.
2. Search for the **MS Teams Daily Pre Install Job** scheduled job and select to open the Scheduled Script Execution form for the selected record.
3. In the **Run** field, change the run time to your desired time.
4. For a description of the other fields that you can change in this form, including **Time zone**, see Automatically run a script of your choosing.
5. Select **Save**.

What to do next

You can also customize the auto-linking process for Conversational Integration with Microsoft Teams. For more information, see Customize auto-linking for Conversational Integration with Microsoft Teams.

Activate Now Assist in Virtual Agent for Microsoft Teams

Add Now Assist in Virtual Agent to your Microsoft Teams and Microsoft Copilot bot.

Before you begin

Role required: admin or virtual_agent_admin

Create a self-configured bot for Microsoft Copilot. For more information, see Setting up the Self-configured bot for using Microsoft Copilot.

Note:
Ensure you've updated the version of your Microsoft Teams app in the **Version** field.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Assistants**.
2. Select **Now Assist in Virtual Agent (default)**.
3. Under the **Display experience** tab, select **Channels**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Choose the self-configured bot for the Teams channel experience you want to activate by selecting the **Select row** check box next to its name.
5. Select **Save and continue**.
6. Navigate to **All** > **Conversational Interfaces** > **Channels and Integrations**.
7. Under Integrations, in the Microsoft Teams tile, select **Manage**.
8. In the Self-configured tile, next to your bot's name, select the **Manage bot** icon ( ), and then select **Manage bot** from the drop-down menu.
9. Select **Edit configuration**, and then select the check box next to **Copilot**.

   Note:
   The **Copilot** option will be a **Message extension** option instead if you haven't selected the matching bot in Step 4.

10. Select **Save**.
    The bot is now active for Copilot, and the bot's Configuration tab opens.
11. Select **Download** to save the manifest zip file.

What to do next

Upload the manifest to Microsoft Teams to make your bot experience available in the Microsoft global apps store, which will also activate the Custom Engine Agent (CEA) in Microsoft Copilot. For more information, see Upload the manifest package file to publish your bot.

Customize auto-linking for Conversational Integration with Microsoft Teams

Customize auto-linking for user profiles by defining the email Id of the user in any custom table rather than just the User [sys_user] table.

Before you begin

- Make the User [sys_user] table extensible.
- Create a custom table with custom email fields extending the User [sys_user] table.
- Ensure that the scope of the custom table is Microsoft Teams, or else, create a cross scope privilege.
- Populate the system property in the *table_name.column_name* format.

Role required: admin

About this task

The auto-linking process searches the user table for the email ID and if found, links the user to the profile automatically. You can also customize the auto-linking process by defining the email Id for auto/pre-linking in any custom table rather than the current User [sys_user] table. You can customize the auto-linking process of user profiles by using the *sn_va_teams.auto_link_email_attribute* system property that defines the column from which the email ID of the user must be read for auto-linking.

Note:

- By default, the value of the system property is empty. If it is set to <empty>, then the email Id for the user is fetched from the [sys_user] table.
- If the value of the system property is specified in the format of *table_name.column_name* (both table_name and column_name must be the physical names from their respective name fields), then the value is read from the column name specified. For example, **sn_va_teams_extendeduser.u_custom_mail**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. In the navigation filter, enter `sys_properties.list`.

   The entire list of properties in the System Properties [sys_properties] table is displayed.

2. Search and open the *sn_va_teams.auto_link_email_attribute* system property.
3. Provide a value in the format of *table_name.column_name* and save the record.
   Once the record is saved, you can initiate the conversation with the bot.

Configure promoted topics for Conversational Integration with Microsoft Teams

Configure promoted topics to push out important, common topics for users' quick consumption during a conversation with the Microsoft Teams bot. You can configure up to six different promoted topics to be displayed on the Microsoft Teams channel greeting message.

Before you begin

Role required: admin or va_admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Virtual Agent**.
2. In **Virtual Agent settings** under **Custom greetings and setup**, select **View All**.
   The promoted topics that you have previously configured will reside in the default chat experience. For more information, see Configure a Virtual Agent chat experience. If default chat experience is the only row that you have on your instance, then you observe that the promoted topics will be applied to chat widget, Microsoft Teams, and Slack (unless you configure something unique for Microsoft Teams as instructed below.)

   If you want to set up unique promoted topics for Microsoft Teams that have to be different from the chat widget, follow the procedure below.

3. In the Custom Greetings & Setup page, select **New**.
4. On the form, fill in the fields.

Create New Custom Greetings and Setup

Field	Description
Name	Name of the chat experience. For example, Microsoft Teams chat experience.
Description	Description of the chat experience.
Active	Enable or disable the chat experience.
Order	Order for the promoted topics to appear on the chat.
Domain	Application scope of the chat experience.
Condition Mode	Situation where your user gets this chat experience. Available Conditions Modes: ○ **Advanced** ○ **Simple**

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Condition	Condition that defines the condition mode for the chat experience. Set up a simple condition with **[devicetype] [is] [teams]**. **Note:** If you set up **[devicetype] [is] [teams]** in the Condition pop up with a higher order than the default chat experience, then Microsoft Teams picks up the setup topics and promoted topics defined in this experience. This change will not affect chat widget, which is still going to inherit the setup topics and promoted topics defined in the default chat experience.

5. Select **Create custom experience**.
6. Add promoted topics in the Microsoft Teams chat experience form that you created.

   a. On the Microsoft Teams form, select the **Promoted Topics** tab, and select **Add topic**.

   b. On the form, fill in the fields.

   Create New Promoted Topics

Field	Description
Topic	Name of the topic being chosen. Use the Search icon to choose a topic.
Order	Provide the order for the topic chosen.

   Note:
   Similar to chat widget, you can configure a maximum of six promoted topics for the Microsoft Teams channel.

   c. Selecto **Save.**

What to do next

Start a conversation with the Microsoft Teams bot and you should be able to see the promoted topics after the greeting message that you have setup for the Microsoft Teams channel.

In you have not configured the promoted topics for Microsoft Teams, then the promoted topics from the default chat experience are displayed.

Configure Microsoft Teams Message Extension

Configure Microsoft Teams Message Extension to enable users to use AI Search to find content (Knowledge articles and catalog items), and share information in a one-on-one or group chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For the base system Virtual Agent integration with Microsoft Teams, this feature is enabled by default.

Before you begin
Role required: admin

About this task
Administrators have the option to configure the number of search results that appear in Message Extension and control the access level of a Guest user.

Procedure

1. Navigate to **All** > **AI Search** > **Search Experience** > **Search Applications** to configure the number of search results that appear in Message Extension.
2. In the **Search Results Limit** field, adjust the number of search results that you want to appear in Messages Extension, and then select **Update**.
   Message Extension then generates the new results limit when a user performs a search if AI Search is able to find that number of results. For example, a limit may be set to 8 but if AI Search only finds 6 results, then 6 items are shown.
3. Navigate to **All> System Properties> All Properties** and select *`message_extension_guest_access_only`* to control the access of the Guest user. When the flag is set to true, Message Extension returns the results that are only visible to the Guest users. Only the items that are publicly available are returned while the property is set to true. By default, this value is set to false, which means that a user can see all search results that they have access to. However, if you set the system property value to true, a user can only access the search results that are publicly available. This system property is useful if you want to avoid having a user accidentally sharing something that they shouldn't be sharing. You don't typically have to change the value. For self-configured bots, see the procedure in Auto-generate the manifest file for uploading on Microsoft Teams for more information.

Configure Microsoft Azure Conditional Access for Microsoft Teams tenant

You must configure conditional access in Microsoft Azure to restrict users from accessing the production applications. Conditional access helps you from accidentally overriding your production integration with a custom or personal instance integration.

Before you begin
Roles required: virtual_agent_admin and user with Azure admin access.

Procedure

1. Log in to Microsoft Azure portal.
2. Search for **Azure AD Conditional Access**.
3. Navigate to **New Policy** > **Create New Policy** and provide the policy a name.<p>

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

New ...

Conditional Access policy

Control access based on Conditional Access policy to bring signals together, to make decisions, and enforce organizational policies.
Learn more

Name *

Example: 'Device compliance app policy'

Assignments

Users or workload identities ⓘ

0 users or workload identities selected

Cloud apps or actions ⓘ

No cloud apps, actions, or authentication contexts selected

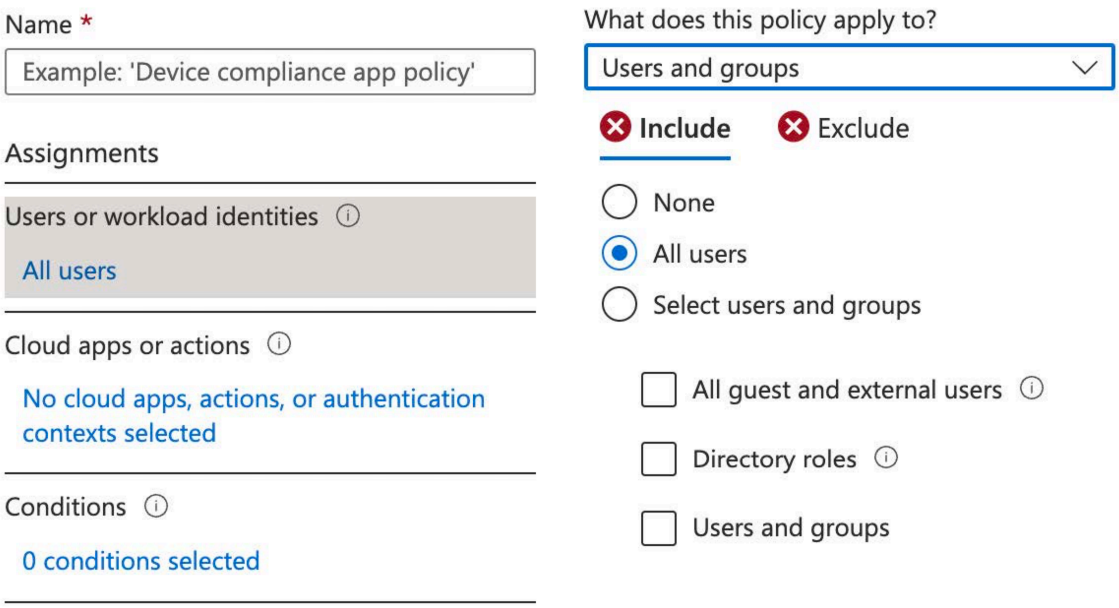
Conditions ⓘ

0 conditions selected

Access controls


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Under Users or Workload identities, select **0 users or workload identities selected**.
   A **What does this policy apply to?** pop-up is displayed.
5. Under Include, select **All users**.



Note:
Selecting All users will include the users in the restriction policy.

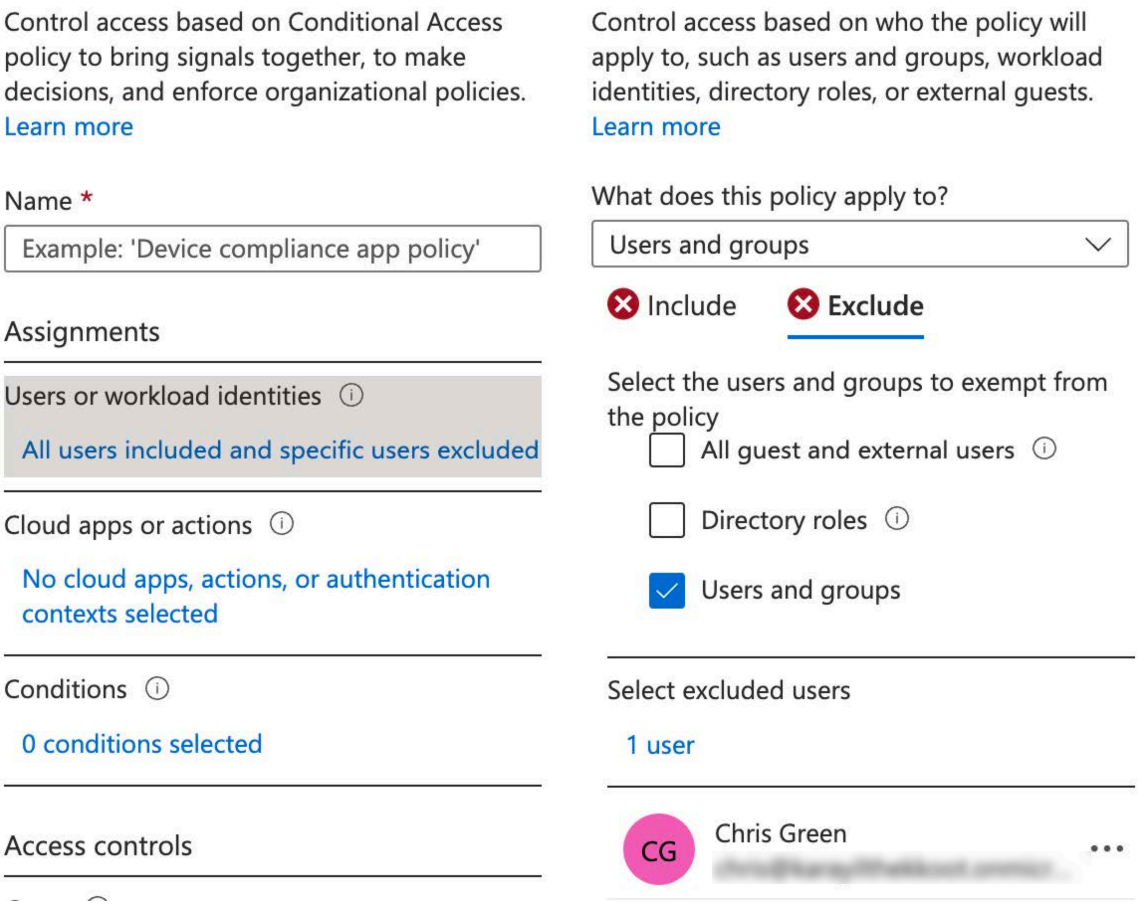6. Under Exclude, select **Users and groups** to exclude admin users who have access to override the tenant.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

7. Under Select excluded users, select **0 users and groups selected** to select an admin user and select **Select**.
8. Under Cloud apps or actions, choose which assets to protect.
   For example, the NowBot or whatever the name of the ServiceNow bot is in Azure.
9. Under Grant, select **0 controls selected** and select **Block access**.
10. In the Enable policy section, select **On** to turn on the Report-only function.
11. Select **Create**.
    After the ACL (Access Control List) is configured, it takes about 15 minutes fr the synchronization.

Result

After the policy is created and the synchronization is complete, it restricts any user except the admins from overriding the tenant accidentally.

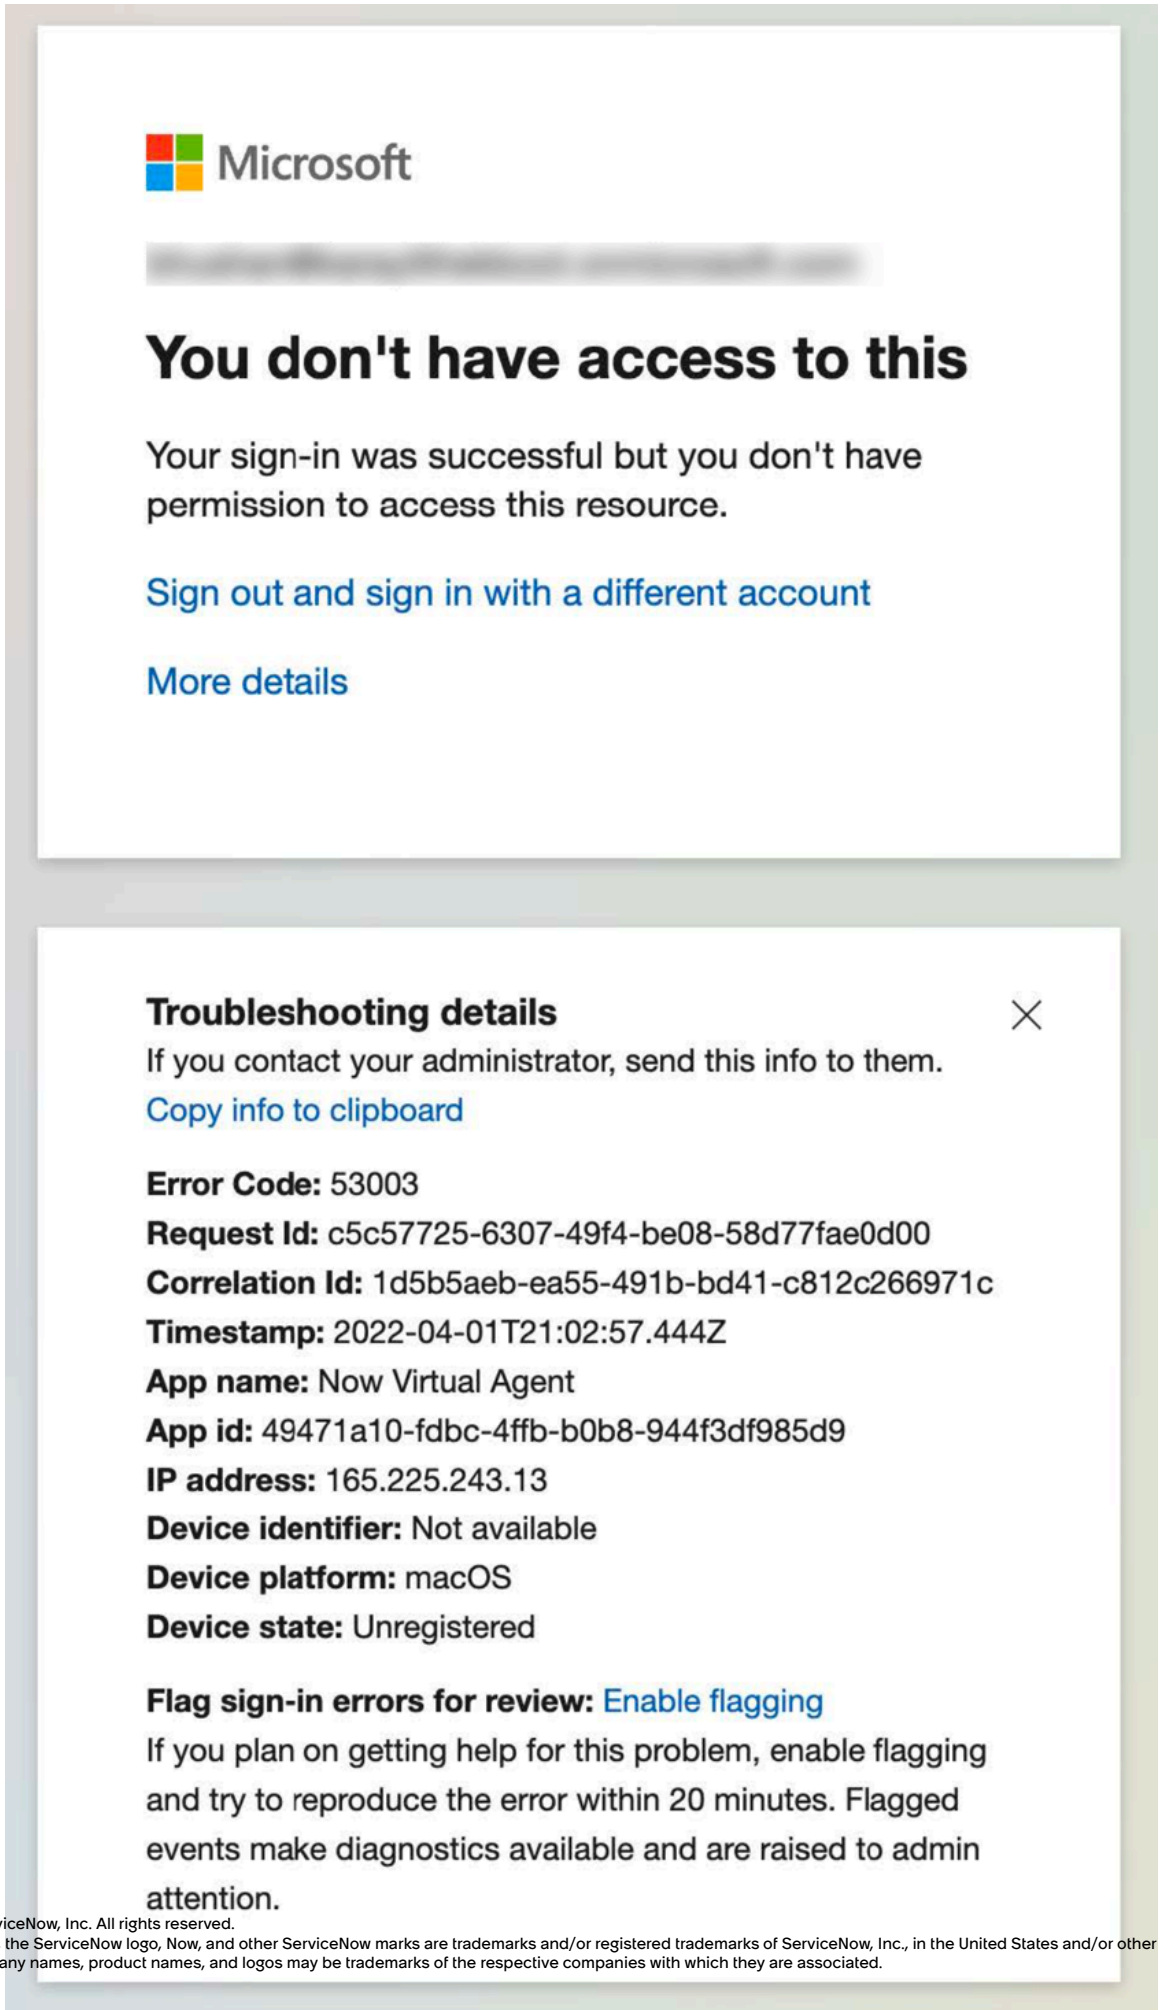© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The restriction does not affect the restricted users from using the Microsoft Teams or the Now Virtual Agent.

Set up your language preferences for the Virtual Agent integration with Microsoft Teams

Set language preferences so that Virtual Agent is in the same language as the user's preferred Microsoft Teams language.

Before you begin
Role required: admin

About this task
You set the Microsoft Teams language preference in the Microsoft Teams client. The ServiceNow language is the language that is typically used in the ServiceNow instance. By default, a user's Microsoft Teams language preference takes precedence over the user preference language of the base system if both languages are different. For more information, see Change Settings in Microsoft Teams.

To ensure consistency, use the same language. If the user preference language in Microsoft Teams isn't an available language in the ServiceNow instance, then the instance language is the default language.

Procedure

Change which language takes precedence by configuring the following system property for users: *sn_va_teams.use_teams_language*.

Localize the bot messages

Localize the bot messages to receive them in a language of your choice during your conversations with the bot.

Before you begin
Role required: virtual_agent_admin

Procedure
1. Navigate to the provider channel identity record of your bot and select the **Bot Messages** tab.

   Confirm that the values for those bot messages are accurate.

2. Navigate to the Messages [`sys_ui_message.list`] table and select **New**.

   Note:
   Before creating a new message, ensure that the message you want to create is not already created.

3. On the form, fill in the details.

New Message record

Field name	Description
Key	Message for the record. Make sure that this matches with the bot message value in step 1. If you want to create multiple translations

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field name	Description
	for the same message in different languages, add each translated message individually.
Language	Your preferred language for the conversation/ message.
Message	The equivalent of the key message translated into your preferred language.

4. Select **Submit**.

Result
Start a new conversation with the bot. You will notice that the translated message is displayed by the bot in user's preferred Microsoft Teams language, if you have already provided the translation for that language.

Using Now Assist in Virtual Agent conversations with Microsoft Teams

The Now Assist provides you with the large language model (LLM)-based conversational experience during your conversations with a Now Virtual Agent bot or a Self-configured bot that is integrated with Microsoft Teams.

To enable a bot with LLM-based capabilities and experience the LLM-based conversations with the Now Assist, you must first integrate your Now Virtual Agent bot or a Self-configured bot with Microsoft Teams.

Integrating Microsoft Teams with Virtual Agent

You can integrate Virtual Agent with Microsoft Teams either with your Now Virtual Agent bot or the Self-configured bot.

To integrate Microsoft Teams with the Now Virtual Agent, see Integrating ServiceNow Virtual Agent with Microsoft Teams.

To integrate Microsoft Teams with a Self-configured bot, see Integrating Virtual Agent with Microsoft Teams using the self-configured bot.

Conversational experience with Now Assist in Microsoft Teams

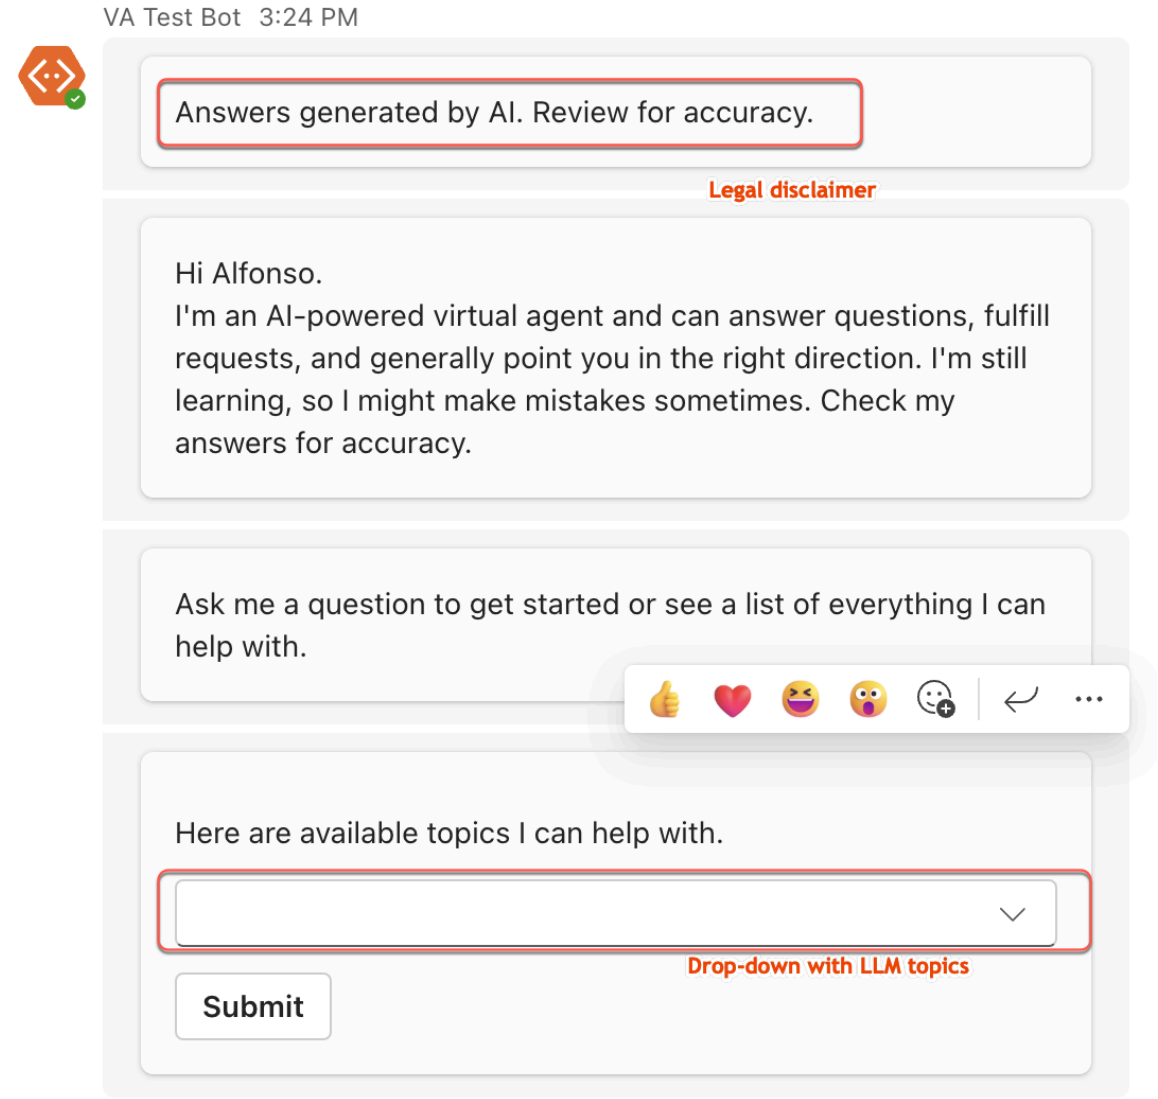
The Now Assist provides a new AI Search experience in channels with the following features:

- **Legal Disclaimer**


  The first message in a conversation with Now Assist displays a legal disclaimer indicating that it is an AI-generated message followed by the Now Assist greeting message and LLM-enabled topics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Legal Disclaimer



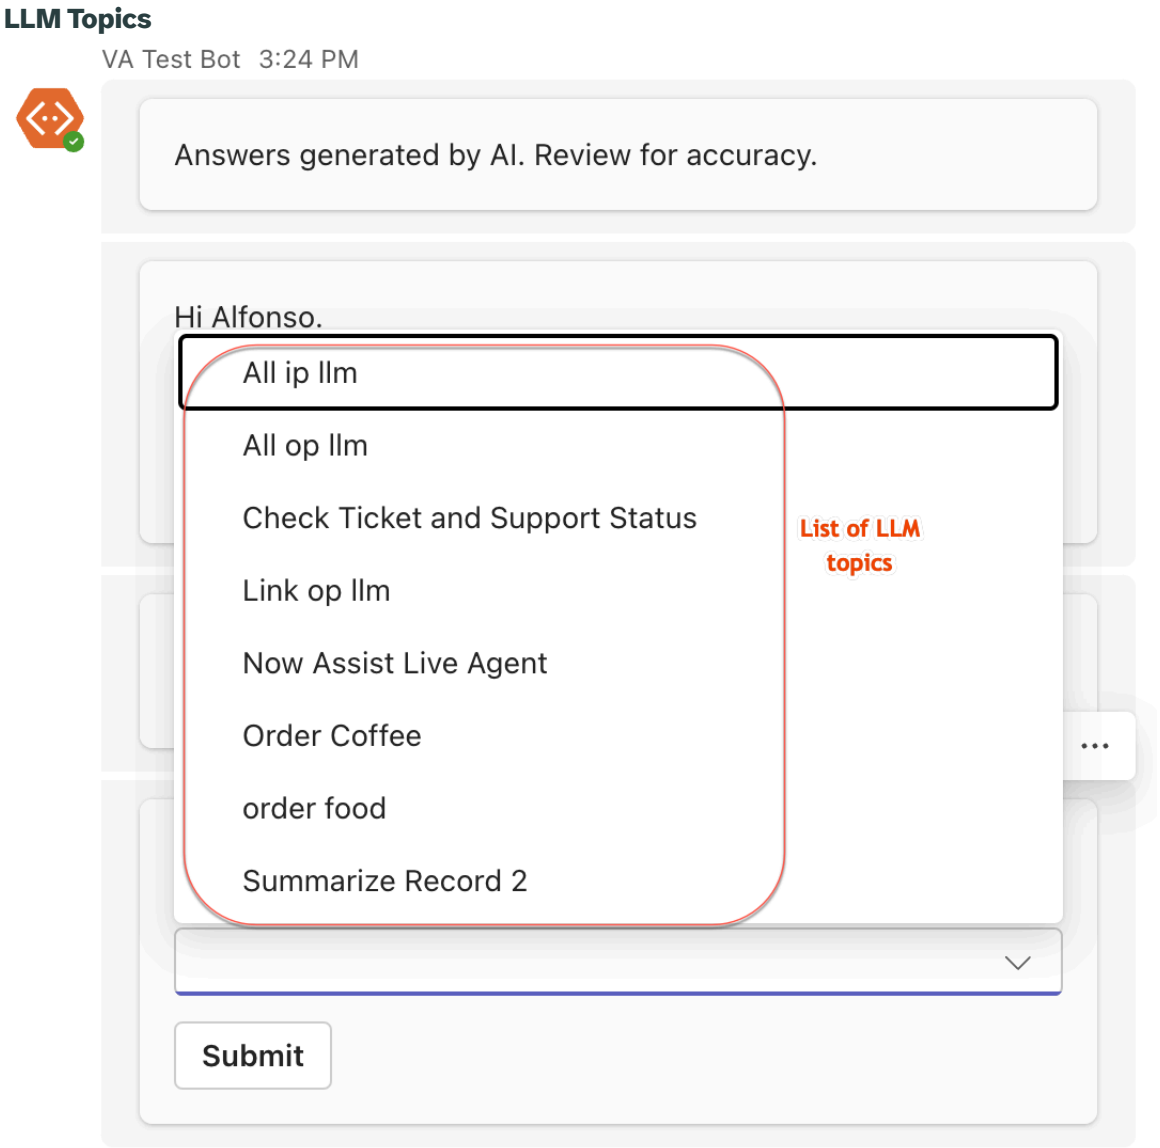© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




- **Pagination and Search**

  You can navigate through multiple pages of choices and search for specific items or users, using the Search bar.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

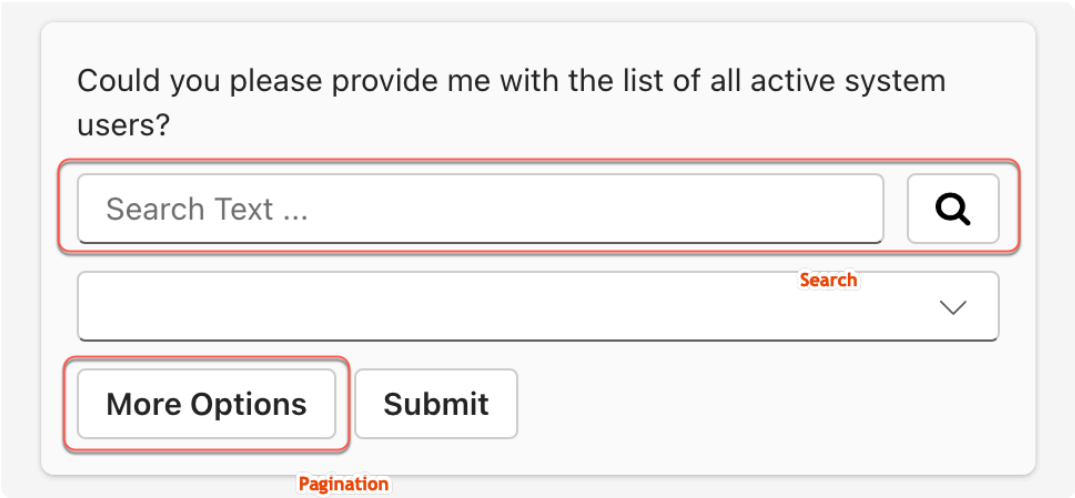Pagination and Search



When you select an LLM-enabled topic, the Search bar is displayed along with the available choices related to the selected topic and the **More options** button. You can either search for an item or user using the Search bar or pick an item or user from the available choices. If you want to look for more available options, you can navigate to the next page using the **More Options** button. If you would like to go back to the previously listed choices, you can use the **Previous Options** button.

If you have searched for a user or an item, the choices related to your search term are displayed. You can either select from the choices available or reset the search and pagination.

Tip:
You can reset the Pagination and Search by selecting Enter in the Search bar.

The Pagination and Search capabilities are managed by the following provider properties:

- *`picker_pagination_experience_supported`*: Enables the pagination experience in your LLM conversations with Now Assist. The default value of this property is **true**.
- *`picker_pagination_limit`*: Sets the page limit value for an adapter for displaying the choices. The maximum page limit value that can be set for an adapter is **100**.

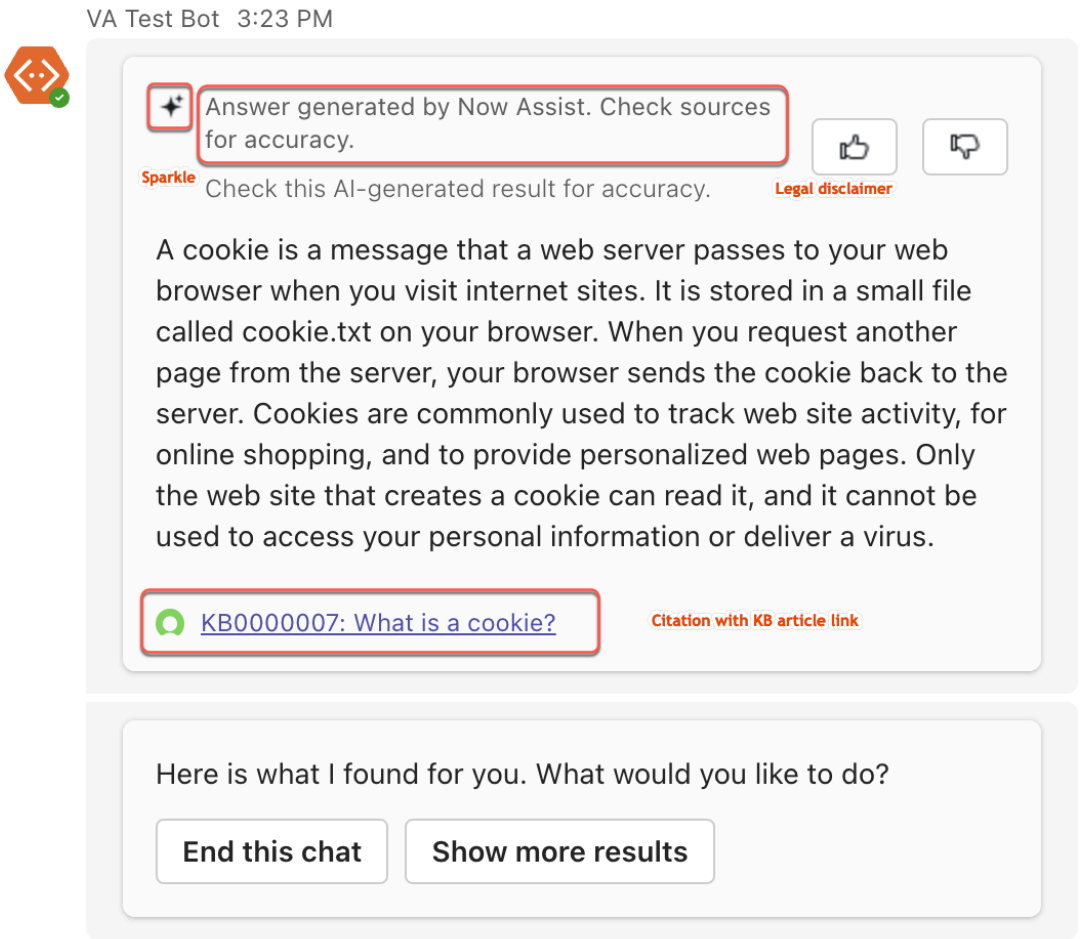
  For example, if a topic has fewer than 100 choices available and the limit is set to 100, then the **More Options** button is not displayed. If a topic has more than 100 choices available when the limit is to 100, then the **More Options** button is displayed.

- **Generative AI QnA card**

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use this feature to ask questions and get answers from Now Assist through LLM in a card format. The response is displayed with a sparkle image, the legal disclaimer, and the citation about the question asked.

Generative AI QnA Card



For more information about enabling LLM for your bots integrated with Microsoft Teams, see Enable Now Assist in Virtual Agent for Microsoft Teams.

Enable Now Assist in Virtual Agent for Microsoft Teams

Enable the large language model (LLM)-based conversational experience with Now Assist in your Virtual Agent integrated with Microsoft Teams.

Before you begin

Ensure that you enable AI Search to have Now Assist conversations using the Now LLM Service. For more information about enabling AI Search, see Enable AI Search for Next Experience.

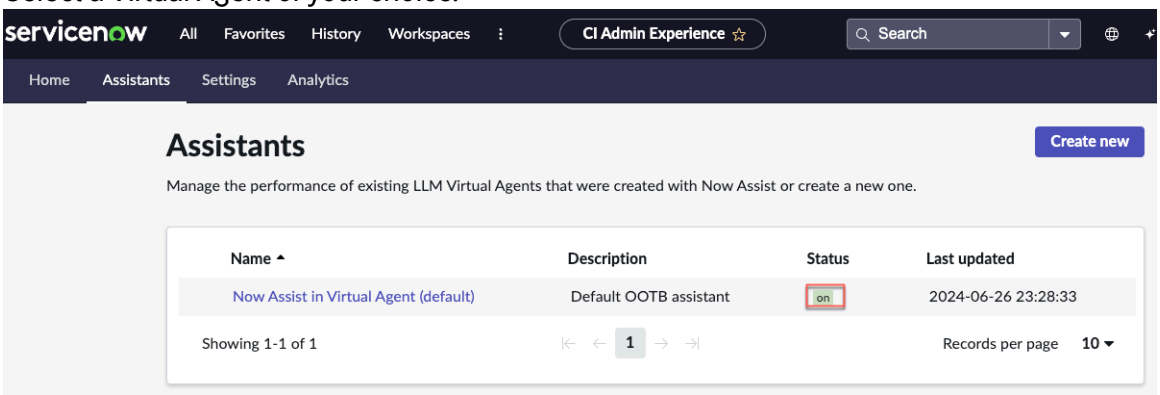
Role required: admin

Procedure

1. Log in to your ServiceNow instance and navigate to the Now Assist Features page through one of the following navigation paths:
   - **All** > **Now Assist Admin** > **Now Assist Features**.
   - **All** > **Now Assist Admin** > **Features**.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

2. From the Now Assist Features page, select **Platform**.
3. On the Now Assist skills for Platform page, select **View details**.
4. On the Conversational experience page, select **Set up Now Assist in Virtual Agent**.
   You are directed to the Assistants page to select the Virtual Agent. For example, the **Now Assist in Virtual Agent (default)**.
5. Select a Virtual Agent of your choice.



> **Note:**
> Verify that the Virtual Agent you choose is integrated with the Microsoft Teams tenant before selecting.

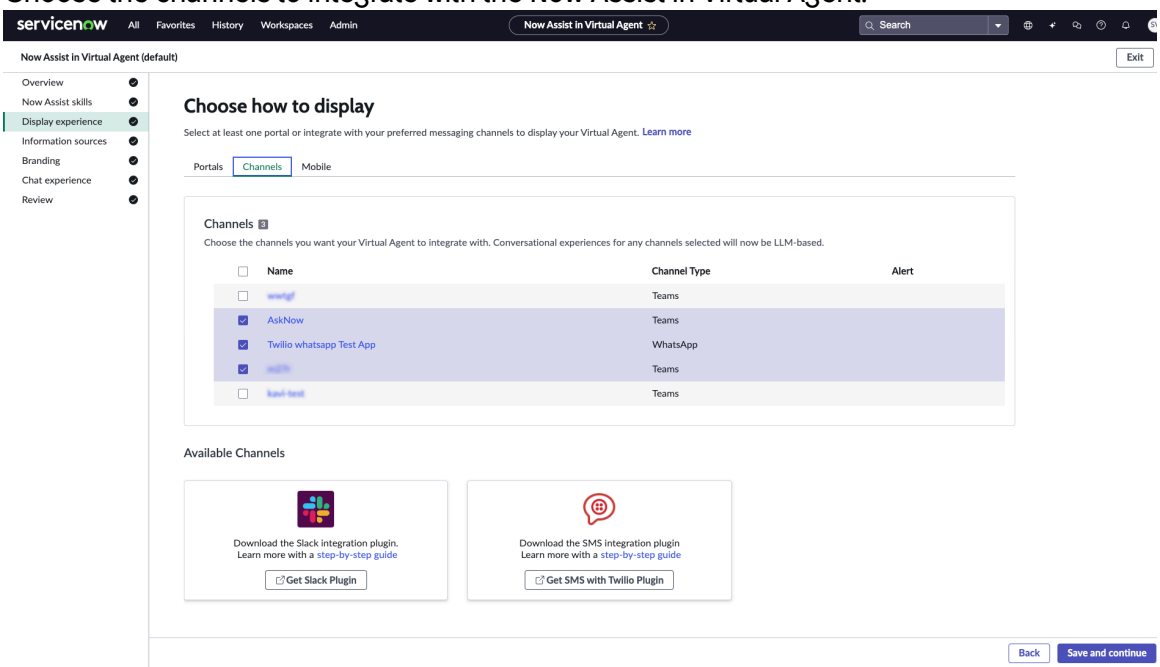6. On the bot page, navigate to **Display experience** > **Channels** from the pane.
7. Choose the channels to integrate with the Now Assist in Virtual Agent.



8. Select **Save and Continue**.

Integrating Now Assist in Virtual Agent with Microsoft Copilot

Integrate your Now Assist Virtual Agent with Microsoft Copilot using Conversational Integration with Microsoft Teams to leverage the generative AI conversational experience.

The Microsoft Copilot integration uses the existing setup and configuration experience for Microsoft Teams through the Conversational Integration with Microsoft Teams application, because the primary use case for Copilot is an extension of Microsoft Teams.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The default Conversational Integration with Microsoft Teams plugin (sn_va_teams) automatically integrates with Copilot. For the integration to work automatically, verify that you have:

- The Xanadu version of the Conversational Integration with Microsoft Teams application installed and configured. If you have a previous version of the application, upgrade it to the Xanadu release.
- Either a Microsoft Copilot license or the free Copilot chat license.

  Note:

  - Before the integration, make sure that Copilot is enabled on your Microsoft Teams tenant.
  - No configuration changes are required on your ServiceNow instance to integrate with Microsoft Copilot.
  - There are no additional configurations required for Copilot.

- The Now Assist license and verify that the Now Assist in Virtual Agent is configured. For more information, see Configuring assistants overview.
- Enable the teams bot (the Now Virtual Agent bot or the Self-configured bot, which you would like to use for Copilot integration) for the Now Assist Conversations in the **All** > **Conversational Interfaces** > **Assistants** > **Display experience** > **Channels** section.

  After installing the Teams integration, it should appear in the Channels tab. Select the check box next to Teams integration and then select **Save and Continue**.

  For more information, see Configuring assistants overview.

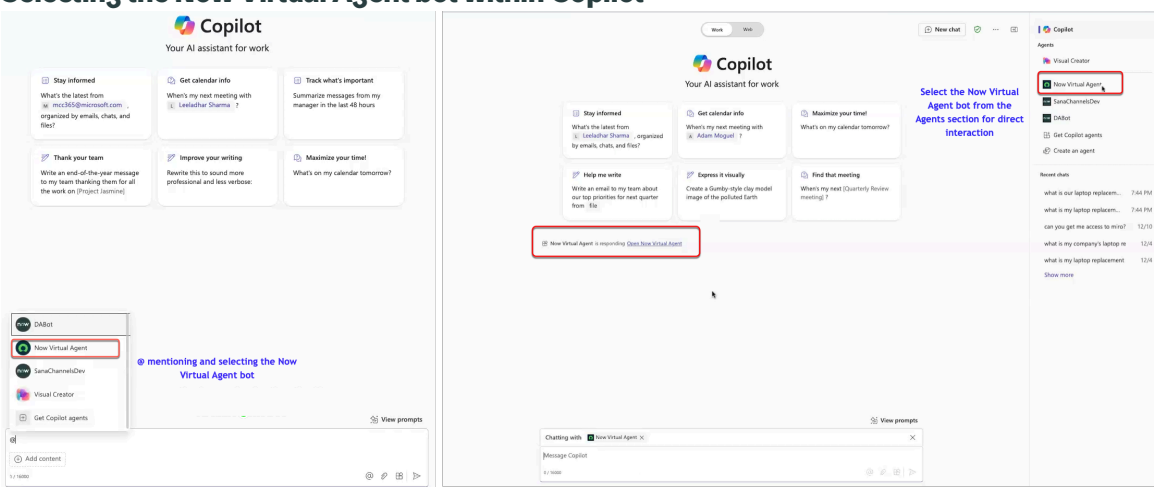
Integrate Microsoft Copilot with Now Virtual Agent bot

If you're using the default Now Virtual Agent bot, no additional setup is required. The process of integrating the Now Virtual Agent bot with Microsoft Copilot is similar to that of integrating the Now Virtual Agent bot with Microsoft Teams.

For more information, see Integrating ServiceNow Virtual Agent with Microsoft Teams.

To interact with the Now Virtual Agent bot within Copilot, you can either @-mention the bot name and invoke it or navigate to the Agents section on the right panel within Copilot to select it for direct interaction.

Selecting the Now Virtual Agent bot within Copilot



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The default Now Virtual Agent app that is compatible with Microsoft Copilot integration is available on the Microsoft Teams store for use.

Integrate Microsoft Copilot with Self-configured bot

Use your Self-configured bot to connect with Microsoft Copilot. The process of integrating the Self-configured bot with Microsoft Copilot is similar to that of integrating the Self-configured bot with Microsoft Teams. For more information, see Integrating Virtual Agent with Microsoft Teams using the self-configured bot.

The self-configured bot will support the latest Copilot CEA experience. The out-of-the-box production bot will continue to provide support until October 2025. For more information, see Setting up the Self-configured bot for using Microsoft Copilot and

Setting up the Self-configured bot for using Microsoft Copilot

Using your Self-configured bot with Microsoft Copilot for Now Assist conversations requires you to complete a few additional setup actions.

Note:
Custom Engine Agent (CEA) is replacing Declarative Agent (DA), the prior Microsoft Copilot integration. The CEA enables Virtual Agent to be discoverable by Microsoft Copilot, with full functional access to Now Assist in Virtual Agent and multi-turn conversations.

You must have version 10.1.1 or higher of the Microsoft Teams plugin to have CEA support. In version 10.2 of the Microsoft Teams plugin, streaming is inactive by default and CEA is active by default.

You can install the default Now Assist Virtual Agent bot from the Microsoft Teams app store. This bot deploys automatically, but you cannot customize its prompts or manifest description. You must still install the ServiceNow Microsoft Teams plugin from the ServiceNow app store.

For more information on Microsoft Teams and Now Assist in Virtual Agent installation and settings, see .

As of October 2025, streaming is active by default for both Teams and Copilot. Configurations are shared by Teams and Copilot, and both apps are linked to the assistant.

You can use the self-configured bot or the default version to install Microsoft Copilot integration. The default bot automatically deploys in Copilot. If you want to use a self-configured bot for Microsoft Copilot, complete the following additional setup:

- Provide the Self-configured bot a name while creating it. Providing a name for the bot improves the reliability of the bot responses within Copilot conversations.
- Activate your assistant in the Conversational Interfaces configuration page. For more information, see Configuring assistants overview.
- Enable Copilot integration with Now Assist in Virtual Agent. For more information, see Enable Now Assist experience in Virtual Agent API.
- Migrate any relevant topics to the Now LLM Service for Now Assist large language model (LLM) conversations with Copilot. To migrate your topics to LLM, you must enable LLM. For more information, see Migrate NLU topics to LLM topics.

  Note:
  After enabling LLM, you don't need to do anything specific for the Copilot as it pertains to LLM topics. As long as the Self-configured bot is discoverable by the LLM, it's also discoverable by the Copilot and verifies that the plugin or bot responds when it’s used.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Enable AI Search on your ServiceNow Now Assist instance to use Now Assist with Microsoft Copilot. For more information about enabling AI Search, see Enable AI Search for Next Experience.
- Update the following fields within the manifest file that is downloaded from Admin experience to configure the Self-configured bot and use it for the Copilot integration.

Note:
Update the semantic description field if you have any custom skills and make the Copilot LLM and orchestrator have the ability to discover a custom skill.

manifest.json changes for Copilot integration



- **Full Description**:
  - Update the bot name in the full description to your Self-configured bot name.

    Note:
    Update the bot name in all the instances in the full description. Updating the bot name helps Copilot to identify the bot that the request must be routed to.

  - Update the generic description that ServiceNow provides with a specific use case that you may have in your topics.

    For example, if you have unique LLM skills that accomplish scenarios unique to your environment, such as reserving a hotel desk or ordering food for a meeting, be sure to add that to your description so that Copilot will be able to recognize the skill and be able to process it.

- **View Prompts**: Add the prompts with your bot name.

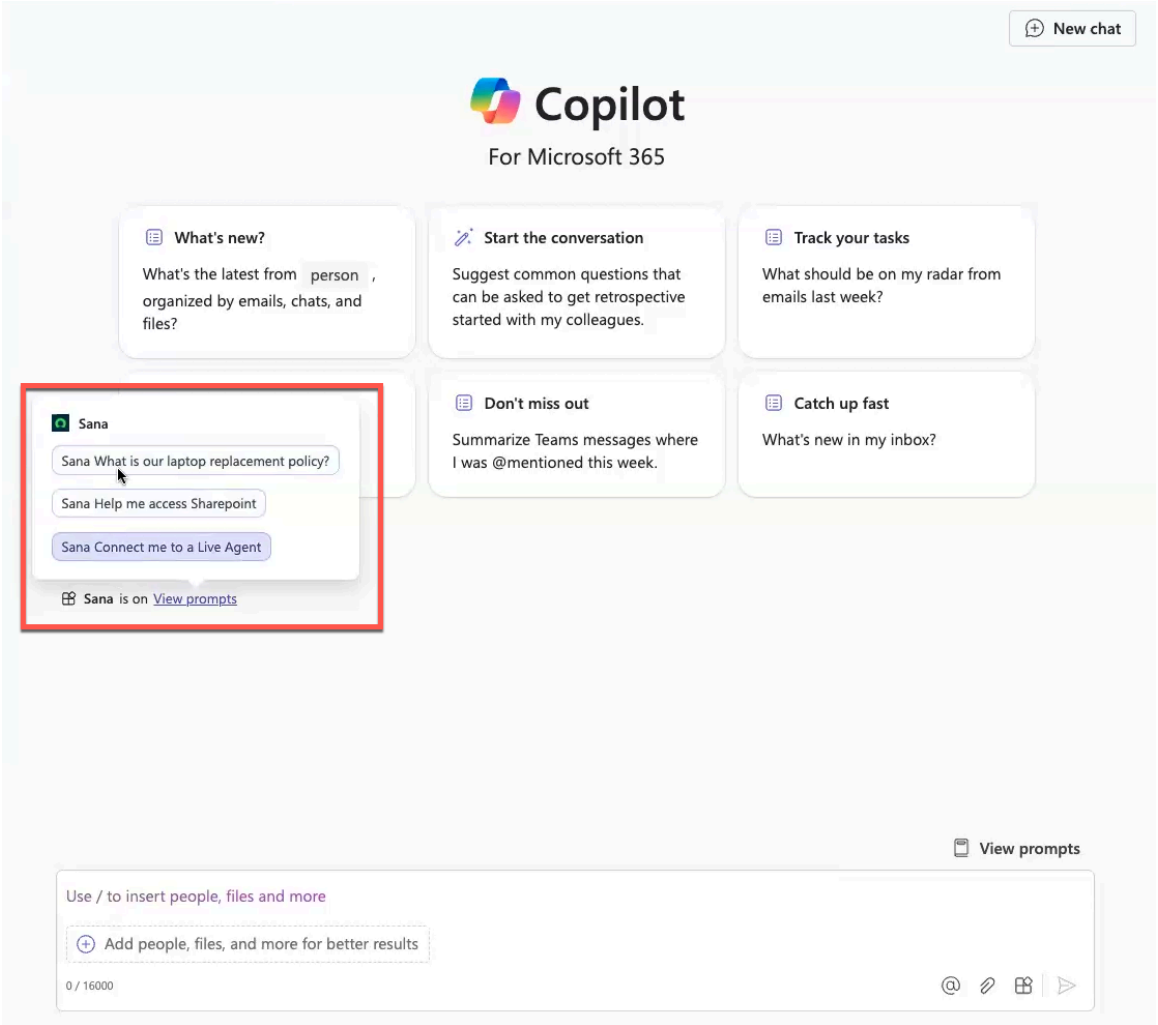
  Note:
  The JSON prompts aren't available in the manifest file by default. You must add them yourself and update the bot name with your Self-configured bot name.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
{
"Sana What is our laptop replacement policy?"
},
```

Note:
Updating the bot name on the prompt helps the utterance work with Copilot.

View Prompts



For more information, refer to App manifest scheme in the Microsoft Teams Developer documentation.

- Enable Message Extension for the Self-configured bot, generate the new manifest file, and upload it to Microsoft Teams.

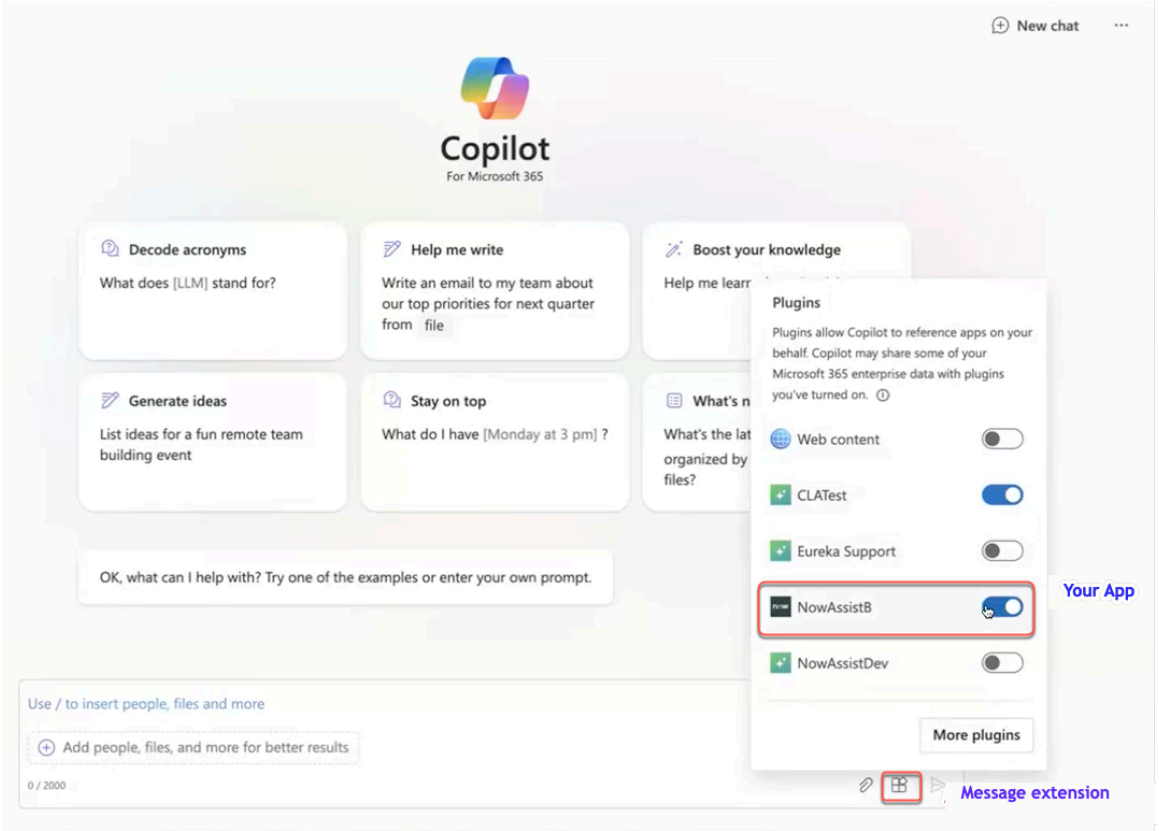
Message Extension in Microsoft Copilot Integration

The Microsoft Copilot integration is built on top of the existing Message Extension feature. For more information about enabling Message Extension for your bot on your ServiceNow instance, see Auto-generate the manifest file for uploading on Microsoft Teams.

When the message extension is enabled, you see the list of message extension-enabled apps when you select the Plugins icon ( ). You can select the app of your choice from the list of plugins.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Message Extension in Copilot



Note:
Users can update the manifest file to enhance the Copilot's Orchestration.

- Edit, customize, and enhance the bot behavior to meet your needs. For more information, see Guidelines to create or upgrade Copilot extensions.

Now Assist in Virtual Agent conversations with Microsoft Copilot

Use Now Assist plugins in Microsoft Copilot to connect with the Copilot by providing your bot or plugin name during your generative AI conversations.

Copilot Conversations

Now Assist and Microsoft Copilot demo
https://player.vimeo.com/video/1130994883?h=afa50aafbc&badge=0&autopause=0&player_id=0&app_id=58479

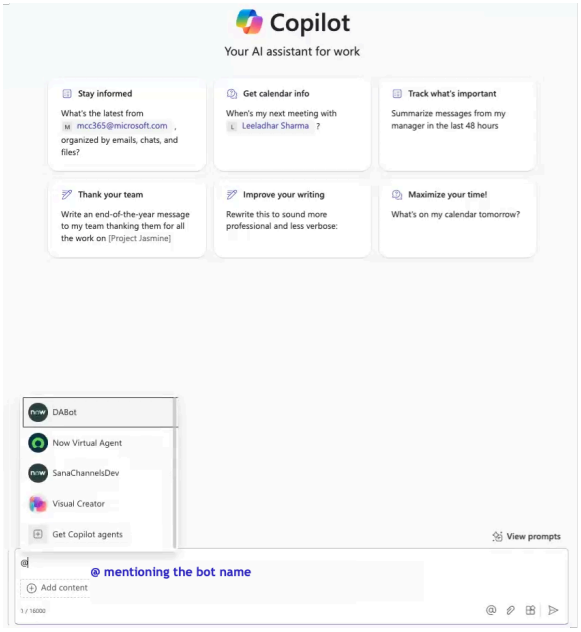
The Copilot integration doesn't follow a conversational flow like the Virtual Agent. It uses a non-conversational flow and provides synchronous responses with Now Assist that are primarily built on AI Search. Therefore, any search term that you input is passed to AI Search and the results are returned from AI Search. You're then able to render the response and share it as a card in Message Extension.

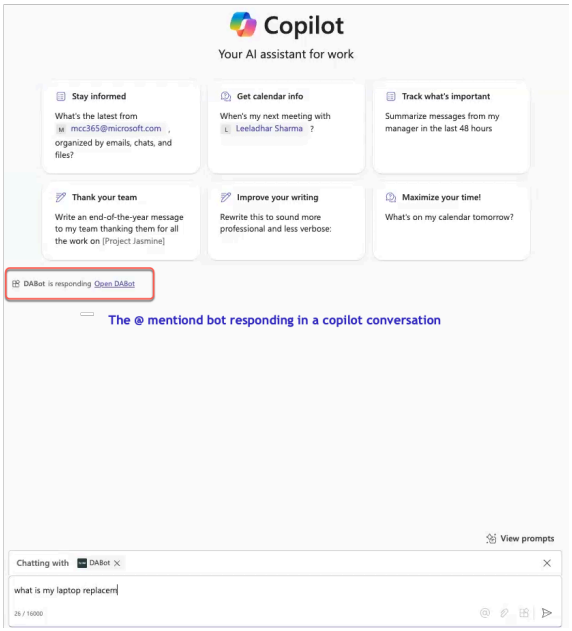
Sample prompts that you can use within Copilot:

- `What is my laptop replacement policy?`
- `Can you help me order a laptop?`


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To initiate a chat with Microsoft Copilot, you can @-mention the bot name and based on the input utterance, Copilot verifies that your request in the chat reaches the respective plugin's instance and a response is received.





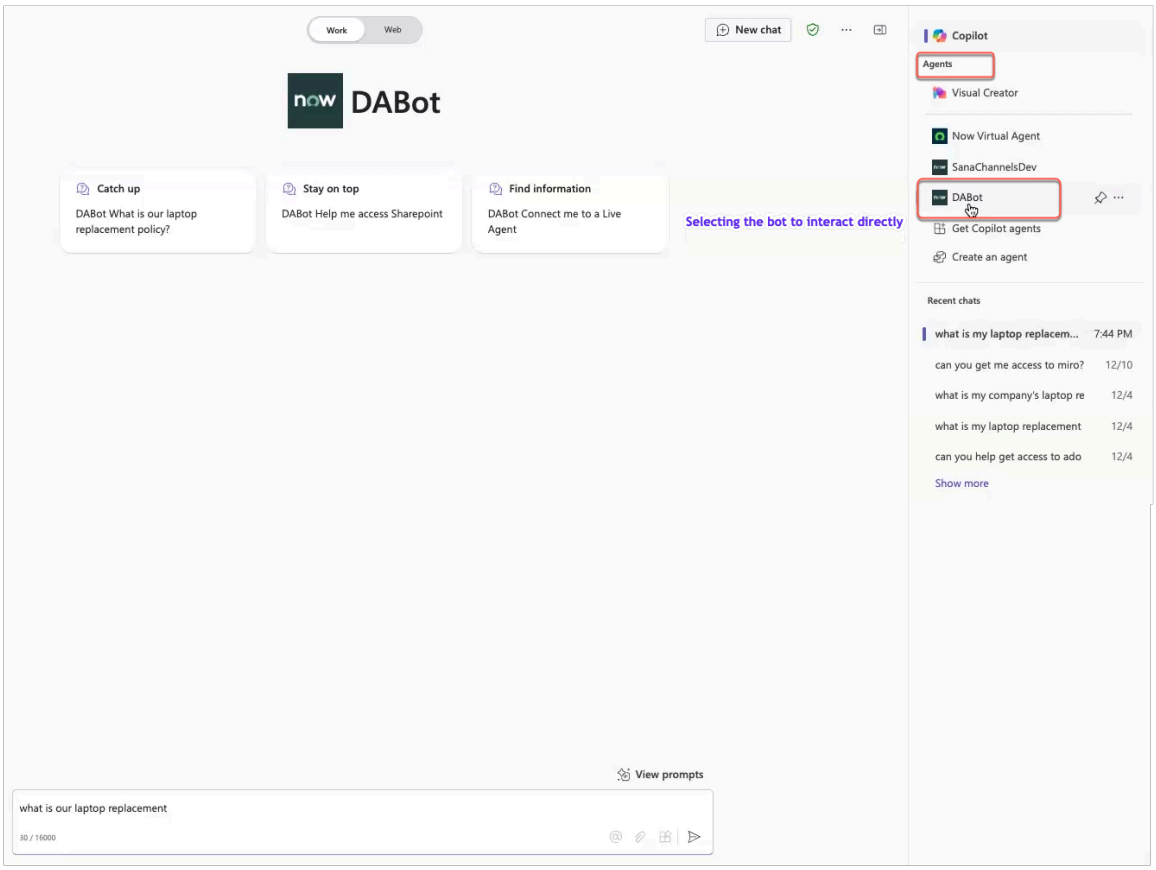You can also interact with the bot directly by selecting it from the Agents section on the right panel within Copilot instance. Interacting with the bot this way provides you with the same results or responses as you would receive them while you invoked it.




You can use Now Assist to search for Knowledge Base articles, catalog items, and so on, and it provides results based on your input for the search. For example, if you searched for iPhone,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

you're presented with the list of generative AI Search results. You can pick an item from the list and share it with the user of your choice. The user who receives the catalog item shared by you can view it by selecting **View item**.

Note:
You can configure the viewing experience of an item to either open it in a browser or within the Microsoft Teams tab if you're using Copilot only with your Self-configured bot.

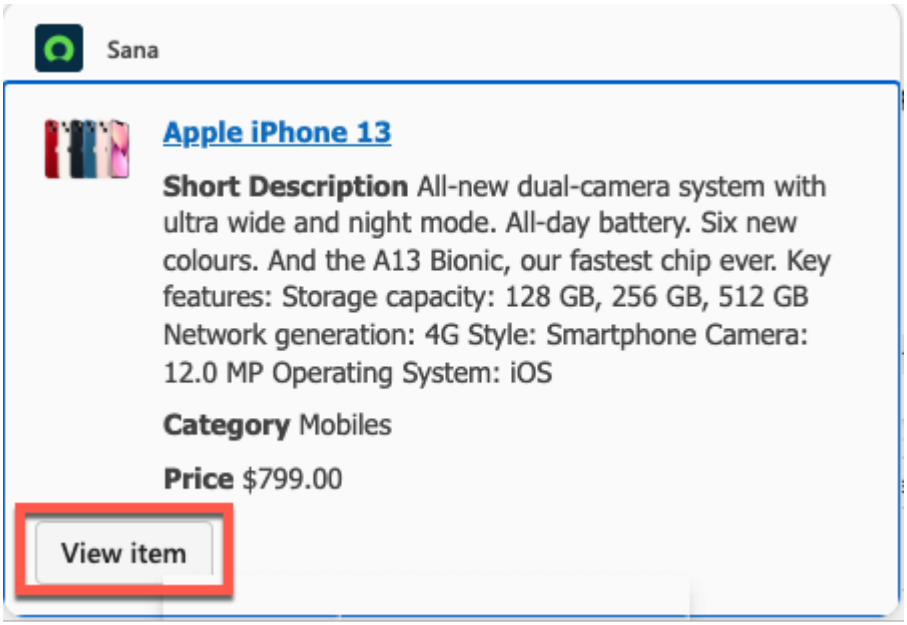View item



Now Assist capabilities in Copilot

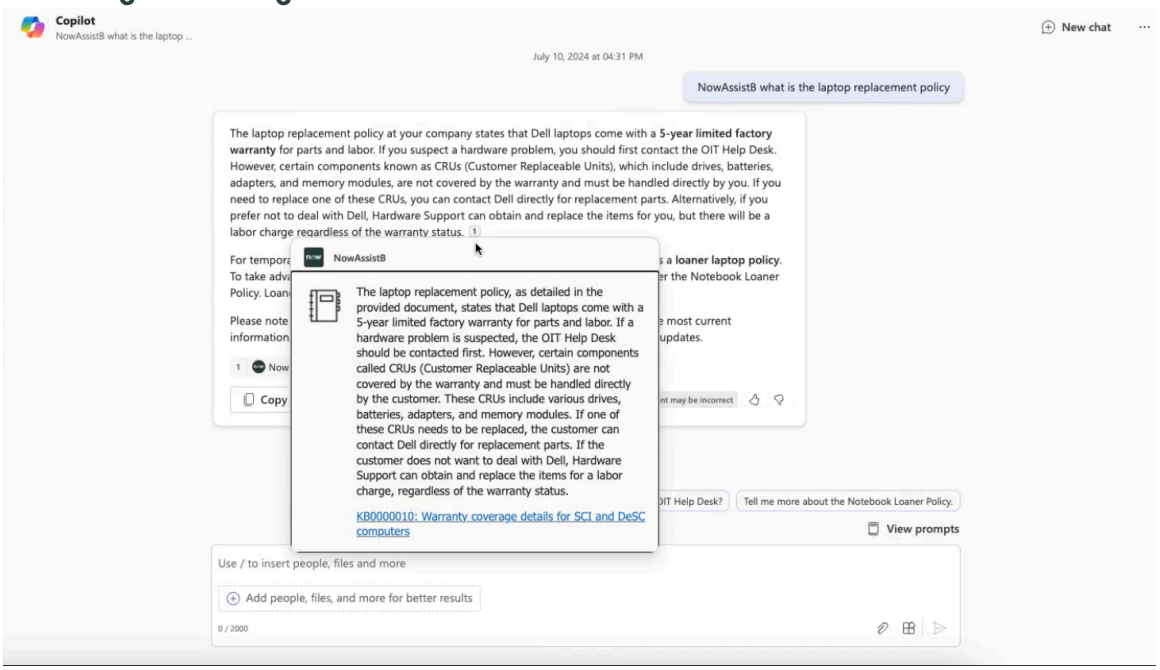
With the Microsoft Copilot integration, you can initiate generative AI chat with Copilot. The following capabilities are available:

Retrieve a Knowledge Base article

You can ask the Microsoft Copilot your questions and Copilot responds with detailed information about the questions asked along with a relevant Knowledge Base article for more information.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Retrieving a Knowledge Base article




Note:
Any input request to Copilot that takes more than 15 seconds to respond will time out.

Request a conversational catalog item

Use Microsoft Copilot to request a catalog item.

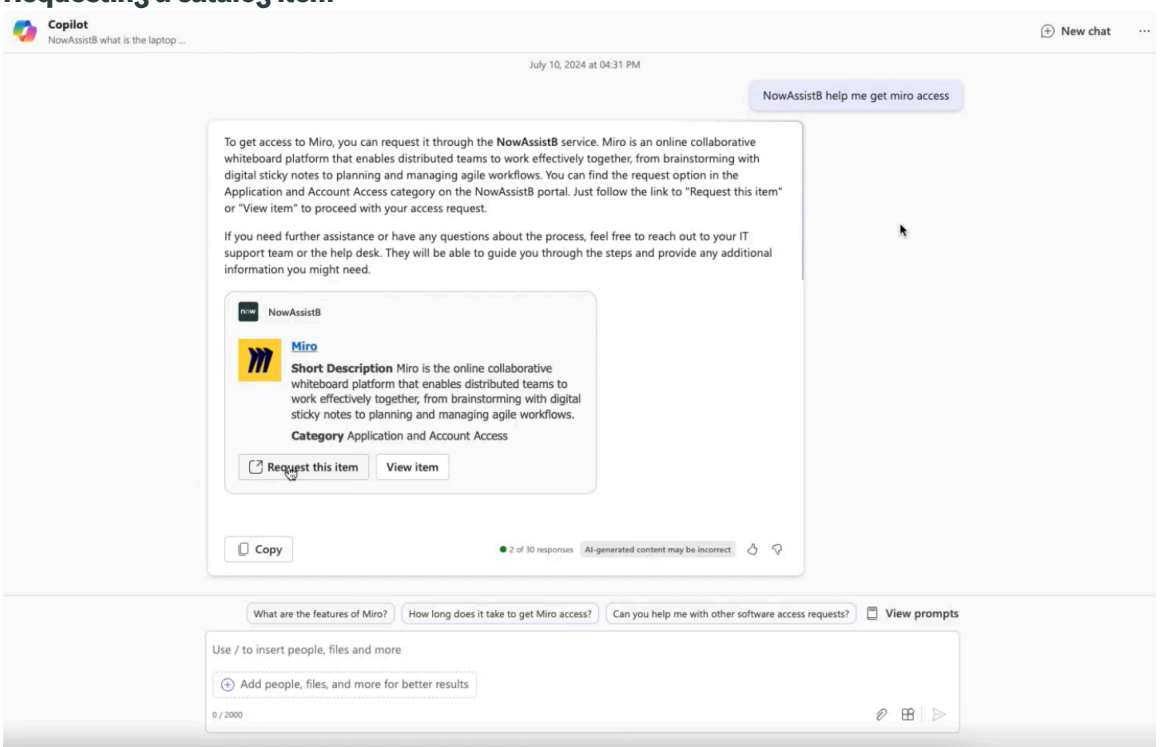Requesting a catalog item




With Copilot, there's no conversational flow, but when a conversational catalog is requested, Copilot hands off the chat to the Virtual Agent bot (the Now Assist in Virtual Agent plugin that you used to connect with Copilot) for continuing the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

conversation. When Copilot hands off the request to Virtual Agent, it sends a `Continuing the conversation from Copilot` message and invokes the conversational catalog that you requested from Copilot.

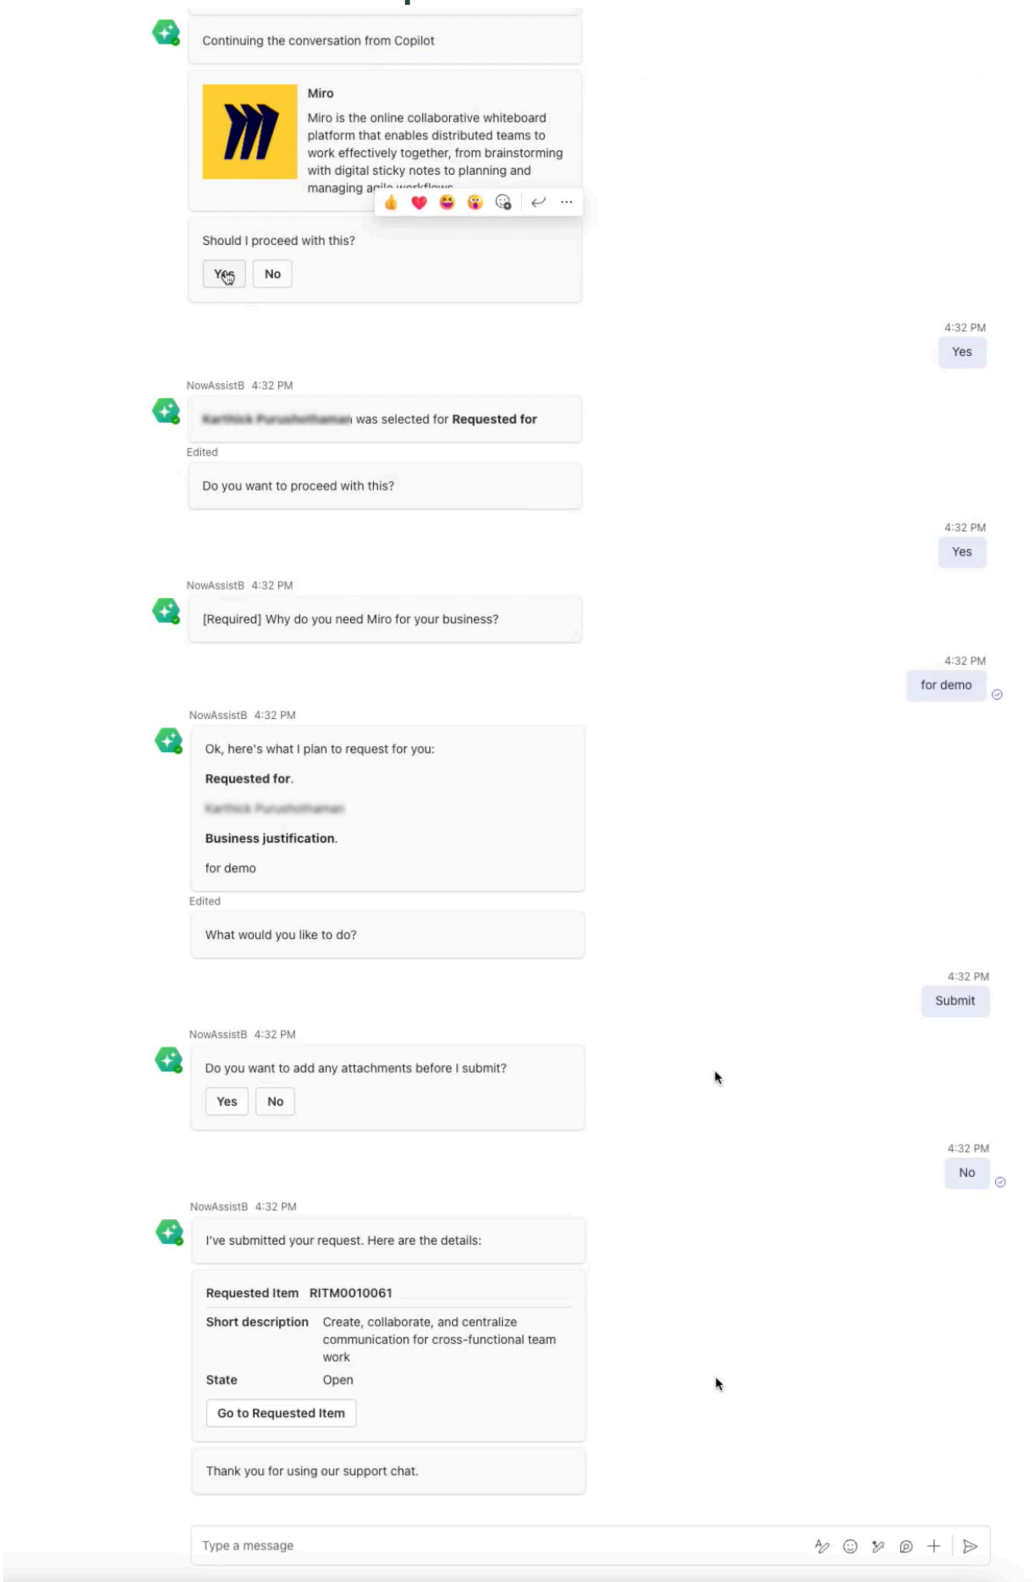Continue conversation from Copilot




Transfer to a Live Agent chat

You can ask Copilot to connect you to a Now Assist Live Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

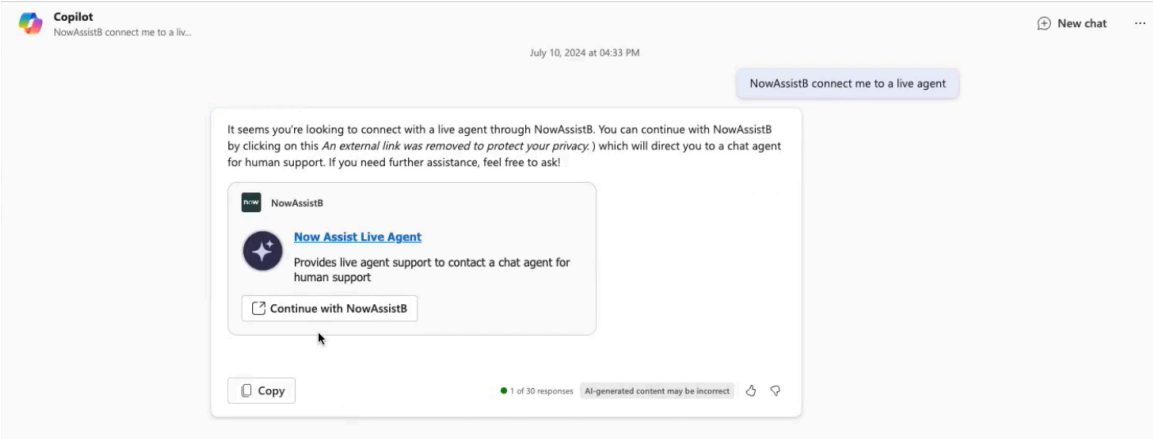You're directed to the Now Assist Live Agent for live agent support.



Declarative Agent experience in Copilot

You can add your Self-configured bot to Copilot and use them as declarative agents to meet your unique business needs and establish consistent and personalized experiences.

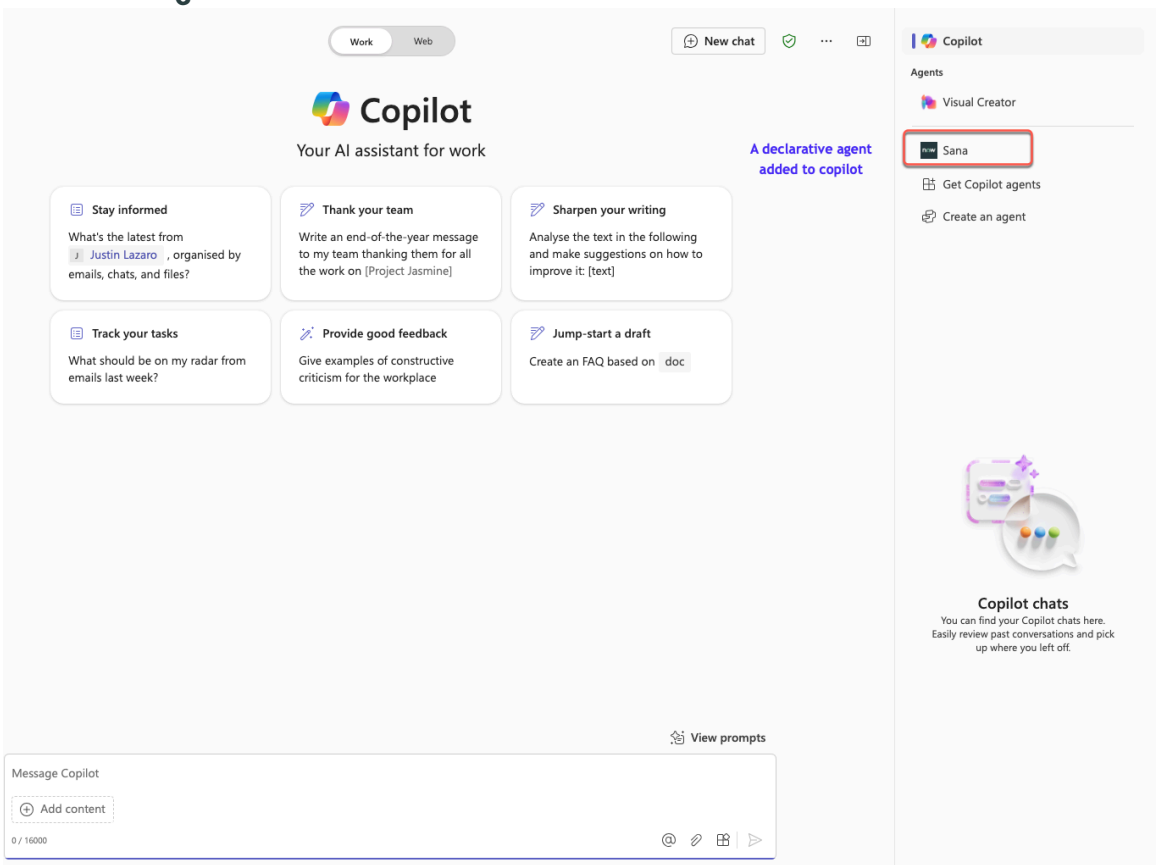
Note:

- A Copilot license is no longer required in order to use the declarative agent. See the new licensing model for more information.
- Only bots for which the manifest package file is uploaded to Microsoft Teams can be enabled for use as declarative agents.

To add a bot to Copilot, login to your Microsoft Teams tenant and navigate to **Apps** > **Features** > **Agents** and select **Add** against the bot that you would like to add. Once the bot is added, it's available for quick access from the Agents section within Copilot.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Declarative Agent



Synthesized response in Microsoft Teams conversations

Conversational Integration with Microsoft Teams is designed to provide new and rich user experience with synthesized responses using Large Language Models (LLM) based results summarized in a single response for users to see information in a conversational way, and avoid browsing through carousels.

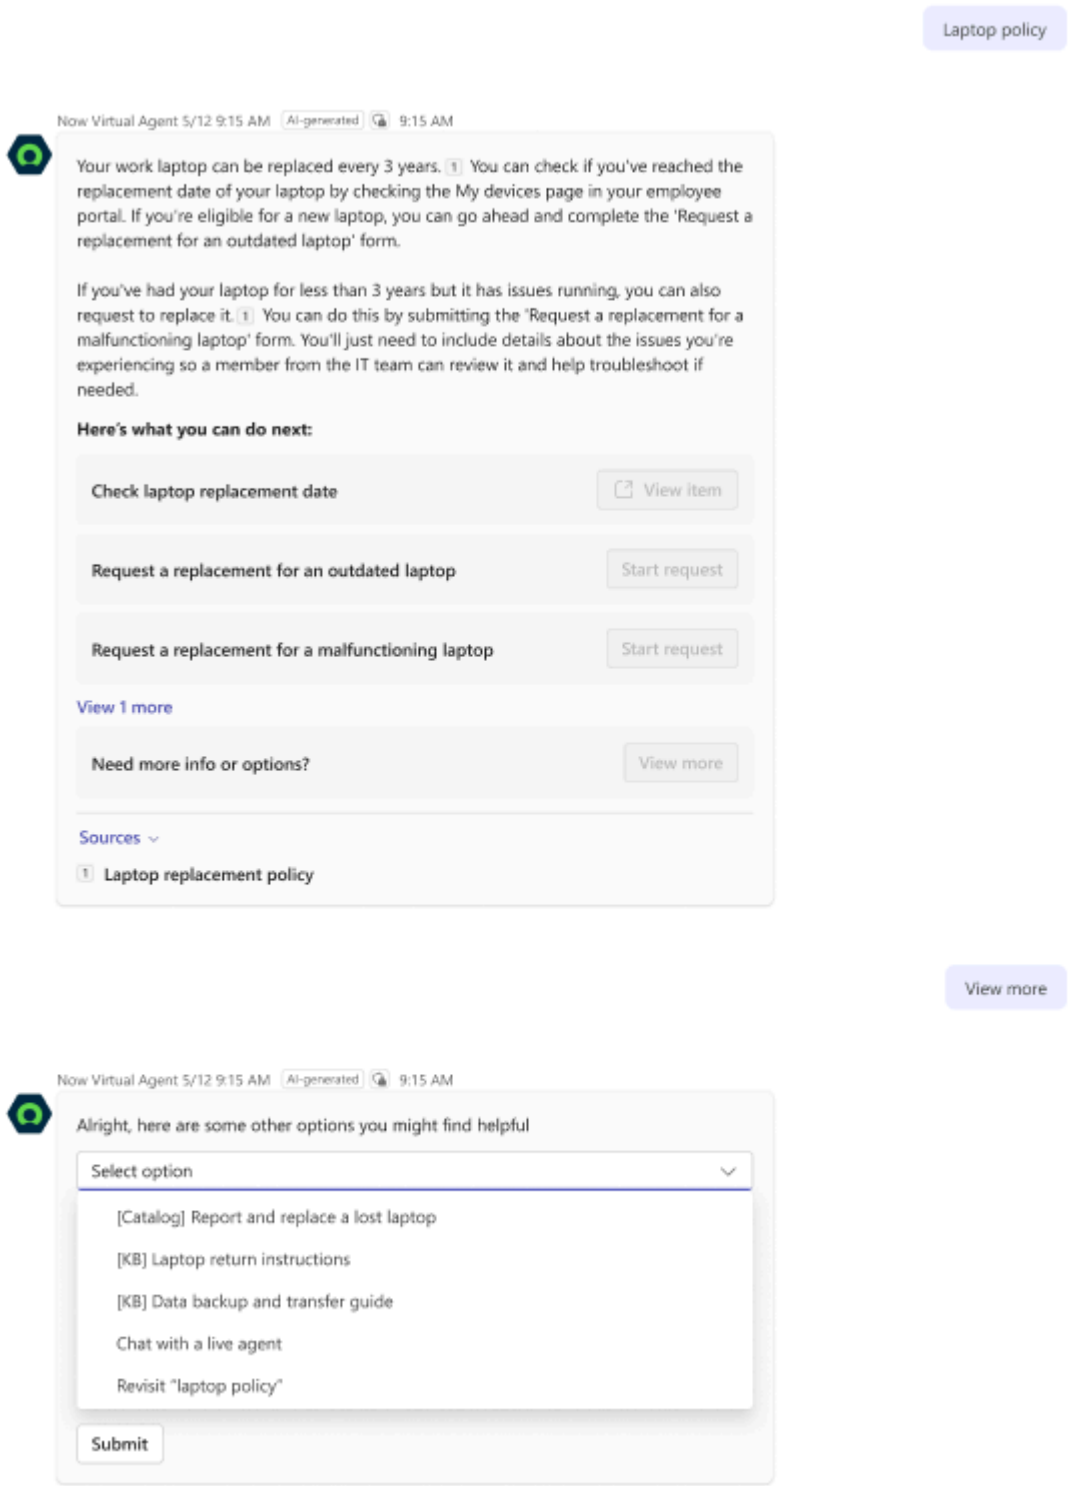
With synthesized responses implemented in Microsoft Teams conversations, the user experience is increased in several ways for the response to contain the most relevant items and information, such as:

- Returning multiple Genius Results and topics in carousel format.
- Providing unified search across topics and catalog items.
- Providing a multi-Knowledge Base Q&A pipeline that enables multiple snippets from multiple Knowledge Base articles to be passed to the LLM as the context for answer generation.

The overall synthesized response helps users experience a conversational flow that understands query intent, searches across records of various types, and summarizes results in a unified, easy-to-consume response.

When you enable the synthesized response picker on Microsoft Teams, users who start a conversation with a Virtual Agent can view a synthesized response picker in response to a query. The response contains catalog items and topics followed by the citation links. For example, if you input a command `laptop` in your conversations, you'll see the responses in a synthesized format.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Mid-topic switching is also possible during a conversation with synthesized responses and user can continue with their original request or switch the conversation. When the user selects the **View other options** button they get the list of available Knowledge Base articles and catalogs, which the user can select and go through the details.

Virtual Agent feature support in Microsoft Teams conversations

The Microsoft Teams app supports Virtual Agent features, such as Virtual Agent Designer controls for creating conversations, notifications, AI Search results, and more.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

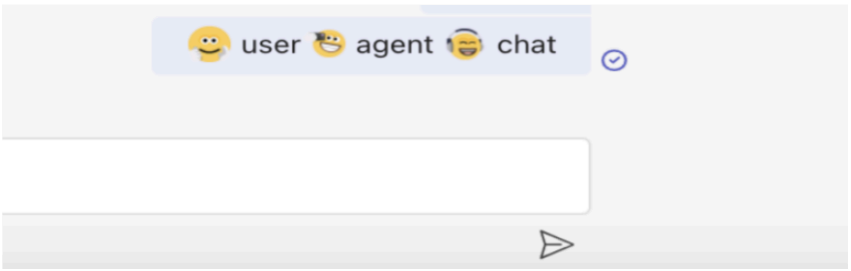
Emojis and text

Starting with Version 4.0.1, when a user chats with a live agent and sends a message that contains emojis, the text gets delivered and the emoji is displayed on the agent workspace.


Note:
Due to the difference in the platforms (app or web browser) used by the end user and the live agent, there's a difference between the emojis that are sent by the end user and the emojis that are received by the live agent.

A user can understand how emojis look like in a chat conversation and in the Agent Workspace from the following examples.

Emojis in a chat conversation



Emojis in Agent Workspace

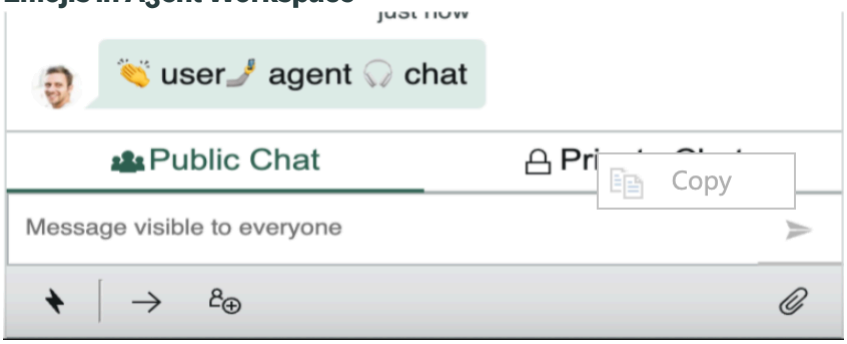

Message pagination

Microsoft Teams has a limit on the maximum message size before paginating the message. You can adjust the number of characters allowed in a message before paginating by going to the system properties [sys_properties] table and setting the number in the system property *sn_va_teams.picker_char_limit*.

AI Search results

Now Assist in Virtual Agent can generate AI Search results that are displayed as Genius result cards and multi-link outputs in conversations. For details on how Virtual Agent generates AI Search results, see Improving the user experience with AI Search. The default AI Search configuration for Virtual Agent enables search results for Q&A (Knowledge Base and catalog items). The user has the option to like or dislike the information presented in the card. For more information, see Genius Results.

URL navigation for chat links

In the Virtual Agent and Live Agent conversations on the Microsoft Teams app, the links to ServiceNow records open automatically in base system portals, including the links that are displayed in the output cards, Virtual Agent notifications, and AI Search results. If needed, as

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

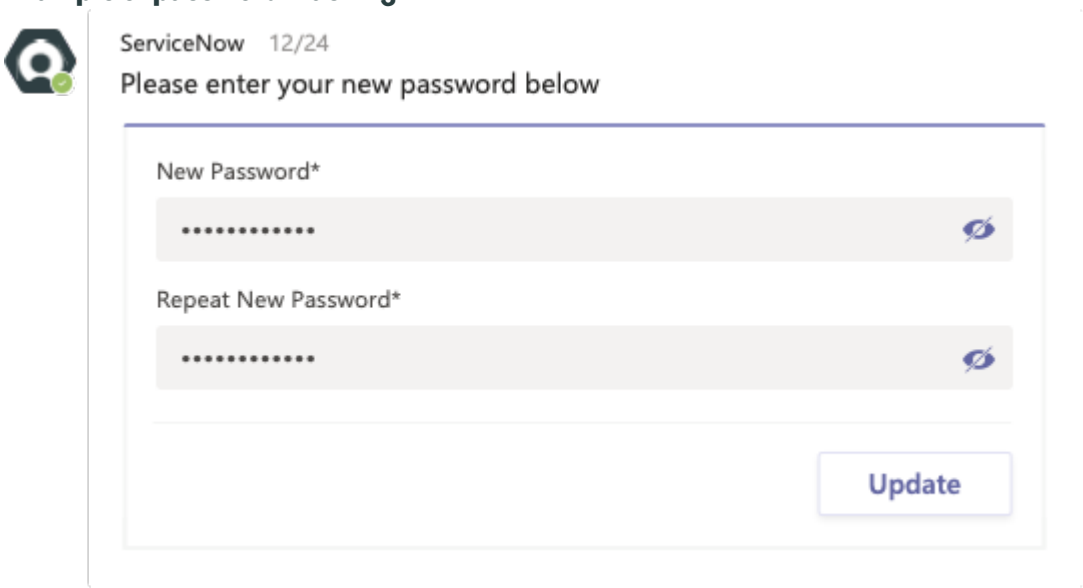
the administrator, you can change the portals where these links are opened in. For configuration details, see Configure URL navigation for chat links.

Masking of sensitive user data

Starting with Version 2.0.0, passwords that are entered by users and confirmed in bot responses are masked during the password reset conversations in the Microsoft Teams app.

A user can understand how a password is masked in Microsoft Teams from the following example.

Example of password masking



Support for file uploads

Starting with Version 2.0.0, users can upload their file attachments with the paper clip icon in the Microsoft Teams conversations.

A user can learn to attach an icon in the Microsoft Teams chat window from the following example.

File attachment support

Trusted domains

The values that are specified in the Trusted media domains field of the Provider Channel Identities table [sys_cs_provider_application] take precedence over the Connections table [sys_cs_provider] and overrides its values.

Catalog opening experience in Microsoft Teams conversations

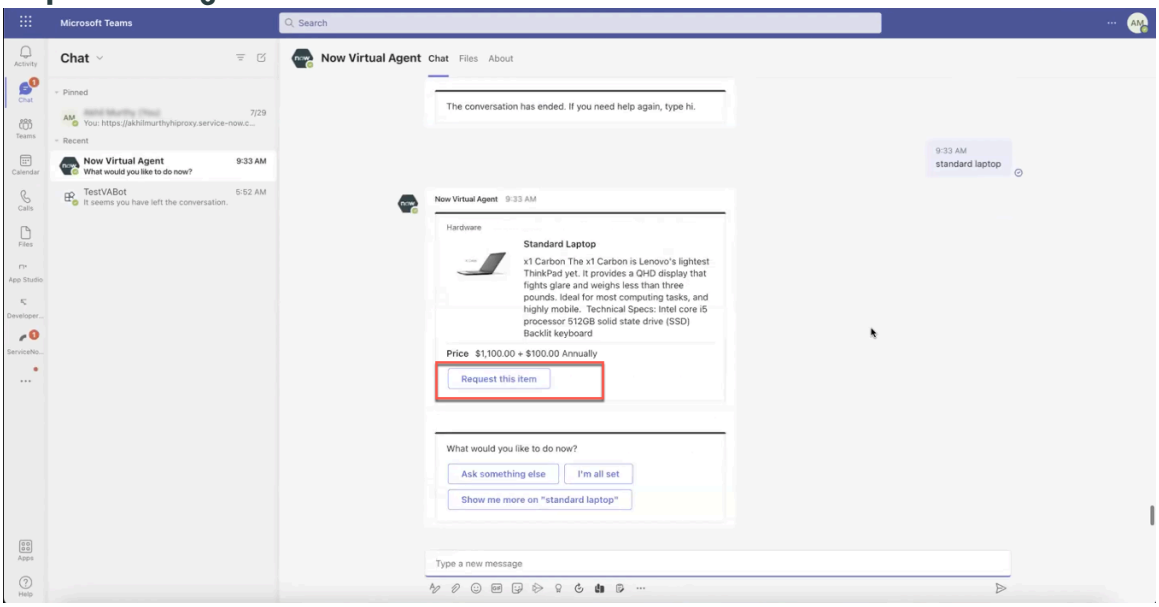
Starting with Version 4.1.0, users can request a catalog item from the Microsoft Teams app during a conversation.

A user can select the **Request this item** button in a conversation with Microsoft Teams that opens the catalog item in a pop-up window, the Task Module, where the user can view the information of the item and submit the request within Microsoft Teams.


The following examples show how a user can request and then view a catalog item.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Request Catalog item



View Catalog item

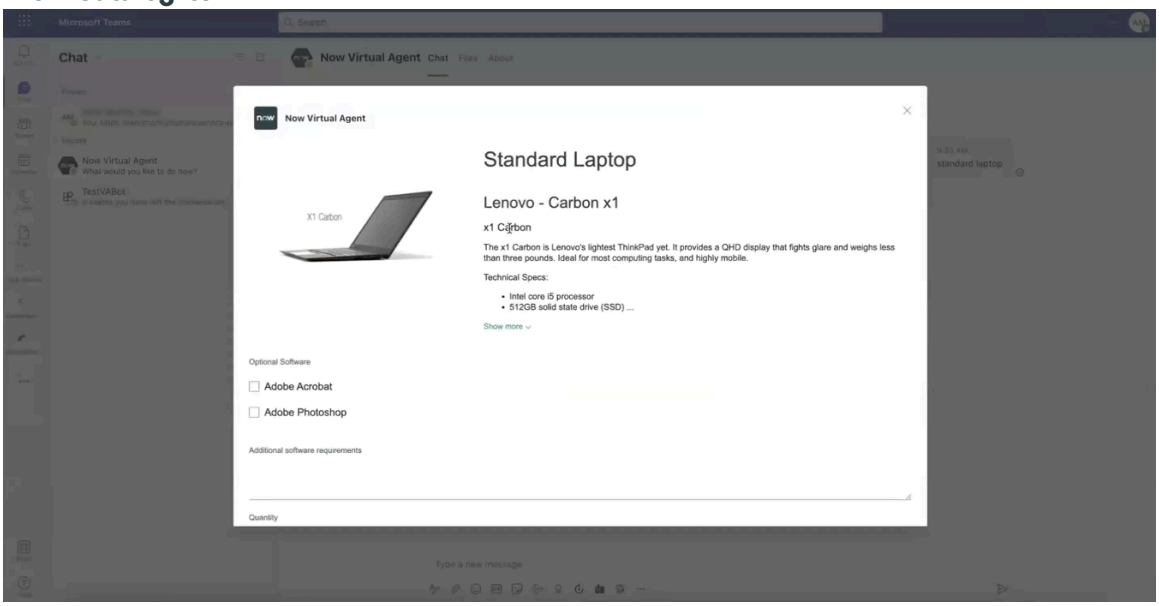

Custom branding in the Microsoft Teams application

Microsoft Teams supports app customization, which enables you, as the administrator, to customize the branding of the Now Virtual Agent bot in the Conversational Integration with Microsoft Teams. To learn more about app customization, see these resources:

- Customize apps in Microsoft Teams in the Microsoft Teams documentation.
- MS Teams branding for the conversational integration in the ServiceNow Community.

HTML rendering in Microsoft Teams

When a Virtual Agent sends a message in Microsoft Teams with HTML tags, only those HTML tags supported by Microsoft Teams are rendered as normal tags.

For more information about the Microsoft Teams supported HTML tags for bot messages, see Formatting bot messages.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Message streaming in Microsoft Teams

Starting with Version 5.1.0, the new message streaming feature is available for Microsoft Teams. With this capability, when a user submits a query in Microsoft Teams, they receive status updates of their requests, if the response time is longer.

A loading indicator is displayed to let the user know the response is being generated. Once ready, the response is delivered in real-time, appearing in smaller chunks as it's processed. This allows the user to start reading the message immediately, instead of waiting for the entire message to load, and enhances the user experience.

Note:

- To enable the streaming feature, raise a change request for Virtual Agent integration with Microsoft Teams.
- Enabling this feature will result in additional iHub transaction costs.

Custom controls in Microsoft Teams

Using the Custom Control utility will cause failure in Microsoft Teams conversations with the message `channel is not supported`. See Custom control utility for more information on the utility.

Virtual Agent Designer user input and bot response controls in Microsoft Teams

The Virtual Agent Designer user input and bot response controls for creating conversation topics are supported in Microsoft Teams conversations, including the table bot response, the card control that can display images, and the image bot response controls.

Starting with Version 2.0.0, the updated card and new video bot response controls are supported in Microsoft Teams conversations. The video control displays a thumbnail image of the video that users select to open the video in their preferred web browser.

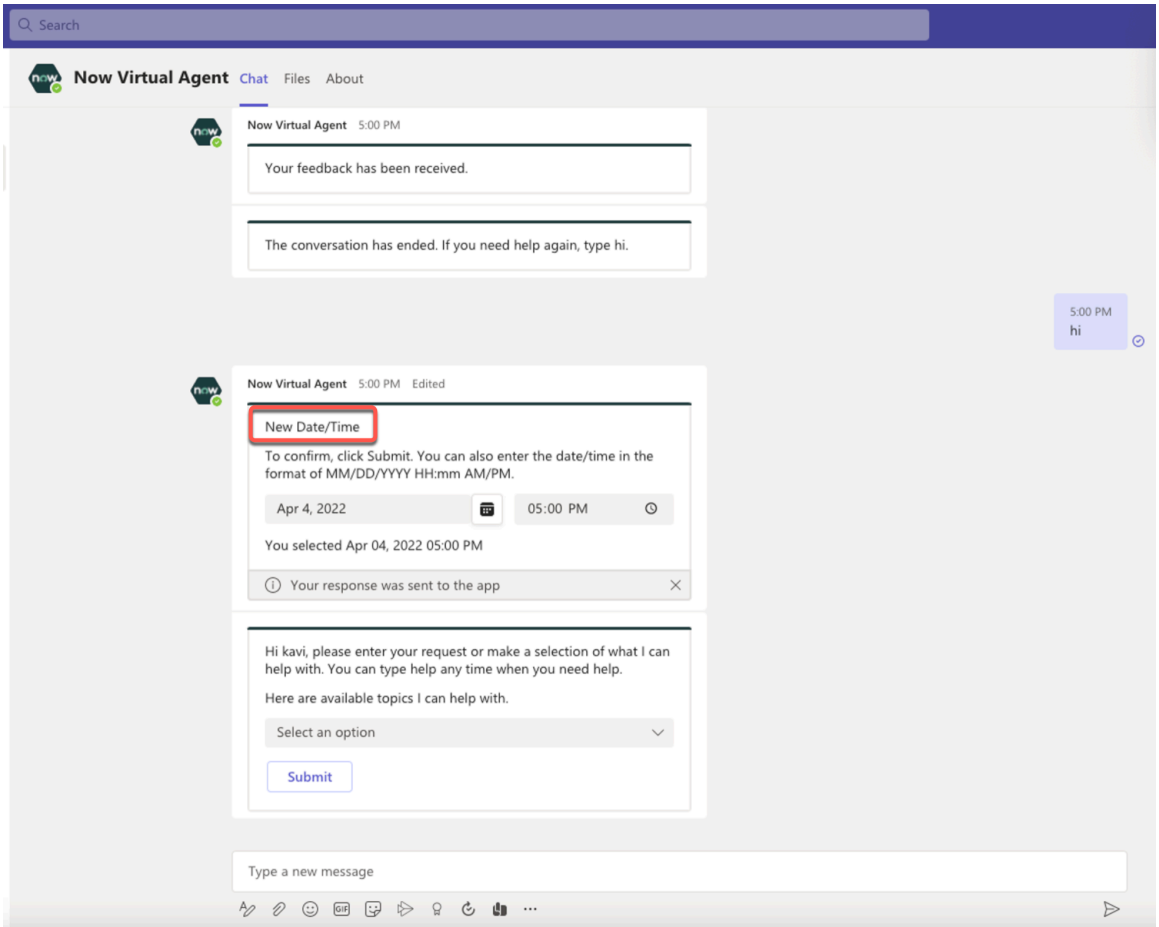
For more information about user input controls and bot responses, see Virtual Agent Designer user input controls and Virtual Agent Designer bot responses, respectively.

Starting with Version 3.0.10, to improve the bot performance and enable a better conversational experience with Virtual Agent on Microsoft Teams, the non-card bot response controls such as text, links, and date cards are converted into adaptive cards.


As part of converting all controls to adaptive cards, the content displayed on notifications received through bot responses is customized. The Microsoft Teams bot displays a preview of the notification content on the card, such as the message content, card title, or description, where applicable.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Notification with title



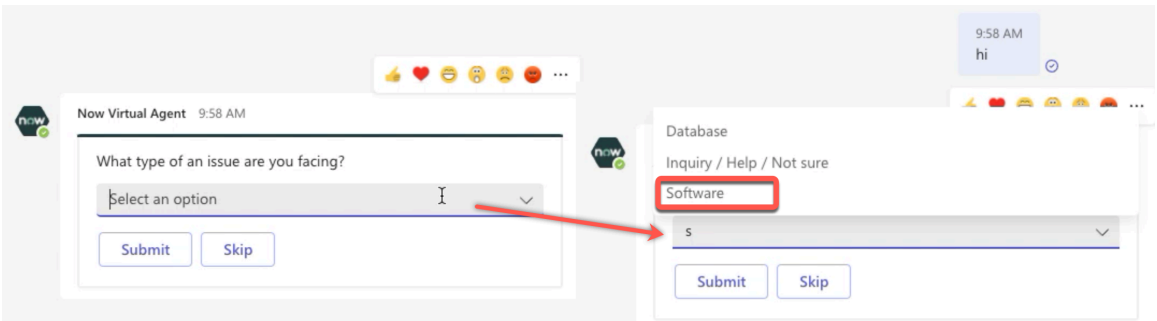Starting with Version 3.0.10, during a conversation with the Microsoft Teams bot, you can search for a particular choice from the list using the drop-down picker controls.



Starting from Version 4.1.0, you have the option to turn off the confirmation banner that appears when you send a response to Virtual Agent in Microsoft Teams conversation.

Set the *sn_va_teams.hide_teams_response_message* system property value to **true** to turn off the confirmation banner (by default the value of the system property is set to **false**).

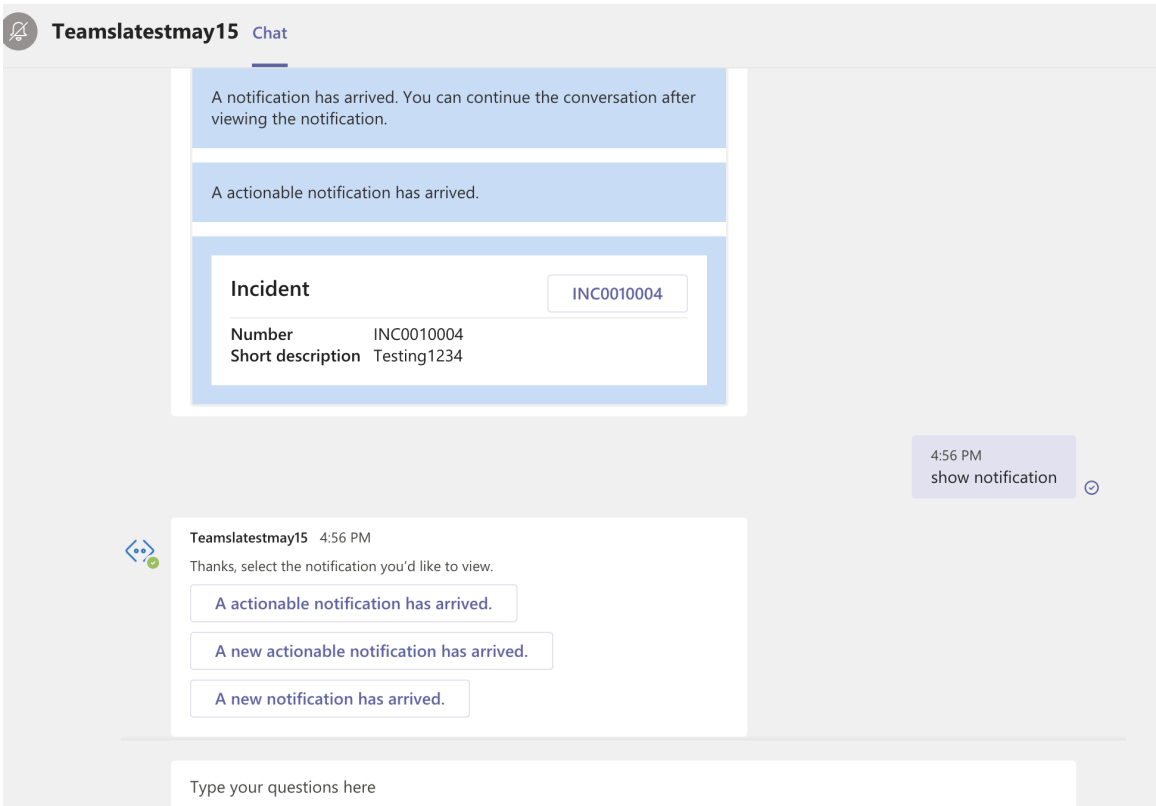
Virtual Agent notifications supported in Microsoft Teams

Microsoft Teams app supports Virtual Agent notifications during conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Subscription management
  - Requesters - Use the **notification** (or **notifications**) command to subscribe to or unsubscribe from notifications.
  - Admins - Enable notifications for messaging users in the Messaging Apps Integration page.
- Notification content - Create notifications with rich content, images, and action buttons. Actionable notifications enable recipients to perform certain actions and respond to the notification, such as adding a comment or requesting a live agent.
- Notification delivery
  - Message notifications are delivered immediately to end users, even if the user is chatting with a virtual or live agent.
  - Actionable notifications are delivered only when the user is not in an active conversation with a virtual or live agent. Users can do the following:
    - Review the notifications later by using the **show notification** command.

Show notifications in Microsoft Teams



    - Perform or skip the actions for the notification. If users decide to skip the actions, users can return later to the notification by using the **show notification** command.

For detailed information on Virtual Agent notifications, see Configuring Virtual Agent notifications.

Unsupported Virtual Agent features in Microsoft Teams

Refer to the unsupported features of Virtual Agent in Conversational Integration with Microsoft Teams.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Unsupported features

Virtual Agent does not support the following functionalities during a conversation in Microsoft Teams.

- Connect Support
- Geo-location topic block

Capture common errors and provide resolution steps for Microsoft Teams using the Conversational Interfaces Diagnostic Tool

The Conversational Interfaces Diagnostic Tool runs a health report to define and capture information for different categories of the Conversational Integration with Microsoft Teams app, such as plugin details, configuration settings, system properties, integration failures, and so on, and lets the user validate and review these settings to start a bot-conversation.

When a user runs the health check scan and if there are issues that are shown on the report, then the user can take actions to resolve the issues based on the recommendations that the bot provides through the CI Diagnostic Tool.

Grouping common errors

To provide a health report of the various aspects of the Conversational Integration with Microsoft Teams application, the most common issues have been grouped into the following categories:

- Microsoft Teams not responding
- Notifications
- Automatic Linking
- Image/HTML
- Performance
- Installation
- Live Agent

Resolution

The Conversational Interfaces Diagnostic Tool is used to resolve the errors that users come across with their Microsoft Teams app. Knowledge Base articles are documented with resolutions to the issues and the records for these KB articles are created in the CI Diagnostic Tool.

Note:
Microsoft Teams requires the CI Diagnostics Tool of version 1.1.0 to make the diagnostic topic available for the user.

Resolving errors using the CI Diagnostic Tool includes the following steps:

1. Login into the chat widget and start the CI Diagnostic Tool.

   The CI Diagnostic Tool presents the following groups to choose from:

   - Error Message
   - System Property Lookup
   - Plugin/Functionality Issue
   - General Question

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

2. Select **Plugin/Functionality Issue** and type `Conversational Integration with Microsoft Teams` or any related keyword to get the options of available plugins related to your search term.

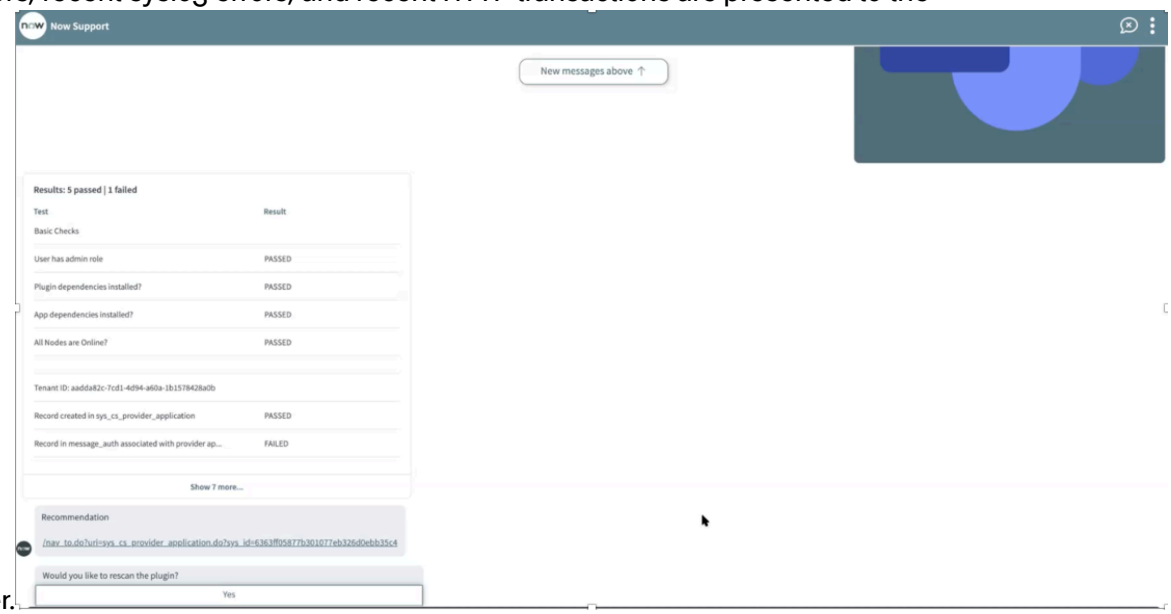
   The Microsoft Teams application logo appears as a response.

3. After Microsoft Teams is provided as an input to the CI Diagnostic tool, a basic health check of the app gets executed and a report is generated for the user.

   The health check is run to verify if:

   - Microsoft Teams app plugin installed
   - Provider application record verification.
   - Message auth table has all the records
   - Dependant plugins are available
   - OIDC token verification records are available
   - Provider reference is missing in the [sys_cs_provider_application] table

   After successful health check scan, verifications such as recent installation errors, recent syslog errors, and recent HTTP transactions are presented to the user.



4. The health check report also provides you with an option to view existing Knowledge Base articles that may be associated with your issue. Enter **Yes** and provide a few words to describe your issue.

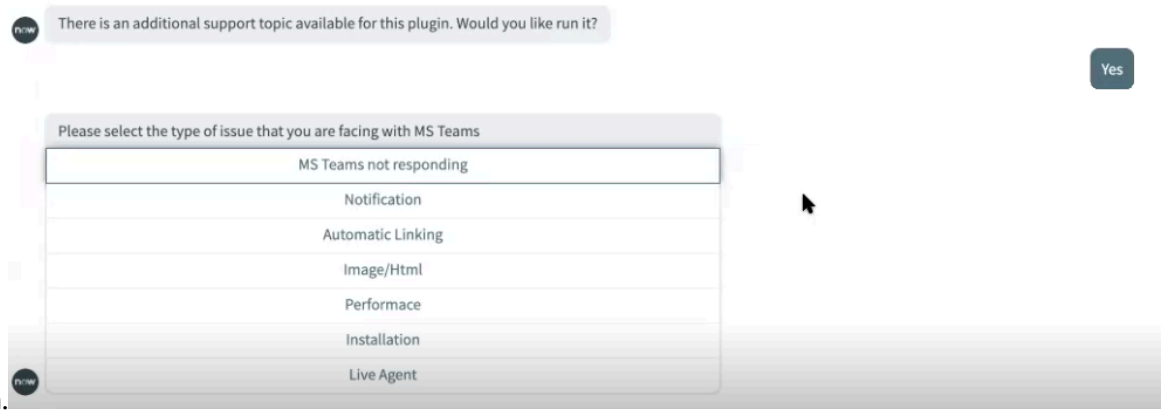
   For example, if you enter `image` as your issue description, then the CI Diagnostic tool presents you with the Knowledge Base articles related to images. Select the link to view the Knowledge Base article.

   Select **No** to proceed for additional support.

5. The CI Diagnostic Tool provides you with an additional support topic available for the Microsoft Teams plugin. Select **Yes** to proceed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

You are presented with the following issue types to select from.



For example, if you select any one of the issue types, the CI Diagnostic Tool provides you with the resolution steps pertaining to that issue type to identify the cause of the issue and to resolve it. You will also be presented with the relevant Knowledge Base articles to get further details about the issue.

Finally, the CI Diagnostic Tool asks you to check if your issue is resolved. Select **Yes** if the issue is resolved.

Remove Conversational Integration with Microsoft Teams

Remove the integrations between your ServiceNow Virtual Agent bot or the Self-configured bots and Microsoft Teams to disassociate the app with your ServiceNow instance.

Before you begin

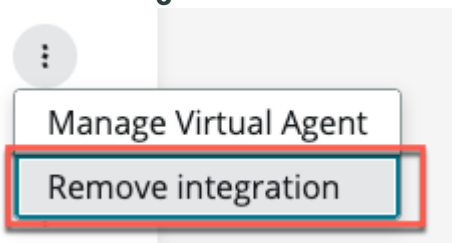
Roles required:

- Virtual_agent_admin and external_app_install_admin or admin
- Administrator for third-party applications

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Channels and Integrations**.
2. On the Channels and integrations page, on the Microsoft Teams tile, select **Manage**
3. In the Manage Microsoft Teams channel page, find the integration (Now Virtual Agent bot or the Self-configured bot) that you would like to remove, select the manage bot icon ⋮, and select **Remove integration**.

Remove integration with ServiceNow Virtual Agent




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

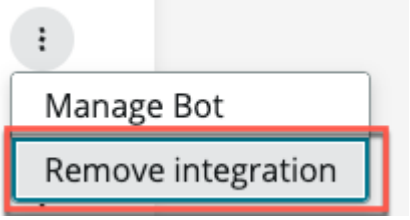Remove integration with Self-configured bot



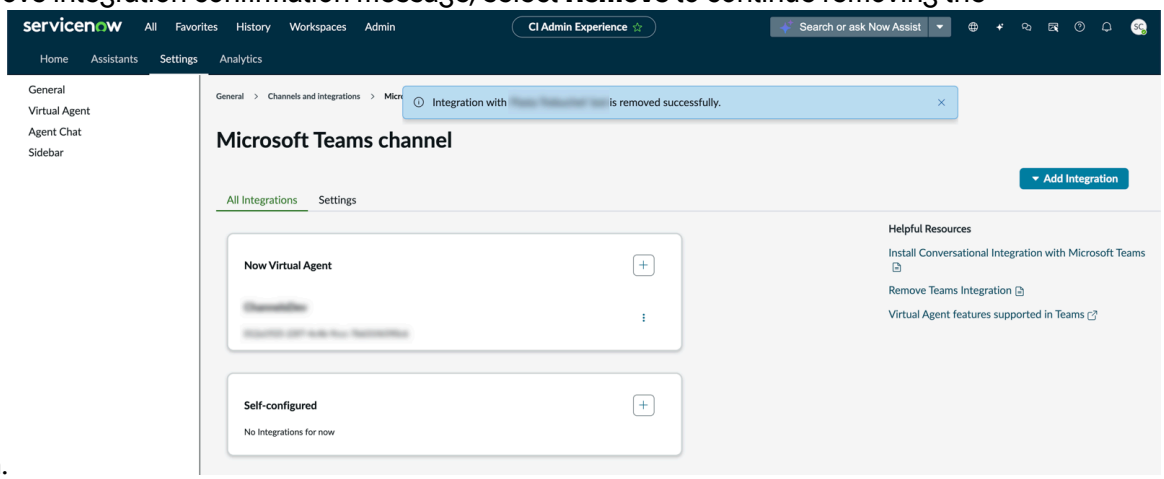4. In the Remove integration confirmation message, select **Remove** to continue removing the integration.



The Virtual Agent integration with the selected Microsoft Teams bot has been removed.

Integrating Virtual Agent with Slack

Enable requesters to chat with Virtual Agent or live agents using the Slack application.

Note:
In earlier releases, the pre-built Virtual Agent messaging integration for Slack was part of the Virtual Agent platform. This integration is now the Conversational Integration with Slack app, available from the ServiceNow Store.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Use the Conversational Integration with Slack application to connect your requesters with Virtual Agent or live agents through your company's Slack workspace. To get started, see .

Integrating ServiceNow Virtual Agent with Slack

Enables ServiceNow® Virtual Agent to integrate with the Slack application.

The Virtual Agent integration with Slack creates a one-to-one association between the ServiceNow instance that you are installing from and the Slack workspace in which the integration runs. By default, Virtual Agent supports one-click installation that integrates one Slack workspace with one ServiceNow instance, which uses the Now Virtual Agent by default.

Install the Conversational Integration with Slack

You can install the Conversational Integration with Slack (sn_va_slack) application if you have the admin role.

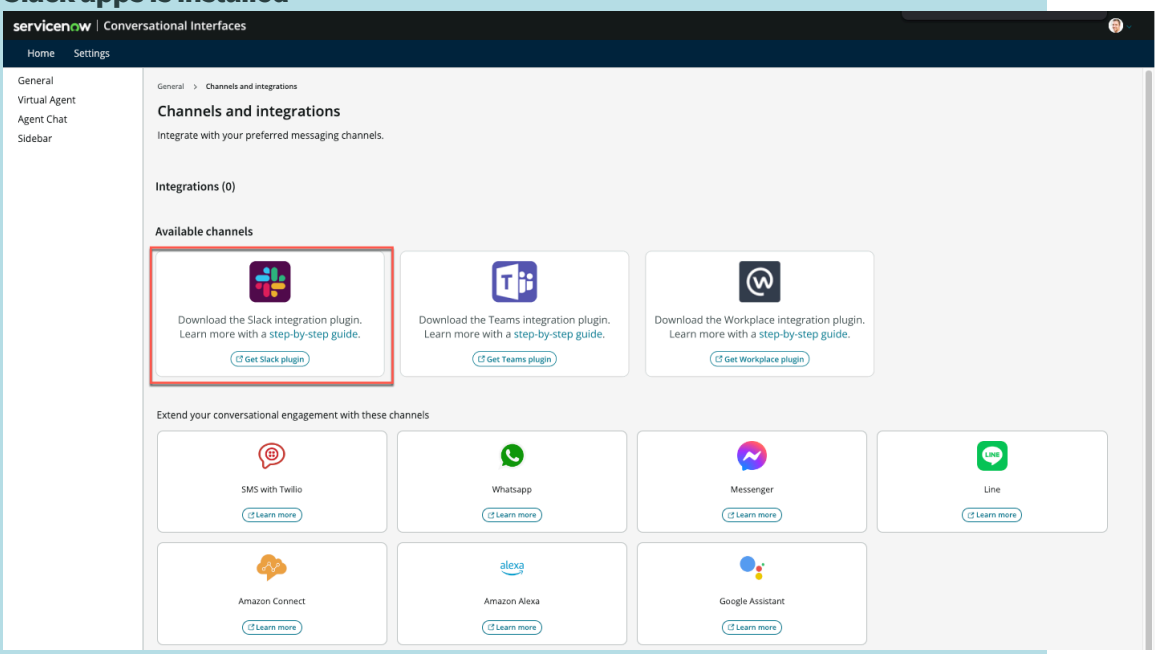
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- If you're using an earlier release of Virtual Agent, you must upgrade to the Yokohama release to use the features supported in this channel integration.
- Conversational Integration with Slack requires the Glide Virtual Agent plugin (com.glide.cs.chatbot) to activate full functionality in Virtual Agent or the Virtual Agent Lite plugin (com.glide.cs.chatbot.lite) to activate a limited version of Virtual Agent. Activate the appropriate plugin before you install the integration.
- Install the Conversational Integration with Slack app from the ServiceNow® Store.

Important:
Installing the Conversational Integration with Slack app from the ServiceNow Store activates the app for integration on your ServiceNow instance. If you have not installed the integration app, the Slack app is listed in the Available Channels section.

Channels and integrations page before Conversational Integration with Slack apps is installed



After you install the Conversational Integration with Slack plugin (sn_va_slack), Slack is seen in the Integrations section, and you can proceed with the configuration.

Role required: virtual_agent_admin and external_app_install_admin or admin

About this task

Review these guidelines for using Virtual Agent with Slack or with Slack Enterprise Grid.

- The Slack app creates a one-to-one association between the ServiceNow instance that you are installing from and the Slack workspace in which the integration runs.
  - Use a separate Slack workspace for each instance that you plan to install the integration in.
  - If you use a non-production instance for testing, use a Self-configured bot.

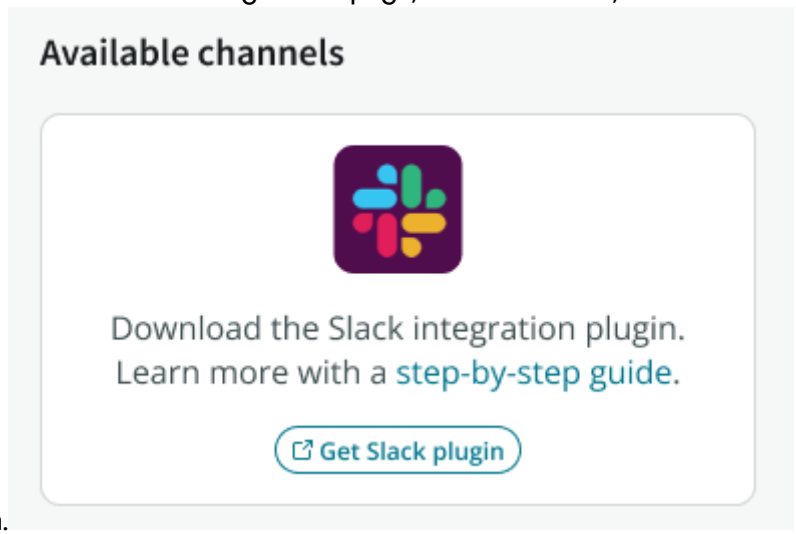
    For more information, see Integrate ServiceNow instance with Self-configured bot.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Slack Enterprise Grid – If you have Slack Enterprise Grid workspaces, your end users can move between workspaces and use the Virtual Agent bot from any workspace.
  - If you use a non-production instance for testing, use a workspace in a different grid or use a non-grid workspace.
  - After installing this store release:
    - Your messaging users are automatically linked to their ServiceNow accounts.
    - If you clone an instance for non-production testing, be sure to run the installation again on the cloned target.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, click **View All**.
3. On the Channels and integrations page, in the Slack tile, click **Get Slack plugin**.



   You are redirected to the Conversational Integration with Slack ServiceNow Store page.
4. On the top right corner for the screen, click **Get**.

   Note:
   You must be logged into the ServiceNow Store portal to get the plugin.

5. On the Conversational Integration with Slack ServiceNow Store page, click **Request Install**.
6. On the Request Install screen, provide the **Instance Name** and **Reason for request**.
   You can also validate the instance that you provided by clicking **Validate Instance**.
7. Click **Request**.
   A message pops up on the Request Install screen that your request has been auto approved.

What to do next

Integrate ServiceNow Virtual Agent with Slack.

Integrate ServiceNow Virtual Agent with Slack

Add the Virtual Agent bot to your ServiceNow® instance to integrate with Slack.

Before you begin

Ensure that you have installed the Conversational Integration with Slack plugin (sn_va_slack) on your ServiceNow instance before adding any integrations.

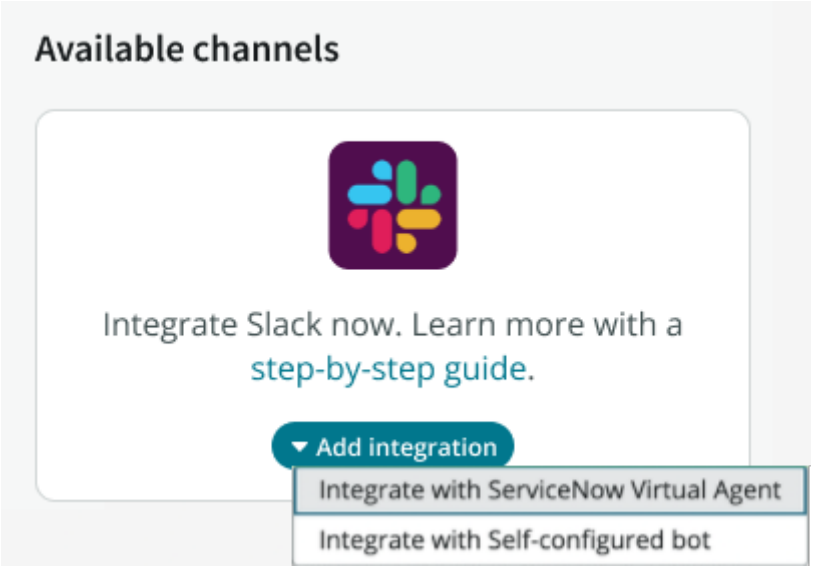
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
   The Channels and integrations page opens.
3. Under the Available Channels section in the Slack tile, select **Add Integrations**, and select **Integrate with ServiceNow Virtual Agent**.

   Note:
   The **Add Integrations** drop-down is available only after installing the Conversational Integration with Slack plugin (sn_va_slack) on your ServiceNow instance.




4. Enter your Slack workspace URL to sign into your Slack workspace, and select **Continue**.



   Note:
   Ensure that you input the name of the Slack workspace for which you have access.

5. Sign in to your ServiceNow® instance.
6. Select **Allow** when Slack requests permission to access your workspace.

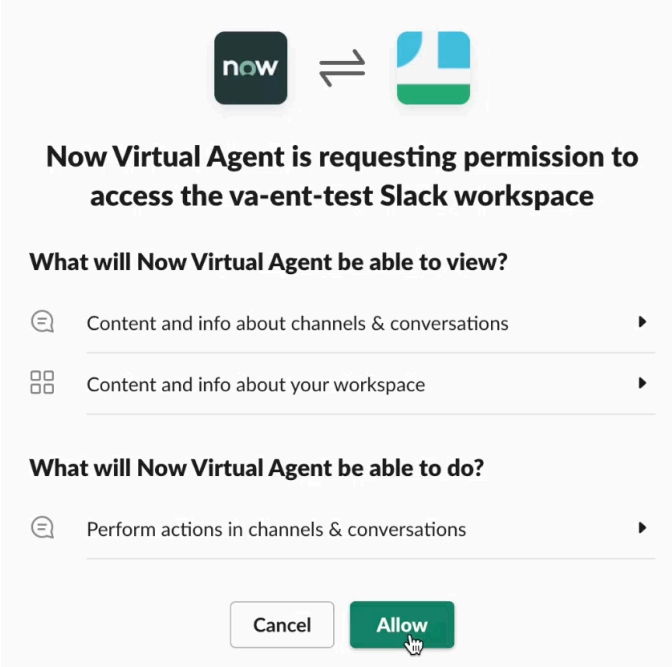
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



7. If the selected workspace ant has already been assigned to Virtual Agent, you must first uninstall from the previously associated instance.

Note:

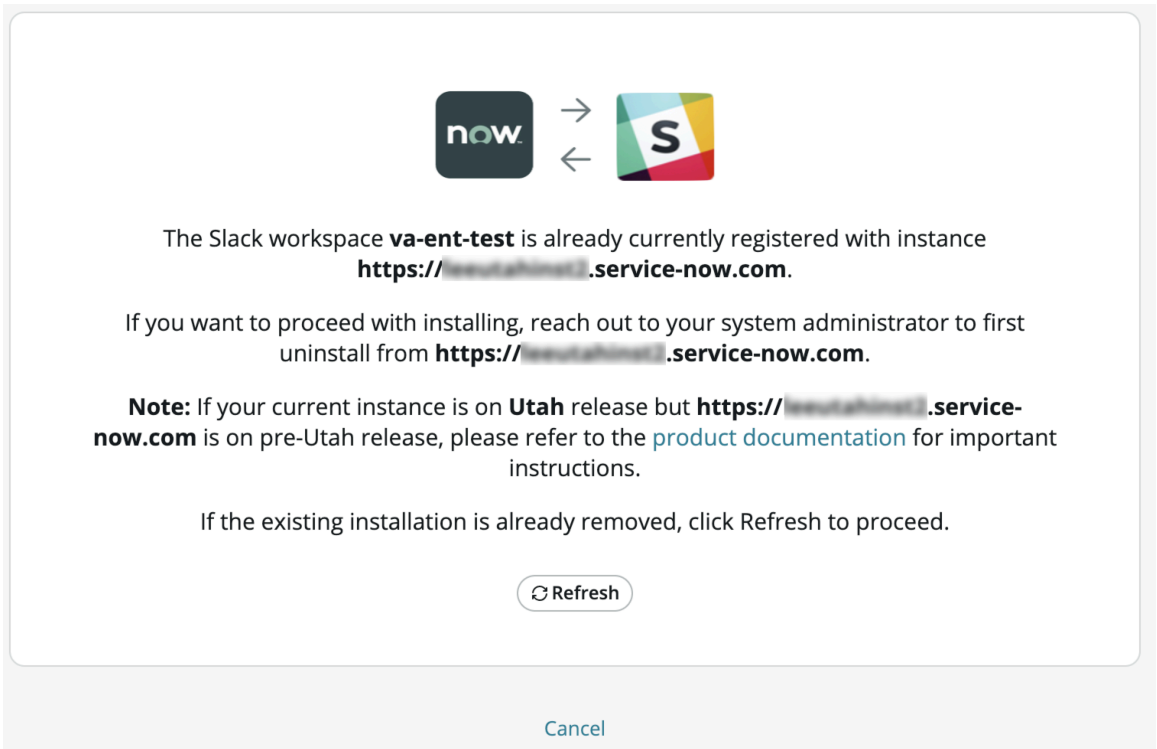Starting from Utah release, if your Slack workspace is already associated with another ServiceNow instance, but if you intend to associate it with a new instance, then you're asked to reach out to the administrator to first uninstall it from the previously associated instance. For more information, see Override Slack integration.



When Virtual Agent has been successfully installed on the Slack workspace, a completion message appears.

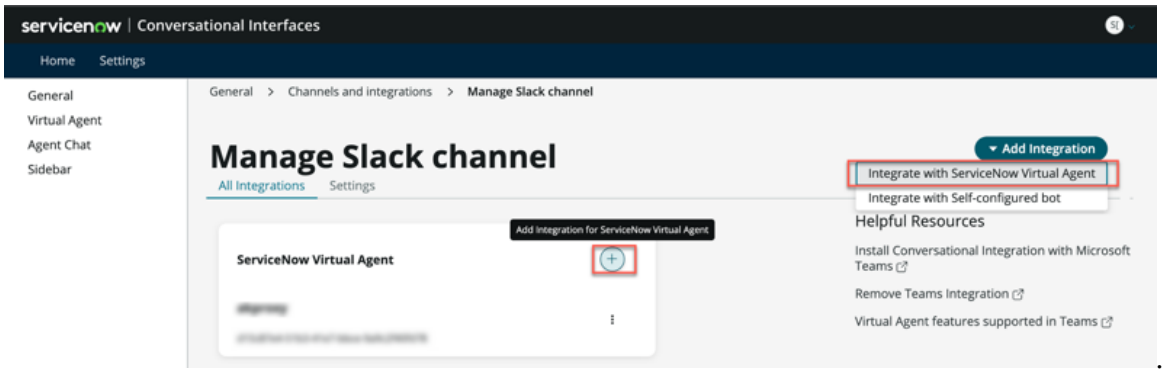
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

8. Select **Go to Slack** to manage the Slack app.
9. Select **Continue to manage channels and integrations** to manage the integration on your ServiceNow instance.

   The Slack application appears in the list of integrations.

What to do next

If you would like to integrate your ServiceNow instance with another Slack bot, select the plus icon in the ServiceNow Virtual Agent tile, or select the **Add integration** list on the Manage Slack channel page.



For more information, see Manage the ServiceNow Virtual Agent integration with Slack.

Override Slack integration

Override Virtual Agent integration with Slack.

Before you begin

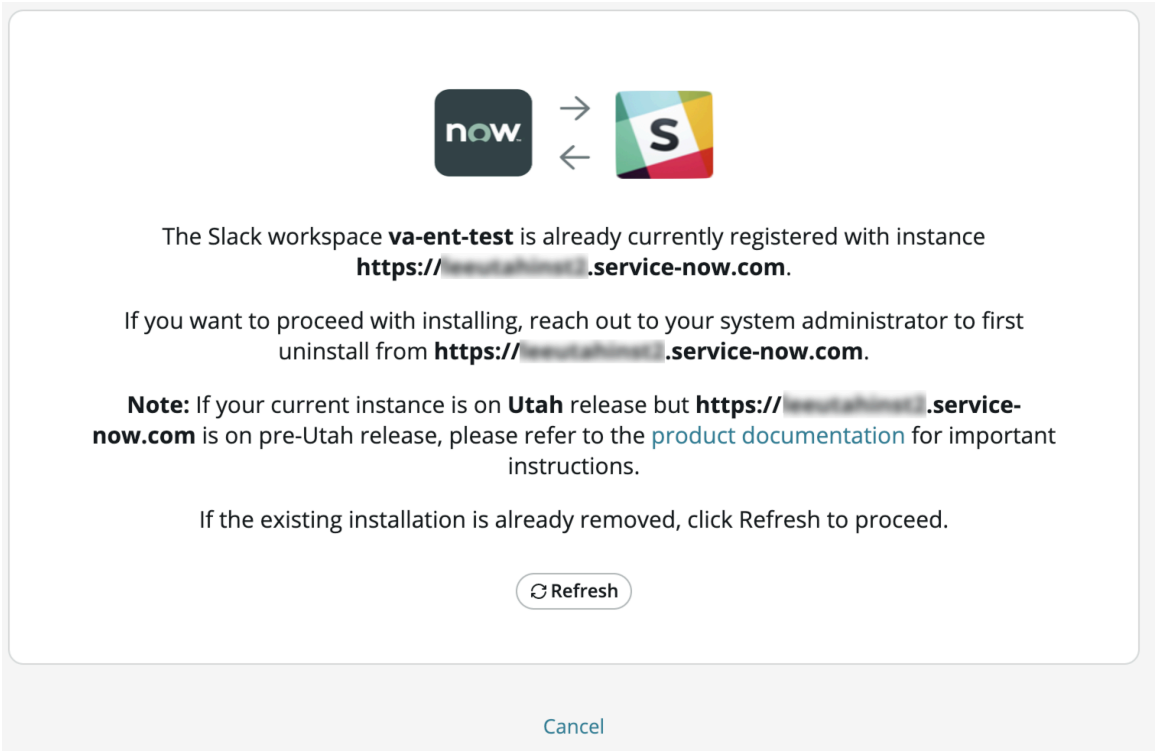
Role required: virtual_agent_admin or admin

About this task

Before Utah release, an admin was able to override a Slack installation that is associated with a particular instance with a different ServiceNow instance.

Starting from Utah release, if your Slack workspace is already associated with another ServiceNow instance, but you intend to associate it with a new instance, then you must reach out to the administrator to first uninstall it from the previously associated instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Important:
The instructions in Remove ServiceNow Virtual Agent integration with Slack are only applicable when both instances are compatible with Utah and the above releases. If one of your ServiceNow instances is on the Utah release and another on a release prior to Utah, follow the steps below.

Procedure

1. In the left navigation filter of your ServiceNow instance, enter `sys_properties_list`.
2. Search and open the *`sn_va_slack.enable_slack_override`* system property.

   Note:
   If you don't find this system property, you (as an admin) must create one.

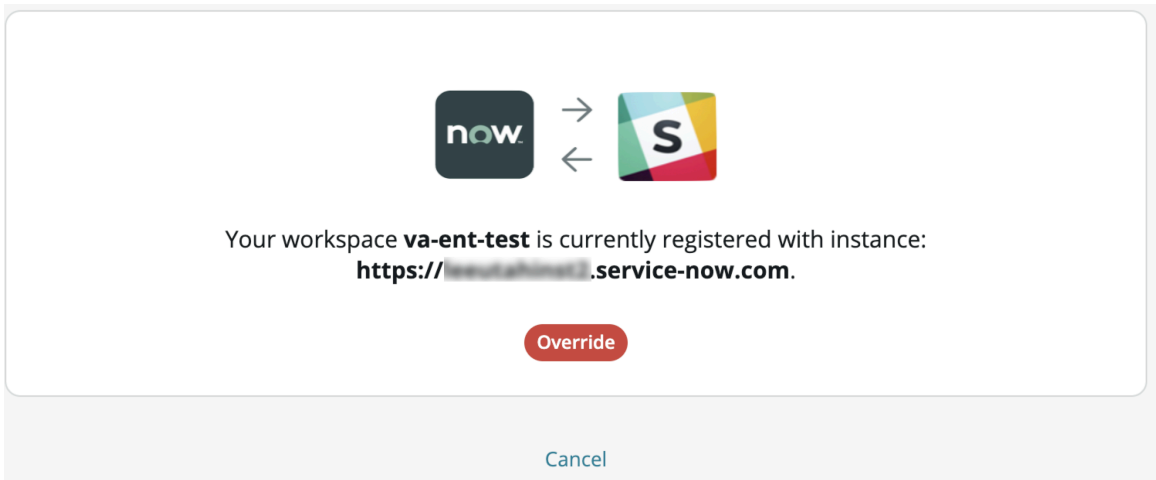3. Set the system property value to **true** to enable the **Override** button.
   By default, the value of the system property is **false**.
4. Select **Override** to associate the instance with a new tenant.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Manage the ServiceNow Virtual Agent integration with Slack

Manage your Conversational Integration with Slack application, its branding, and customize the bot-specific messages in your ServiceNow instance after integration.

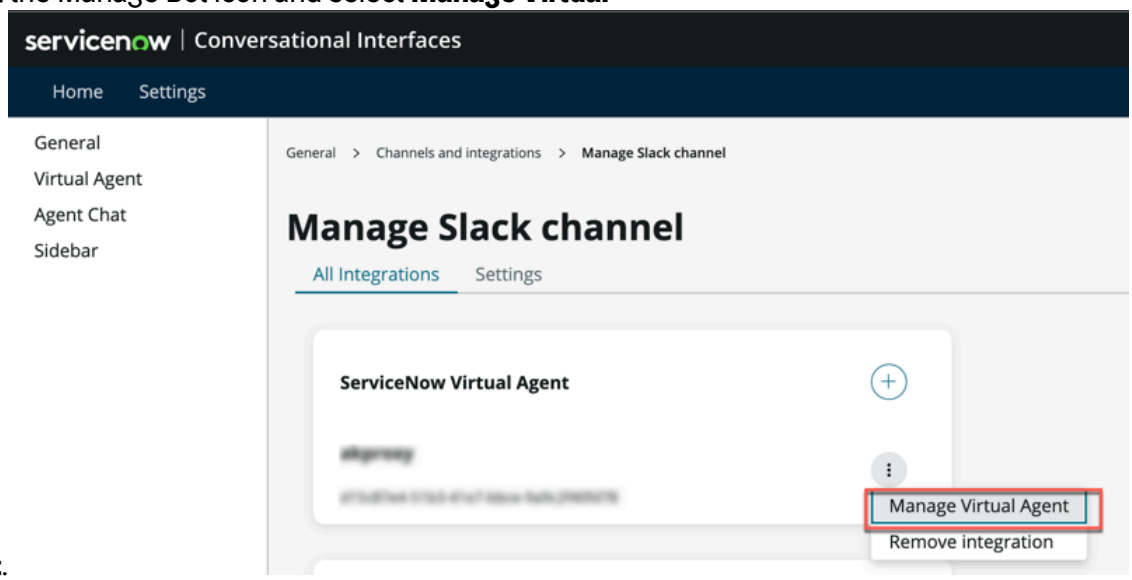
Before you begin

Roles required:

- virtual_agent_admin and external_app_install_admin or admin
- Administrator for third-party applications

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
3. Select **Manage** on the Slack tile.
   When you select **Manage**, you are redirected to the Manage Slack channel page where you can manage the bots.
4. To integrate your ServiceNow instance with another Slack bot, select the Add integration for ServiceNow Virtual Agent icon against the ServiceNow Virtual Agent.
   Additionally, you can also select the **Add integration** drop-down on the top-right of the Manage Slack channel page and select **Integrate with ServiceNow Virtual Agent**.
5. Select the Manage Bot icon and select **Manage Virtual Agent**.



   You are redirected to the Bot Configuration page for the selected bot.
6. Select the **Branding** tab to brand your ServiceNow Virtual Agent bot.
   For more information about branding your bot, see Configure branding for your Virtual Agent bot in Slack.
7. Select the **Bot Messages** tab to create and edit a bot message.
   For more information, see Create bot messages.

Remove ServiceNow Virtual Agent integration with Slack

Remove the ServiceNow Virtual Agent integration from your ServiceNow instance to disassociate the Slack app.

Before you begin

Roles required:

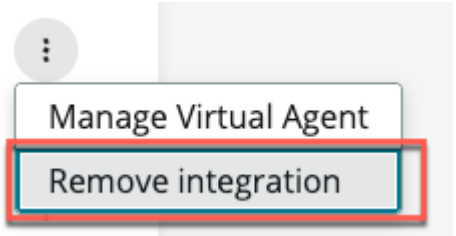
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Virtual_agent_admin and external_app_install_admin or admin
- Administrator for third-party applications


Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
3. On the Channels and integration page, in the Slack tile, select **Manage**.
4. In the Manage Slack channel page, find the ServiceNow Virtual Agent integration to remove from your ServiceNow instance, select the manage bot icon ⋮, and select **Remove integration**.

Remove integration with ServiceNow Virtual Agent



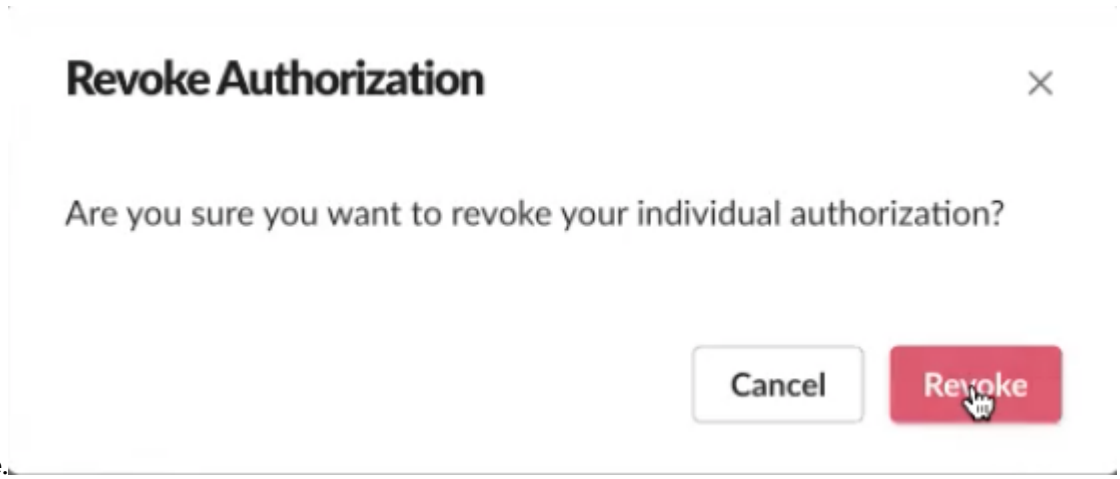5. In the Remove integration confirmation message, select **Remove**.
   You are redirected to the Slack App Directory.
6. On the Slack app directory, navigate to the Configuration tab, and select **See All** against **1 authorized member**.
7. Select **Revoke** in the 1 Authorized member pop-up.
8. Select **Revoke** in the confirmation



message.
A message appears saying that **You have successfully removed an authorization for Now Virtual Agent**.
ServiceNow Virtual Agent integration with Slack is removed from your ServiceNow instance.

Integrating a Self-configured bot with Slack workspace

Enables ServiceNow® Virtual Agent to allow multiple ServiceNow instances to integrate with single Slack workspace. This integration also supports GCC deployments.

The Virtual Agent integration with Slack creates a one-to-one association between the ServiceNow instance that you are installing from and the Slack workspace in which the integration runs. By default, Virtual Agent supports one-click installation that integrates one Slack workspace with one ServiceNow instance. However, by enabling this integration, Virtual Agent

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

allows you to integrate multiple ServiceNow instances with a single Slack workspace. You can integrate multiple ServiceNow instances with a single Slack workspace by creating a bot for each of the instances on the targeted Slack workspace.

Create a bot in Slack

You must create a self-configured bot in the targeted workspace in Slack to be able to integrate with the Virtual Agent.

Before you begin

Role required: none

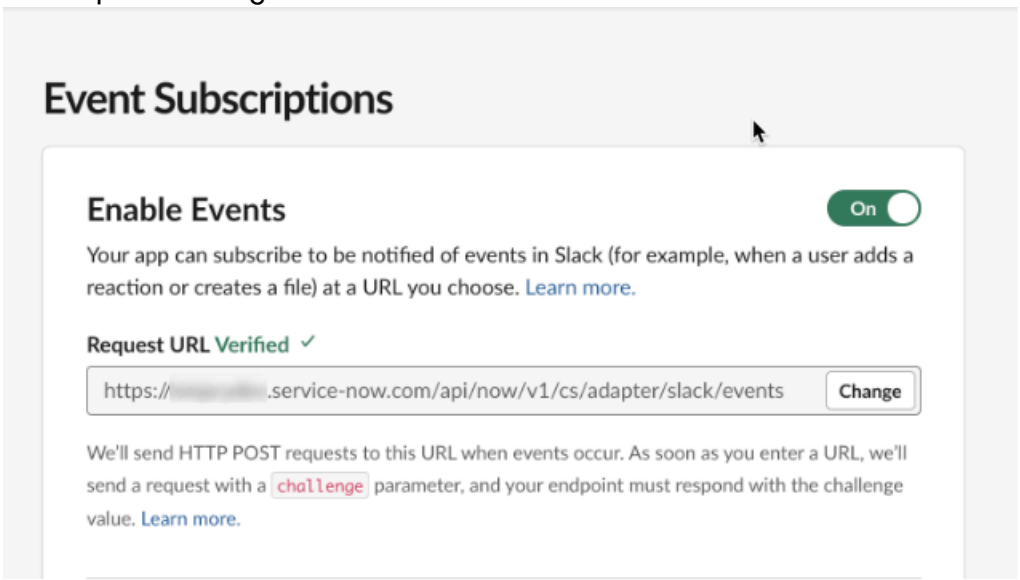
Note:
Users must have permissions to create a bot in the targeted workspace.

Procedure

1. Log in to Slack API.
2. Navigate to **Your Apps** and click **Create New App**.
3. Enter an **App Name**, select your **Slack Workspace** and click **Create App**.
4. Configure Interactive Components.
   a. Navigate to **Interactivity** > **Shortcuts** in the left menu and turn on **Interactivity**.
   b. Update the **Request URL**.
   If you are setting up your self-configured bot on an ServiceNow instance, then the request URL must be `https://<instance-name>/api/now/v1/cs/adapter/slack/actions`.
   c. Click **Save**.
5. Configure Event Subscriptions.
   a. Click **Event Subscriptions** in the left menu and turn on **Enable Events**.
   b. Update the **Request URL**.
   If you are setting up your self-configured bot on a ServiceNow instance, then the request URL must be `https://<instance-name>.service-now.com/api/now/v1/cs/adapter/slack/events`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

c. Wait for the Request URL to get verified.



d. Under Subscribe to bot events, click **Add Bot User Event** and add `message.im`.

e. Click **Save**.

6. Navigate to the **Incoming Webhook** tab and slide the **Activate Incoming Webhooks** toggle switch to enable it.
7. Configure OAuth & Permissions.

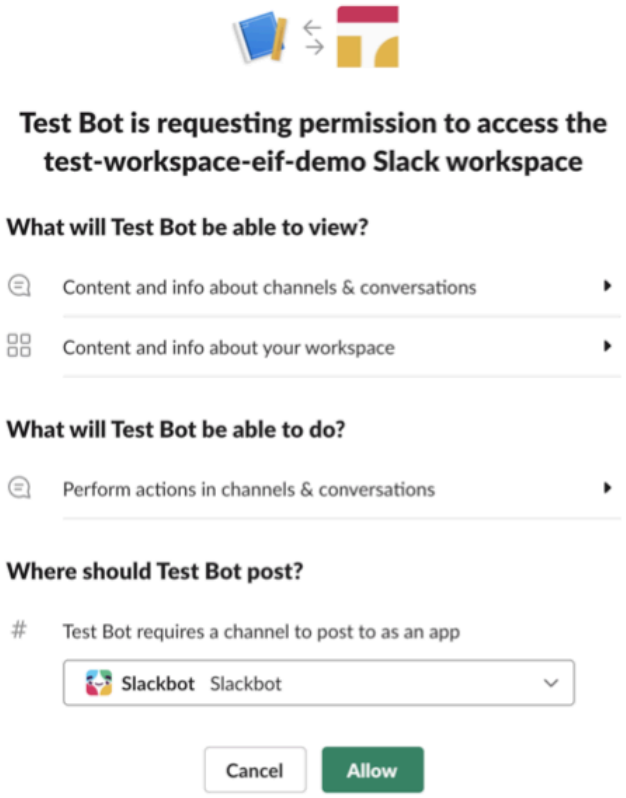
a. Click OAuth & Permissions from the left menu and navigate to **Scopes** > **Bot Scopes**.

b. Select **Add an OAuth Scope** and add the following scopes:

- chat:write
- files:read
- files:write
- im.history
- incoming-webhook
- team:read
- users:read
- users:read.email

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

8. Navigate to **OAuth & Permissions**, click **Install to Workspace**, and click **Allow**.



Retrieve Self-configured bot details

Retrieve the details of the bot that you created in the Slack workspace to integrate with the ServiceNow instance.

Before you begin

Role required: admin

Procedure

1. Log in to Slack API.
2. Click **Your Apps**, select a bot and navigate to **Settings** > **Basic Information** > **Display Information** to copy the **App name** (Bot name).
3. Enter your **Bot User OAuth Access Token** in the token argument, click **Test Method**, and copy the **Team ID**.

> **Note:**
> You can find the Access token in **OAuth & Permissions** in your Slack app.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Argument		Value
`token`	Required	No token Or, provide your own token: xoxb-1557753420966-1632731908147-krt Need a token? Create and install a Slack app to begin.
`team`	Optional	
Extra args		

Test Method

URL

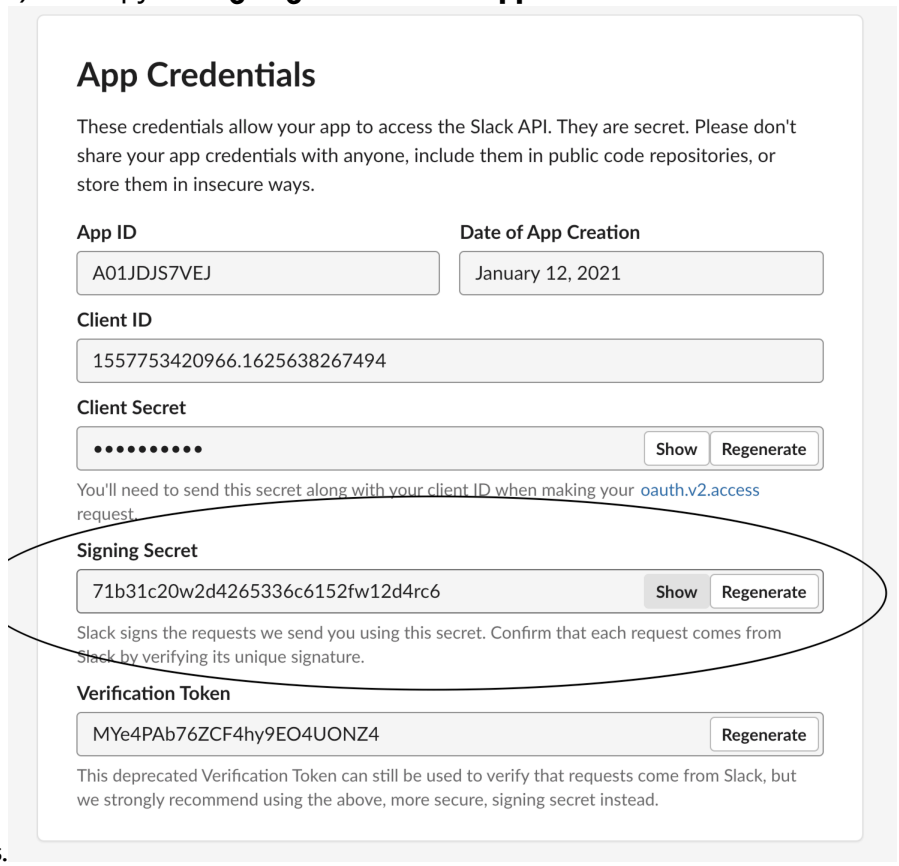
`https://slack.com/api/team.info?pretty=1`

`Authorization: Bearer xoxb-1557753420966-1632731908147-krtnO65eEJWnB17X7P811117`



```
{
    "ok": true,
    "team": {
        "id": "T01GDN5CCUE",
        "name": "test-workspace-eif-demo",
        "domain": "va-eifdemo",
        "email_domain": "",
        "is_verified": false,
        "icon": {
            "image_34": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-34
            "image_44": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-44
            "image_68": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-68
            "image_88": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-88
            "image_102": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-1
            "image_132": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-1
            "image_230": "https://a.slack-edge.com/80588/img/avatars-teams/ava_0009-2
            "image_default": true
```


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. Navigate to Basic Information in your Slack workspace (in api.slack.com) and copy the **Signing Secret** under **App Credentials**.



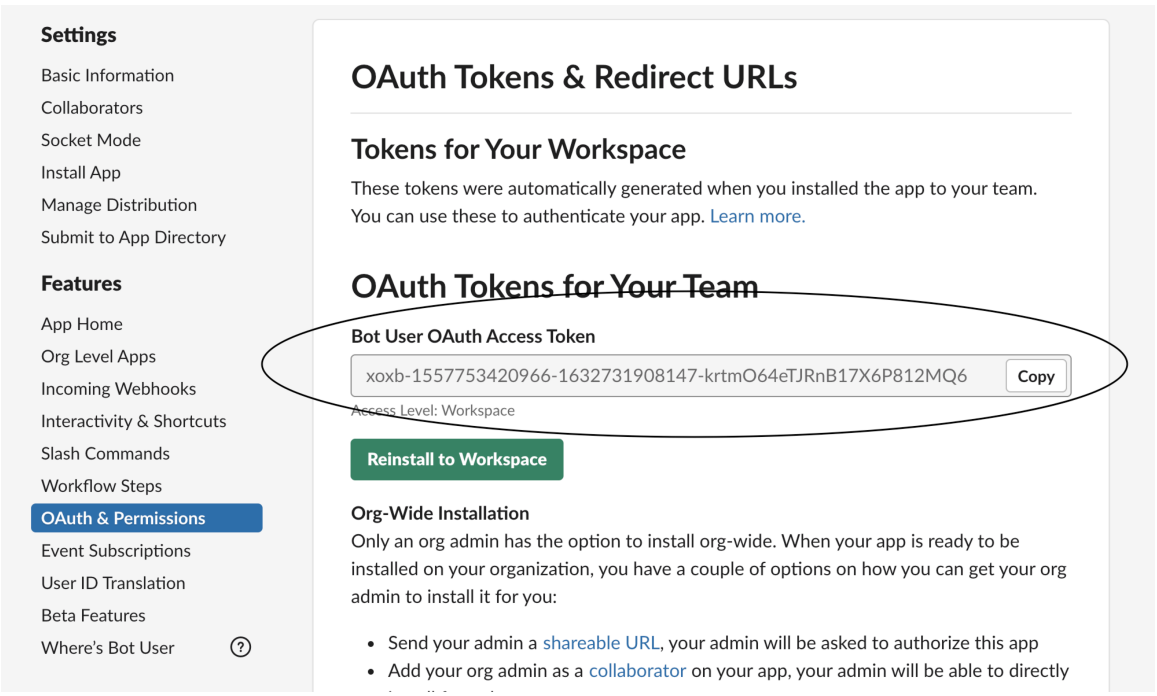5. Navigate to OAuth & Permissions in your Slack workspace and copy the **Bot User OAuth Access Token**.



Result

You should now be able to interact with your Self-configured bot.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If you do not see your bot under the Apps section, then click **Add Apps** and search for your bot and select it. You can type **hi** to receive a response.

Integrate ServiceNow instance with Self-configured bot

Add the Self-configured bot to your ServiceNow instance to complete the integration with Slack.

Before you begin
Role required: virtual_agent_admin or admin and Slack workspace admin

This installation requires a ServiceNow instance other than the one integrated with the production bot to integrate one bot (of the multiple bots) with a single Slack workspace.

> **Note:**
> The ServiceNow instance that you will use to integrate the Self-configured bot with a single Slack workspace must not be an instance that you have used for integrating the ServiceNow Virtual Agent.

Ensure that you created a bot on the Slack workspace and fetched the bot details to complete the integration. For more information, see Create a bot in Slack.

Fetch the Name of the bot, Team ID, Signing Secret, and Access Token details for your bot created in Slack. For more information, see Retrieve bot details. Use this information when setting up the bot in your ServiceNow instance.

Procedure

As a ServiceNow admin, set up the bot on the ServiceNow instance in the global scope.

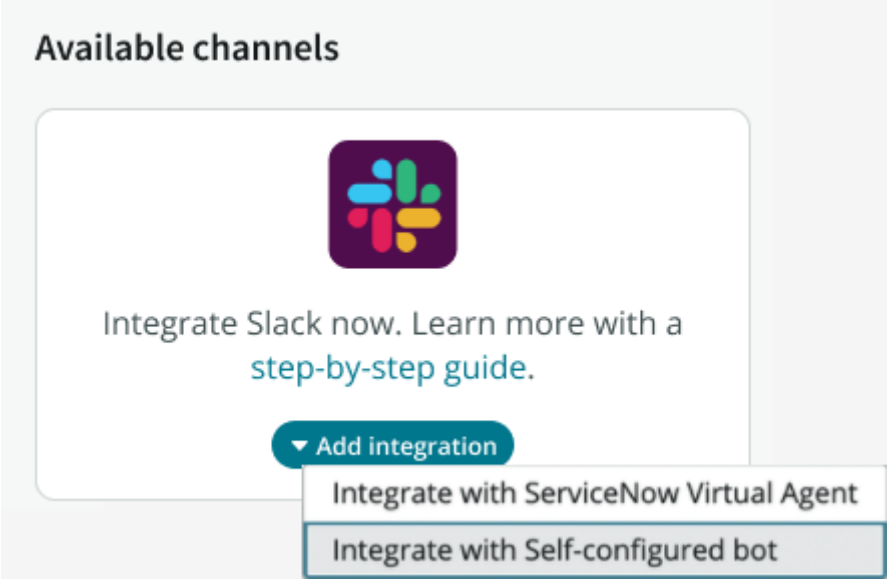
> **Note:**
> The virtual_agent_admin can install bots with multiple instances or bots apart from the production bot in the ServiceNow instance and avail all the features of Virtual Agent and also have the flexibility to integrate one of the multiple ServiceNow instances with a bot on a single Slack workspace.

a. Log in to your ServiceNow instance and navigate to **All** > **Conversational Interfaces** > **Settings**.

b. In **General Settings** under **Channels and integrations**, select **View All**.
The Channels and integrations page opens.

c. Under the Available Channels section in the Slack tile, select **Add Integrations** and select **Integrate with Self-configured bot**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Note:
The **Add Integrations** button is available only after installing the Conversational Integration with Slack plugin (sn_va_slack) on your ServiceNow instance. For more information about getting the plugin installed, see Install the Conversational Integration with Slack.

d. In the Integrate Slack with self-configured bot page, provide the following details that you made a note while creating the Slack bot and select **Submit**.

- **Name of the bot**
- **Team ID**
- **Signing Secret**
- **Access Token**

For more information, see Retrieve bot details.

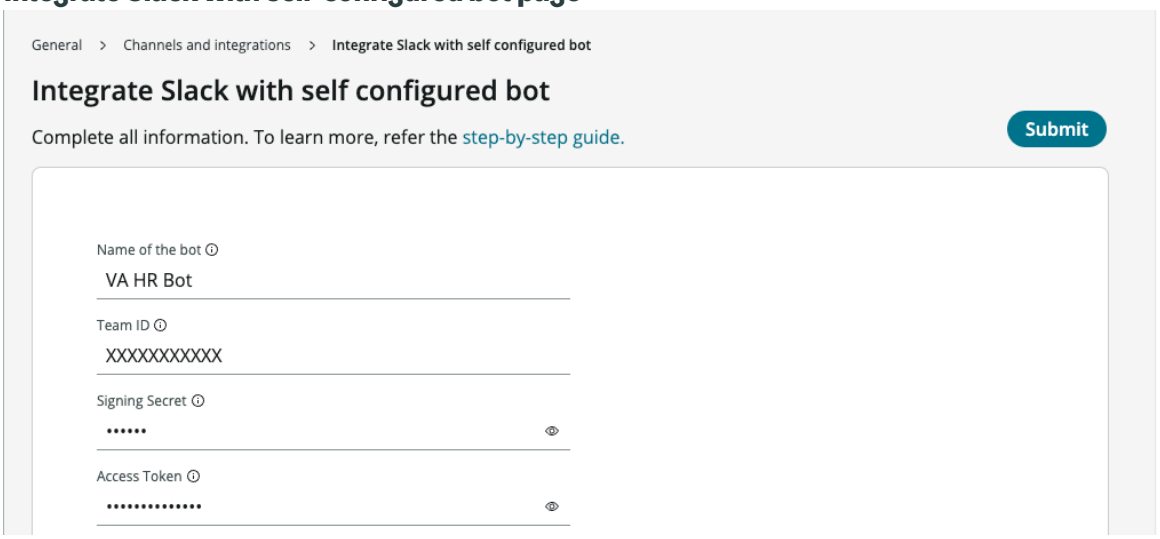
Integrate Slack with self-configured bot page



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
For each additional ServiceNow instance to be integrated, repeat steps 1 and 2.

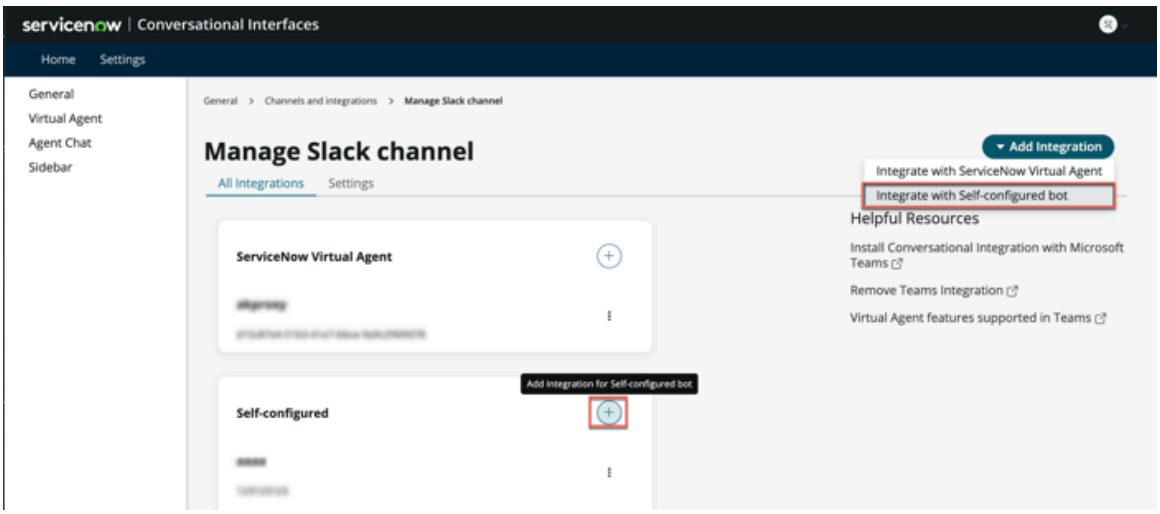If you would like to integrate your ServiceNow instance with another Slack bot, select the Plus icon against the Self-configured bot or select the **Add integration** button on the Manage Slack channel page and select **Integrate with Self-configured bot**.



You will receive a message that the installation is successful.

Manage the self-configured bot integration with Slack

Manage your Conversational Integration with Slack application, its branding, and customize the self-configured bot-specific messages in your ServiceNow instance after integration.

Before you begin

Roles required:

- virtual_agent_admin and external_app_install_admin or admin
- Administrator for third-party applications (Slack)

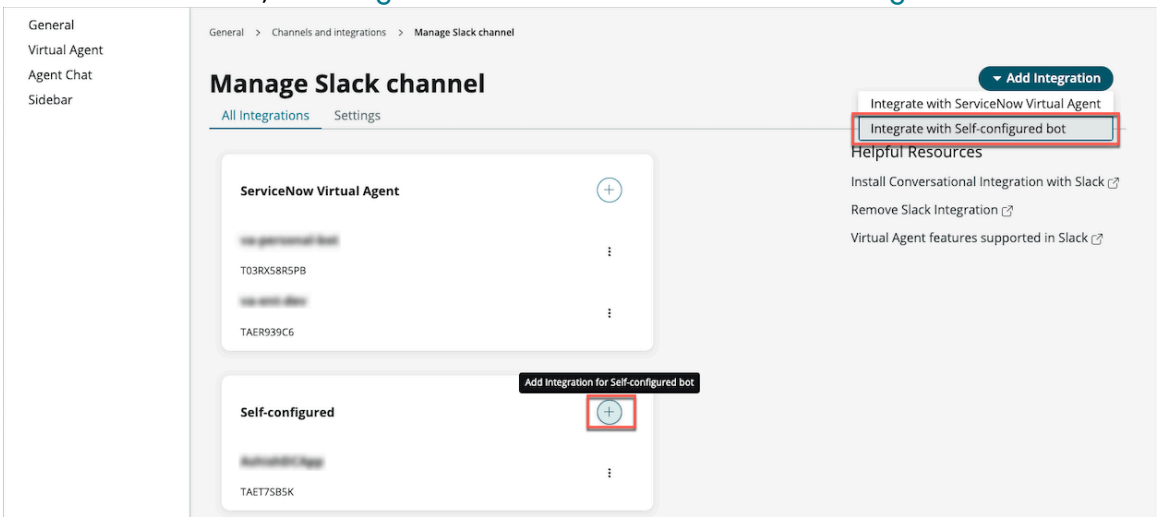
Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
3. Select **Manage** on the Slack tile.

   If you would like to integrate your ServiceNow instance with another Slack bot, select the Plus icon against the Self-configured bot or select the **Add integration** button on the Manage Slack channel page and select **Integrate with Self-configured bot**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For more information, see Integrate ServiceNow instance with Self-configured bot



When you select **Manage**, you are redirected to the Manage Slack channel page where you can manage the bots.

4. Select the Manage Bot icon ⋮ and select **Manage Bot**.
   You are redirected to the Bot Configuration page for the selected bot.
5. Select the **Configuration** tab to brand your Self-configured bot.
   For more information about branding your Self-configured bot, see Configure branding for your Self-configured bot.
6. Select the **Bot Messages** tab to create and edit a bot message.
   For more information, see Create bot messages.

Remove Self-configured bot integration with Slack

Remove the Self-configured bot integration from your ServiceNow instance to disassociate with the Slack app.

Before you begin

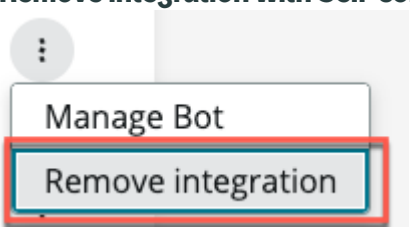
Roles required:

- Virtual_agent_admin and external_app_install_admin or admin
- Administrator for third-party applications

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, select **View All**.
3. On the Channels and integration page, in the Slack tile, select **Manage**.
4. In the Manage Slack Channel page, find the Self-configured bot integration to remove from your ServiceNow instance, select the manage bot icon ⋮, and select **Remove integration**.

Remove integration with Self-configured bot



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

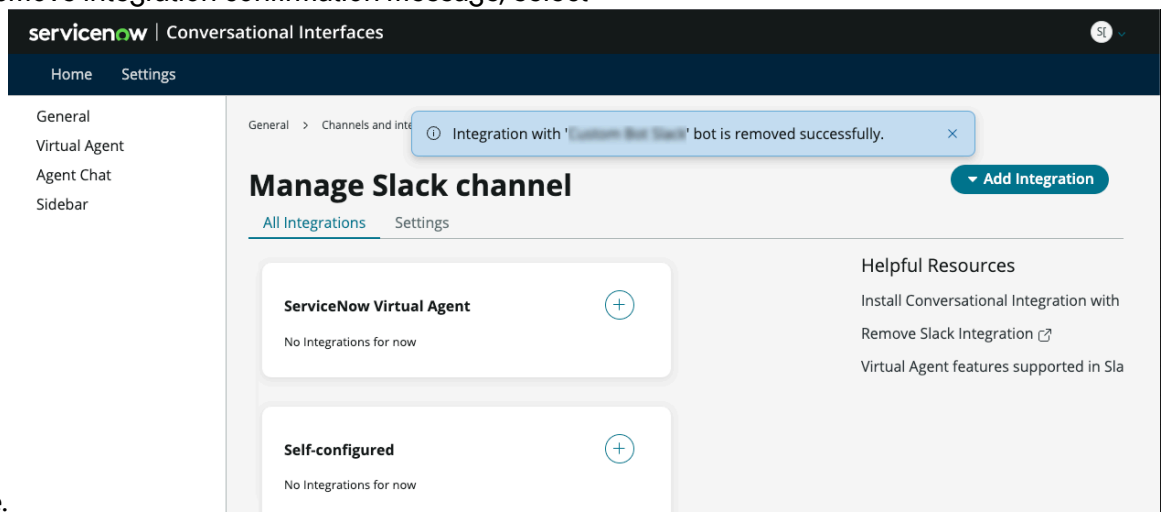5. In the Remove integration confirmation message, select



Remove.
The Self-configured bot integration with Slack has been removed successfully.

Configure Virtual Agent settings for Slack

Configure your Slack bots that are integrated with the Virtual Agent to enable notifications, to link ServiceNow user profiles, and to set up system messages and contextual actions.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In **General Settings** under **Channels and integrations**, click **View All**.
3. On the Channels and integrations page, in the Slack tile, click **Manage**.
4. Select the **Settings** tab.
5. Slide the **Enable Notification for all users** toggle switch to disable notifications for the linked users.

   Note:
   - The **Enable Notification for all users** toggle switch is selected by default.
   - The **Automatically Link ServiceNow user profiles** toggle switch is selected by default and disabled for any further change. This option links all the active ServiceNow accounts automatically to the associated Microsoft Teams bot.

6. Set up the **Global Messaging Settings**.

   Note:
   Any changes made to these settings will reflect in all the channels.

   - **System Messages**: Customize the default system messages displayed during Virtual Agent conversations.

     For more information about changing or updating a system message, see Change system messages.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **Contextual Actions**: Customize the supported actions per user command inputs.

  For more information about updating a contextual action, see Contextual actions for custom chat integrations.

Configure branding for your Virtual Agent bot in Slack

You have the flexibility to customize the default ServiceNow branding for your Slack Virtual Agent. You can change the production bot's name and icon.

Before you begin

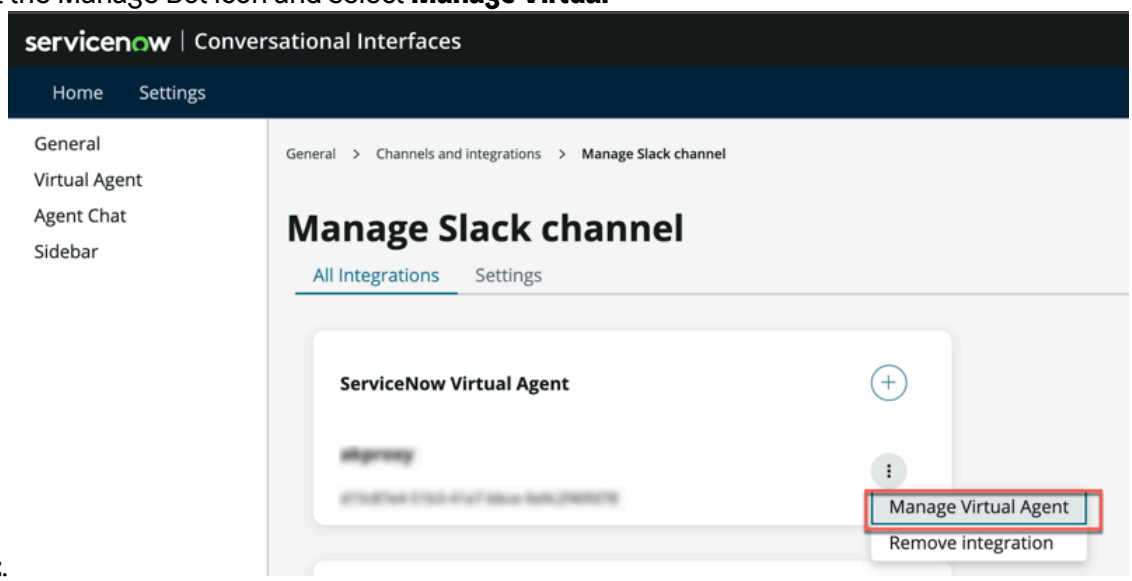
Role required: admin or virtual_agent_admin

Note:
The branding capability in Slack is available from the August 2022 store release and is compatible with the Tokyo release and above. Users must ensure that they are on the Tokyo family release and have downloaded the August store release for the Conversational Integration with Slack app to use this functionality.

Ensure that you set the *com.glide.cs.enable_slack_branding* system property to true before configuring the branding settings for your bot.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. On the **General Settings** page under **Channels and integrations**, select **View All**.
3. On the Channels and integrations page, in the Slack tile, select **Manage**.
4. Select the Manage Bot icon and select **Manage Virtual Agent**.



5. On the Branding tab, provide the following details:
   - **Bot name**: Name that appears on the Slack conversation body.

     On the Configure your bot integration in Slack page, change the default bot name to a bot name of your choice and select **Save**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:

- If you ever want to change the bot name back to the default bot name, delete the bot name that you provided and select **Save**. The bot name will be taken from the available bot name on Slack admin center.
- If you want your bot name to be different from the header and the left pane, provide a different name.

- **App name**: Name that appears in the Slack header and left panel.

  To change the App name on the Slack header and left panel, perform the following steps.

  - Log in to Slack admin center.
  - Navigate to **Slack app directory** and find your Slack pre-published app.
  - On your Slack app page, select the **Configuration** tab and navigate to the Bot User section.
  - Select **Edit** to edit the bot name.
  - In the Edit bot name pop-up, change the bot name to a name of your choice and select **Save Changes**.

    Note:
    If you want the bot name to be consistent with the bot name in the conversation body, then provide the same bot name.

- **Slack bot icon**: Icon that appears in the Slack conversation body.
  - **Use default icon**: Select the **Use default icon** radio button and select **Save** to change the bot icon back to the default bot icon.
  - **Use custom icon**:

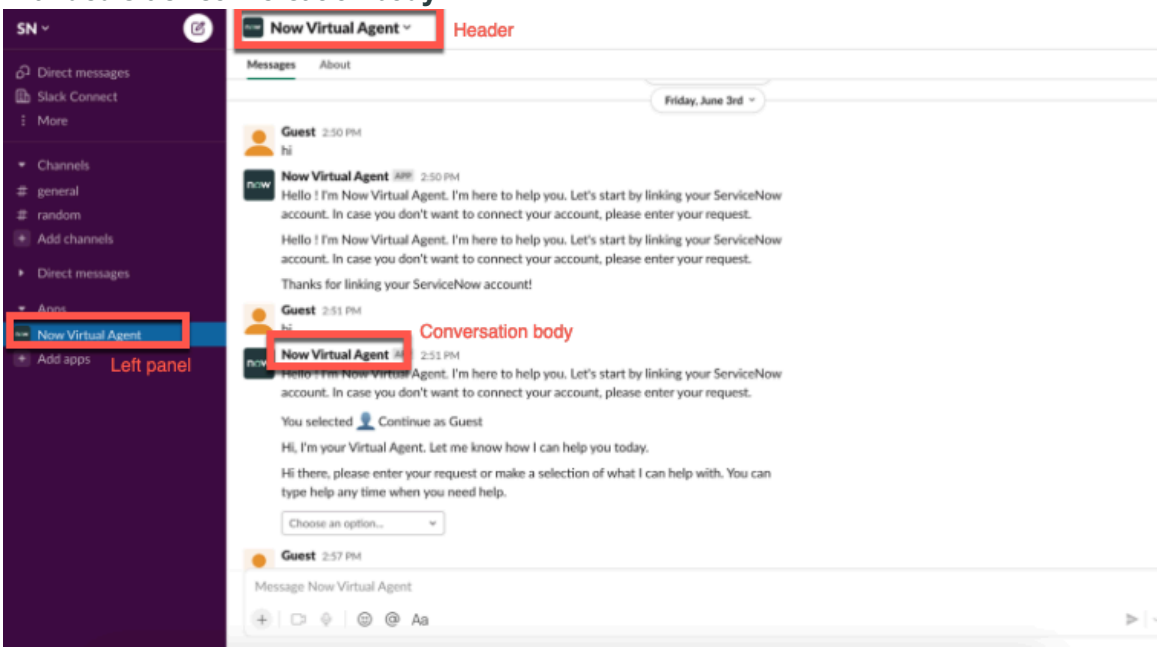
    Select the **Use custom icon** radio button to change the Slack bot icon and select **Save**.

    There are two ways to upload an image icon.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Select **Attach image** to browse for an image icon and select **Save**.
- Select the **Use image URL instead** to provide a URL of the image icon and select **Save**.

Branded Slack conversation body



What to do next

Open your Slack bot interface and start a new conversation. You will notice that the bot name has been updated on the Slack conversation body, header, and in the left pane and the bot icon is updated only in the conversation body.

Configure branding for your Self-configured bot

Configure your self-configured Slack app's branding. You have the flexibility to customize the default ServiceNow branding for the Slack self-configured bot name and icon.

Before you begin

Ensure that you have completed integrating Virtual Agent with a Self-configured bot in Slack before customizing the branding options.

Role required: admin

Procedure

1. Log in to the Slack admin center.
2. Select **Your apps** and select a bot from for which you want to change the branding settings.
3. Navigate to **Settings** > **Basic Information** > **Display Information**.
4. In the Display Information section, you can update the following details:

   a. **App name**: Name of your Self-configured bot.

   b. **Short description**: A short sentence describing your Self-configured bot.

   c. **App icon & Preview**: Image representing your Self-configured bot on the conversation body.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Ensure that the image you would like to upload as the app icon is in squares between 512 px by 512 px and 2000 px by 2000 px.

d. **Background color**: Background color of your bot icon while on the conversation body.

e. **Long description**: Description of your Self-configured bot to show on your App Detail page.

5. Select **Save Changes**.

Pre-link Virtual Agent requesters before integration with Slack

Pre-link your Virtual Agent requesters to a ServiceNow instance before they run the Conversational Integration with Slack. Batch pre-linking enables your Virtual Agent users immediately to chat with a virtual agent and receive notifications without going through the initial authentication linking process.

Before you begin

- Manage the ServiceNow Virtual Agent integration with Slack, with the **Automatically Link ServiceNow user profiles** option enabled.
- Set up Slack Spoke.

Roles required:

- virtual_agent_admin
- external_app_install_admin
- One of the following Slack administrator roles:
  - Global Administrator
  - Application Administrator
  - Cloud Application Administrator
- admin or schedule_admin to change the scheduled job script

About this task

When the **Automatically Link ServiceNow user profiles** option is enabled on the Messaging Apps Integration UI page, a batch of up to 10,000 users is automatically pre-linked to a ServiceNow instance. Your existing users are pre-linked during the initial run. Newly added users are pre-linked during subsequent daily runs.

To prevent automatic batch pre-linking, disable the **Automatically Link ServiceNow user profiles** option on the Messaging Apps Integration UI page.

Batch pre-linking of your Virtual Agent users to a ServiceNow instance before integrating with Slack includes the following benefits:

- Notifications are proactively sent by the Virtual Agent to users when their identity in Slack is associated with their identity in a ServiceNow instance. This is also true when the user is already linked with the ServiceNow Virtual Agent.
- If a user is pre-linked, and when Slack notifications are enabled in the app, notifications are pushed to the app even when a user is not logged into a Slack account.

Batch pre-linking happens automatically via the **Slack Daily Pre-Link Job** scheduled job. This job runs by default at a scheduled time (time is displayed in the time zone of the system

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

administrator) and you can change the time, if desired. To modify the default scheduled job run time or time zone, access the **Slack Daily Pre-Link Job** Scheduled Script Execution form.

Procedure

1. Navigate to **All** > **System Definition** > **Scheduled Jobs**.
2. Search for the **Slack Daily Pre-Link Job** scheduled job and click to open the Scheduled Script Execution form for the selected record.
3. In the **Run** field, change the run time to your desired time.
4. For a description of the other fields that you can change in this form, including **Time zone**, see Automatically run a script of your choosing.
5. Click **Save**.

Configure promoted topics for Conversational Integration with Slack

Configure promoted topics to push out important, common topics for users' quick consumption during a conversation with the Slack bot. You can configure up to six different promoted topics to be displayed on the Slack channel greeting message.

Before you begin

Role required: admin or va_admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. On the Virtual Agent settings page, navigate to the Custom greetings and setup and select **View All**.
   The promoted topics that you have previously configured reside in the default chat experience. For more information, see Configure a Virtual Agent chat experience. If default chat experience is the only row that you have on your instance, then you observe that the promoted topics will be applied to chat widget, Microsoft Teams, and Slack (unless you configure something unique for Slack as instructed below.)

   If you want to set up unique promoted topics for Slack that have to be different from the chat widget, follow the procedure below.
3. On the Custom Greetings & Setup page, select **New**.
4. On the form, fill in the fields.

Create New Custom Greetings and Setup

Field	Description
Name	Name of the chat experience. For example, Slack chat experience.
Description	Description of the chat experience.
Active	Enable or disable the chat experience.
Order	Order for the promoted topics to appear on the chat.
Domain	Application scope of the chat experience.
Condition Mode	Situation where your user gets this chat experience.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Available Conditions Modes: ○ **Advanced** ○ **Simple**
Condition	Condition that defines the condition mode for the chat experience. Set up a simple condition with **[devicetype] [is] [slack]**. **Note:** If you set up **[devicetype] [is] [teams]** in the Condition pop up with a higher order than the default chat experience, then Slack picks up the setup topics and promoted topics defined in this experience. This change will not affect chat widget, which is still going to inherit the setup topics and promoted topics defined in the default chat experience.

5. Select **Create custom experience**.
6. Add promoted topics in the Slack chat experience form that you created.
   Review the character length of your promoted topics before adding them for Slack. When the text in the topic gets closer to ~30 characters, the text may get truncated. For more information, see Slack document.

   a. On the Slack chat experience form, select the **Promoted Topics** tab and select **Add topic**.

   b. On the form, fill in the fields.

Create New Promoted Topics

Field	Description
Topic	Name of the topic being chosen. Use the Search icon to choose a topic.
Order	Provide the order for the topic chosen.

Note:
Similar to the chat widget, you can configure a maximum of six promoted topics for the Slack channel.

   c. Select **Save.**

What to do next
Start a conversation with the Slack bot and you should be able to see the promoted topics after the greeting message that you have setup for the Slack channel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

In you have not configured the promoted topics for Slack, then the promoted topics from the default chat experience are displayed.

Using Now Assist in Virtual Agent conversations with Slack

The Now Assist provides you with the large language model (LLM)-based conversational experience during your conversations with a Now Virtual Agent bot or a Self-configured bot that is integrated with Slack.

To enable a bot with LLM-based capabilities and experience the LLM-based conversations with Now Assist, you must first integrate your Now Virtual Agent bot or a Self-configured bot with Slack.

Integrating Slack with Virtual Agent

You can integrate Virtual Agent with Slack either with the Now Virtual Agent bot or a Self-configured bot.

To integrate Slack with the Now Virtual Agent, see Integrating ServiceNow Virtual Agent with Slack.

To integrate Slack with a Self-configured bot, see Integrating a Self-configured bot with Slack workspace.

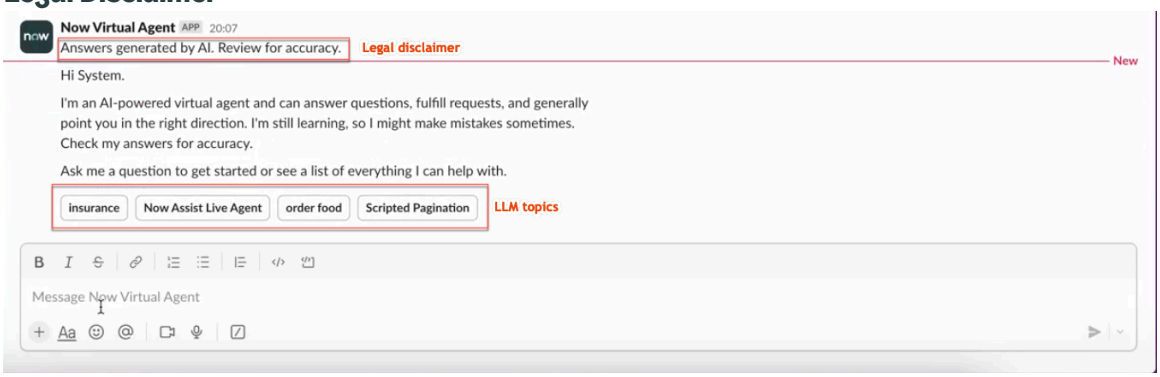
Conversational experience with Now Assist in Slack

The Now Assist provides a new AI Search experience in channels with the following features:

- **Legal Disclaimer**

  The first message in a conversation with Now Assist displays a legal disclaimer indicating that it is an AI-generated message followed by the Now Assist greeting message and LLM-enabled topics.

  Legal Disclaimer

  The Legal disclaimer message is managed by the *support-system-action* provider property defined in the [sys_cs_custom_adapter_property] table. By default, the value of the provider property is set to **true**.

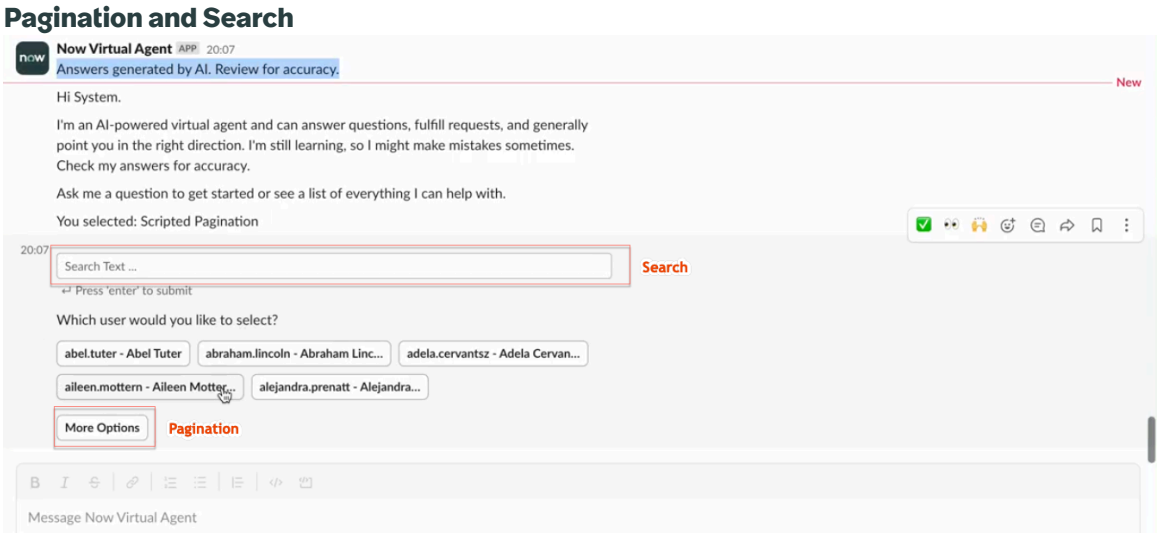
- **Pagination and Search**

  You can navigate through multiple pages of choices and search for specific items or users, using the Search bar.

  When you select an LLM-enabled topic, the Search bar is displayed along with the available choices related to the selected topic and the **More options** button. You can either search for an item or user using the Search bar or pick an item or user from the choices available. If you want to look for more available options, you can navigate to the next page using the **More**

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Options button. If you would like to go back to the previously listed choices, you can use the **Previous Options** button.



If you have searched for a user or an item, the choices related to your search term are displayed. You can either select from the choices available or reset the search and pagination.

Tip:
You can reset the pagination and search by selecting Enter in the Search bar.

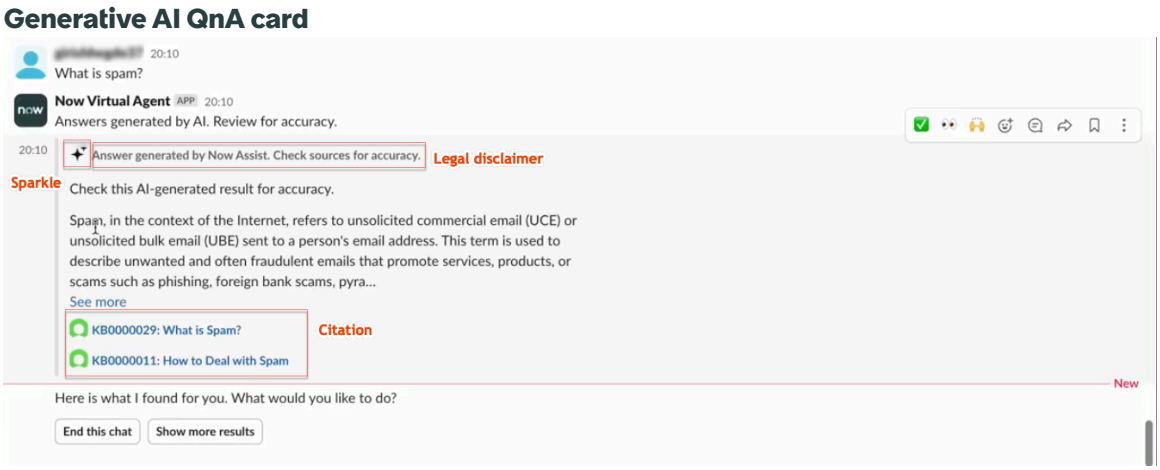
The pagination and search capabilities are managed by the following provider properties:

- *`picker_pagination_experience_supported`*: Enables the pagination experience in your LLM conversations with Now Assist. The default value of this property is **true**.
- *`picker_pagination_limit`*: Sets the page limit value for an adapter for displaying the choices. The maximum page limit value that can be set for an adapter is **100**.

  For example, if a topic has fewer than 100 choices available and the limit is set to 100, then the **More Options** button is not displayed. If a topic has more than 100 choices available when the limit is set to 100, then the **More Options** button is displayed.

- **Generative AI QnA card**

Use this feature to ask questions and get answers from Now Assist through LLM in a card format. The response is displayed with a sparkle image, the legal disclaimer, and the citation about the question asked.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For more information about enabling LLM for your bots that are integrated with Slack, see Enable Now Assist in Virtual Agent for Slack.

Enable Now Assist in Virtual Agent for Slack

Enable the large language model (LLM)-based conversational experience with Now Assist in your Virtual Agent integrated with Slack.

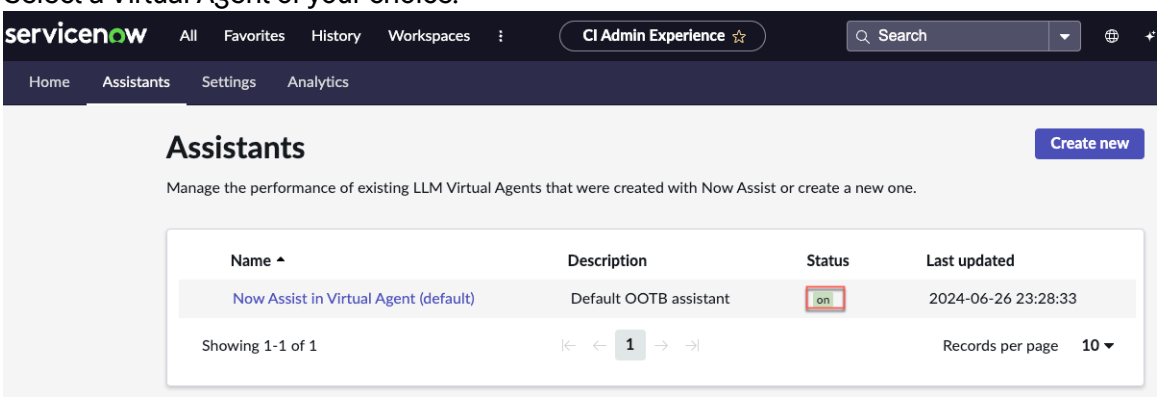
Before you begin

Ensure that you enable AI Search to have Now Assist conversations using the Now LLM Service. For more information about enabling AI Search, see Enable AI Search for Next Experience.

Role required: admin

Procedure


1. Log in to your ServiceNow instance and navigate to the Now Assist Features page through one of the following navigation paths:
   - **All** > **Now Assist Admin** > **Now Assist Features**.
   - **All** > **Now Assist Admin** > **Features**.
2. From the Now Assist Features page, select **Platform**.
3. On the Now Assist skills for Platform page, select **View details**.
4. On the Conversational experience page, select **Set up Now Assist in Virtual Agent**. You're directed to the Assistants page to select the Virtual Agent. For example, the **Now Assist in Virtual Agent (default)**.
5. Select a Virtual Agent of your choice.




> **Note:**
> Verify that the Virtual Agent you choose is integrated with the Slack workspace before selecting.

6. On the bot page, navigate to **Display experience** > **Channels** from the pane.
7. Select the channels to integrate with the Now Assist in Virtual Agent.

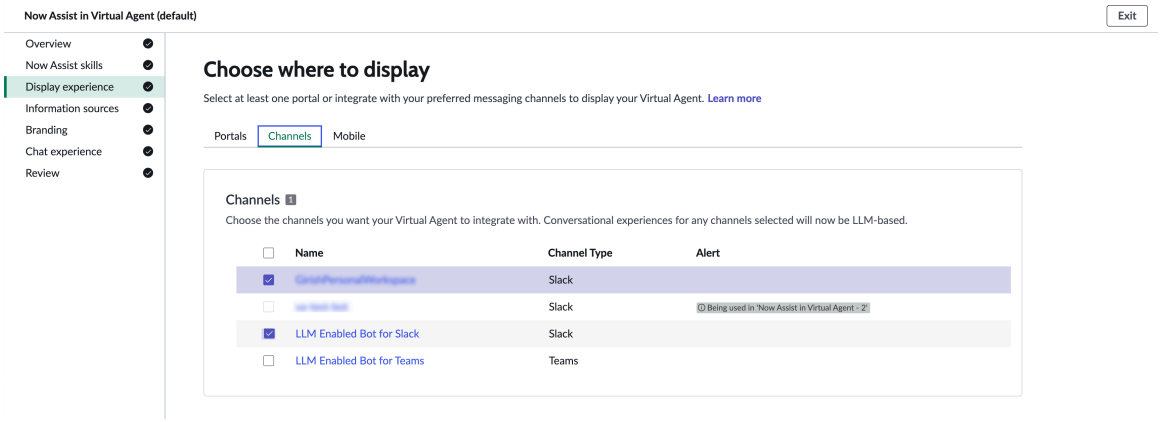
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



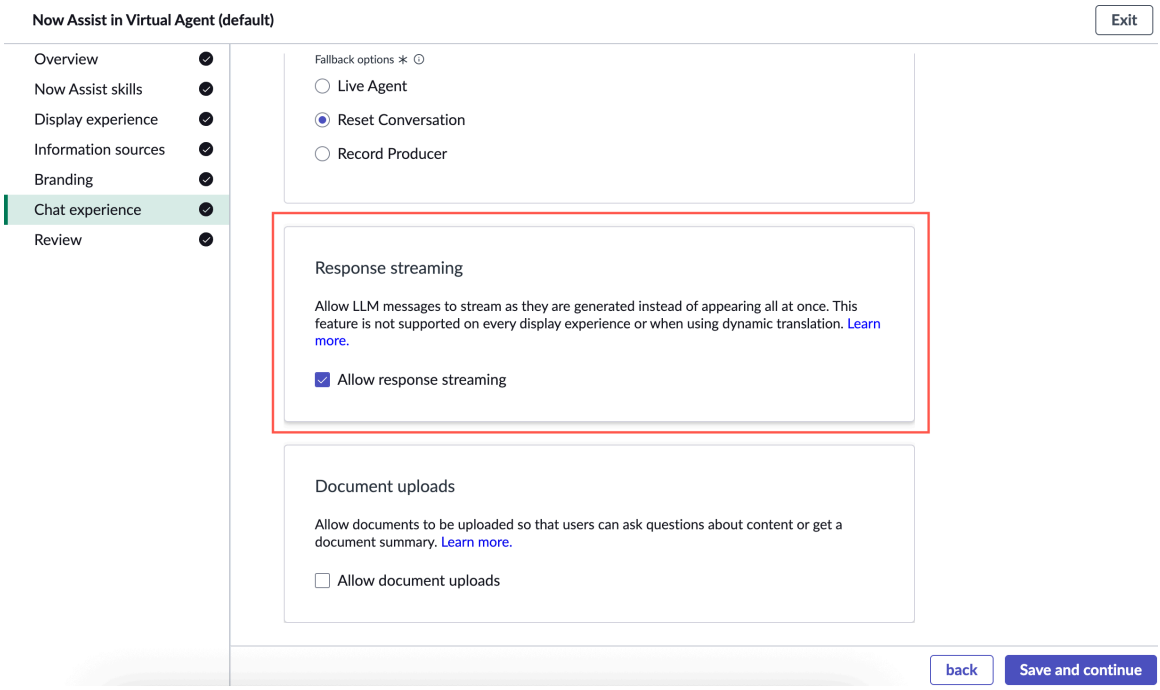8. On the bot page, navigate to **Chat experience** > **Chat experience** from the pane.
9. Scroll down to the Response streaming section and select the **Allow response streaming** check box.



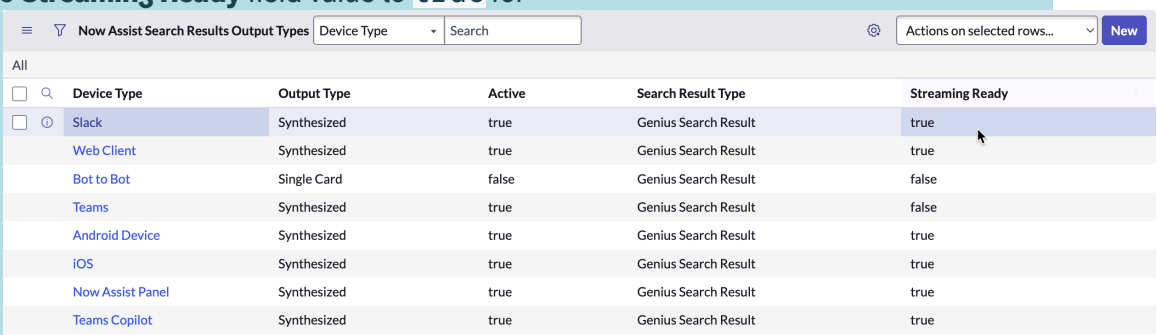Important:
In the Now Assist Search Results Output Type [now_assist_va_search_results_output_type] table, set the **Streaming Ready** field value to `true` for Slack.



10. Select **Save and Continue**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Synthesized response in Slack conversations

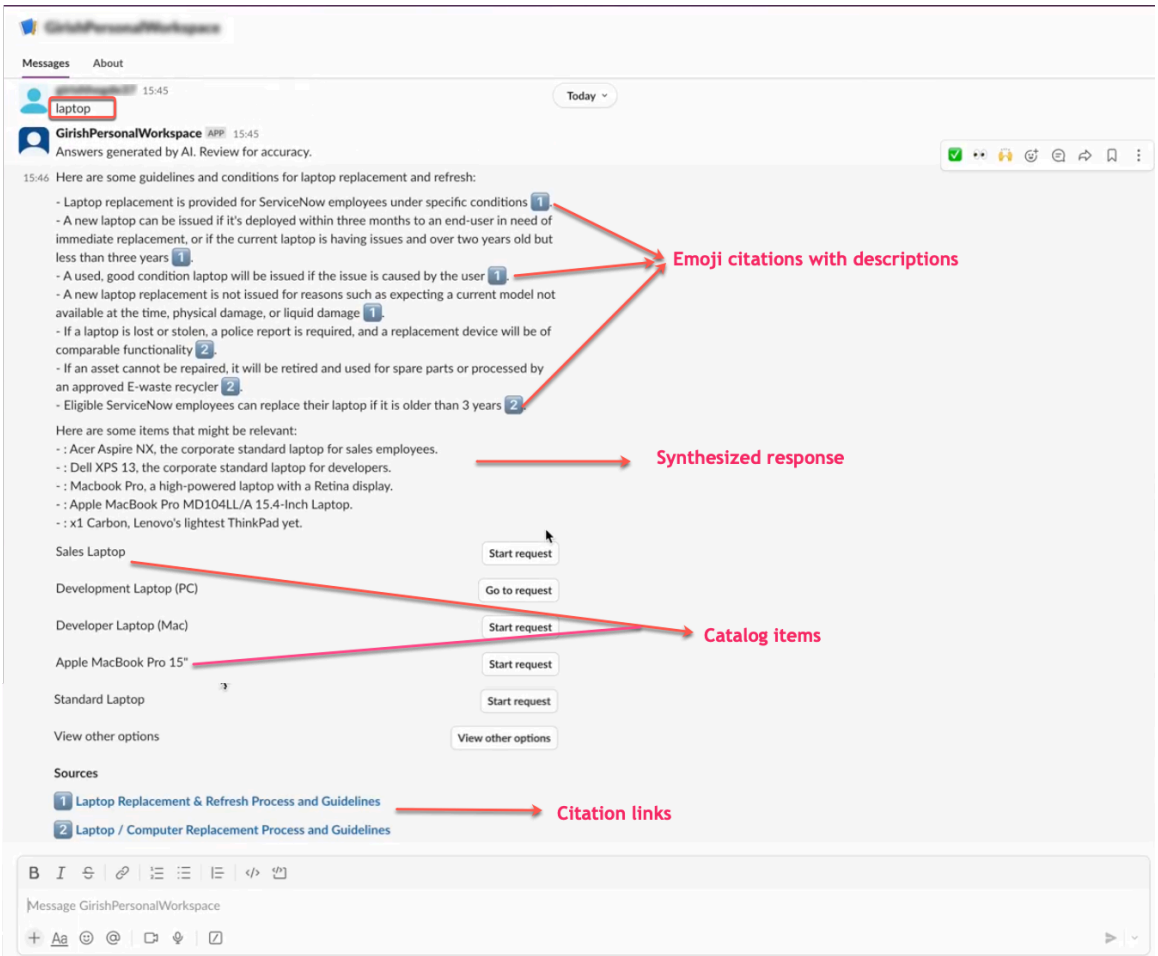
Synthesized responses in Slack conversations provide a smarter experience with Large Language Models (LLM) based results summarized in a single response for users to see information in a conversational way, and avoid browsing through carousels.

With synthesized responses implemented in Slack conversations, the user experience is increased in several ways for the response to contain the most relevant items and information, such as:

- Returning multiple Genius Results and topics in carousel format.
- Providing unified search across topics and catalog items.
- Providing a multi-Knowledge Base Q&A pipeline that enables multiple snippets from multiple Knowledge Base articles to be passed to the LLM as the context for answer generation.

The overall synthesized response helps users experience a conversational flow that understands query intent, searches across records of various types, and summarizes results in a unified, easy-to-consume response.

When you start a conversation in Slack and ask a question, with Now Assist enabled on it, you receive a summary of the response with catalog items and topics followed by the citation links. For example, if you enter a command `laptop` in your conversations, you see the responses in a synthesized format.



When you select the **View other options** button they get the list of available Knowledge Base articles and catalogs, which you can select and go through the details.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Streaming synthesized response

Streaming synthesized responses in Slack conversations provides a faster interaction and more engaged user experience with real-time updates while the messages are processed. To learn more about response streaming, see Chat streaming responses and Manage an assistant chat experience.

To enable response streaming in Slack conversations, see Enable Now Assist in Virtual Agent for Slack. With response streaming enabled in Slack conversations, you can experience the following enhancements:

- Reduced latency in conversations
- Increased engagement
- Ability to handle longer or more complex queries effectively

Example of triggering AI agents through REST API

Example of using the sn_aia REST API endpoints to trigger agents through REST API calls.

```
{
"jsonrpc": "2.0",
"id": "{{$guid}}",
"method": "message/send",
"params": {
"message": {
"kind": "message",
"role": "user",
"parts": [
{
"kind": "text",
"text": "Help me plan a calculator app"
}
],
"messageId": "{{$guid}}"
}
}
}
```

Virtual Agent features supported in Slack conversations

Virtual Agent features, such as AI Search results, Virtual Agent notifications, and Virtual Agent Designer controls for creating Virtual Agent conversations are supported in Slack bot conversations.

Note:
Conversational Integration for Slack is not supported for on-prem instances.

This section highlights key Virtual Agent features that are supported in the Conversational Integration with Slack app.

AI Search results

Virtual Agent can generate AI Search results that are displayed as Genius result cards and multi-link outputs in conversations. For details on how Virtual Agent generates AI Search results, see Improving the user experience with AI Search. The default AI Search configuration for Virtual Agent enables search results for Q&A (knowledge base) and catalog items.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

URL navigation for chat links

In Virtual Agent and Live Agent conversations on the Slack app, links to ServiceNow records open automatically in base system portals—including links displayed in output cards, Virtual Agent notifications, and AI Search results. If needed, admins can change the portals in which these links are opened. For configuration details, see Configure URL navigation for chat links.

Trusted Domains

In custom chat integrations, the values specified in the Trusted media domains field of the Provider Channel Identities table [sys_cs_provider_application] takes precedence over the Connections table [sys_cs_provider] and therefore overrides.

Chat Localization into Conversation Language

Starting from version 5.0.1, chat gets localized into the customer specified conversation language set in the Slack UI, though the session language is different.

Translation of responses to the conversation language is done using the function `gs::getMessageLang(str, lang)`, where the language retrieved from Slack is passed through this function as a parameter. The translation process works with the following three use cases, when:

- The requested language plugin is available in the ServiceNow instance.

  When the requested language plugin is available in the ServiceNow instance then the Session language honors the Conversation language set by the user.

- The requested language plugin is absent, but fallback is set and enabled.

  When the requested language plugin is absent, then the fallback language specified in the [sys_language] table is used for the translation process. However, for the fallback mechanism to work, you must enable the *`glide_i18n.language_fallback_enabled`* system property. By default, the value of the property is **false**. Set it to **true** to enable the fallback mechanism. For more information, see Set a fallback language.

- The requested language plugin is absent, but fallback is not set/enabled.

  When the requested language plugin is absent and fallback is also not set/enabled, the default translation language will be English.

Virtual Agent Designer user input and bot response controls in Slack

The Virtual Agent Designer user input controls and bot responses for creating conversation topics are supported in Slack conversations, including the table bot response and the card control that can display images.

Virtual Agent Designer user input controls and bot responses

Starting with Version 2.0.0, the card and video bot response controls are supported in Slack conversations. The video control displays a thumbnail image of the video that users select to open the video in their preferred web browser.

For more information about user input controls and bot responses, see Virtual Agent Designer user input controls and Virtual Agent Designer bot responses, respectively.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Upload multiple file types

Starting from Version 5.0.2, you can upload multiple image files (up to 10 files) from your desktop or by providing the valid link for an image picker topic in Virtual Agent. You can also share multiple files (up to 10 files) to a Virtual Agent topic via a link or by uploading it from your desktop.

To upload multiple image files or other attachments during your conversation with the bot, select **Image file types** or **All file types** respectively.

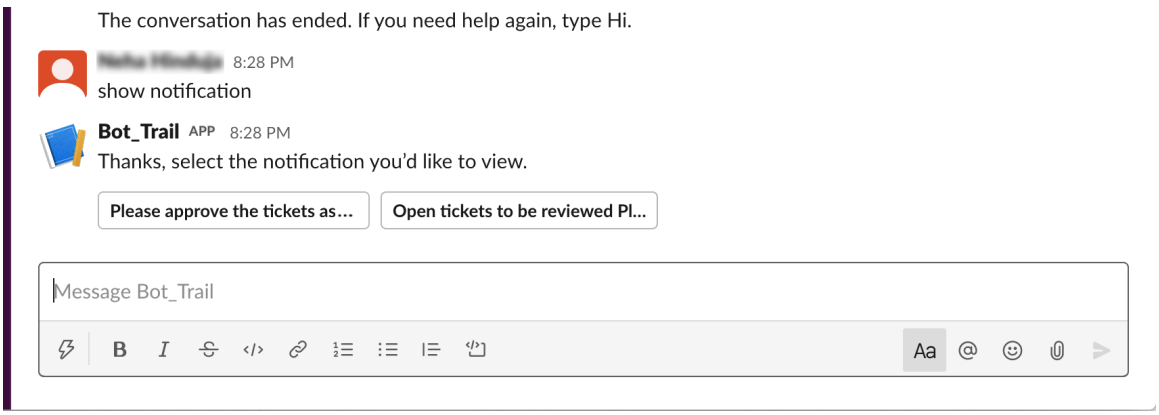
Note:
You can also share multiple files with a Live Agent from Slack.

Virtual Agent notifications supported in Slack

Slack app supports Virtual Agent notifications during conversations.

- Subscription management
  - Requesters - Use the **notification** (or **notifications**) command to subscribe to or unsubscribe from notifications.
  - Admins - Enable notifications for messaging users in the Messaging Apps Integration page.
- Notification content - Create notifications with rich content, images, and action buttons. Actionable notifications enable recipients to perform certain actions and respond to the notification, such as adding a comment or requesting a live agent.
- Notification delivery
  - Message notifications are delivered immediately to end users, even if the user is chatting with a virtual or live agent.
  - Actionable notifications are delivered only when the user is not in an active conversation with a virtual or live agent. Users can choose to:
    - Review the notifications later by using the **show notification** command.

      For example, with the **show notification** command, users can select the notification they want to view.



    - Perform or skip the actions for the notification. If users decide to skip the actions, users can return later to the notification by using the **show notification** command.

For detailed information on Virtual Agent notifications, see Configuring Virtual Agent notifications.

Unsupported Virtual Agent features in Slack

Refer to the unsupported features of Virtual Agent in Conversational Integration with Slack.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Unsupported features

Virtual Agent does not support the following functionalities during a conversation in Slack.

- Connect Support
- Geo-location topic block

Integrating Virtual Agent with Twilio

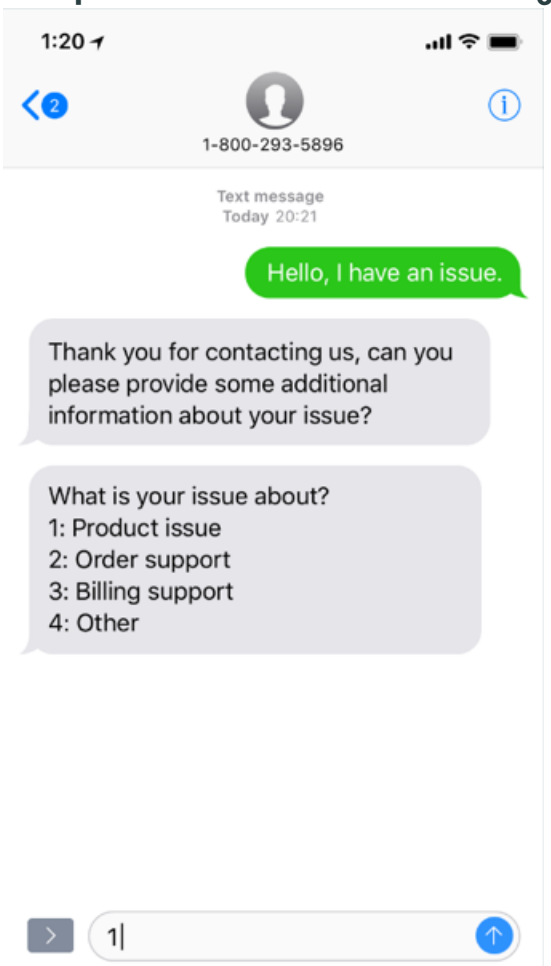
Host Virtual Agent conversations on Twilio SMS to chat with virtual agent or live agents. Use the Conversational SMS Integration with Twilio app, available from the ServiceNow Store, to associate your instance with SMS Twilio.

Capturing information from a user in an SMS chat conversation

Conversational SMS Integration with Twilio enables users to initiate conversations with Virtual Agent by messaging your Twilio phone number.

Note:
Do not use the same ServiceNowTwilioDirect or Twilio Notify phone number for Conversational SMS Integration with Twilio. Instead, use separate Twilio numbers for Conversational SMS Integration with Twilio and ServiceNowTwilioDirect.

Example SMS conversation with Virtual Agent



If a bot transfers the conversation to a live agent, the agent can respond to SMS messages in Agent Workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

After you set up the Conversational SMS Integration with Twilio, you can create SMS conversation topics in Virtual Agent Designer. For more information on using the tool, see Getting started with Virtual Agent Designer

Supported controls

The Conversational SMS Integration with Twilio does not support all the available controls in Virtual Agent Designer.


The following user input controls are supported in Twilio SMS conversations:

Supported user input controls

User input control	Description
Text	User enters a plain text string in the conversation. 
Static Choice	User selects an item from a predefined list.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

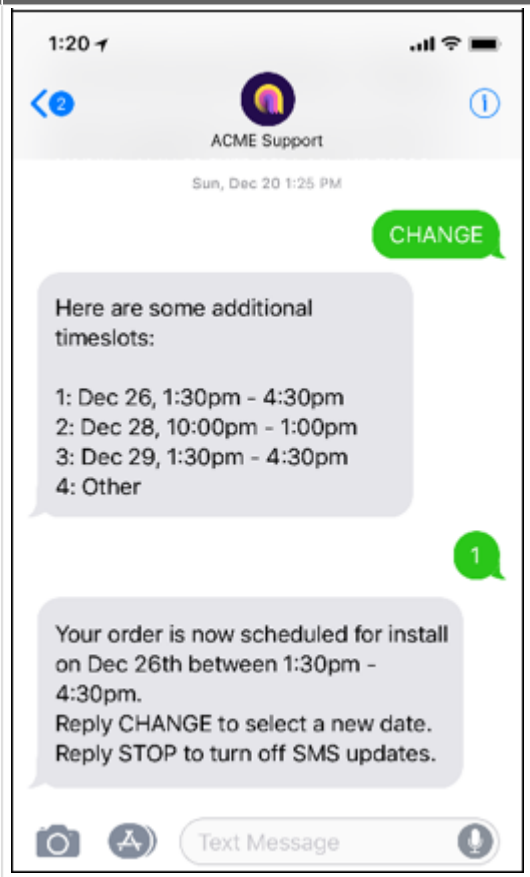Supported user input controls (continued)

User input control	Description
	
Dynamic Choice	User selects an item from a list that is created dynamically. For example, the user can select from a list of cases that they opened.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

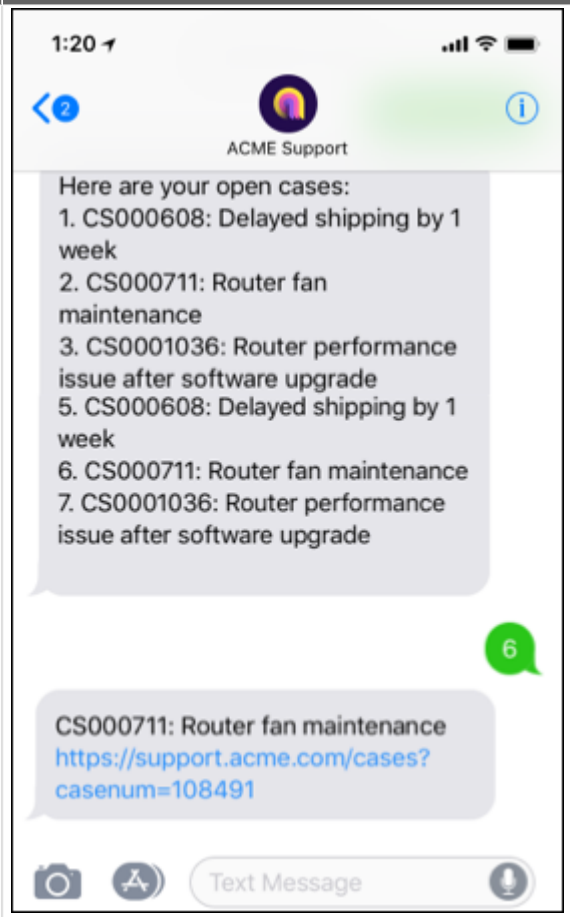Supported user input controls (continued)

User input control	Description
	
Boolean	User enters a Boolean response to the bot. For example, the user can reply "Yes" or "No" in the conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

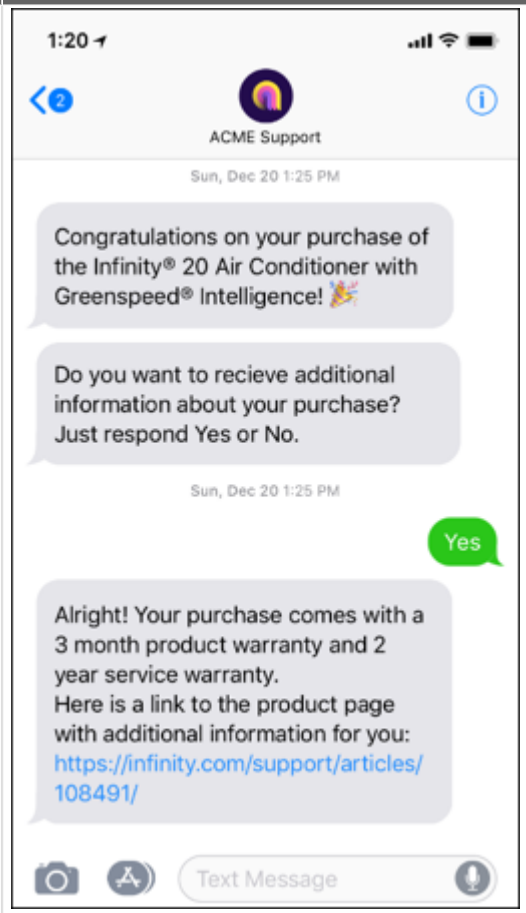Supported user input controls (continued)

User input control	Description
	
File picker	User sends a file to the bot. **Note:** Conversational SMS Integration with Twilio doesn't support all file types. Only images can be sent in an SMS conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported user input controls (continued)

User input control	Description
	

For more information on configuring user input controls, see Virtual Agent Designer user input controls.


The following bot responses are supported in Twilio SMS conversations:

Supported bot responses

Bot response	Description
Text	Bot sends a plain text string to the user.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

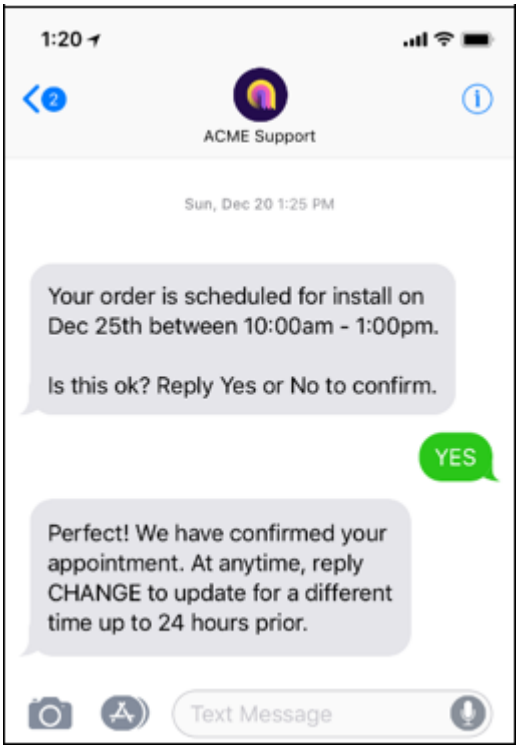Supported bot responses (continued)

Bot response	Description

Image	Bot sends an image to the user.


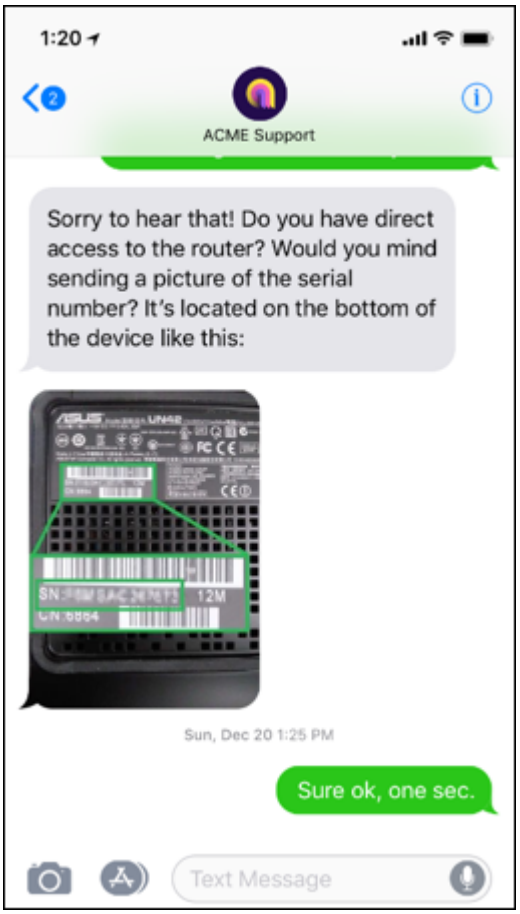
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported bot responses (continued)

Bot response	Description
	
Link	Bot sends a web link to the user.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

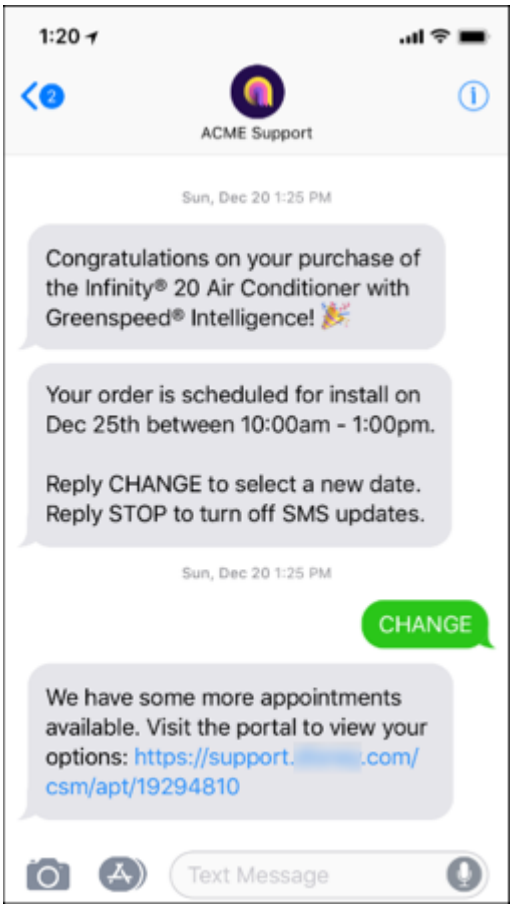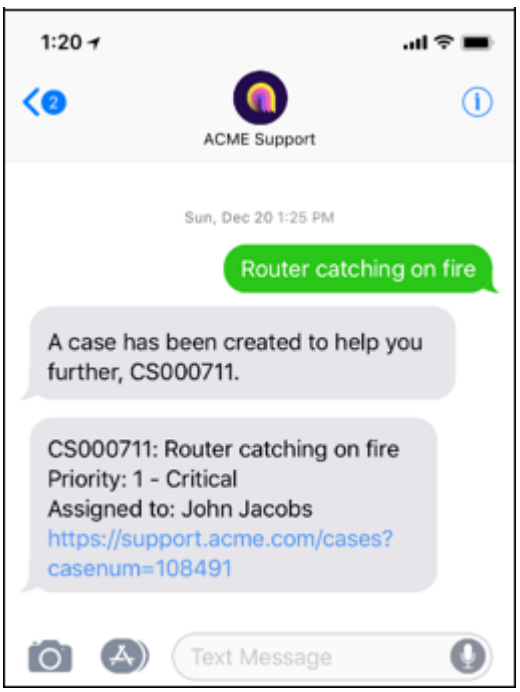Supported bot responses (continued)

Bot response	Description
	
Card	Bot sends selected information from a record on your instance. 

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For more information on configuring bot responses, see Virtual Agent Designer bot responses.

Live agents can use the Text, Card, and Image response controls to reply to users in SMS conversations.

User subscriptions for SMS update notifications

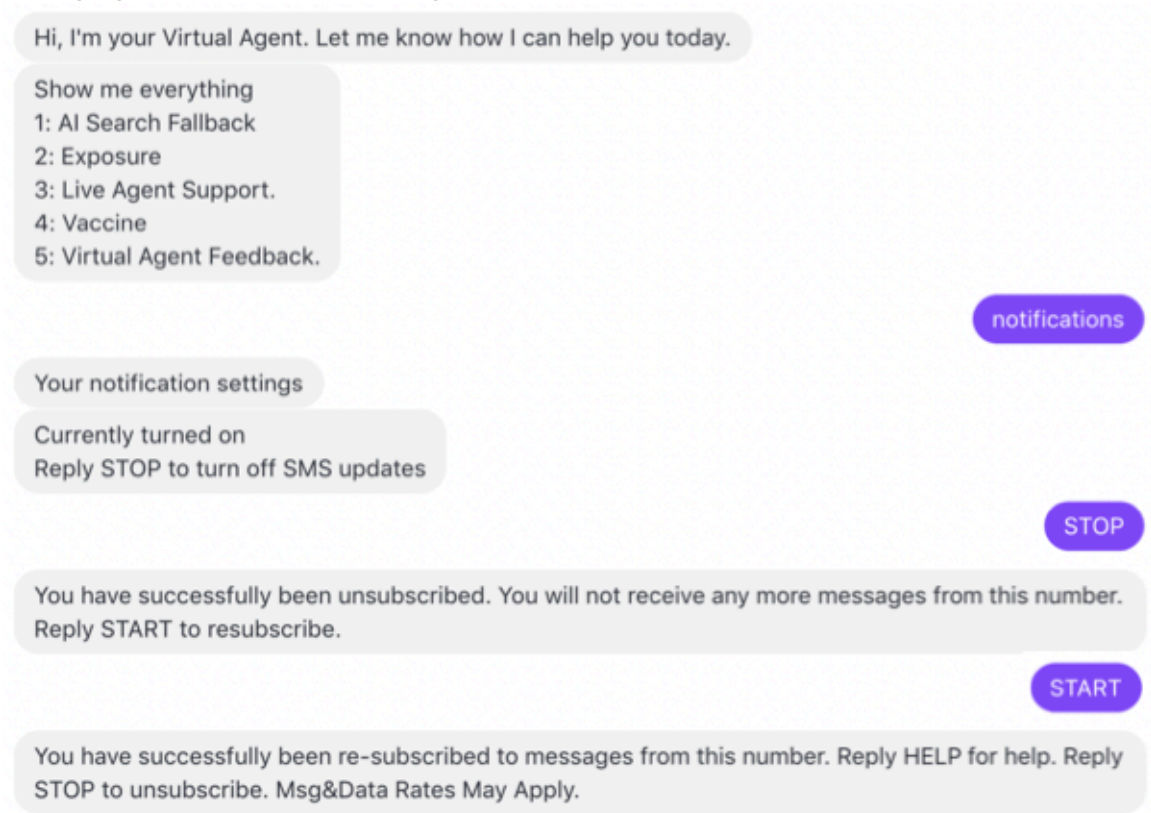
Beginning with version 1.1.1, your users with ServiceNow accounts (sys_user profiles) can choose to start or stop receiving SMS updates in their conversations.

> **Note:**
> Notifications in messaging channels can be sent to users with ServiceNow accounts. Other recipients, such as consumer and customer contacts, are considered to be guests and cannot receive notifications on messaging channels.

To comply with privacy regulations, user notifications are turned off by default. Users can opt in or change their settings in the following ways:

- To check SMS notification settings for the account, send this text: `Notification`
- To receive SMS notifications, send this text: `START`
- To stop receiving SMS notifications, send this text: `STOP`

Changing SMS notification settings



To learn more about Virtual Agent notifications, see Configuring Virtual Agent notifications.

For details about creating content for a messaging notification, see Define Virtual Agent notification contents.

Install Conversational SMS Integration with Twilio

You can install the Conversational SMS Integration with Twilio (sn_va_sms_twilio) application to host Virtual Agent conversations in the SMS Twilio application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Review the Conversational SMS Integration with Twilio application listing in the ServiceNow Store for information on dependencies, licensing or subscription requirements, and release compatibility.

Role required: admin or virtual_agent_admin

Procedure

1. Navigate to **System Applications** > **All Available Applications** > **All**.
2. Find the Conversational SMS Integration with Twilio (sn_va_sms_twilio) application using the filter criteria and search bar.

   You can search for the application by its name or ID.

   If you cannot find the application, you may have to request it from the ServiceNow Store. Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. Select a version from the list and select **Install**.

   In the Review Installation Details dialog box, any dependencies installed with your application are listed.
4. If you're prompted, follow the links to the ServiceNow Store to get any additional entitlements for dependencies.

What to do next

Set up the Conversational SMS Integration with Twilio.

Set up the Conversational SMS Integration with Twilio

Integrate Twilio with Virtual Agent so that you can engage in SMS bot conversations.

Before you begin

Before you can set up the Conversational SMS Integration with Twilio, complete the following tasks:

1. Ensure that you have valid ServiceNow entitlements for the following products and applications:
   - Integration Hub
   - Twilio spoke
   - Conversational SMS Service Channel
   - Conversational SMS Integration with Twilio

   For more information, see Get entitlement for a ServiceNow product or application.
2. Install the following applications on your instance:
   - Integration Hub
   - Twilio spoke

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Conversational SMS Service Channel
- Conversational SMS Integration with Twilio

3. Set up Twilio spoke
4. Ensure that the Conversational Custom Chat Integration plugin (com.glide.cs.custom.adapter) is active on your instance.

Role required: external_app_install_admin or va_admin

Procedure

1. Create a Hash Message Verification record.

   a. In the navigation filter, enter `hash_message_verification.list` and click **New**.

   b. On the form, fill in the fields.

   Hash Message Verification form

Field	Description
Name	Name of the auth token, such as TwilioSMSTestAppAuthToken.
Description	Description of the auth token, such as "Twilio SMS Testing application Auth Token."
Secret	Auth token that is associated with your Twilio phone number.

   c. Click **Submit**.

2. Create a Message Auth record.

   a. In the navigation filter, enter `message_auth.list` and click **New**.

   b. On the form, fill in the fields.

   Message Auth form

Field	Description
Name	Name of the message auth, such as VA Twilio SMS Test App Message Auth.
Provider	Provider of the auth token. Enter `Twilio`.
Group name	Name of the recipient group. Leave this field blank.
Service Portal	Service Portal that is associated with the message auth. Leave this field blank.
Inbound message verification	Hash message token that you created.
Outbound message verification	Hash message token that you created.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Outbound service token	Authorized outbound service token. Leave this field blank.

c. Click **Submit**.

3. Create a Messaging Provider Application record.

a. Navigate to **Conversational Interfaces** > **SMS integration with Twilio** and click **New**.

b. On the form, fill in the fields.

Messaging Provider Application form

Field	Description
Name	Name of the entity that users are contacting, such as IT Service Desk.
Phone Number	Twilio phone number that users are contacting. **Note:** Be sure to include the '+' symbol and the country code in front of the phone number. For example: +18185559485.
Message auth	Message auth that you created.

c. Click **Submit**.

4. In the Twilio Console, for the phone number that you specified in Step 3, update the SMS incoming web-hook.
To update the web-hook, navigate to the phone number in your Twilio console: **Phone Numbers** > **Manager** > **Active numbers**. Click on the phone number and enter the following address in the Messaging web-hook field:

```
https://<instance-name>.service-now.com/api/sn_va_sms_twilio/message
```

What to do next

After you set up the Conversational SMS Integration with Twilio, you can create SMS conversation topics in Virtual Agent Designer. For more information on using the tool, see Virtual Agent Designer.

Related topics

Install Conversational SMS Integration with Twilio

Install a ServiceNow Store application

Activate a plugin

Using Conversational SMS Integration with Twilio

Enable a requester to converse with an agent using the SMS conversations.

An administrator can configure the Conversational SMS Integration with Twilio application for integrating the SMS messaging app with a ServiceNow application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A requester can initiate SMS conversations with a virtual agent or live agent.

A live agent can:

- Accept SMS conversations as work items from their Agent Workspace Inbox to converse with a requester.
- Initiate SMS chat conversations from interactions of type Chat from their Agent Workspace Inbox to converse with a requester.
- For logged in customers, the system automatically identifies the customer by matching their phone number against the customer contact.

Accepting SMS conversations

As a live agent interacting with a requester over the SMS service channel, you can:

- Converse with the requester through text messages.
- Share a knowledge article displayed as a link to the requester.
- Share a record, for example, a customer service case.
- Share any URLs as links.
- Share any images as attachments.

Note:
You accept a work item from the SMS conversation in your Agent Workspace Inbox when an administrator has configured the SMS service channel for transfer of chat conversations. For more information, see Conversational SMS service channel.

Initiating SMS conversations

As a live agent, you can initiate an SMS conversation with a requester when the Agent-Initiated Messaging Interface application is configured for the SMS messaging channel. By default, the application is configured for agent to initiate SMS conversations with consumers and customer contacts. For more information, see Initiate messaging conversations from the CSM Configurable Workspace and Initiate SMS conversations from CSM Agent Workspace.

Configure SMS authentication

Authenticate all users using Conversational SMS Integration with Twilio with Soft PIN (SN) and Google authenticators as the 2-factor authentication mechanisms for account linking.

Before you begin

Role required: virtual_agent_admin or admin

Procedure

1. On your ServiceNow instance, enter `sys_cs_provider.list` and open **VA SMS Twilio Adapter Provider** record.
2. In the VA SMS Twilio Adapter Provider record, select the **Allow account linking** check box. Selecting the **Allow account linking** check box populates the **Link account action** and **Account linking type** options.
3. Select **Verification question and MFA** from the **Allow account linking** drop-down.

   When **Verification question and MFA** is selected, the **Automatic link action** field populates with the **sn_va_sms_twilio.va_sms_auto_link_account** value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

With **Verification question and MFA** selected, the end user is asked to enter the Soft Pin along with an MFA (Multi-factor Authentication) OTP (One Time Password) and Google authenticator is the default MFA method for SMS Twilio for enhanced security.

If there is an invalid input/failure, you can continue the conversation as a guest user. Upon success, the session is elevated to the authenticated user session.

Also, you can also look up the automatic link flow action from the Workflow Studio.

4. Navigate to the **Define the identity and messages for this connection** section on the SMS Twilio provider channel record and click the **Provider Properties** tab to configure the following mandatory MFA Provider Properties.
   - *verification_question_id*: Default sys_id for SoftPIN verification. The default value can be customized.
   - *two_factor_methods*: By default, Google authenticator is the two factor method if **Verification question and MFA** is selected.

     google_autheticator or **sms** are the supported values.

     Note:
     If this property value is updated, then the *mfa_question_id* property value must be updated to the sys_id of the corresponding verification Id.

   - *mfa_question_id*: Corresponds to the two-factor method. The value is the default sys_id for the google authenticator verification type.

     Note:
     If you set the value of two_factor_methods property to **sms**, then you must update the sys_id of this property to SMS verification type.

     To get the SMS verification type sys_id, navigate to **Verification Types** and copy the **SMS Code Verification Type** sys_id record.

5. To use account linking in SMS Twilio, navigate to the User [sys_user] table by entering `sys_user.list`, pick a user, and update the user's mobile phone number with a valid incoming mobile phone number.
   After the incoming phone number is authenticated, the system authenticates the user and links the phone number to the respective User [sys_user] ID.
6. To Enroll the Soft PIN, perform the following steps:
   Setting up your Soft PIN enables you to use this PIN for identifying yourself when you try to have a conversation via SMS.
   a. Impersonate the user that you picked in the Step 5 and navigate to **Password Reset** > **Enroll**.
   b. In the Password Reset Enrollment record, under the Soft PIN Verification tab, enter the Soft Pin in the **Enter the Soft PIN** field.
   c. Under the **Authenticator App Verification** tab, click **Generate a new QR code** to generate the QR code for your Google authenticator if you have downloaded one.
   d. Click **Submit**.

   When authentication is enabled for SMS, even when an actionable notification is triggered for the user in SMS conversation, user is expected to enter the Soft PIN and MFA to execute the action. For example, when an incident is updated, an actionable notification is triggered on the SMS app and you are asked to input your authentication code (Soft PIN or MFA code).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Rate limiting policy for SMS Authentication

Rate limiting policy locks out a user when an invalid or incorrect Soft PIN is entered consecutively for 3 times in a span of 24 hours.

Rate limiting policy

Rate limiting policy is enabled by default for SMS for better security. To configure it, navigate to **All**, and then enter `sys_cs_provider.list` in the filter. Open the SMS record, and configure the following properties on the **Provider Properties** tab.

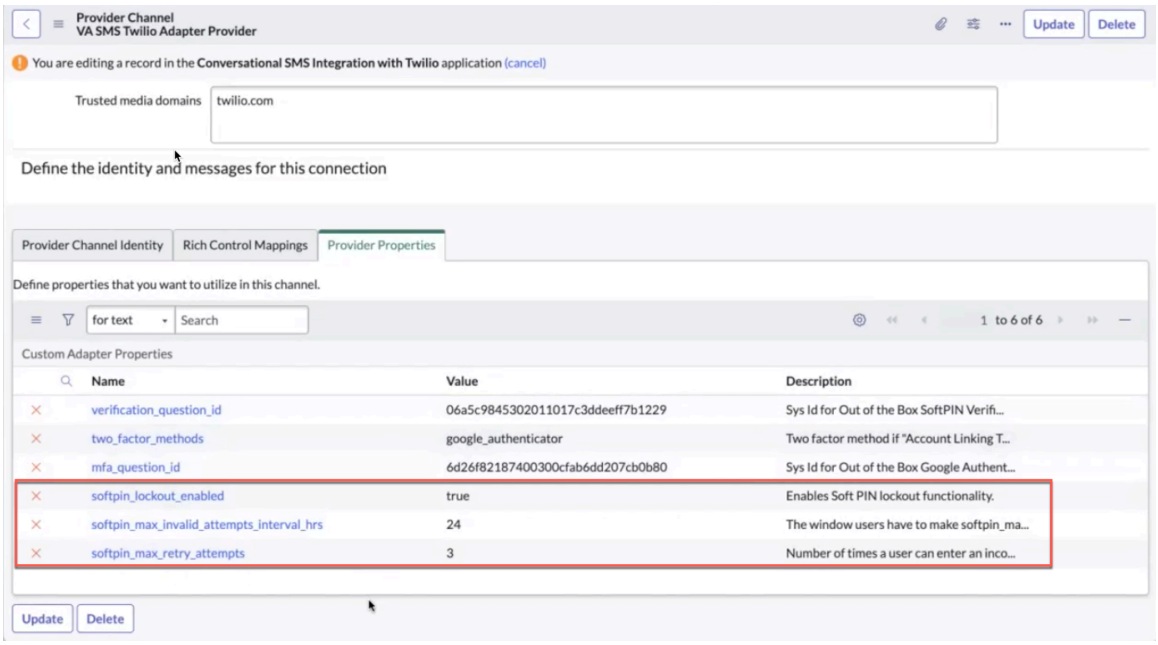
- *`softpin_lockout_enabled`*: Enables Soft PIN lockout functionality. The default Value is **true**.
- *`softpin_max_invalid_attempts_interval_hrs`*: The window where users can make the maximum Soft PIN attempts.

  Note:
  The maximum window is **24** hours.

- *`softpin_max_retry_attempts`*: Number of attempts for the user to enter an incorrect Soft PIN after the user account is locked out.

  Note:
  The maximum number of attempts is **3**.

  If your account is locked, you are treated as a guest user when you start a new conversation. The bot confirms that your account is locked. You are then provided with the public topics and you can also unlock the account using the **Setup/Reset Verification Profile** Virtual Agent topic to reset the Soft PIN and Google authenticator.



Integrating Virtual Agent with Workplace from Facebook

Enable requesters to chat with Virtual Agent or live agents using the Workplace from Facebook application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

As of September 1, 2025, Conversational Integration with Workplace from Facebook is no longer deployed, enhanced, or supported. For details, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

Integrating Virtual Agent with WhatsApp

Engage with requesters who prefer the WhatsApp messaging app to interact with your business. Requesters include customer contacts and consumers.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Overview of Integrating Virtual Agent with WhatsApp

Enable requesters to interact on WhatsApp chat with a virtual agent or live agent using the ServiceNow® Conversational Integration with WhatsApp (powered by Twilio) application. The application connects a requester with a virtual agent or live agent using your company's WhatsApp-enabled Twilio phone number. To get started with the Conversational Integration with WhatsApp (powered by Twilio) application, see Configure Conversational Integration with WhatsApp (powered by Twilio).

Configure Conversational Integration with WhatsApp (powered by Twilio)

Install and set up the Conversational Integration with WhatsApp (powered by Twilio) application to enable requesters to interact with virtual and live agents.

Before you begin

Role required: admin

About this task

This task provides the general steps to integrate the WhatsApp messaging app with a ServiceNow application using the Conversational Integration with WhatsApp (powered by Twilio) application.

Procedure

1. Install Conversational Integration with WhatsApp (powered by Twilio).
2. Set up Conversational Integration with WhatsApp (powered by Twilio).
3. Design virtual agent topics to capture information from a WhatsApp chat conversation.
4. **Optional:** Close idle WhatsApp chat conversations.
5. **Optional:** Transfer WhatsApp chat conversations to live agents.

Install Conversational Integration with WhatsApp (powered by Twilio)

Install the Conversational Integration with WhatsApp (powered by Twilio) so that your business can interact with requesters on the WhatsApp app. The application includes demo data and installs related ServiceNow Store applications and plugins if they are not already installed.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

The following applications or plugins are installed with Conversational Integration with WhatsApp (powered by Twilio):

Twilio Spoke (sn_twilio_spoke)

Provides Integration Hub actions that may be used to create, update, delete, and look up records on the Twilio app.

For more information on activating this application, see Twilio spoke.

Conversational Custom Chat Integration (com.glide.cs.custom.adapter)

Provides custom chat integration framework of scriptable APIs to enable the Virtual Agent application on any conversational interface.

For more information on this plugin, see Creating conversational custom chat integrations in Virtual Agent.

ServiceNow IntegrationHub Runtime (com.glide.hub.integration.runtime)

Enables execution of Integration Hub actions and flows.

Complex Object (com.glide.cobject)

Enables complex objects.

Agent-Initiated Messaging Interface (sn_agent_initiated)

Provides configurations for the agent-initiated messaging capabilities.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Conversational Integration with WhatsApp (powered by Twilio) application (sn_va_whatsapp_twi) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

3. In the Application installation dialog box, review the application dependencies.

   Dependent plugins and applications are listed if they will be installed, are currently installed, or need to be installed. If any plugins or applications need to be installed, you must install them before you can install Conversational Integration with WhatsApp (powered by Twilio).

4. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
5. Select **Install**.

Set up Conversational Integration with WhatsApp (powered by Twilio)

Set up the Conversational Integration with WhatsApp (powered by Twilio) application so that you can engage requesters in bot conversations. Integrating with ServiceNow Virtual Agent enables you to interact on WhatsApp chat with a Virtual Agent or Live Agent.

Before you begin

Before you begin, do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Get ServiceNow entitlements for the following products and applications:
  - Integration Hub
  - Twilio spoke
  - Conversational Integration with WhatsApp (powered by Twilio)

  For more information, see Get entitlement for a ServiceNow product or application.
- Install the following applications on your ServiceNow instance:
  - Integration Hub
  - Twilio spoke
  - Conversational Integration with WhatsApp (powered by Twilio)
- Connect your Twilio Number to your WhatsApp Business Profile.
- Set up Twilio spoke.

Role required: external_app_install_admin or va_admin

Procedure

1. Connect your company's Twilio account with your ServiceNow instance.

   a. Log in to your Twilio Console.

   b. From the Project Info pane of the Console Dashboard page, note down the authentication token.
   You will later use this token to authenticate the Twilio account on your ServiceNow instance.
   For more information, see the Twilio documentation.

   c. To specify the webhook URL, in the Twilio console, navigate to **Programmable Messaging** > **Senders** > **WhatsApp Senders**.
   To enable your Twilio account to send messages to your ServiceNow instance, enter the webhook URL in the following format: `https://<instance-name>.service-now.com/api/sn_va_whatsapp_twi/message`.

   d. Click your WhatsApp-enabled Twilio phone number.

   e. In the **A MESSAGE COMES IN** field of the Configure WhatsApp Number dialog box, enter the webhook URL of your ServiceNow instance and click **Configure**.

2. To authenticate incoming hash messages from the Twilio account, create a Hash Message Verification record that stores the Twilio authentication token.

   a. In the navigation filter of your ServiceNow instance, enter `hash_message_verification.list`.

   b. In the Hash Message Verifications list, click **New**.

   c. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Hash Message Verification form

Field	Description
Name	Name of the record in the Hash Message Verification [hash_message_verification] table that stores the authentication token that is associated with your company's WhatsApp-enabled Twilio phone number. For example, `TwilioWhatsappTestAppAuthToken`.
Description	Description of the record. For example, `Twilio Whatsapp Testing application Auth Token`.
Secret	Twilio authentication token that is associated with your company's WhatsApp-enabled Twilio phone number.

d. Take note of the name of the Hash Message Verification record.

e. Click **Submit**.

3. Associate inbound message records with a Message Auth record.

a. In the navigation filter of your ServiceNow instance, enter `message_auth.list` and click **New**.

b. On the form, fill in the fields.

Message Auth form

Field	Description
Name	Name of the record in the Message Auth [message auth] table. For example, `VA Twilio WhatsApp Test App Message Auth`.
Provider	Provider of the auth token. Enter `Twilio`.
Group name	Name of the group that you created.
Service Portal	Customer service portal that you created.
Outbound service token	A unique token used by the ServiceNow AI Platform to authenticate and authorize access to an external service or API. The token is a credential that allows the ServiceNow AI Platform to securely interact with other systems. This token is generated by the external service and provided to the ServiceNow AI Platform so that the platform can make requests and access resources.
Inbound message verification	Name of the Hash Message Verification record that you created for the inbound hash messages in step 2.
Outbound message verification	Name of the Hash Message Verification record that you created for the inbound hash messages in step 2.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: The values for the **Inbound message verification** and **Inbound message verification** fields are the same.

c. Click **Submit**.

4. Associate the Message Auth record with the WhatsApp-enabled Twilio phone number.

a. In the navigation filter of your ServiceNow instance, enter `sys_cs_provider.list`.

b. In the Provider Channels list, click **Twilio** from the **Name** column corresponding to the **WhatsApp** channel.
If the **Twilio** entry is not present, enter `sys_cs_provider_application.list` in the navigation filter to create the list.

c. In the Provider Channel Identity related list, click **New**.

d. On the form, fill in the fields.

Provider Channel Identity form

Field	Description
Name	Name of the entity that users are contacting, such as IT Service Desk.
Inbound ID	Twilio phone number that users are contacting. **Note:** Be sure to include the '+' symbol and the country code in front of the phone number. For example: +18185559485.
Message auth	Message auth that you created in step 3.

e. Click **Submit**.

Set the URL navigation for WhatsApp chat

When agents share links in their WhatsApp chat conversations, customize the portal that those links point to. For example, you can configure links to point to your brand's portal, or to the ServiceNow portal.

Before you begin

Install the Conversational Integration with WhatsApp (powered by Twilio) application on your ServiceNow instance.

Activate the Consumer Service Portal plugin (`com.glide.service-portal.consumer-portal`).

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. In the navigation filter of your ServiceNow instance, enter `sys_cs_provider_application_list.do` and click **New**.
2. On the form, fill in the fields.

Provider Channel Identity form

Field	Description
Name	Name of the channel you are using. Enter `WhatsApp`.
Provider	Name of the provider. Enter `WhatsApp`.
Default Portal	Portal to be used in the mapping. Select a portal from the list of portals.
Message Auth	Message auth that you created.
Inbound ID	Your WhatsApp phone ID. For example: `+1415XXXXXXX`

3. Click **Submit**.

What to do next

For more information on setting up URL navigation, see Configure URL navigation for chat links.

Capturing information from a user in a WhatsApp chat conversation

Use the collection of input controls provided by the Virtual Agent Designer to prompt and capture information from a requester in a WhatsApp chat conversation.

Virtual Agent Designer is a diagram tool for creating and managing topics, which are blueprints for conversations between a virtual agent and user. For more information, see Getting started with Virtual Agent Designer.

User notification consent

Users must opt in to receive notifications. No notifications can be delivered until the user grants consent.

There are two ways for users to grant consent to receive notifications:

- The user can enter `Notification` into the WhatsApp chat with your business. The user gets a bot response with the option to subscribe or unsubscribe from receiving notifications for your business on WhatsApp.
- As the administrator, you can set up the option for users to subscribe or unsubscribe from notifications from your portal. See Subscription-based notifications for more information.

User input controls

The Conversational Integration with WhatsApp (powered by Twilio) application supports the following user input controls in Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported user input controls

User input control	Description
Text	User enters a plain text string in the conversation.
Static Choice	User selects an item from a predefined list.
Boolean	User enters a Boolean response to the bot. For example, the user can reply `Yes` or `No` in a chat conversation.
File Picker	User sends a file to the bot.
Date Time	User selects a calendar date, time (hours and minutes), or both.
Carousel	User selects a single item from the carousel.

For more information about configuring user input controls, see Virtual Agent Designer user input controls.

The Conversational Integration with WhatsApp (powered by Twilio) application supports the following bot responses in Virtual Agent Designer.

Supported bot responses

Bot response	Description
Text	Bot sends a plain text string to the user.
Image	Bot sends an image to the user.
Link	Bot sends a web link to the user.
Web UI image card output	Bot sends content from a record in a compact format, including an image with text.
Table	Bot response is displayed as a table.

For more information about configuring bot responses, see Virtual Agent Designer bot responses.

Closing idle WhatsApp chat conversations

Enable agents to effectively manage their active WhatsApp chat conversations by automatically closing idle conversations after they have been inactive for a pre-configured amount of time.

The Virtual Agent conversations are configured for the WhatsApp messaging app. By default, any conversations abandoned by requesters remain open or idle until they are automatically closed daily by the *`Time Out Abandoned VA Conversations`* scheduled job. For more information, see Closing Virtual Agent and Agent Chat conversations.

As an administrator, you can change the default timeout period for idle Virtual Agent conversations configured for the WhatsApp messaging app by setting the *`com.glide.cs.whatsapp_idle_timeout`* system property to the number of seconds that abandoned conversations remain open after the requester's last response. The system property value must be less than the time interval set for the *`Time Out Abandoned VA Conversations`* scheduled job, set to two hours (7200 seconds) by default. Because the *`com.glide.cs.whatsapp_idle_timeout`* system property isn't available by default, you must add it with the data type set to integer. For more information, see Add a system property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Transfer WhatsApp chat conversations to live agents

Configure the Advanced Work Assignment application to transfer a WhatsApp chat conversation initiated by a requester to a live agent.

Before you begin

Your administrator must have completed the following tasks:

- Install Conversational Integration with WhatsApp (powered by Twilio).
- Activate Advanced Work Assignment.
- Set the application scope to Conversational Integration with WhatsApp (powered by Twilio) using the application picker. For more information, see Application picker.
- Activate the Conversational Messaging plugin (com.glide.messaging.awa). For more information, see Activate Conversational Messaging.

Role required: admin

About this task

Procedure

1. Enable the WhatsApp service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Service Channels**.
   b. In the **Name** column of the Queues list, search for `WhatsApp`.
   c. Select **WhatsApp**.
   d. On the Service Channel form, select the **Active** check box.
   e. Select **Update**.
   For more information, see Service channels.
2. Automatically route work items for WhatsApp chat conversations to agents by configuring the queue for the WhatsApp service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Queues**.
   b. In the **Name** column of the Queues list, search for `Agent WhatsApp Queue`.
   c. Select **Agent WhatsApp Queue**.
   d. On the Queue form, select the **Active** check box.
   e. Select **Update**.

   Note:
   By default, the *`WhatsApp - Most Capacity`* assignment rule is associated with the Agent WhatsApp Queue. You can create another assignment rule and associate it with the queue. For more information, see Configure agent assignment rules and Work item queues.

3. Configure agent presence states for the WhatsApp service channel.
   a. Navigate to **Advanced Work Assignment** > **Settings** > **Presence States**.
   b. In the **Name** column of the Presence States list, select an existing state.
   c. In the Apply to groups section of the Presence State form, select the add icon > to move the Agent WhatsApp Group group from the Available column to the Selected column.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
You can ignore this step if you have selected the **Apply to all groups** check box.

d. Select **Update**.

For more information, see Configure agent presence states.

Using Conversational Integration with WhatsApp (powered by Twilio)

Enable a requester to converse with an agent at their convenience using the WhatsApp chat conversations through Virtual Agent.

An administrator can configure the Conversational Integration with WhatsApp (powered by Twilio) application for integrating the WhatsApp messaging app with a ServiceNow application. For more information, see Integrating the WhatsApp messaging app with other applications.

Agents and requesters can do the following:

- A live agent can initiate WhatsApp chat conversations with a requester.
- A requester can initiate WhatsApp chat conversations with a virtual agent or live agent.
- A live agent can accept WhatsApp chat conversations as work items from their Agent Workspace Inbox to converse with a requester.
- For logged in customers, the system automatically identifies the customer by matching their phone number against the customer contact.

Initiating WhatsApp chat conversations

As a live agent, you can initiate WhatsApp chat conversations with a requester in two ways:

- Send a message from either an active interaction record, a contact record, or a consumer contact record.
- Set up notifications to be sent to the requester when a business event occurs or when a record is updated. See Create a provider notification.

Note:
The requester must subscribe and opt in to receive notifications.

Accepting WhatsApp chat conversations

As a live agent interacting with a requester over the WhatsApp service channel, you can do the following:

- Converse with the requester through text messages.
- Share a knowledge article displayed as a link to the requester.
- Share a record. For example, a customer service case.
- Share any URLs as links.
- Share any files as attachments.

Note:
If an administrator has configured the WhatsApp service channel for transfer of chat conversations, then you can accept a work item from the WhatsApp chat conversation in your Agent Workspace Inbox. For more information, see Transfer WhatsApp chat conversations to live agents and Service channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a provider notification

Execute the following steps to create a provider notification for Virtual Agent and Workspace providers.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **System Notification** > **Provider** > **Notifications** and select **New**.
2. On the form, fill in the fields.

Notifications form

Field	Description
Name	Name of the notification.
Application	Application scope of the notification.
Active	Option to activate the notification. The notification is active by default.
Trigger	
Triggered By	System action that triggers the notification. You can send the notification after a record is changed or after an event is triggered.
Table	Table to receive notifications about.
Inserted	Option to send the notification after a record is inserted. This field appears when you select **Record Change** in the **Triggered By** field.
Updated	Option to send the notification after a record is updated. This field appears when you select **Record Change** in the **Triggered By** field.
Event	Event that triggers the notification. For example, to send a notification after an incident is closed or resolved, you would select the *`incident.inactive`* event. By default, this event is logged in the system each time a user resolves or closes an incident. **Note:** You can select only an event that shares the same table as the notification. This field appears when you select **Event** in the **Triggered By** field.
Conditions	Filter to specify the table records that users receive notifications about. For example, to send notifications about top-priority incidents, you would select **Incident [incident]** in the **Table** field and set the conditions to **[Priority] [is] [1 - Critical]**.
Recipients	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Users	Users who receive the notification. **Note:** Notifications in messaging channels are sent only to users with ServiceNow accounts (sys_user profiles). Consumers and customer contacts are considered as guests and cannot receive notifications in messaging channels.
Recipients in fields	Record fields that include users who receive the notification. For example, to send the notification to the record assignee, select **Assigned to**. **Note:** This field shows up only if you select a table.
Is originating user included?	Option to include the user who changed the record or triggered the event.
Event Parm1 contains recipient(s)?	Option to select if Parm 1 contains a list of comma separated sys_ids
Event Parm2 contains recipient(s)?	Option to select if Parm 2 contains a list of comma separated sys_ids
Resolve Parm1 recipients from table	Table that is used to resolve the sys_id of the recipient **Note:** This field appears only when you select Event parm 1.
Resolve Parm2 recipients from table	Table that is used to resolve the sys_id of the recipient **Note:** This field appears only when you select Event parm 2.
Advanced event condition	Option to select when the recipients are from more than 2 tables. These are dynamic conditions.

3. Select **Submit**.

Note:
Use the **Submit** button for Virtual Agent notifications. The **Submit and Add Common Content** button is for other use cases.

All the validation messages given by different providers are retained. Warning messages of one provider is not overridden by warning messages of another provider.

Integrating the WhatsApp messaging app with other applications

Other ServiceNow applications and features can use the Conversational Integration with WhatsApp (powered by Twilio) application.

As a live agent, when you accept a request from the WhatsApp service channel, you can converse with the requester within the same channel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Integrating with Customer Service Management

Integrate the Conversational Integration with WhatsApp (powered by Twilio) application with the ServiceNow® Customer Service Management application to enable your customer contacts and consumers to initiate a WhatsApp chat conversation with a virtual agent or live agent. An agent can initiate a conversation, or accept a conversation initiated from a WhatsApp chat conversation. For more information, see Integrate WhatsApp with Customer Service Management through Twilio.

Integrating Conversational SMS with AWS End User Messaging

Install the Conversational SMS with AWS End User Messaging (sn_sms_aws_adapter) plugin from the ServiceNow store to enable users to connect to customer support agents via SMS using the Amazon End User Messaging as the SMS provider.

To use conversational SMS with AWS End User Messaging, complete the following setup tasks.

Set up conversational SMS integration with Amazon end user messaging

Task	Description
Install the Conversational SMS Integration with AWS End User Messaging application	Install the plugin to host conversations with virtual or live agents.
Set up and configure the conversational SMS Integration with AWS End User Messaging application	Set up the integration on both AWS and ServiceNow platform to engage in SMS bot conversations and address customer queries.
Using conversational SMS integration with AWS End User Messaging	Enable customers to interact with agents using the SMS integration with Amazon End User Messaging.

Install the Conversational SMS Integration with AWS End User Messaging application

You can install the Conversational SMS Integration with AWS End User Messaging application (sn_sms_aws_adapter) from the ServiceNow store and integrate it with AWS End User Messaging to enable customer support agent conversations via an SMS channel.

Before you begin

Role required: Admin or virtual_agent_admin

About this task

Ensure that the application and all of its associated ServiceNow store applications have valid ServiceNow entitlements.

Procedure

1. Navigate to **System Applications** > **All Available Applications** > **All**.
2. Find the Conversational SMS Integration with AWS End User Messaging application (sn_sms_aws_adapter) using the filter criteria and search bar.

   You can search for the application by its name or ID.
3. Select the application and version from the list and select **Install**.

   In the Install dialog box, all dependent plugins are displayed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Set up and configure the conversational SMS Integration with AWS End User Messaging application

Integrate Conversational SMS with AWS End User Messaging to enable customers to chat with live or virtual agents

To set up an integration between SMS and AWS End User Messaging, complete the following steps.

Setup steps for SMS integration with AWS End User Messaging

Set up SMS End User Messaging Service and AWS resources
Set up SMS integration on ServiceNow instance

Set up SMS End User Messaging Service and AWS resources

Set up conversational SMS with Amazon Web Services (AWS) end user messaging to enable customers to seamlessly talk to virtual or live agents.

Before you begin

- Procure an Amazon Web Services (AWS) account with the administrative access to complete the setup of SMS integration. This step is not required, if you already have an AWS account. To learn how to create an AWS account, see documentation

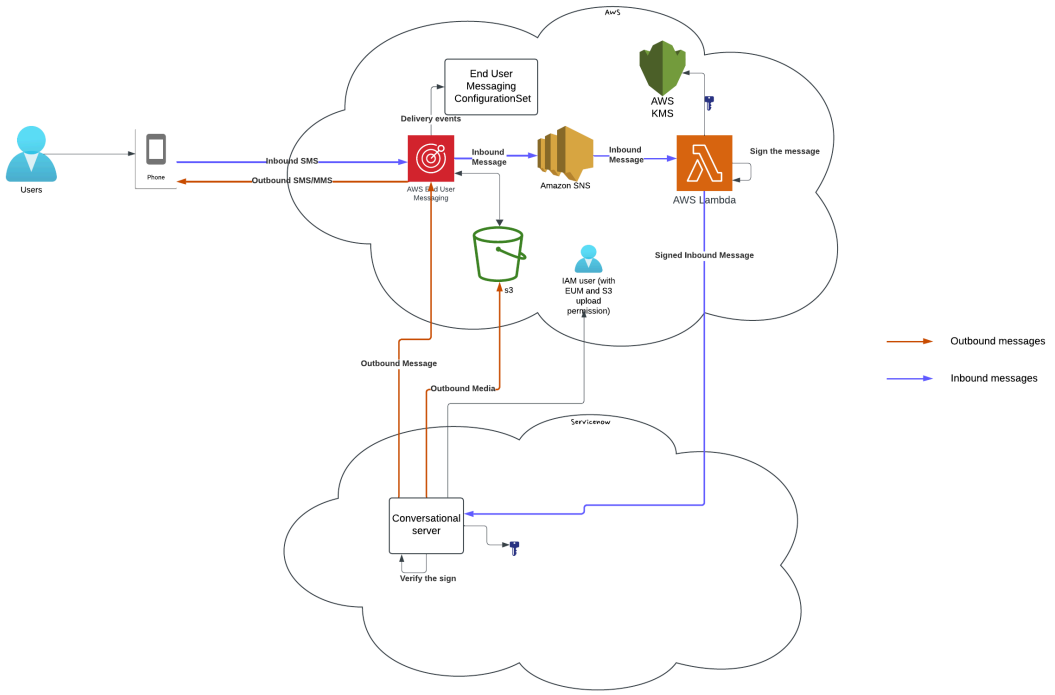
Role required: admin

About this task

To set up integration on AWS, you must procure a phone number and an AWS SNS topic that subscribes to the AWS End User messaging phone number. The Lambda function on AWS that subscribes to the SNS topic signs the SMS messages with a secret key to verify and validate the messages that you receive. The Lambda function uses the Key Management Services (KMS) to create signatures using the SHA-256 algorithm.

This further enables IAM users to call the AWS End User Messaging APIs to send outbound SMS/MMS. You can also set up the S3 bucket to send media files to customers and store outbound media files.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Procedure

1. Navigate to AWS end user messaging and select **Manage SMS** to procure a phone number.

   To learn how to procure a phone number, see documentation

2. Setup a collection of the required Amazon Web Services resources and properties using a CloudFormation template.
   To learn how to deploy a stack, see documentation. You can download the ServiceNow CloudFormation template from the Conversational SMS Integration with AWS End User Messaging store application from the ServiceNow store. This template creates an External (Import key material) type of KMS (Key Management Service) with no key material. You must upload the wrapped key material separately.

3. Upload the wrapped key material to the key from step 2.
   The key value must be 32-byte in length and must use the HMAC_256 algorithm. This key value is required for the setup on ServiceNow platform as well. To learn how to upload the wrapped key material to a KMS key, see documentation.

4. Link the phone number to enable Simple Notification Service (SNS) to support two-way SMS interaction between agents and customers.
   To learn how to link phone numbers to SNS, see documentation

5. After you run the CloudFormation template, generate the credentials for the IAM user that is created.

   The CloudFormation template creates an IAM user with permissions required to call the End User Messaging APIs, that enable outbound SMS and uploading media files to an S3 bucket. You must create an access key for the IAM user. The access key ID and secret access key are required during the setup on the ServiceNow platform. To learn how to create an access key for an IAM user, see documentation

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Set up SMS integration on ServiceNow instance

Set up conversational SMS on a ServiceNow instance to enable customers to seamlessly talk to virtual or live agents.

Before you begin

Role required: admin

About this task

Procure an Amazon Web Services (AWS) account with the administrative access to complete the setup of SMS integration and ensure to set up integration on Amazon Web Services before this. To learn how to set up integration on AWS, see Set up SMS End User Messaging Service and AWS resources.

Procedure

1. Create a Hash Message Verification record.

   a. In the navigation filter, enter `hash_message_verification.list` and select **New**.

   b. On the form, fill in the fields.

   Hash Message Verification form

Field	Description
Name	Name of the auth token, such as AWSSMSTestAppAuthToken
Description	Description of the auth token.
Secret	Key value generated while uploading the key material to KMS key during the AWS setup. To learn more about key value, see Set up SMS End User Messaging Service and AWS resources.
Domain	Domain of the hash message, such as global.

   c. Select **Update**.

2. Create a Message Auth record.

   a. In the navigation filter, enter `message_auth.list` and select **New**.

   b. On the form, fill in the fields.

   Message Auth form

Field	Description
Name	Name of the message auth, such as VA AWS SMS App Message Auth.
Provider	Provider of the auth token. Enter `Amazon`.
Group name	Name of the recipient group. Leave this field blank.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Service portal	Portal that is associated with the message auth. Leave this field blank.
Inbound message verification	Hash message token that you created.
Outbound message verification	Hash message token that you created.
Outbound service token	Authorized outbound service token. Leave this field blank.

c. Select **Update**.

3. Create a provider channel identity record.

a. In the navigation filter, enter `sys_cs_provider.list` and select **New Custom.**

b. Select the Provider Channel Identity related list and select **New**.

Provider channel form

Field	Description
Name	Name of the provider channel identity record, such as VA SMS AWS Adapter Provider.
Channel	The communication channel of the record, such as AWS EUM.
Short Description	Description of the provider channel identity record.
Inbound ID	The phone number associated with Amazon Web Services that you created.
Message Auth	Name of the message auth, such as VA AWS SMS Test App Message Auth.
Default portal	Portal that is associated with the channel identity record.

4. Add the following provider properties in the Provider Properties related list.

Provider properties for a channel identity record

Property	Value	Description
aws_end_user_messaging_configuration_set_arn	configuration_set_arn	Configuration to track the delivery of messages to the end user.
enable_outbound_media	true	Configuration to store the outbound media exchanged during a live or virtual chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Value	Description
		Note: The value of the field is **Empty** by default. If the value of the property is set to **True**, a bucket name must be provided and media is sent in its original form. If the value of the property is anything but **True**, bucket name is optional, and media is sent as a link.
aws_eum_api_base_url	AWS URL	Base URL for the AWS End User Messaging APIs configured based on region. To learn how to create a base URL, see documentation
outbound_media_s3_destination_folder	optional	Destination folder to store media.
outbound_media_s3_bucket_name	required	S3 bucket name for storing outbound media.

Note:
The provider properties' values can be provided at a provider channel. However, to override any property to make it specific to a provider channel identity record, then you must add the corresponding provider property at the provider channel identity.

5. Add the Identity Access Management (IAM) user credentials.

   a. In the navigation filter, enter `Connection & Credential Aliases` and add the **AWS credentials** for both **AWS_EUM.** and **Amazon S3**.

   b. Select **New** to create a new credential.

   c. Select the type of AWS credentials from the list and select **Update** to open the AWS Credentials New record form.

   d. On the form, fill in the fields.

AWS Credentials New record form

Field	Description
Name	Name of the credential.
Active	Whether the credential is active or not.
Access Key ID	AWS Access Key ID

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Secret Access Key	AWS Secret Key ID
Credential Alias	Alias for the credential, either EUM or S3. The credential alias is auto-selected.
Algorithm	AWS IAM Auth.

e. Select **Submit**.

Using conversational SMS integration with AWS End User Messaging

Enable a customer to converse with a live or virtual agent using the SMS integration with AWS End User Messaging.

Customers can message the phone number to speak to an agent and resolve their queries. A conversation is first initiated by a virtual agent that collects basic information about the issue and then transfers the chat to a live agent.

A live agent can accept SMS conversations as a work item from their Agent Workspace inbox and can converse with the customer through a series of text messages. A live agent can also share knowledge articles as a link, share any URLs, or even add images as attachments.

Integrating Virtual Agent with Voice channels

Enable users to run voice-based Virtual Agent bot conversations by integrating with supported third-party Contact Center applications and voice-assistant-based applications. Use the Conversational Integration apps that are available from the ServiceNow® Store to configure these voice-based apps for your ServiceNow instance.

Conversational IVR (Interactive Voice Response) integrates third-party Contact Center applications with your ServiceNow instance. This enables users to have voice-based conversations with your Virtual Agent.

The Virtual Agent integration with voice assistant applications enables interactions with touch or speak commands. For more information, see Integrating Virtual Agent with Alexa

Integrating Virtual Agent with Conversational IVR

ServiceNow's Conversational IVR with Amazon Connect enables Conversational Interactive Voice Response (IVR) to be conducted by your instance. Users will be able to conduct conversations with a bot via the phone channel, powered by ServiceNow Virtual Agent. Conversational IVR with Amazon Connect is available with the installation of Conversational IVR with Amazon Connect (com.sn.va.amz.connect) plugin.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Enable your users to initiate an IVR (Interactive Voice Response) conversation with your Virtual Agent Agent by building an integration with Amazon Connect. Using the Conversational IVR with Amazon Connect, you can enable a user to have a voice-based conversation with your Virtual Agent using Amazon Connect to help provide this functionality. This integration also provides the user the flexibility to connect with an agent using ServiceNow AWA Advanced Work Assignment (AWA) over SoftPhone.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational IVR highlights

- Use Virtual Agent topics as a Conversational IVR to enable deflection in Phone channels, providing consistent end-user experience.
- Enable true-omnichannel flow including routing Phone to the Conversational VA-IVR.
- In case of escalations, route calls smoothly to live agents using AWA via conversational infrastructure.

To get started with the Conversational Integration with Amazon Connect application, see Install Conversational IVR with Amazon Connect.

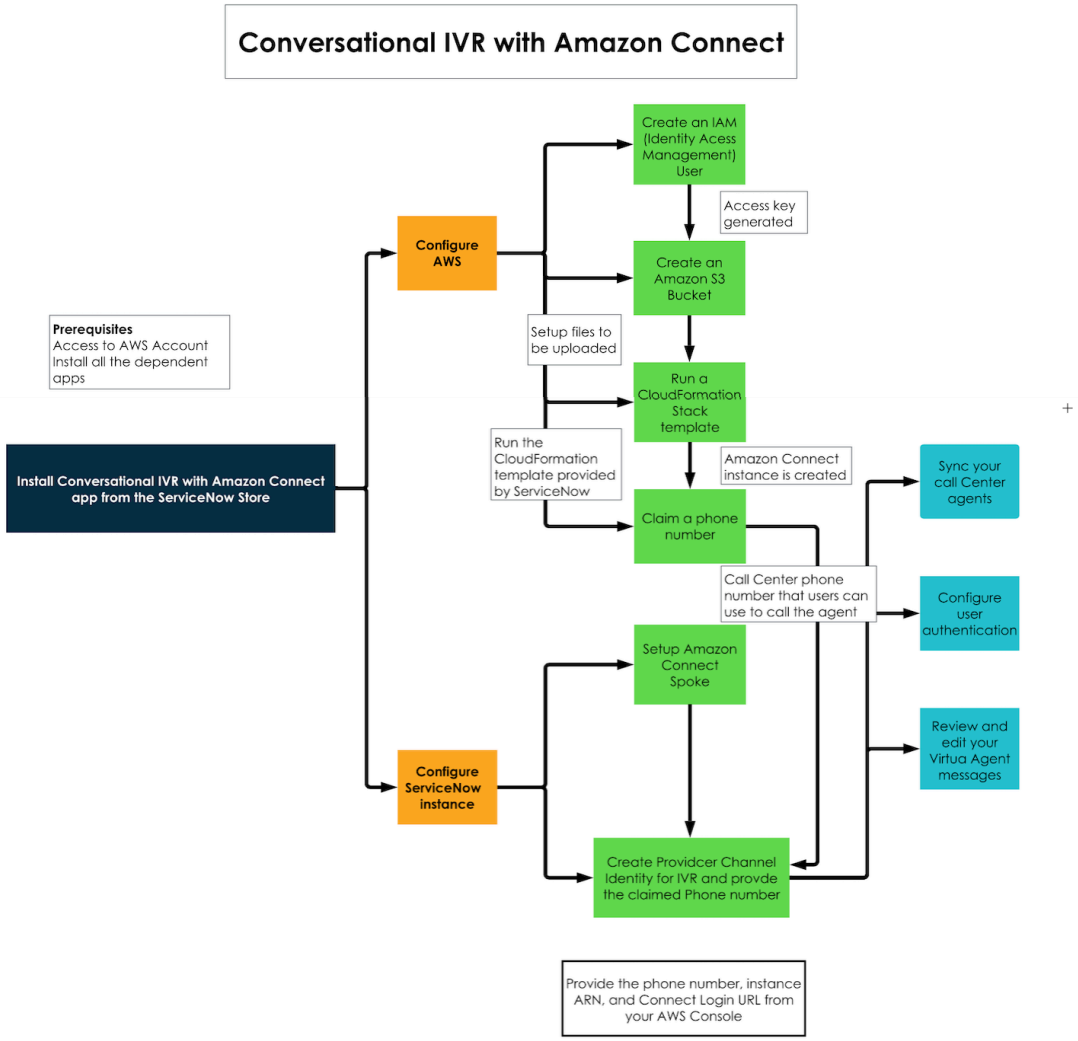
Setup Conversational Integration with Amazon Connect

Install and configure the Conversational Integration with Amazon Connect application to enable users to have a conversational voice response with their Virtual Agent.

1. To install the pre-built adapter for Conversational Integration with Amazon Connect, see Install Conversational IVR with Amazon Connect.
2. To set up your Amazon Connect account if not already configured, see Configuring your AWS account for use with Conversational IVR.
3. To configure Conversational Integration with Amazon Connect, see Configure Conversational IVR with Amazon Connect.
4. To set up Live Agent transfer for Conversational IVR, see Sync Agents to setup Live Agent transfer.
5. To configure user authentication, see Configure user authentication for Conversational IVR.
6. To modify the Conversational Integration with Amazon Connect settings for the best interactive voice response, see Manage bot messages for Conversational IVR.
7. To configure callback functionality, see Configure callback behavior for a channel .

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Workflow of Conversational IVR with Amazon Connect



Install Conversational IVR with Amazon Connect

Install Conversational IVR with Amazon Connect application, to use interactive voice response (IVR) with Virtual Agent.

Before you begin

Role required: admin

> **Note:**
> Before installing Conversational IVR with Amazon Connect, ensure that you have installed the Glide Virtual Agent (com.glide.cs.custom.adapter) plugin in your ServiceNow instance.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Virtual Agent** on the left pane and navigate to **Add virtual agent to your contact center**.
3. Click **Install**.
   You are directed to the ServiceNow Store where you can search and get the Conversational IVR with Amazon Connect application to use IVR.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next

To learn how to configure your AWS account for enabling Conversational IVR, see Configuring your AWS account for use with Conversational IVR.

Components installed with Conversational IVR with Amazon Connect

After installing the Conversational IVR with Amazon Connect application from the ServiceNow Store, the additional dependant plugins and spokes get auto-installed to enable other features for interactive voice response.

Plugin	Description
OpenFrame - (com.sn_openframe)	An interface to integrate external communication systems with a ServiceNow instance. This plugin brings a UI frame that is accessible and available anywhere within a ServiceNow screens.
Virtual Agent API - (sn_va_as_service)	Connects a user with a Virtual Agent using the company's Amazon Connect account.
Advanced Work Assignment - (com.glide.awa)	Automatically assigns work items to agents based on their availability, capacity, and skills.
Amazon Connect Spoke - (sn_amzn_connect_spk)(ih-amazon-connect-actions)	Simplifies how you integrate with Amazon Connect.
Amazon S3 Spoke - (ih-amazon-s3-action-pack)(ih-s3-actions)	Simplifies how you integrate with Amazon S3.
Omnichannel Callback - (sn_omni_callback) (com.sn.omnichannel.callback)	Provides a consistent omnichannel experience for requesters whether they are coming from the digital channel or from the phone.

Configuring your AWS account for use with Conversational IVR

To enable the Conversational IVR functionality within your ServiceNow instance, you must utilize a third-party Contact Center application. One such option is Amazon Connect, which is part of the Amazon Web Services (AWS) platform. You must configure your organization's AWS account prior to making it available for use in the Conversational IVR feature.

Configure your AWS account

1. To grant a ServiceNow user the required permissions to complete the Conversational Integration with Amazon Connect on the AWS Console, see Grant access to an IAM (Identity and Access Management) role.
2. To create an Amazon S3 bucket and to store objects within your AWS account, see Create an Amazon S3 bucket.

   This will host the files required to complete the configuration.
3. To create an AWS CloudFormation Stack and to provide a common language to describe and provision all the infrastructure resources required to enable the Conversational IVR feature in your environment in a safe and repeatable way, see Create an Amazon CloudFormation Stack.

   You will be populating a template provided by ServiceNow that will then generate the required configuration.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. To claim a phone number for setting up Conversational IVR, see Claim a Phone number.
5. To configure Conversational IVR with Amazon Connect application in your ServiceNow instance to store the conversation between the agent and the user over Softphone as a transcript, see Setup Transcript for Amazon Connect.

Grant access to an IAM (Identity and Access Management) role

Grant a ServiceNow user the required permissions to complete the Conversational Integration with Amazon Connect on the AWS Console.

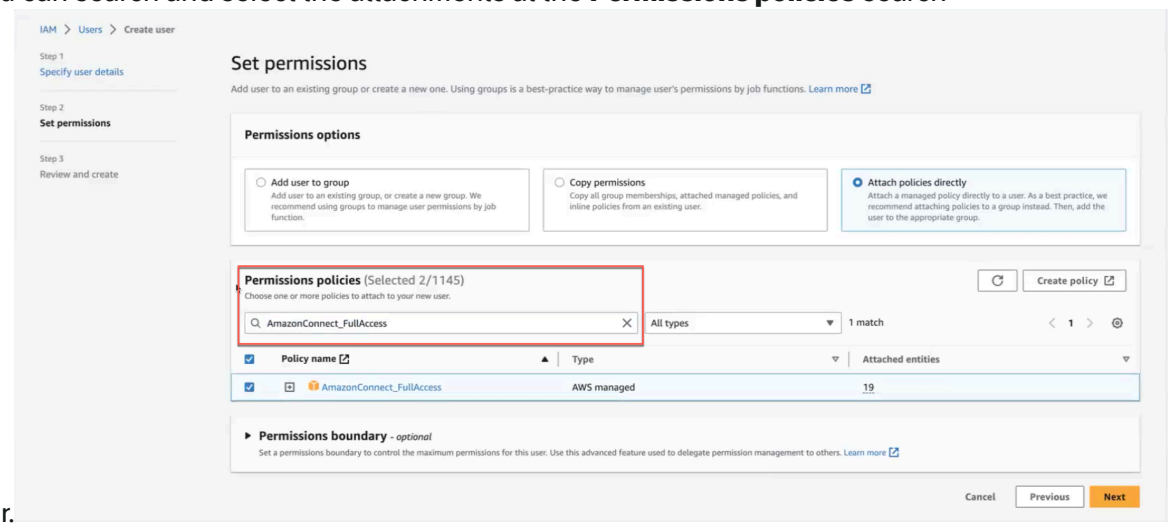
Before you begin

Role required: admin

Procedure

1. Log in to your AWS (Amazon Web Services) account and search for **IAM**.
2. Navigate to **Users**.
3. Click **Add users**, provide the **User name**, and click **Next**.
4. On the Set permissions page, under Permissions options, select **Attach policies directly** and select the following permissions:
   - AWSLambdaExecute
   - AmazonConnect_FullAccess
   - AmazonS3FullAccess

   Note:
   You can search and select the attachments at the **Permissions policies** search bar.



5. After selecting the required roles, click **Next**.
6. Click **Create user**.

Create an Amazon S3 bucket

Create an Amazon S3 bucket to store the files required for configuring Conversational IVR within your AWS account.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Before creating the Amazon S3 Bucket, ensure that you have downloaded the `Lambda function`, `Lex Bot`, and `HelperLambda` files from this Knowledge Base article.

For additional information about Amazon S3 Buckets, refer to the Amazon S3 documentation.

Procedure

1. Log in to the AWS Admin Console.
2. Navigate to **Amazon S3** and click **Create bucket**.
3. Provide a **Bucket name** (for example: sn-ci-cc-amazon-connect-setup) and note it down.
   This Bucket name will be used during the creation of a CloudFormation Stack at a later stage.
4. Select the **AWS Region** from the drop-down and ensure that this region remains consistent throughout the setup process.
5. Click **Create bucket**.
   You will be redirected to the list of Amazon S3 buckets that you have on your instance.
6. Search for the bucket that you created and click the bucket name to open it.
   Clicking the bucket name takes you to the **Objects** tab of the bucket.
7. On the Objects tab, click **Upload**.
8. Click **Add Files** and browse for the following downloaded files:
   - Lambda function
   - Lex Bot
   - HelperLambda
   - Prompt

   Note:
   - The Prompt file is not provided by ServiceNow. You must create your own Prompt file, note its name, and provide the name while creating the CloudFormation Stack. For more information about creating a Prompt, see https://docs.aws.amazon.com/connect/latest/adminguide/prompts.html.
   - Also make sure that you do not rename any files while uploading them.

9. Select all the files that you uploaded and select **Upload**.
   Once the files are uploaded, you will receive the

   ```
   Upload succeeded
   ```

   message.

Create an Amazon CloudFormation Stack

Create an AWS CloudFormation stack to provision all the infrastructure resources required to enable the Conversational IVR feature. You will be populating a template provided by ServiceNow that will then generate the required configuration.

Before you begin
Role required: admin

Ensure that you downloaded the Cloud Formation Template (CFT) YAML file from this Knowledge Article before creating an Amazon CloudFormation Stack and also make sure that you select the same region as that of the S3 bucket region.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For more information about creating an Amazon CloudFormation stack, refer to Amazon CloudFormation documentation.

Procedure

1. Log in to the Amazon Web Services Console.
2. Navigate to **CloudFormation** > **Stacks**.
3. Click the **Create stack** drop-down and select **With new resources (standard)**.
4. On the Create stack form, under Prepare template section, select **Template is Ready**.
5. In the Template resource section, select **Upload a template file** to the choose your downloaded CFT template and click **Next**.
   You will be directed to the Specify stack details page.
6. On the Specify stack details page, provide a **Stack name** (for example: sn-ci-cc-amazon-connect-setup-stack) and specify the following details in the Parameters section:

Parameters

Parameters	Description	Example Value
AWS Configuration		
S3 Bucket Name	The name of the S3 Bucket that you created during the IVR setup process. S3 bucket must contain the required files to be uploaded. Populate this parameter with that bucket name.	sn-ci-cc-amazon-connect-setup
ServiceNow Instance Configuration		
ServiceNow Instance	The URL of the ServiceNow instance being used in this configuration. Be sure to include `https://`.	https://[instance-name].service-now.com
Username	Name of the ServiceNow user to be used for establishing a basic authentication configuration in your ServiceNow instance. The user with this username must have the 'sn_va_as_service.contact_center_api' role.	n/a
Password	ServiceNow user's password to establish a basic authentication configuration in your ServiceNow instance.	n/a
Token Type	The type of token used in this connection.	Static/Hash

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Parameters	Description	Example Value
	If you do not know the token type, then use Static.	
Token Value	The secure token value for the connection between Amazon Connect and ServiceNow. **Note:** Ensure that the token you provide does not contain any non-alphanumeric values and ensure that you save the token value for later use.	rLRU5tyNHVj39MdA
Amazon Connect Instance Configuration - (Ignore if there is an existing amazon connect instance)		
Amazon connect instance alias	Name for the Amazon Connect instance that will be created.	n/a
Prompt audio S3 file key	Provide the name of the Prompt file that you have uploaded in Create an Amazon S3 bucket. The Prompt file is an audio file containing the ringtone when customer connects to an agent.	n/a
Amazon Connect Instance Admin Configuration (Optional)		
Username	Provide an Amazon Connect username to create the administrator for the newly created Amazon Connect instance.	n/a
Email	Email of the administrator for the Amazon Connect instance.	n/a
First Name	First name of the user who is the administrator of the Amazon Connect instance.	n/a
Last Name	Last name of the user who is the administrator of the Amazon Connect instance.	n/a
Password	Password to log into the Amazon Connect instance as an administrator.	n/a

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

7. Click **Next**.
8. Review the parameters that you provided for your Stack, select the **I acknowledge that AWS CloudFormation might create IAM resources with custom names.** checkbox, and **Submit**.
   The Stack creates the required resources needed for the Amazon Connect IVR setup.
9. Review the progress of the CloudFormation Stack to ensure that the process completes with a CREATE_COMPLETE status.
   Once the Cloud Formation Stack is created, you will see the Amazon Connect instance.

What to do next

Claim a Phone number.

Configure localization in Conversational IVR with Amazon Connect

Configure localization in Conversational IVR to use localization with Virtual Agent in other supported languages.

Before you begin

Role required: admin

Ensure that you have completed the IVR setup on both AWS Console and ServiceNow instance.

Procedure

1. Log in to the AWS Management Console and open the **Amazon Lex** bot named **SN_CI_CC_LexBot**.
2. Change the language of the amazon IVR Contact.

   a. Navigate to Amazon Connect from the AWS Console.

   b. On the instance page, open the connect instance.

   c. Hover over the Routing icon  on the left navigation bar and select **Contact flows**.

   d. Select the **SN_CI_CC_Inbound_Contact_Flow**.
   SN_CI_CC_Inbound_Contact_Flow is the default contact that is shipped to the user for use with Conversation IVR.

   e. On the Contact flow, select the **Set voice** flow.

   f. On the Set voice pop-up, select the language that you added from the **Language** drop-down and select the **Set language attribute** check box.
   English (US) is the default voice language and the English (US) language code is sent to the LexBot. The LexBot then collects the intents from the English (US) language.

   Note:
   There are different dialects available for a language. Therefore, ensure that you select the correct language with its dialect that you have added previously.

   g. Select **Save**.

   h. Select **Publish** to publish the Contact flow with the new language.


   The entire process of setting up the language attribute in **Set voice** block works only if you use Virtual Agent integration with one language.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If you wish to select the language dynamically for every conversation, you must manually add a list of language choices to get the input from the user and use **Set voice** block to set the appropriate language code.

The following image illustrates the flow:

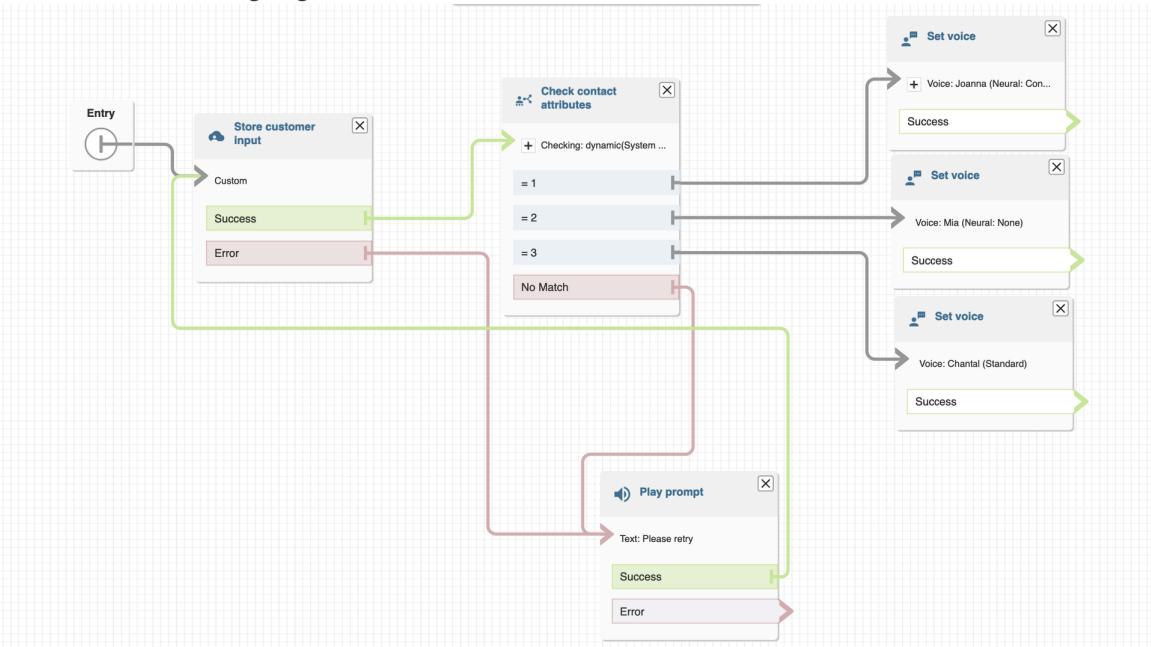Workflow to set language attribute



Customize keywords in Conversational IVR

Customize the IVR integration-specific keywords that are provided by default for better conversation in another language with the Virtual Agent.

Before you begin

Role required: admin

Ensure that you have completed the IVR setup on both AWS Console and ServiceNow instance.

Note:
Any customizations done to the Lex bot must be redone in case of any updates to the Lex bot resource in the future versions of the application.

Procedure

1. Log in to the AWS Admin Console and open the **Amazon Lex** bot named **SN_CI_CC_LexBot**.
2. If you want to customize the default keywords, you can edit the **amz_ivr_keywords** slot type and give preferred values, and here's how you can do that.

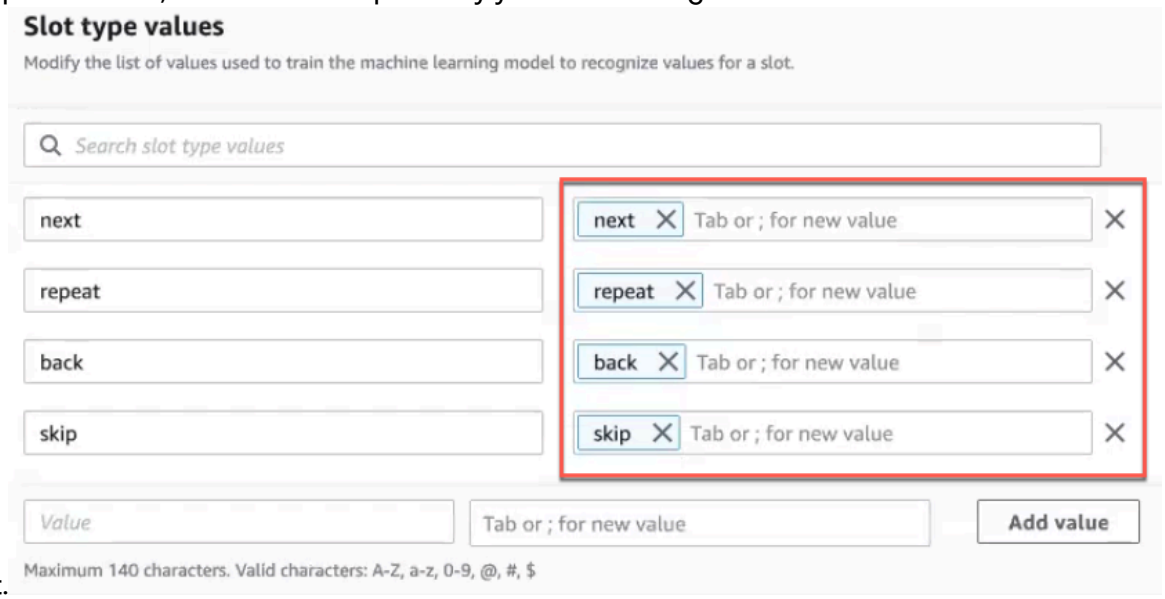
   a. Under the Conversation structure section in Slot types, select **View slot types**.

   b. On the Slot types page, select **AMZ_IVR_KEYWORDS** slot type.
   The slot type is used for customizing the IVR integration-specific keywords namely **next**, **repeat**, **back**, and **skip**. These keywords can be used when talking to the Virtual Agent to navigate the paginated options/list of choices to skip a control.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:
Ensure that you are editing the values only on the right column. Do not edit the values on the left column as they should not be changed regardless of the language.

By default the slot type values (on the right column) are in English. If the values on the right are not suitable for the another, change them to equivalent appropriate values, which shall be spoken by you when talking to the Virtual Agent.



If you have edited the slot type values on the right column, you must also ensure that you edit their respective bot messages on your instance to reflect these changes. For more information, see Manage bot messages for Conversational IVR.

c. Click **Save Slot type** and click **Build** on the top right of the page.

Note:
You must build the Slot types for any new changes you made.

The language is successfully built and on the All languages page, you can notice the **Successfully built** status against the language you have customized.

3. Create a new version of the bot to include both the languages.

a. On the left navigation, select **Bot versions**.

b. On the Versions page, select **Create version** on the top-right.

Note:
Ensure that all the languages that you need in this bot have the **Successfully built** status before creating the version as only the built languages will be included in the version.

c. On the Create version page, provide a **Description** for the version and click **Create**.
A version gets created with the next number. For example, Version 2 when there is only the default version 1 on your AWS instance.

4. Associate the version that you created with the production alias.

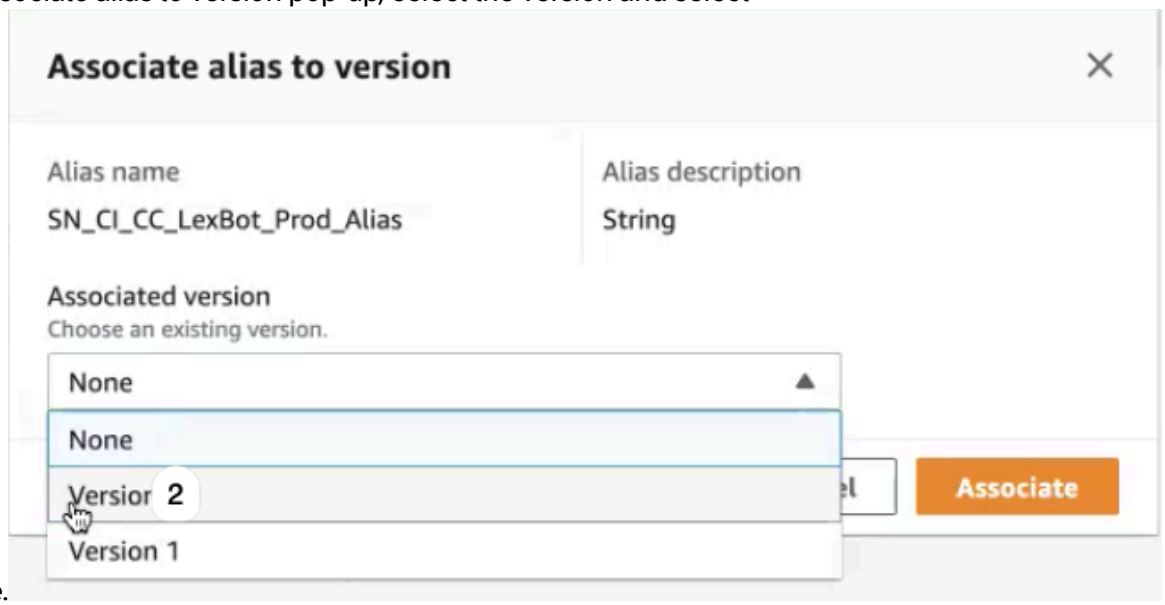
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. One left pane, navigate to **Deployment** > **Aliases** and select **SN_CI_CC_LexBot_Prod_Alias**, the default production Alias associated with Version 1 for a newly set up integration.

b. On the Alias page, select **Associate version with alias** and select the version you created for the language being customized.

> **Note:**
> Ensure to always have the production alias to point to the latest version number.

c. On the Associate alias to version pop-up, select the version and select **Associate**.



At this step, the bot is available for use in the language that you customized.

Claim a Phone number

Claim a Phone number to set up IVR (Interactive Voice Response).

Before you begin

Role required: admin

Procedure

1. Log into your AWS Console and look for the Amazon Connect Instance you created.
2. Log in as an administrator into your Amazon Connect instance.
3. Navigate to **Channels** > **Phone numbers** and click **Claim a number**.
4. On the Claim Phone number form, select either the **Toll free** Country or the **DID (Direct Inward Dialing)** Prefix and select the number.
5. Claim a phone number to the SN_CI_CC_Inbound_Contact_Flow from the Phone numbers section in the navigator.
6. Provide a description of your choice in the **Description** field, select SN_CI_CC_Inbound_Contact_Flow from the **Contact flow / IVR** drop-down, and click **Save**. After the number is published, customers can make a call and start conversations with the Virtual Agent.
7. Navigate to **Routing** > **Queues** and select **BasicQueue**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

8. On the Edit BasicQueue page, under Settings, specify a name for **Default caller ID name**.
9. For the **Outbound caller ID number**, select the Phone number you claimed in Step 4.
10. Select **SN_CI_CC_Outbound_Contact_Flow** for the **Outbound whisper flow**.
11. Click **Save**.

What to do next

Invoke an automated caller interaction with bots to fulfill the caller's request within the ServiceNow instance. For more information, see Configure a contact flow for an automated caller interaction.

Create inbound and outbound Amazon Connect contact flows

Create the inbound and outbound Amazon Connect contact flows to set up IVR (Interactive Voice Response).

Before you begin

Role required: admin

Procedure

1. Log in to your AWS account and select **Contact Flows**.

   a. Select the region where the Lambda function/LexBot was created.
   For more information see, Create an Amazon S3 bucket.

   Note:
   Ensure that the region that you selected matches across the Amazon Connect setup.

   b. In the Amazon Lex section, search and select your bot (for example: SN_CI_CC_LexBot) in the **Bot** drop-down, select **SN_CI_CC_LexBot_Prod_Alias** file from the **Alias** drop-down, and click **Add Amazon Lex Bot**.

   c. In the AWS Lambda section, search for your Lambda function (for example: SN_CI_CC_Process_Request) from the drop-down and click **Add Lambda Function**.

   d. Navigate to the Approved Origins section, click **Add Domain** to add your ServiceNow instance URL and click **Add Domain**.

   Note:
   Do not select the **Enable Contact flow logs** check box under the Contact flow logs section.

2. Log in to your Amazon Connect Instance as an Administrator.

   a. Hover over the **Routing** icon on the left navigation bar and select **Prompts**.

   b. Click **Create new prompt**, upload a prompt file of your choice with `.wav` file extension, and click **Create**.

   Note:
   Ensure that the `.wav` audio file is no more than 10 seconds for optimal results.

   c. Hover over the **Routing** icon on the left navigation bar and select **Contact flows**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

d. Click the drop-down next to Create contact flow button and select **Create customer queue flow**.

e. On the Contact flow form, click the drop-down next to the Save button and select **Import flow (beta)**.

f. On the Import flow (beta) pop-up screen, select a contact flow JSON file of your choice (for example: SN_CI_CC_Inbound_Customer_Queue_Flow) and click **Import**.

g. After the JSON is uploaded, locate and click the **Loop prompts** tile.

h. On the Loop prompts pop-up, select an audio file of your choice with the .wav extension (for example: SN_CI_CC_Inbound_Prompt.wav) from the Audio recording drop-down and click **Save**.

Note:
Ensure that the .wav audio file which you upload, does not exceed more than five-minutes duration.

i. Click **Save** to save the Contact flow and click **Publish** to publish the Contact flow.

j. Navigate to **Routing** > **Contact flows**, click **Create contact flow** and import the SN_CI_CC_Inbound_Contact_Flow JSON file that you downloaded from the KB article.

k. Locate and click the **Set customer queue flow** tile.

l. In the Set customer queue flow pop-up, select the customer queue flow from the drop-down (for example: SN_CI_CC_Inbound_Customer_Queue_Flow) and click **Save**.

m. Locate and click the **Invoke AWS Lambda function** tile.

n. In the Invoke AWS Lambda function pop-up, select the SN_CI_CC_Process_Request lambda function file from the drop-down, that you have already added at Step 1, C, and click **Save**.

o. Locate and click the **Get customer input** tile.

p. In the Get customer input pop-up, navigate to the Lex bot section and select the SN_CI_CC_LexBot file from the Name drop-down and SN_CI_CC_LexBot_Prod_Alias file from the Alias drop-down and click **Save**.

q. Click the **Play Prompt** tile next to the **Set Working Queue** tile.

r. In the Audio prompt drop-down, select the .wav file of your choice and click **Save.**

s. Click **Save** to save the Contact flow and click **Publish** to publish the Contact flow.

t. Navigate to **Channels** > **Phone numbers** and click **Claim a number**.

u. On the Claim Phone number form, select either the **Toll free** Country or the **DID (Direct Inward Dialing)** Prefix and select the number.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

v. Provide a description of your choice in the **Description** field, select SN_CI_CC_Inbound_Contact_Flow from the **Contact flow / IVR** drop-down, and click **Save**.
You can edit the number description and also associate it with a new contact flow on the Manage Phone numbers page.
After the number is published, customers can make a call and start conversations with the Virtual Agent.

For more information about creating a Contact Flow, see Amazon Contact flow documentation.

For more information about creating Prompts, see Create prompts in Amazon Connect documentation.

What to do next

Invoke an automated caller interaction with bots to fulfill the caller's request within the ServiceNow instance. For more information, see Configure a contact flow for an automated caller interaction.

Setup Transcript for Amazon Connect

Configure Conversational IVR with Amazon Connect application to store the conversation between the Agent and the User over Softphone as a transcript.

Before you begin

Role required: admin

About this task

- The voice transcript is stored by Amazon Connect, a third-party provider, post the voice conversation in the [sys_cs_message] table.
- Messages between the User and the Agent are fetched by transcript API and attached to the Conversation. Also, the sentiment score from Amazon for each message is considered to derive overall Sentiment of User and Agent Conversation.
- From Utah, the voice transcription is available real-time with the APIs that persist transcribed messages of an on-going phone call in real time. The messages are displayed in the Agent workspace chat panel along with previous conversation history (if enabled) and allows the Agent to leverage features like agent assist and search while actively talking to the caller. For more information about using Transcript API for real-time transcription, see Voice Interaction Resource API.

  To date, we ensure that performance is acceptable for the volume of transactions, about 5 million utterances/day/customer.

  We have also updated the system to store all details associated to a voice call in standard CI tables (e.g., conversation and interaction tables) instead of the sn_openframe_phone_log table.

Procedure

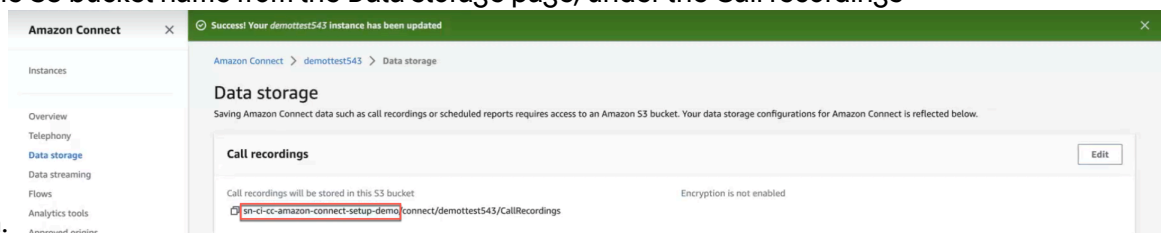
1. Open your Amazon Connect instance page in AWS Console.
2. Navigate to **Analytics tools** page and click **Enable contact lens**.
3. Click **Save**.
4. Navigate to **Data storage** > **Call recordings** and click **Edit**.
5. On the Call recordings page, select **Enable call recording**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To enable Call recordings, you can either create a new S3 bucket by selecting **Create a new S3 bucket (recommended)** or use an existing s3 bucket by selecting **Select an existing S3 bucket**.

Note:
This procedure explains creating a transcript using an existing S3 bucket.

6. Select the **Name** of the existing S3 bucket from the drop-down and click **Save**.
7. Copy the S3 bucket name from the Data storage page, under the Call recordings section.




8. Navigate to **AWS Lambda** > **Functions** and select the**SN_CI_CC_ProcessRequest** Function name.
9. Click **Add trigger** and select **S3** from the Select a source drop-down.
10. In the **Bucket** drop-down, paste the copied bucket name.
11. Select the acknowledgement check box and click **Add**.
12. Configure Google Sentiment Analysis.

    a. Log in to your ServiceNow instance and navigate to **All** > **System Applications** > **All Available Applications** > **All**.

    b. Find the Sentiment Analysis (com.glide.cs.sentiment) application using the filter criteria and search bar and click **Install**.

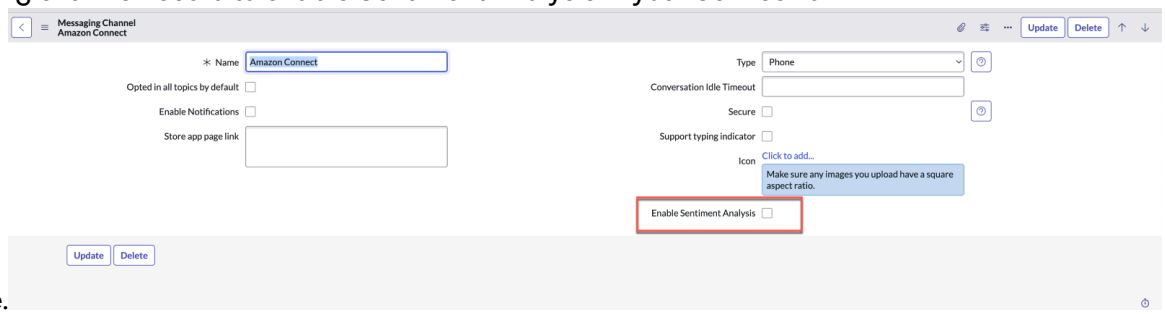    c. Select the **Enable Sentiment Analysis** check box on the Amazon Connect's messaging channel record to enable Sentiment Analysis in your ServiceNow instance.



    d. Create a connection for the Google Sentiment Analysis API.

    - Create a service account on Google Cloud and the Cloud Natural Language API. For more information, see https://cloud.google.com/natural-language/docs/sentiment-analysis-gcloud.
    - Download JSON file and create a JAVA Key Store Certificate. For more information, see Create a Java KeyStore certificate
    - Navigate to *Workflow Studio* > **Connections** > **Google Sentiment Analysis**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Set the following fields using the JSON and generated `.jks` file.
- Click **Get Auth Token**.

Note:
The Connection details shared previously are related to the personal google service account. To set up a new account and get the JSON key file, use see Google Documentation.

After you get that JSON Key file, the `.jks` file can be generated using the following code:

```
createJKS() {

  cd $(dirname $1)

  cat $1 | jq -r .private_key > GCPNaturalLanguage_pk.pem;

  kid=$(cat $1 | jq -r .private_key_id);

  cert_url=$(cat $1 | jq -r .client_x509_cert_url);

  curl ${cert_url} | jq -r --arg jq_kid "$kid"
 '.[$jq_kid]' > GCPNaturalLanguage_cert.pem;

  openssl pkcs12 -export -in GCPNaturalLanguage_cert.pem
 -inkey GCPNaturalLanguage_pk.pem
 -certfile GCPNaturalLanguage_cert.pem -out
 GCPNaturalLanguage_pkcs12.p12;

  keytool -importkeystore -srckeystore
 GCPNaturalLanguage_pkcs12.p12 -srcstoretype pkcs12
 -destkeystore GCPNaturalLanguage.jks -deststoretype JKS

}

createJKS /
Users/firstname.lastname/git/ServiceAccountKey/core-period
-341405-9e1ed1673139.json (Path of JSON Key)
```

Configure Conversational IVR with Amazon Connect

Configure Amazon Connect service provider to integrate with Virtual Agent and use interactive voice response.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Virtual Agent**.
2. On the Virtual Agent Settings page, navigate to the **Configure your interactive voice response (IVR)** tile.

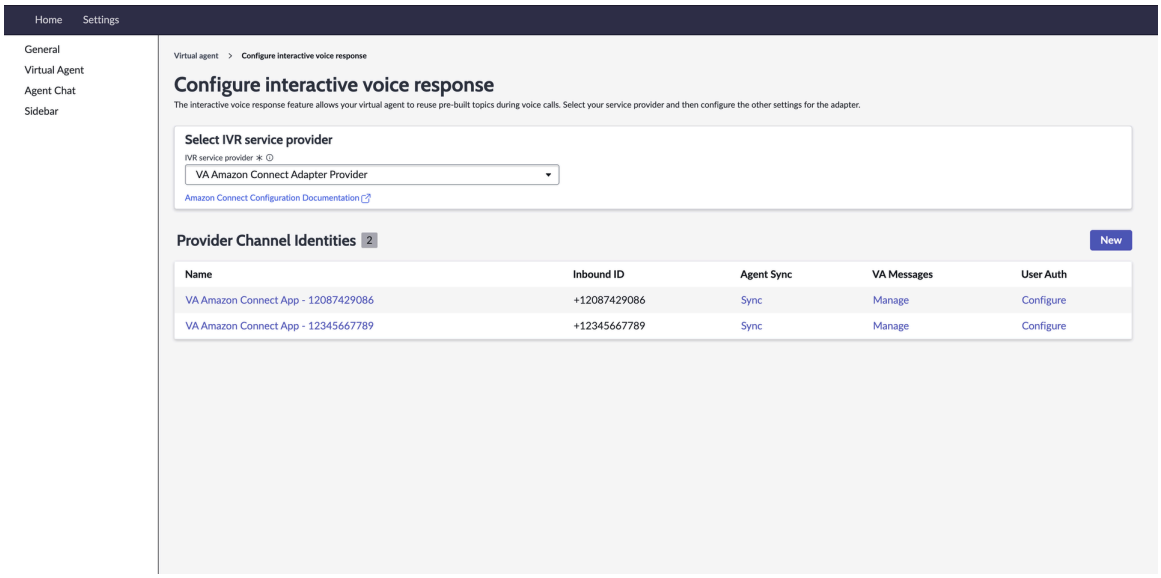
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
To see the **Configure your interactive voice response (IVR)** tile on your Virtual Agent Settings page, ensure that you have updated the Omni-Experience Standard Feature Set plugin (sn_oe_sfs).

3. In the Configure pre-built adapter section, click **Configure IVR**.
4. In the Select IVR service provider page, select **VA Amazon Connect Adapter Provider** as the IVR service provider from the drop-down.

Note:
VA Amazon Connect Adapter Provider is available by default, with the Conversational IVR with Amazon Connect application installation. To use the Amazon Connect adapter, get the Conversational IVR with Amazon Connect app from the ServiceNow Store.

Conversational IVR with Amazon Connect supports multiple service provider applications and you can create new ones if you want.



5. To finish setting up Amazon Connect, select the application name from the Provider Channel Identities section.
6. On the form, fill in the fields.

Note:
From the AWS Console, copy and paste the authentication information for Amazon Connect below:

Amazon Connect information form

Field	Description
Identifier Type	Indicates the type of identifier for the provider channel identity. For example, you can configure Amazon Connect on your ServiceNow instance via Phone number or ARN.
Phone number	The phone number being configured for this provider channel identity.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	Note: ○ The **Phone number** field is available only when you select Phone Number in the **Identifier Type** drop-down. ○ From Vancouver release, you can use multiple phone numbers from an AWS account and create provider identity channels for each configuration to accommodate multiple points of contact.
Instance ARN	The instance ARN from the AWS Console.
Static/hash token	Your static or hash token from AWS Console.
Token type	Confirmation for the token provided in the **Static/hash token** field.
Connect Login URL	The login URL from the AWS Console.

7. Click **Save**.

What to do next

- Sync Agents to setup Live Agent transfer
- Configure user authentication for Conversational IVR
- Manage bot messages for Conversational IVR

Enroll user Soft PIN and Device in ServiceNow instance

Enroll the user Soft PIN and Device in your ServiceNow instance to setup callback authentication.

Before you begin

Role required: admin

Procedure

1. Log in to your ServiceNow instance.
2. Impersonate the user whose Soft PIN and Device must be authenticated.
3. Navigate to **Password Reset** > **Enroll**.
4. In the SoftPin Verification for Amazon Connect tab, provide the soft Pin in the **Enter the SoftPIN** field and click **Submit**.
5. In the SMS Verification for Amazon Connect tab, authorize the user device.

   a. Select **Add Device**.

   b. On the form, fill in the details.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Add an SMS Device pop up

Field	Description
Device name	Name of the device that you are authenticating.
Phone number	Phone number of the user that you want to authenticate.
Service provider	Name of the service provider that you want to authenticate the device with.

c. Click **Submit**.

What to do next
After adding the phone number, verify the device. An OTP is sent to the user's phone number.

Setup the Amazon Connect spoke for VA IVR

Set up the Amazon Connect spoke for Conversational IVR to integrate your ServiceNow instance with Amazon Connect.

Before you begin
Role required: admin

Procedure

To set up the Amazon Connect spoke for Conversational IVR with Amazon Connect, see Setup Amazon Connect spoke.

Sync Agents to setup Live Agent transfer

After the installation and configuration of Amazon Connect, you must sync agents to enable live transfer. You can sync agents stored in Amazon Connect with the agents on your ServiceNow agents.

Before you begin
Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Virtual Agent**.
2. On the Virtual Agent Settings page, navigate to the Configure your interactive voice response (IVR) section and click **Configure IVR** under Configure pre-built adapter.
3. On the Configure interactive voice response page, select **VA Amazon Connect Adapter Provider** from the Select IVR service provider drop-down.
4. Under Provider Channel Identities, select the identity provider that you want to sync agents for.
5. On the Amazon Connect information form, in the Sync your call center agents tile, click **Sync agents**.
6. Add the following roles to the agents to sync them with your ServiceNow instance and the Amazon Connect account.
   - sn_va_as_service.contact_center_api
   - awa_agent

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- interaction_agent
- agent_workspace_user
- sn_openframe_user
- awa_integration_user

Add each user, who must handle a Live Agent Transfer, to the Agent Phone Group by navigating to **System Security** > **Users and Groups** > **Groups**.

7. In the filter navigation bar on your ServiceNow instance, enter `awa_presence_state.list` to find the Presence States table.
8. Open the **Available** state, move the **Phone** Service Channel from the Available field to the Selected field and click **Update**.
   Login as the synced user and make sure that the agent is available in Agent Workspace and also login to the Amazon Connect instance with the same ServiceNow user to verify.

Configure user authentication for Conversational IVR

You must configure the authentication level for how the end-user can be authenticated to be the logged-in ServiceNow user using Voice.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Virtual Agent**.
2. On the Virtual Agent Settings page, navigate to the Configure your interactive voice response (IVR) section and click **Configure IVR** under Configure pre-built adapter.
3. On the Configure interactive voice response page, select **VA Amazon Connect Adapter Provider** from the Select IVR service provider drop-down.
4. Under Provider Channel Identities, select the identity provider that you want to edit the user authentication for.
5. On the Amazon Connect information form, in the Configure user authentication tile, click **Configure authentication**.
6. On the User authentication method setup form, swipe the **Enable authentication** toggle switch to the right.

   Note:
   Ensure that the application scope of your ServiceNow instance is set to the Conversational IVR with Amazon Connect application before editing the User authentication method setup form.

7. Select the **Authentication style**.
   - **Phone**: Customer's phone number.

     Note:
     Only requires the incoming phone number to match the record in [sys_user] profile **Business Phone** field, in order for user to log in.

   - **Phone + Soft PIN**: Customer's phone number requiring a pre-configured Soft PIN to authenticate.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Requires not only the phone number to match, but also for end user to identify user's personal Soft PIN registered with the customer's ServiceNow record.

- **Phone + Soft PIN + MFA**: Customer's phone number, requiring a Soft PIN and adds an extra layer of security with MFA (Multi-factor Authentication).

Note:
Requires the phone number to match and also for end user to identify user's personal Soft Pin registered with the customer's ServiceNow record, in addition to have the end user authenticate using MFA.

To set up your end users with Soft PIN or MFA, see Configure your Password Reset process to auto-enroll users.

8. Provide the authentication details as per the selected authentication style.
   - **Verification question**: Add a verification question of your choice.

     Note:
     This option is only available for Phone + Soft PIN.

   - **Verification PIN length**: Set up the length of your Soft PIN.

     Note:
     This option is only available for Phone + Soft PIN.

   - **One-time password length**: Set up the length of the one-time password

     Note:
     This option is only available for Phone + Soft PIN and Phone + Soft PIN + MFA.

   - **one-time-password expiration time**: Set up the expiration time for the password.

     Note:
     This option is only available for Phone + Soft PIN and Phone + Soft PIN + MFA.

   Changing the values or messages updates the record on the Password Reset verification record. For more information, see Configure your Password Reset process to auto-enroll users

9. Click **Save**.

Manage bot messages for Conversational IVR

Edit your custom messages to ensure that your conversations are optimized for Conversational IVR.

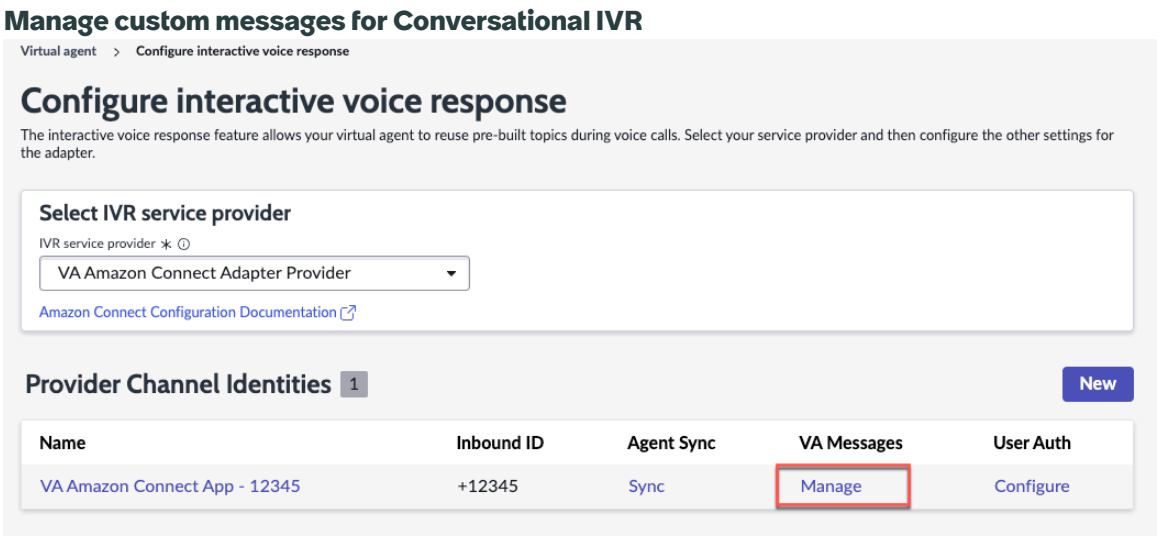
Before you begin
Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** and select **Virtual Agent** from the Chat Settings tab.
2. On the Virtual Agent Settings page, navigate to the Configure your interactive voice response (IVR) section and click **Configure IVR** under Configure pre-built adapter.
3. On the Configure interactive voice response page, select **VA Amazon Connect Adapter Provider** from the Select IVR service provider drop-down.
4. Under Provider Channel Identities, select the identity provider that you want to edit the custom messages for.
5. Under Review and edit your virtual agent messages section, click **Review VA messages**.

   Additionally, you can also select the **Manage** button in the VA Messages column against the identity provider.



6. On the Custom virtual agent messages page, select the custom message that you want to update.
7. Edit the **Value** for the message and click **Update**.

Provider properties for Amazon Connect

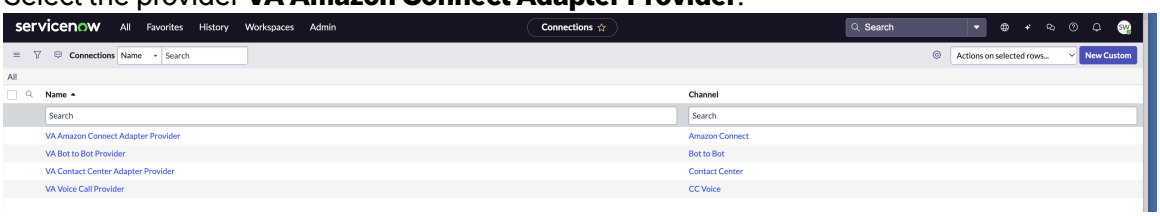
View and update the provider properties available for Amazon Connect

Before you begin

Role required: admin


Procedure

1. Select **All** and enter `sys_cs_provider.list` to open the Connections table.
2. Select the provider **VA Amazon Connect Adapter Provider**.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

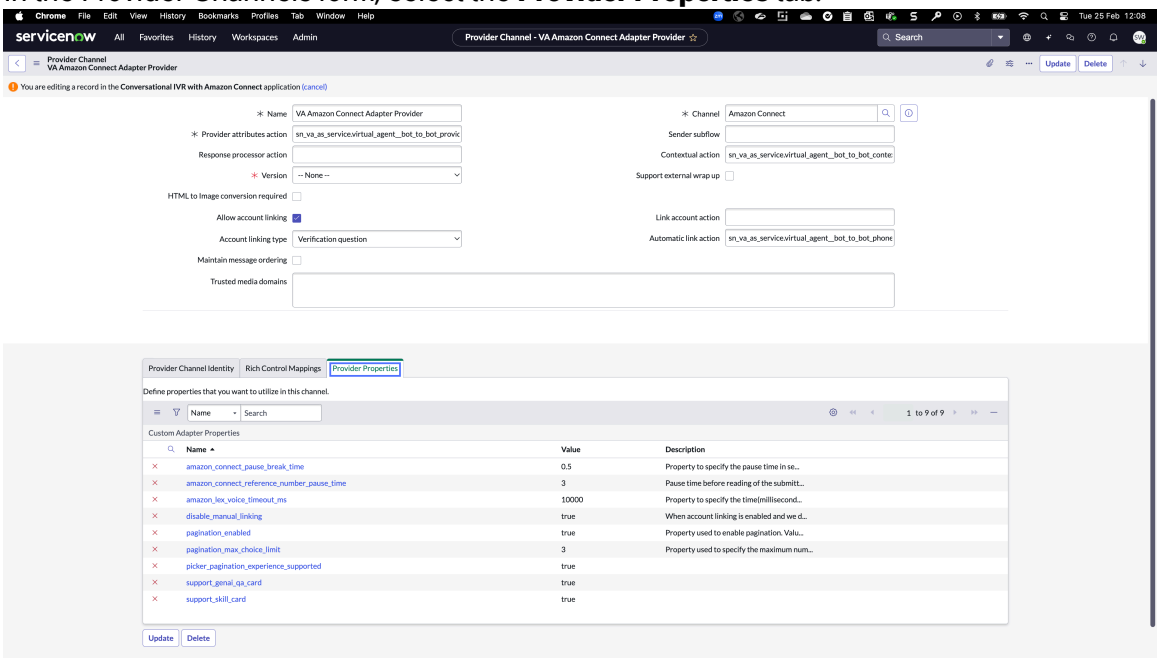3. In the Provider Channels form, select the **Provider Properties** tab.



What to do next

The following table lists the properties.

Important:
Unless absolutely necessary, the property values must not be edited.

Provider properties

Name	Description
amazon_connect_pause_break_time	Property to specify the pause time, in seconds, between line breaks, choice options, sentences, bullet points, and so on, in the amazon connect response. The value must be a number.
amazon_connect_reference_number_pause_time	Pause time before reading of the submitted request or incident number. Value is in seconds. Maximum value allowed is 10.
amazon_lex_voice_timeout_ms	Property to specify the time, in milli seconds, the bot waits before assuming that the user isn't going to speak.
pagination_enabled	Property used to enable pagination at adapter level. Value must be set to true to enable pagination. **Note:** Pagination shouldn't be disabled.
pagination_max_choice_limit	Property used to specify the maximum number of items per page when pagination is enabled. Value must be an integer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Provider properties (continued)

Name	Description
picker_pagination_experience_supported	Property used to enable pagination at server level. Value must be set to true to enable pagination. **Note:** Pagination shouldn't be disabled.
disable_manual_linking	If the property value is true, manual linking options aren't shown when account linking is enabled. **Note:** Do not change the property value.
support_genai_qa_card	Internal, do not change.
support_skill_card	Internal, do not change.

Unsupported Virtual Agent features in Conversational IVR

A few user input controls used in Virtual Agent Designer are unsupported in Conversational IVR - enabled topics.

Unsupported Virtual Agent Designer controls

Within the Virtual Agent topic flow, there are a few controls that are not supported for Conversational IVR.

- User input controls:
  - Grouped Choice
  - File Picker
- Bot response controls:
  - Image
  - Link
  - HTML
  - Multi-response
  - Script
  - Card

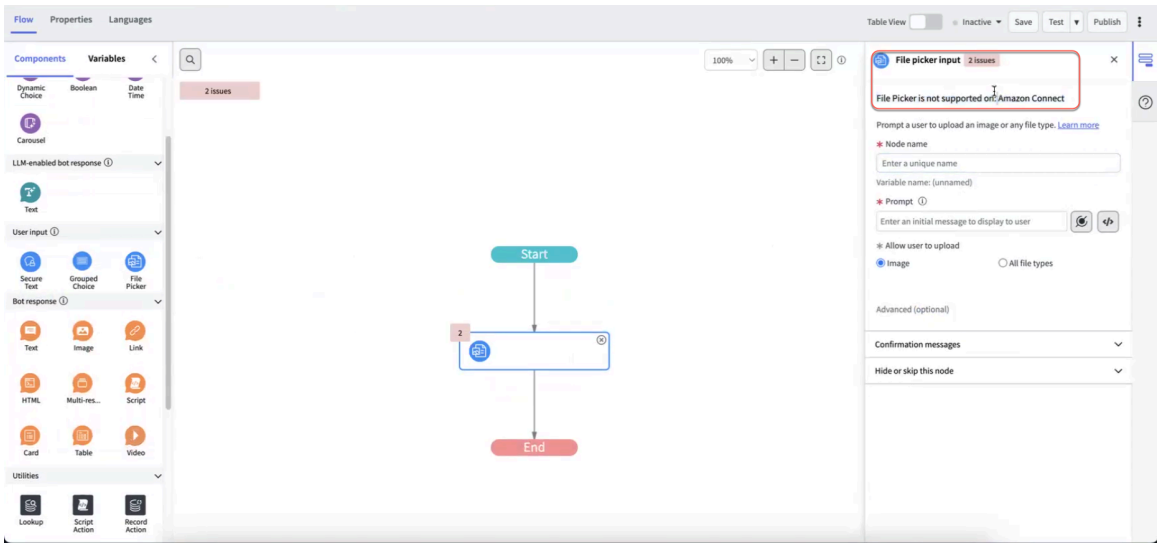
    Note: The Card control is supported but Conversational IVR will not read all the parts or elements of the card, if the card's subtitle contains incident numbers, request numbers, and so on, such as `INC0001`, `RITM0001`, `HRC0001`. IVR is configured to read only the number in such cases.

  - Table
  - Video

Conversational IVR is designed to silently skip the execution of unsupported controls within the topic flow and to move to the next supported control for execution.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The system is designed to provide warnings when you pick an unsupported control for your topic flow while crating the topic. For example, you can trigger a warning message by adding File picker to your topic flow for a topic that has IVR enabled.



For information about the supported controls to be used for Conversational IVR, see Input Collector user input control.

Integrating Virtual Agent with Alexa

ServiceNow® Conversational Integration with Alexa enables ServiceNow® Virtual Agent to interact with requesters through the Amazon Alexa voice interface using the Virtual Agent topics. Conversational Integration with Alexa uses the custom conversational chat integration framework to interact with the Virtual Agent chatbot.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Overview of Integrating Virtual Agent with Alexa

Enable your users to initiate an Alexa voice chat conversation with a virtual agent by using the Conversational Integration with Alexa application. The application connects a requester with a Virtual Agent using your company's Alexa account. You can name your Alexa skill and manage it using your company's Amazon account while enabling end users to link their accounts to the ServiceNow instance. You can also customize the way that a virtual agent speaks to you in a voice-friendly manner without having to change the topic.

Note:
The Conversational Integration with Alexa supports both screen-less and screen-based Alexa-enabled devices.

To get started with the Conversational Integration with Alexa application, see Configure Conversational Integration with Alexa.

Configure Conversational Integration with Alexa

Install and set up the Conversational Integration with Alexa application to enable users to interact with a virtual agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configure Conversational Integration with Alexa to enable interaction with Virtual Agent through the Alexa voice interface.

1. To install Conversational Integration with Alexa, see Install Conversational Integration with Alexa.
2. To set up Conversational Integration with Alexa, see Set up Conversational Integration with Alexa.
3. To modify the Virtual Agent settings for the best voice chat experience with Alexa, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.

Install Conversational Integration with Alexa

You can install the Conversational Integration with Alexa application (sn.va.alexa) if you have the admin role. The application installs the related ServiceNow® Store applications and plugins if they are not already installed.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application.
- Role required: external_app_install_admin, va_admin, or admin

About this task

The following applications are installed with Conversational Integration with Alexa:

Conversational Custom Chat Integration (com.glide.cs.custom.adapter)

Provides the custom chat integration framework of scriptable APIs to enable the Virtual Agent application on any conversational interface.

For more information, see Creating conversational custom chat integrations in Virtual Agent.

ServiceNow IntegrationHub Runtime (com.glide.hub.integration.runtime)

Enables the execution of ServiceNow® Integration Hub actions and flows.

Procedure

1. **All** > **System Applications** > **All Available Applications** > **All**
2. Find the Conversational Integration with Alexa application (sn_va_alexa) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. In the Application installation dialog box, review the application dependencies.

   All the dependent plugins and applications are listed if they will be installed, or currently installed, or must be installed. If any plugins or applications must be installed, you must install them before you can install Conversational Integration with Alexa.
4. Click **Install**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next

JSON for configuring Alexa

```
{
    "interactionModel": {
        "languageModel": {
            "invocationName": "my agent",
            "intents": [
                {
                    "name": "AMAZON.CancelIntent",
                    "samples": []
                },
                {
                    "name": "AMAZON.HelpIntent",
                    "samples": []
                },
                {
                    "name": "AMAZON.StopIntent",
                    "samples": []
                },
                {
                    "name": "EverythingIntent",
                    "slots": [
                        {
                            "name": "EverythingSlot",
                            "type": "Bag_of_words"
                        }
                    ],
                    "samples": [
                        "{EverythingSlot}"
                    ]
                },
                {
                    "name": "AMAZON.NavigateHomeIntent",
                    "samples": []
                },
                {
                    "name": "VAKeywordIntent",
                    "slots": [
                        {
                            "name": "skip_keyword_slot",
                            "type": "Skip_slot_type"
                        },
                        {
                            "name": "repeat_keyword_slot",
                            "type": "Repeat_keyword_slot_type"
                        },
                        {
                            "name": "more_keyword_slot",
                            "type": "More_keyword_slot_type"
                        }
                    ],
                    "samples": [
                        "{more_keyword_slot}",
                        "{repeat_keyword_slot}",
                        "{skip_keyword_slot}"
                    ]
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
                }
            ],
            "types": [
                {
                    "name": "Bag_of_words",
                    "values": [
                        {
                            "name": {
                                "value": "name: bag_of_words"
                            }
                        }
                    ]
                },
                {
                    "name": "Skip_slot_type",
                    "values": [
                        {
                            "name": {
                                "value": "skip"
                            }
                        }
                    ]
                },
                {
                    "name": "More_keyword_slot_type",
                    "values": [
                        {
                            "name": {
                                "value": "more"
                            }
                        }
                    ]
                },
                {
                    "name": "Repeat_keyword_slot_type",
                    "values": [
                        {
                            "name": {
                                "value": "repeat"
                            }
                        }
                    ]
                }
            ]
        }
    }
}
```

Set up Conversational Integration with Alexa

Set up the Conversational Integration with Alexa application so that you can engage customers in conversations with bots.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

- Get ServiceNow entitlements for the following products and applications:
  - Integration Hub
  - Conversational Integration with Alexa

  For more information, see Get entitlement for a ServiceNow product or application.
- Install the following applications on your ServiceNow instance:
  - Integration Hub
  - Conversational Integration with Alexa
- Complete the Alexa settings.
  1. Create your Amazon Developer account.

     For more information, see the Alexa documentation.
  2. Create an Alexa skill.

     For more information, see the Alexa documentation.
  3. Build an Alexa skill model.

     For more information, see the Alexa documentation.
  4. Configure an Alexa skill.

     For more information, see Configure an Alexa skill

     .
  5. Test an Alexa skill on the developer console.

     For more information, see the Alexa documentation.
  6. Account linking with Alexa.

     For more information, see the Alexa documentation.

Role required: external_app_install_admin, va_admin, or admin

Procedure

1. Associate a provider channel identity record with your Alexa account.
   For more information, see Create a provider channel identity record for Alexa.
2. Associate inbound message records with a message auth record.
   For more information, see Set up message authentication for Alexa.

Create an Alexa skill

Create an Alexa-hosted skill using the Alexa developer console. Creating an Alexa skill helps you prepare to use the Alexa app.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Log in to the Alexa developer console with your Amazon developer account.
2. Click **Create Skill**.
3. In the **Skill name** field, enter a skill name.
4. From the Default language list, select a default language to add your skill.
5. Under Choose a model to add your skill, select **Custom**.
6. Under Choose a method to host your skill's backend resources, select **Alexa-Hosted (Node.js)**.
7. Click **Create skill**.
8. To add your skill, select the **Start from Scratch** template.
9. Click **Continue with Template**.

Note:
Creating an Alexa-hosted skill takes a few minutes.

10. In the skill, navigate to **Interaction Model** > **Intents** > **JSON Editor**.
11. Replace the **JSON Editor** with the following JSON script.

```
{
    "interactionModel": {
        "languageModel": {
            "invocationName": "now agent",
            "intents": [
                {
                    "name": "AMAZON.CancelIntent",
                    "samples": []
                },
                {
                    "name": "AMAZON.HelpIntent",
                    "samples": []
                },
                {
                    "name": "AMAZON.StopIntent",
                    "samples": []
                },
                {
                    "name": "AMAZON.NavigateHomeIntent",
                    "samples": []
                },
                {
                    "name": "EverythingIntent",
                    "slots": [
                        {
                            "name": "EverythingSlot",
                            "type": "Bag_of_words"
                        }
                    ],
                    "samples": [
                        "{EverythingSlot}"
                    ]
                }
            ],
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
            "types": [
                {
                    "name": "Bag_of_words",
                    "values": [
                        {
                            "name": {
                                "value": "value: Hello world"
                            }
                        },
                        {
                            "name": {
                                "value": "name: bag_of_words"
                            }
                        }
                    ]
                }
            ]
        }
    }
}
```

12. Click **Save Model**.
13. Navigate to **Invocations** > **Skill Invocation Name**.
14. In the **Skill Invocation Name** field, provide the skill Invocation name.

    Note:
    The skill name is the name which you use in your Alexa device to invoke the skill.

    For example: `<ask <skill name>`.

15. Navigate to **Interfaces** and enable **Alexa Presentation Language**.

    Note:
    This option enables all the screen devices which you want to use in Alexa.

16. Click **Save Interfaces**.

Configure an Alexa skill

Configure your Alexa skill to talk to your ServiceNow instance.

Before you begin

Note:
Linking your Alexa account with your ServiceNow instance is optional and only the Virtual Agent topics with the public role are accessible with guest user access.

Role required: admin

Procedure

1. Log in to the Alexa developer console with your Amazon developer account.
2. Click the **Code** tab.
3. Click **Import Code**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Browse for the `lambda_funtion_sn_va_alexa.zip` file that you downloaded from the Supporting Documents section of the Conversational Integration with Alexa application on the ServiceNow Store and click **Import**.

4. In the *endpoint* field, replace the hostname with the host name from your ServiceNow instance URL where your Alexa store app is installed.

   Example endpoint: `xxxxxxxxx.service-now.com/api/v1/alexa/message`.

5. In the *secretkey* field, replace `<Provide secret key>` with your token (static or hash-based).

   Use the following tokens as per your authentication type.

   - Hash-based token

     If you are using hash-based authentication, provide the hash token which you provided during the ServiceNow instance setup.

     ```
     `"var security = <Token>
              "var genratedHash = generateHmac(eventJSON,
      secretKey);
              'X-Voice-Type': 'hash',
              'X-Voice-Token': genratedHash,"
     ```

     Note:
     Hash-based authentication is provided by default.

   - Static token

     If you are using static authentication, provide the static token.

     ```
     `"var security = <Token>
              'X-Voice-Type': 'static',
             `'X-Voice-Token': <Token>,`
     ```

6. Click **Deploy**.

Build an Alexa skill model

Build your Alexa-hosted skill on the Alexa developer console. Building a saved Alexa skill model helps you prepare the skill for testing.

Before you begin
Role required: admin

Procedure

1. Log in to the Alexa developer console with your Amazon developer account.
2. Select the skill that you want to build.

   Note:
   Selecting a skill navigates you to the Alexa Developer Console.

3. Click the **Build** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

4. In the Skill builder checklist, click **Build Model**.

> **Note:**
> Building the model takes a few minutes.

The build successful message appears and you can test the sample utterances while the build is being trained.

Get the Alexa skill ID

Get the Alexa Skill ID from your Alexa developer console after configuring the skill. The Skill ID is the Alexa identifier for the application.

Before you begin

Role required: admin

Procedure

1. Log in to the Alexa developer console with your Amazon developer account.
   You can get the skill ID in two ways.
   a. On the Alexa developer console:
      i. Click the **Your Skills** tab.
      ii. Navigate to the skill name for which you want to copy the skill ID.
      iii. Under the skill name, click **Copy Skill ID**.
   b. On the left Custom navigator pane of the Alexa developer console:
      i. Select a skill from the **Your Skills** tab.
      ii. Navigate to **Assets** > **Endpoint** on the Custom navigator pane.
      iii. In the AWS Lambda ARN section, click **Copy to Clipboard**.
2. In the Provider Channel Identity record of your ServiceNow instance, paste the copied skill ID in the **Inbound ID** field.
3. Click **Update**.

Test an Alexa skill on the developer console

Test your Alexa skill using the Alexa simulator and developer account once the installation is complete and the skill is built.

Before you begin

Role required: admin

> **Note:**
> The Conversational Integration with Alexa application works for guest users. All published Virtual Agent topics (set up topics or topic blocks) are presented even if account linking is not done. For any regular topic, you must specify the Alexa channel in the **Additional channel support** field of the Topic Properties page. For more information about adding channel support to a Virtual Agent topic, see Deploying Virtual Agent topics in other channels.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Log in to the Alexa developer console with your Amazon developer account.
2. Click the **Test** tab.
3. In the Alexa Simulator, type or speak the invocation name of your skill.

   For example, `ask now virtual agent`.

   Alexa responds to the Virtual Agent and returns a greeting message.

Test a skill on the Alexa mobile app

Test your Alexa skill using the Alexa mobile app.

Before you begin
Role required: none

Procedure

1. Log in to the Alexa mobile application using your email address that you used for logging in to the developer console.
2. Speak the invocation name of your skill.

   For example, `alexa now virtual agent`.

   Alexa responds to the Virtual Agent and returns a greeting message.

Test a skill on the Alexa Echo or Echo Show screen device

Test your Alexa skill using the Alexa Echo or Echo Show screen device.

Before you begin
Role required: none

Procedure

1. Log in to the Alexa Echo or Echo Show using your email address that you used for logging in to the developer console.
2. Speak the invocation name of your skill or use the touch screen option to select the list option.

   For example, `alexa now virtual agent`.

   Alexa responds to the Virtual Agent and returns a greeting message.

Supported Alexa intents

Use the Alexa intents supported by Conversational Integration with Alexa to receive an appropriate response during custom chat integrations with Alexa.

Supported custom intents

Custom intents

Intent	Utterance	Language understanding
AMAZON.YesIntent	yes, yeah	Sends the message “yes”
AMAZON.NoIntent	no, nope	Sends the message “no”

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Custom intents (continued)

Intent	Utterance	Language understanding
AMAZON.HelpIntent	help, help me, and can you help me	Help message is displayed
AMAZON.PauseIntent	pause	End conversation; End Alexa Session
AMAZON.StopIntent	stop, off, and shut up	End conversation; End Alexa Session
AMAZON.CancelIntent	cancel, never mind, and forget it	End conversation; End Alexa Session

Create a provider channel identity record for Alexa

Create a provider channel identity record to connect to your Alexa account.

Before you begin

Role required: va_admin or admin

Procedure

1. In the navigation filter of your ServiceNow instance, enter `sys_cs_provider_application.list`.
2. Click **New**.
3. On the form, fill in the fields.

Provider Channel Identity form

Field	Description
Name	Name of your provider.
Provider	Provider channel that you created. Select **VA Alexa Adapter Provider** as the provider channel. **Note:** The provider is available with the installation of the Conversational Integration with Alexa plugin (sn_va_alexa).
Default portal	Default portal used in the mapping.
Short description	Short description for your channel identifier. For security reasons, the Virtual Agent checks that the URLs for attachments in conversations are from trusted domains specified here. If the URL is not from a trusted domain, the Virtual Agent does not upload the attachment.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	If an attachment upload fails because Virtual Agent did not trust the domain, Virtual Agent does not inform the end user about the attachment upload failure.
Message auth	Message authentication for the channel identifier. Choose a message authentication type from the following options: ○ ServiceNow Virtual Agent Alexa App - Static ○ ServiceNow Virtual Agent Alexa App - Hash
Inbound ID	Identifier for your bot. In this field, provide your Alexa Skill ID that you copied from the Amazon developer console. For example: `amzn1.ask.skill.XXXXXXX-XXXX-XXXX-XXXX-XXXXXXX`.

4. Click **Submit**.

Set up message authentication for Alexa

Define a token in your ServiceNow instance to set up a message authentication with your Alexa account.

Before you begin

Role required: admin

Procedure

1. In the navigation filter of your ServiceNow instance, enter `message_auth.list` and click **New**.
2. Select a message authentication type for Alexa and open the record.

   Your ServiceNow instance provides you with the following authentication types by default.

   ○ **ServiceNow Virtual Agent Alexa App - Static**
   ○ **ServiceNow Virtual Agent Alexa App - Hash**
3. On the form, fill in the fields.

Message Auth form

Field	Description
Name	Name of the record in the Message Auth [message auth] table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	For example, **ServiceNow Virtual Agent Alexa App - Hash** or **ServiceNow Virtual Agent Alexa App - Static**
Provider	Provider of the auth token. Enter `Alexa`.
Inbound message verification	Name of the Hash or Static Message Verification record that you created for the inbound hash or static messages. Select an inbound message verification option as per the selected authentication type. Your ServiceNow instance provides you with the following authentication tokens by default: ○ **ServiceNow Virtual Agent Alexa App Static Token** ○ **ServiceNow Virtual Agent Alexa App Hash Token**
Outbound message creation	Name specified on the Token Verification form (this token interacts with the provider on behalf of the user). Select an outbound message option as per the selected authentication type. Your ServiceNow instance provides you with the following authentication tokens by default: ○ **ServiceNow Virtual Agent Alexa App Static Token** ○ **ServiceNow Virtual Agent Alexa App Hash Token** **Note:** Outbound message verification is not required for Alexa. However, select the same option provided for Inbound message verification because it is a required field.
Outbound service token	Authorized outbound service token. Navigate to the Inbound message verification record to procure the Outbound service token from the Alexa setup and provide it in the **Outbound service token** field.

4. Click **Update**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Account linking with Alexa

Link your Alexa account with your ServiceNow instance to retrieve information from your custom skill.

Link your Alexa account with your ServiceNow® instance

1. Configure your ServiceNow instance to link it with your Alexa account.

   For more information, see Create an OAuth API endpoint for external clients.
2. To configure your Alexa account for account linking, see Configure your Alexa account.
3. To link the Alexa events with your ServiceNow instance using your macOS Terminal, see Link Alexa events using the macOS Terminal.
4. To link your ServiceNow instance with your Alexa account using the Alexa app, see Link your account using the Alexa app.

Configure your Alexa account

Configure your Alexa account to link it with your ServiceNow instance.

Before you begin
Role required: admin

Procedure

1. Log in to your Alexa developer console with your Alexa developer account.
2. Navigate to the **Build** > **MODELS** > **ACCOUNT LINKING**.
3. On the Account Linking form, swipe the **Do you allow users to create an account or link to an existing account with you?** toggle switch to the right.
4. In the Settings section of the form, swipe the **Allow users to authenticate using your mobile application** toggle switch to the right.
5. In the Security Provider Information section of the form, click **Auth Code Grant**.
6. On the form, fill in the fields.

Auth Code Grant form

Field	Description
Your Web Authorization URI	The URI that authorizes your web access. For example: `https://<instance-name>.service-now.com/oauth_auth.do`. **Note:** The instance-name for Alexa is `voice`.
Your iOS App Authorization URI	The URI that authorizes your iOS app. Provide `voice` as the value.
Your Android App Authorization URI	The URI that authorizes your Android app. Provide `voice` as the value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Access Token URI	The URI that authorizes the access to the API requests. For example, `https://<instance-name>.service-now.com/oauth_token.do` **Note:** The instance-name for Alexa is `voice`.
Your Client ID	Auto-generated unique ID of the client application requesting the access token. **Note:** Provide the Client ID generated while creating an OAuth API endpoint for external clients.
Your Secret	The shared secret string that the instance and the OAuth application use to authorize communications with one another.

7. Click **Save**.
8. Copy one of the URLs from the **Alexa Redirect URLs** field in the Auth Code Grant section.

   Note:
   Insert the copied URL in the Redirect URL field of the OAuth API record created in your ServiceNow instance.

   If you face an issue with one of the URLs, try to use the next available URL and pick the one that works.

9. Click **Save**.

Link Alexa events using the macOS Terminal

Link Alexa events using your macOS Terminal to complete the Alexa account linking process with your ServiceNow instance.

Before you begin

Note:
Copy the Skill ID of your skill from the Alexa developer console. The Skill ID is the same inbound ID used in the sys_cs_provider_application record.

Role required: admin

Procedure

1. On your macOS, open the Terminal.
2. Execute the *`npm install -g ask-cli`* command.
   Executing this command installs the Alexa command-line interface on your machine if it was not previously installed.
3. Execute the *`ask configure`* command.
4. Log in with your Amazon developer account credentials when prompted.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Choose **No** if you are asked the question **Do you want to link your AWS account in order to host your Alexa skills?**

5. To download the manifest file, execute the *ask smapi get-skill-manifest -s {<provide skillId>} > skill.json* command.
6. To edit the *skill.json* file, add the following JSON script inside the manifest object.

```
"events": {
      "endpoint": {
        "uri": <provide lambda ID>.
      },
      "subscriptions": [
        {
          "eventName": "SKILL_ENABLED"
        },
        {
          "eventName": "SKILL_DISABLED"
        },
        {
          "eventName": "SKILL_PERMISSION_ACCEPTED"
        },
        {
          "eventName": "SKILL_PERMISSION_CHANGED"
        },
        {
          "eventName": "SKILL_ACCOUNT_LINKED"
        }
      ]
    },
```

Note:
Be sure to edit the URL endpoint with the Lambda ID. You can copy one of the endpoints from the *skill.json* file and replace it with the Lambda ID. You can also fetch it from the Alexa console from **Build** > **Endpoints**.

7. To upload the updated manifest file, execute the *ask smapi update-skill-manifest -s {<provide skillId>} --manifest "$(cat skill.json)* command.

Result
Your Alexa account is linked with your ServiceNow instance.

Your Alexa account is linked with your ServiceNow instance.

Link your account using the Alexa app

Link your ServiceNow account using your Alexa mobile application.

Before you begin
Role required: admin

Procedure

1. Download the Alexa app on your Android or iOS device.
2. Log in with the same email address that you used for the Amazon developer account.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. In the lower-right area of the app, click **More**.
4. Select **Skills & Games**.
5. Select **Your Skills** tab.
6. Click **Dev**.
7. Select the skill that you created.
8. If the **enable skill** button does not appear, click **Disable Skill**.
9. Click **Enable**.
10. Log in with the ServiceNow® instance credentials of any user of the instance.
    You should see that the account is linked.

> **Note:**
> Insert the user record in the provider_user_map record to complete the account linking.

Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience

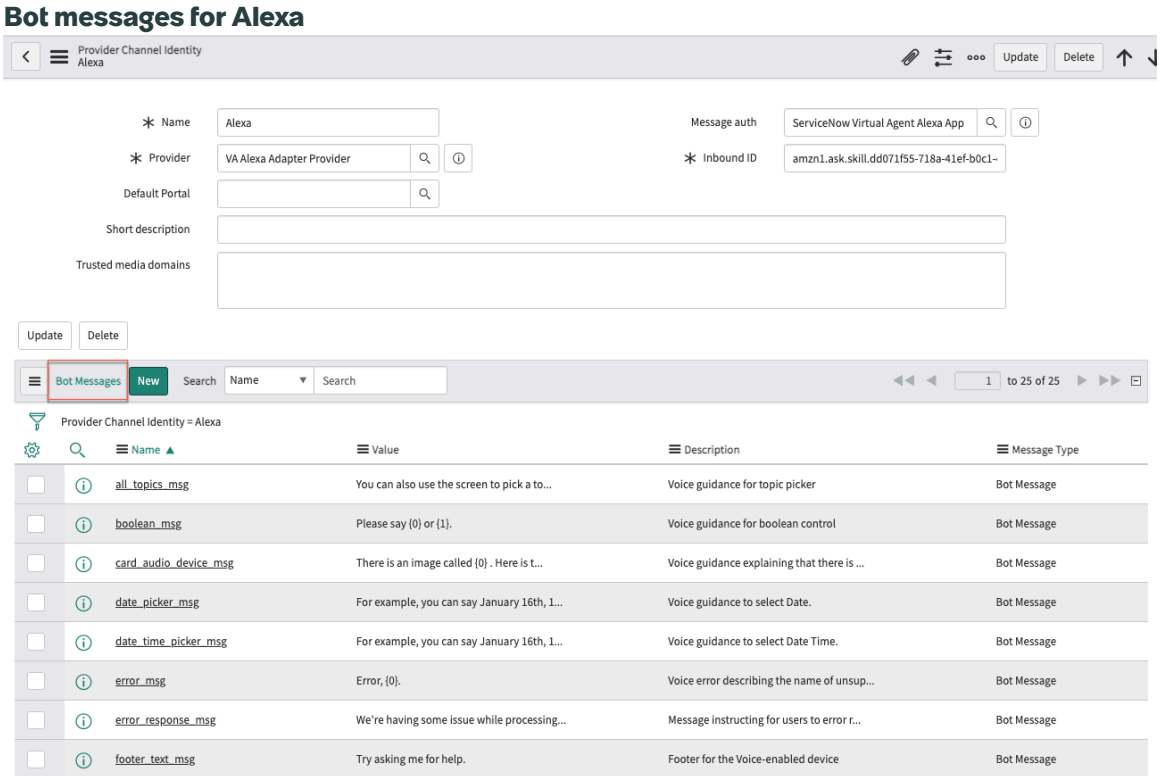
Fine-tune your Virtual Agent settings and topics provided by the Virtual Agent Designer for the best voice chat experience with Alexa.

- Virtual Agent Designer is a diagram tool for creating and managing topics, which are blueprints for conversation between a Virtual Agent and a user. For more information, see Getting started with Virtual Agent Designer.

  > **Note:**
  > Be sure that you specify Alexa as the applicable channel in the **Additional channel support** field if you want the topics that you designed using the Virtual Agent Designer to work on Alexa. For more information about the channel selection, see Deploying Virtual Agent topics in other channels.

- Bot messages help you to interact with Alexa. You can change the bot messages for interaction in a voice chat conversation. To access the bot messages, enter `sys_cs_provider_application.list` in the navigation filter and navigate to your Alexa application profile to find the bot messages.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



- You can change the greeting message and other messages only for the voice channels using the Custom Greeting and Setup page. For example, you can create a custom topic, edit it, and assign it to be used if the end user is on a voice channel. For more information about accessing the Custom Chat and to change the greeting section of the message, see Configure a Virtual Agent chat experience.

- You can also change the system-generated messages by entering `sys_properties.list` in the navigation filter, and filter them by the criteria `com.glide.cs` to confirm that these messages work for voice channels. You can review the following key messages:
  - com.glide.cs.topic_picker_msg
  - com.glide.cs.no_topic_found_message
  - com.glide.cs.no_topic_sorry_message
  - com.glide.cs.link_account_msg
  - com.glide.cs.topic_choice_list_message
  - com.glide.cs.topic_confirmation_message

  Note:
  Most of the messages unique to the voice channels are listed in the Bot Messages section of the Provider Channel Identity record.

  For more information, see Change the Virtual Agent greeting messages in the Greeting setup topic.

- Most components work for screen-based and screen-less devices accessed in Alexa. However, some components are not compatible especially for the screen-less devices.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
On the screen-based Alexa enabled devices, the presentation of cards and images has limitations as per the Alexa skill kit specification.

The Conversational Integration with Alexa application supports the following user input controls in Virtual Agent Designer.

Note:
Conversational Integration with Alexa also supports touch input for screen-based devices.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **User input controls**

User input control	Description	Screen	No screen
Text input/ output	Text format that is validated when a user enters certain text items.	Yes.	Yes.
Static Choice	User selects an item from a predefined list.	Yes, touch scroll.	Yes, voice pagination.
Dynamic Choice	User selects a choice from the list of dynamically created choices.	Yes, no clicking links.	Yes, voice pagination.
Boolean	User enters a Boolean response to the bot. For example, the user can reply Yes or No in a chat conversation.	Yes.	Yes.
Date Time	User selects a calendar date, time (hours and minutes), or both.	Yes (NLU recommended at the node).	Yes (NLU recommended at the node).
File Picker	User sends a file to the bot.	No.	No.
Pause	Breaks the conversation with Alexa.	No.	No.
Carousel	User selects a single item from the carousel.	Yes, touch scroll.	Yes, reading labels.
Image/Link/ HTML output	Bot sends an image, a link, or an HTML to the user.	Yes, no clicking links.	error_msg
Video	User can choose a video card from the header card.	video_screen_device_msg	video_audio_device_msg
Card	Type of header card. Choose the contents: ○ Large image with text ○ Small image with text ○ YouTube Video Card The fields in the dialog box change based on your choice.	Yes, no clicking.	Yes, reading labels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User input control	Description	Screen	No screen
Table	If you selected Record as the **Reference Type**, select the table to be searched.	Yes Shows the table headers, followed by rows with column header: value pair, Speak (Table header). Please say Done to continue.	No, reading labels Unfortunately, I cannot show you the content on this device. Please say Done to continue.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- **Note:**
  To edit or change any of the following bot messages, enter sys_cs_provider_application.list in the navigation filter of your ServiceNow instance, select **Alexa** > **Bot Messages**, and click the name of the bot message that you want to edit.
  - error_msg
  - video_screen_device_msg
  - video_audio_device_msg
  - table_msg

  If you find the message name <EMPTY> and want to add a Boolean confirmation message to the end users, you can configure the bot message with the value [0] or [1].
- Conversational Integration with Alexa supports contextual actions that serve an appropriate response from custom chat integrations when user input is mapped to them. For more information, see Contextual actions for Alexa.

Contextual actions for Alexa

Use the contextual actions supported by Conversational Integration with Alexa to receive an appropriate response during custom chat integrations with Alexa.

Hi

You can type or speak the `hi` command to initiate a conversation, in the middle of a conversation, or even inside a specific topic.

When you type or say `hi` in the middle of the topic, you are shown an option to either **End conversation** or to **Cancel**. If you end the conversation, the Alexa skill is reset and you can restart the skill by speaking your invocation name. If you cancel the conversation, you are redirected to the last topic that you were at.

Bye

The `Bye` command is used to end a conversation.

You can type `bye` or speak this command in the middle of a conversation to end the conversation.

Help

The `help` command is used to request help using the bot.

You can type `help` or speak this command to ask your Alexa skill any questions. If you want to restart the conversation, say `hi` or restart the conversation.

Restart

The `restart` command is used to end a bot conversation that is either in progress or runs into an error, and then begin a new conversation.

You can type `restart` or speak this command anywhere in the middle of a conversation.

Note:
For excluding contextual actions Logout/Notifications for Alexa, you must add the records to the Excluded channel table [sys_cs_contextual_action_excluded_channel].

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Closing idle Alexa chat conversations

Enable virtual agents to effectively manage their active Alexa chat conversations by automatically closing the conversations after they have been inactive for a preconfigured amount of time.

Virtual Agent conversations are configured for the Alexa application. By default, any conversation is closed once the session with Alexa closes. Any conversation that is abandoned by requesters remains open or idle until they are automatically closed daily by the *`Time Out Abandoned VA Conversations`* scheduled job. For more information, see Closing Virtual Agent and Agent Chat conversations.

Analyzing Virtual Agent performance

Analyze the performance of Virtual Agent through preconfigured dashboards.

A new build of Conversational Analytics dashboard on Platform Analytics experience is available starting in Washington DC. The dashboard offers many of the same visualizations in the form of indicators and breakdowns, with no dependency on User Experience Analytics for data aggregations. The dashboard also meets the compliance requirements of data regulated market environments, for example, Government Community Cloud (GCC), and thus FedRAMP authorized. See Conversational Analytics dashboard in Platform Analytics experience for more information.

The existing Legacy - Conversational Analytics Dashboard will be deprecated in Yokohama.

Conversational Analytics dashboard in Platform Analytics experience

The Conversational Analytics dashboard in Platform Analytics experience helps you improve Virtual Agent (VA) interactions with users by providing insights into conversational data. The dashboard helps you refine topics and improve the deflection rate of VA.

Get started

Select a tile to get started with the Conversational Analytics dashboard.

Explore	Set up
	
For VA users and system administrators to learn about the dashboard.	For system administrators setting up the dashboard.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use	Reference
For VA users to learn how to use the dashboard.	Get information about the dashboard roles and system parameters

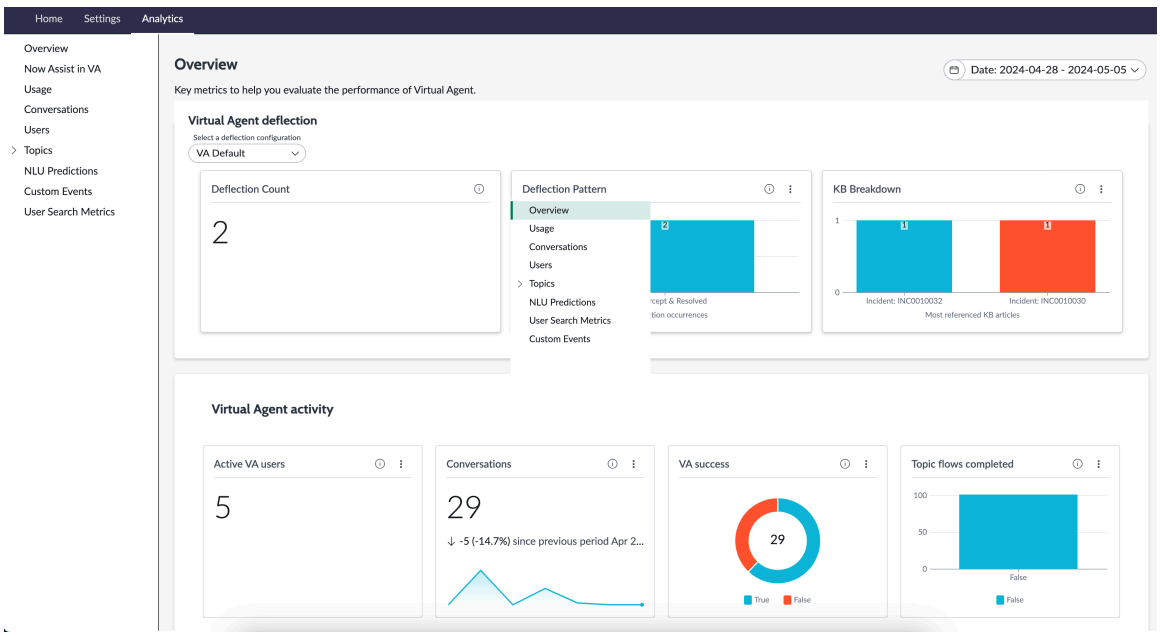
Exploring the Conversational Analytics dashboard in Platform Analytics experience

Use Conversational Analytics dashboard to improve Virtual Agent (VA) interactions with users. The dashboard provides insights into conversational data, and helps you refine topics and improve the deflection rate of VA.

Conversational Analytics dashboard

Conversational Analytics dashboard provides insights into conversations so you can see how well Virtual Agent understood and resolved user issues. Virtual Agent keeps conversational data, that is, records of conversations with the users, and analytics data for up to two years. The dashboard contains indicators which, for example, reveal:

- What percentage of users transfer from VA to a live agent
- How to increase engagement rate and reduce user drop-offs
- Whether the user reached the last node in a topic
- Most and least used topics
- Conversation details using advanced filters
- How to optimize conversation design




Key features

Underperforming topics


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

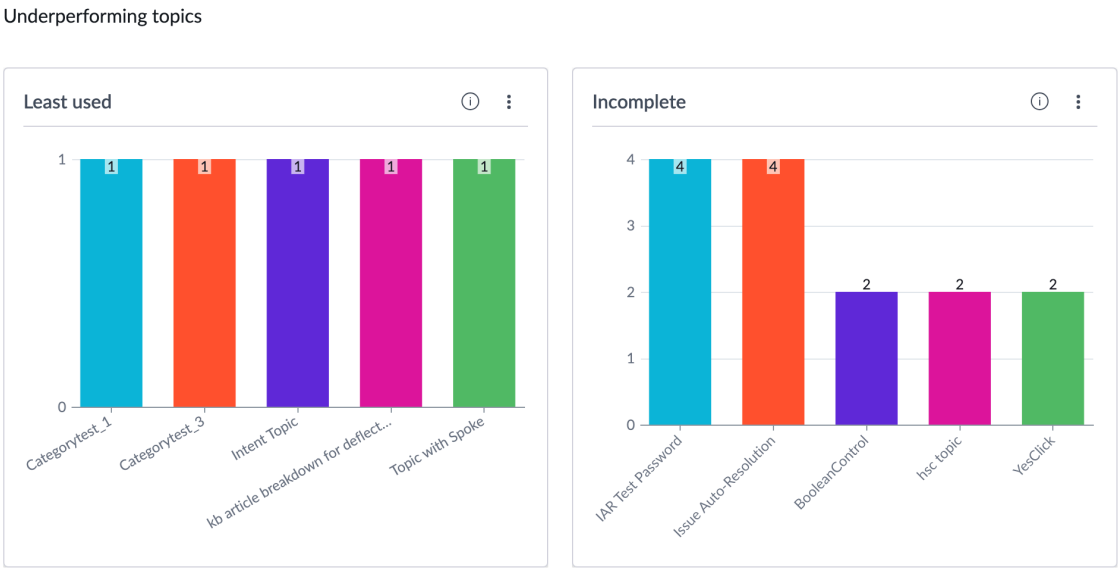See the underperforming VA topics to investigate and improve topic performance.



Conversation details

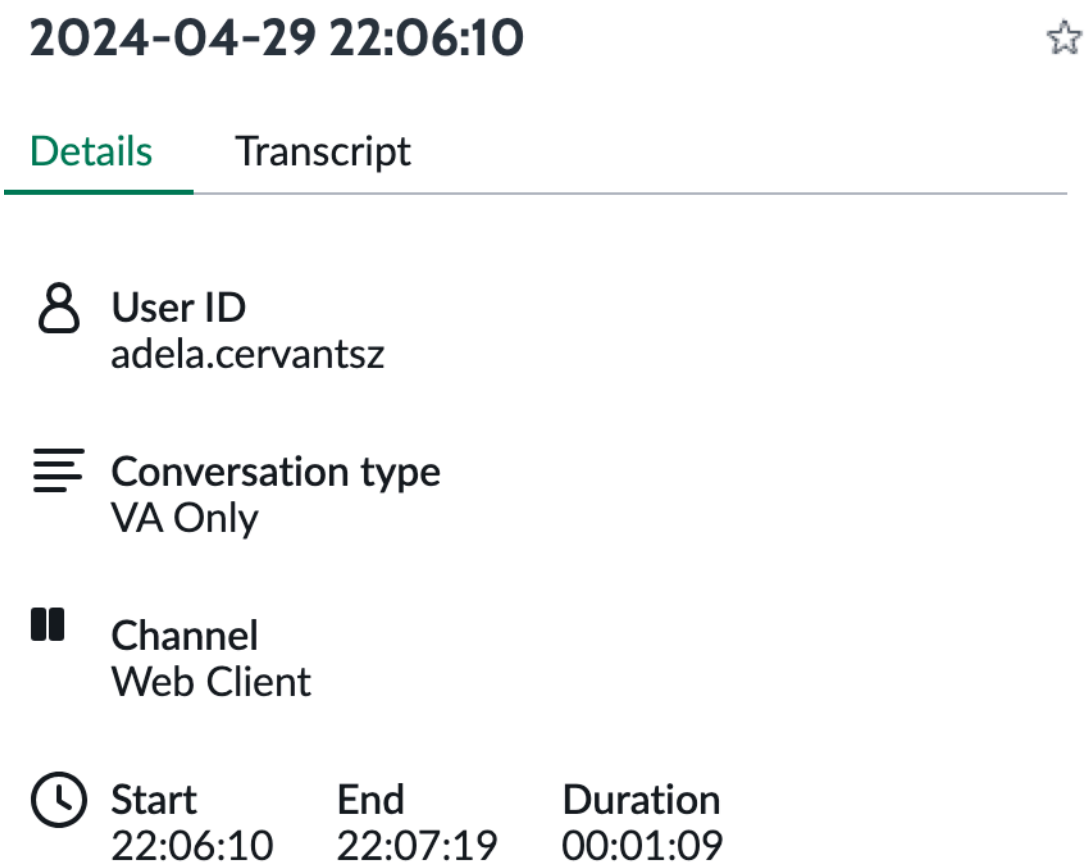Discover metadata about each VA interaction, including the user, chat duration, conversation type, and channel.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Overview of Conversational Analytics dashboard

The following sections provide a high-level overview of how to use each section of the dashboard from the top down.

Date range of data displayed

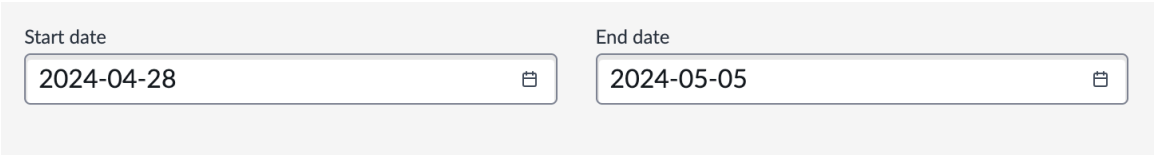The **Start date** and **End date** fields at the top of the dashboard specify the data range of the data summarized on each page.



All data is continually pushed from Virtual Agent to the dashboard in real time, and retained for up to two years.

For information about setting the date range, see Set the date range of the data.

Certain data visualizations might not have data available for the start date and end date selected in the **Start date** and **End date** fields. In such cases, the indicator shows data for a start date and end date based on data availability within the selected date range.

Getting detailed data

The **Overview** tab contains key indicators to help you evaluate the performance of VA. You can view more details in the following ways:

- Select a tab, for example, **Usage**.
- Select an indicator, for example, **Active VA users**.

Dashboard tabs

Dashboard tabs

Tab	Description
Overview	View the key indicators of the performance of VA.
Now Assist in VA	View key indicators to monitor the performance of Now Assist in Virtual Agent. This is visible only when Now Assist in Virtual Agent is enabled.
Usage	View VA conversation usage, for example, the language and conversation type. You can also drill down to the list of conversations of a certain language or conversation type.
Conversations	View conversation details and troubleshoot individual conversations. Advanced filtering enables you to filter the list of conversations by conversation type, duration, user, and language.
Users	View how your users are conversing with VA. Advanced filtering enables you to filter the list by user, channel, and last conversation.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Dashboard tabs (continued)

Tab	Description
Topics	View topic performance indicators. Some of the indicators are most and least used topics, topics corresponding to VA conversations that were transferred to a live agent, average length of conversations per topic, and topic blocks used.
NLU Prediction	View NLU performance indicators such as number of times the NLU prediction model accurately understood the intent of the user's conversation or auto-selected a topic. The indicator links to the NLU Workbench if your instance includes NLU.
Custom Events	View the number of custom chat events that you created using the Events page.
Issue Auto-Resolution	View details about the number of user issues intercepted by the auto-resolution service and resolved by the Virtual Agent.

Virtual Agent activity

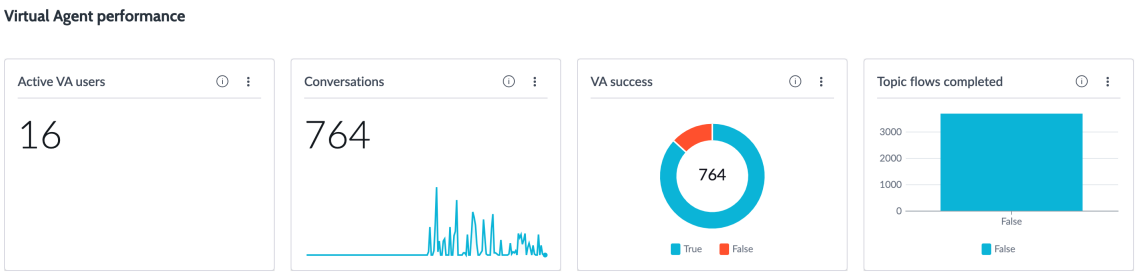This area of the dashboard contains indicators that show Virtual Agent activity such as number of active users who interacted with the Virtual Agent, number of conversations initiated on the Virtual Agent, and so on.




Selecting on the info icon displays the description of the indicator.

Certain trend visualizations on the dashboard such as the trends in intent and topic matching do not support viewing monthly, weekly, and daily data.

Virtual Agent performance

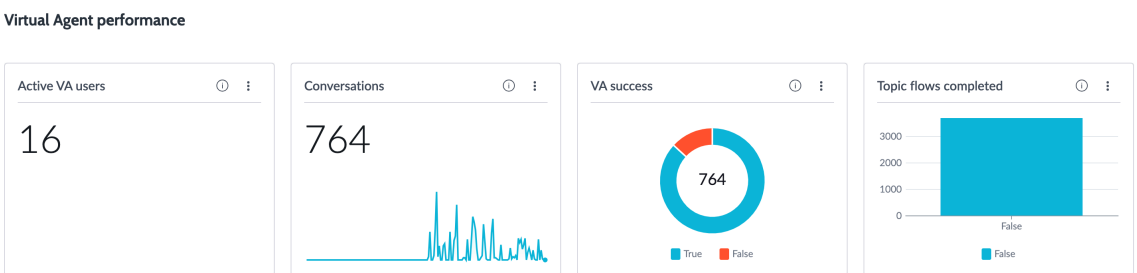This area of the dashboard contains indicators such as topic performance and user feedback that show how well Virtual Agent topics performed and the feedback from the user.



Setting up the Conversational Analytics dashboard

Set up custom events and formula definitions to create more targeted analytics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The Conversational Analytics dashboard enables you to customize the data you monitor in the following ways:

- Date range—Specify the date range for the data displayed on the dashboard.
- Custom events—The dashboard can display analytics about custom events you create. All events must relate to conversations. For example, you can store data about every conversation that used a specific channel, such as Slack.
- Formula Override—Customize parameter definitions used in analytic reports. For example, by default, duration is the total time from the first to the last exchange in a conversation. You might like to override that formula by subtracting inactive times in the conversation.

Role requirements

For information on roles, see Conversational Analytics dashboard roles.

Dependencies

The Conversational Analytics Dashboard requires the Quebec or later version of Virtual Agent.

Install Conversational Analytics Dashboard

Get updates to the Conversational Analytics dashboard from the ServiceNow Store.

Before you begin

Note:
Starting with the San Diego release, the Conversational Analytics app is automatically installed when you initially activate the Glide Virtual Agent (com.glide.cs.chatbot) plugin. Subsequent updates for this app must be downloaded and installed from the ServiceNow Store.

Role required: Chat Analytics Admin

Procedure

1. Confirm that your instance has the Glide Virtual Agent plugin [com.glide.cs.chatbot] activated. Starting with the San Diego release, the Conversational Analytics Dashboard app is automatically installed when you activate the Glide Virtual Agent plugin [com.glide.cs.chatbot].
2. Go to the ServiceNow Store, and search for analytics .
3. Select the latest version of Conversational Analytics app.
   The store installs the updates to the Conversational Analytics app and the analytics data configuration tools. The plugin name is com.sn.conversational.analytics and the scope name is sn_ci_analytics. Some of the main tables for the Conversational Analytics dashboard include:

Table	Description
sn_ci_analytics_conversation	The main table for conversations. It lists Virtual Agent conversations.
sn_ci_analytics_event	List of events. An event is something that happens, for example, an actionable notification. The dashboard can display analytics about default events or ones you create. For more information, see Set up custom events.
sn_ci_analytics_event_prop	List of values used in events.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
sn_ci_analytics_formula_override	Lists formula overrides for properties used by the dashboard. For more information, see Set up custom definitions.

Note:
You do not need a license or a plugin for Performance Analytics.

Create custom events to monitor

Create custom events and monitor them in the Conversational Analytics dashboard.

Before you begin

Role required: Chat Analytics Admin.

About this task

An event is a combination of conditions that apply to a subset of Virtual Agent (VA) conversations. For example, an event might be conversations originating on a Slack channel that VA transferred to a live agent.

Most metrics you see on the dashboard, for example topic and conversation details, are derived from pre-built events. The dashboard displays these events on the **Topics** and **Conversations** tabs. To build custom events, you can use the Custom Events feature. Use custom events to create analytics about data you're interested in, for example:

- Number of conversations on a Slack channel that transferred to a live agent.
- Number of conversations on a Slack channel where the user never returned.



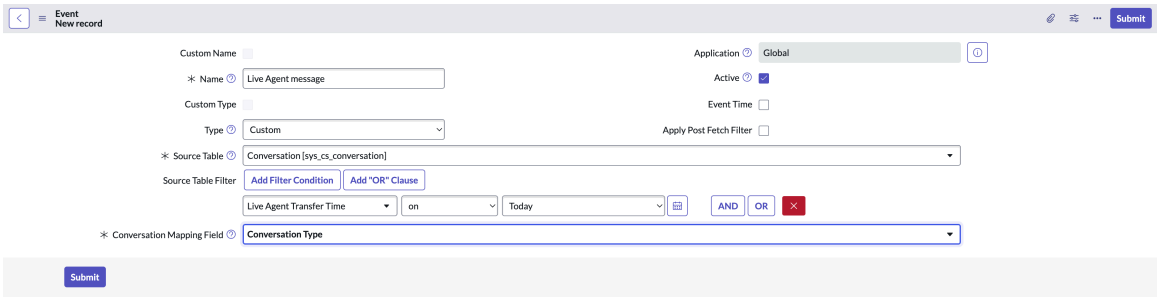
Custom events appear on the **Custom Events** tab. If you haven't configured any custom events, the dashboard won't display any. You can create up to 20 custom events.

Custom events take effect when you create them. You cannot use them to analyze data collected before you created the custom event.

Procedure


1. Navigate to **All** > **Conversational Analytics** > **Event Configuration** and select **New**.
   The Event New record page appears.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



2. In the form, fill in the fields.

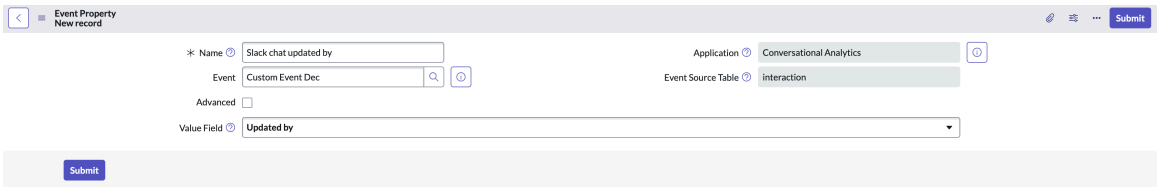3. Click **Submit**.
   The Events page appears, which lists all custom events. You've specified the table to look for custom events. Now, you must specify the parameter values that trigger the custom event.
4. Click the custom event you created.
5. In the Event Properties related list, select **New**.
   The Event Property New Record page appears where you specify the properties for a custom event that you want to track on the dashboard.



   In this example, the **Custom Event** tab shows metrics for *Updated by* for the custom event, Messages-from-Slack.

6. In the form, fill in the fields.

7. Click **Submit**.
   The Event page appears.
8. Click **Update**.
   The Events page appears, which lists all custom events. You can open the **Custom Events** tab on the dashboard to see the custom event. This custom event is not retroactive; the dashboard only displays new events that satisfy the custom event criteria.

Create custom override definitions

Use scripts to override the default formulas used to create the analytics on the Conversational Analytics Dashboard.

Before you begin

Role required: Chat Analytics Admin

Be sure to set the application scope to Conversational Analytics.

About this task

The Conversational Analytics Dashboard uses formulas to determine analytics, such as how to calculate duration. You can override the default formulas to tailor the analytics to your needs. For example, the default formula for duration in the dashboard is the time between the first and last

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

exchanges in a conversation. You might like to override that formula by subtracting inactive times in the conversation.

The default formulas and formula overrides are in the sn_ci_analytics_formula_override table. You can only modify the existing formulas that are in the table by deactivating the default formula and creating a new formula override record. You cannot override some formulas because they are system dependent. You can, however, create custom events to achieve a similar goal.

The default definitions are:

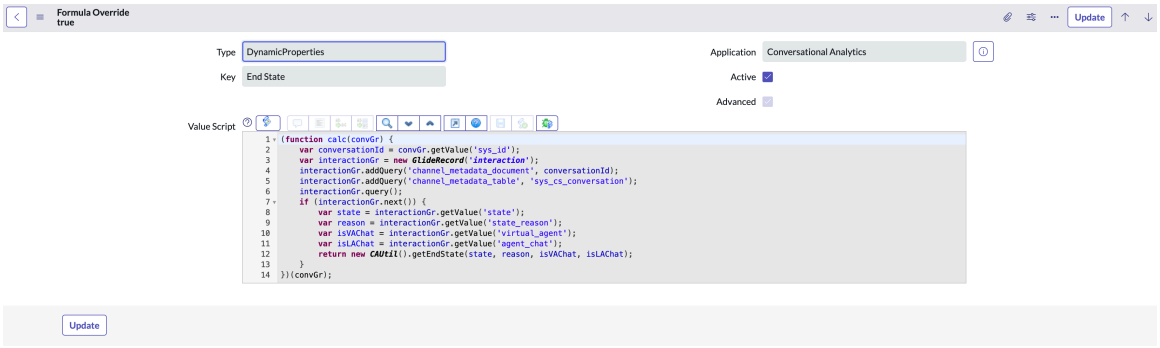
- Duration—Time from the start of a conversation session until the last message is sent, rather than when the conversation session closes. You cannot replace the supplied script for Duration. You can only turn it on or off. If you deselect the **Active** check box, the duration is calculated until the end of the session. If you select the **Active** check box, the duration is calculated to the last message sent.
- Self-solve rate—Number of conversations that did not have negative feedback, contained a topic that went through to the last node, and did not escalate to a live agent. The dashboard divides that number by the number of all conversations to get the rate.
- Feedback—Defined as positive, neutral, and negative. For example, to override this behavior, first, use Virtual Agent (VA) Designer to create a ranking from 1 to 10. Then, you can use a script to override the dashboard's default behavior by grouping 1–4 as negative, 5–7 as neutral, and 8–10 as positive.
- End state—Defined by default in 12 ways. For more information, see Formula override examples.
- Valid conversation—Defined as a conversation record that is included in the dashboard results for satisfying at least one of the following criteria.
  - Non-actionable notification conversations, which do not require validation from the user, are counted as active conversations.
  - Actionable notifications that are not part of an existing conversation are considered valid conversations when the status of the notification is either Sent or Completed.
  - Conversation engages Virtual Agent topic discovery or direct live agent conversation.

Note:
Formula overrides do not change the stored data. They only change how the dashboard displays the data by computing existing data in a different way.


Procedure

1. Navigate to **All** > **Conversational Analytics** > **Formula Override**.
   Alternatively, you can enter *sn_ci_analytics_formula_override.list* in the Filter Navigator to display the sn_ci_analytics_formula_override table.
2. Select the formula you want to override.
   You cannot override the Duration formula, you can only activate or deactivate it. You can alter the scripts for other definitions. These are the only definitions you can alter.
   The Formula Override page appears and shows the existing formula.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



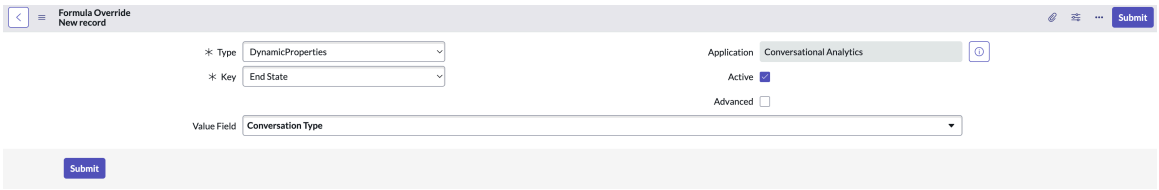3. Copy the script in the Value Script field.
   The default formulas are read-only. So, to modify them, you must make a copy.
4. Deselect the **Active** check box to make the default formula inactive.
5. Click **Update**.
6. Click **New** to create a formula override record that overrides the default formula.
   The Formula Override New Record page appears.



7. In the form, fill in the fields.
8. Click **Submit**.

Formula override example

Use the following formula override example to craft your own formula overrides.

Group End State definitions

The end state of a conversation specifies how a conversation ended. For example, it could end with the user not responding, or the user closed the chat window. There are 12 default definitions of end state. For more information on conversation end states, see Virtual Agent interaction records. The following script groups them as follows:

- VA closed the chat session
  - System Closed VA – User No Response
  - System Closed VA – Topic Complete
  - System Closed VA – Left With AI Search
  - System closed VA – Auto Closed
  - System Closed VA – User Never Engaged
- Live agent closed the chat session
  - System Closed LA – User No Response
  - System Closed LA – Chat Complete

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Agent Closed LA – Clicked End/X
- System Closed LA – Before Agent Engagement

- User closed the chat session
  - User Closed LA – Clicked End/X
  - User Closed VA – Clicked End/X
  - User Closed LA - Before Agent Engagement

To create these groupings of the 12 end states, follow the instructions for creating a formula override and use the following script.

```
(function calc(convGr) {
    // Returns 'System Closed VA', 'System Closed LA', 'User
Closed' states.
    function getFinalEndState(state) {
        var arrayUtil = new global.ArrayUtil();
        VA_END_STATE = ['System Closed VA - User No Response',
            'System Closed VA - Topic Complete',
            'System Closed VA - Left With AI Search',
            'System closed VA - Auto Closed',
            'System Closed VA - User Never Engaged'
        ];
        LA_END_STATE = ['System Closed LA - User No Response',
            'System Closed LA - Chat Complete',
            'Agent Closed LA - Clicked End/X',
            'System Closed LA - Before Agent Engagement'
        ];
        USER_CLOSED_END_STATE = ['User Closed LA - Clicked
End/X',
            'User Closed VA - Clicked End/X',
            'User Closed LA - Before Agent Engagement'
        ];
        if (state) {
            if (arrayUtil.contains(VA_END_STATE, state))
                return 'System Closed VA';

            if (arrayUtil.contains(LA_END_STATE, state))
                return 'System Closed LA';

            if (arrayUtil.contains(USER_CLOSED_END_STATE,
state))
                return 'User Closed';
        }
        return state;
    }

    var conversationId = convGr.getValue('sys_id');
    var interactionGr = new GlideRecord('interaction');
    interactionGr.addQuery('channel_metadata_document',
conversationId);
    interactionGr.addQuery('channel_metadata_table',
'sys_cs_conversation');
    interactionGr.query();
    if (interactionGr.next()) {
        var state = interactionGr.getValue('state');
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
        var reason = interactionGr.getValue('state_reason');
        var isVAChat = interactionGr.getValue('virtual_agent');
        var isLAChat = interactionGr.getValue('agent_chat');
        var endState = new CAUtil().getEndState(state, reason,
 isVAChat, isLAChat);
        return getFinalEndState(endState);
    }
})(convGr);
```

Using the Conversational Analytics Dashboard

Use the Conversational Analytics dashboard to get insights into Virtual Agent (VA) conversations.

The following sections explain how to use the dashboard to investigate VA interactions with users. You must have the Chat Analytics Viewer (chat_analytics_viewer) role to use the Conversational Analytics dashboard.

Set the date range of the data

Set the date range using the date picker on the Overview tab to view the data visualizations for the specified date range. The date range set on this tab applies to all the other tabs on the dashboard.

Before you begin

Role required: Chat Analytics Viewer (chat_analytics_viewer)

About this task

Set the date range for the visualizations using the date picker. You can either select from the standard date ranges available or use the custom range option to select start and end dates.

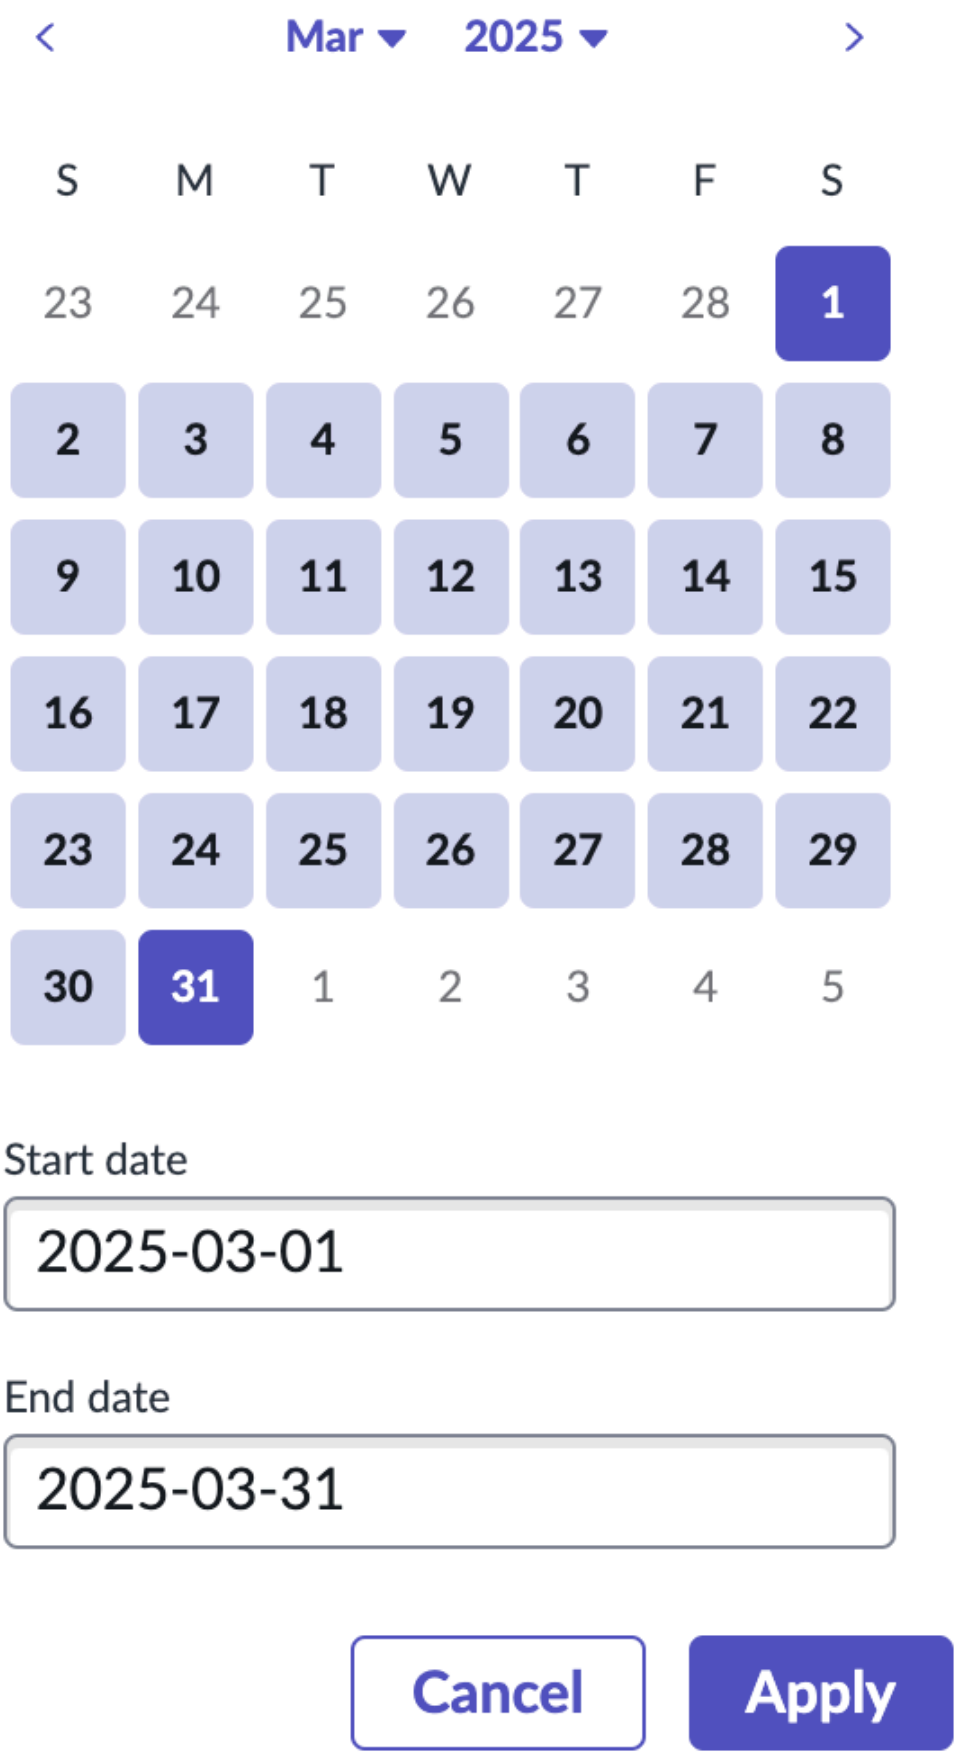
Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Analytics**.
2. Use the date picker on the Overview tab to set the date range.
   a. Select the date picker.



   b. Select the start date of the date range.
   c. Select the end date of the date range.
      The dashboard highlights the selected date range.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

d. Select **Apply**.

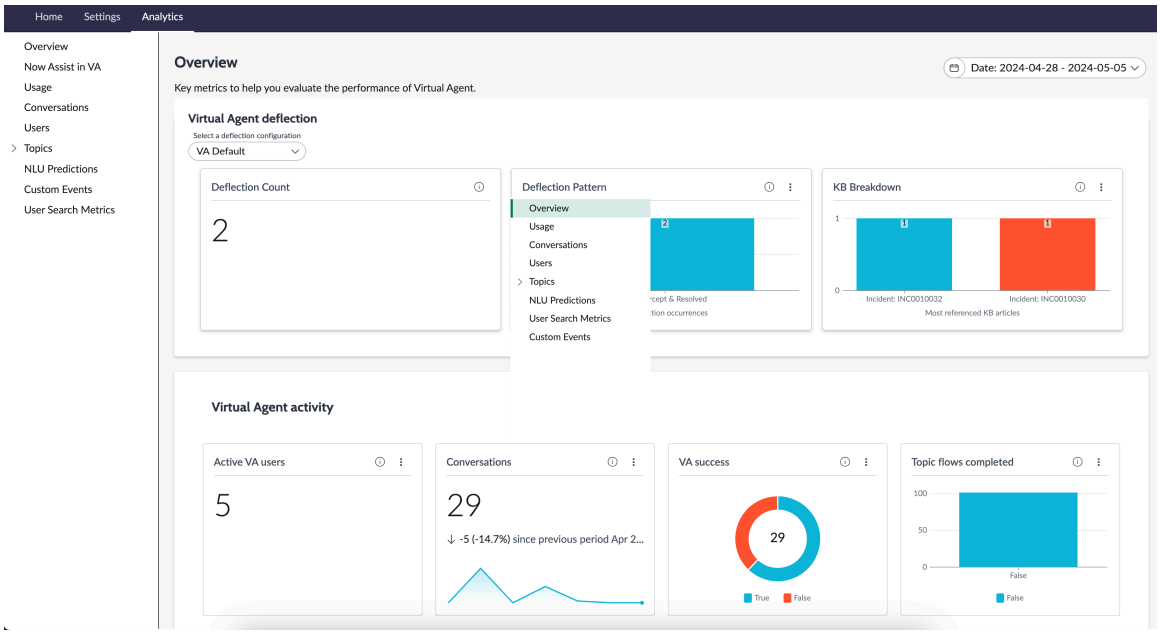
The data displayed on the dashboard adjusts according to the new date range.

Overview tab

Use the Overview tab to view key indicators that help you evaluate the performance of Virtual Agent.

The **Overview** tab is the landing page for the dashboard. The visualizations in the **Overview** tab are important indicators of how VA is performing. You must have the Chat Analytics Viewer (chat_analytics_viewer) role to use the **Overview** tab.

Note:
Now Assist in Virtual Agent Analytics appears in the left navigation only when you have Now Assist in Virtual Agent enabled.



Key performance indicators

Indicators	Descriptions
Deflection Count	Number of deflection occurrences measured by the execution count of the Deflection topic block. A deflection occurs when Virtual Agent resolves or helps to resolve an issue for a user.
Deflection Pattern	Number of deflections per deflection patterns.
KB Breakdown	Titles of KB articles with the number of times they were presented as part of deflections.
Active VA users	Cumulative number of unique active end users (not agents) who used the conversational interface. Select the indicator to drill down to the list of users.
Conversations	Count of all interactive conversations initiated from the Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key performance indicators (continued)

Indicators	Descriptions
	Select the indicator to drill down to the list of conversations.
VA success	Percentage of conversations that were completed without escalation and with an intended topic flow. Completed conversations are those that reach the end of a Virtual Agent topic or conversation, are closed by the user, or are automatically closed. Completed without escalation means that the conversation was not routed to a live agent, and the user did not give negative feedback. (Feedback types include negative, positive, neutral, and no feedback.) Select the chart to drill down to the conversations that were completed successfully.
Topic flows completed	Percentage of topics that end users completed till the last node out of all topics invoked and ran.
Topic Category - Complete	Number of completed conversations shown per topic category. Select a topic category on the bar chart to drill down to the topic category details.
Topic Category - Incomplete	Number of incomplete conversations shown per topic category. Select a topic category on the bar chart to drill down to the topic category details.
Topic - Complete	Number of occurrences per topic when the user completed to the last node. Select a topic on the bar chart to drill down to the topic details.
Topic - Incomplete	Number of occurrences per topic where users abandoned the conversation before the topic reached the last node. Select a topic on the bar chart to drill down to the topic details.
User feedback	Feedback results categorized as good, bad and neutral. The feedback results are calculated from the Feedback Setup topic. **Note:** A user with Chat Analytics Admin role can change how frequently the Feedback Setup topic shows after the completion of chat using the system properties.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key performance indicators (continued)

Indicators	Descriptions
	Select a feedback result on the chart to drill down to the list of conversations associated with the feedback.
Channels	Number of conversations executed across the configured channels of the Virtual Agent. Select a channel on the chart to drill down to the list of conversations associated with the channel.
Conversation end state	Number of conversations that have ended in the out-of-the-box conversation end state. Select a Conversation end state on the chart to drill down to the list of conversations associated with the Conversation end state.

Typical actions on the **Overview** tab include:

- Selecting a deflection configuration to view the deflection indicators such as deflection count, deflection patter, and KB Breakdown.
- Selecting the visualized data, for example, a bar in a bar chart, to get additional information about the data.
- Changing the date range of the data displayed.

Usage tab

The **Usage** tab provides usage information related to conversation type, language used in the conversations, and engagement rate of actionable notifications delivered by Virtual Agent (VA).

The indicators in the **Usage** tab provide the following information.

Usage indicators

Indicators	Descriptions
Conversation type	Number of conversations escalated from VA to a live agent, initiated and completed in VA only, or initiated and completed by a live agent. This indicator supports drill down to the list of conversations based on the selected conversation type.
Topic sent via the Actionable notification	The number of actionable notifications delivered from virtual agent to the users for the selected time range, and the number and percentage of actionable notifications that users engaged with, and did not engage with.
Languages	Languages used by users and the number of conversations in each language.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Usage indicators (continued)

Indicators	Descriptions
	This indicator supports drill down to the list of conversations based on the selected language.

You must have the Chat Analytics Admin or Chat Analytics Viewer role to access the **Usage** tab.

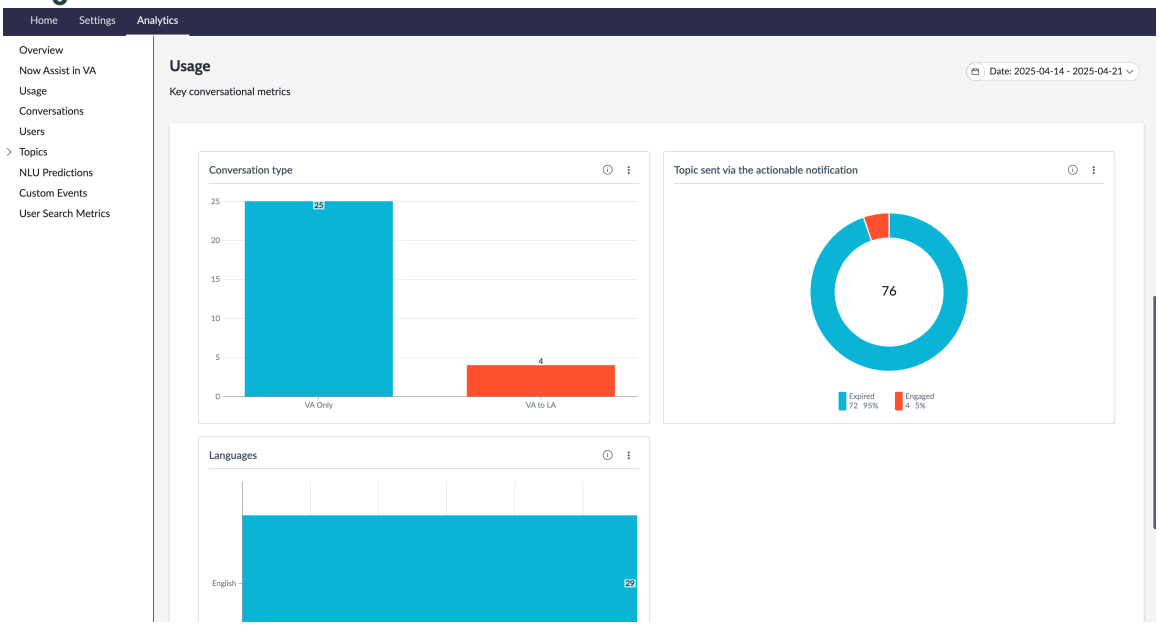Usage tab



Click on the data points in the Conversation type and Languages indicators to drill down to the list of conversations based on the selected conversation type and language respectively.

Conversations tab

Use the **Conversations** tab to view the list of Virtual Agent conversations and details of each conversation that occurred during the selected date range.

All conversations from the Conversation table [sys_cs_conversation], that run on the Virtual Agent Designer are listed on the Conversations page, except for notifications, open (ongoing) conversations, and previews.

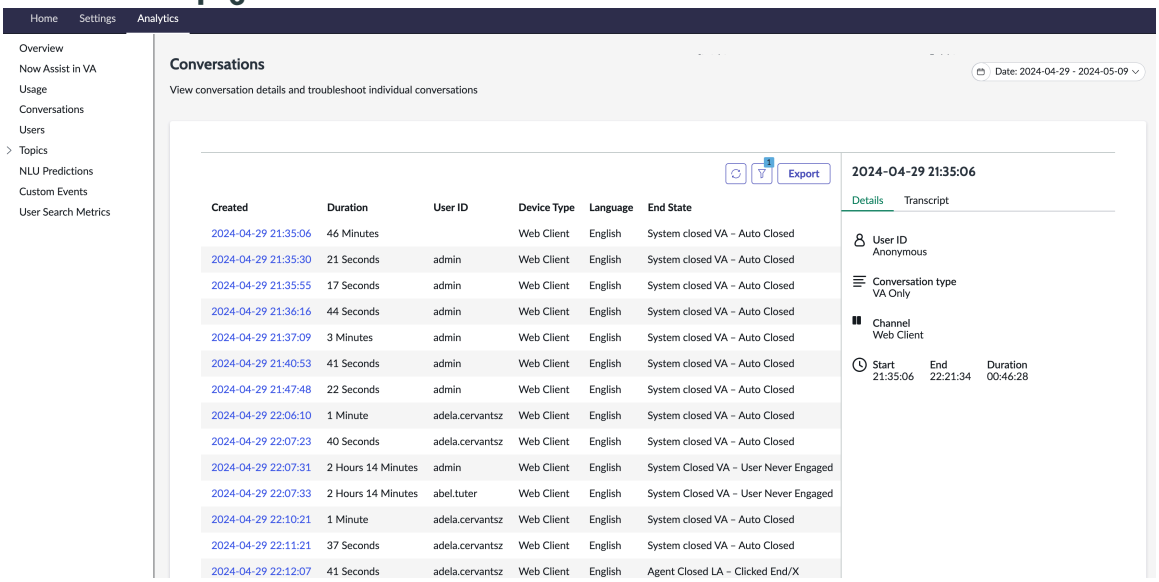
To tag a conversation as a favorite, select the star icon on the side panel. You can list all conversations that are marked as favorite using the Filter Editor.

Virtual Agent conversations and analytics data is retained for a period of two years.

To access the **Conversations** tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversations page



Conversations tab benefits

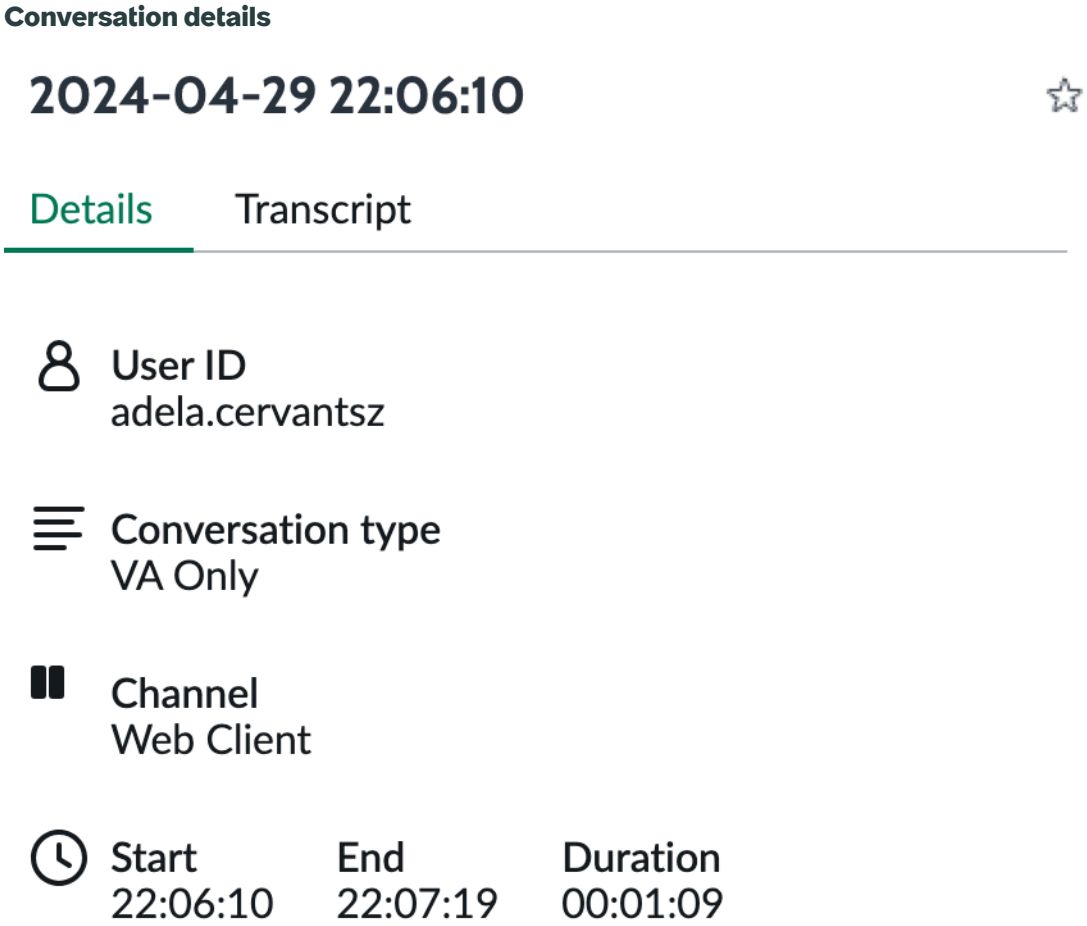
The **Conversations** tab enables you to do the following:

- Filter the list of conversations based on specific conditions using the filter editor. For more information, see Use filters in the Conversation tab
- Learn more about each conversation by viewing conversation details. For more information, see Get conversation details.
- Export the list of conversations to a file. For more information, see Export the conversations list.
- Download the conversation transcript to troubleshoot individual conversations. For more information, see Download the conversation transcript.

Get conversation details

To get more information about a conversation, select one of the conversations in the list. The information appears on the side panel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




To view and download the conversation transcript, select the **Transcript** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversation transcript

2024-04-29 22:07:23

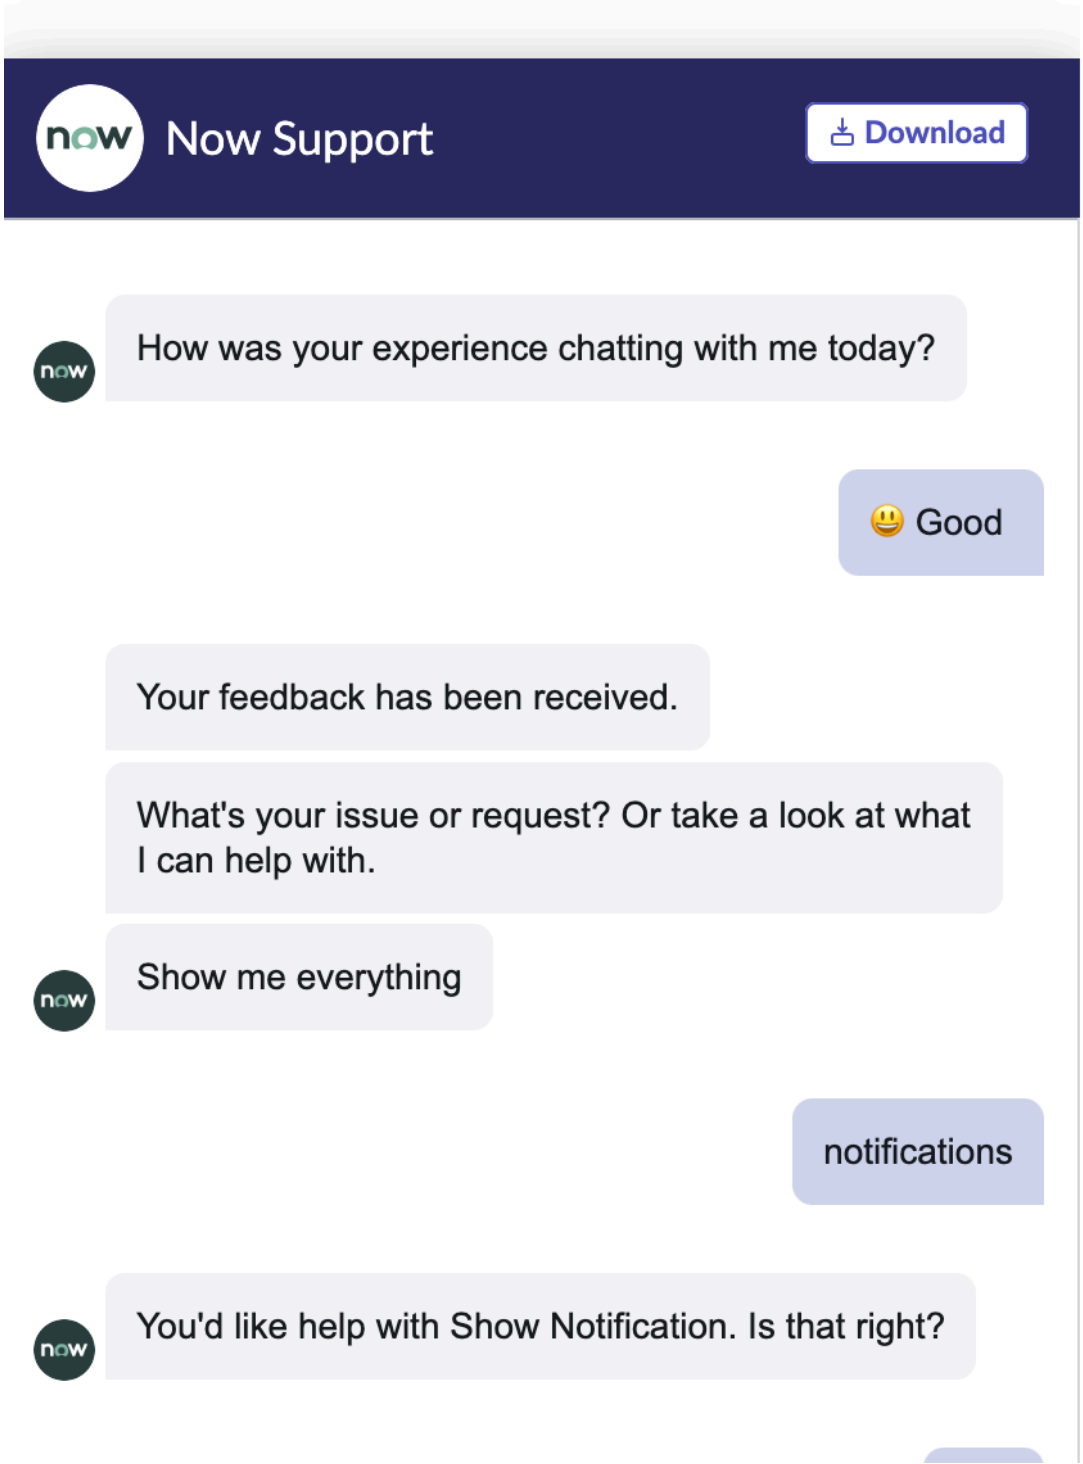Details Transcript



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Export the conversations list

To export the conversations list on the Conversations page to a file, select **Export**. In the Export pop-up window, specify the format for the file such as Excel, CSV, JSON, or PDF, and the delivery type such as email or download.

Note:
You can export up to 1000 records only from the list on the page. This limit is not configurable.

Conversation information

The following table describes details of conversations listed in the **Conversations** tab.

User information

Column	Description
Created	Date of the conversation.
Duration	Duration of the conversation.
User ID	Unique identifier that the system creates and permanently assigns to a Virtual Agent user. The Id becomes a part of conversation records. This is not the same as the system user ID.
Device Type	Conversational channel used for the chat.
Language	Language used for the conversation.
End state	How the conversation ended. For more information on various conversation end states, see Virtual Agent interaction records.
Type	Type of conversation, for example, VA Only (conversation initiated and completed in VA).
Conversation	Sys Id of the conversation.

Download the conversation transcript

To download the conversation transcript, select a conversation from the conversations list and click **Download**.

The conversation transcript .txt file includes various data elements such as user input, Virtual Agent response, Flow Designer Integration Hub, flow action, custom controls, and topic block information for the selected conversation. This information helps Virtual Agent administrators to troubleshoot conversations, for example, conversations where there were errors or transfers to a live agent. For more information on the .txt file, see Conversation transcript template.

Conversation transcript template

The conversation transcript .txt file contains information used to troubleshoot individual conversations.

Data element	Description
Conversation ID (sys_id)	Unique identifier of the conversation, autogenerated by the Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Data element	Description
Conversation Start Time	Start time of the conversation.
Channel	Channel from which the conversation was initiated. For example, the Slack application, Microsoft Teams, and so on.
User Name	Name of the user who initiated the conversation.
User Status	Status of the user in the ServiceNow AI Platform® instance. For example, Active or Inactive.
Bot Response	Control that displays Virtual Agent responses in a conversation.
User Input	Control that prompts and captures information from the user in a conversation.
Message Date and Time	Timestamp of individual messages.
FDIH logs	Action or Subflow • Id: sys_id of the action or subflow. • Inputs: Input passed to the action or subflow. • Outputs: Output received from the action or subflow.
Topic Block	Name of the topic block defined in the current topic. • Id: sys_id of the topic block invoked. • Inputs: Input passed to the topic block. • Outputs: Output received from the topic block.

Use filters in the Conversation tab

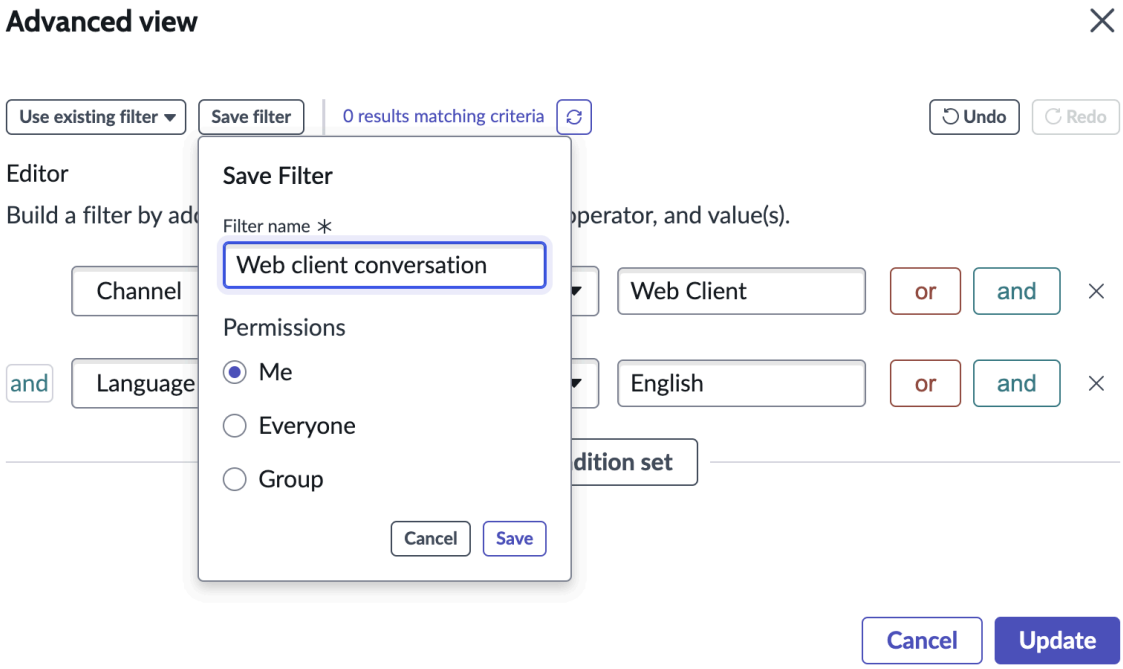
You can filter out conversation for a deeper understanding.

Filtering using the Filter Editor

To filter the conversations, select filter icon and select **Advanced view** button to use the filter editor. You can either select an existing filter from the list or create a new filter condition.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Building filters in the filter editor



The filter editor consists of the following:

- Field: A list based on relevant tables. For more information about the field options, see Field options in the Filter Editor.
- Operator: A list of operators that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

To add a dependent condition in the filter editor, either select **or** or **and**. To filter the conversations list using the condition, select **Update**.

To remove a condition, select the delete icon ✕ next to the condition.

To save a condition that you created in the condition builder, select **Save filter**. In the Save Filter pop-up window, specify a name for the filter. You can also set permissions for the filter in the Save Filter window. Users having the Chat Analytics Viewer (chat_analytics_viewer) role can select and modify saved filters.

Field options in the Filter Editor

Field options

Option	Description
Channel	Conversations that used the specified channel.
Conversation Time	Conversations within the specified date and time.
Duration	Conversations within the specified time duration. You can edit the definition of duration to be a session duration, rather than an active messaging duration. For more information, see Create custom override definitions.
End State	Conversations with the specified state that is based on how conversations ended. The values for the end states are stored in the

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field options (continued)

Option	Description
	Interactions [interactions] table. For more information, see Virtual Agent interaction records.
Events	Specific events that are triggered in a conversation.
Feedback Result	Conversations for the specified feedback type.
Language	Conversations for the specified language based on the user's language setting.
Message Count	Conversations for the specified message count in the chat.
Provider Name	Conversations for the specified provider.
VA Success	Conversations resolved by the Virtual Agent.
Setup Topic Types	Conversations that used the specified setup topic type.
Topic Blocks	Conversations that used the specified topic block.
Topic Categories	Conversations that have topics which belong to a specified topic category.
Topic Count	Conversations that used the specified topic count. Each conversation can use multiple topics and this option filters conversations based on the count of topics used in it.
Topics	Conversations that used the specified topics in the chat.
Type	Conversations that are of the specified type such as live agent only or Virtual Agent only.

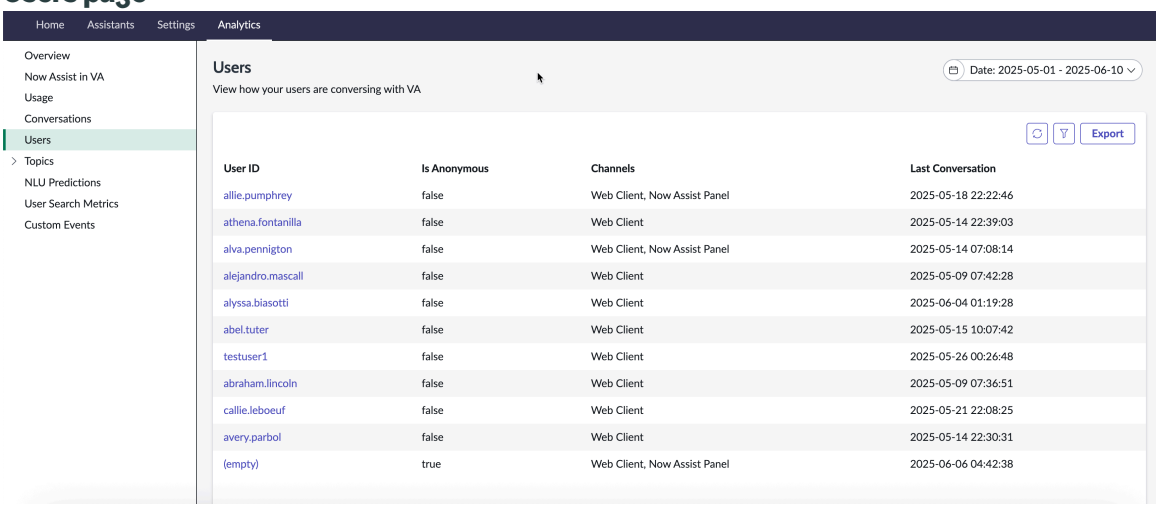
Users tab

Get detailed information on Virtual Agent users such as the time of the last conversation and duration of the conversation.

The **Users** tab provides information about users interacting with Virtual Agent.

To access the **Users** tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

Users page



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Users tab benefits

The **Users** tab enables you to do the following:

- Filter the list of users based on specific conditions using the filter editor. For more information, see Use filters in the Users tab
- View user details. For more information, see User information section on this page.
- Export the list of users to a file. For more information, see Export the list of users section on this page.

Export the list of users

To export the list of users in the Users page to a file, select **Export**. In the Export pop-up window, specify the format for the file such as Excel, CSV, JSON, or PDF, and the delivery type such as email or download.

Note:
You can export up to 1000 records only from the list on the page. This limit is not configurable.

User information

The following table describes user details listed on the Users tab.

User information

Column	Description
User ID	User ID of the logged in user. If users don't log in, they appear in sessions as **Anonymous**.
Is Anonymous	If users didn't log in, they appear in the sessions as anonymous.
Channel	Conversation channel used by the user.
Last conversation	Timestamp of the user's last conversation with the Virtual Agent.

Use filters in the Users tab

You can use filters to get a deeper understanding of User data.

Filter using the filter editor

The filter editor enables you to filter users based on one or more conditions. You can either select an existing filter from the list or create a new filter using the editor.

The filter editor consists of the following:

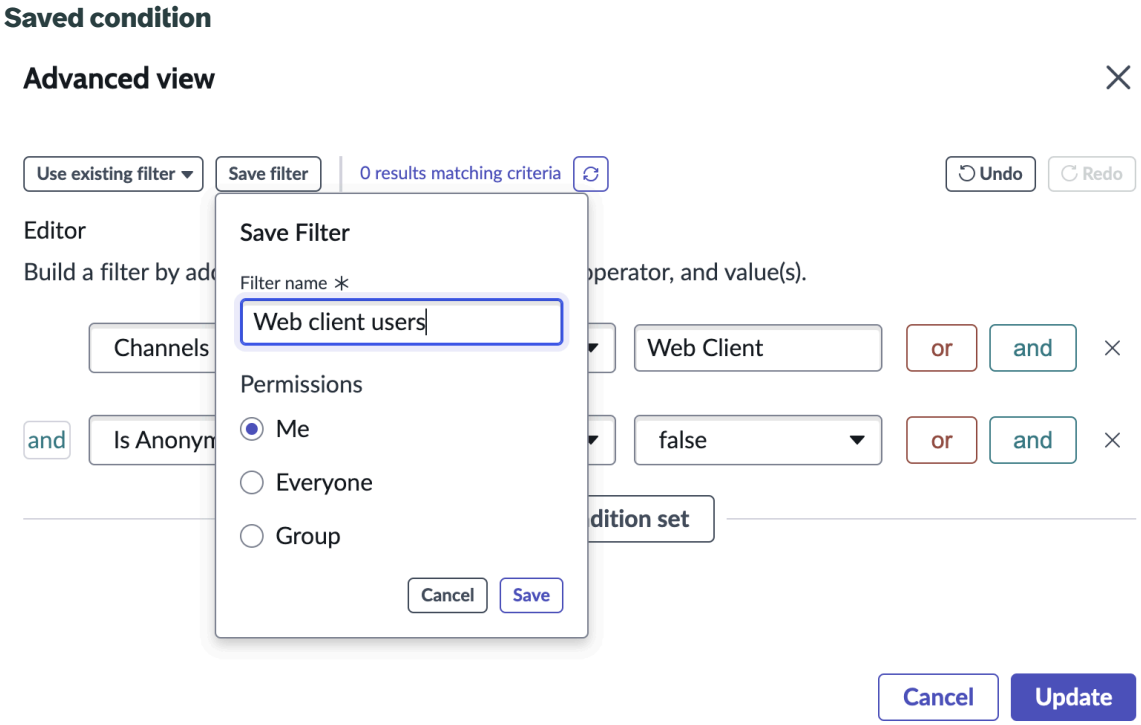
- Field: A list based on relevant tables.
- Operator: A list of operations that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

To remove a condition, select the delete icon ✕ next to the condition. To add dependent conditions in the condition builder, either select **or** or **and**. To filter the conversations list using the condition, select **Update**.

To save a condition that you created in the filter editor, select **Save filter**. In the Save Filter pop-up window, specify a name for the filter. You can also set permissions for the filter in the Save

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Filter window. Users having the Chat Analytics Viewer (chat_analytics_viewer) role can select and modify your saved filters.



Field options in the Filter Editor

User filters

Channels	Filters users based on the communication channels.
Created	Filters users based on the date and time when the conversation was created.
Created On	Filters users based on a specific date when the conversation was created.
Created by	Filters users based on the user who created the conversation.
Domain	Filters users based on specific domains related to the conversation.
Is Anonymous	Filters users who had conversations as anonymous users.
Last Conversation	Filters users based on the last conversation.
Sys ID	Filters users based on the Sys Id.
Tags	Filters users based on the tags associated with the users.
Updated	Filters users based on when the user record was last updated.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


User filters (continued)

Updated by	Filters users based on who last updated the user record.
Updates	Filters users based on updates to a user record.
User	Filters users based on user name.
Keywords	Filters users based on keywords related to the user record.

Topics tab

Use the **Topics** tab in the Conversational Analytics dashboard to identify the best and underperforming topics.

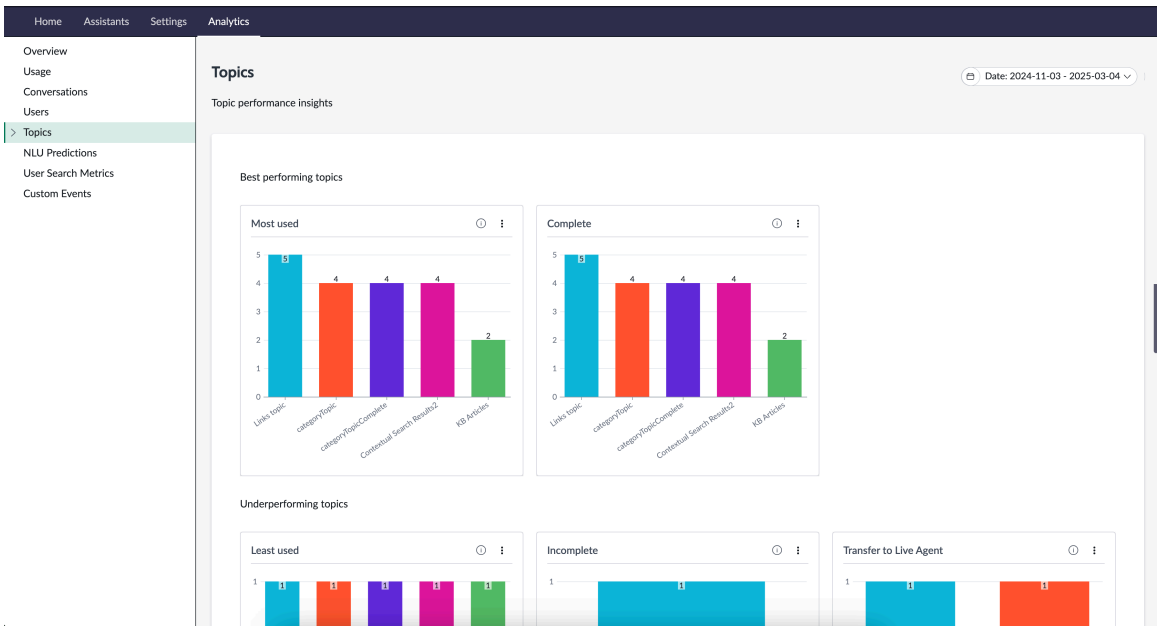The **Topics** tab provides insights into which Virtual Agent (VA) topics are performing well and which aren't. To use the Topics tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.



Best performing topics

The Best performing topics indicators show topics that are performing well. The horizontal axis lists the topics. The count on the vertical axis refers to the number of times the topic was invoked by VA.

- Most Used—Topics that were least invoked by VA in conversations.
- Complete—Number of times VA completed the topic without transferring to a live agent.

Underperforming topics

The Underperforming topics indicators show topics that didn't perform well. The horizontal axis lists the topics. The count on the vertical axis refers to the number of times the topic was invoked by VA.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Least used— Topics that were least invoked by VA in conversations.
- Incomplete—The topics the user abandoned without resolution.
- Transfer to Live Agent—The topics that were transferred to a live agent because VA couldn't resolve user's query.

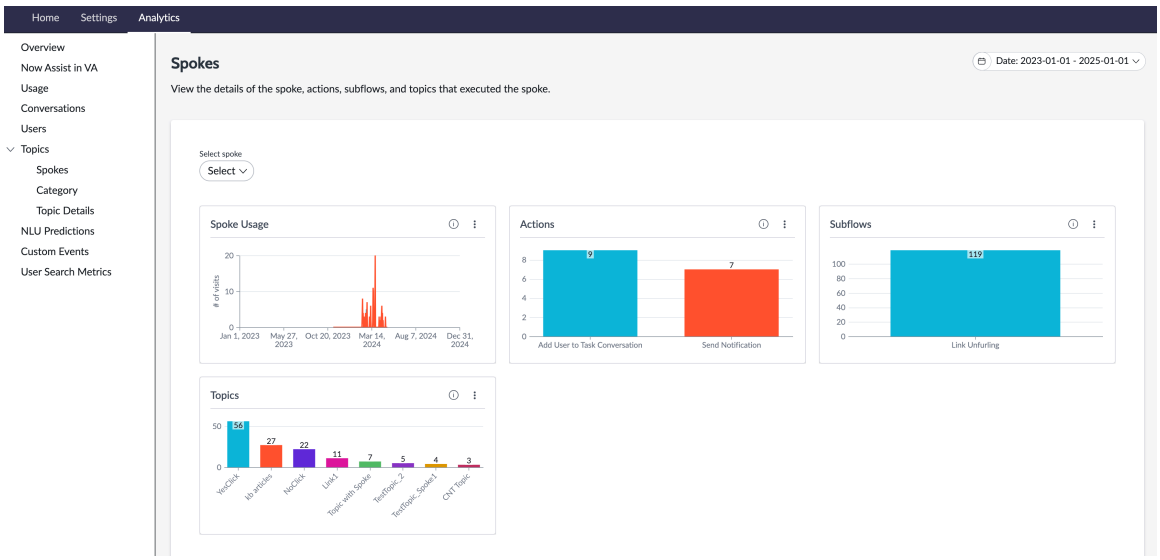
Spokes

The Spokes indicator provides details of the spoke, actions, subflows, and topics that executed the spoke. Select a spoke on the chart to view the details of the spoke. For more information, see Spokes.

Spokes

Use the Spokes indicators to view details such as spoke usage, spoke actions, and subflows for the selected spoke.

In Virtual Agent, conversations contain topics, topics contain spokes, and spokes contain spoke actions or subflows. The **Spokes** indicators show which spokes, actions, and subflows were used and how often.



Spokes tab

The Spokes tab contains the following indicators.

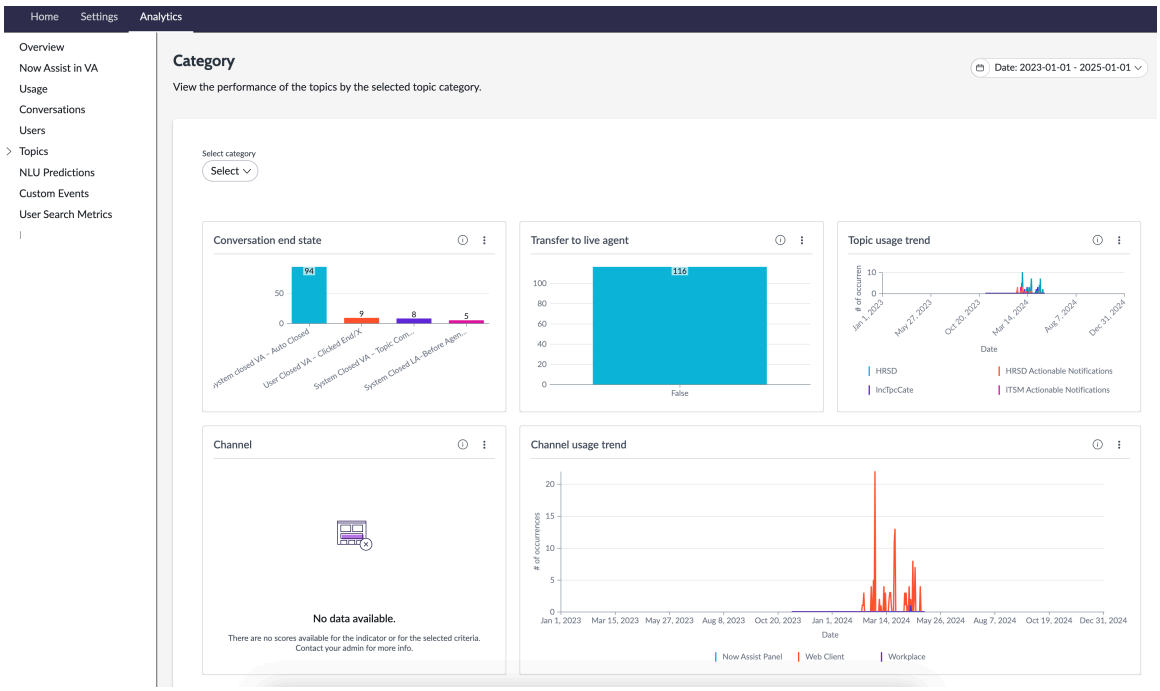
- **Spoke Usage**—Spoke Usage indicator shows the number of times the selected spoke was executed in the date range.
- **Actions**—Actions indicator shows which actions were executed for the selected spoke, which.
- **Subflows**—Subflows indicator shows which subflows were executed for the selected spoke.
- **Topics**—Topics indicator shows which topics executed the selected spoke. The horizontal axis shows the topics that triggered the spoke. The vertical axis shows the number of times the spoke was triggered in a topic.

Topic categories

Use the Category page in the Conversational Analytics dashboard to view the performance of Virtual Agent (VA) topics by the selected topic category.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic categories group related conversation topics. Topics can belong to more than one category. Select the drop-down list to show the categories that you can display in the visualizations. The visualizations show the aggregate performance of Virtual Agent conversations that ran in the topics belonging to a category.



For more information about creating or modifying VA categories, see Create or modify custom categories.

Topic category visualizations

Visualization	Description
Conversation end state	The number of users that reached a specific node in a topic in the VA category. In the example, six users reached the node labeled, **System closed VA - Auto Closed**. Use this field to see where topics stopped working for users. For definitions of each conversation end state, see Virtual Agent interaction records.
Transfer to live agent	The number of users that transferred from VA to a live agent in that VA category. A high number indicates that the topic is not meeting user needs.
Topic usage trend	Number of topics users used in a specified topic category over the course of the date range. The example shows the number of topics per day users used in the IT category. Use this field to monitor updates to topics.
Channel	The application the user used to chat with VA in that topic category, for example, Slack or chat widget.
Channel usage trend	Number of users using a specified channel over the course of the date range for topics in that VA category.

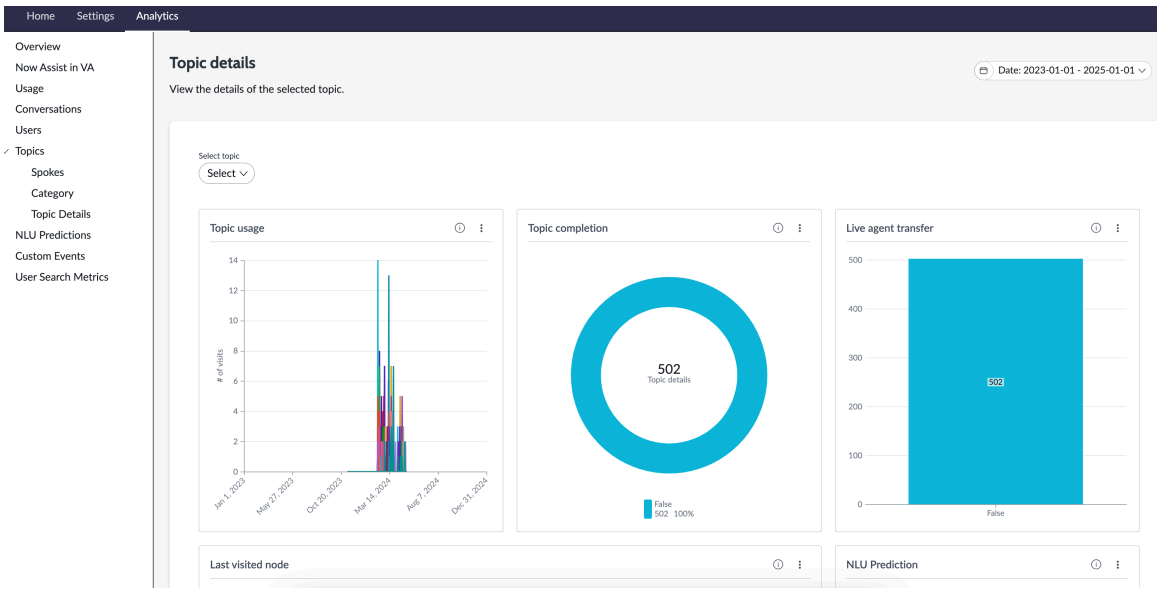
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topics details

Use the Topic Details page in the Conversational Analytics dashboard to view key performance indicators of Virtual Agent (VA) topics.

Get additional information about the topics

Select a topic from the drop-down to view the indicators associated with the topic.



The Topic Details page provides the following indicators.

- **Topic Usage**—The number of times the topic was used each day.
- **Topic completion**—Number of times the user went to the final node in the topic.
- **Live Agent Transfer**—Number of times the selected topic was invoked by VA and then transferred to a live agent.
- **Last Visited Node**—Last nodes users visited before leaving the chat.

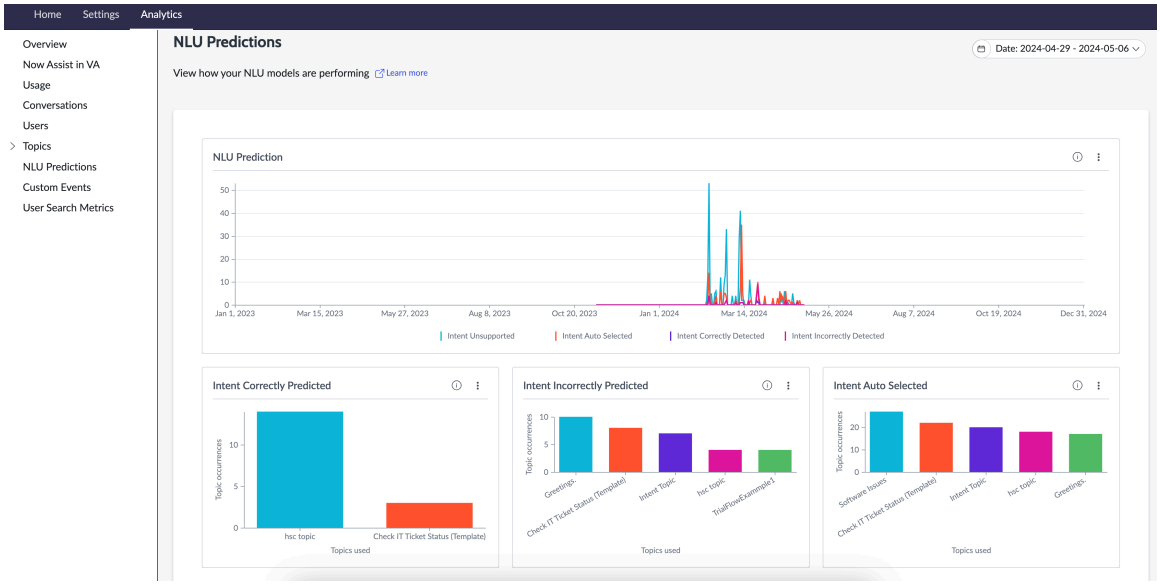
  The presumption is the users gave up after the last node they visited.
- **NLU Prediction**—NLU prediction stats for the selected topic.
- **Topic block breakdown**—Execution count of the selected topic block in different topics. Use this indicator to view which topic block is executed the most across topics.

Natural Language Understanding of Virtual Agent responses

Use the **NLU Prediction** tab to see how well NLU predicts intents, and to improve the intents so NLU makes better predictions.

Virtual Agent (VA) uses the Natural Language Understanding (NLU) service to understand user input. **NLU Prediction** tab on the Conversational Analytics dashboard shows how well NLU is understanding user input in VA conversations. Virtual Agent comes with NLU models, but you can use the Activate the NLU Workbench to modify or create new models.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



To use the NLU Prediction tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

NLU Prediction indicator

The NLU Prediction indicator shows the daily performance of NLU predictions mapped against the user intent.

- **Intent Unsupported**—NLU did not recognize user intent.
- **Intent Auto Selected**—NLU predicted a single intent based and the user selected the same. Sometimes, NLU returns multiple topics, each from a separate intent, and the user selects one.
- **Intent Correctly Predicted**—NLU predicted multiple intents and the user selected one of them.
- **Intent Incorrectly Predicted**—NLU predicted multiple intents and the user indicated that none of them were what they were looking for.

Note:
The vertical axis can have duplicate values because the axis has 10 increments. If the number of intents is less than 10, some values on the vertical axis appear more than once.

The dashboard collects the following data points to arrive at the indicators.

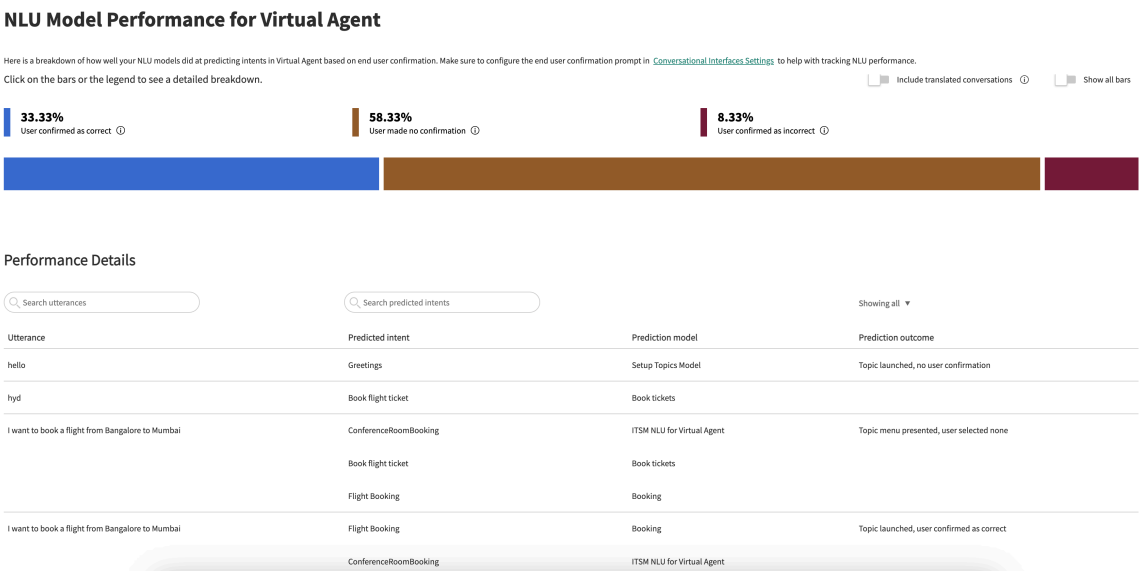
1. Did the NLU prediction model determine an intent?
2. Did the predicted intent match the topic bound in the model to the intent?
3. What's the prediction score and did the dashboard show multiple options to the end user to specify the correct intent, or did the dashboard just display the topic associated with one intent.
4. After showing the user multiple intents, did the user select one?

It's possible for intents to appear in several categories. For example, an intent can appear in the **Intent Correctly Detected** and **Intent Auto Selected** because NLU correctly predicted the intent and only presented a single response, which the user accepted.

Improving NLU predictions

Clicking anywhere on the NLU Prediction indicator opens the Model Performance page. It shows a summary of intents predicted or not predicted over the date range specified on the graph.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



See Activate the NLU Workbench for information on how to use NLU Workbench to improve NLU predictions.

Modify models

Test and modify the Virtual Agent models so they more accurately predict user intents.

Before you begin

Role required: Chat Analytics Admin

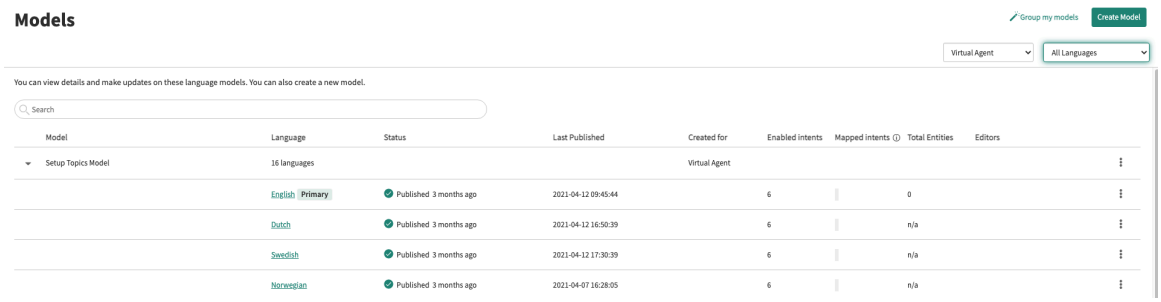
About this task

Many ServiceNow products, such as ITSM, HRSD, and CSM include NLU models for Virtual Agent (VA) topics. The NLU plugin contains entities that are common across all products. You can modify those models. To learn how to train and test the models used for VA conversations, see Natural Language Understanding.

Procedure


1. Navigate to **All** > **Conversational Interfaces** > **Analytics** and select the **NLU Prediction** tab.
2. Select **View more** .

   The Models page opens that displays the models that predict intents in your setup.




3. **Optional:** If none of the models contain intents and utterances you'd like in your setup, select **Create Model** and follow the instructions in Create an NLU model.
4. Click a model to display the intents the model predicts.

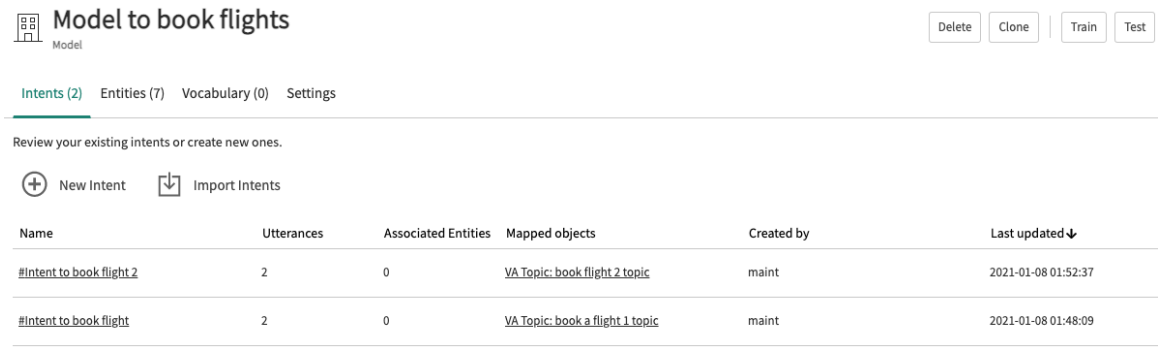© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



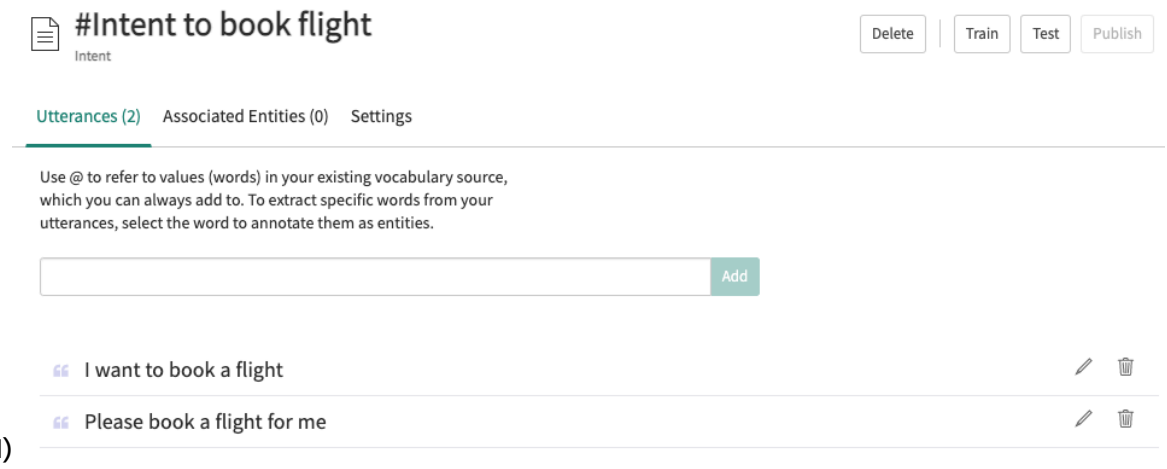5. **Optional:** Click an intent to display the utterances associated with it.




(Optional)

6. **Optional:** To create a new intent and add it to the model:

   a. Select **New Intent**.
   The **Create a new intent** dialog box opens.

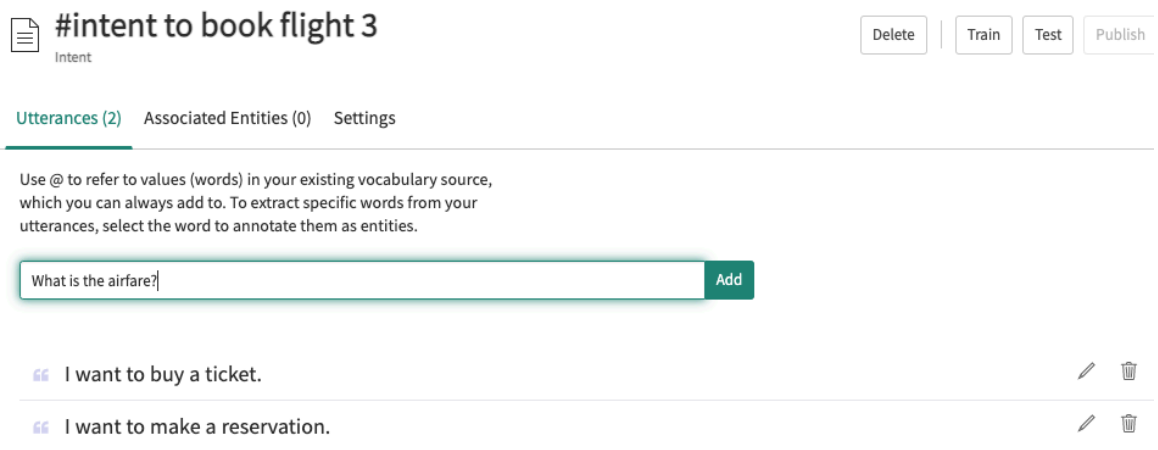   b. Enter the name of the new intent in **Intent Name**, a description of it in the **Description** field, and select **Save**.
   A page for your new intent opens.




(Optional)

   c. Enter an utterance for your new intent and select **Add**.
   You can repeat this step multiple times to add multiple utterances.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

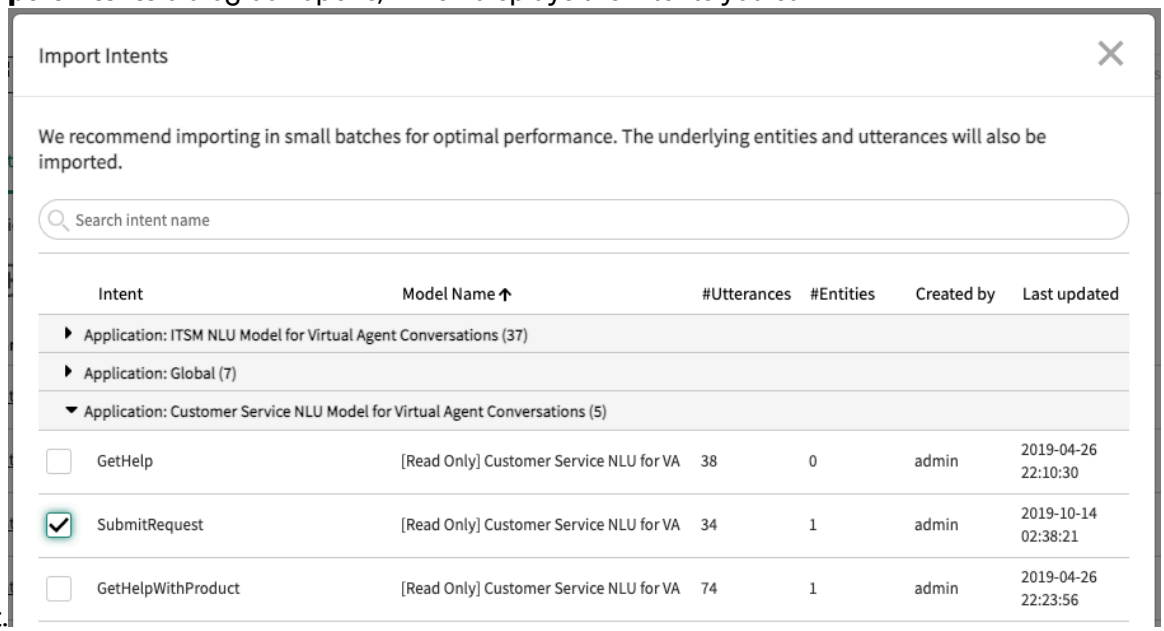7. **Optional:** Import one or more intents by selecting **Import Intents**.
   The **Import Intents** dialog box opens, which displays the intents you can import.



   a. Find the intent(s) to import by entering a search term, or by clicking an arrowhead to display the intents in a folder, and then selecting one or more check boxes.

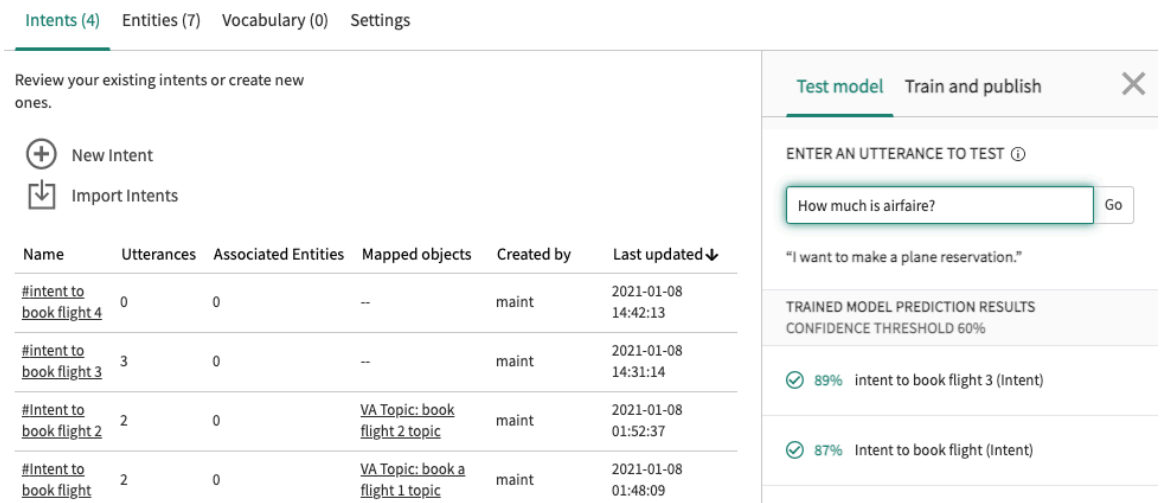
   b. Select **Import**.

8. **Optional:** If you added or imported intents:

   a. Select **Train** to add the intents to the model.

   b. Select **Train** to train the model.
   If successful, a banner at the top reads, **The model has been successfully trained.**

9. To test all the utterances, select **Test** and enter a sentence a user might enter in a chat to see if NLU understands the intent of your sentence.



10. If the models fail to predict the intent, add additional intents to the model, or utterances to the intents, as described in step 6.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Using user search metrics with Virtual Agent

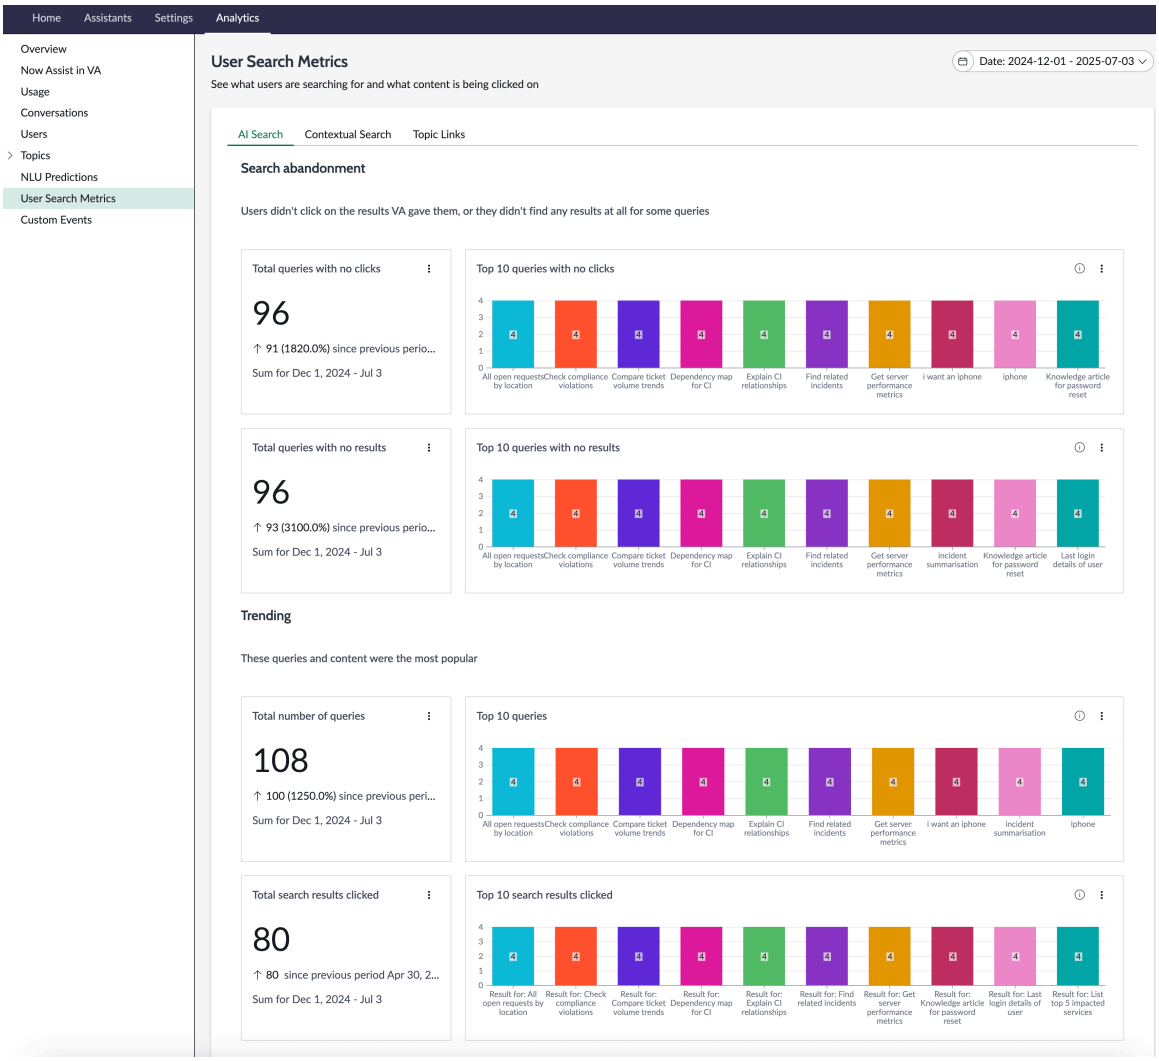
By using user search metrics with the Virtual Agent application, you can see your users' queries and the results from their searches. With these metrics, you can identify the areas where you can improve Virtual Agent to offer more meaningful search results.

Use the **User Search Metrics** tab in the Conversational Analytics dashboard to view key indicators about the queries that users searched on and the corresponding search results. By using this tab, you can get the answers to the following questions:

- Which search results were not useful to the users?
- Which queries did not have any search results?
- Which were the most common queries from users?
- Which search results did the users select most often?

To access the **User Search Metrics** tab, you must have the chat analytics admin role or the chat analytics viewer role. The following example shows the data included in the **User Search Metrics** tab.

User Search Metrics tab



AI Search

Virtual Agent topics may use AI search to suggest helpful resources to the user. When a user enters a query, AI search provides the most relevant results by using intelligent query features.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To know more about AI search, see AI Search . To integrate Virtual Agent with AI Search, see Improving the user experience with AI Search.

Contextual Search

Contextual search matches keywords to an existing database search to find potential matches to a query. Virtual Agent topics may use contextual search to resolve queries. For more information, see Maximizing code reuse with topic blocks.

Topic Links

Some Virtual Agent topics have links to useful resources that are embedded within them. When a user invokes one of these topics, the link shows up without having to do any back-end search.

User Search information

The following table describes user search indicators visualized on the **User Search Metrics** tab.

User search indicators

Visualization	Description
Total number of queries with no clicks	Number of queries that users did not click on any of the search results provided.
Top 10 queries with no clicks	Most commonly asked queries where users did not click on any of the search results provided.
Total number of queries with no results	Number of queries that did not yield any search result.
Top 10 queries with no results	Most commonly asked queries that did not yield any search results.
Total number of queries	Total number of queries handled by Virtual Agent.
Top 10 queries	Most commonly asked queries.
Total number of search results clicked	Number of search results that users clicked on.
Top 10 search results clicked	Search results that users clicked on the most.

Custom Events tab

Use the Custom Events tab to view the list of custom events created for Virtual Agent.

To use the Custom Events tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



The Custom Events tab shows the dates when custom events were triggered. If no one created custom events, the list of custom events is empty. The maximum number of custom events displayed is 20.

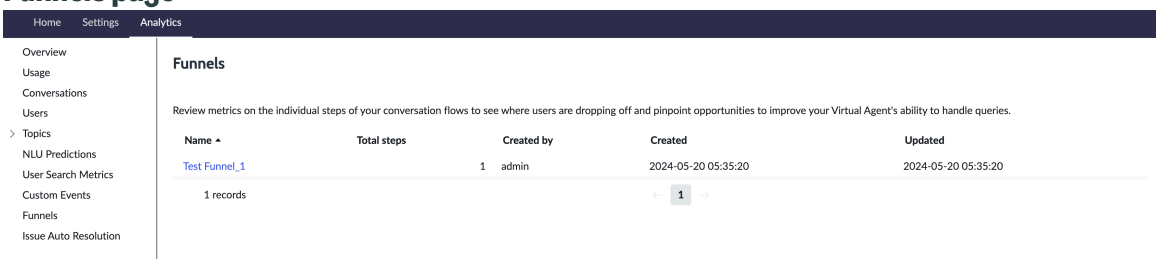
Use the drop-down list to specify the custom event you want view analytics for.

Funnels tab

Funnels provide cumulative filtering of conversation flows. Using funnels, you can identify whether your conversation flows are performing effectively when users chat with Virtual Agent.

Note:
Funnels is accessible only to users who have funnels created prior to upgrading to the new dashboard. Users with funnels created in the legacy dashboard can view the analytics related to funnels and edit the funnels in the new dashboard, however, creation of funnels is no longer supported.

Funnels page



Funnels demo Watch this video for an overview of Funnels.

Overview of funnels

Funnels filter conversation flows using steps that are defined when a user creates the funnel.

A funnel can contain up to 10 filtering steps for a conversation flow. Each subsequent step further refines the results from the previous step. This type of cumulative filtering helps you to easily narrow down on the data of interest at each step of the conversation flow.

When you run a funnel for a particular date range, the system displays the following metrics that show the number of users at each step:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- The percentage and number of users who have used the specified conversation flow.
- The percentage and number of users who proceeded to the next conversation step specified in the funnel.
- The percentage of users who dropped off at a particular conversation step.
- The percentage and number of users who completed all specified conversation steps in the flow.
- The biggest drop-off point or step where users left the conversation flow.

Each step in a funnel consists of the following:

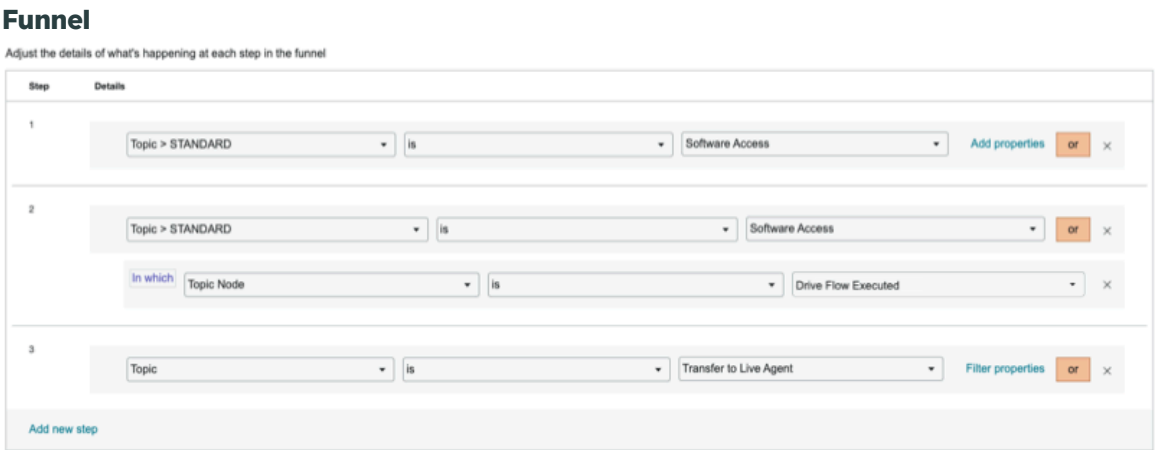
- Field: The item on which the step is evaluated.
- Operator: A list of operators that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

Use case for funnels

Consider an example scenario where an admin has to get insights about how Virtual Agent is handling user queries in a conversation flow. To review the efficiency of the conversation flow, the admin might look for information such as the following:

- What percentage or number of users have interacted with Virtual Agent.
- Out of the users who interacted with Virtual Agent, what percentage or number of users have followed a specific node in the topic during the conversation.
- Out of the users who used the specific node, what number of users requested for a transfer to a live agent.

For example, see the following funnel for fetching metrics on a conversational flow that provides software access.



Here, the funnel has three filtering steps:

- Step 1 fetches users who have followed the **Software Access** topic while interacting with the Virtual Agent.
- Out of the retrieved users from step 1, step 2 fetches users who requested for a drive access in the **Drive Flow Executed** node.
- Out of the retrieved users from step 2, step 3 fetches users who requested transferring to a live agent.

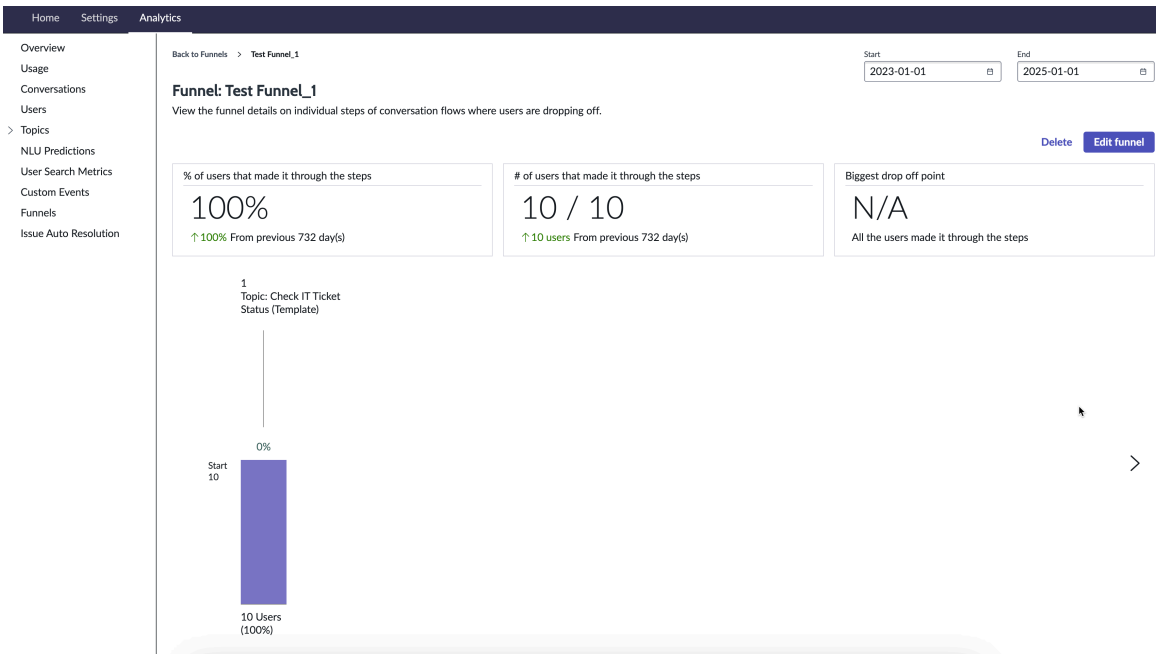
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Metrics for funnels

Using Funnels, you can easily filter conversation flows and get information as metrics. Metrics indicate what percentage or number of users are active at each step of the conversation flow.

You can improve the conversation flows based on the performance metrics derived from using funnels. The metrics help identify opportunities for improving conversation flows so that Virtual Agent can handle your user queries better.

Metrics for funnels



Other benefits of using funnels

You can compare the performance of previous and current conversation flows. Funnels show metrics for the specified date range. Additionally, it shows the comparison for the same number of days in the date range prior to the specified start date. You can know the increase or decrease in users who have made through all the steps.

Previous metrics



Issue auto-resolution tab

The **Issue auto-resolution** tab helps you understand how well your Virtual Agent (VA) chatbot anticipates user needs. It displays information about the number of user issues intercepted by the auto-resolution service and resolved by VA.

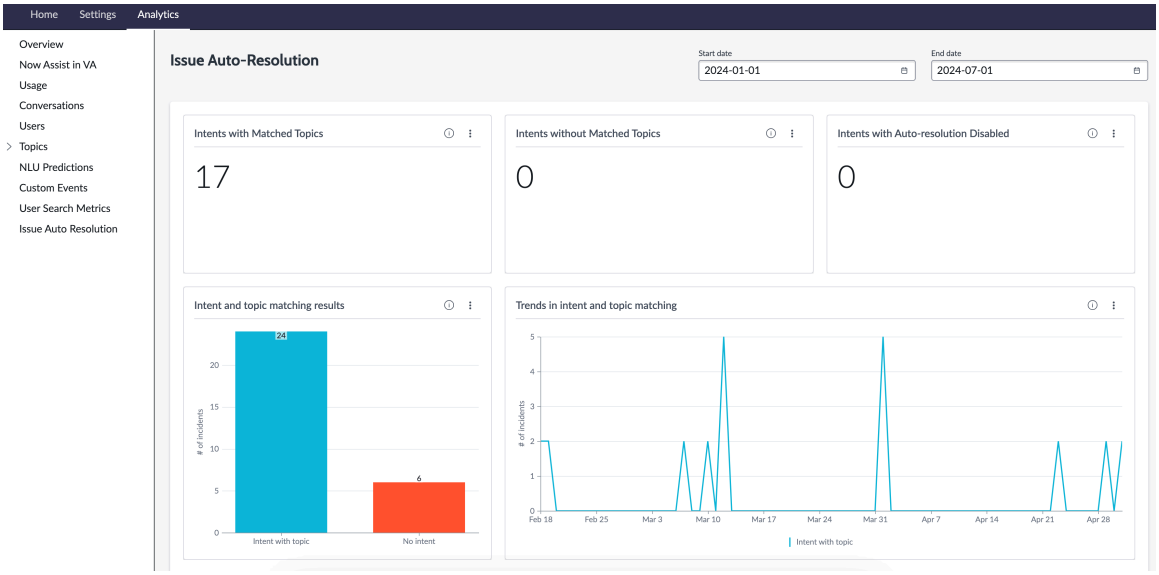
Issue auto-resolution takes place when a user is diverted to VA from a non-conversational interface. For example, a user might request a new keyboard through a service portal or email. The auto-resolution service can detect the user request and use VA to resolve the user's request in a VA chatbot session. For more information, see Auto Resolution for Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The indicators in the **Issue auto-resolution** tab display how well the auto-resolution service is working. This tab is available only when Issue Auto Resolution is enabled and the **Auto Resolution Configuration** record is set as active.

To access the **Issue auto-resolution** tab, you must have the chat analytics admin role or the chat analytics viewer role.

Issue auto-resolution tab



Selecting the data or pointing to the data in the visualizations displays additional information about the data.

Auto-resolution visualizations

Visualization	Description
Intents with Matched Topics	Number of intents that match topics enabled for auto-resolution. Select the indicator to view the list of intents that match topics enabled for auto-resolution.
Intents without Matched Topics	Number of intents that don't have matching topics. Select the indicator to view the list of intents that don't match topics enabled for auto-resolution.
Intents with Auto-resolution Disabled	Number of intents that match topics not enabled for issue auto-resolution. Select the indicator to view the list of intents that match topics not enabled for auto-resolution.
Intent and topic matching results	Breakdown of incidents by intent matching. For example, incidents with matching intents and topics, and incidents without matching intents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Auto-resolution visualizations (continued)

Visualization	Description
	Select the indicator to view the list of incidents with or without matched topics.
Trends in intent and topic matching	Trend showing incidents that have intents with or without matching topics. Select the indicator to view the incidents that have intents with or without matching topics.
Auto resolution conversations	Issue auto-resolution conversations that were resolved or unresolved. Resolved means incidents are in the resolved state after the users interacted with VA. Select the indicator to view the list of conversations that were resolved or unresolved.
Auto resolution conversation trends	Usage trend showing all the issue auto-resolution conversations and how many incidents were successfully resolved.
Issue auto-resolution acceptance rate	Shows the issue auto-resolution notifications that were accepted and declined by users.
Top topics in auto resolution conversations	Frequently used topics in auto resolution conversations. Select the indicator to view the list of topics that are frequently used in auto-resolution conversations.

Conversational Analytics dashboard reference

Reference topics provide descriptions about the Conversational Analytics dashboard roles and system parameters to configure the dashboard.

Conversational Analytics dashboard roles

Conversational Analytics dashboard is installed with these roles.

To learn more about managing subscriptions, see Managing per-user subscriptions in Subscription Management and contact your account representative.

Virtual Agent administrator [virtual_agent_admin]

Provides read and write access to all dashboard-related tables, for example, sys-conversation.

Contains Roles

List of roles contained within the role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- chat_analytics_admin
- ui_builder_admin
- chat_analytics_viewer

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Chat analytics administrator [chat_analytics_admin]

Provides access to view dashboard-related tables, create custom events, create custom formula overrides, reconfigure the dashboard using UI Builder, and set system parameters.

Contains Roles

List of roles contained within the role: chat_analytics_viewer.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

UI builder administrator [ui_builder_admin]

Enables you to add, remove, and rearrange dashboard contents. Needs UI Builder, which is a separate ServiceNow product.

Contains Roles

List of roles contained within the role.

- workspace_admin
- canvas_user

Groups

List of groups this role is assigned to by default.

None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Chat analytics viewer [chat_analytics_viewer]

Provides read access to view the dashboard, Conversations (sys_cs_conversation), and Conversation Consumers (sys_cs_consumer) tables.

Contains Roles

List of roles contained within the role: sn_ace.ace_user.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

System property configuration

Use system properties to configure the functionality of the Conversational Analytics dashboard.

Use the following system properties to configure the functionality of the Conversational Analytics dashboard. You must have the Chat Analytics Admin [chat_analytics_admin] role.

Conversational Analytics dashboard system properties

Functionality	System property	Description
Debug	sn_ci_analytics.logging.verbosity	Set this property to "debug" to see the debug logs for conversational analytics. The setting makes the logs verbose with debug information.
Reasons	sn_ci_analytics.ca.reason_max	Sets the maximum length of reason strings. The default is 1000 characters.
Hash	sn_ci_analytics.show_hashed_user_id	1. Set this property to true to display hashed user Ids on the Conversations and Users pages in the dashboard. The default is false. 2. Provide read access to Hashed User ID column in the Users (sys_user) table.
Max search breakdown	sn_ci_analytics.max.search.breakdown	Sets the maximum breakdown elements for search. Default value is 10000. The value of this property should not exceed 10000. Use this property in conjunction with the properties in Performance Analytics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational Analytics dashboard system properties (continued)

Functionality	System property	Description
		Note: If the data on User Search Metrics page does not load due to an invalid configuration error, set the value of com.snc.pa.scorecards.max_breakdown_elements property to 10000. The default value of this property is 1000. If the number of search terms exceeds the limit specified in the com.snc.pa.dc.max_breakdown_elements_limit property, the data is not collected. Be sure to set the value of com.snc.pa.dc.max_breakdown_elements_limit or com.snc.pa.dc.hsql.max_breakdown_elements_limit property to be greater than or equal to sn_ci_analytics.max.search.threshold. The default value of these properties is 10000. See Breakdown and indicator Performance Analytics properties and Data collector Performance Analytics properties for more information.
Max event breakdown	sn_ci_analytics.max.event_breakdown	Sets the maximum breakdown elements for custom events. Default value is 100. Maximum can be 10000. Use this property in conjunction with the following properties in Performance Analytics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversational Analytics dashboard system properties (continued)

Functionality	System property	Description
		Note: If the data on User Search Metrics page does not load due to an invalid configuration error, set the value of com.snc.pa.scorecards.max_breakdown_elements property to 10000. The default value of this property is 1000. If the number of custom events exceeds the limit specified in the com.snc.pa.dc.max_breakdown_elements_limit property, the data is not collected. Be sure to set the value of com.snc.pa.dc.max_breakdown_elements_limit or com.snc.pa.dc.hsql.max_breakdown_elements_limit property to be greater than or equal to sn_ci_analytics.max.search.threshold. The default value of these properties is 10000. See Breakdown and indicator Performance Analytics properties and Data collector Performance Analytics properties for more information.

Legacy - Conversational Analytics Dashboard

The Conversational Analytics dashboard helps you improve Virtual Agent (VA) interactions with users by providing deep insights into conversational data. The dashboard helps you refine topics and increase the percentage of issues resolved by VA.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Get started

Select a tile to get started with the VA Analytics Dashboard.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Explore	Set up
 For VA users and system administrators to learn about the dashboard.	 For system administrators setting up the dashboard.
Use	Reference
 For VA users to learn how to use the dashboard.	 Get information about the dashboard roles and system parameters

Legacy - Exploring the Conversational Analytics Dashboard

Use Conversational Analytics dashboard to improve Virtual Agent (VA) interactions with users. The dashboard provides deep insights into conversational data, and helps you refine topics and increase the percentage of issues resolved by VA.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

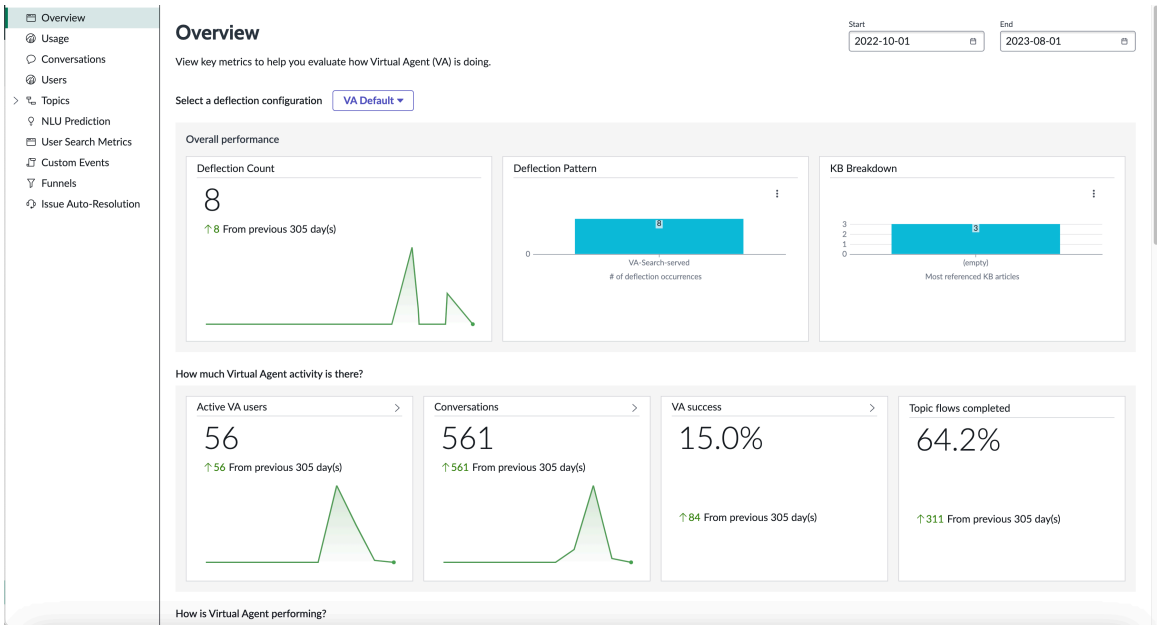
Virtual Agent Analytics

Virtual Agent keeps records of interactions with users for up to 90 days. The metrics extracted from the conversations are retained for a period of two years. The Conversational Analytics dashboard provides insights into those interactions so you can see how well Virtual Agent understood and resolved user issues. Dashboard metrics, for example, reveal:

- What percentage of users transfer from VA to a live agent
- How to increase engagement rate and reduce user drop-offs
- Whether the user reached the last node in a topic
- Most and least-used topics

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Conversation details using advanced filters
- How to optimize conversation design




Key Features

Worst performing topics

See the worst-performing VA topics over a given time period.

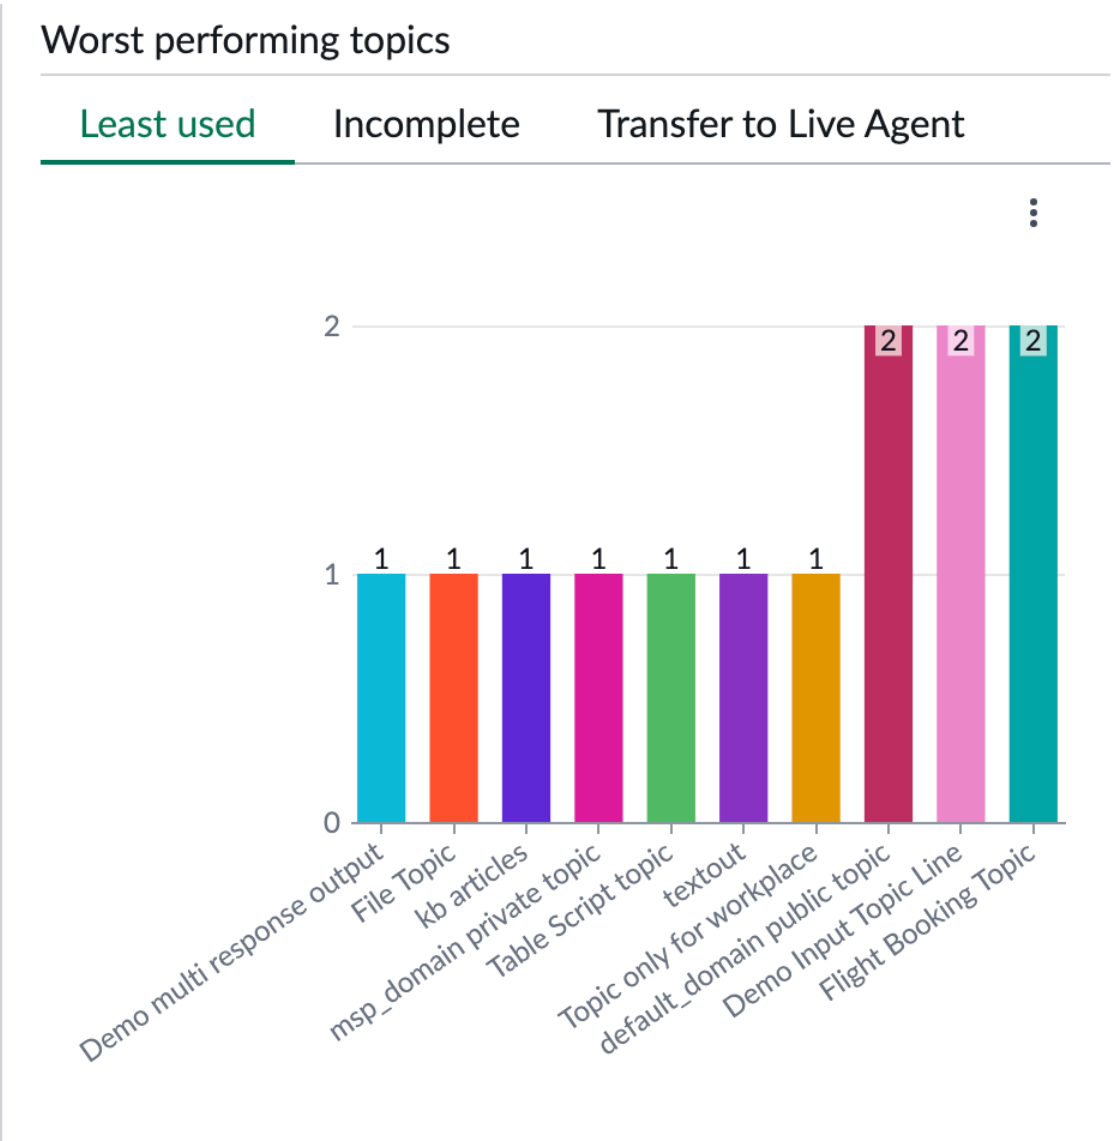
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Conversation details


Discover metadata about each VA interaction, including the user, the chat duration, and which node a user stopped at in a topic.

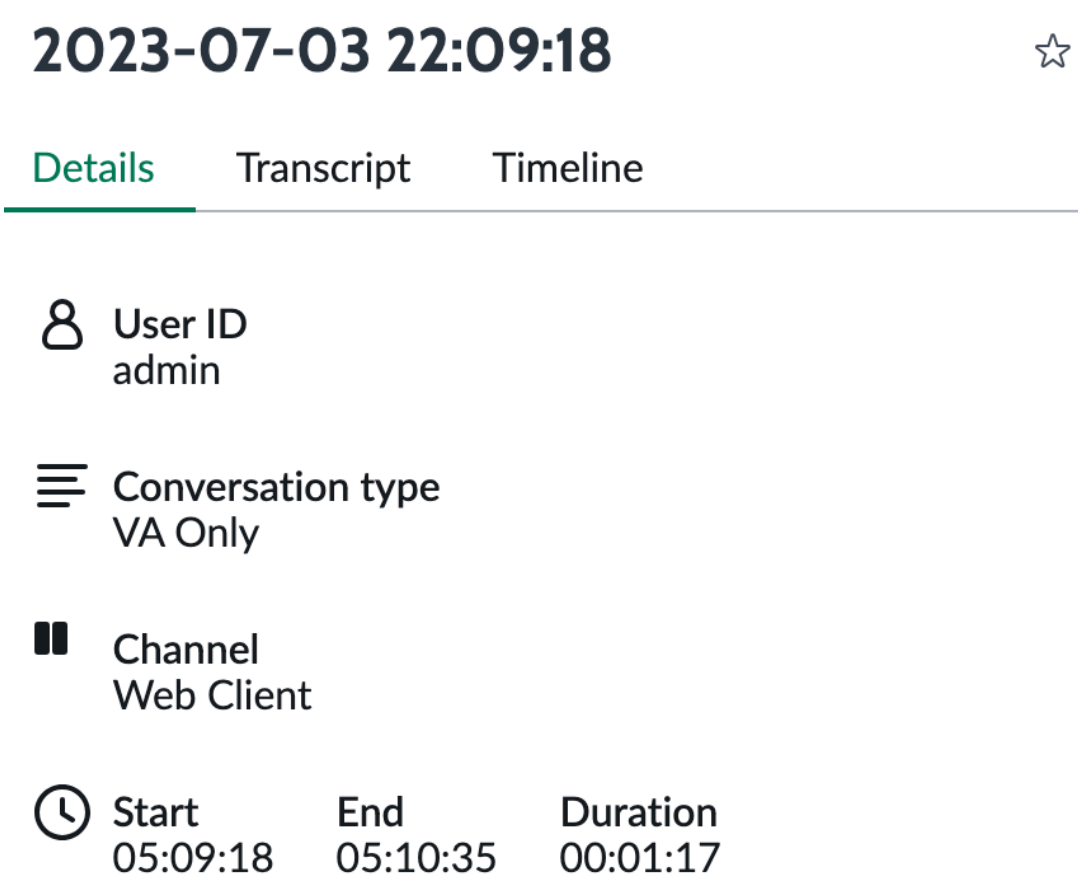© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



User insights

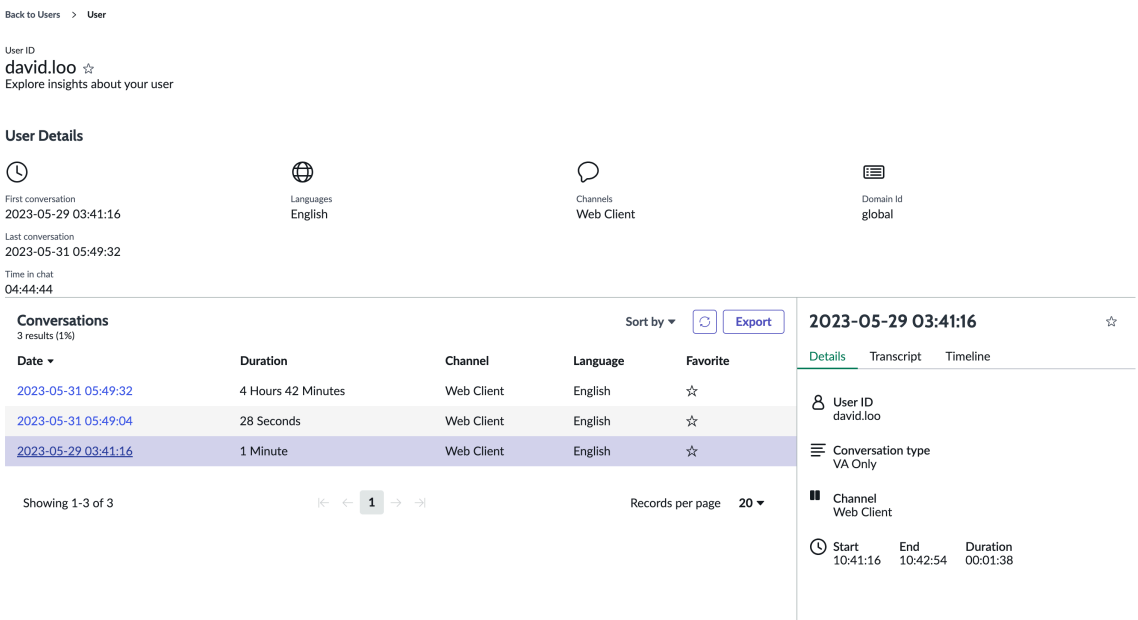Get a history of a user's chats.




Overview of using dashboard sections

The following sections provide a high-level overview of how to use each section of the dashboard from the top down.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Date range of data displayed

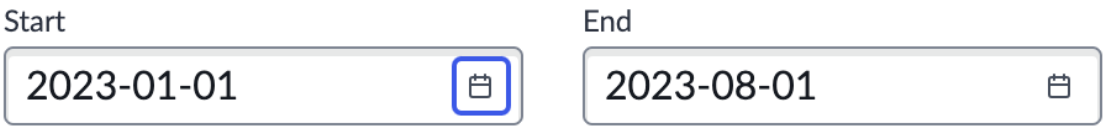The **Start** and **End** dates at the top of the dashboard specify the data range of the data summarized on each page.



All data is continually pushed from Virtual Agent to the dashboard in real time, and retained for up to 3 months. The analytics dashboard can also accept conversation data up to 30 days old, to support scenarios involving temporary technical issues.

All dates and times on the dashboard are UTC. Even though the conversation table lists conversation dates and times in different time zones, Virtual Agent (VA) converts them to UTC when displaying them on the dashboard. Additionally, if you select a preset date range, such as last week, the dates might be slightly different from what you expect.

For information about setting the date range, see Set the date range of the data.

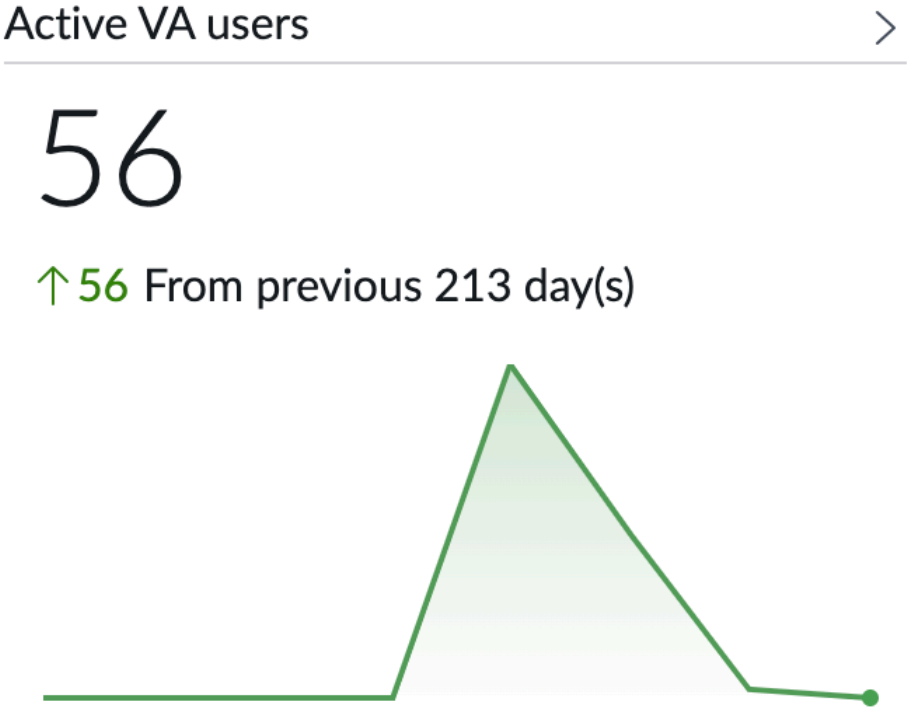
Certain data visualizations might not have data available for the start date and end date selected in the **Start** and **End** fields. In this case, the widget shows a start date and end date for the visualization based on the data availability within the selected date range.

Getting detailed data

The **Overview** tab provides summaries of the data displayed on the other tabs. You can get to more detailed data in several ways:


- Select a tab, for example, **Usage**.
- Select the arrowhead in one of the cards.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

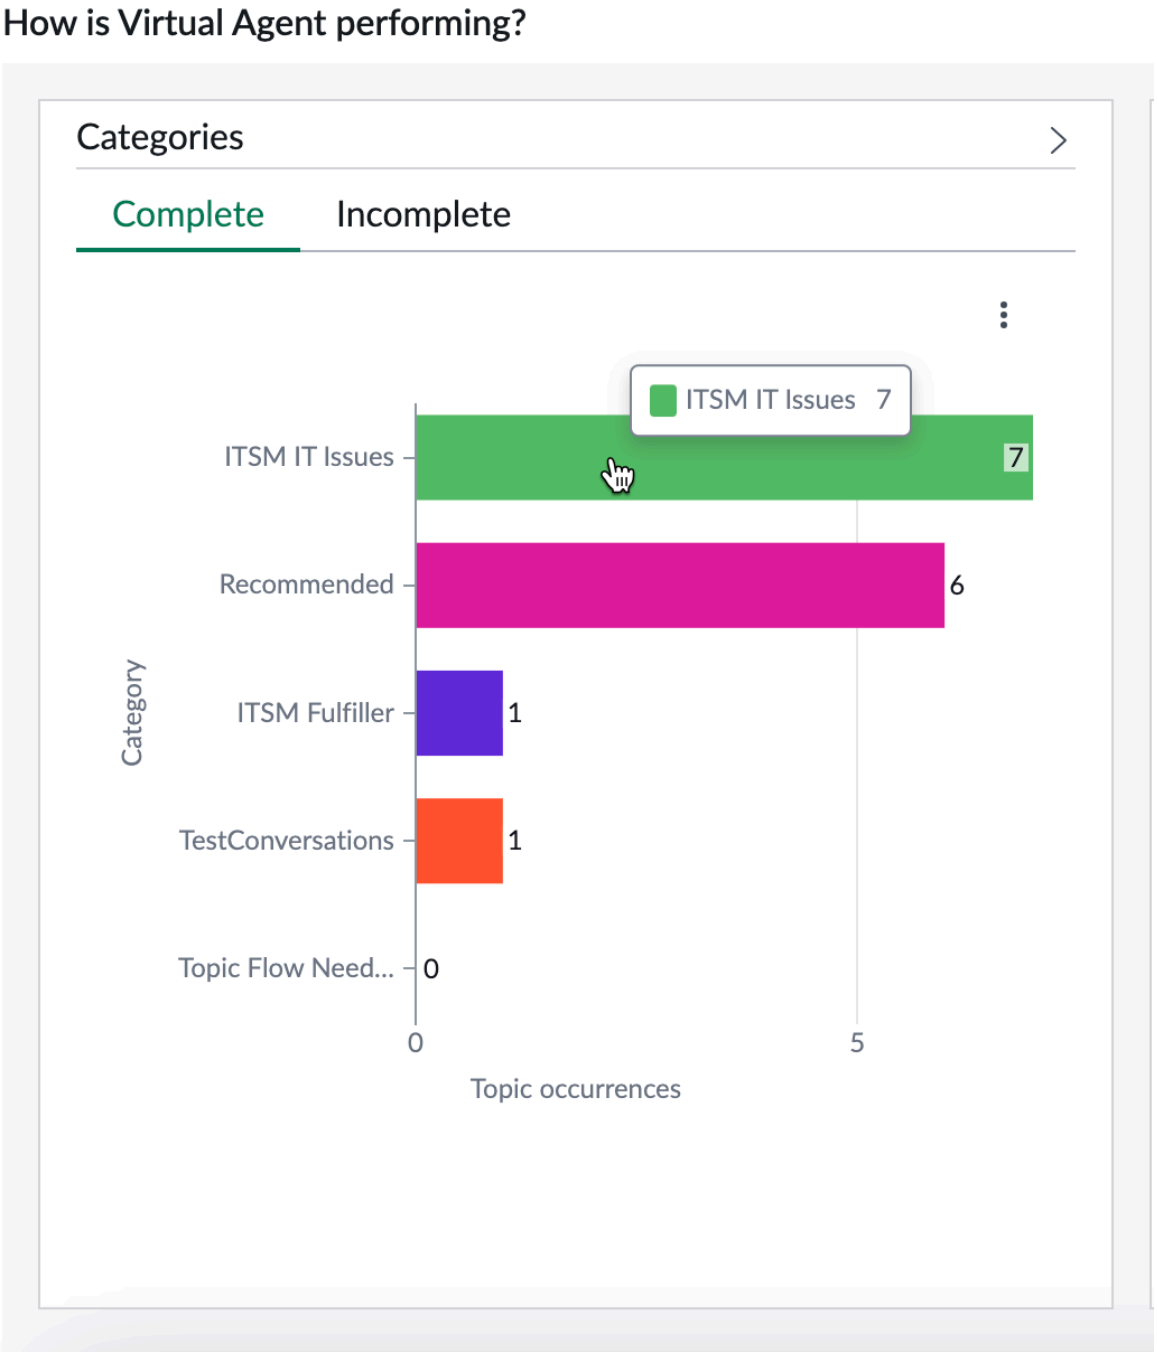- Select a visualization.



Dashboard tabs

Dashboard tabs

Tab	Description
Overview	Landing page for the dashboard that shows summary information for all the other tabs.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Dashboard tabs (continued)

Tab	Description
Usage	Describes VA conversation usage, for example, the language of the conversations, their durations, and the types of conversations.
Conversations	Summary information for a user's conversations. Advanced filtering enables you to filter by conversation nodes or topics, and get details about the conversation duration, the channel the conversation occurred in, and the number of messages exchanged. You can link to details about each conversation on this tab.
Users	Lists the users who have had VA conversations. Advanced filtering provides analytics about usage frequency, by conversation, the duration of the conversation for each user, the user's first and last conversation, and the language used. You can link to user details from this tab, including their conversations.
Topics	Shows metrics about topics used by VA in conversations. Metrics include how many VA conversations moved to a live agent, average length of conversations per topic, and topic blocks used.
NLU Prediction	Shows the number of times the NLU prediction model accurately understood the intent of the user's conversation or auto-selected a topic. The chart links to the NLU Workbench if your instance includes NLU.
Custom Events	Displays the number of custom chat events that you create using the Events page. If you don't create custom events, the tab content is empty.
Funnels	Provides metrics for conversation flows.
Issue Auto-Resolution	Displays information about the number of user issues intercepted by the auto-resolution service and resolved by the Virtual Agent.

Trends and scores

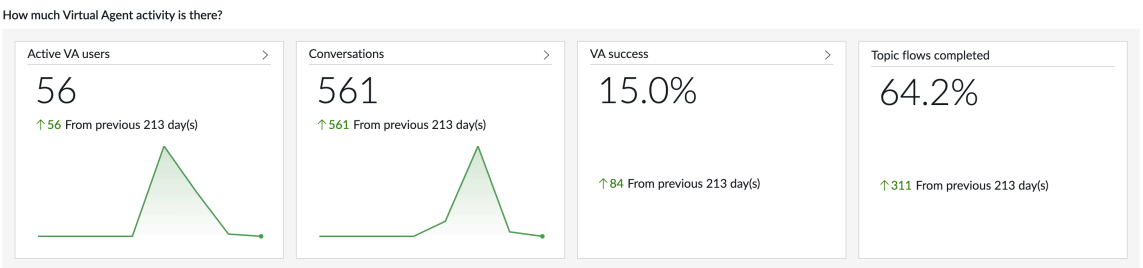Many tabs use scorecards that show the current value for a data point, for example, the number of conversations currently online.




Scorecards also show data trends, such as the increase or decrease of the data values over the date range specified on the dashboard. Hovering over the title of a scorecard displays a description of the scorecard.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Certain trend visualizations on the dashboard such as the trends in intent and topic matching do not support viewing monthly, weekly, and daily data.


Visualizing data

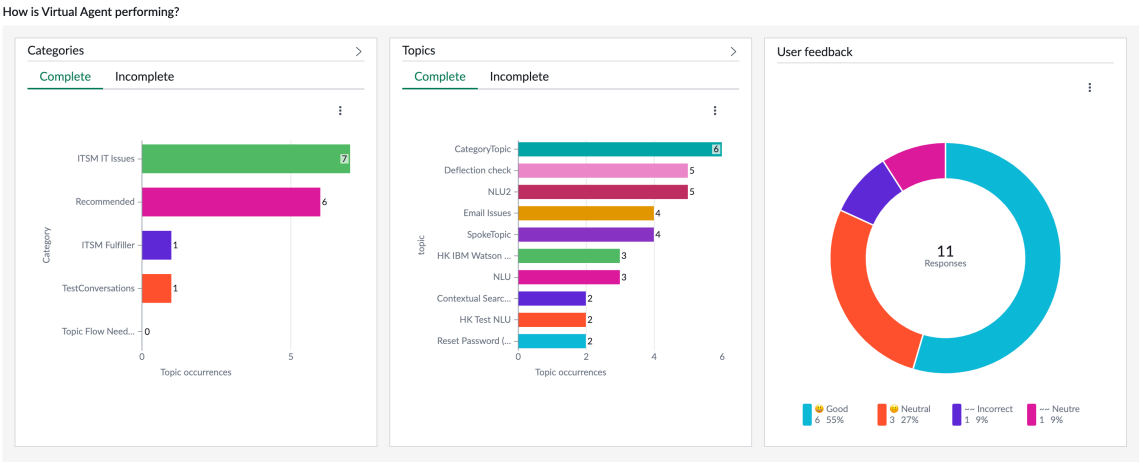Many tabs show visualizations of the recorded VA data.



The cards have a common setup.

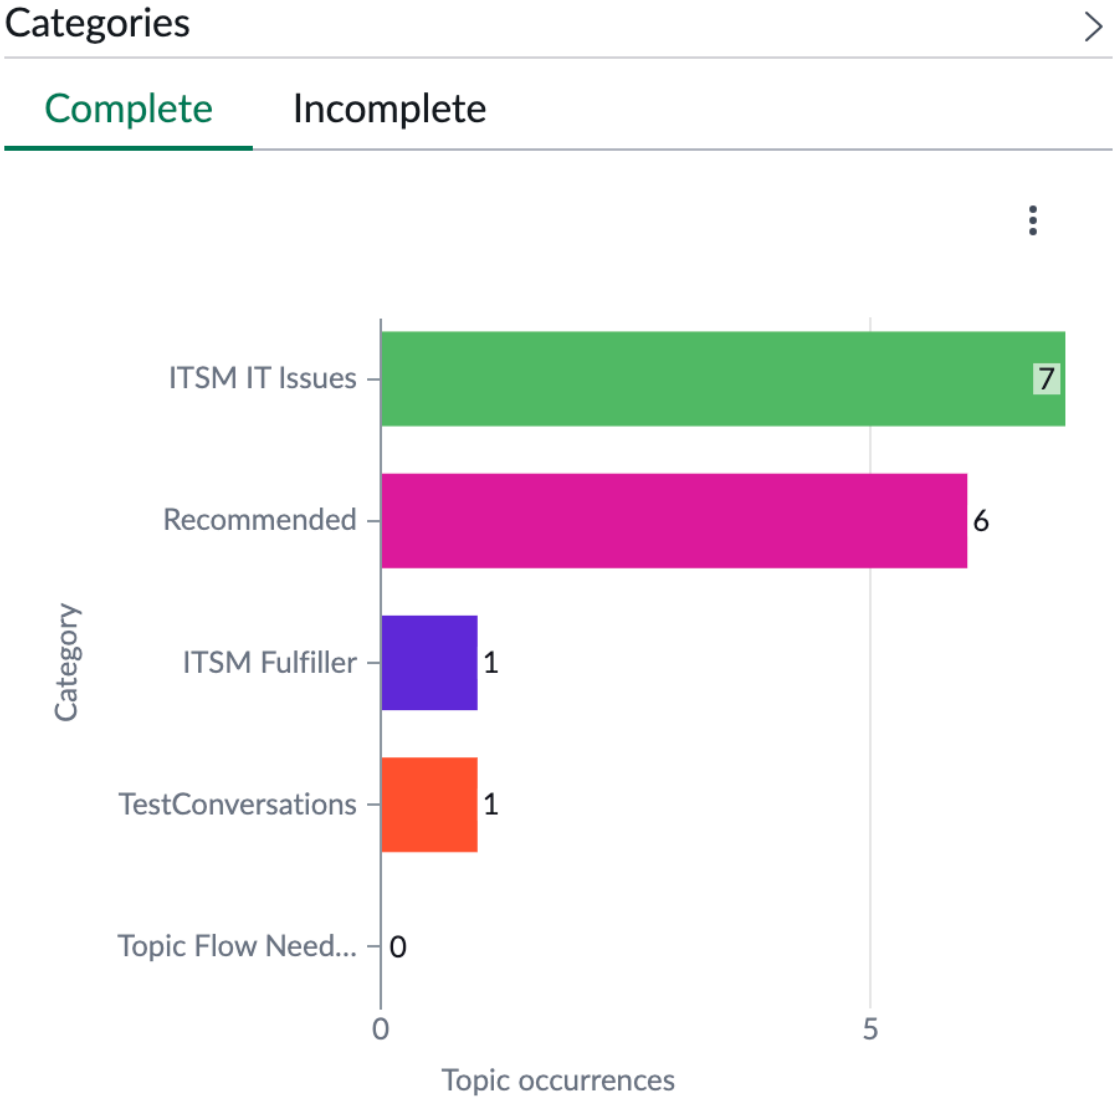© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




In each visualization, you can select:

- Subtabs to visualize different datasets in the visualization.
- Arrowhead icon ›, which takes you to the corresponding tab that provides more detailed information.

  For example, select the arrowhead in the **Active Users** scorecard to go to the **Users** tab, which shows a list of users currently using VA chat.

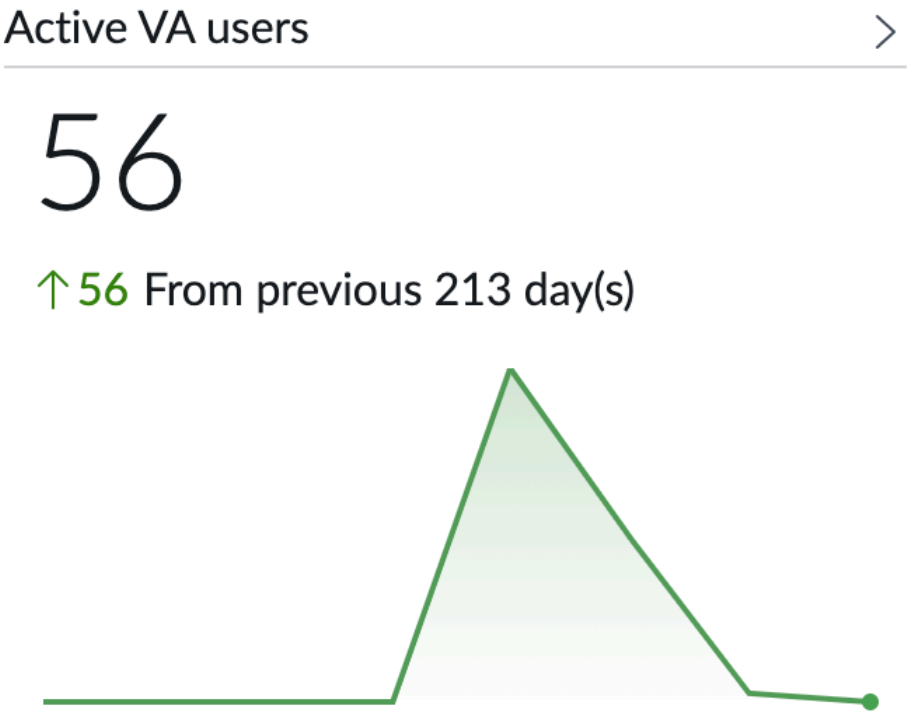© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



- Select displayed data, such as a bar in a bar chart, to display detailed information about that data.

Tutorial

Now that you are familiar with the user interface, you can try the tutorial. It shows how the parts of the dashboard work together to provide insights for improving VA.

Trying out the dashboard

Use this tutorial to get familiar with the Conversational Analytics Dashboard.

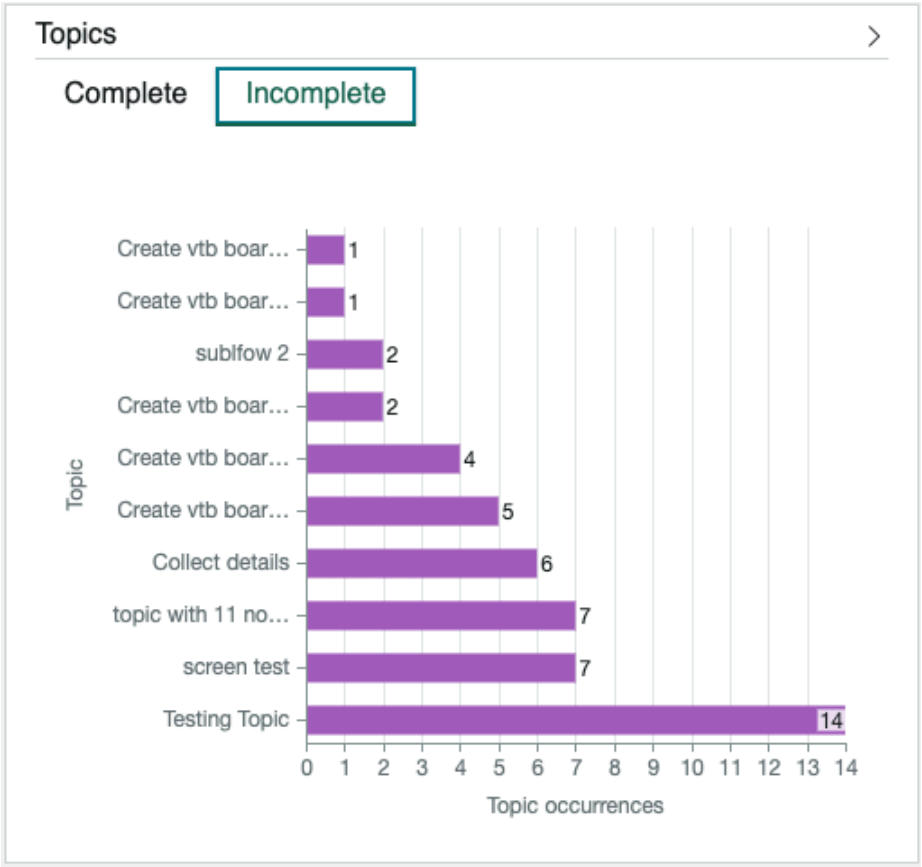
Before you begin
Role required: Chat Analytics Viewer (chat_analytics_viewer)

Note:
This tutorial is intended for use in your own instance. Test instances can be used but may not provide meaningful feedback unless they contain pre-loaded data.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Conversational Analytics** > **Virtual Agent Dashboard**.
   The **Overview** tab on the dashboard appears. The **Topic flows completed** scorecard shows that the number of users completing all the nodes in a topic has decreased. I'd like to know why.
2. In the **Topics** visualization, click **Incomplete**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




I see that users did not complete the **Testing Topic** the most times, 14. So, I want to find out where the user got lost.

3. Click the **Testing Topic** bar to drill down on that topic.

   The Topic details page opens. In the **Total completion** scorecard, the example shows that Virtual Agent (VA) resolved 15 conversations but couldn't resolve 5 conversations. The **Live Agent Transfer** scorecard shows that no one transferred to a live agent. The **Last visited node** scorecard shows the three nodes in the topic where the user abandoned the conversation: **Start**, **Testing**, and **link to requested screen**. Review those nodes to clarify the communication or add a different intent.

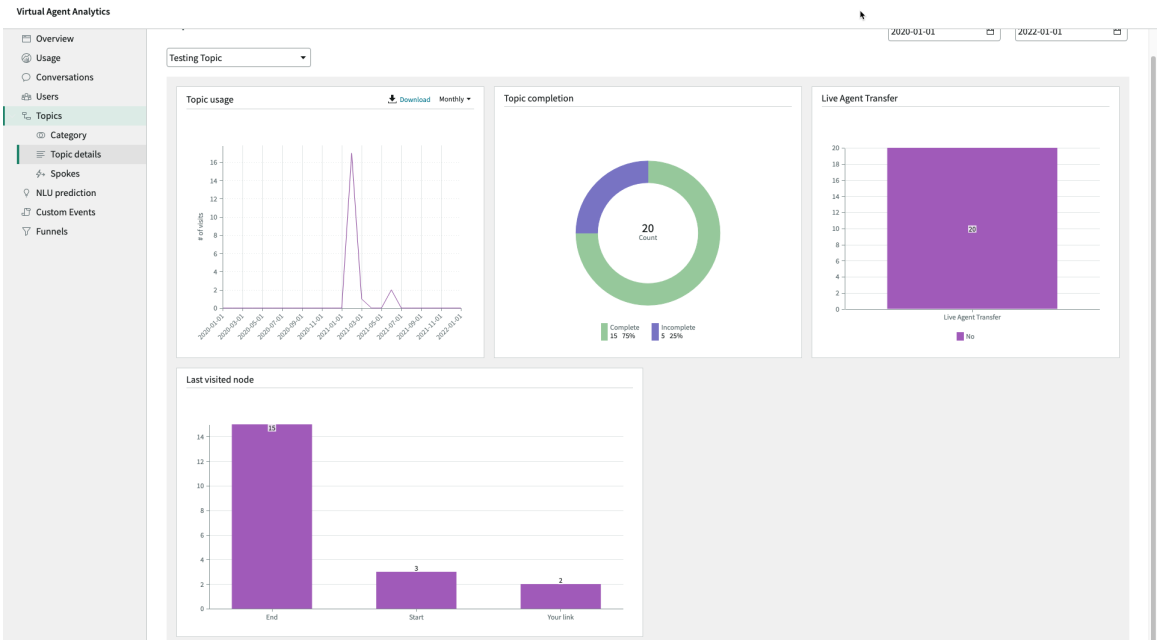
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



No conversations in this topic transferred from VA to a live agent. But I wonder if there are topics where users did transfer.

4. Click the **Conversations** tab.
   The **Conversations** tab displays all the conversations within the specified date range. I decide to use filters to see only the conversations that VA transferred to a live agent.
5. Select **Live Agent Transfer**.

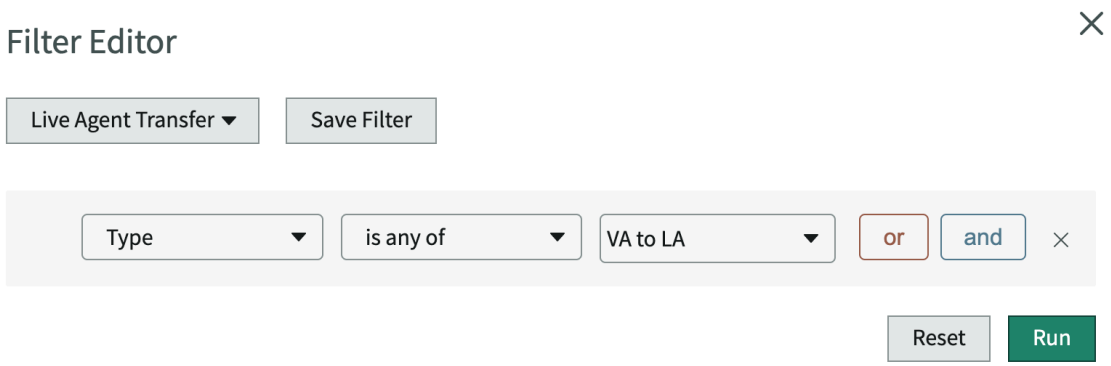   I notice that the condition builder automatically entered the filter parameters, setting **Type** to **VA to LA**.



   I'd like to know which topic node the user last visited before transferring to a live agent.

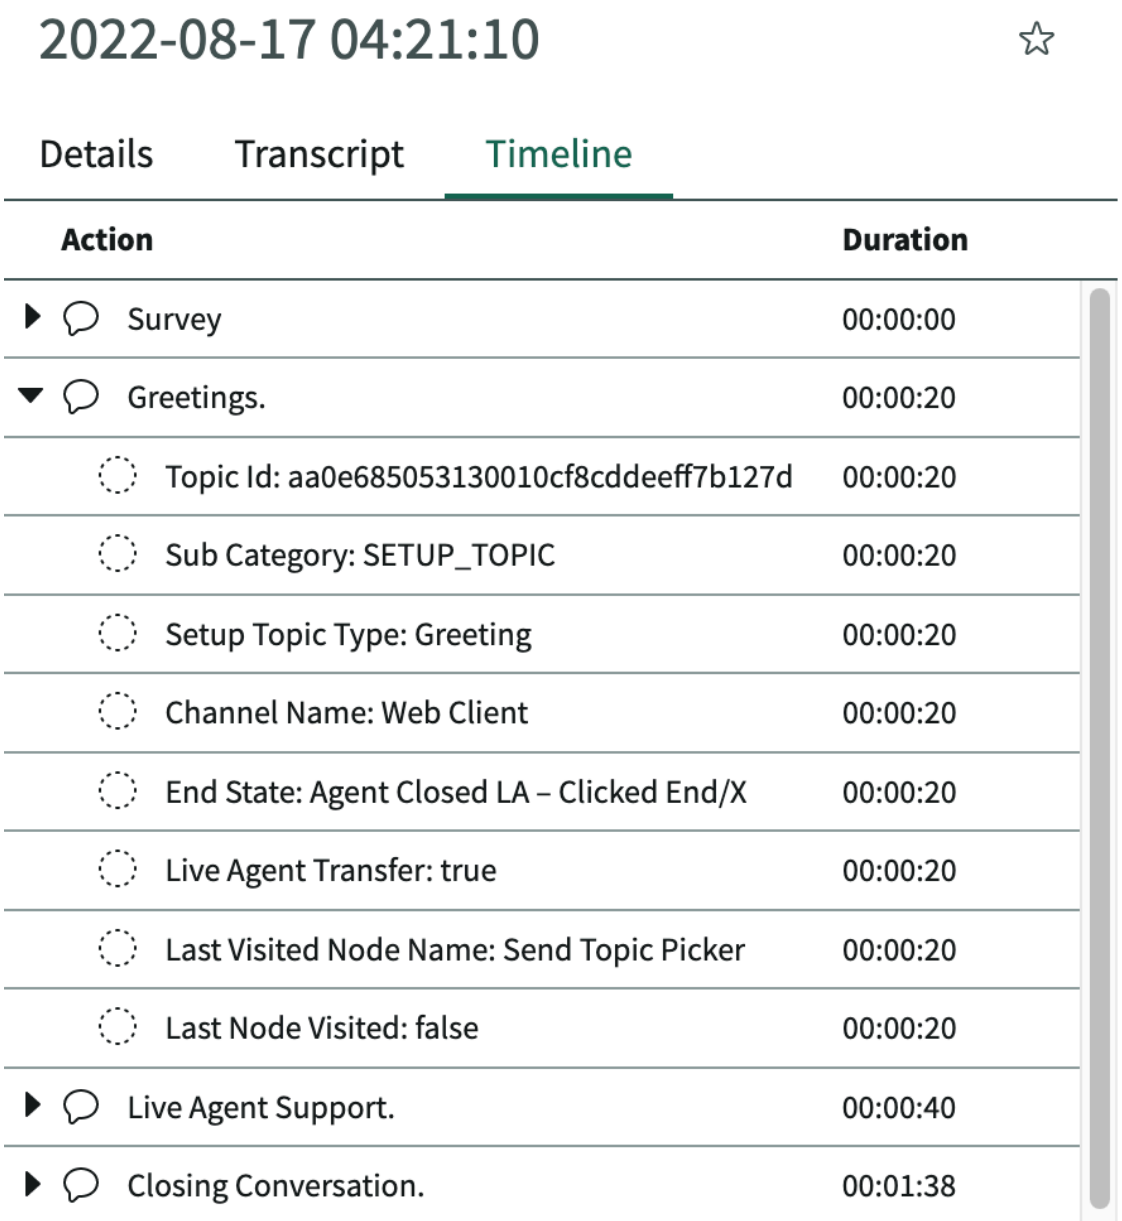
6. Click a conversation date.

   The conversation details appear.

7. Expand the **Greetings** action in the **Timeline** tab.

   I see that the last node the user visited was **Send Topic Picker**. Now, I know I should revise that node in that topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



I decide to see which topics are working better.

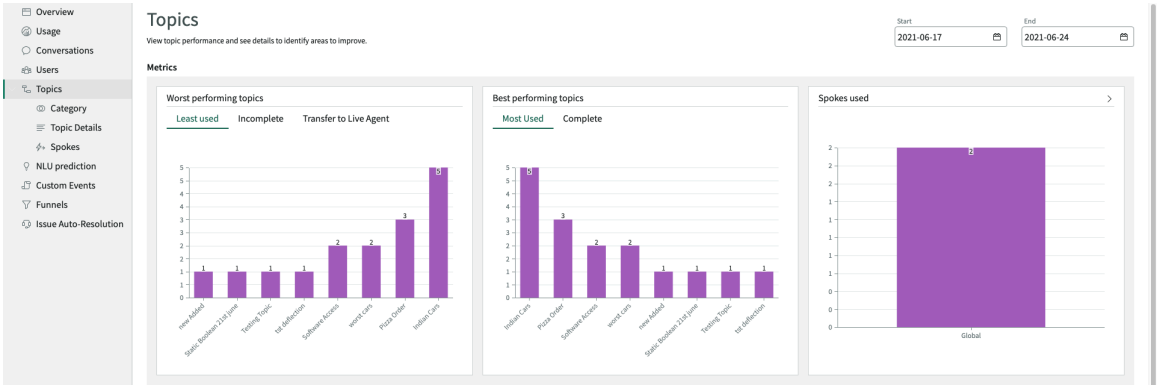
8. Select the **VA Success** filter.
   The list contains conversations that VA was able to resolve. Perhaps I want to find out if the problem resolution took too long.
9. To add a condition, click **View/edit filter** and use the condition builder in the Filter Editor pop-up window. You can either select a default filter from the list or create a new filter condition.
10. Select **Duration** for the condition, the greater-than sign for the operator, enter 180 for the number of seconds, and click **Run**.
    The list shows VA conversations that lasted over three minutes. It's a small percentage of all the conversations. So, I conclude the topic is working well.

    Finally, I want to know which topics are most and least used so I know what topics to prioritize.

11. Click the **Topics** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The Topics page shows the best and worst performing topics.



Legacy - Setting up the Conversational Analytics Dashboard

Set up custom events and formula definitions to create more targeted analytics.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The Conversational Analytics Dashboard enables you to customize the data you monitor in the following ways:

- Date range—Specify the date range for the data displayed on the dashboard.
- Custom events—The dashboard can display analytics about custom events you create. All events must relate to conversations. For example, you can store data about every conversation that used a specific channel, such as Slack.
- Formula Override—Customize parameter definitions used in analytic reports. For example, by default, duration is the total time from the first to the last exchange in a conversation. You might like to override that formula by subtracting inactive times in the conversation.

Role requirements

For information on roles, see Legacy - Conversational Analytics dashboard roles.

Dependencies

The Conversational Analytics Dashboard requires the Quebec or later version of Virtual Agent.

Legacy - Install Conversational Analytics Dashboard

Get updates to the Conversational Analytics dashboard from the ServiceNow Store. Use this dashboard to gain insights on Virtual Agent (VA) chats with customers.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Note:

Starting with the San Diego release, the Conversational Analytics app is automatically installed when you initially activate the Glide Virtual Agent (com.glide.cs.chatbot) plugin. Subsequent updates for this app must be downloaded and installed from the ServiceNow Store.

Conversational Analytics dashboard is not available for on-premise installation.

Using the Conversational Analytics dashboard may incur Integration Hub transaction costs. This transaction metering was unintended and will be removed in an upcoming release. If the issue persists, please create a case for our Customer Service and Support team.

Role required: Chat Analytics Admin

Procedure

1. Confirm that your instance has the Glide Virtual Agent plugin [com.glide.cs.chatbot] activated. Starting with the San Diego release, the Conversational Analytics Dashboard app is automatically installed when you activate the Glide Virtual Agent plugin [com.glide.cs.chatbot].
2. Go to the ServiceNow Store, and search for analytics .
3. Select the latest version of Conversational Analytics Dashboard.
   The store installs the updates to the Virtual Agent Analytics Dashboard and the Analytics data configuration tools. The plugin name is com.sn.conversational.analytics and the scope name is sn_ci_analytics. Some of the main tables for the Conversational Analytics Dashboard include:

Table	Description
sn_ci_analytics_conversation	The main table for conversations. It lists Virtual Agent conversations.
sn_ci_analytics_event	List of events. An event is something that happens, for example, an actionable notification. The dashboard can display analytics about default events or ones you create. For more information, see Set up custom events.
sn_ci_analytics_event_prop	List of values used in events.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table	Description
sn_ci_analytics_formula_override	Lists formula overrides for properties used by the dashboard. For more information, see Set up custom definitions.

Note:
You do not need a license or a plugin for Performance Analytics.

Legacy - Create custom events to monitor

Create custom events and monitor them in the Conversational Analytics Dashboard.

About this task

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Before you begin

Role required: Chat Analytics Admin.

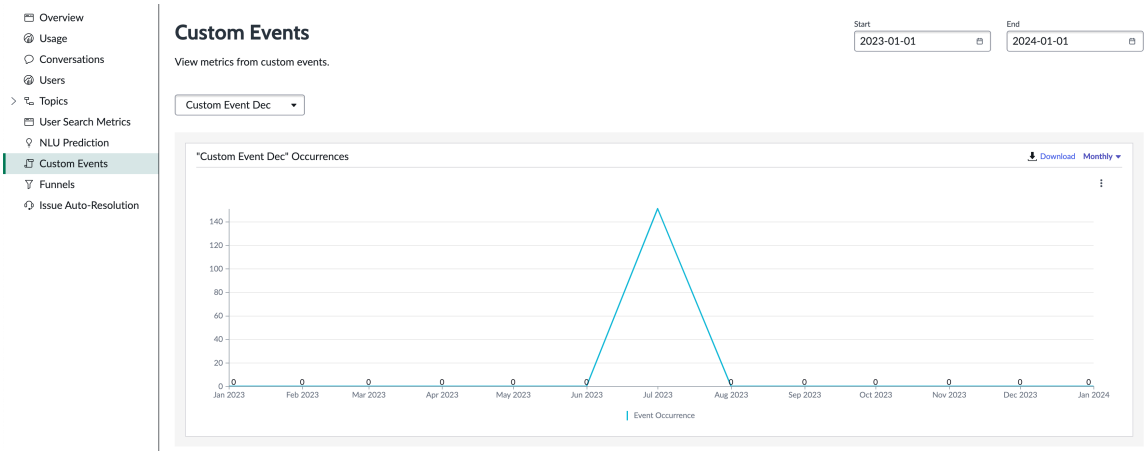
About this task

An event is a combination of conditions that apply to a subset of Virtual Agent (VA) conversations. For example, an event might be conversations originating on a Slack channel that VA transferred to a live agent.

Most metrics you see on the dashboard, for example topic and conversation details, are derived from pre-built events. The dashboard displays these events on the **Topics** and **Conversations** tabs. To build custom events, you can use the Custom Events feature. Use custom events to create analytics about data you're interested in, for example:

- Number of conversations on a Slack channel that transferred to a live agent.
- Number of conversations on a Slack channel where the user never returned.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




Custom events appear on the **Custom Events** tab. If you haven't configured any custom events, the dashboard won't display any. You can create up to 20 custom events.

Custom events take effect when you create them. You cannot use them to analyze data collected before you created the custom event.

Procedure

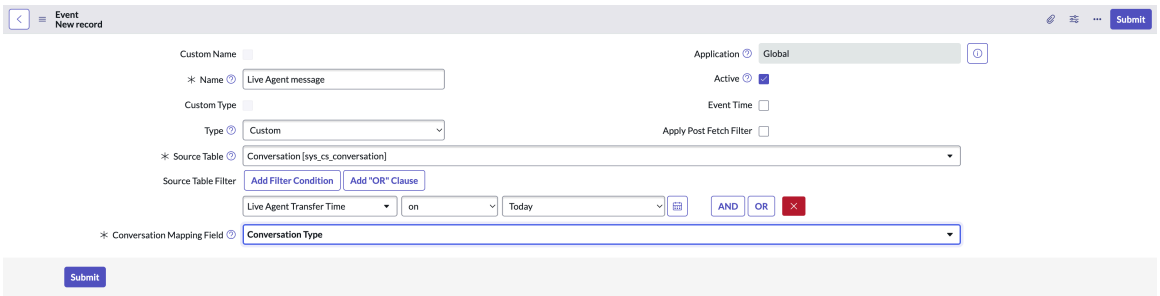1. Navigate to **All** > **Conversational Analytics** > **Event Configuration** and select **New**.
   The Event New record page appears.




2. In the form, fill in the fields.

3. Click **Submit**.
   The Events page appears, which lists all custom events. You've specified the table to look for custom events. Now, you must specify the parameter values that trigger the custom event.

4. Click the custom event you created.

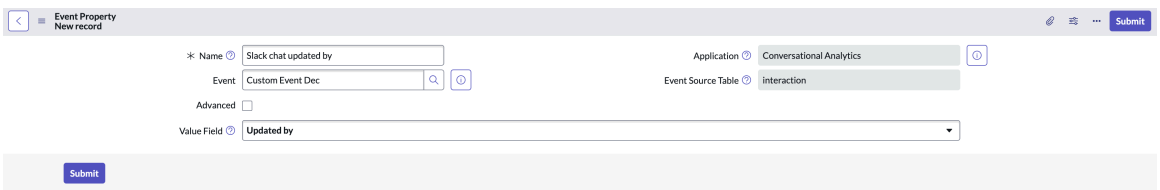5. In the Event Properties related list, select **New**.
   The Event Property New Record page appears where you specify the properties for a custom event that you want to track on the dashboard.



   In this example, the **Custom Event** tab shows metrics for *Updated by* for the custom event, Messages-from-Slack.

6. In the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

7. Click **Submit**.
   The Event page appears.
8. Click **Update**.
   The Events page appears, which lists all custom events. You can open the **Custom Events** tab on the dashboard to see the custom event. This custom event is not retroactive; the dashboard only displays new events that satisfy the custom event criteria.

Legacy - Create custom override definitions

Use scripts to override the default formulas used to create the analytics on the Conversational Analytics Dashboard.

About this task

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Before you begin

Role required: Chat Analytics Admin

Be sure to set the application scope to Conversational Analytics.

About this task

The Conversational Analytics Dashboard uses formulas to determine analytics, such as how to calculate duration. You can override the default formulas to tailor the analytics to your needs. For example, the default formula for duration in the dashboard is the time between the first and last exchanges in a conversation. You might like to override that formula by subtracting inactive times in the conversation.

The default formulas and formula overrides are in the sn_ci_analytics_formula_override table. You can only modify the existing formulas that are in the table by deactivating the default formula and creating a new formula override record. You cannot override some formulas because they are system dependent. You can, however, create custom events to achieve a similar goal.

The default definitions are:

- Duration—Time from the start of a conversation session until the last message is sent, rather than when the conversation session closes. You cannot replace the supplied script for Duration. You can only turn it on or off. If you deselect the **Active** check box, the duration is calculated until the end of the session. If you select the **Active** check box, the duration is calculated to the last message sent.
- Self-solve rate—Number of conversations that did not have negative feedback, contained a topic that went through to the last node, and did not escalate to a live agent. The dashboard divides that number by the number of all conversations to get the rate.

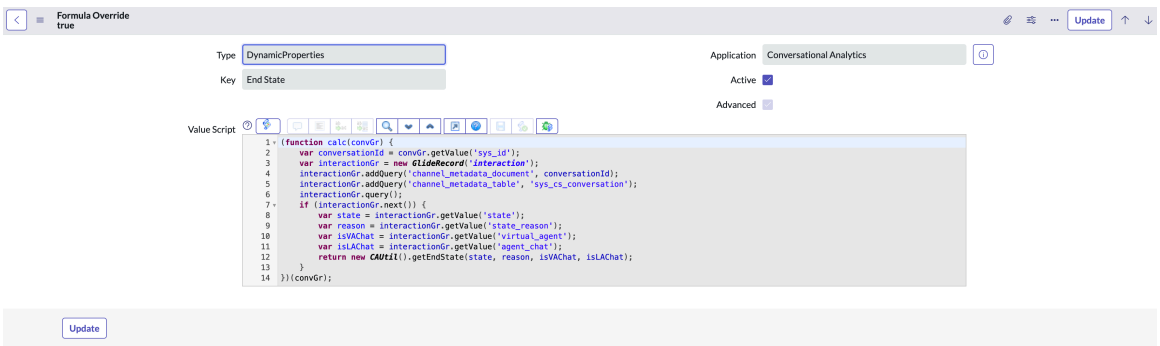
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Feedback—Defined as positive, neutral, and negative. For example, to override this behavior, first, use Virtual Agent (VA) Designer to create a ranking from 1 to 10. Then, you can use a script to override the dashboard's default behavior by grouping 1–4 as negative, 5–7 as neutral, and 8–10 as positive.
- End state—Defined by default in 12 ways. For more information, see Formula override examples.
- Valid conversation—Defined as a conversation record that is included in the dashboard results for satisfying at least one of the following criteria.
  - Non-actionable notification conversations, which do not require validation from the user, are counted as active conversations.
  - Actionable notifications that are not part of an existing conversation are considered valid conversations when the status of the notification is either Sent or Completed.
  - Conversation engages Virtual Agent topic discovery or direct live agent conversation.


Note:
Formula overrides do not change the stored data. They only change how the dashboard displays the data by computing existing data in a different way.

Procedure

1. Navigate to **All** > **Conversational Analytics** > **Formula Override**.
   Alternatively, you can enter *sn_ci_analytics_formula_override.list* in the Filter Navigator to display the sn_ci_analytics_formula_override table.
2. Select the formula you want to override.
   You cannot override the Duration formula, you can only activate or deactivate it. You can alter the scripts for other definitions. These are the only definitions you can alter.
   The Formula Override page appears and shows the existing formula.



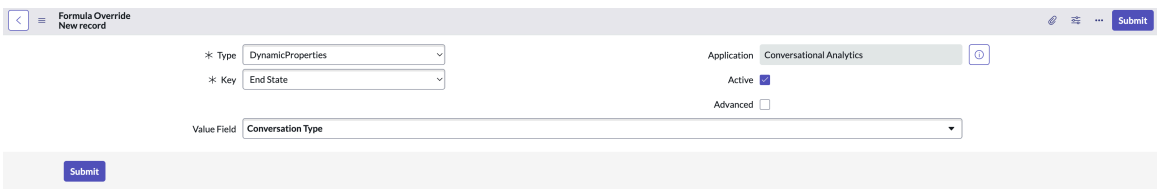3. Copy the script in the Value Script field.
   The default formulas are read-only. So, to modify them, you must make a copy.
4. Deselect the **Active** check box to make the default formula inactive.
5. Click **Update**.
6. Click **New** to create a formula override record that overrides the default formula.
   The Formula Override New Record page appears.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

7. In the form, fill in the fields.

8. Click **Submit**.

Legacy - Formula override example

Use the following formula override example to craft your own formula overrides.

> **Important:**
>
> Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.
>
> For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.
>
> If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Group End State definitions

The end state of a conversation specifies how a conversation ended. For example, it could end with the user not responding, or the user closed the chat window. There are 12 default definitions of end state. For more information on conversation end states, see Virtual Agent interaction records. The following script groups them as follows:

- VA closed the chat session
  - System Closed VA – User No Response
  - System Closed VA – Topic Complete
  - System Closed VA – Left With AI Search
  - System closed VA – Auto Closed
  - System Closed VA – User Never Engaged
- Live agent closed the chat session
  - System Closed LA – User No Response
  - System Closed LA – Chat Complete
  - Agent Closed LA – Clicked End/X
  - System Closed LA – Before Agent Engagement
- User closed the chat session
  - User Closed LA – Clicked End/X
  - User Closed VA – Clicked End/X
  - User Closed LA - Before Agent Engagement

To create these groupings of the 12 end states, follow the instructions for creating a formula override and use the following script.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
(function calc(convGr) {
    // Returns 'System Closed VA', 'System Closed LA', 'User
 Closed' states.
    function getFinalEndState(state) {
        var arrayUtil = new global.ArrayUtil();
        VA_END_STATE = ['System Closed VA - User No Response',
            'System Closed VA - Topic Complete',
            'System Closed VA - Left With AI Search',
            'System closed VA - Auto Closed',
            'System Closed VA - User Never Engaged'
        ];
        LA_END_STATE = ['System Closed LA - User No Response',
            'System Closed LA - Chat Complete',
            'Agent Closed LA - Clicked End/X',
            'System Closed LA - Before Agent Engagement'
        ];
        USER_CLOSED_END_STATE = ['User Closed LA - Clicked
 End/X',
            'User Closed VA - Clicked End/X',
            'User Closed LA - Before Agent Engagement'
        ];
        if (state) {
            if (arrayUtil.contains(VA_END_STATE, state))
                return 'System Closed VA';

            if (arrayUtil.contains(LA_END_STATE, state))
                return 'System Closed LA';

            if (arrayUtil.contains(USER_CLOSED_END_STATE,
 state))
                return 'User Closed';
        }
        return state;
    }

    var conversationId = convGr.getValue('sys_id');
    var interactionGr = new GlideRecord('interaction');
    interactionGr.addQuery('channel_metadata_document',
 conversationId);
    interactionGr.addQuery('channel_metadata_table',
 'sys_cs_conversation');
    interactionGr.query();
    if (interactionGr.next()) {
        var state = interactionGr.getValue('state');
        var reason = interactionGr.getValue('state_reason');
        var isVAChat = interactionGr.getValue('virtual_agent');
        var isLAChat = interactionGr.getValue('agent_chat');
        var endState = new CAUtil().getEndState(state, reason,
 isVAChat, isLAChat);
        return getFinalEndState(endState);
    }
})(convGr);
```

Legacy - Using the Conversational Analytics Dashboard

Use the Conversational Analytics Dashboard to get insights into Virtual Agent (VA) conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The following sections explain how to use the dashboard to investigate VA interactions with users. You must have the Chat Analytics Viewer (chat_analytics_viewer) role to use the Conversational Analytics Dashboard.

Legacy - Set the date range of the data

Set the **Start** and **End** dates at the top of the Overview tab to specify the date range of the data summarized on a page. The date range set on this tab applies to all the other tabs on the Virtual Agent Analytics dashboard.

Before you begin

Important:

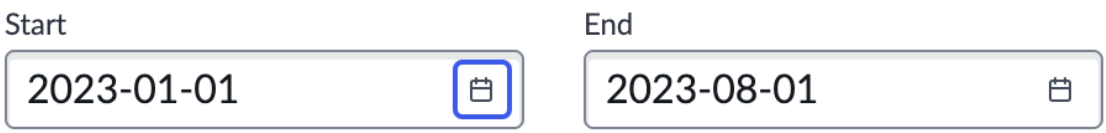
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Role required: Chat Analytics Viewer (chat_analytics_viewer)

About this task



All dates and times on the dashboard are UTC. Even though the conversation table lists conversation dates and times in different time zones, Virtual Agent (VA) converts them to UTC when displaying them on the dashboard. Additionally, if you select a preset date range, such as last week, the dates might be different from what you expect.

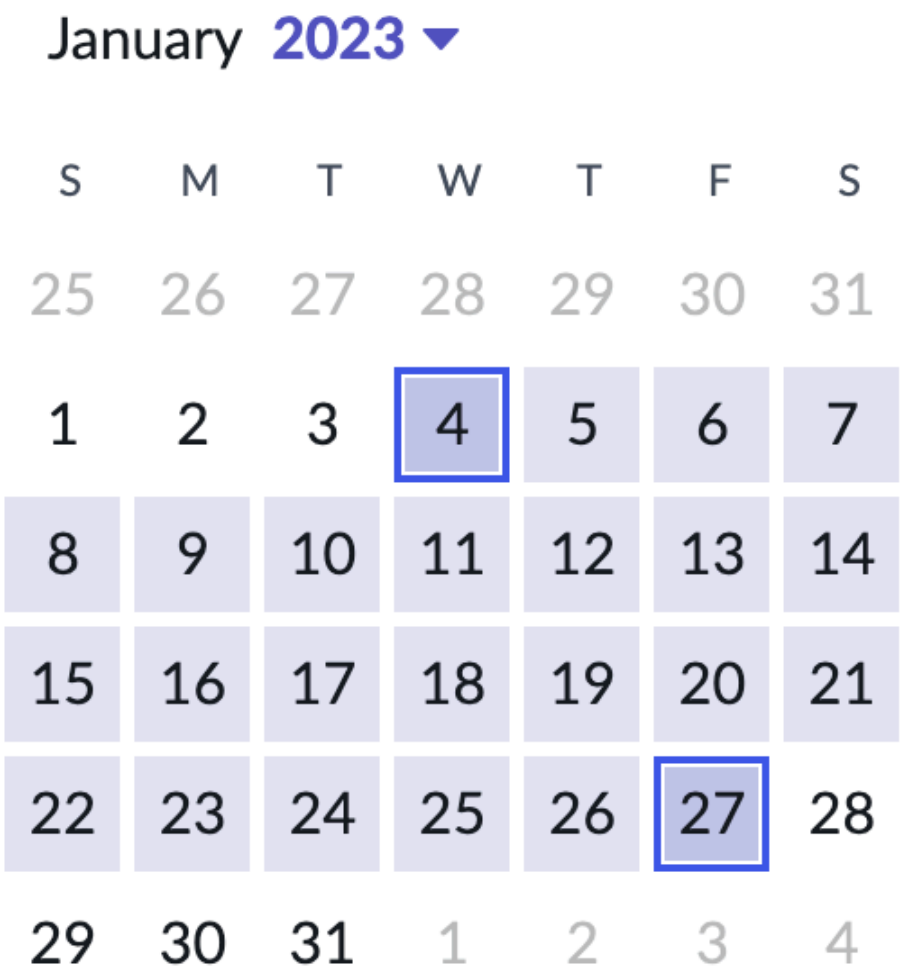
You can set the date range in two ways.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Analytics** > **Dashboard**.
2. **Optional:** Use the **Start** and **End** dates to set the date range.
   a. Select the **Start** calendar icon .
   b. Double-select the start date on the calendar.
   c. Select **OK**.
   d. Select the **End** calendar icon .
   e. Double-select the end date on the calendar.
   f. Select **OK**.
   The data displayed on the dashboard adjusts according to the data in the new date range.
3. **Optional:** Use the **Start** date calendar to set the date range.
   a. Select the **Start** calendar icon .
   b. Double-select the start date of the date range.
   c. While holding down the control-key on the keyboard, double-select the end date.
   The dashboard highlights the range of dates.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



(Optional)

d. Select **OK**.

(Optional) The data displayed on the dashboard adjusts according to the new date range.

Legacy - Overview tab

Use the Overview tab to get a snapshot of some of the information collected in the Conversational Analytics dashboard.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

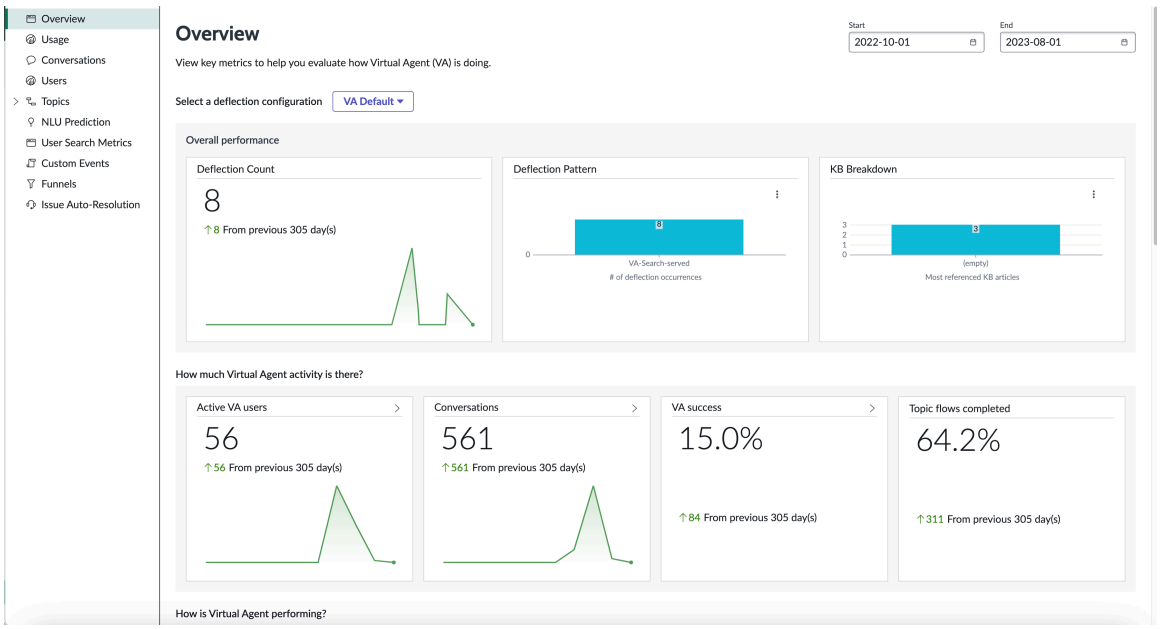
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The **Overview** tab is the landing page for the dashboard. It provides a summary of the information on all the other dashboard tabs. To use the **Overview** tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

Note:
Now Assist in Virtual Agent Analytics appears in the left navigation only when you have Now Assist in Virtual Agent enabled.



For directions about using the widgets on the **Overview** tab, see Explore the Virtual Agent Analytics Dashboard.

Visualized overall data

Visualisation	descriptions
Deflection Count	Number of deflection occurrences measured by the execution count of the Deflection topic block. A deflection occurs when Virtual Agent resolves or helps to resolve an issue for a user.
Deflection Pattern	Number of deflections per deflection patterns.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Visualized overall data (continued)

Visualisation	descriptions
KB Breakdown	Titles of KB articles with the number of times they were presented as part of deflections.
Active VA users	Cumulative number of unique active end users (not agents) who used the conversational interface.
Conversations	Count of all interactive conversations initiated from the Virtual Agent.
VA success	Percentage of conversations that were completed without escalation and with an intended topic flow. Completed conversations are those that reach the end of a Virtual Agent topic or conversation, are closed by the user, or are automatically closed. Completed without escalation means that the conversation was not routed to a live agent, and the user did not give negative feedback. (Feedback types include negative, positive, neutral, and no feedback.)
Topic flows completed	Percentage of topics that end users completed till the last node out of all topics invoked and ran.
Categories	Number of completed conversations shown per the Topic Category.
Topics	Number of occurrences when the user completed to the last node or left a conversation midway through for each topic.
User feedback	Feedback Results categorized as good, bad and neutral. The Feedback results are calculated from the Feedback Setup Topic. **Note:** Analytics Administrator can change how frequently the Feedback Setup topic show post-chat by changing the system properties.
Channels	Number of conversations executed across the configured channels of the Virtual Agent.
Conversation end state	Number of conversations that have ended in the OOTB Conversation End state.

Typical actions on the **Overview** tab include:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Selecting the arrowhead icon > in any of the widgets to open other dashboard tabs that display more detailed information.
- Selecting the visualized data, for example, a bar in a bar chart, to get additional information about the data.
- Changing the date range of the data displayed.
- Selecting a tab inside one of the widgets to change the set of data displayed. For example, in **Categories** bar chart, select the **Incomplete** tab.

Note:
Your **Overview** tab might look different because it can be configured.

Edit the Overview page

Add or subtract the widgets on the **Overview** page to suit your users.

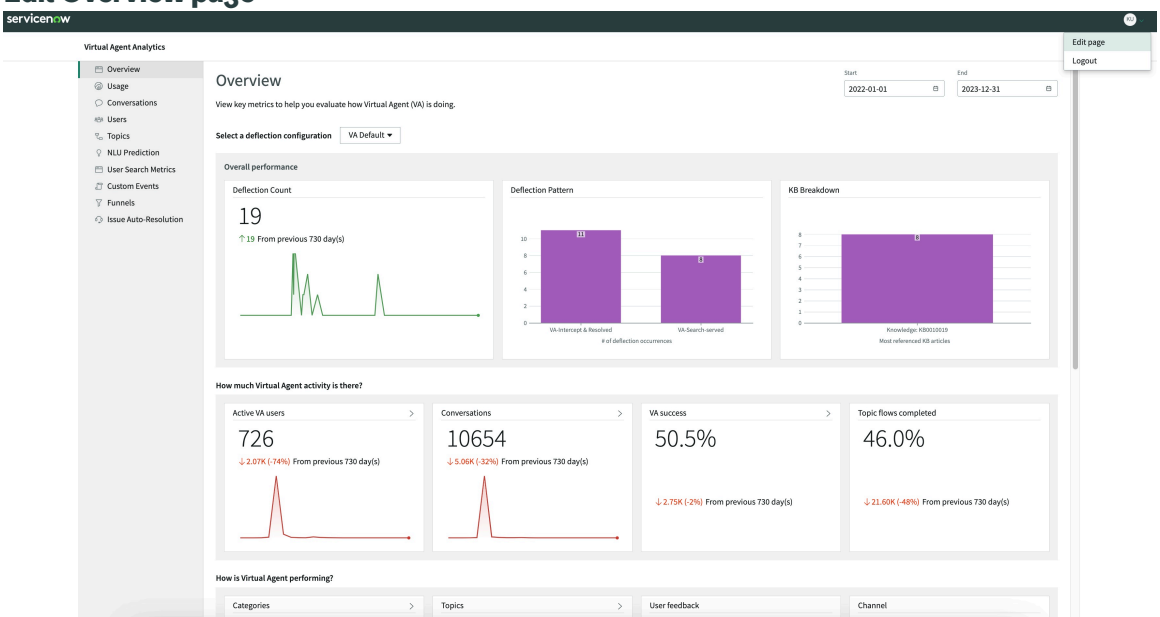
Before you begin
Role required: admin

About this task
The **Overview** page displays widgets with links to all the dashboard data. You can edit the page to remove or add back widgets.

Procedure

1. Navigate to **All** > **Conversational Analytics** > **Dashboard**.
2. To add or remove widgets from the **Overview** page, select **Edit page**.

Edit Overview page



The UI Builder opens.

3. To add or remove components in the Conversational Analytics Dashboard, use the UI Builder.

Legacy - Usage tab

The **Usage** tab provides summary information about conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

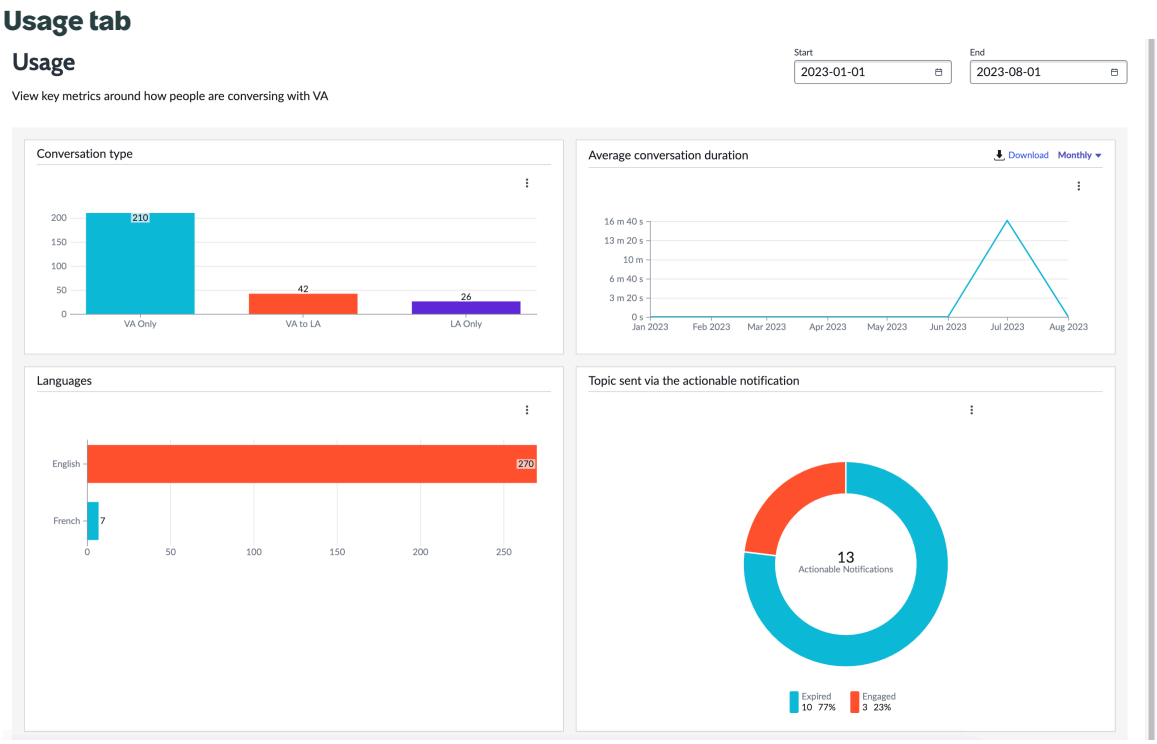
For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The **Usage** tab answers questions such as:

- What languages are used in conversations?
- What is the average duration of conversations on different days?
- How many Virtual Agent (VA) conversations transition to live agents?

To access the **Usage** tab, you must have the chat analytics admin role or the chat analytics viewer role.



Selecting the data or pointing to the data in the visualizations displays additional information about the data.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Visualized usage data

Visualization	Description
Conversation type	Number of conversations escalated from VA to a live agent, initiated and completed in VA only, or initiated and completed by a live agent.
Average conversation duration	Average duration of conversations in minutes. The duration is calculated from the beginning of the conversation to the last message sent.
Languages	Languages used by users and the number of conversations in each language.
Topic sent via the Actionable notification	The number of actionable notifications delivered from virtual agent to the users for the selected time range, and the number and percentage of actionable notifications that users engaged with, and did not engage with.

Legacy - Conversations tab

Use the **Conversations** tab to view the list of Virtual Agent conversations and details of each conversation that occurred during the selected date range.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

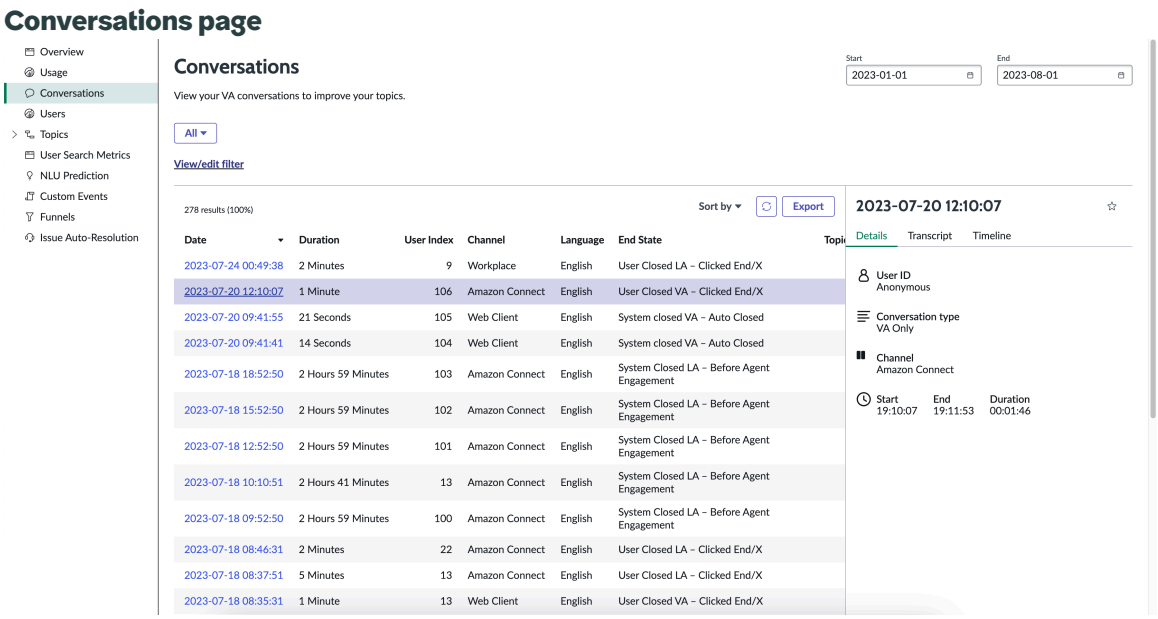
If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

All conversations from the Conversation table [sys_cs_conversation], that run on the Virtual Agent Designer are listed on the Conversations page, except for notifications, open (ongoing) conversations, and previews.

Virtual Agent conversations data is retained for a period of 90 days. The analytics data extracted from the conversations is retained for a period of two years.

To access the **Conversations** tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role. Conversation dates and times are in UTC.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Conversations tab benefits

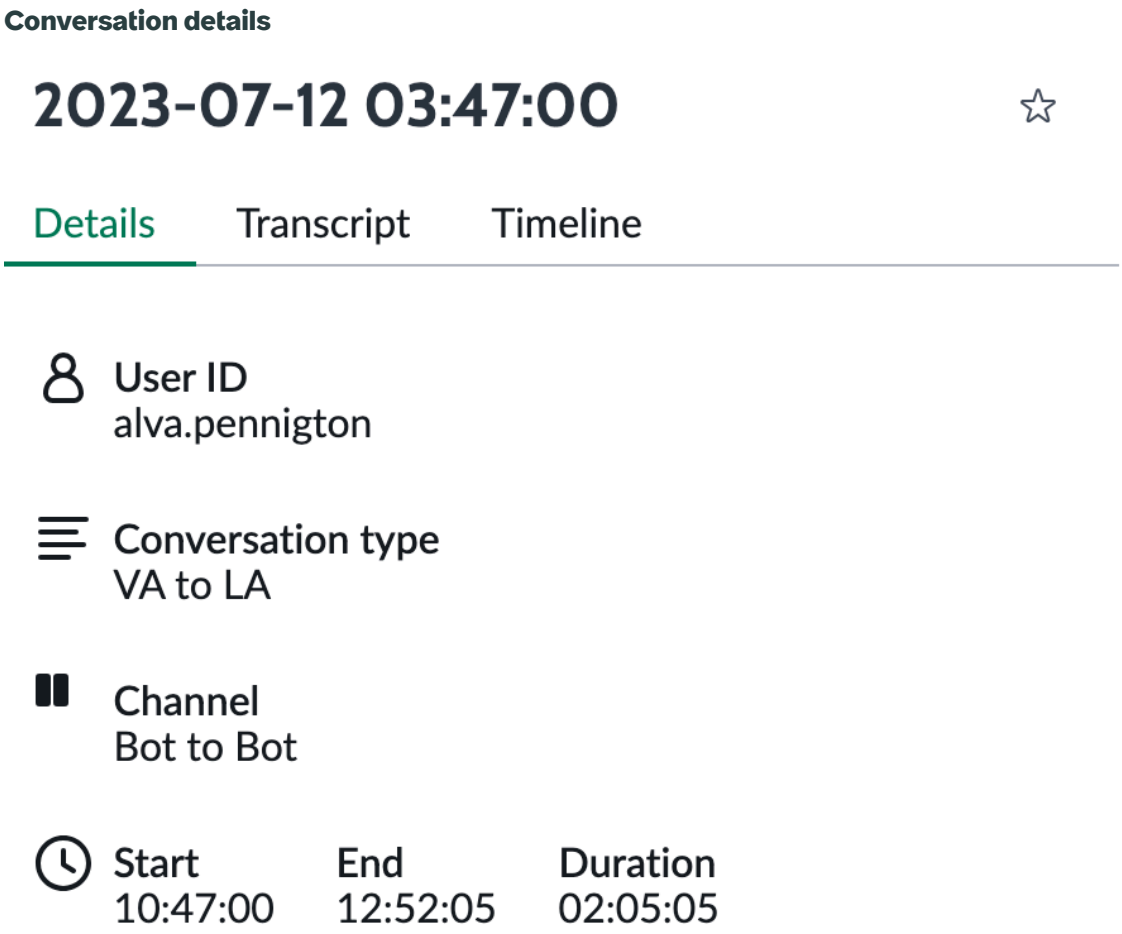
The **Conversations** tab enables you to do the following:

- Filter the list of conversations easily by using pre-built filtering options. For more information, see Filtering using list options.
- Filter the list of conversations based on a specific condition and save conditions for filtering. For more information, see Filtering using the Filter Editor.
- Learn more about each conversation, view the conversation transcript, and mark a conversation as a favorite. For more information, see Get conversation details.
- Export the list of conversations to a file. For more information, see Export the conversations list.
- Download the conversation transcript to troubleshoot individual conversations. For more information, see Download the conversation transcript.

Get conversation details

To get more information about a conversation, select one of the conversations in the list. The information appears on the side panel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




To view and download the conversation transcript, select the **Transcript** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conversation transcript

2023-07-18 08:35:31


Details | Transcript | Timeline

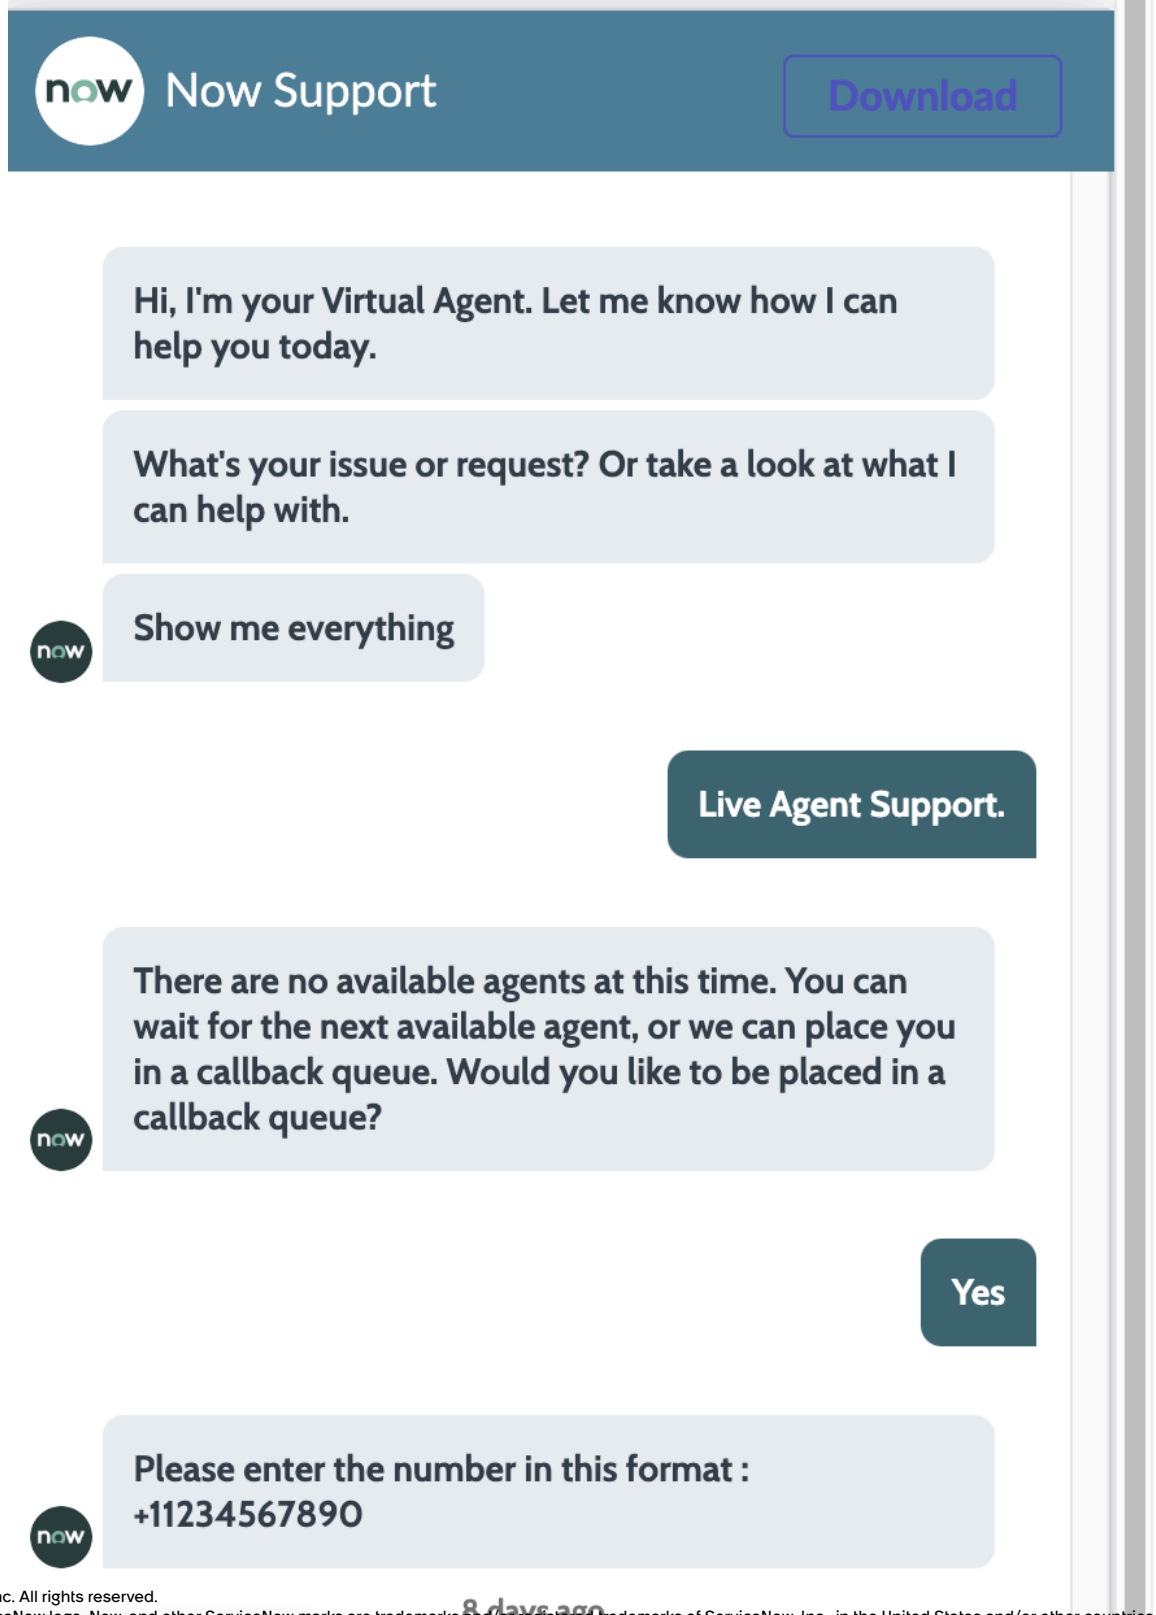

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To view the conversation timeline, select the **Timeline** tab.

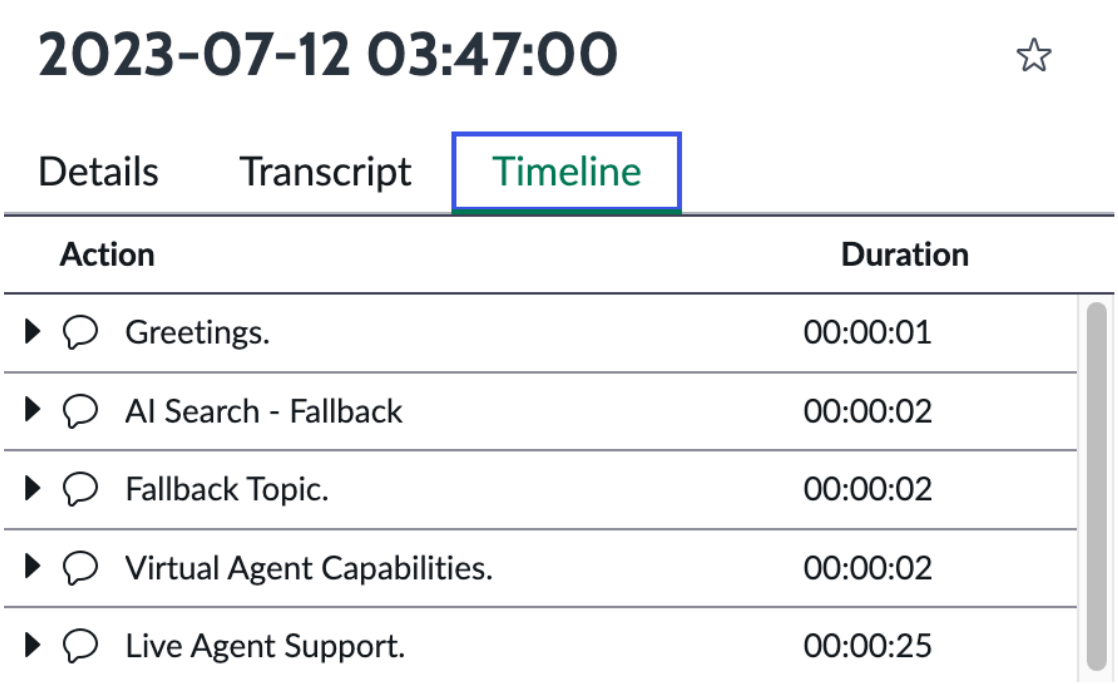Conversation timeline



To tag a conversation as a favorite, you can select the star icon on the side panel. On the Conversations page, you can easily list the conversations that are marked as favorite using the Filter Editor.

Export the conversations list

To export the conversations list on the Conversations page to a file, select **Export**. In the Export pop-up window, specify the format for the file such as Excel, CSV, JSON, or PDF, and the delivery type such as email or download.

Note:
You can export up to 1000 records only from the list on the page. This limit is not configurable.

Conversation information

The following table describes the summarized Virtual Agent conversation information on the **Conversations** tab.

User information

Column	Description
Date	Date of the conversation.
Duration	Duration of the conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User information (continued)

Column	Description
User index	Link to go to the User Details page. It's a unique number that the system creates and permanently assigns to a Virtual Agent user. This number becomes a part of conversation records. This number is not the same as the system user ID.
Channel	Client software that the user used to chat.
Language	Language used for the conversation.
End state	How the conversation ended. For more information on various conversation end states, see Virtual Agent interaction records.
Topics	Virtual Agent topics that were invoked during the chat conversation.
Favorites	Indicates whether the user is tagged as favorite.

Download the conversation transcript

To download the conversation transcript, select a conversation from the conversations list and select **Download**.

The conversation transcript .txt file includes various data elements such as user input, Virtual Agent response, Flow Designer Integration Hub, flow action, custom controls, and topic block information for the selected conversation. This information helps Virtual Agent administrators to troubleshoot conversations, for example, conversations where there were errors or transfers to a live agent. For more information on the .txt file, see Legacy - Conversation transcript template.

Legacy - Use filters in the Conversation tab

You can filter out conversation for a deeper understanding.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Filtering using list options

You use the list options to filter the conversations.

Note:
The dashboard converts the dates to UTC, which might not match the dates in the conversations list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


List options

Option	Description
All	Lists all conversations.
VA Success	List all conversations that are considered successful. You can edit the default formula that defines successful conversations by using formula overrides. For more information, see Legacy - Create custom override definitions. In the base system, the default formula is set as a percentage of conversations that did not escalate to a live agent, did not have negative feedback, and contained a topic that went through to the last node.
Fallback	Lists all conversations where Virtual Agent didn't understand the user and used fallback text to prompt the user for additional information.
Live Agent Transfer	Lists all conversations where Virtual Agent transferred the user to a live agent.

Filtering using the Filter Editor

To filter the conversations, select **View/edit filter** and use the condition builder in the Filter Editor pop-up window. You can either select a default filter from the list or create a new filter condition. For example, the following image shows a condition in the Filter Editor pop-up window. This condition lists conversations that use the **Pizza Order** topic, and that have the **Pizza Type** topic node (a static choice control) in which the user has selected the **Pepperoni** value.

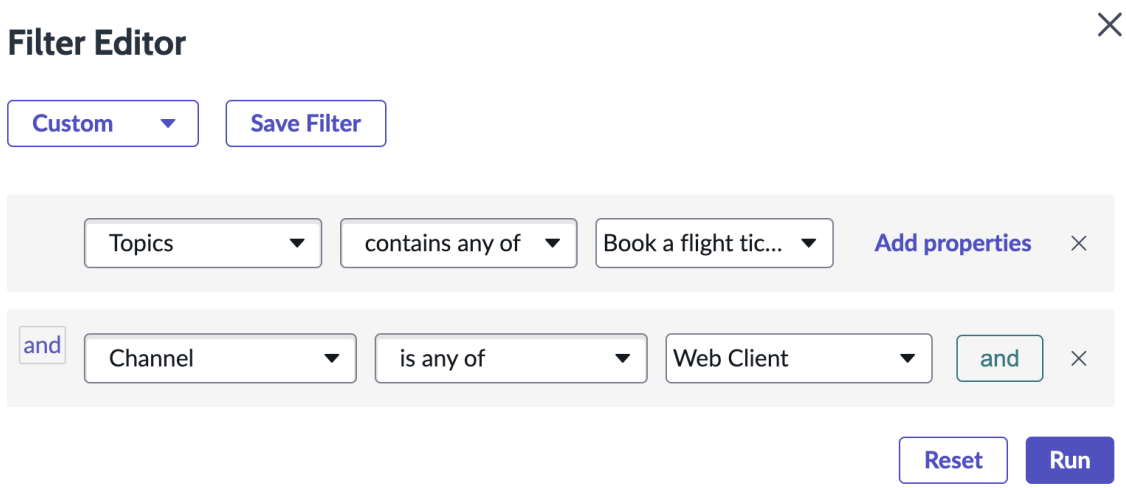
Condition using a static choice value



Another example condition is shown in the following image. This condition lists conversations that use the **Pizza Order** topic and that have the **Confirm** topic node (a boolean control) in which the user has selected the **true** value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

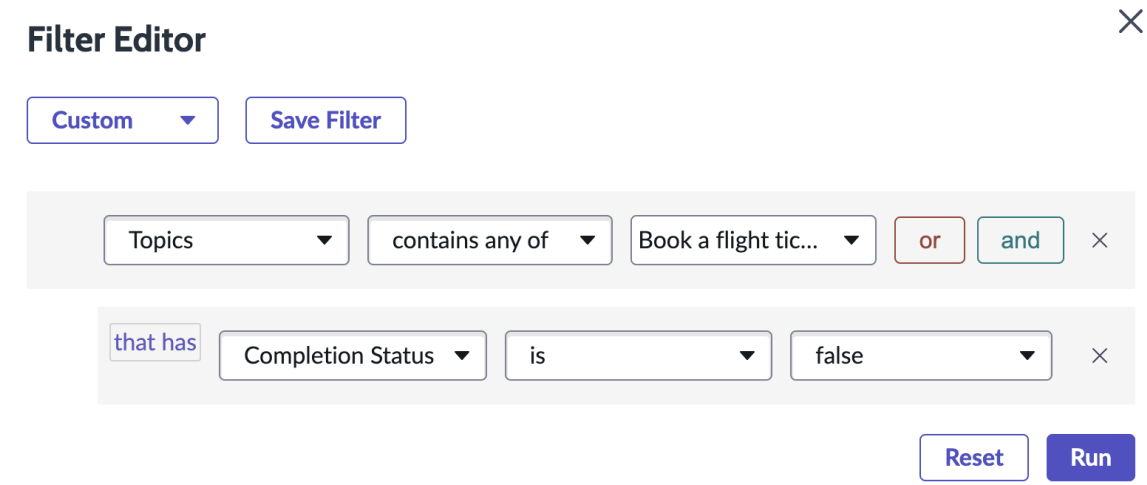Condition using a boolean value



The condition builder consists of the following:

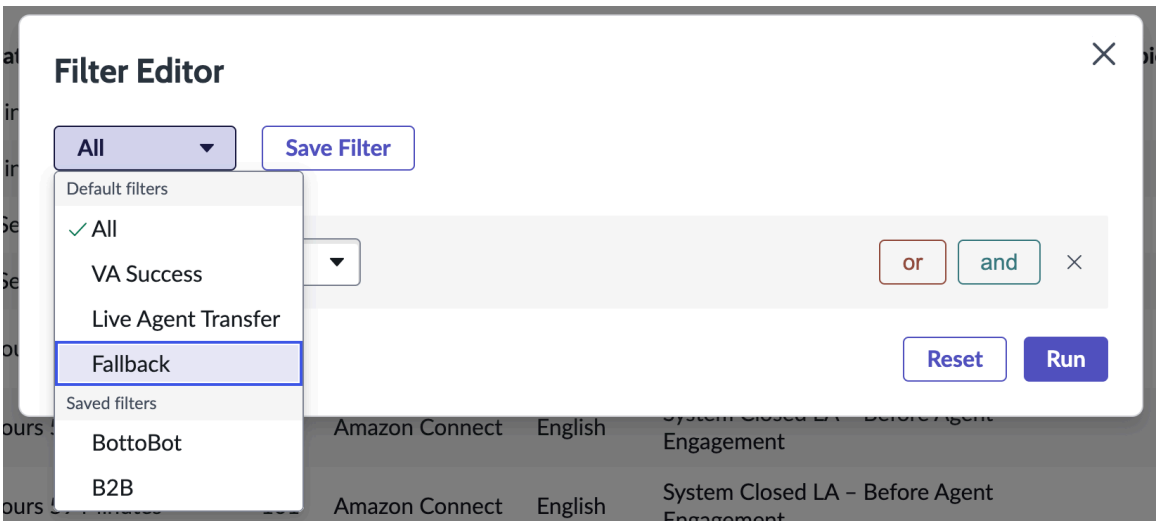
- Field: A list based on relevant tables. For more information about the field options, see Field options in the Filter Editor.
- Operator: A list of operators that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

To add a dependent condition in the condition builder, either select **or** or **and**. To filter the conversations list using the condition, select **Run**.

To remove a condition, select the delete icon ✕ next to the condition.

To save a condition that you created in the condition builder, select **Save Filter**. In the Save Filter pop-up window, specify a name for the condition. Users having the Chat Analytics Viewer (chat_analytics_viewer) role can select and modify your saved filters.

Saved condition



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field options in the Filter Editor

Field options

Option	Description
Channel	Conversations that used the specified channel.
Conversation Time	Conversations within the specified date and time.
Duration	Conversations within the specified time duration. You can edit the definition of duration to be a session duration, rather than an active messaging duration. For more information, see Legacy - Create custom override definitions.
End State	Conversations with the specified state that is based on how conversations ended. The values for the end states are stored in the Interactions [interactions] table. For more information, see Virtual Agent interaction records.
Events	Specific events that are triggered in a conversation.
Favorite	Conversations that are marked as favorite. You can also mark a conversation as favorite in the User Details page. For more information, see Legacy - User Details page.
Feedback Result	Conversations for the specified feedback type.
Language	Conversations for the specified language based on the user's language setting.
Message Count	Conversations for the specified message count in the chat.
Provider Name	Conversations for the specified provider.
VA Success	Conversations resolved by the Virtual Agent.
Setup Topic Types	Conversations that used the specified setup topic type.
Topic Blocks	Conversations that used the specified topic block.
Topic Categories	Conversations that have topics which belong to a specified topic category.
Topic Count	Conversations that used the specified topic count. Each conversation can use multiple topics and this option filters conversations based on the count of topics used in it.
Topics	Conversations that used the specified topics in the chat.
Type	Conversations that are of the specified type such as live agent only or Virtual Agent only.

Legacy - Conversation transcript template

The conversation transcript .txt file contains information used to troubleshoot individual conversations.

Data element	Description
Conversation ID (sys_id)	Unique identifier of the conversation, autogenerated by the Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Data element	Description
Conversation Start Time	Start time of the conversation.
Channel	Channel from which the conversation was initiated. For example, the Slack application, Microsoft Teams, and so on.
User Name	Name of the user who initiated the conversation.
User Status	Status of the user in the ServiceNow AI Platform® instance. For example, Active or Inactive.
Bot Response	Control that displays Virtual Agent responses in a conversation.
User Input	Control that prompts and captures information from the user in a conversation.
Message Date and Time	Timestamp of individual messages.
FDIH logs	Action or Subflow • Id: sys_id of the action or subflow. • Inputs: Input passed to the action or subflow. • Outputs: Output received from the action or subflow.
Topic Block	Name of the topic block defined in the current topic. • Id: sys_id of the topic block invoked. • Inputs: Input passed to the topic block. • Outputs: Output received from the topic block.

Legacy - Users tab

Get detailed information on Virtual Agent users such as the time of the last chat, length of the chat, and other metrics.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

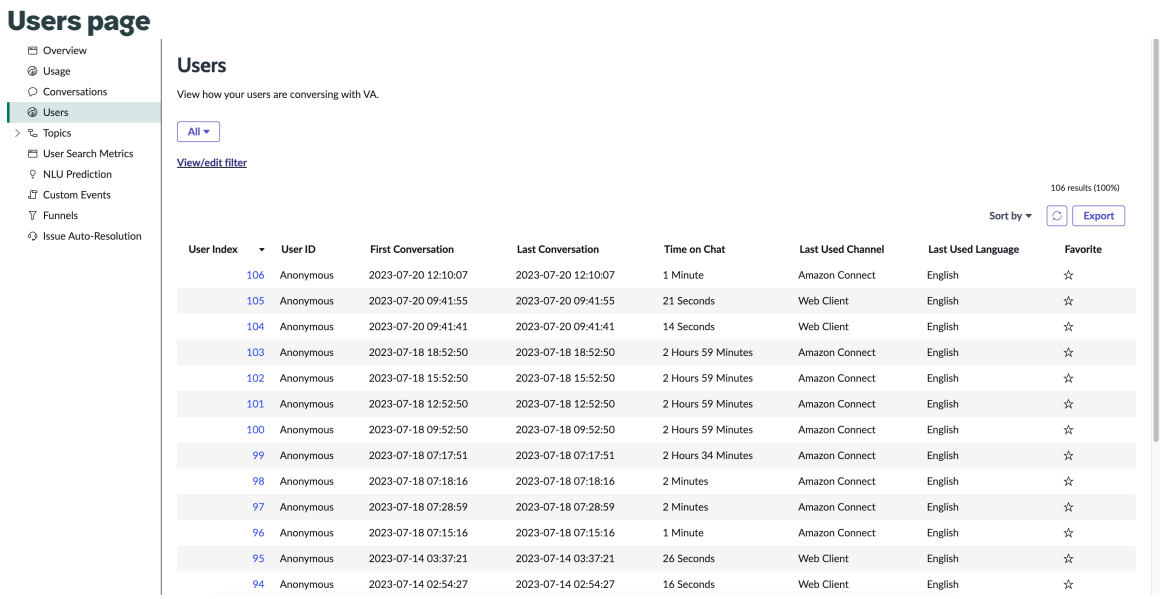
For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The **Users** tab provides summary information about all users and detailed information about each user conversation with Virtual Agent.

To access the **Users** tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Users tab benefits

The **Users** tab enables you to do the following:

- Filter the list of users by using pre-built filtering options. For more information, see Filtering the list of users.
- Filter the list of users based on a specific condition and save conditions for filtering. For more information, see Filter using the condition builder.
- View summarized information about users. For more information, see User information.
- Export the list of users to a file. For more information, see Export the list of users.

Export the list of users

To export the list of users in the Users page to a file, select **Export**. In the Export pop-up window, specify the format for the file such as Excel, CSV, JSON, or PDF, and the delivery type such as email or download.

Note:
You can export up to 1000 records only from the list on the page. This limit is not configurable.

User information

The following table describes the summarized Virtual Agent user information on the Users tab.

User information

Column	Description
User Index	Link to go to the User Details page. It is a unique number that the system creates and permanently assigns to a Virtual Agent user. This number becomes a part of conversation records. This number is not the same as the system user ID.
User ID	User ID of the logged in user. If users don't log in, they appear in sessions as **Anonymous**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User information (continued)

Column	Description
First conversation	How long ago the user first started the Virtual Agent conversation.
Last conversation	How long ago the user last had a Virtual Agent conversation.
Time on Chat	Duration of the Virtual Agent chat.
Last Used Channel	Client software the user last used to chat.
Last Used Language	Language the user last used in a Virtual Agent conversation.
Favorite	Indicates whether the user is tagged as favorite.

Field options in the Filter Editor

User filters

Option	Description
User ID	User ID of the logged in user.
User Index	Unique number that the system creates and permanently assigns to a Virtual Agent user. This number becomes a part of conversation records.
Conversation Exists	Container for subfilter properties. For example, in the previous image, the subfilter is **Duration**.
Channel Count	Number of channels a user used. A channel is the client app the user used, such as Slack. For example, if all users have used only one channel to chat with Virtual Agent, then setting the filter value to 2 eliminates all the users in the list.
Channels	Only displays users that used the specified channel to chat.
Conversation Count	Only displays users that have the number of conversations specified in the filter.
Favorite	Only displays users that you marked as favorite, or conversely, not marked as favorite in the User Details page. For more information, see Legacy - User Details page.
First Conversation Time	Only displays users where the first conversation is within the time period specified.
Language	Only displays users that chat using the specified language.
Last Conversation Time	Only displays users where the last conversation is within the time period specified.
Time in Chat	Only displays users whose chat durations are within the time period specified, for example, more than 30 seconds.

Legacy - User Details page

Use the User Details page to see the history of a user's conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

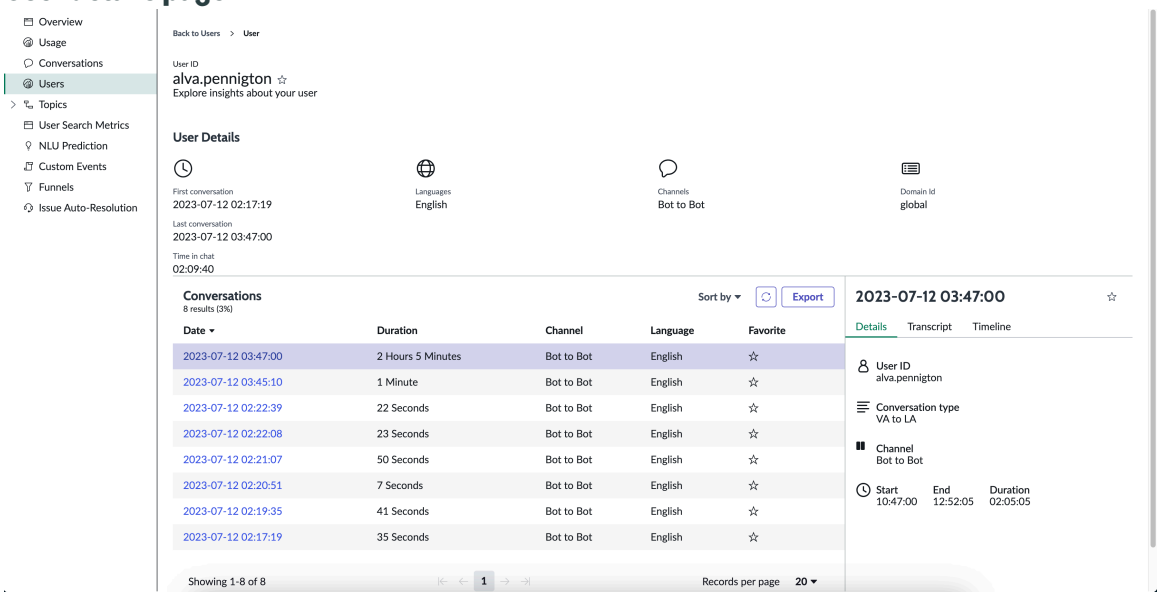
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The User Details page lists all chats that a user had with the Virtual Agent. It also displays the summary such as the language used in the chats, the first and last chats, and the channels.

User details page



You can select the star icon on the User Details page to tag the user as a favorite. In the Users page, you can easily list the users that are marked as favorite using the Filter Editor.

Benefits

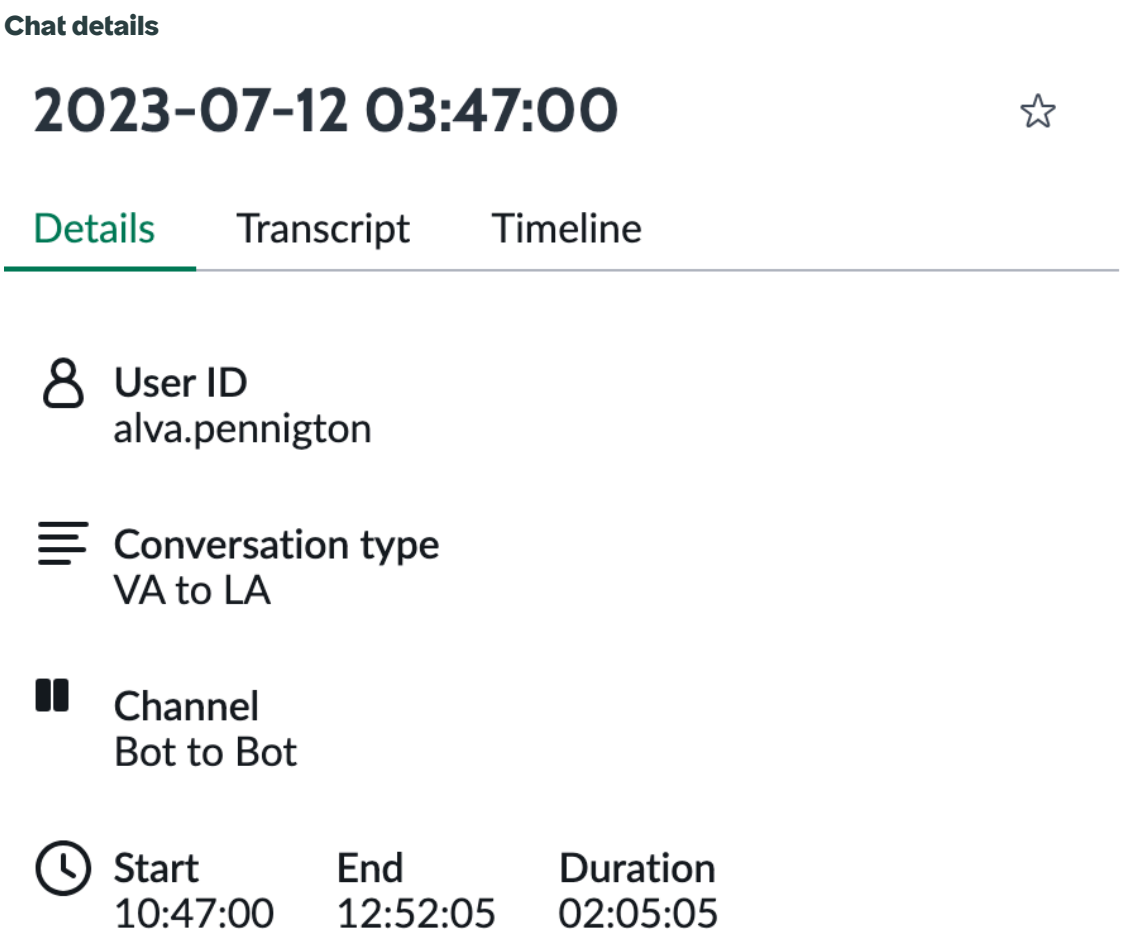
The User Details page enables you to do the following:

- View detailed information about each chat, and mark chats as favorite. For more information, see Get information about each chat.
- View details about each user. For more information, see Get information about each user.

Get information about each chat


You can get more information about a chat that a user had with the Virtual Agent. To get detailed information about one of the chats listed on the User Details page, select a date in the list of conversations. The information appears on the side panel.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




To view the chat transcript for a user's conversation, select the **Transcript** tab.

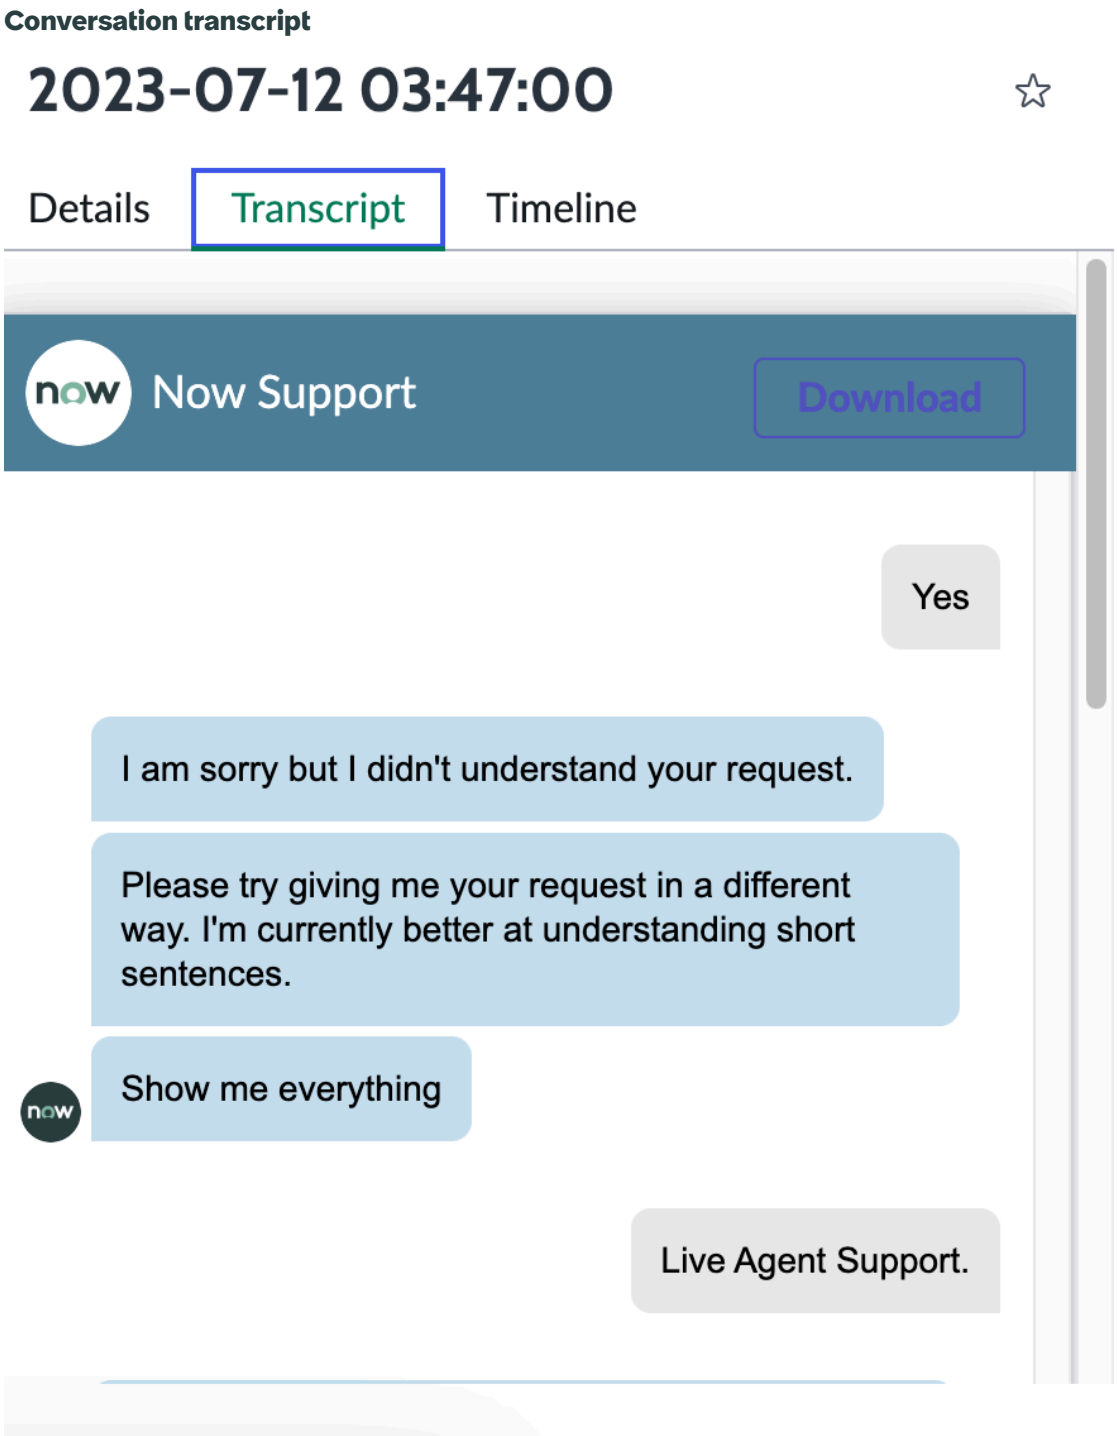© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




To view the chat timeline, select the **Timeline** tab.

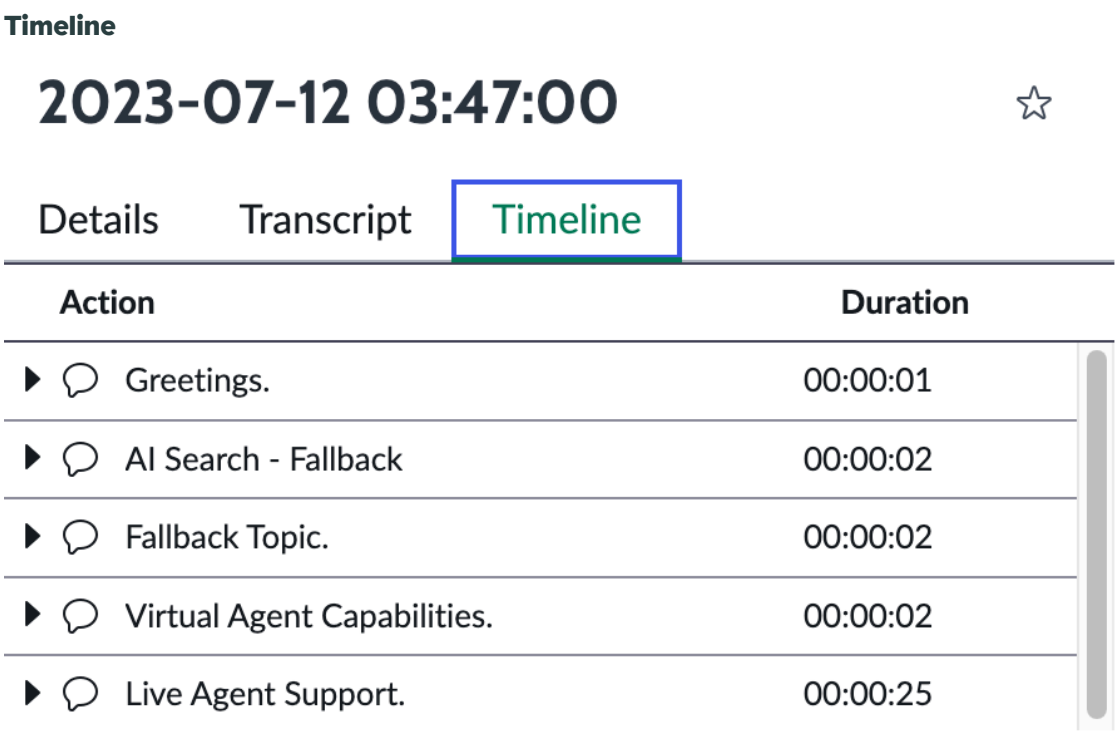© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



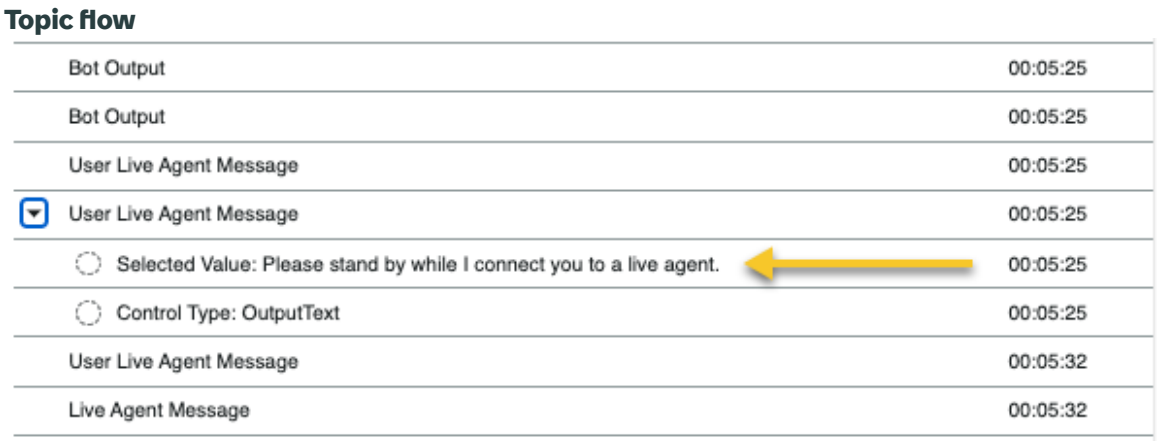
The **Timeline** tab shows the topic flow in the chat. For example, the following image shows that the chat started in Virtual Agent and moved to a live agent.



The timeline shows that the user chatted with Virtual Agent until 5:25. Then the user requested to talk to a live agent, who joined the chat at 5:32. The timeline shows events such as how many responses Virtual Agent made, and when the live agent closed the chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

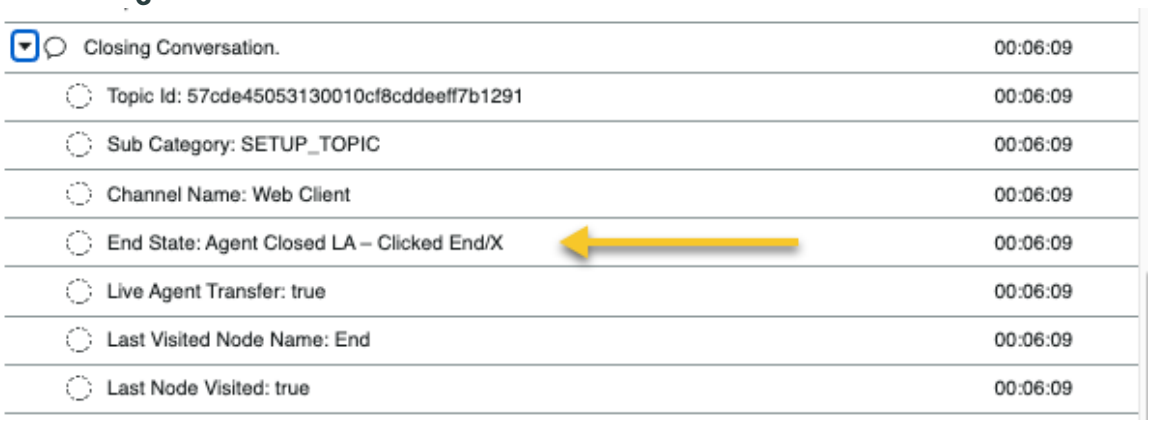Timeline log



To tag the chat as favorite, select the star icon on the side panel. On the Conversations page, you can easily list the chats that are marked as favorite using the Filter Editor. For more information, see Legacy - Conversations tab.

Get information about each user

The following table explains the fields in the User Details page:

Details

Field	Description
User ID	User ID of the logged in user. If users don't log in, they appear in the sessions as anonymous.
First conversation	How long ago the user first started the Virtual Agent chat.
Last conversation	How long ago the user last had a Virtual Agent chat.
Time in chat	Duration of the Virtual Agent chat.
Languages	Language the user used in the chats.
Channels	Software that the user used to chat.

Legacy - Use filters in the Users tab

You can use filters to get a deeper understanding of User data.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

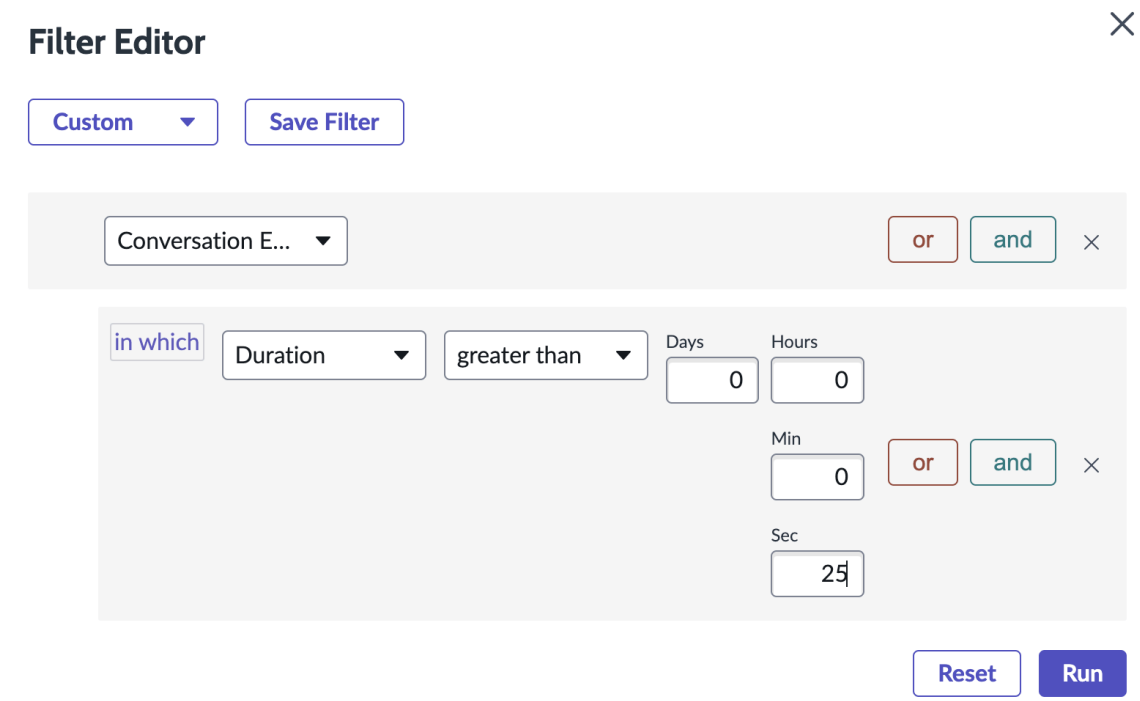
If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Filter using the condition builder

The condition builder enables you to filter users based on one or more conditions. You can either select a default filter from the list or create a new filter condition. In the following example, the condition lists users whose conversations with the Virtual Agent lasted greater than 21 seconds.

Condition builder



The condition builder consists of the following:

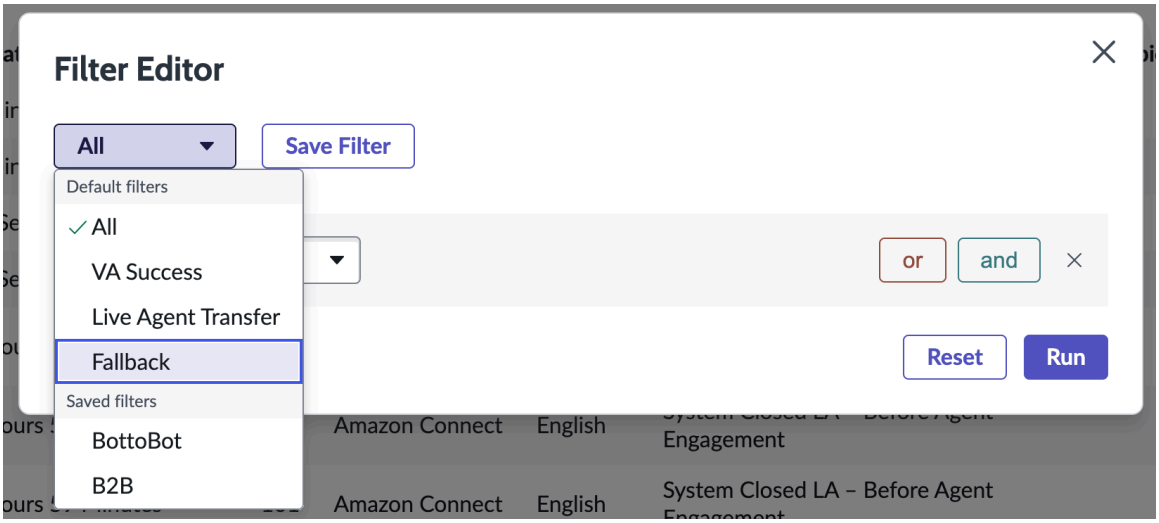
- Field: A list based on relevant tables.
- Operator: A list of operations that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

To remove a condition, select the delete icon ✕ next to the condition. To add dependent conditions in the condition builder, either select **or** or **and**. To filter the conversations list using the condition, select **Run**.

To save a condition that you created in the condition builder, select **Save Filter**. In the Save Filter pop-up window, specify a name for the condition. Users having the Chat Analytics Viewer (chat_analytics_viewer) role can select and modify your saved filters.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Saved condition



Filtering the list of users

Use the list options to filter users.

List options

Option	Description
All	All Virtual Agent users.
New	First conversation happened within the past seven days.
Returning	Users who previously used Virtual Agent.
Never Returned	Users who used Virtual Agent once, but haven't used it again. The conversation count is 1.

Selecting a **User Index** takes you to the User Details page that provides detailed information about all of a user's conversations.

Field options in the Filter Editor

User filters

Option	Description
User ID	User ID of the logged in user.
User Index	Unique number that the system creates and permanently assigns to a Virtual Agent user. This number becomes a part of conversation records.
Conversation Exists	Container for subfilter properties. For example, in the previous image, the subfilter is **Duration**.
Channel Count	Number of channels a user used. A channel is the client app the user used, such as Slack. For example, if all users have used only one channel to chat with Virtual Agent, then setting the filter value to 2 eliminates all the users in the list.
Channels	Only displays users that used the specified channel to chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User filters (continued)

Option	Description
Conversation Count	Only displays users that have the number of conversations specified in the filter.
Favorite	Only displays users that you marked as favorite, or conversely, not marked as favorite in the User Details page. For more information, see Legacy - User Details page.
First Conversation Time	Only displays users where the first conversation is within the time period specified.
Language	Only displays users that chat using the specified language.
Last Conversation Time	Only displays users where the last conversation is within the time period specified.
Time in Chat	Only displays users whose chat durations are within the time period specified, for example, more than 30 seconds.

Topics tab

Use the **Topics** tab in the Conversational Analytics dashboard to identify the least and best performing topics.

Important:

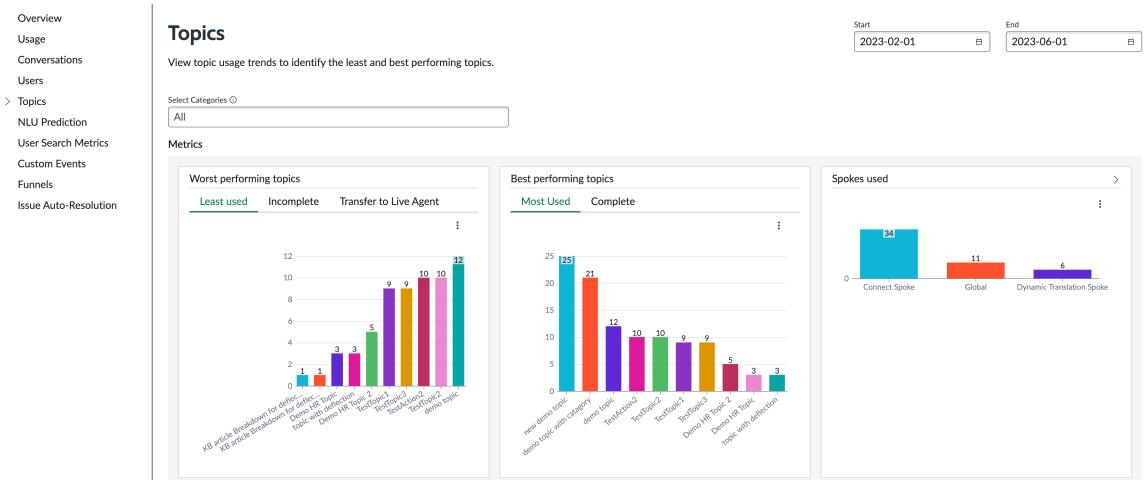
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The **Topics** tab provides insights into which Virtual Agent (VA) topics are performing well and which aren't. You can also select multiple topic categories using the **Select Categories** dropdown to visualize data based on your selection. To use the Topics tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Worst performing topics

The Worst performing topics chart provides multiple ways of detecting chat topics that didn't work. The horizontal axis lists the chat topics. The subtabs include:

- Least used—The topics used least in chats.
- Incomplete—The topics the user abandoned without resolution.
- Transfer to Live Agent—The topics the user couldn't resolve with Virtual Agent. So, the user transferred to a live agent.

Best performing topics

The topics in this chart are performing well. The horizontal axis lists the topics. The count on the vertical axis varies depending on the subtab selected:

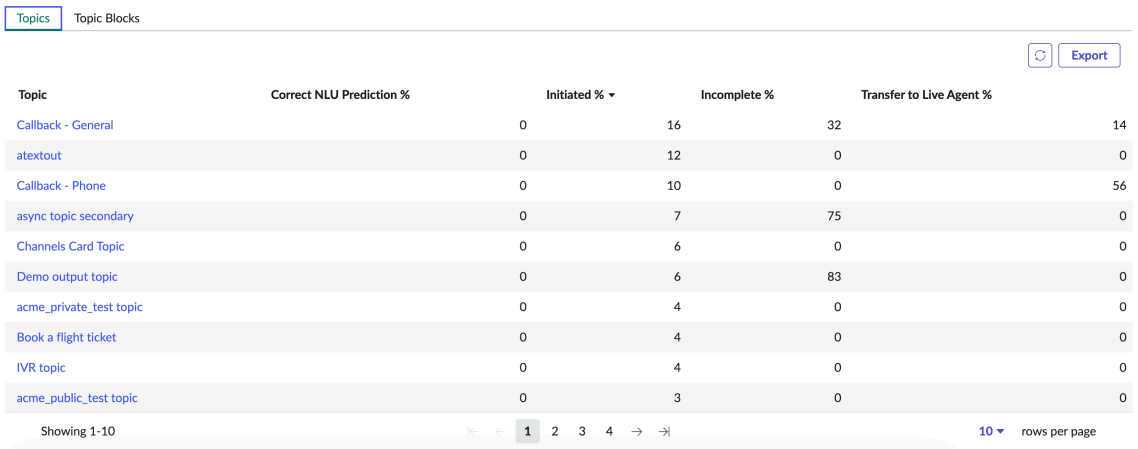
- Most Used—Number of times users used a topic.
- Complete—Number of times users completed a topic without the assistance of a live agent.

Spokes used

For more information about the spokes used, see Legacy - Spokes.

List of topics

The **Topics** page list the topics used in the date range specified in the Conversational Analytics Dashboard.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic details

Topic information	Description
Correct NLU Prediction %	Percentage of times this topic name was predicted correctly out of all times this topic name was predicted. A correct prediction means that VA showed that a predicted topic and a user selected it.
Initiated %	Percentage of times this topic ran out of all the topics that ran.
Incomplete %	Percentage of times the user didn't reach the last node in the topic out of all times this topic ran. For example, if the 2 users didn't complete all the nodes in a topic but 8 other users did, the incomplete percentage would be 20%.
Transfer to Live Agent %	Percentage of occurrences where this topic transferred from VA to a live agent out of all the time this topic ran.

List of topic blocks

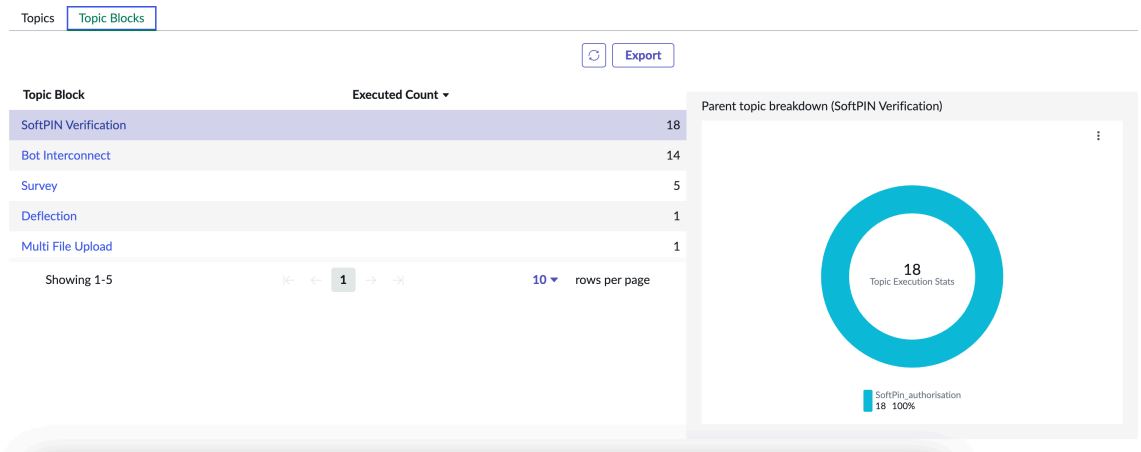The **Topic Blocks** page list the topic blocks used in the date range specified in the Conversational Analytics Dashboard.



The chart shows the number of times each topic block was executed.

Legacy - Topic categories

Use the Category page in the Conversational Analytics dashboard to see the performance of Virtual Agent (VA) topics divided into categories.

Important:

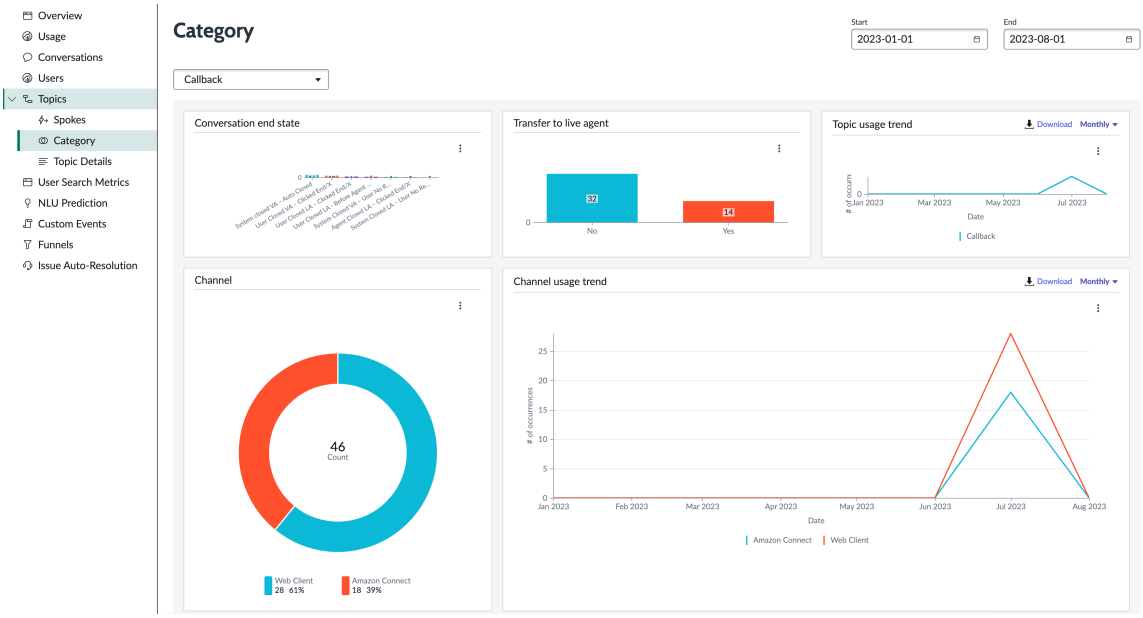
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic categories group related conversation topics. Topics can belong to more than one category. Select the drop-down list to show the categories that you can display in the visualizations. The visualizations show the aggregate performance of Virtual Agent conversations that ran in the topics belonging to a category.



For more information about creating or modifying VA categories, see Create or modify custom categories.

Topic category visualizations

Visualization	Description
Conversation end state	The number of users that reached a specific node in a topic in the VA category. In the example, six users reached the node labeled, **System closed VA - Auto Closed**. Use this field to see where topics stopped working for users. For definitions of each conversation end state, see Virtual Agent interaction records.
Transfer to live agent	The number of users that transferred from VA to a live agent in that VA category. A high number indicates that the topic is not meeting user needs.
Topic usage trend	Number of topics users used in a specified topic category over the course of the date range. The example shows the number of topics per day users used in the IT category. Use this field to monitor updates to topics.
Channel	The application the user used to chat with VA in that topic category, for example, Slack or chat widget.
Channel usage trend	Number of users using a specified channel over the course of the date range for topics in that VA category.

Legacy - Topics details

Use the Topic Details page in the Conversational Analytics dashboard to see the details of the Virtual Agent (VA) topics.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

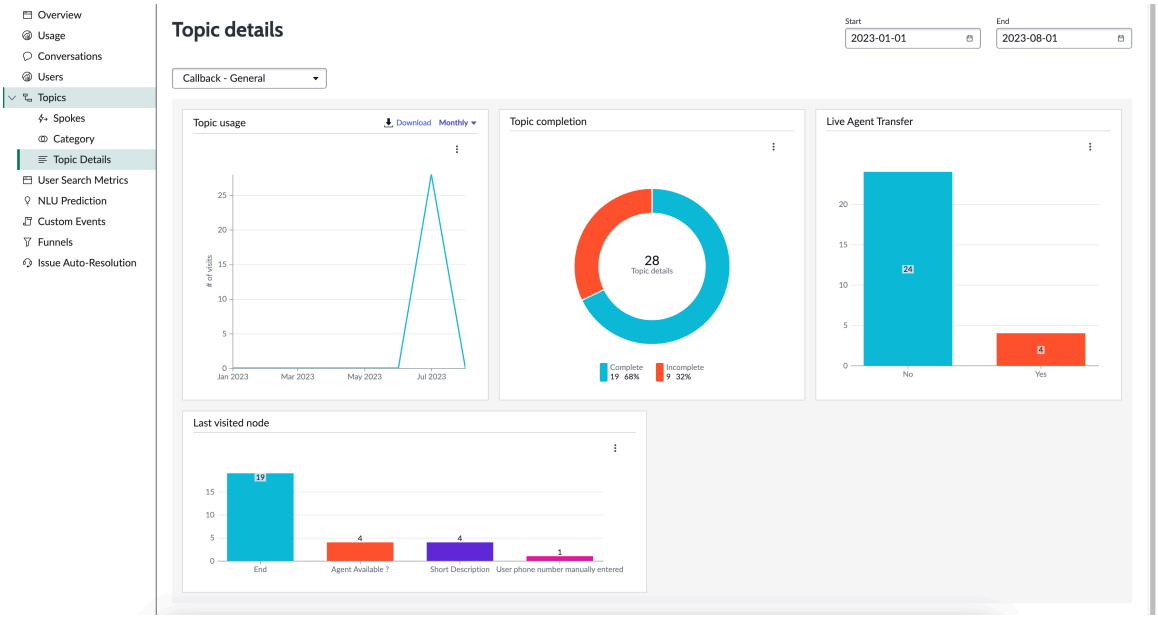
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Get additional information about the topics

You can select the visualized data selecting the topic from the list. Details about the data you selected displays.



Note:
The Y axis is evenly divided over 10 increments. If there are fewer than ten values on the Y axis, some values repeat, for example, five 1's in the previous image.

Use the list menu to display one of the chat interactions in the topic you selected. This page shows:

- **Topic Usage**—The number of times the topic was used each day.

  You can display the number of occurrences and user sessions of the selected topic by selecting **Download**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

sn_ci_analytics_st_event_occurrence

date	event_name	occurrences	sessions
2021-02-01 00:00:00	VPN Connectivity (Template)	34	27
2020-01-01 00:00:00	VPN Connectivity (Template)	0	0
2020-02-01 00:00:00	VPN Connectivity (Template)	0	0
2020-03-01 00:00:00	VPN Connectivity (Template)	0	0
2020-04-01 00:00:00	VPN Connectivity (Template)	0	0
2020-05-01 00:00:00	VPN Connectivity (Template)	0	0
2020-06-01 00:00:00	VPN Connectivity (Template)	0	0

In this example, one chat session happened on 2020-12-16.

- **Topic completion**—Number of times the user went to the final node in the topic.
- **Live Agent Transfer**—Number of VA chats transferred to a live agent.
- **Last Visited Node**—Last nodes users visited before leaving the chat.

  The presumption is the user gave up after the last node they visited.

Legacy - Spokes

Use the Spokes page to see the details of the spoke actions and subflows for the Virtual Agent (VA) topic.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

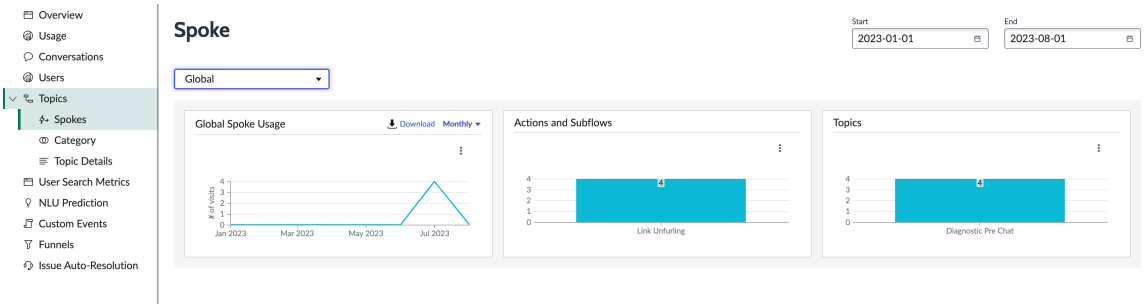
For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Spokes used

The **Spokes used** chart shows which spokes, actions, and subflows were used and how often. In Virtual Agent, conversations contain topics, topics contain spokes, and spokes contain spoke actions or subflows. Selecting a spoke from the list displays the following details.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



The three charts show:

- **Spoke Usage**—The number of times the specified spoke ran each day.

  You can display the number of occurrences and user sessions of the selected topic by selecting **Download**.

sn_ci_analytics_st_event_occurrence (2)

date	event_name	occurrences	sessions
2021-02-01 00:00:00	Global	16	16
2021-06-01 00:00:00	Global	3	3
2020-01-01 00:00:00	Global	0	0
2020-02-01 00:00:00	Global	0	0
2020-03-01 00:00:00	Global	0	0
2020-04-01 00:00:00	Global	0	0

- **Actions and Subflows**—Within the specified spoke, which actions and subflows were executed. In the previous **Actions and Subflows** chart, one action, Create Freeform VTB was triggered 22 times.
- **Topics**—Which topics executed the spoke. The horizontal axis in the **Topics** chart shows the topics that triggered the spoke. The vertical axis shows how many times the topic triggered the spoke.

Legacy - Natural Language Understanding of Virtual Agent responses

Virtual Agent (VA) uses the Natural Language Understanding (NLU) service to understand user input. Use the **NLU Prediction** tab to see how well NLU predicts intents, and to improve the intents so NLU makes better predictions.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

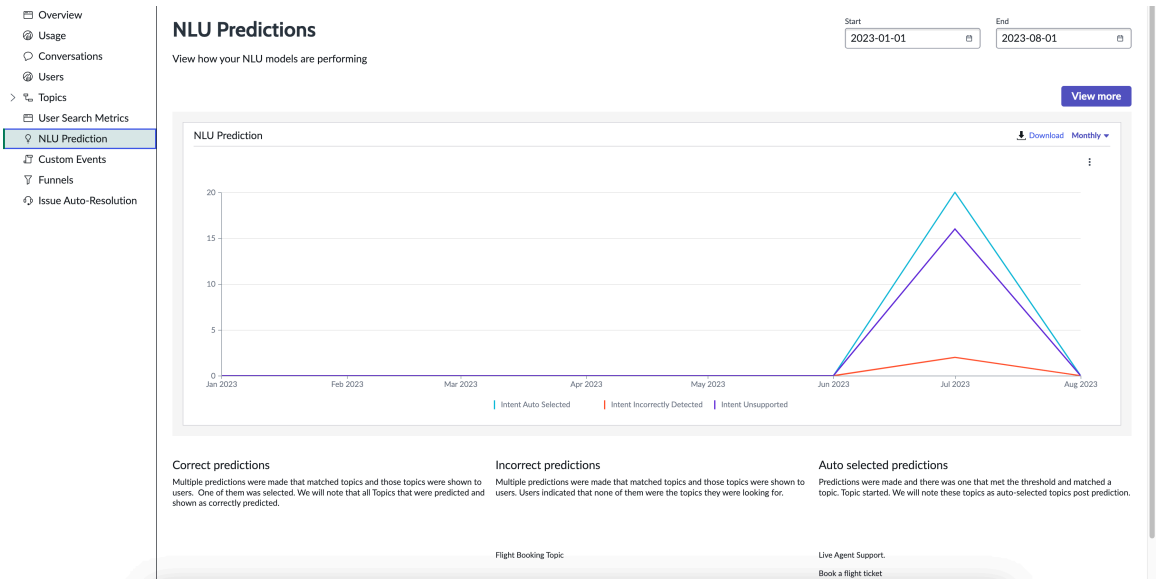
Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

The **NLU Prediction** tab on the Conversational Analytics Dashboard shows how well NLU is understanding user input in chat conversations. Virtual Agent comes with NLU models, but you can use the Activate the NLU Workbench to modify or create new models.



To use the NLU Prediction tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

NLU Prediction graph

The graph shows the daily performance of NLU predictions. The graph can show up to three lines, which represent:

- **Correct Predictions**—NLU predicted multiple intents and showed them to users. They selected one.
- **Incorrect Predictions**—NLU predicted multiple intents and showed them to users. They indicated that none of them were what they were looking for.
- **Auto Selected Predictions**—NLU predicted a single intent based on chat input from the user. Sometimes, NLU returns multiple topics, each from a separate intent, and the user selects one.

The example graph only shows Auto Selected Predictions. On 2021-01-27, one intent was auto-selected, and on 2021-01-31, two intents were auto-selected.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The vertical axis can have duplicate values because the axis has 10 increments. If the number of intents is less than 10, some values on the vertical axis appear more than once. For example, in the previous image, the maximum number of intents of all the days in the date range is 5. So, on the vertical axis there are two 1s, two 2s, two 3s, and so forth.

How are these values determined? The dashboard collects the following data:

1. Did the NLU prediction model determine an intent?
2. Did the predicted intent match the topic bound in the model to the intent?
3. What's the prediction score and did the dashboard show multiple options to the end user to specify the correct intent, or did the dashboard just display the topic associated with one intent.
4. After showing the user multiple intents, did the user select one?

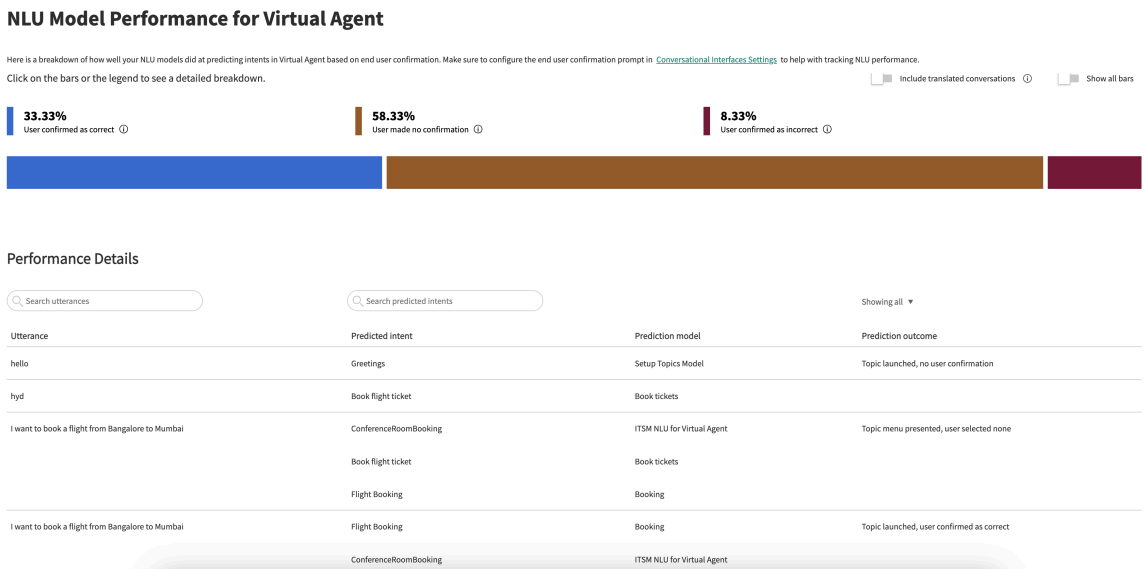
The Conversational Dashboard uses the following algorithms on the data to populate the intent lists:

- Correct Predictions—1, 2, 3, and 4 are true.
- Incorrect Predictions—4 was false.
- Auto Selected Predictions—3 was auto-selected, and there was no 4.

It's possible for intents to appear in several categories. For example, the Activate Account (Ben) intent appears in the **Correct Predictions** and the **Auto Selected Predictions** columns because NLU correctly predicted the intent and only presented a single response to the user.

Improving NLU predictions

Clicking anywhere on the graph opens the Model Performance page. It shows a summary of intents predicted or not predicted over the date range specified on the graph.



See Activate the NLU Workbench to see how to use the NLU Workbench to improve NLU predictions.

Legacy - Modify models

Test and modify the Virtual Agent models so they more accurately predict user intents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Role required: Chat Analytics Admin

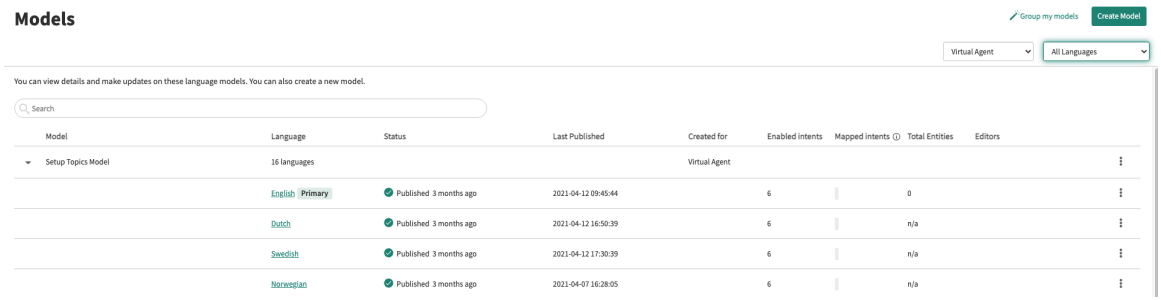
About this task

Many ServiceNow products, such as ITSM, HRSD, and CSM include NLU models for Virtual Agent (VA) topics. The NLU plugin contains entities that are common across all products. You can modify those models. To learn how to train and test the models used for VA conversations, see Natural Language Understanding.


Procedure

1. Navigate to **All** > **Conversational Analytics** > **Dashboard** and select the **NLU Prediction** tab.
2. Select **View more** .

   The Models page opens that displays the models that predict intents in your setup.




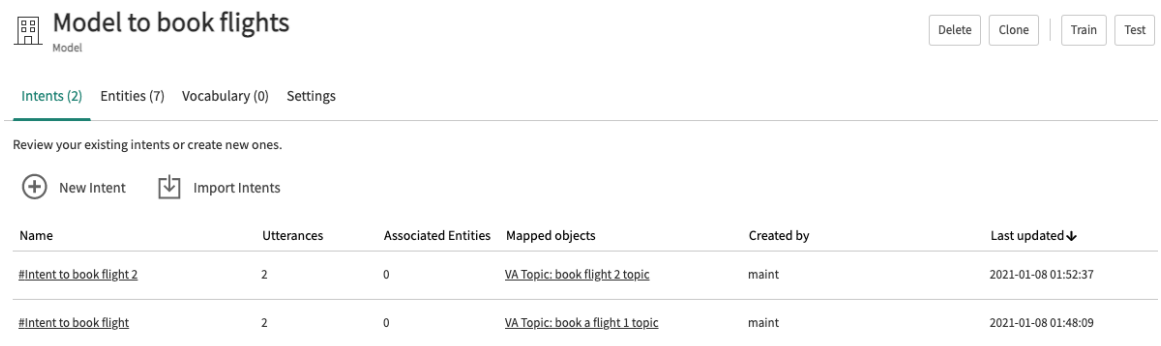3. **Optional:** If none of the models contain intents and utterances you'd like in your setup, select **Create Model** and follow the instructions in Create an NLU model.
4. Click a model to display the intents the model predicts.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

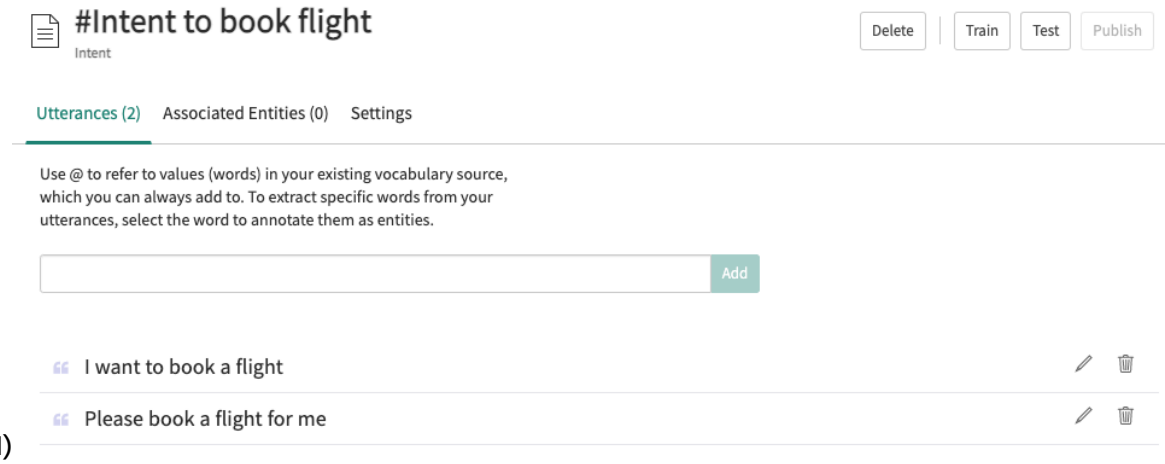5. **Optional:** Click an intent to display the utterances associated with it.




(Optional)

6. **Optional:** To create a new intent and add it to the model:

   a. Select **New Intent**.
   The **Create a new intent** dialog box opens.

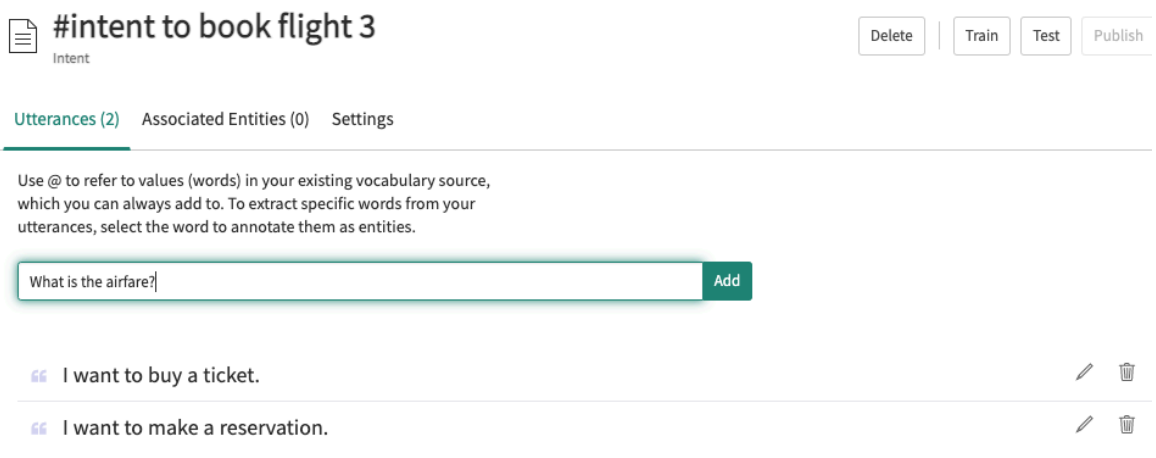   b. Enter the name of the new intent in **Intent Name**, a description of it in the **Description** field, and select **Save**.
   A page for your new intent opens.




(Optional)

   c. Enter an utterance for your new intent and select **Add**.
   You can repeat this step multiple times to add multiple utterances.

7. **Optional:** Import one or more intents by selecting **Import Intents**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

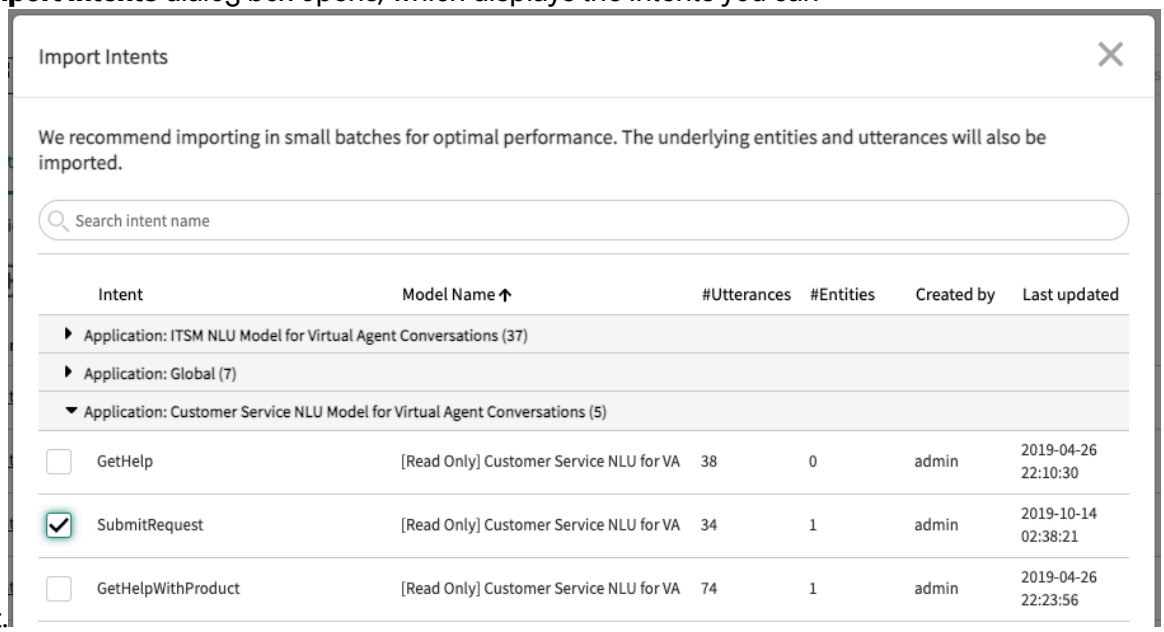The **Import Intents** dialog box opens, which displays the intents you can import.



   a. Find the intent(s) to import by entering a search term, or by clicking an arrowhead to display the intents in a folder, and then selecting one or more check boxes.

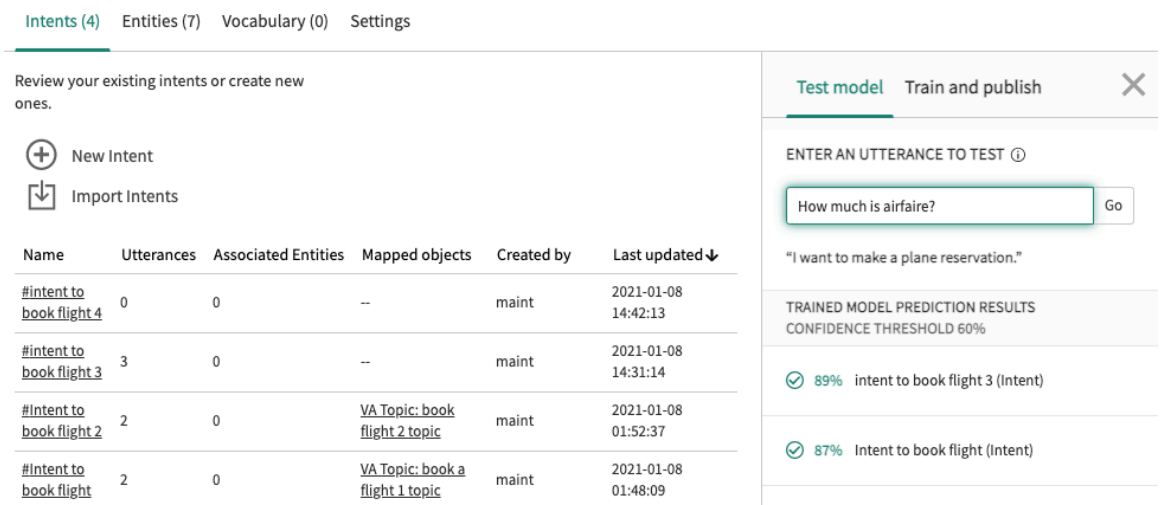
   b. Select **Import**.

8. **Optional:** If you added or imported intents:

   a. Select **Train** to add the intents to the model.

   b. Select **Train** to train the model.
   If successful, a banner at the top reads, **The model has been successfully trained.**

9. To test all the utterances, select **Test** and enter a sentence a user might enter in a chat to see if NLU understands the intent of your sentence.



10. If the models fail to predict the intent, add additional intents to the model, or utterances to the intents, as described in step 6.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Legacy - Using user search metrics with Virtual Agent

By using user search metrics with the Virtual Agent application, you can see your users' queries and the results from their searches. With these metrics, you can identify the areas where you can improve Virtual Agent to offer more meaningful search results.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Use the **User Search Metrics** tab in the Conversational Analytics dashboard to see the key details about the queries that your users searched on and their search results. By using this tab, you can get the answers to the following questions:

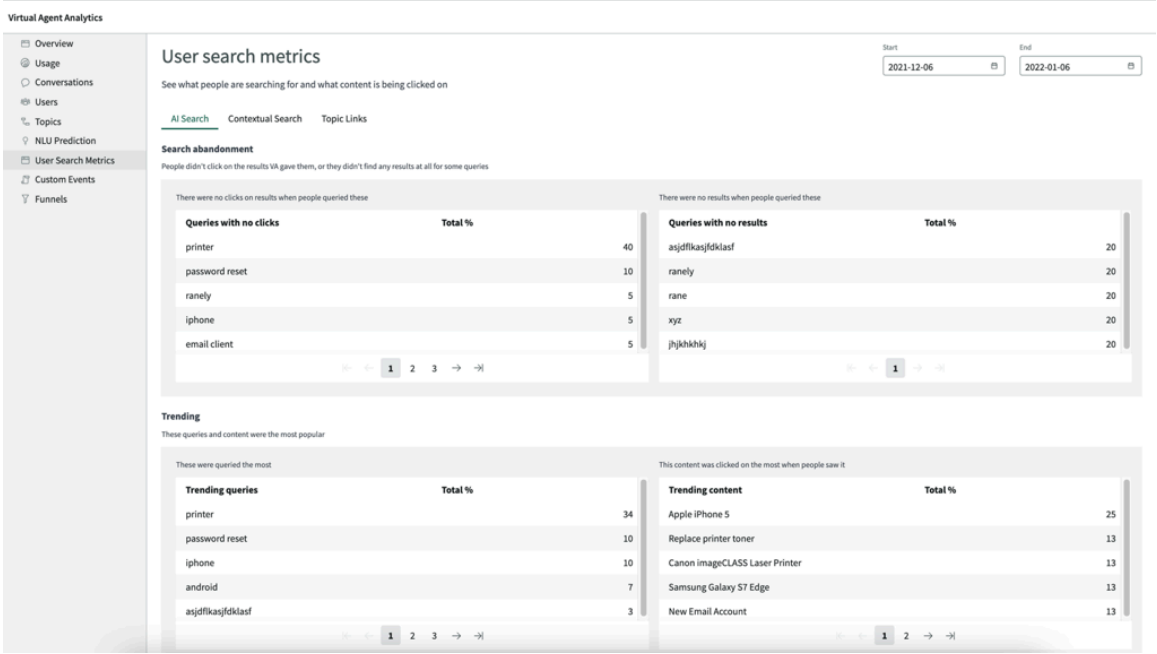
- Which search results were not useful to the users?
- Which queries did not have any search results?
- Which were the most common queries from users?
- Which search results did the users select most often?

Note:
You can also use Financial Services Remote Tables to view user-search data in Dashboards. For more information, see Remote tables.

To access the **User Search Metrics** tab, you must have the chat analytics admin role or the chat analytics viewer role. The following example shows the data included in the **User Search Metrics** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User Search Metrics tab



AI Search

Virtual Agent topics may use AI search to suggest helpful resources to the user. When a user enters a query, AI search provides the most relevant results by using intelligent query features. To know more about AI search, see AI Search . To integrate Virtual Agent with AI Search, see Improving the user experience with AI Search.

Contextual Search

Contextual search matches keywords to an existing database search to find potential matches to a query. Virtual Agent topics may use contextual search to resolve queries. For more information, see Maximizing code reuse with topic blocks.

Topic Links

Some Virtual Agent topics have links to useful resources that are embedded within them. When a user invokes one of these topics, the link shows up without having to do any back-end search.

User Search information

The following table describes the summarized User Search information that is visualized on the **User Search Metrics** tab.

User search data

Visualization	Description
Queries with no clicks	Queries that users did not click on any of the search results. Total % refers to the number of queries with no clicks expressed as a percentage of total number of queries with no clicks.
Queries with no results	Queries that did not yield any search result. Total % refers to the number of queries with

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

User search data (continued)

Visualization	Description
	no results expressed as a percentage of total number of queries with no results.
Trending queries	Queries that users most commonly asked. Total % refers to the number of trending queries expressed as a percentage of total number of trending queries.
Trending content	Search results that most users clicked on. Total % refers to the number of trending search results users clicked on expressed as a percentage of total number of trending search results.

Legacy - Custom Events tab

Use the Custom Events tab to see the list of custom events created for Virtual Agent.

Important:

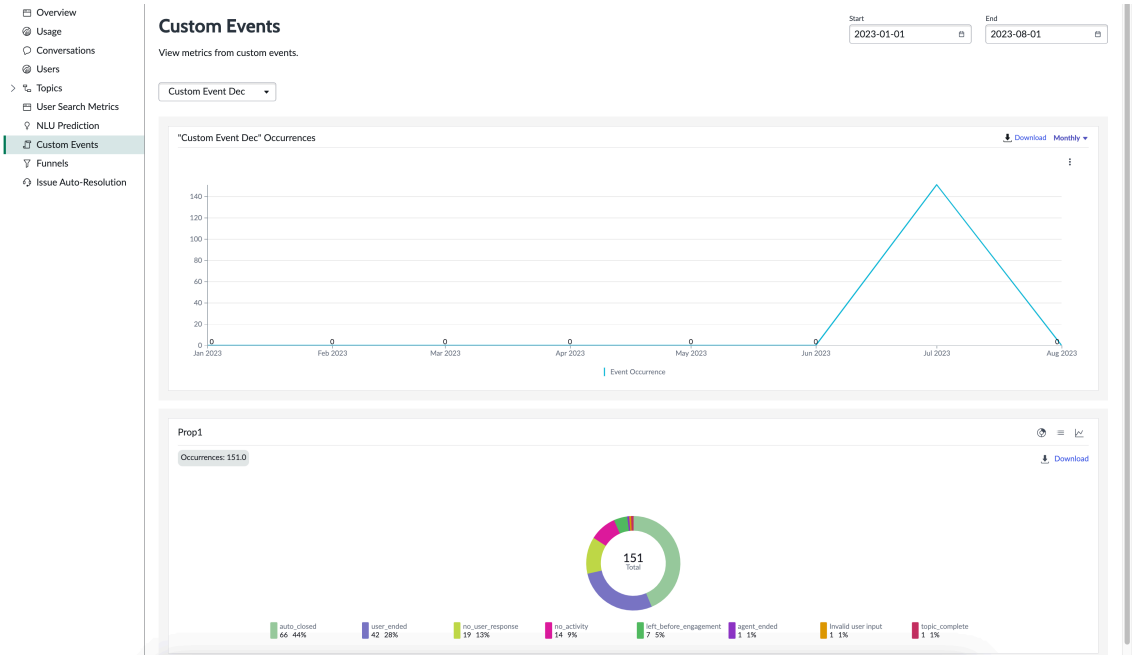
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

To use the Custom Events tab, you must have the Chat Analytics Viewer (chat_analytics_viewer) role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



The Custom Events tab shows the dates when custom events were triggered. If no one created custom events, the list of custom events is empty. The maximum number of custom events displayed is 20.

Use the drop-down list to specify the custom event you want analytics for.

The graphics are unique for each custom event. For more information about them, consult the person who created the custom event.

Funnels tab

Funnels provide cumulative filtering of conversation flows. Using funnels, you can identify whether your conversation flows are performing effectively when users chat with Virtual Agent.

Important:

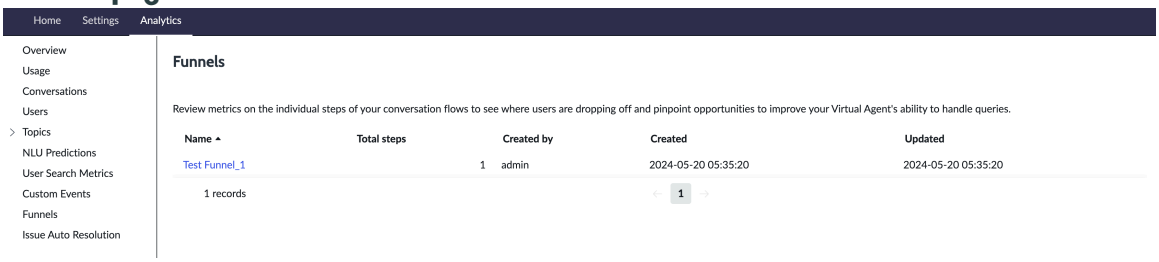
Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Funnels page



Funnels demo Watch this video for an overview of Funnels.

Overview of funnels

Funnels filter conversation flows using steps that are defined when a user creates the funnel.

A funnel can contain up to 10 filtering steps for a conversation flow. Each subsequent step further refines the results from the previous step. This type of cumulative filtering helps you to easily narrow down on the data of interest at each step of the conversation flow.

When you run a funnel for a particular date range, the system displays the following metrics that show the number of users at each step:

- The percentage and number of users who have used the specified conversation flow.
- The percentage and number of users who proceeded to the next conversation step specified in the funnel.
- The percentage of users who dropped off at a particular conversation step.
- The percentage and number of users who completed all specified conversation steps in the flow.
- The biggest drop-off point or step where users left the conversation flow.

Each step in a funnel consists of the following:

- Field: The item on which the step is evaluated.
- Operator: A list of operators that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

For more information about filtering options in steps, see Legacy - Filter options in funnels.

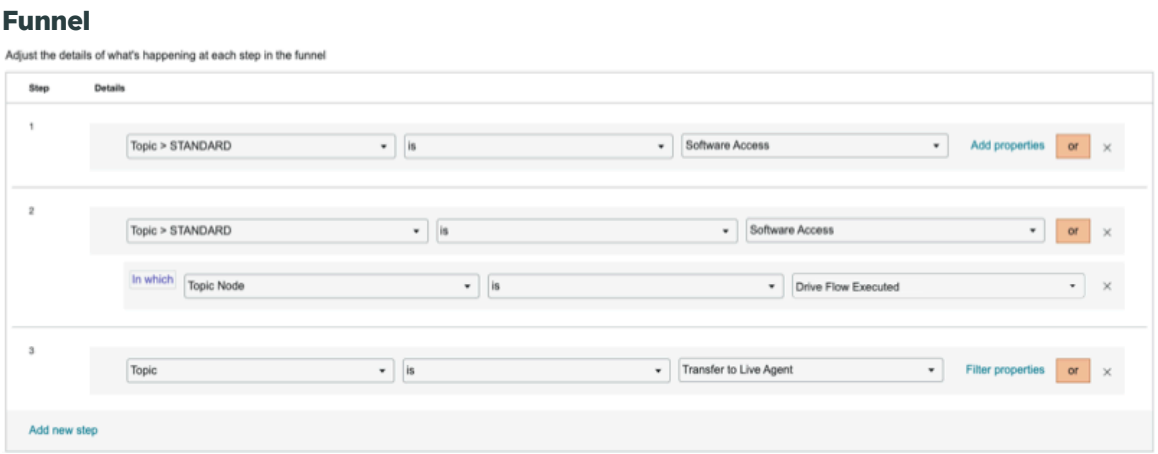
Use case for funnels

Consider an example scenario where an admin has to get insights about how Virtual Agent is handling user queries in a conversation flow. To review the efficiency of the conversation flow, the admin might look for information such as the following:

- What percentage or number of users have interacted with Virtual Agent.
- Out of the users who interacted with Virtual Agent, what percentage or number of users have followed a specific node in the topic during the conversation.
- Out of the users who used the specific node, what number of users requested for a transfer to a live agent.

For example, see the following funnel for fetching metrics on a conversational flow that provides software access.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Here, the funnel has three filtering steps:

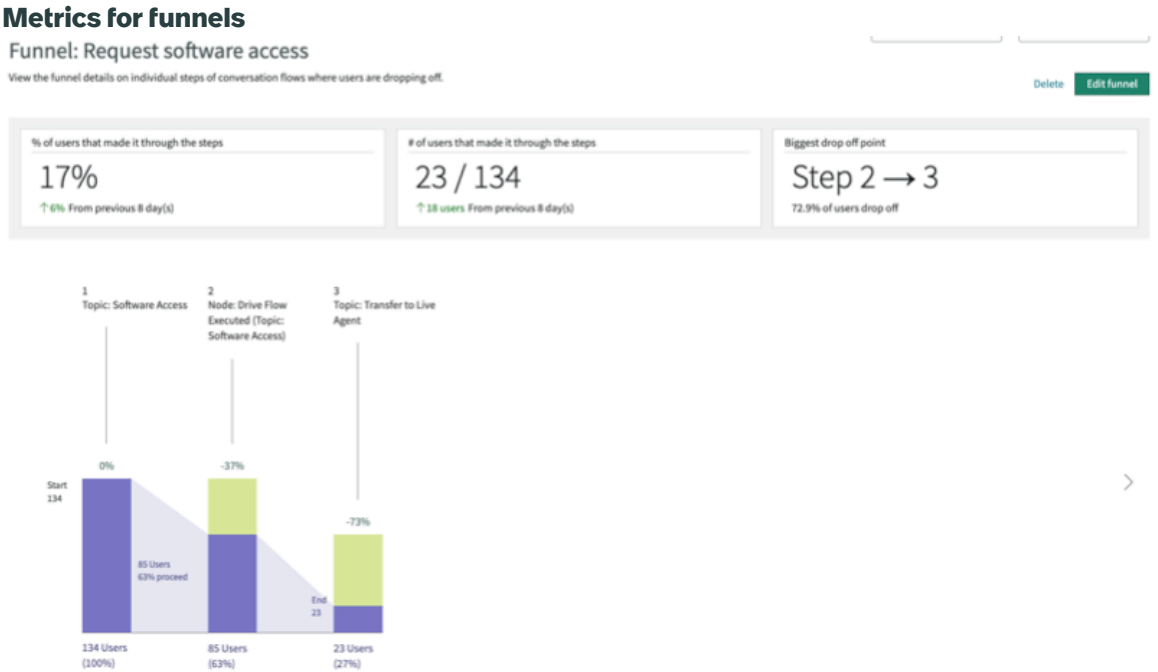
- Step 1 fetches users who have followed the **Software Access** topic while interacting with the Virtual Agent.
- Out of the retrieved users from step 1, step 2 fetches users who requested for a drive access in the **Drive Flow Executed** node.
- Out of the retrieved users from step 2, step 3 fetches users who requested transferring to a live agent.

Metrics for funnels

Using Funnels, you can easily filter conversation flows and get information as metrics. Metrics indicate what percentage or number of users are active at each step of the conversation flow.

You can improve the conversation flows based on the performance metrics derived from using funnels. The metrics help identify opportunities for improving conversation flows so that Virtual Agent can handle your user queries better.

Using the previous example, that funnel displays the following metrics:



Here, the metrics indicate the following for the selected date range:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. 134 users followed the Software Access topic.
2. Out of these 134 users, 85 users requested for a drive access.
3. Out of these 85 users, 23 users requested for transferring to a live agent.

These example metrics indicate an opportunity for improvement because 23 users requested for a transfer to a live agent.

Other benefits of using funnels

Users can create funnels to get insights on their conversation flows. Additionally, they can edit and delete existing funnels created by other users. For more information, see Legacy - Create and manage funnels.

You can compare the performance of previous and current conversation flows. Funnels show metrics for the specified date range. Additionally, it shows the comparison for the same number of days in the date range prior to the specified start date. You can know the increase or decrease in users who have made through all the steps.

Previous metrics



Legacy - Create and manage funnels

Use funnels to review the performance of your conversation flows.

Before you begin
Role required: chat_analytics_viewer, virtual_agent_admin, chat_analytics_admin, or admin

About this task
You can create, edit, and delete funnels.

Procedure

1. Navigate to **All** > **Conversational Analytics** > **Dashboard**.
2. Select the **Funnels** tab.
3. Select **New funnel**.
   The Create a new funnel page appears.
4. In the **Give this funnel a name** field, provide a meaningful and short name for the funnel.

   Note:
   Funnel names must be unique, so provide a different name for each funnel.

5. To create steps for filtering the conversation flow, select **Add new step**.
   A funnel can contain up to 10 filtering steps. Each subsequent step further refines the results from the previous step. This type of cumulative filtering helps you easily narrow down on the data of interest in the conversation flow. For more information about the filtering options, see Legacy - Filter options in funnels.
6. To define a step, select **or** and add an OR condition.

   If needed, you can do any of the following with your steps:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- To remove an OR condition, select the delete icon ✕ next to it.
- To reset a step, select the delete icon next to it.
- To remove the step, select the delete icon again.

7. Select **Create funnel**.
   The metrics for the conversation flow appear. You can select a date range in the **Start** and **End** fields for reviewing the metrics.
8. **Optional:** To edit a funnel, select the funnel name on the Funnels page, and then select **Edit funnel**.
9. **Optional:** To remove a funnel, select the funnel name on the Funnels page, and then select **Delete**.

Legacy - Filter options in funnels

Use filter options for creating steps in funnels. You can create steps in funnels for cumulative filtering of a conversation flow.

Overview of filter options

You can define each step depending on your data of interest in the conversation flow. For more information, see Funnels tab.

A step consists of the following:

- Field: The item on which the step is evaluated.
- Operator: A list of operators that is contextually generated based on the selected field.
- Value: A text entry field or a list that is contextually generated based on the selected field.

The field options are listed in the following table:

Field options

Option	Description
Conversation start (1st)	New users who had a conversation with Virtual Agent.
Conversation start (Any)	All users who had conversations with Virtual Agent. This option includes all users regardless of the number of times the users have interacted with Virtual Agent.
Events	Events that are triggered in a conversation.
Topic	List of all topics that were used in the conversation flow. The list of topics can be refined further to these topic types: • Setup topics: List of topics that provide basic conversational flows such as the conversation greeting or closing. • Standard topics: List of topics only and not topic blocks or pre-built topics. • Topic blocks: List of topic blocks only.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field options (continued)

Option	Description
	Note: When a funnel contains topics that were modified, for example, nodes were added or removed, after the funnel was created, the funnel does not consider those changes. You have to create a new funnel to account for those changes.

Legacy - Issue auto-resolution tab

The **Issue auto-resolution** tab helps you understand how well your Virtual Agent (VA) chatbot anticipates user needs. It displays information about the number of user issues intercepted by the auto-resolution service and resolved by VA.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

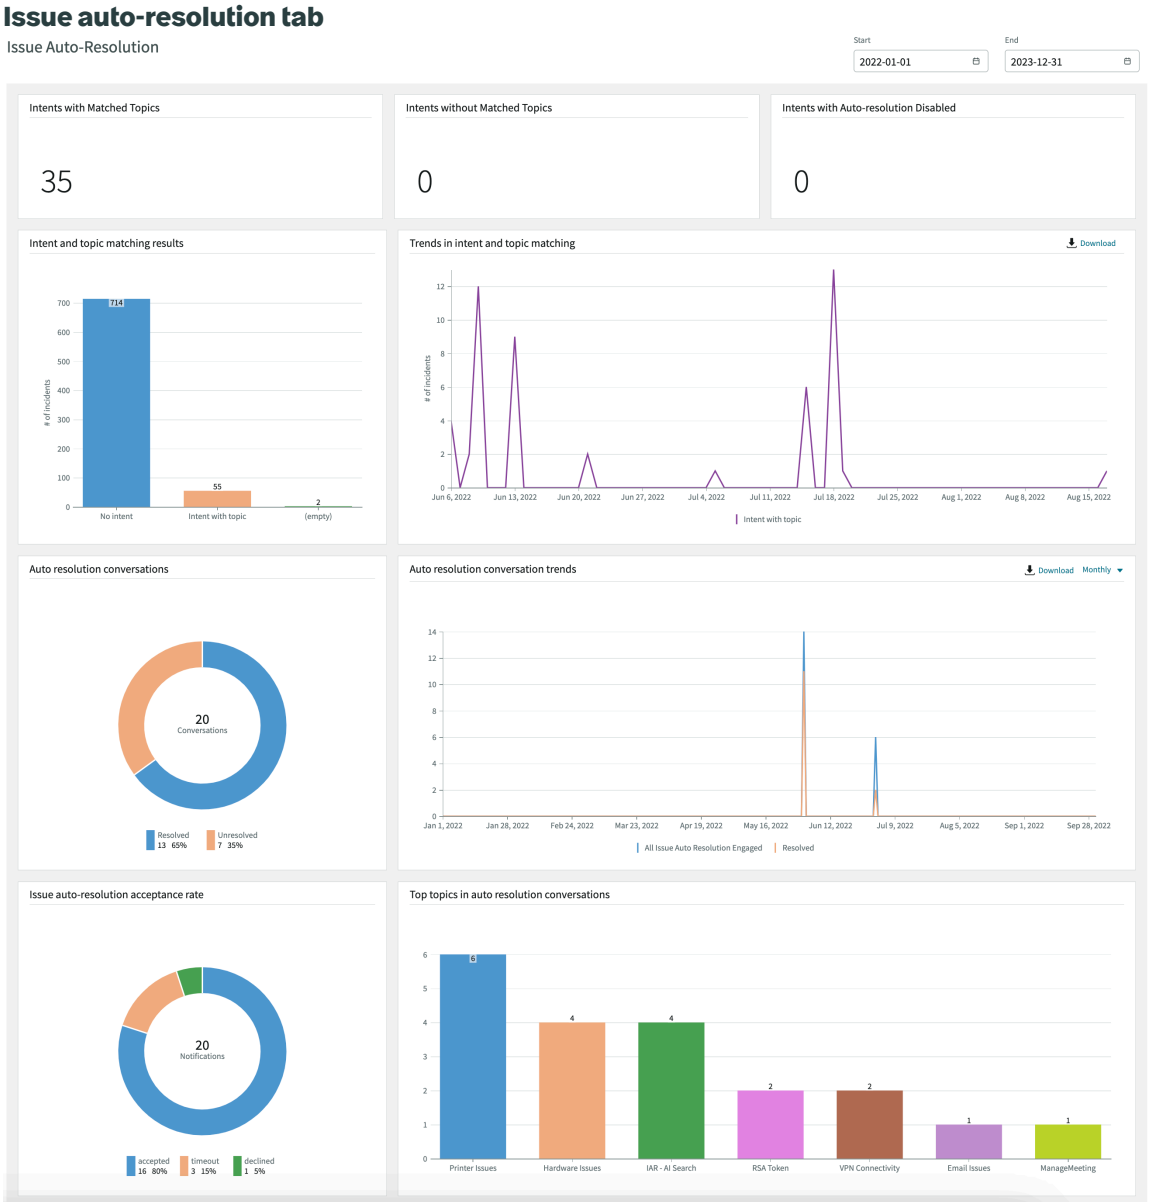
Issue auto-resolution takes place when a user is diverted to VA from a non-conversational interface. For example, a user might request a new keyboard through a service portal or email. The auto-resolution service can detect the user request and use VA to resolve the user's request in a VA chatbot session. For more information, see Auto Resolution for Virtual Agent.

The data visualizations in the **Issue auto-resolution** tab displays how well the auto-resolution service is working. This tab is available only when Issue Auto Resolution is enabled and the **Auto Resolution Configuration** record is set as active.

To access the **Issue auto-resolution** tab, you must have the chat analytics admin role or the chat analytics viewer role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Issue auto-resolution tab



Selecting the data or pointing to the data in the visualizations displays additional information about the data.

Auto-resolution visualizations

Visualization	Description
Intents with Matched Topics	Number of intents that match topics enabled for auto-resolution.
Intents without Matched Topics	Number of intents that do not have matching topics.
Intents with Auto-resolution Disabled	Number of intents that match topics not enabled for issue auto-resolution.
Intent and topic matching results	Breakdown of incidents by intent matching. For example, incidents with matching intents and topics, and incidents without matching intents.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Auto-resolution visualizations (continued)

Visualization	Description
Trends in intent and topic matching	Trend showing incidents that have intents with or without matching topics.
Auto resolution conversations	Issue auto-resolution conversations that were resolved and unresolved. Resolved means incidents are in the resolved state after the users interacted with VA.
Auto resolution conversation trends	Usage trend showing all the issue auto-resolution conversations and how many incidents were successfully resolved.
Issue auto-resolution acceptance rate	Shows the issue auto-resolution notifications that were accepted and declined by users.
Top topics in auto resolution conversations	Frequently used topics in auto resolution conversations.

Legacy - Conversational Analytics dashboard reference

Reference topics provide descriptions about the Conversational Analytics dashboard roles and system parameters to configure the dashboard.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Legacy - Conversational Analytics dashboard roles

Conversational Analytics dashboard is installed with these roles.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

To learn more about managing subscriptions, see Managing per-user subscriptions in Subscription Management and contact your account representative.

Virtual Agent administrator [virtual_agent_admin]

Provides read and write access to all dashboard-related tables, for example, sys-conversation.

Contains Roles

List of roles contained within the role.

- chat_analytics_admin
- ui_builder_admin
- chat_analytics_viewer

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Chat analytics administrator [chat_analytics_admin]

Provides access to view dashboard-related tables, create custom events, create custom formula overrides, reconfigure the dashboard using UI Builder, and set system parameters.

Contains Roles

List of roles contained within the role: chat_analytics_viewer.

Groups

List of groups this role is assigned to by default.

None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

UI builder administrator [ui_builder_admin]

Enables you to add, remove, and rearrange dashboard contents. Needs UI Builder, which is a separate ServiceNow product.

Contains Roles

List of roles contained within the role.

- workspace_admin
- canvas_user

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Chat analytics viewer [chat_analytics_viewer]

Provides read access to view the dashboard.

Contains Roles

List of roles contained within the role: sn_ace.ace_user.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Legacy - System parameter configuration

Use system parameters to configure the functionality of the Conversational Analytics dashboard.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:

Conversational Analytics dashboard is being prepared for future deprecation. It will be supported until deprecation but will no longer be available for installation. A new Conversational Analytics dashboard in Platform Analytics experience, which meets the compliance requirements of Government Community Cloud (GCC), and thus FedRAMP authorized, is available. See Conversational Analytics dashboard in Platform Analytics experience.

For details on the deprecation process, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

If you are an existing user of this dashboard and want to migrate analytics data to the new dashboard, see Migrate data to Conversational Analytics dashboard in Platform Analytics experience [KB1651556].

Use the following system parameters to configure the functionality of the Conversational Analytics dashboard. You must have the Chat Analytics Admin [chat_analytics_admin] role.

Dashboard system parameters

Functionality	System parameter	Description
Debug	sn_ci_analytics.logging.verbosity	Set this parameter to "debug" to see the debug logs for conversational analytics. The setting makes the logs verbose with debug information.
Reasons	sn_ci_analytics.ca.reason_max	Sets the maximum length of reason strings. The default is 1000 characters.
Hash	sn_ci_analytics.show_hashed_user_id	Set this parameter to true to display hashed User Ids on the Conversations and Users pages in the dashboard. The default is false.

Virtual Agent reference

Reference topics provide descriptions about the Virtual Agent Designer interface components and technical details to learn more about scripting methods, Natural Language Understanding system entities, and the Virtual Agent Interactions table.

Virtual Agent Designer interface reference

The Virtual Agent Designer interface lets you create, modify, test, publish, and localize topics, topic blocks, and custom controls.

Virtual Agent Designer provides the following views. Some tabs may not be available, depending on how you configured your instance or the type of topic you are working with.

Assistant Designer Asset library

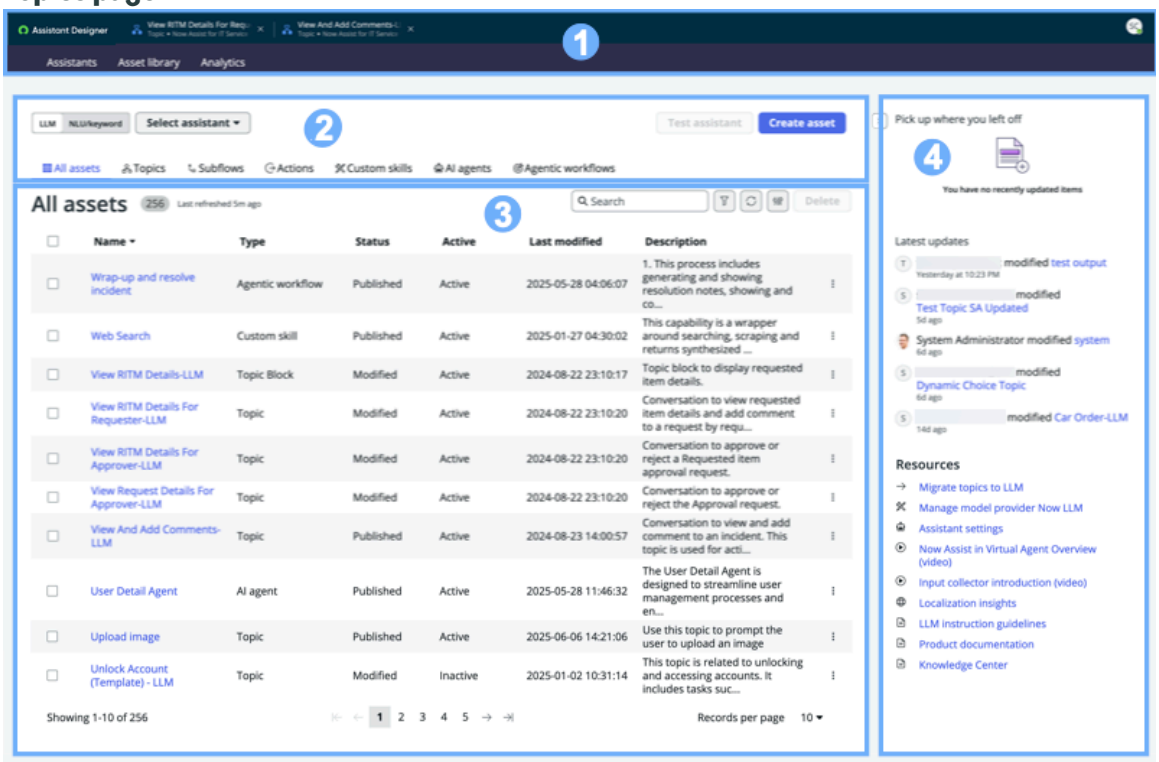
The Assistant Designer Asset library lists all LLM assets and NLU/Keyword topics available in your instance. You can also create more topics, subflows, actions, custom skills, AI agents, and agentic workflows.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

To navigate to Virtual Agent Designer, select **All** > **Conversational Interfaces** > **Virtual Agent** > **Designer**.

Topics page



Options in the Asset library

Sections	Fields and descriptions
1. Navigation header bar	Header bar for navigation and Virtual Agent Designer settings. • **Assistant Designer** tab: Select this tab while viewing a topic in the Virtual Agent Designer canvas to return to the Assistant Designer Asset library page • Topic tabs: Shows any open topics as navigation tabs. Hover over a tab to show its topic type and scope. Select a topic's tab to view that topic. Select the close icon ✕ on a tab to close the topic. **Note:** If you close a topic with unsaved changes, a warning window opens. Select **Cancel** or **Close without saving**. If you open more tabs than your browser window can display, a drop-down tab holding the overflowing topics appears on the header bar. Select the drop-down tab followed by the topic that you want to view.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Options in the Asset library (continued)

Sections	Fields and descriptions
	• User preferences: Icon to access preferences and settings. Hover on the icon to see user name and roles. Select the icon to shows Virtual Agent Designer settings for the home page. Toggle **Group tabs by app scope** in the settings window to group or ungroup tabs by their application scope. **Note:** Each group of tabs has a random color when you group tabs by app scope. For more information on changing the scope, see Change the application scope for Virtual Agent Designer topics.
2. Topic list controls	Controls for filtering, managing, testing, creating, and deleting Virtual Agent topics. • **LLM** or **NLU/keyword** toggle switch: Use this switch to select between LLM or NLU/keyword discovery type topic lists. ○ LLM controls: ▪ **Select Assistant**: Drop-down menu to filter topics associated with a given LLM assistant. **Note:** Hover over the tooltip icon (ⓘ) to see information about the assistant you have selected from the drop-down menu. ▪ **Test Assistant**: Opens the testing window for the topics that are associated with the assistant you selected. **Note:** If you have not filtered topics with **Select assistant**, the option **Test in Now Assist panel** appears in this drop-down menu. For more information on associating an LLM assistant with a topic, see Create a Virtual Agent topic. ▪ **All assets**: Button to view all LLM topics. ▪ **Topics**: Button to view only basic LLM topics. ▪ **Subflows**: Button to view only conversational subflows. ▪ **Actions**: Button to view only conversational actions. ▪ **Custom skills**: Button to view custom skills from Now Assist Skill Kit. ○ **AI agents**: Button to view list of AI agents. For more information, see Exploring Now Assist AI agents. ○ **Agentic workflows**: Button to view list of Agentic workflows. For more information, see Now Assist agentic workflows.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Options in the Asset library (continued)

Sections	Fields and descriptions
	○ NLU controls: ○ **Test active topics**: Button to test all active NLU/keyword topics. • **Create Asset**: Button to create a new Virtual Agent topic. For more information, see Create a Virtual Agent topic. • Search icon: Opens a field to enter a string to search for a match in the topic list. When you enter a string, the text is used as a condition in the Filter. • Filter icon: Opens a menu to add filtering conditions that contain a field, operator, and value(s). If you define a condition or enter a string using the *Search* button, you can remove it by selecting the delete condition icon. • Refresh list icon: Refreshes the currently defined list of topics. • Edit columns icon: Opens a menu to reorder or change the columns in the topic records list from their defaults.
3. Topic records list	List of all topics available, filtered by topic list controls. Default columns include the following. • **Name**: Name given to the topic when created. • **Type**: Indicates the topic types. ○ Topic ○ Topic block ○ Small talk ○ Custom input ○ Custom output ○ Action ○ Subflow • **Status**: Indicates the status of the topic: ○ Draft ○ Published ○ Modified • **Active**: Indicates whether the topic is *Active* or *Inactive*. • **Last modified**: Time and date when the topic was last modified. • **Description**: Short description entered when you create the topic. For more information, see Create a Virtual Agent topic. • **Promoted in**: Lists the assistants in which the asset is promoted.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Options in the Asset library (continued)

Sections	Fields and descriptions
	• Show actions for this row ⋮: Icon to open a menu with the following options. ○ **Promoted**: Option to toggle the topic's *Promoted* status. For more information, see Promote or demote LLM conversational subflows, actions, and topics in Virtual Agent Designer. ○ **Discoverable**: Option to toggle the topic's *Discoverable* status. ○ **Visible**: Option to toggle the topic's visibility to users. ○ **Active**: Option to toggle the topic's *Active* status. ○ **Conversational Settings**: Option to open a window with information on the asset. ▪ *Name*: Name of the asset. ▪ *Asset type*: Type of the asset. ▪ **Link to asset**: Option to open a tab for the asset in Virtual Agent Asset library. ▪ *Description*: Asset description used for topic discovery. This description is also shown in the asset's **Properties** tab and its *Description* value on the assets table on the Assistant Designer Asset library page. This option appears if you have selected **LLM** on the **LLM and NLU/Keyword** toggle switch. For more information, see Conversational settings for Assets in the Asset library. ○ **Remove from assistant**: Option to remove asset from an LLM assistant. You must first select an assistant from the **Select assistant** drop-down menu to filter assets. This option appears if you have selected **LLM** on the **LLM and NLU/Keyword** toggle switch. ○ **Delete**: Option to delete the topic. **Note:** If you select **Delete**, a dialog box opens. Select **Delete** to continue or **Cancel** to stop. A check mark appears next to any menu option when it is activated. **Note:** If the topic is inactive and you try to promote it or make it discoverable or visible, you see a message reading `This asset must be active in order to be promoted, discoverable, or visible.` Set the topic to *Active* under the Show actions for this row ⋮ to perform those actions.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Options in the Asset library (continued)

Sections	Fields and descriptions
4. Side panel	Collapsible panel showing recently opened topics and helpful resources. Select the open or close panel icon / to toggle the panel open or closed. • Pick up where you left off: List of the last 3 topics you opened and when they were last updated. Select any from the list to open that topic. • Latest updates: List of the last 5 users to open a topic, along with the topic name and when it was last updated. • Resources: Links and features available for LLM or NLU topics. You can view localization insights, product documentation, and migrate NLU topics to LLM from here. **Note:** The **Migrate topics to LLM** option appears in the Resources section only if you have activated Now Assist in Virtual Agent.

Virtual Agent Designer legacy Topics page

The Virtual Agent Designer legacy home page lists cards for available topics in your instance.

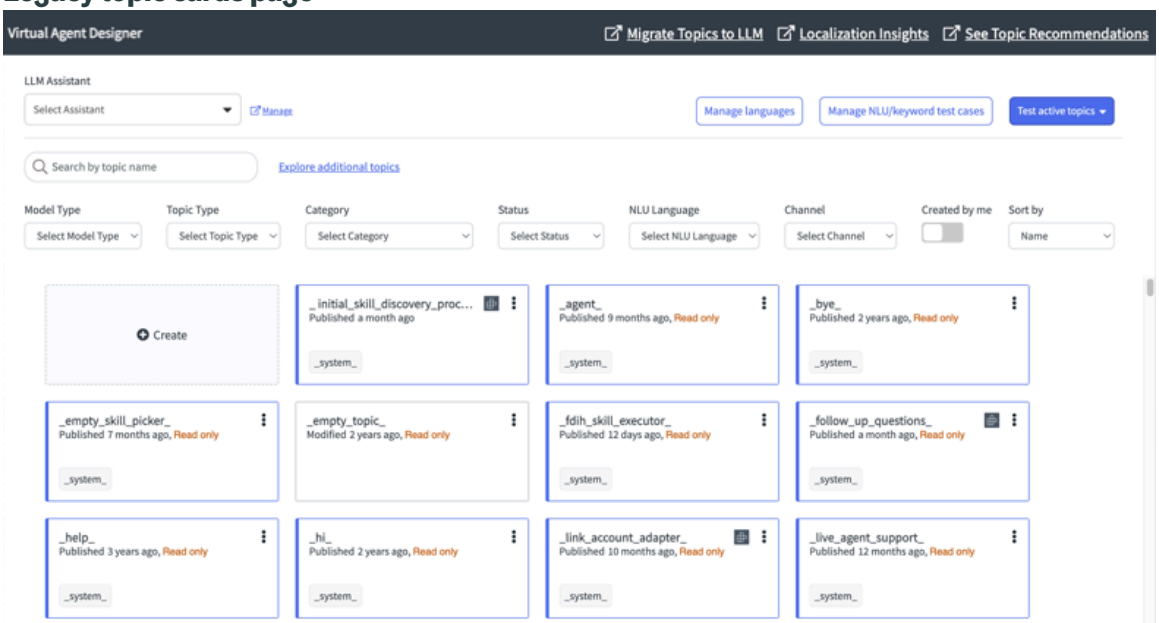
Legacy topic cards page



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic cards

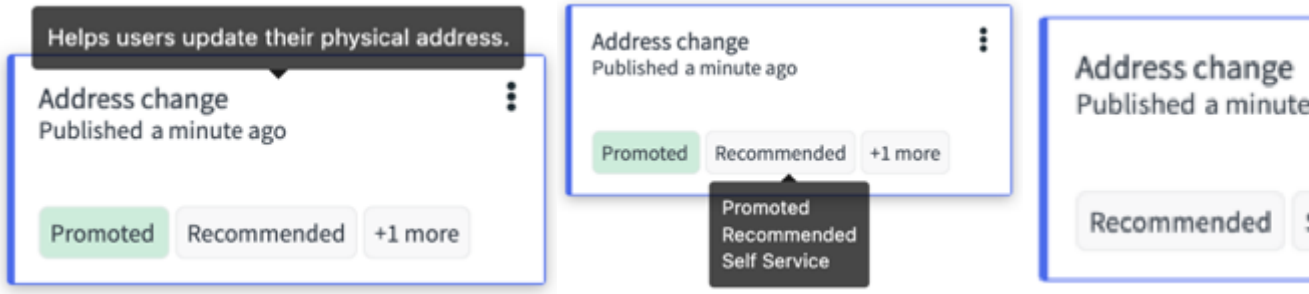Each topic is represented by a card on the topic page. A description of the topic (from the **Properties** tab) appears when you hover over the title, and all categories are shown when you hover over the list of tags.



Filters and options in the Topics page

Field	Description
Localization Insights	Button that opens the Localization Insights dashboard. It shows reports of topics with their translation statuses. For more information, see Localization Insights dashboard.
See Topic Recommendations	Button that opens Topic Recommendations (if installed). Review recommendations and manage jobs. For more information, see Using Virtual Agent Topic Recommendations.
Manage languages	Button that opens the Manage languages page. You can view the localization status of an NLU model and request translations for the model and related topics. This field is available only when NLU discovery is enabled on the instance.
Manage NLU/keyword test cases	Button that opens the Manage test cases page, where you can manage automated testing for Virtual Agent topics. For more information, see Automated testing for Virtual Agent topics that use NLU topic discovery.
Test Active Topics	Button that opens the chat test window, which runs active topics in the Virtual Agent chat widget. Use this feature to test and verify that your active topics work as intended.
Search by topic name	Option for finding a topic that matches the name or search string that you enter.
Explore additional topics	Link that opens the All prebuilt topics page, which shows prebuilt topics that are available when you activate their dependent spokes or plugins. For more information, see Virtual Agent Designer All pre-built topics page.
Topic Type	Filter for displaying Virtual Agent assets: • **Topics**: Lists only topics (and not blocks or custom controls), including prebuilt topics. • **Topic Blocks**: Lists prebuilt and custom topic blocks. • **Setup Topics**: Lists topics that are basic conversational elements, such as the conversation greeting or closing.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Filters and options in the Topics page (continued)

Field	Description
	• **Small Talk Topics**: Lists topics that serve as casual conversations between the bot and end users, where the bot answers questions generally not related to the original task or issue. • **Custom Controls**: Lists custom controls that represent custom components used in a conversation. By default, the Topics page lists all active (published) and inactive (in development) assets, unless you use filters to list only certain asset types.
Category	Filter that displays a list of topics belonging to a category that you specify. A category is a label that identifies a group of assets, such as setup topics or prebuilt topics for a particular business application. You can also define your own custom categories. For details, see Create or modify custom categories.
Status	Filter that displays a list of assets by their state: • **Active**: Display only published assets • **Inactive**: Display only assets in development
NLU Language	Filter that is displayed only if you're using multi-language NLU models. Lists NLU -enabled topics by the language that you select. Enable the languages for the NLU service in NLU settings. This field is available only when NLU discovery is enabled on the instance.
Channel	If other channels are configured for the instance, this filter lists topics by the channel (chat client) that you select. The default channels for Virtual Agent are the web chat client and the messaging integrations for Slack, Microsoft Teams, Workplace, and Facebook Messenger. Your instance may have other channels, such as SMS that were created using custom chat integrations.
Sort by	Filter that displays topics by the sort filter that you select: • Name: Specified topic or asset. • Updated time: Recently updated topics.
Created by me	Option that, when enabled, displays only the topics that you created.
+ Create	Option that opens the Properties page to create a topic or topic element and define the topic properties.
Topic actions icon 	Icon that opens a drop-down menu with the following options:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Filters and options in the Topics page (continued)

Field	Description
	• **Promote topic**: Adds a `Promoted` flag to the topic. Primary assistants only show promoted topics associated with them and not their secondary assistants' promoted topics. The option is deactivated and a tooltip appears when you try to promote any of the following: ○ Setup topics ○ Topic blocks ○ Small talk topics ○ Unpublished topics ○ Any NLU/Keyword topics **Note:** You can promote NLU topics in Conversational Interfaces settings, under **Virtual Agent Custom Greetings and Setup**. For more information, see Configure a Virtual Agent chat experience. • **Demote topic**: Replaces the **Promote** option in a promoted topic, to remove the `Promoted` flag. • **Delete topic**: Opens a confirmation dialog box to delete the topic.

Virtual Agent Designer All pre-built topics page

When you install pre-built conversations, such as ITSM Virtual Agent, some topics may not appear on the home page unless you install their dependent plugins. This page shows the additional topics that are available.

For more information about ITSM pre-built topics, see ITSM Virtual Agent.

Explore all pre-built topics page

Field	Description
Topic	Name of the topic. If its Status is Available to use, select the topic to open it in Virtual Agent Designer.
Documentation	Link to related ServiceNow documentation for the topic.
Dependencies	The plugins that are needed to use the topic. Select a dependency to go to its documentation and learn how to install it. **Note:** Some plugins may require the admin role to install.
Status	Value denoting whether you need to install a spoke or plugin, or if the requirements are met and the topic is available to use.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

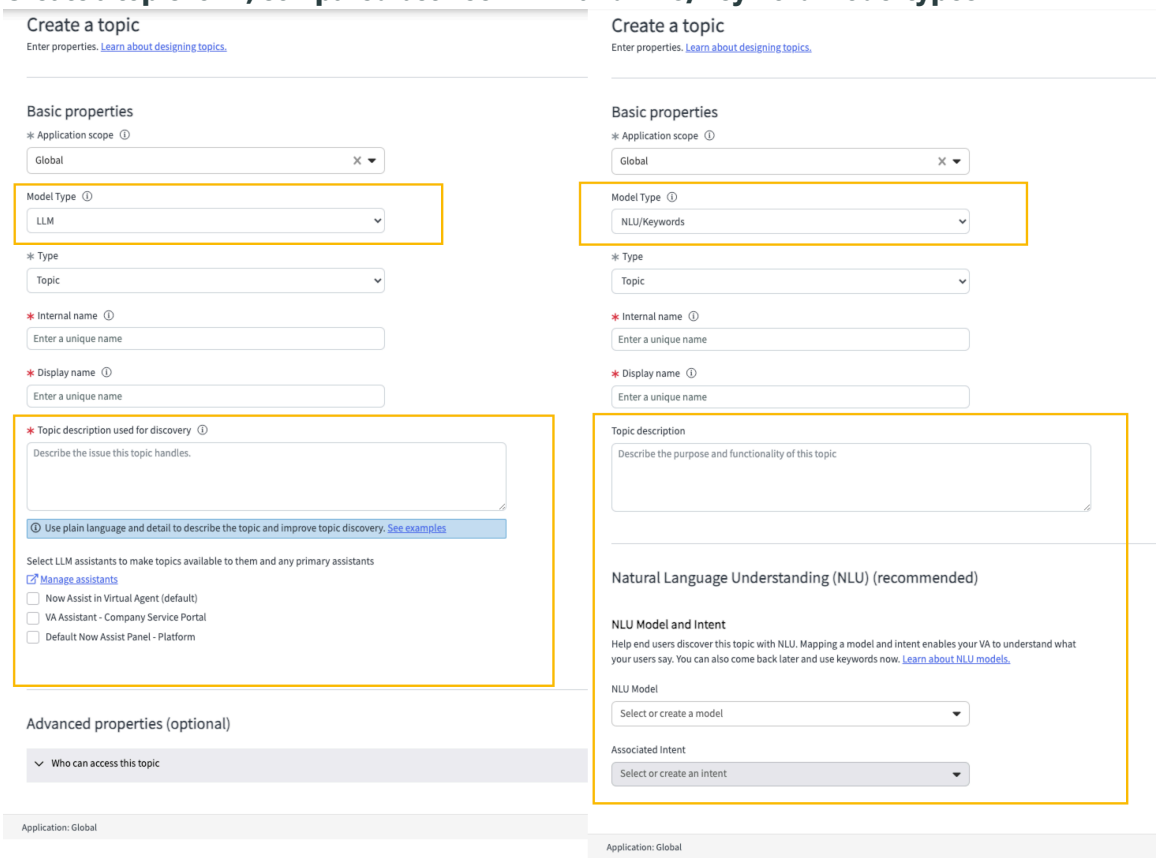
Create a topic form

The Create a topic form is used to set the properties for a new conversational topic for Virtual Agent.

The Create a topic form layout is similar to the Edit topic properties form layout found in the Topic Properties tab. When you finish creating a topic using this form, the model type and topic types are locked in the Properties tab.

Note:
Large language model (LLM) topics are faster and easier to set up and configure compared with NLU topics. The LLM model type doesn't need you to select, configure, or train models or intents. For more information, see LLM topic discovery in Virtual Agent.

Create a topic form, compared between LLM and NLU/Keyword model types



Create a topic form

Field	Description
Application scope	Select the application scope where the topic becomes available. **Note:** The application scope cannot be changed once the topic is created.
Model Type	The **LLM** value is used for topic discovery within LLMs, and the **NLU/Keywords** value is used for either keyword or NLU discovery. For more information, see LLM topic discovery in Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a topic form (continued)

Field	Description
	Note: If this field doesn't appear, verify that both the Now Assist panel and Now Assist in Virtual Agent are turned on. For more information, see Activate Now Assist panel standard chat and Configuring assistants overview.
Type	List of assets that you can create. Select **Topic**.
Internal name	Internal name for topics, small talk topics, and setup topics that reflects its business purpose. Internal name displays on the Virtual Agent Designer Topics page and must be unique across the platform.
Display name	Topic name that displays to users when they interact with Virtual Agent. Display name must be unique for either NLU/Keywords or LLM model type.
LLM topics [LLM topic discovery only]	
Topic description used for discovery	A detailed explanation of the LLM topic's purpose, which differentiates it from other topics. The description is used for topic discovery, so the more detailed and specific the topic description is, the more likely it will be to find a good match. A weak example would be: `Help users see how many vacation days they have left.` A stronger example would be `This topic is about a holiday calendar for employees in a company. Users can ask for the holiday list or company holiday for a specific year, specific date, inquire about a specific holiday, or ask if they have a day off for a particular holiday. The topic also covers the availability of a holiday calendar and specific holidays like Freedom Day and wellbeing Day.` For more information, seeLLM description and instruction guidelines for Virtual Agent topics.
Select LLM assistants to make topics available to them and any primary assistants	The LLM assistant that you associate with the topic for more accurate topic discovery. If you established primary and secondary assistants during the Now Assist in Virtual Agent guided setup, an on-screen message explains whether the selected assistant is a primary or secondary assistant. When testing a primary LLM assistant, topics from the secondary assistants are included in topic discovery. To view the LLM assistants and their hierarchy, select **Manage assistants**. If you associate a topic block and a related topic with the same LLM assistant, both are shown as associated with that assistant. When you add an LLM assistant or remove one from your topic, the topic reverts to unpublished. When you associate an LLM topic with an LLM assistant and publish it, a record for the association is created in the Profile and Document Mapping [sys_cs_document_context_profile] table. If you dissociate the Setup topic from the LLM assistant before republishing, the record is deleted.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a topic form (continued)

Field	Description
	For more information, see LLM assistants.
Natural Language Understanding (NLU) topics [NLU/Keywords topic discovery only]	
Topic description	Brief explanation of the topic purpose and functionality. If you use single quotes (' ') in your description, do the following to avoid problems with your conversation: **1.** Navigate to **All**, then enter `sys_properties.list` in the filter. **2.** Search for and select `glide.ui.escape_all_script`, then set its value to **True**.
NLU Model	Natural Language Understanding model to be mapped to the topic. The model contains the user utterances that are associated with the trained intents and entities. This combination enables your bot to understand what a user says. Do one of the following: • Choose an existing model. • Select **Create Model** to create a new model group. **1.** In the **Model Name** field, enter a name for the new model group. **2.** In the **Intent name** field, accept the default value or enter a name for the new intent. **Note:** New models are created in **Draft** state. **Tip:** To see how and where the NLU model is used, navigate to **NLU Workbench** > **Models**, and sort the **Created for** column.
Associated Intent	The intent, when recognized by Virtual Agent, that launches this topic. If you specified or created a model, the intent is required. Do one of the following: • Choose an existing intent. • Select **Create intent** to create a new intent. In the **Intent Name** field, accept the default value or enter a name for the new intent. **Note:** This option is not available for read-only models.
Enable DialogActs	Toggle switch (active by default in new topics) to enable Virtual Agent to detect when you modify utterances or applies updates in an NLU model, and dynamically reacts to unexpected utterances and modifications. Toggle to the off position to prevent users from using the keyboard instead of the options available in the topic. For more information, see Dialog Acts for Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a topic form (continued)

Field	Description
	Note: This toggle is decoupled from the topic switching option found in all User Inputs aside from Grouped Choice and File Picker. It's available for all topic types aside from a Topic Block. This feature is currently available only for English.
Confirm modified values with users	Toggle switch to enable Virtual Agent to send a confirmation message to the user when the Virtual Agent detects a value change. This value is Active by default. **Note:** This toggle appears when **Enable DialogActs** is activated.
Advanced properties (optional)	
Who can access this topic	
System Roles	Roles that a user must have to view and run the topic. If a topic is public (available to users, including guest users, who aren't authenticated in the ServiceNow platform), select only the Public role.
Channels	Chat clients in which the topic or topic block will run. These channels are different from the default channels that are natively supported by Virtual Agent. Your instance may have additional channels for custom chat integrations created for it. For more information about channels, see Deploying Virtual Agent topics in other channels.
Context	Expression logic to specify a condition for presenting this topic to users. The condition must evaluate to true. You can set this field using either the condition builder or a script. • **Condition**: Use the condition builder to add or edit conditions. • **Script**: Use the script editor to create or edit a script that contains a condition statement.
Live agent	
Live agent context variables	Live agent context variables that are defined in the General Chat Settings. Select the variables that provide dynamic context, which means information from the Virtual Agent chat. This information is transferred from the bot conversation to the live agent. For information about the default list of live agent variables, see Live agent chat context variables.
Available for Agent Autopilot	Toggle switch that determines whether the topic is available to a live agent. When enabled, an agent can search for and invoke the topic. For details, see Conversation Autopilot. Applicable to only keyword or NLU topic discovery.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Create a topic form (continued)

Field	Description
Additional	
Resume flow after topic switching	Toggle switch that lets the user return to the original conversation after changing topics during a conversation. Applicable to only keyword or NLU topic discovery. Not applicable to Small Talk topics.
Categories	Label used to identify and group-related topics, topic blocks, or custom controls.
Keywords [NLU/ Keywords topic discovery only]	List of key phrases or terms that users enter to initiate the conversation with the Virtual Agent. Press **Enter** after each phrase. Keywords are also used for languages that are currently not available in NLU.

Topic Properties tab

Use the **Topic Properties** tab to identify a topic and how it's used. You can control who uses the topic and what channels it can run in.

The properties that you can specify depend on the method of topic discovery.

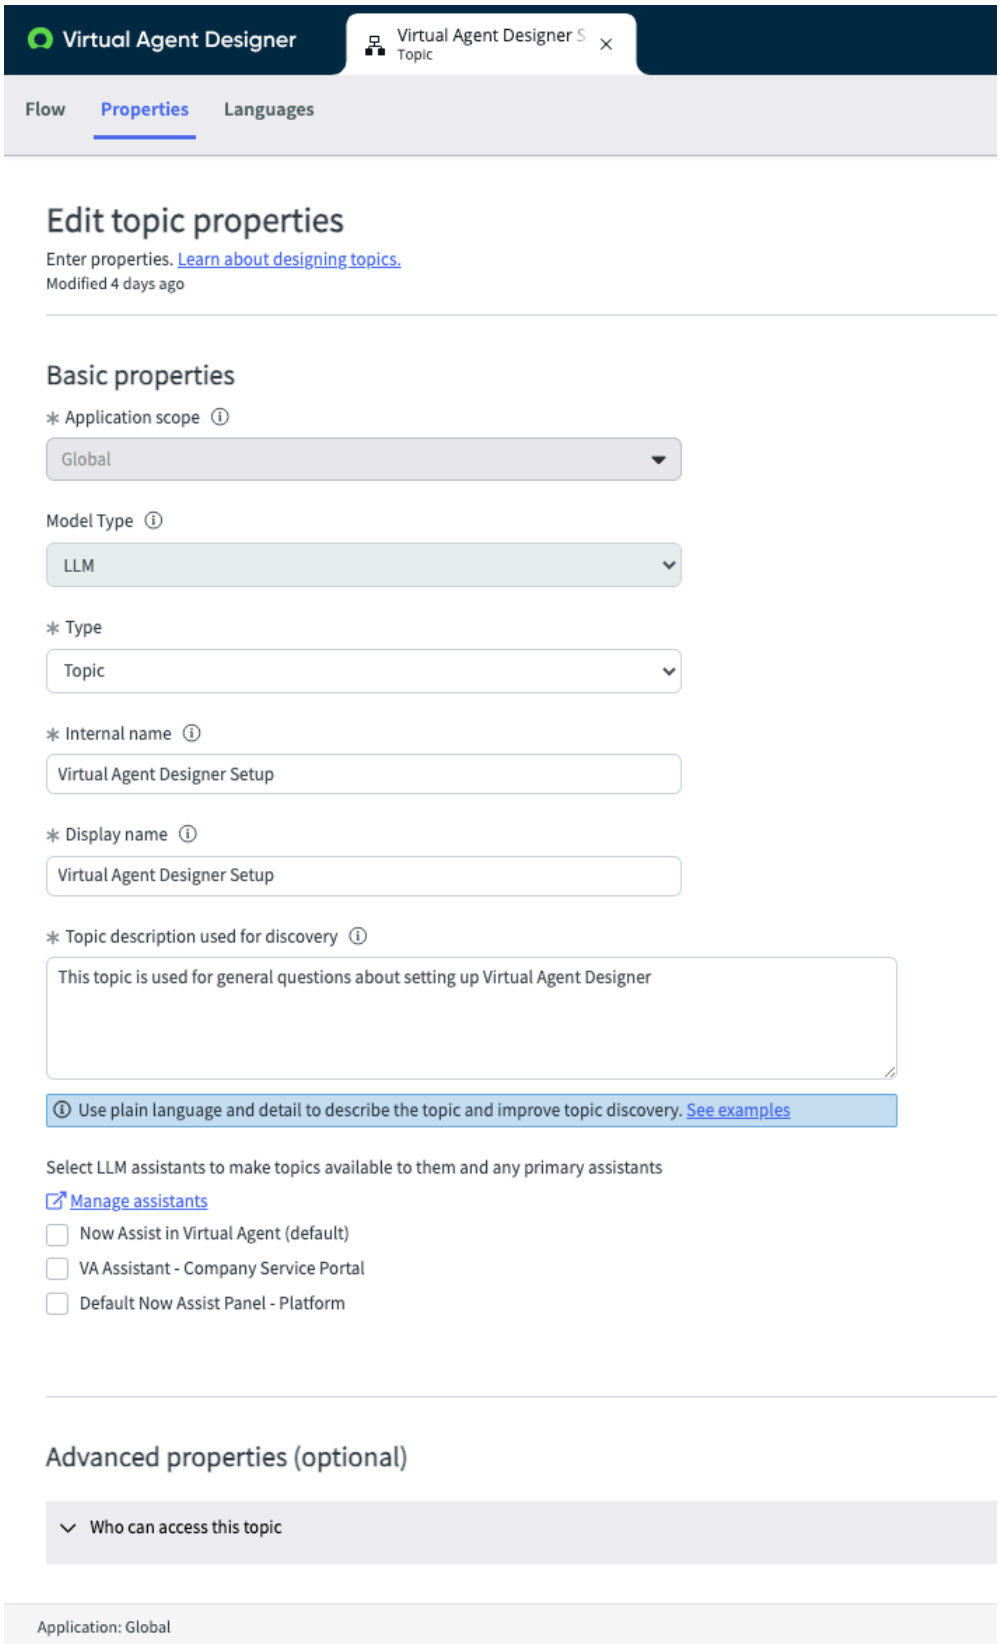
Two methods are available in Virtual Agent Designer: large language model (LLM) or Natural Language Understanding (NLU)/Keyword.

For example, if you enable NLU/Keyword in Virtual Agent settings, the topic **Properties** tab includes fields for identifying the NLU model and intent for the topic.

For more information, see Create a Virtual Agent topic.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic Properties tab with LLM topic discovery



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

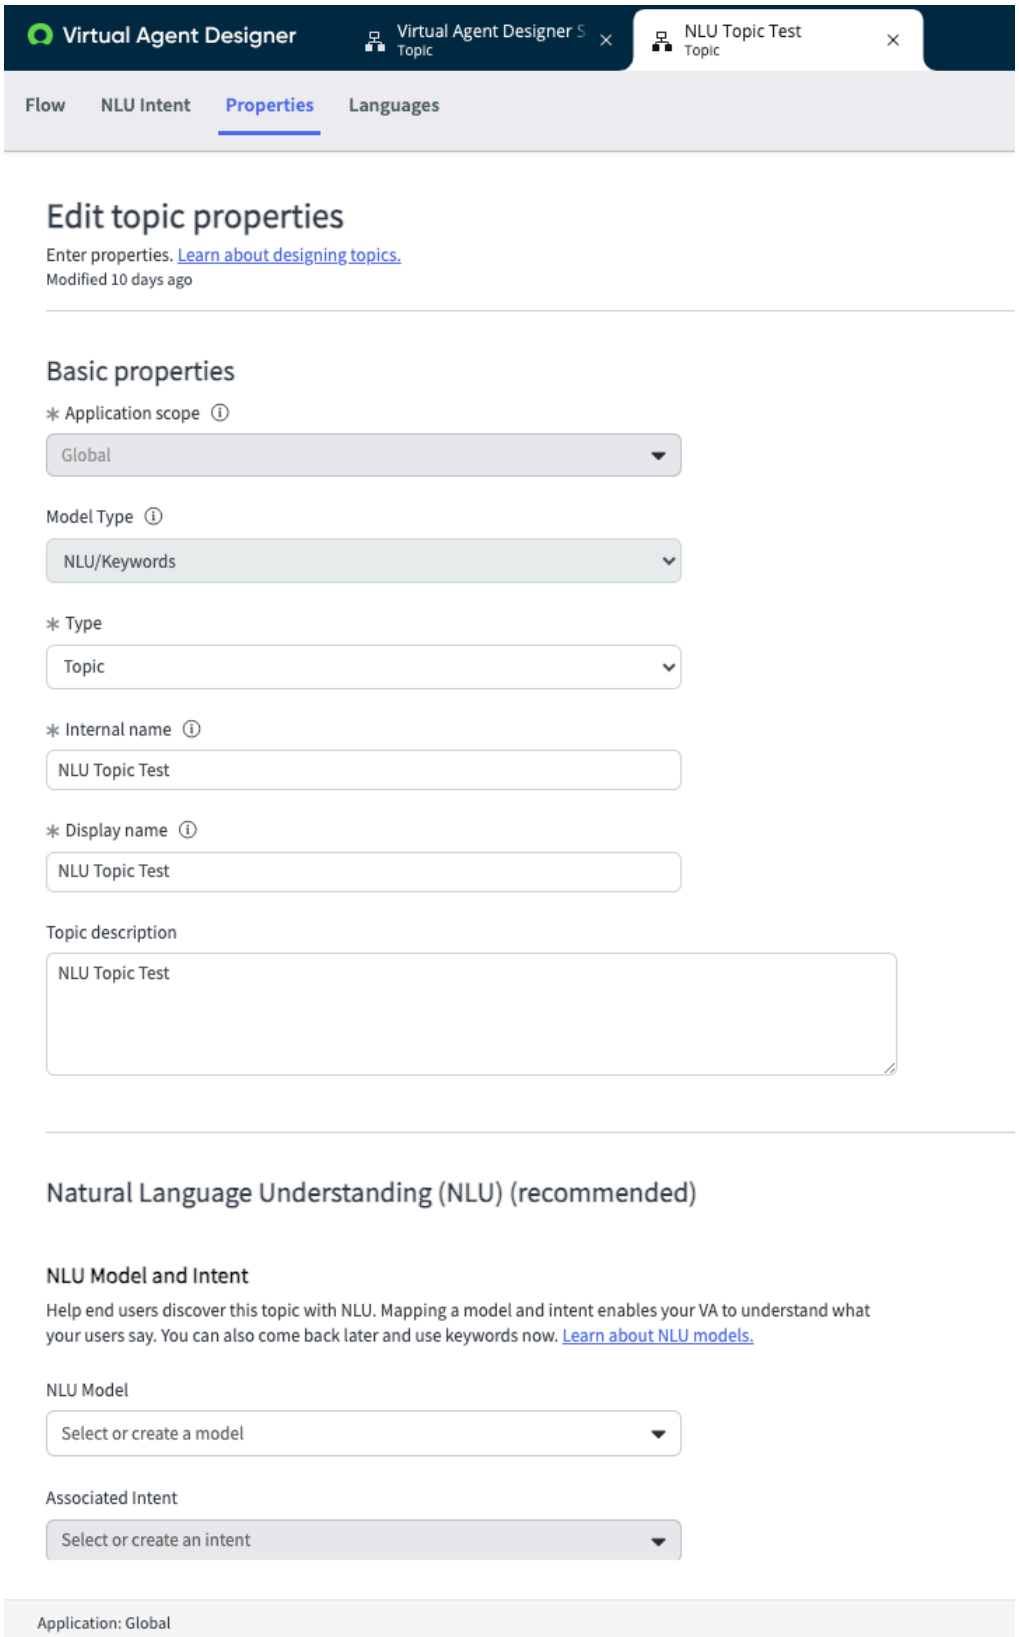Topic Properties tab with NLU topic discovery



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Topic properties

Field	Description
Application scope	Select the application scope where the topic becomes available. **Note:** The application scope cannot be changed once the topic is created.
Model type	Type of model for this topic, either LLM or NLU/keyword. The model type is locked when you create the topic.
Type	Type of topic, including basic topic, topic block, setup topic, and small talk topic.
Internal name	Internal name for the topic, not seen by customers.
Display name	Topic name displayed for customers.
LLM topics [LLM model type only]	
Topic description used for discovery	Description used by the LLM to accurately match the user's question or request to the right topic. Thorough descriptions improve topic discovery. For more information, see LLM topic discovery in Virtual Agent.
Topic will be available in these assistant(s)	LLM assistant or assistants selected to make topics available to them.
NLU topics [NLU/keyword model type only]	
Topic description	Description used to denote what this topic is used for.
NLU model	NLU model mapped to the topic.
Associated intent	NLU intent connected to the model and topic.
Enable DialogActs	Toggle to allow Virtual Agent to react dynamically to user statements.
Confirm modified values with users	Toggle to allow Virtual Agent to send confirmation messages to users when a value change is detected.

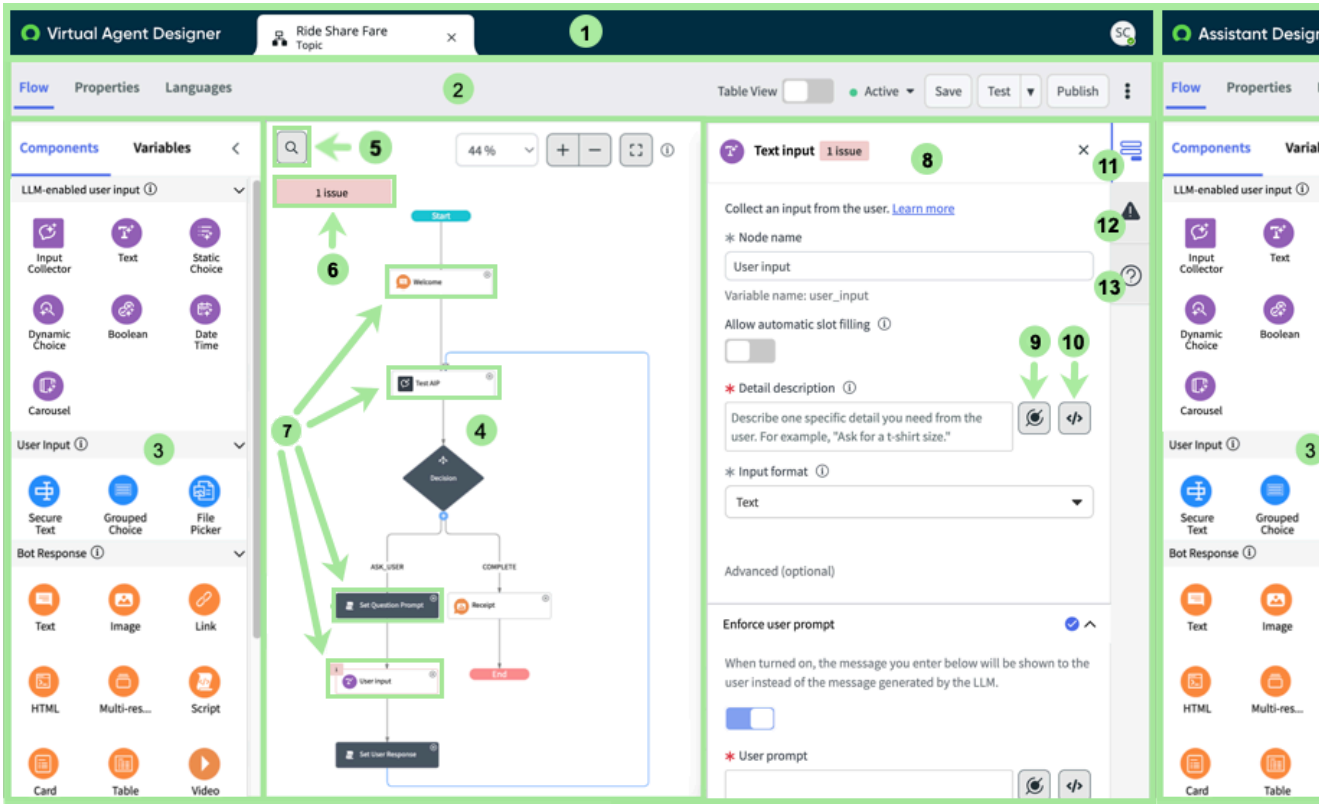
Topic Flow tab

Use the topic **Flow** tab to build the conversation flow. Use the controls for user inputs, bot responses, and utilities to define the flow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Flow tab (default view)

Example Flow tab in default view



Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

Legend (default view)

Feature	Description
1. Navigation bar	Tabs to navigate between your design and the home pageAsset library. You can open and navigate between multiple topics and the home pageAsset library by selecting **Virtual Agent Designer** or an open topic's tab. Select the close icon ✕ on a tab to close that topic.

2. Topic header bar	Tabs and design options for your topic:
	• Tabs: Each tab provides a different view for working on your conversation.
	  ○ **Flow**: Displays the canvas for building your conversation flow.
	  ○ Topic NLU Intent tab (NLU topics only)
	  ○ Topic Properties tab



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Legend (default view) (continued)

Feature	Description
	○ Topic Languages tab (available if multiple languages are configured for Virtual Agent). For more information, see Localizing Virtual Agent conversations. • **Table View**: Option that displays a table view of the nodes in the conversation flow. You can use this option to switch between table view and diagram view as you design your conversation. • **Active/Inactive**: Option that changes the design state so that it's active (available to users) or inactive (in development and not available to users). Select it to see the following options: ○ **Included in Topic Discovery**: Option to make the topic discoverable via keywords, NLU, or Now LLM Service. If inactive, the topic is included when performing search fallback. ○ **Included in List of Topics**: Option to make the topic visible under the "show me everything" list of topics. • **Save**: Saves the current design. • **Test**: Opens the design in a chat test window so that you can preview and test the conversation. If the Now Assist panel, Microsoft Teams application, or Slack application is configured for your environment, preview options for those channels are displayed in the Test button list. Select **Preview in Now Assist panel** or **Preview in Microsoft Teams** in the list to test your topic in those environments. • **Publish**: Activates the design and makes it available to the chat clients. If you're using language-specific NLU models, select **Review and publish** from the Publish list to specify languages. • More actions on topics icon ⋮ ○ **Duplicate**: Copy the current design to create an unpublished version of the design. ○ **Delete**: Remove the current and published version of the design. When updating designs, the header bar displays an `Unpublished Changes` message until you publish the topic. Hover over the message to see a tooltip explaining the unpublished changes. For example, the changes can include your topic's main design or Natural Language Understanding (NLU) language mappings. 


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

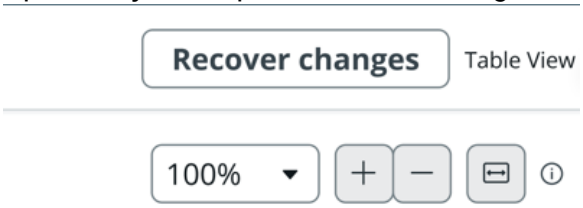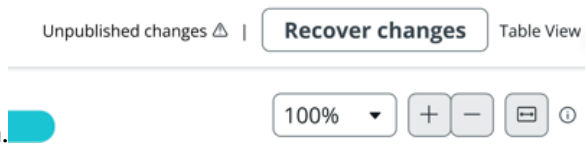Legend (default view) (continued)

Feature	Description
	If you close the topic without saving, a **Recover changes** button appears on the header bar. Select this button to recover any unpublished changes that were unsaved before closing. The **Recover changes** button is replaced by the `Unpublished changes` message.  If you add a node, then close the topic before saving or publishing, the node disappears and the button and message appear when you reopen the topic. Select **Recover changes** to restore the node and remove the button. 
3. Palette	Collapsible sidebar with Components and Variables tabs. The Components tab shows a list of controls that you can drag onto the canvas to build a conversation. The following types of controls are available: • User Input: Controls used to prompt and capture information from the user in a conversation. When Now Assist is enabled and you're working with a large language model (LLM) topic, the LLM User Input section indicates which controls are LLM compatible. • Bot Response: Controls for showing virtual agent responses in a conversation. • Utilities: Controls for performing actions within a topic, such as running a script, adding different conversation paths (branches) in a topic, or adding topic blocks.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

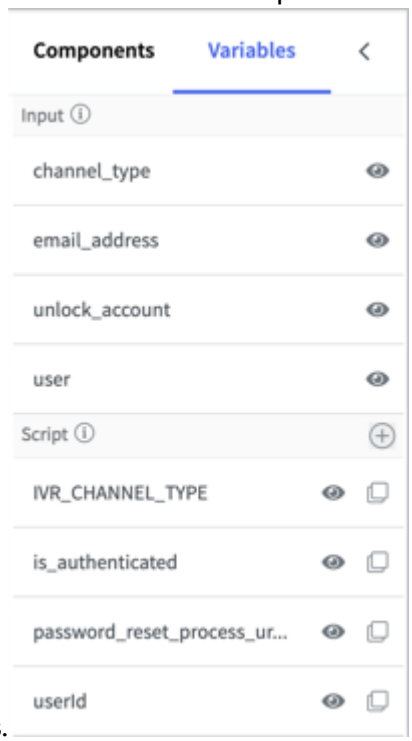Legend (default view) (continued)

Feature	Description
	The Variables tab includes inputs and scripts.  **Input section** • Live Agent variables specified on the topic **Properties** tab to provide contextual information from the virtual agent session to the live agent. • Input variables defined by User Input controls and Utilities that are added to the flow on the canvas. • "Nodeless" NLU entities added by the topic author that are used as slot-filled input variables for the topic. **Script section** The Script section includes the scripts found in nodes on the canvas. The topic author can add further script variables to store values outside of control variables. Scripting variables enable more complex scripting scenarios.
4. Canvas	Area that displays the conversation flow graphically. As you drag a control onto the canvas, that control becomes a node in the conversation flow. Includes a related property sheet that opens in the right pane. Each flow has a **Start** and **End** node. When you add or remove controls, the layout of controls on the canvas is adjusted automatically.
5. Node search	Option for quickly finding specific nodes in the conversation flow. Select the node search icon to expand the search field and enter the name of the node that you want to find. When a


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

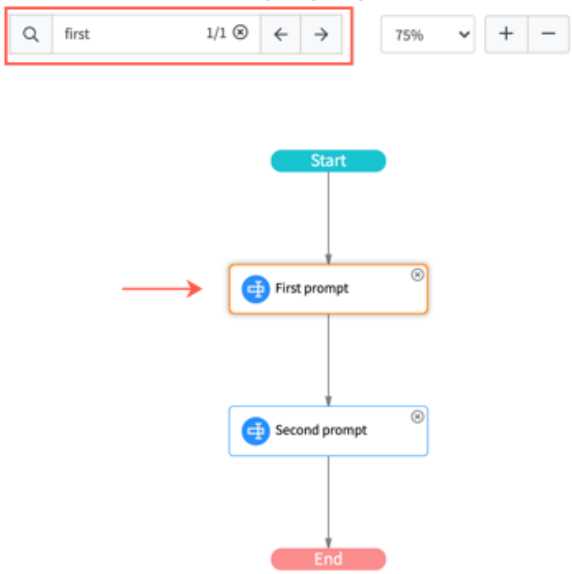Legend (default view) (continued)

Feature	Description
	matching node is found, the node is highlighted in the flow. Use the left or right arrows to search for the previous or next node that matches the search node name. **Node search showing highlighted node** 
6. Issues warning	Counter showing number of issues needing correction before the topic can be published. For more information, see the Incomplete property warnings section of this documents.
7. Node	Input or output item on the canvas created by dragging a control from the Components or Variables sidebar. All controls in the conversation are represented as individual nodes on the canvas. If a node is incomplete, a counter showing the number of issues in the node appears. For more information, see the Incomplete property warnings section of this documents.
8. Property sheet	Properties specific to the selected node on the canvas. The list of properties changes based on the node you select. Each node has its own set of properties that you can define, which can include scripts that control the behavior or processing that is performed in the node. If NLU is enabled, the property sheets for Input controls contain additional NLU fields. For further information, see Virtual Agent Designer controls
9. Data pill picker	A tool for selecting data pills from input variables or script variables to use in the property field. Select the data pill picker to select from the existing variables accessible in the topic. You can also drag data pills directly into property fields.
10. Script editor	A tool for adding or editing JavaScript scripts used in a property. Provides scripting assistance, including a list of valid elements at the insertion point. Elements include function name, object names, and variable names available for the topic. For more information, see the JavaScript syntax editor.
11. Property sheet tab	Opens the property sheet view for the currently selected node on the canvas.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

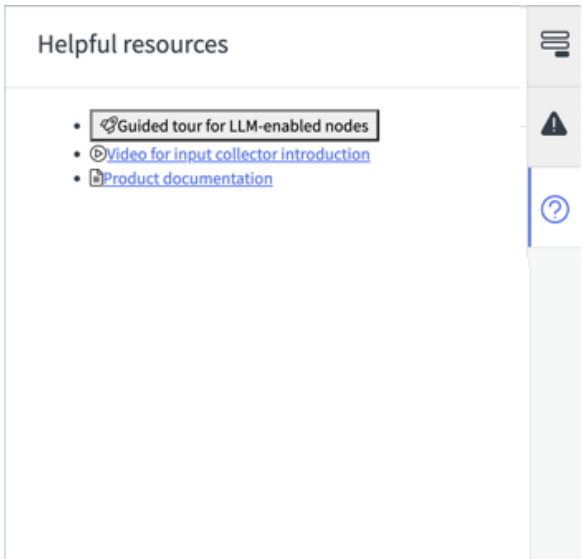Legend (default view) (continued)


Feature	Description
12. Validation Issues tab	Opens the Validation Issues view, showing the number of issues in the topic needing correction before the topic can be published. This tab appears when you try to publish an incomplete topic, and disappears when all issues are resolved. For more information, see Publish a Virtual Agent topic.
13. Resources tab	Opens the Helpful resources view, containing a link to product documentation. In an LLM topic, further resources appear including Guided tours on the canvas, and links to videos for LLM controls. 

Flow tab with Table View enabled

Most of the functionality of the Flow tab is the same in Table View. The following figure and table highlight the differences.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

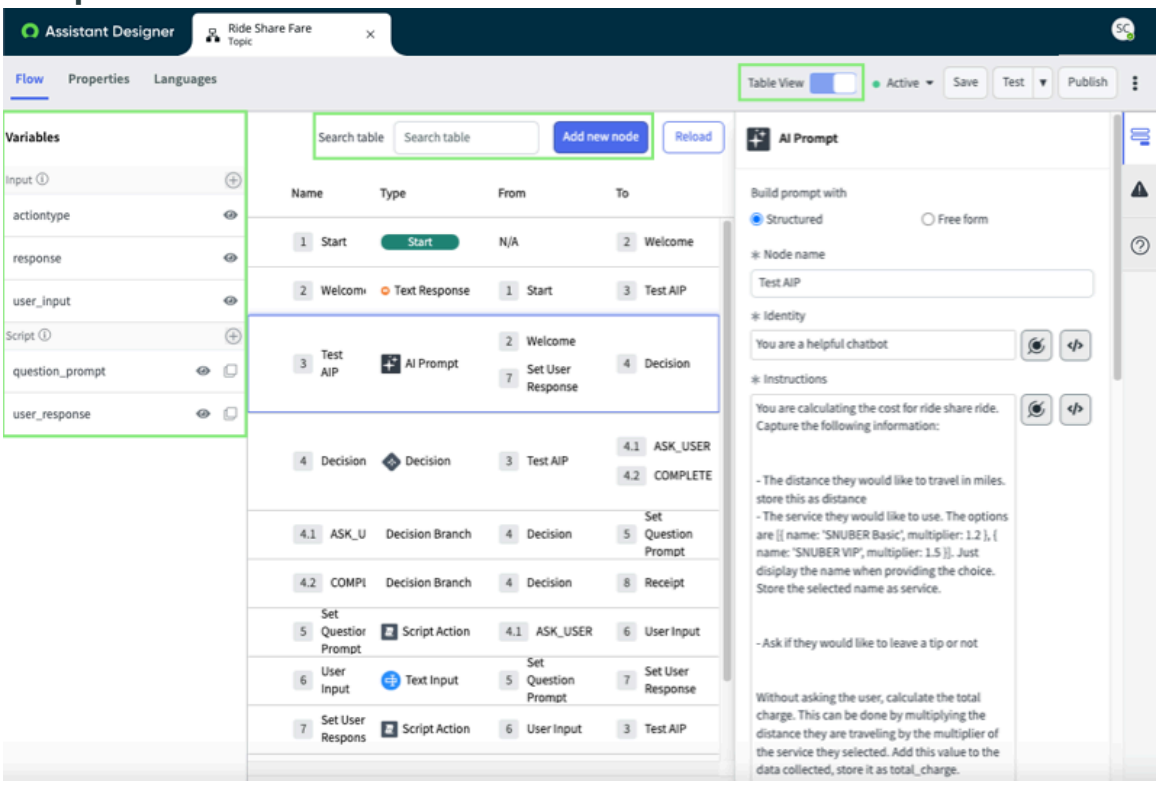Example Flow tab in Table View



Legend (Table View)

Feature	Description
Palette: Variables sidebar	The Components tab is not shown. Only the Variables sidebar is visible.
Table view	A list of table rows, where each row corresponds to a node in the conversation flow. You can add nodes in this section. When you add or remove nodes, the table rows adjust automatically. A node can be any of the following controls, aside from the **Start** and **End** nodes: • **User Input**: Controls used to prompt and capture information from the user in a conversation. • **Bot Response**: Controls for displaying virtual agent responses in a conversation. • **Utilities**: Controls for performing actions within a topic, such as running a script, adding different conversation paths (branches) in a topic, or adding topic blocks. Select **Add new node** to add a node. You can specify the type of control in the dialog box.
Search table	Option for searching nodes in the conversation (table).

LLM components guided tour


When you create or open a non-read-only LLM topic, a dialog box appears and displays an option to take a guided tour of the LLM components in Virtual Agent Designer. Select the close

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

icon to close the window or **Start guided tour** to be shown the various components. You can also take a tour by selecting **Guided tour for LLM enabled nodes** in the Helpful resources tab.

To stop seeing the dialog box open each time you open an LLM topic, select **Do not show this again** before closing the dialog box or starting the tour. To restore the dialog box, navigate to **All**, then enter `sys_cb_user_preference_list.do`. On the Designer User Preferences page, find the *`LLM_INTRO_MODAL_ENABLED`* preference. Open its *`Value`* field and set it to `true`.

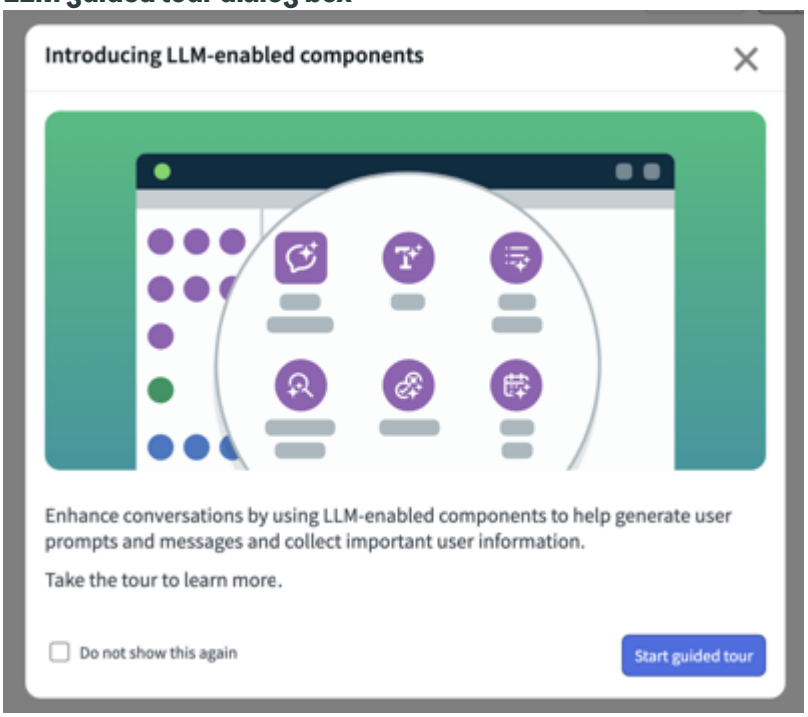LLM guided tour dialog box




Incomplete property warnings

Controls on the canvas have required properties. If required properties are missing, Virtual Agent Designer displays the total number of missing required properties and the controls that are missing them. All incomplete warnings must be addressed to test or publish the topic.

In the following example, the topic is missing two required properties. Two nodes are affected, and each is missing one property. The Text response node is missing the Message response.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

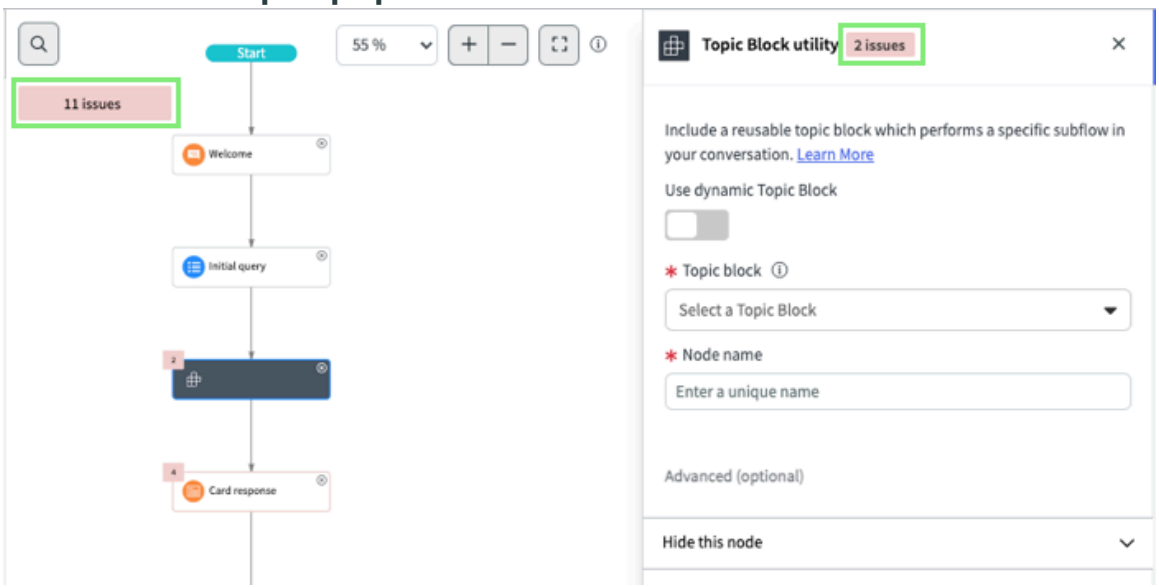Flow tab with incomplete properties



Point to the incomplete message to see a tooltip that describes what is missing.

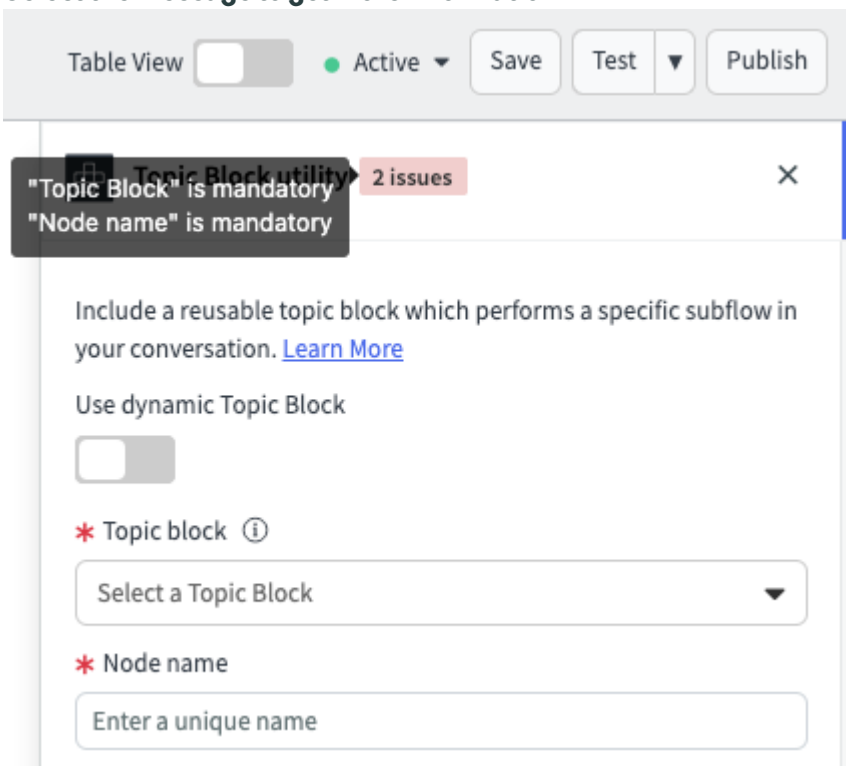Select the message to get more information



Topic NLU Intent tab

You can edit and refine ServiceNow NLU models from within Virtual Agent Designer. When a conversation topic is bound to an associated NLU model and intent, use the **NLU Intent** tab to review and edit utterances and associated entities.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
An updated Assistant Designer Asset library user interface is available when you install Now Assist in Virtual Agent and turn on the Now Assist Topics skill. This content assumes that you have activated this skill and can see the list view. If this skill is not activated, you see the legacy UI and topics page. For more information, see Virtual Agent Designer legacy topics page.

If your topic uses NLU discovery, the topic **NLU Intent** tab appears on the Virtual Agent Designer interface. Test your topic to see the prediction results for topic discovery and the corresponding confidence scores for the results. Depending on the results, you can modify the associated utterances and entities in the NLU model for your topic intent.

Utterances tab


Use the **Utterances** tab to perform the following tasks.

Using the Utterances tab


I want to...	Do this
Add an utterance	Use the **Add** field to enter an utterance for an intent. Each utterance must be unique and contain fewer than 200 characters.
Edit an utterance	Select the Edit icon next to the utterance.
Duplicate an utterance	Select the Copy icon next to the utterance.
Move an utterance to another intent	Select the Menu icon, and then select **Move this utterance to another intent**.
Delete an utterance	Select the Menu icon, and then select **Delete this utterance**.
Define a new entity	**1.** Select a word in an utterance to use as an entity. **2.** In the Create New Entity picker, select the type of entity to be created, such as a simple or system-derived entity. For information about the types of entities that you can define, see NLU entities. For information about system entities, see NLU system entities. When you add an entity, it is also displayed in the **Associated Entities** tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

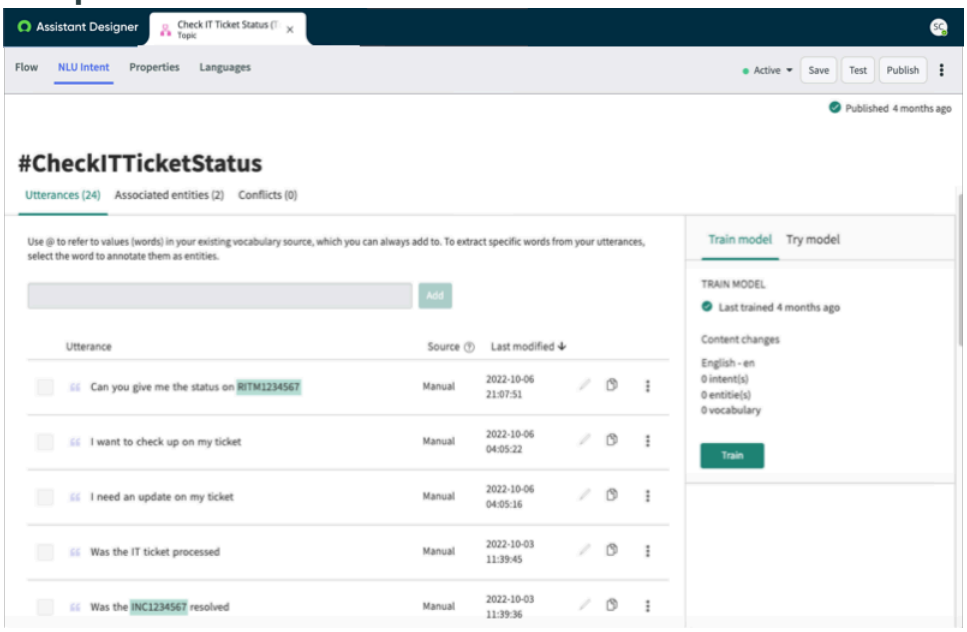Example utterances on the NLU Intent tab



Adding entities on the Utterances tab

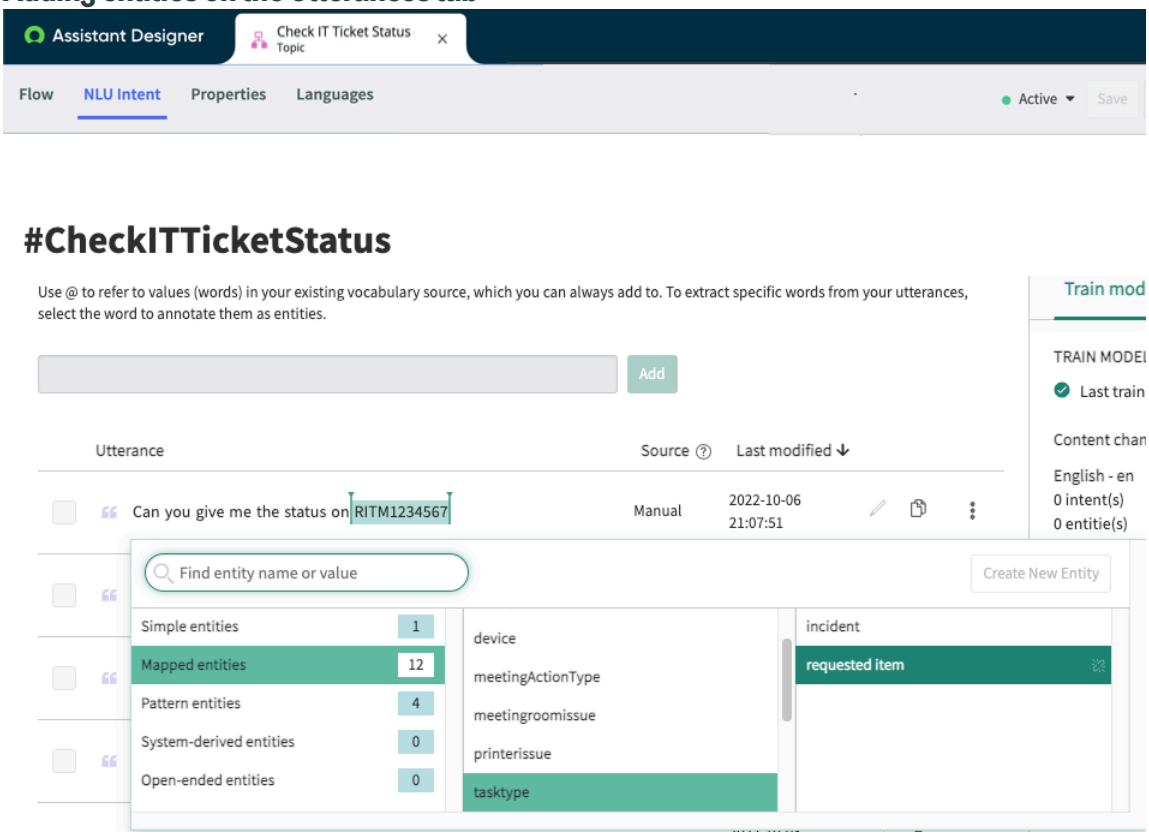

Associated Entities tab

Use the **Associated Entities** tab to view the entities defined for the intent. Select the name to view the utterances that the entity is associated with.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Entities defined for an intent named UpdatePhoneNumber

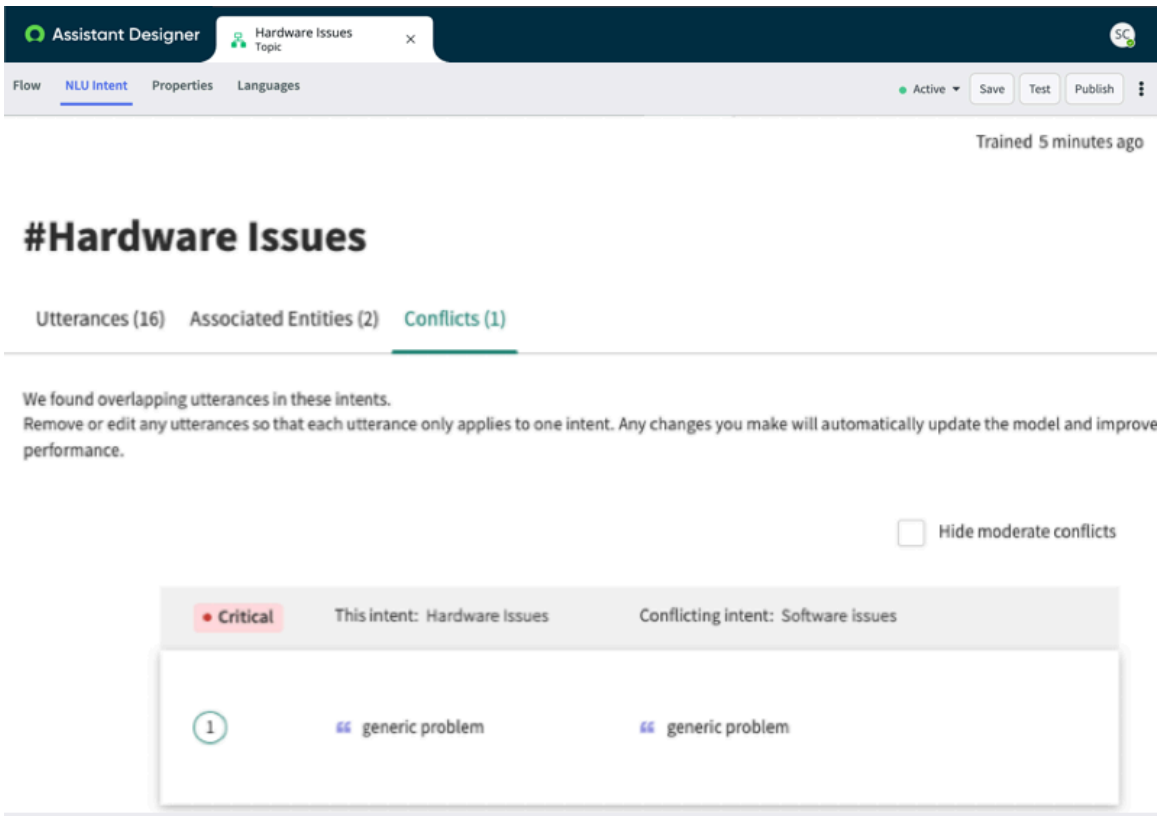


You can also associate system entities, such as date and time, with an intent. For more information about supported system entities, see NLU system entities.

Conflicts tab

Use the **Conflicts** tab to view conflicts among your intents. For example, if two different intents use the same utterance, this will appear as a conflict in both Virtual Agent Designer and NLU Workbench. Identifying and resolving conflicts improves the effectiveness of NLU topic discovery.

Utterance conflict between two intents



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

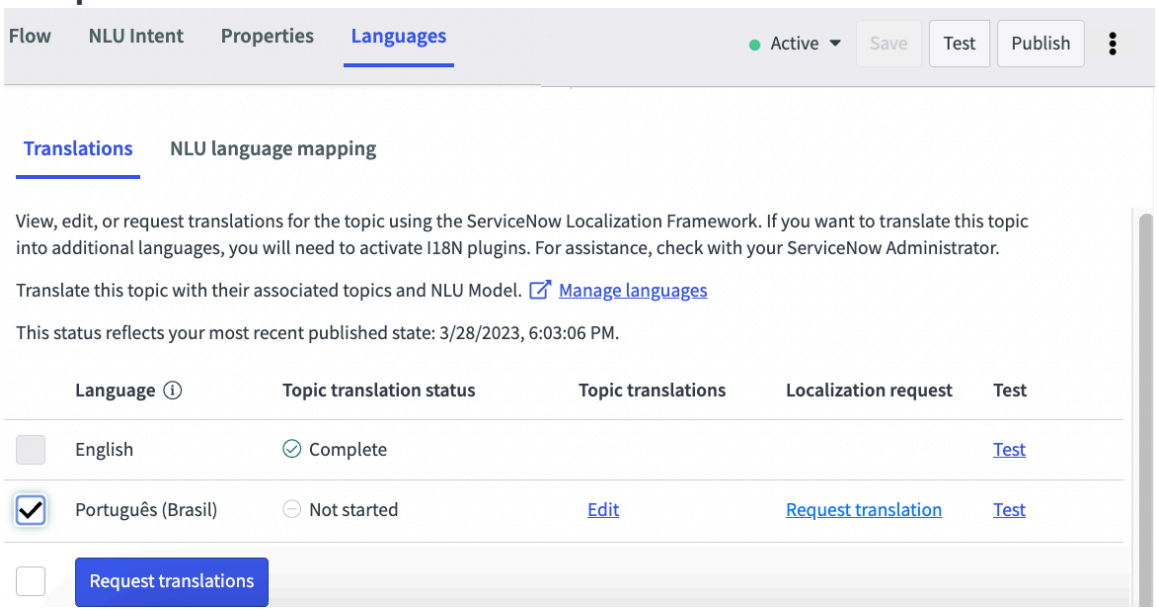
Topic Languages tab

Use the **Languages** tab to view the topic's translation status for languages that have been activated in Virtual Agent. If NLU is enabled on your instance, you can also view model mappings for each language.

Some features on the Languages tab require the appropriate localization roles. For more information, see Localization roles for Virtual Agent.

Translations tab

Example Translations tab



Translations tab columns

Column	Description
Language	List of available languages in Virtual Agent. Only installed languages are displayed (the language plugins are activated). If a language appears as unavailable, it means the language plugin is installed, but it has not been activated in Virtual Agent settings or in the Localization Framework. For more information, see Configure Natural Language Understanding in Virtual Agent and Languages table.
Topic translation status	Indicates translation status: • **Complete**: Topic is completely translated • **Partial**: Topic is partially translated • **In progress**: Translation is in progress • **Not started**: Translation has not begun • **Needs publishing**: Topic is unpublished or in Draft state The ServiceNow platform provides translations for interface features and pre-built topics, so languages may display as partially translated.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Translations tab columns (continued)

Column	Description
Topic translations	Depending on the state of the localization process and your role, you can either view the current content for the language, or you can edit the language content. Only users with the Localization editor [localization_editor] role can edit translated content.
Localization request	Click **Request translation** to create a Localization Framework task. Translation will begin depending on how the flow was set up in the Localization Framework. If translation has already begun and you have the Localization fulfiller [localization_fulfiller] role, click **View requested item** to view the task.
Test	Click the link to test the topic in a particular language.

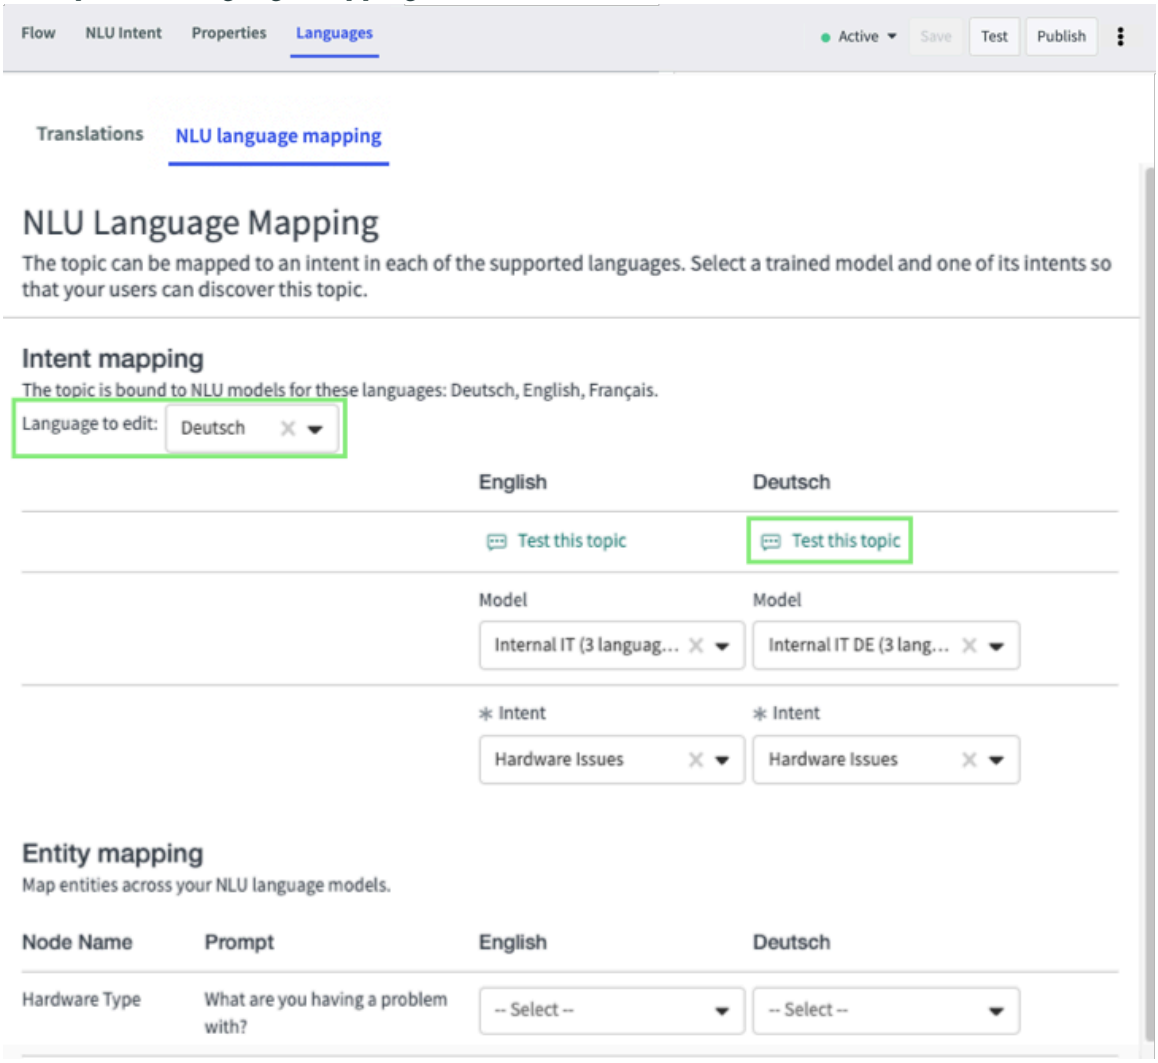
NLU language mapping tab

If you've enabled NLU on your instance, you can view or modify the topic mappings on this tab. You can also map your entities and test the translated topic here.

Note:
Unless you're using legacy, single-language models, all secondary languages in a topic must be mapped to the same model group. In most cases, changing the mapping for one secondary language will change the mappings for all secondary languages in the topic. For more information, see NLU model mapping in Virtual Agent Designer.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example NLU language mapping tab



Virtual Agent Designer controls

A Virtual Agent topic consists of a collection of controls within a topic flow. Use these controls to collect, process, and present information to your users. Controls can also read, create, and update records on your instance.

Each set of controls performs specific functions in a conversation flow.

Control types

Category	Description
Start segment	Appears automatically in a topic flow and cannot be added to or removed from a conversation. This control can be configured with a greeting response that appears when a conversation begins.
End segment	Appears automatically in a topic flow and cannot be added to or removed from a conversation. This control can be configured with a final confirmation message before the end of a conversation. Ensure that all branches of your topic eventually connect to this control.
User Input	Prompts and captures information from the user in a conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Control types (continued)

Category	Description
Bot Response	Displays bot responses in a conversation.
Utilities	Handles actions and logic within a topic, such as running a script or adding different conversation paths (branches) in a topic. You can also use them to call automated Workflow Studio workflows.

For controls that have prompts, messages, default values, or confirmation messages, you can enter any of the following input values:

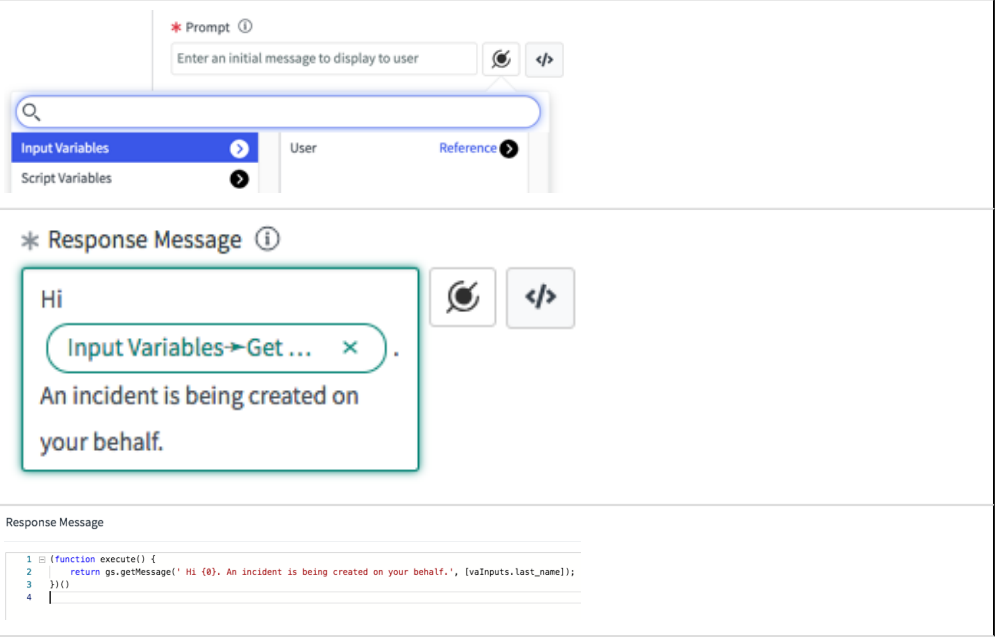
- Text strings
- Data pills
- Strings with embedded data pills
- Scripts that return strings

Data pills

Use data pills to quickly and easily add dynamic information to your controls without using a script. Select the data pill icon to open the data pill picker interface. In this interface, you can select data from script variables and from input variables set by your User Input controls.

Using data pills enables you to quickly and easily access the data in your variables. In contrast, scripting provides more complex options, like handling translation. The following examples illustrate how to use a text bot response that includes the name of the customer, handled both as a data pill and a script.

Data pill and scripted responses

Method	Result
Data pill	
Script	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Data pill and scripted responses (continued)

Method	Result
	* Response Message ⓘ (function execute() { return gs.getMess ⊗ </>

The first example uses the data pill selector to choose **Get Name**, an input variable that contains the name of the customer. The second example accomplishes the same thing using a script. The script example also uses `gs.getMessage` to handle translating the message.

Hide or skip this node (condition property)


Almost all controls have a condition property. The exceptions are the Decision utility and the Start and End nodes.

In user input controls, the condition property determines whether the control is used or skipped in a conversation. To always use the control, leave the condition field empty. To determine the conditions under which the control is used, do one of the following:

- Create a condition using the condition builder interface, which lets you add data pills to specify conditions built using this interface.
- Provide a script for the condition property that returns a value of true or false. If the return value is false, the control is not used and the conversation will continue to the next control along that branch of the topic.

Use conditions to make your conversations more dynamic based on context, data, or scripted logic.

Scripted condition	Condition builder condition

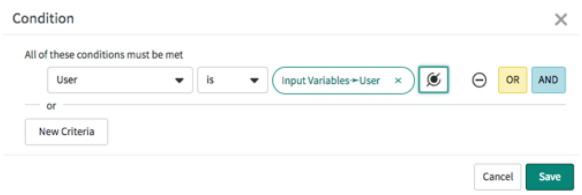Sample script for conditionally showing the node:
`(function execute() {`
`  var gr = new GlideRecord('incident');`
`  return gr.canCreate();`
`})()`
	

In this example, a condition script returns a value of true if the current user is able to create incident records. This condition prevents a utilities control from creating an incident when the user does not have permission to do so.

Virtual Agent Designer user input controls

Use the collection of input controls provided by Virtual Agent Designer to prompt and capture information from the user in a conversation.

Common input control properties

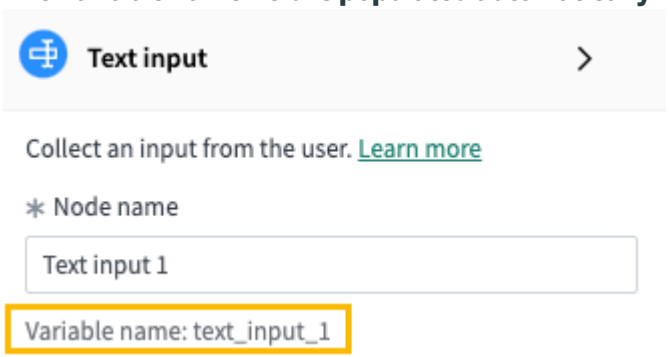
In addition to data pills and condition controls, each input control has the following common properties:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input variable for the user response

Each control stores the user response in an input variable that is accessible from other controls within the same topic using the `getValue` and `getDisplayValue` methods. The variable name is based on the name that you assign to the input control. For example, if you assign the name `First prompt` to an input control, the variable name is `first_prompt`. The variable name is lowercase, with an underscore character instead of a space. For more information on these methods, see Virtual Agent scripts.

The Variable name field is populated automatically



Large Language Model (LLM) user input controls

The following user input controls are supported in LLM topics when you create an LLM Virtual Agent topic. LLM user inputs include the following.

- Input Collector
- Text input
- Static Choice list
- Dynamic Choice list
- Boolean input
- Date Time input
- Carousel input

Note:
Avoid placing more than five user input controls in a single LLM topic, or more than five in a single Input Collector. Excessive user input controls can overwhelm the LLM and may lead to inaccurate or unexpected responses.

Natural Language Understanding (NLU) entity properties

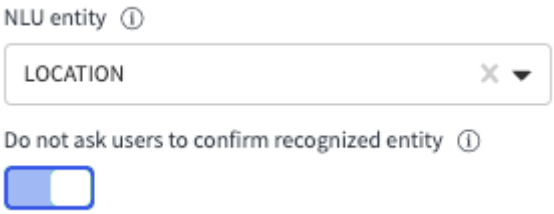
If NLU is enabled, the following properties are displayed in the property sheet for the **Text**, **Static Choice**, **Dynamic Choice**, **Boolean**, **Date Time**, and **Carousel** input controls. To view or enable these properties, go to the Advanced options section.

- **NLU entity**: The entity that corresponds to the input variable for the control. You select the entity from the list of entities associated with the topic intent, as defined in the NLU model that you're using for the topic. When Virtual Agent recognizes the entity value in user utterances and if the value meets the entity prediction confidence threshold, then Virtual Agent extracts the value. The value is stored in the input variable for the node. This storing action is called slot filling. Slot filling recognizes when multiple values for the same NLU entity occur in a conversation. Users are prompted with a list to confirm which node value to select

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


when multiple nodes are tied to the same NLU entity. This property is available only for NLU topic discovery.

NLU entity property



- **Enable NLU to switch topics**: Enables NLU prediction for the node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics. To enable this property on a node, navigate to **Advanced options** > **Topic switching**.

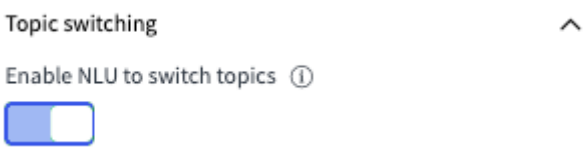
Enable NLU to switch topics property



Default value

An input prompt can have a preset value that you define. This value can be either a string or a script that returns a string. This property is in the Advanced options section.

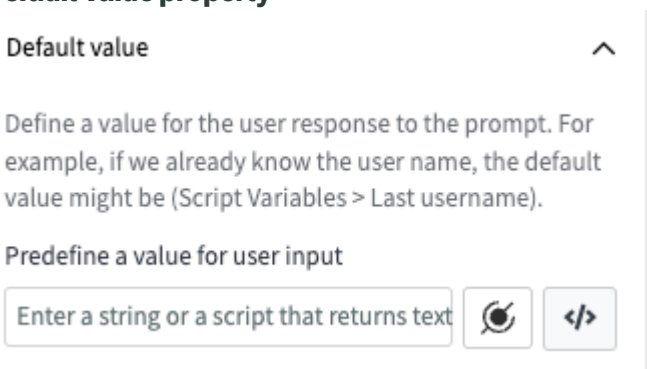Default value property




Confirmation messages

These bot response messages signal the end of the node interaction and ask the users to confirm their response. This property is in the Advanced options section.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

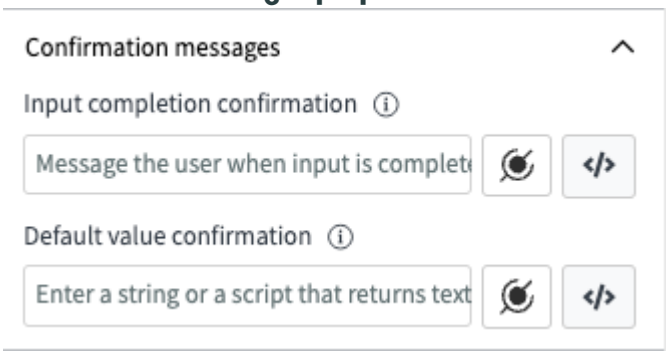Confirmation messages properties



Input Collector user input control

Use the Input Collector control to gather data for use by Now Assist in conversations that use large language model (LLM) topic discovery.

For an overview of the Input Collector from a user perspective, watch this video.

Virtual Agent Designer Input Collector user input control video

Input Collector properties

The Input Collector is only available for topics that use LLM discovery.

The Input Collector can hold up to 5 of any of the LLM user inputs aside from another Input Collector. To collect more than 5 user inputs, place multiple Input Collector nodes in sequence or adjust the Value of the *com.glide.cs.va_input_collector_max_nodes* property in the System Properties [sys_properties] table.

You can reorder nodes inside the Input Collector on both the canvas and table views. To reorder nodes on the canvas, select a given node inside the Input Collector and drag it up or down in the list. You can add or remove nodes from an Input Collector, or nodes between multiple Input Collectors, by selecting a node and dragging it into or out of an Input Collector node on the canvas. To reorder nodes in an Input Collector in the table view, select a given node in the list, then select the up or down arrow next to the node.


Specify the flow action properties for the node that you want to create.

Property	Description
Node name	Name that identifies this node in the topic flow.
Advanced	
Additional instructions for LLM	Further instructions to the LLM, such as adding data formats, restrictions, or default values for user responses. You can create additional instructions in plain language, input a script, or define conditions with the data pill picker.
Confirmation message	Toggle switch to display a summary of collected inputs to the user at the end of a conversation. If Summary message is activated, the Virtual Agent, when activated, presents the information that you have entered and asks if everything is correct. Select **Yes** to continue the chat or **No** to restart collecting user input. You can also reply by typing a response in the chat window, to confirm or deny

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Property	Description
	the summary or to change your answer. This option is active by default, and shows an enabled icon when activated.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.

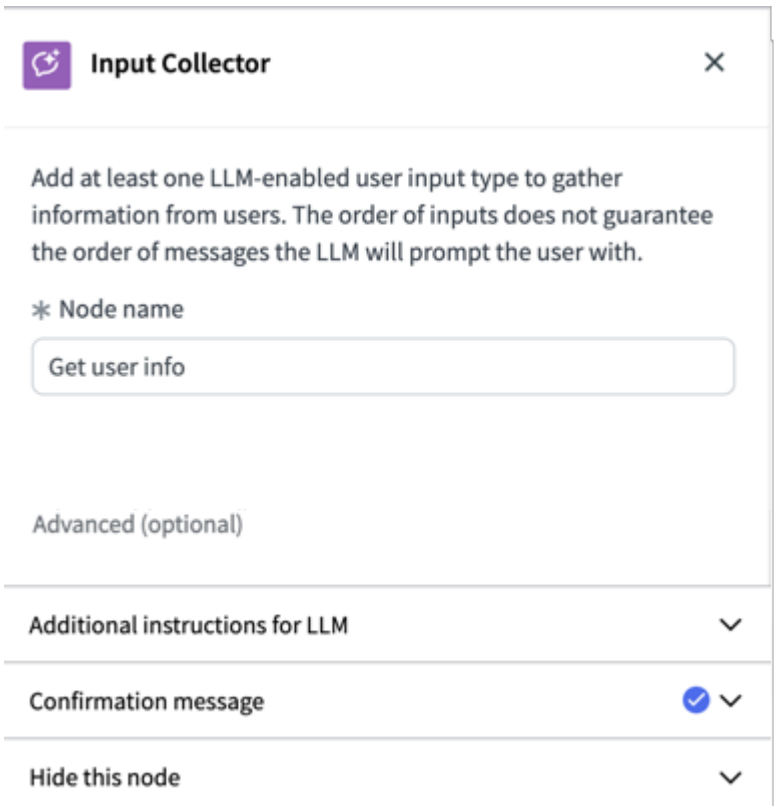Example Input Collector capability




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

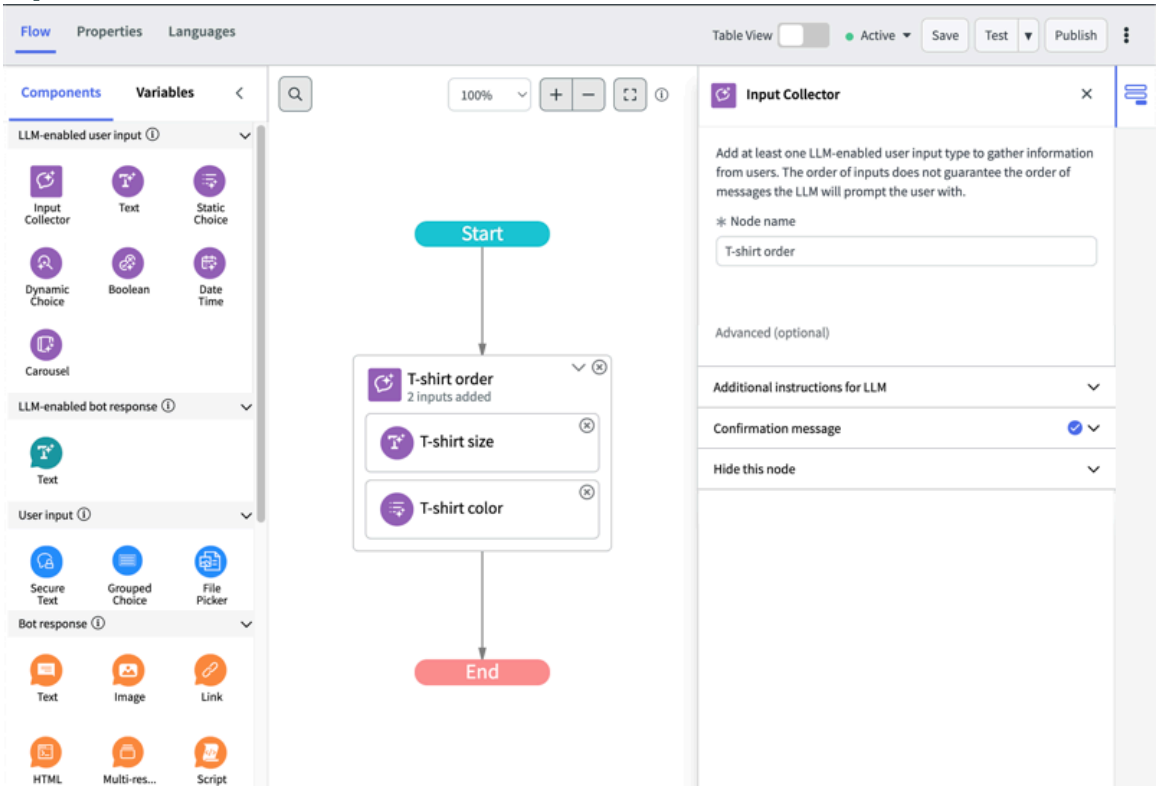Input Collector canvas view



Input Collector table view

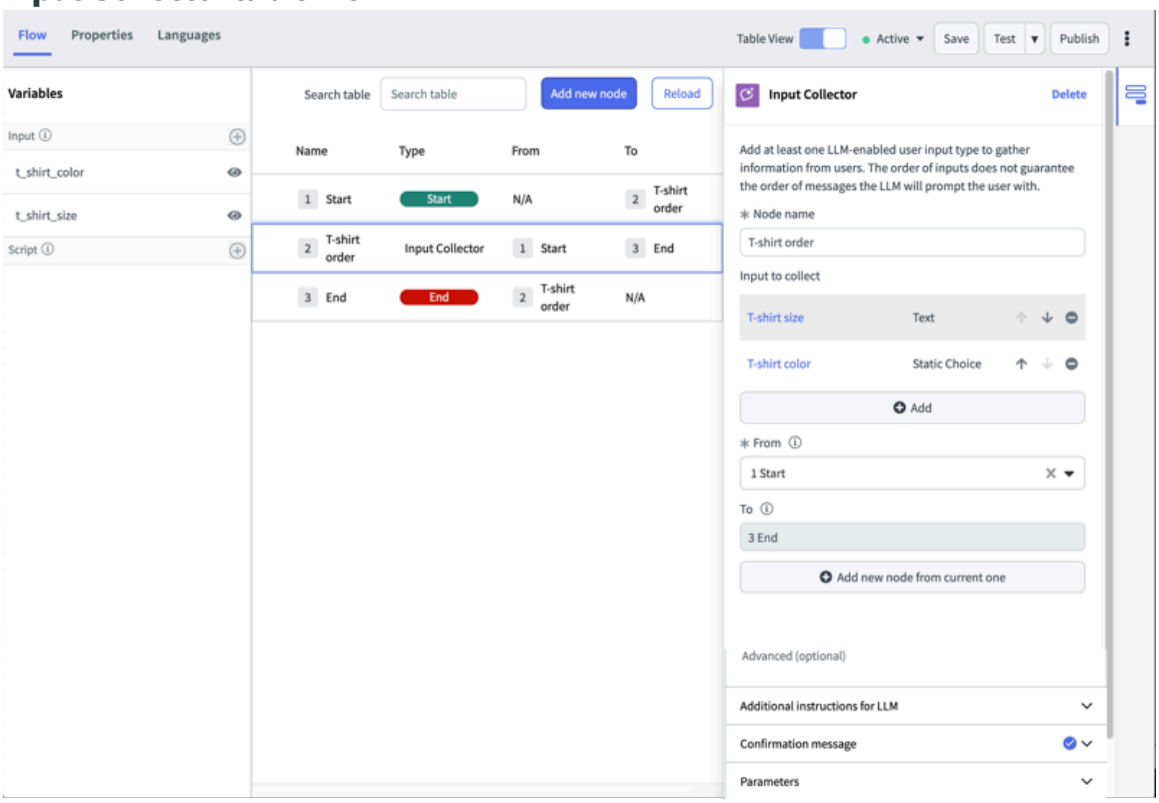

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support

Channel support for the Input Collector control

Channel	LLM support	NLU/keyword support	Constraints
Web UI	Not supported	Supported	None
Mobile UI	Not supported	Supported	None
Now Assist panel	Not supported	Supported	None
Microsoft Teams	Supported	Supported	None
Slack	Not supported	Not supported	Not applicable
Workplace	Not supported	Not supported	Not applicable
Facebook Messenger	Not supported	Not supported	Not applicable
SMS Twilio	Supported	Not supported	Not applicable
LINE	Not supported	Not supported	Not applicable
WhatsApp	Supported	Not supported	Not applicable
Apple Messages for Business	Not supported	Not supported	Not applicable
Alexa (Voice)	Not supported	Not supported	Not applicable

Text user input control

The Text user input control in a Virtual Agent topic prompts the user for a text string.

Text user input control properties for LLM topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Allow automatic slot-filling	Toggle to allow this node's value to be automatically set by other nodes, as well as during topic discovery. When this toggle is activated, the Detail description field changes from dynamic Data Pill Picker and script options to a static text field.
Detail description	Description of the information that you need from users. If the **Allow automatic slot filling** toggle is deactivated, you can create a dynamic detail description by selecting the Data Pill Picker icon to define conditions, or select the Open Editor icon </> to enter a script. If the **Allow automatic slot filling** toggle is activated, you can only enter a static description.
Input format	Text format that is validated when a user enters certain text items. If the user doesn't enter the expected format, an error message indicates that the format is



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	not valid and asks the user to reenter the text. Choose the format of the text item to be validated: • Text: Any text string (no validation). • Email: Format that consists of an email prefix (user name), the @ symbol, and domain. • IP address (IPV4, IPV6): Data communication delivery format for Internet Protocol version 4 or version 6. • Phone number (E.164): Internationally recognized standard phone number format. • URL: Web address format. • Custom: A script that provides a validation rule for a custom text format. The script should include related error messages that are displayed when the expected format is not entered. For phone and IP address format examples, see E.164 phone formats and IP address field types.
Advanced	
Enforce user prompt	Toggle to open a field for a custom message shown to the user instead of the message generated by the large language model (LLM). You can create custom messages in plain language, input a script, or define conditions with the data pill picker.
Validation	Add a script to validate the user input. For example, check if the user entered a valid email address.
Additional instructions for LLM	Further instructions to the LLM, such as adding data formats, restrictions, or default values for user responses. You can create additional instructions in plain language, input a script, or define conditions with the data pill picker.
Hide or skip this node	
Conditionally use this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Text user input control for LLM topic discovery

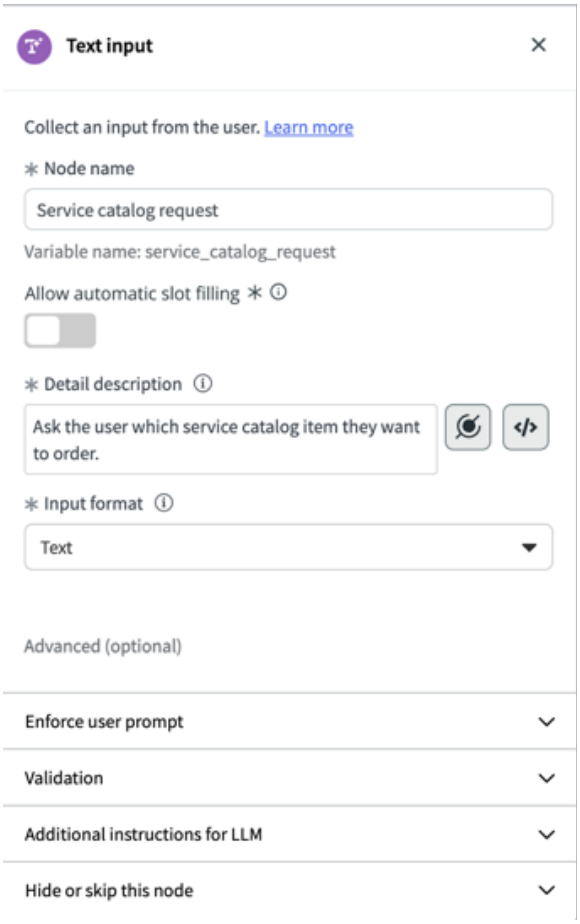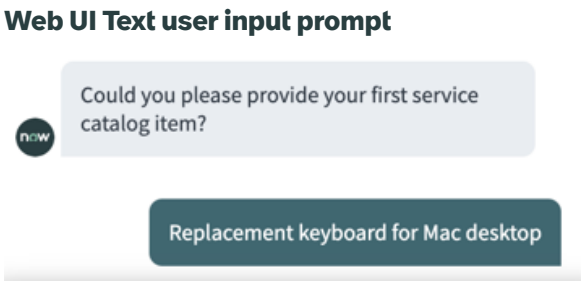LLM topic input control properties

Input properties	Input prompt
	

Text user input control properties for NLU topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?`
Input format	Text format that is validated when a user enters certain text items. If the user doesn't enter the expected format, an error message indicates that the format is not valid and asks the user to reenter the text. Choose the format of the text item to be validated:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	• Text: Any text string (no validation). • Email: Format that consists of an email prefix (user name), the @ symbol, and domain. • IP address (IPV4, IPV6): Data communication delivery format for Internet Protocol version 4 or version 6. • Phone number (E.164): Internationally recognized standard phone number format. • URL: Web address format. • Custom: A script that provides a validation rule for a custom text format. The script should include related error messages that are displayed when the expected format is not entered. For phone and IP address format examples, see E.164 phone formats and IP address field types.
NLU entity	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent. When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity.
Advanced	
Make this input secure	
Enable	Toggle switch that encrypts the input control. When enabled, the user input is masked and appears as a series of dots in the chat window.
Hash function [Visible when Make this input secure is enabled]	The method digest algorithm based on the standard WS-security standard. Choose one of the following: • **SHA-256 (lower case)** • **SHA-1 (lower case)** For more information about the WS-security standards, see WS-Security properties.
Encryption salt [Visible when Make this input secure is enabled]	Random data that is used as an additional input to a one-way function that hashes data.
Default value	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Property	Description
Predefine a value for user input	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Example Text user input control for NLU topic discovery

Input properties	Input prompt

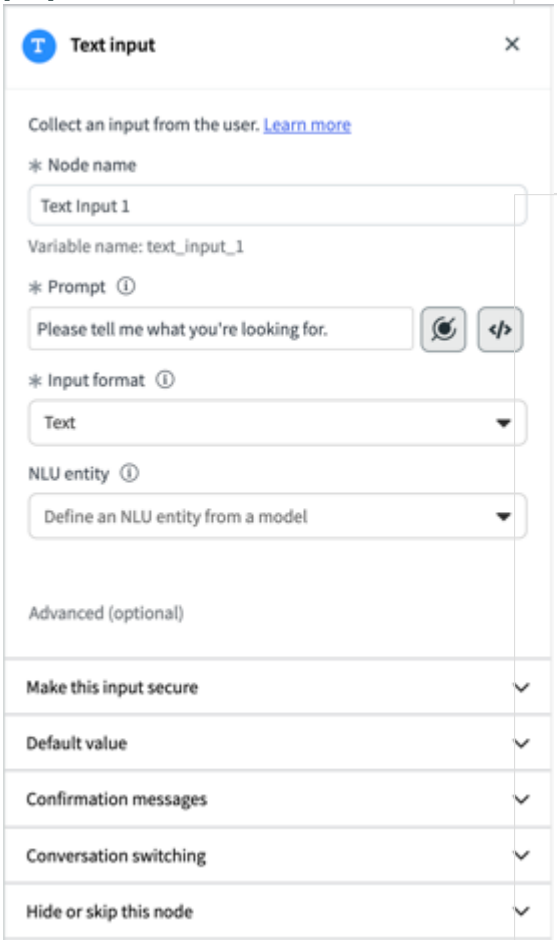
Text input control basic properties



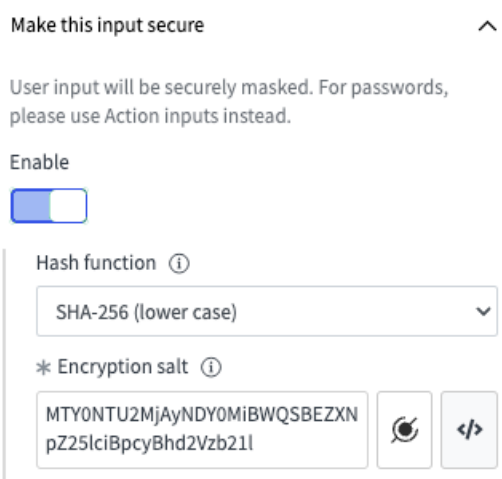
Make this input secure (Advanced properties)



Web UI Text user input prompt

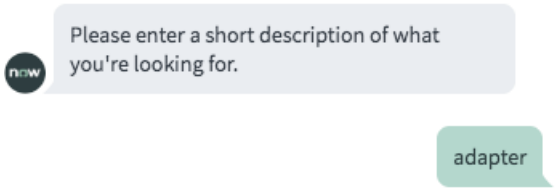

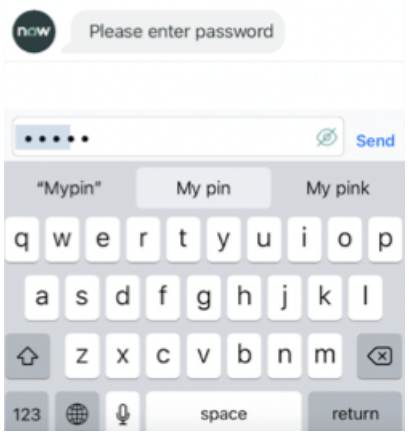User input prompt on a mobile app with the Make this input secure toggle switch enabled



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support

Note:
Virtual Agent Designer controls may display and function differently in other channels.

Channel support for the Text user input control

Channel	LLM support	NLU/keywo support	Constraints
Web UI	Not supported	Supported	None.
Mobile UI	Not supported	Supported	None.
Now Assist panel	Not supported	Supported	None.
Microsoft Teams	Supported	Supported	None.
Google chat	Supported	Supported	None.
Slack	Not supported	Supported	Slack users can edit text previously entered in a conversation. However, Virtual Agent processes messages as they are first entered. If aSlack user edits text input, such as a comment to update a case, then Virtual Agent does not evaluate the edited update.
Workplace	Not supported	Supported	None.
Facebook Messenger	Not supported	Supported	The maximum character limit is 5000 characters.
SMS Twilio	Not supported	Supported	None.
LINE	Not supported	Supported	The maximum character limit is 5000 characters.
WhatsApp	Supported	Supported	None.
Apple Messages for Business	Not supported	Supported	None.
Alexa (Voice)	Not supported	Supported	For screen devices, character limits may apply. For more information, see the Alexa developer documentation.

Static Choice user input control

Use the Static Choice user input control in a Virtual Agent topic to list predefined choices available to the user. You can select only one item from a choice list.

Choice display

The choice list contains up to 10 items per page. When more than 10 items exist in an NLU conversation, you have the option to show the additional items and also filter the search results.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The choice list prompt contains a search icon that users can select to filter the results. When more than 10 items exist in an LLM chat conversation, a scroll bar appears. When more than 16 items exist in an LLM chat conversation, a search bar appears.

The Static Choice control provides the option to add a header card that displays above the choice list. Header cards are supported in web and mobile channels.

- The header card can contain a large or small image or a YouTube video card, along with descriptive text. The choice list contains up to five items by default, but the search feature is suppressed. If there are more than five items, users can choose to show the additional items.

- To control the number of items displayed below a header card, add the *com.glide.cs.web_header_picker_page_limit* system property. Use the **Value** to specify the number of items displayed in the choice list. For details about creating a system property, see Add a system property.

Static Choice user input control properties for LLM topic discovery

Property	Description
Name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Allow automatic slot-filling	Toggle to allow this node's value to be automatically set by other nodes, as well as during topic discovery. When this toggle is activated, the Detail description field changes from dynamic Data Pill Picker and script options to a static text field.
Detail description	Description of the information that you need from users. If the **Allow automatic slot filling** toggle is deactivated, you can create a dynamic detail description by selecting the Data Pill Picker icon to define conditions, or select the Open Editor icon to enter a script. If the **Allow automatic slot filling** toggle is activated, you can only enter a static description. 
Choices	
Display name	For each choice, the text that appears to the user for that choice. Use short phrases in your choice lists. • Slack has a limit of 30 characters for choice list labels. • Workplace has a limit of 20 characters for choice list labels.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Value	For each choice, the string that is stored in the variable when the corresponding choice is selected.
Advanced	
Header Card	
Enforce user prompt	Toggle to open a field for a custom message shown to the user instead of the message generated by the large language model (LLM). You can create custom messages in plain language, input a script, or define conditions with the data pill picker.
Validation	Add a script to validate the user input. For example, check if the user entered a valid email address.
Additional instructions for LLM	Further instructions to the LLM, such as adding data formats, restrictions, or default values for user responses. You can create additional instructions in plain language, input a script, or define conditions with the data pill picker.
Hide or skip this node	
Conditionally use this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script. If users enter a value such as `skip this step` when the conditions do not allow skipping, they receive a message saying the node cannot be skipped and are re-prompted to provide an answer.

Example Static Choice user input control for LLM topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

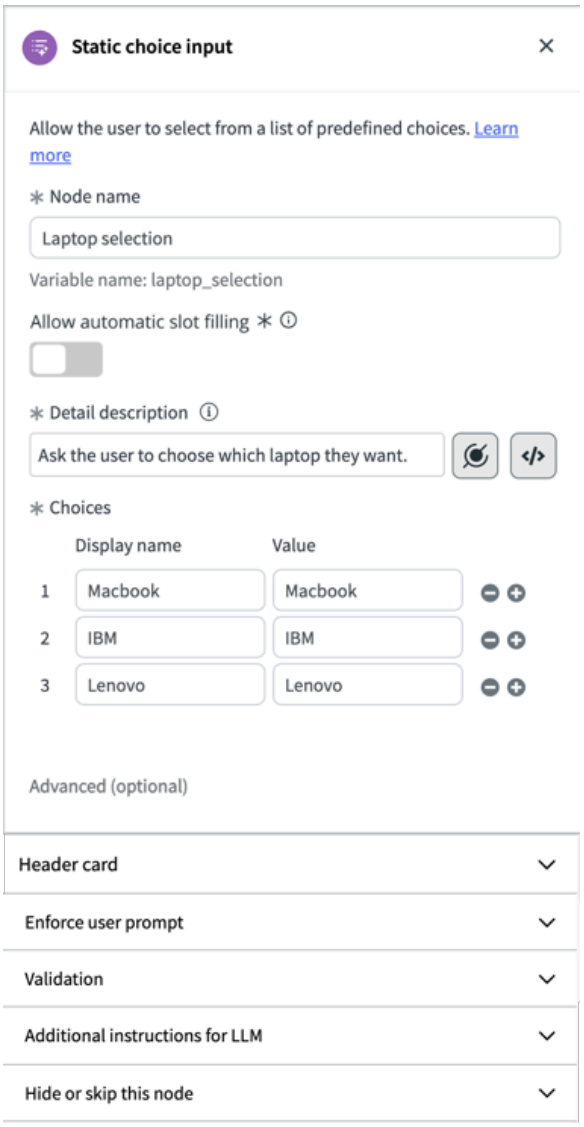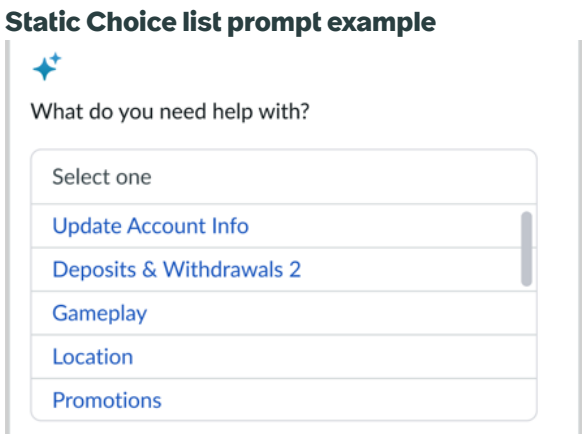© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List user prompt
	

Static Choice user input control properties for NLU topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Detail description	The one piece of information needed from the user. For example, `Ask the user which service catalog item they need.`
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?` You can create rich text to alter the styling of the prompt: • Use single asterisks or underscores for italic text. For example, `*text*` or `_text_`. • Use double asterisks or underscores for bold text. For example, `**text**` or `__text__`. • Use triple asterisks or underscores for italic and bold text. For example, `***text***` or `___text___`. • Use a spaced hyphen to add a bullet point to a line. For example, `- text`. • Use a spaced right angle bracket to create a block quote. For example, `> text`. • Use between one and six hash marks to create headers. For example, `#text#` or `######text######` • Use brackets and parentheses to create a hyperlink. For example, `[Link text](url)`. Add an exclamation point to a hyperlink to display an image. For example, `![alt text](image url)`
NLU entity	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent. When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity. This field is available only when NLU discovery is enabled on the instance.
Choices	
Display name	For each choice, the text that appears to the user for that choice. Use short phrases in your choice lists. • Slack has a limit of 30 characters for choice list labels. • Workplace has a limit of 20 characters for choice list labels.
Value	For each choice, the string that is stored in the variable when the corresponding choice is selected.
Advanced	
Header card	
Default value	
Default Value	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	
This section is available only when NLU discovery is enabled on the instance.	
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.



Example Static Choice user input control for NLU topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

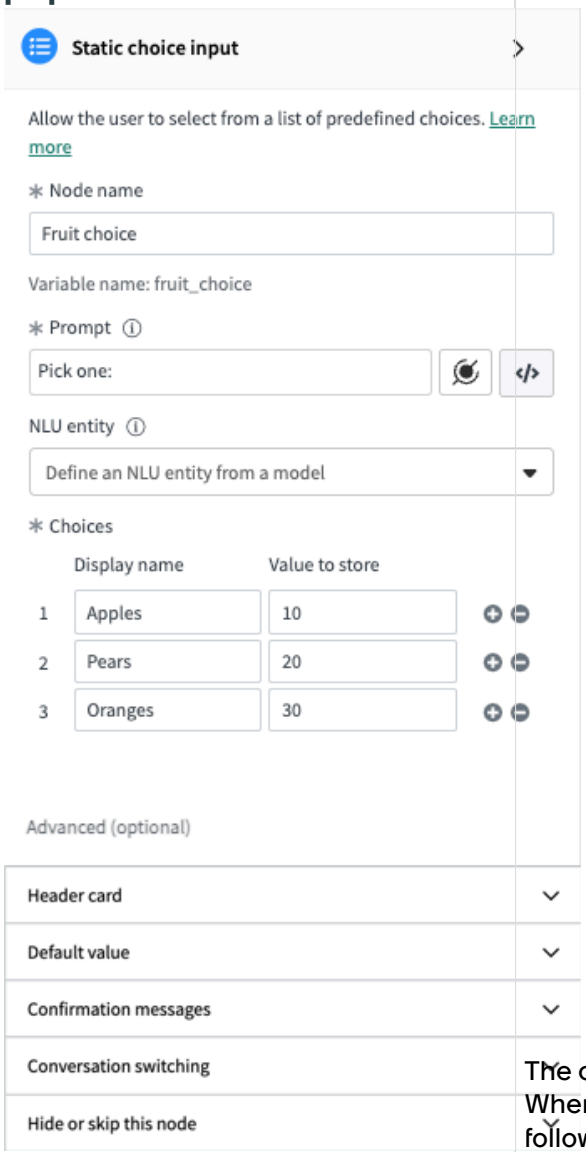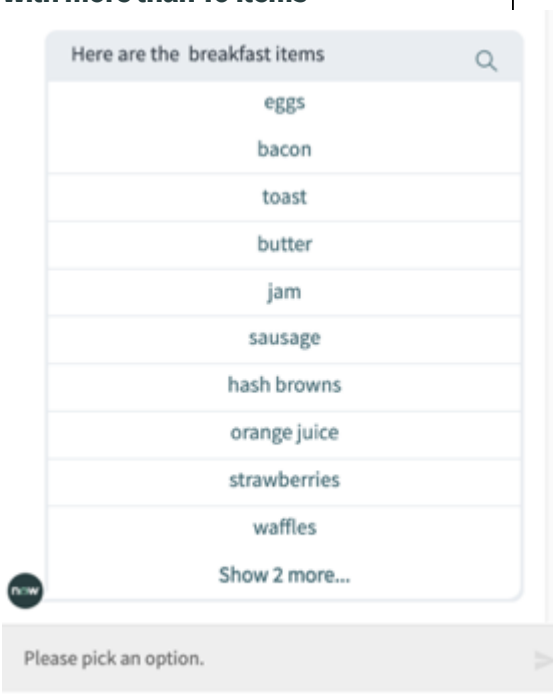© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List prompt
Static choice input control basic properties 	**Web UI Static Choice list prompt**  **Web UI Static Choice list prompt with more than 10 items**  The choice list displays 10 items per page. When 10 or more results are returned, the following occurs:

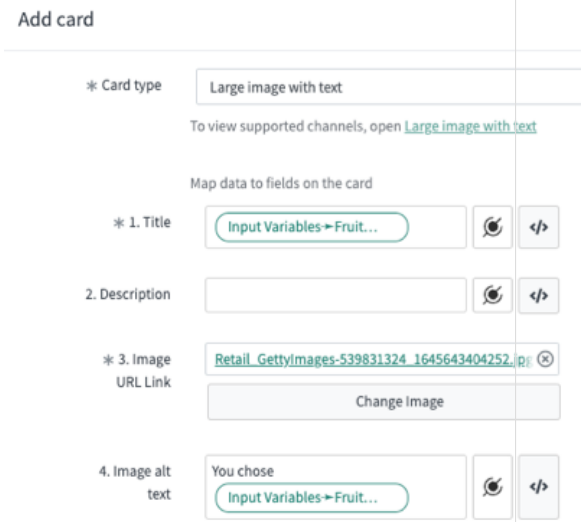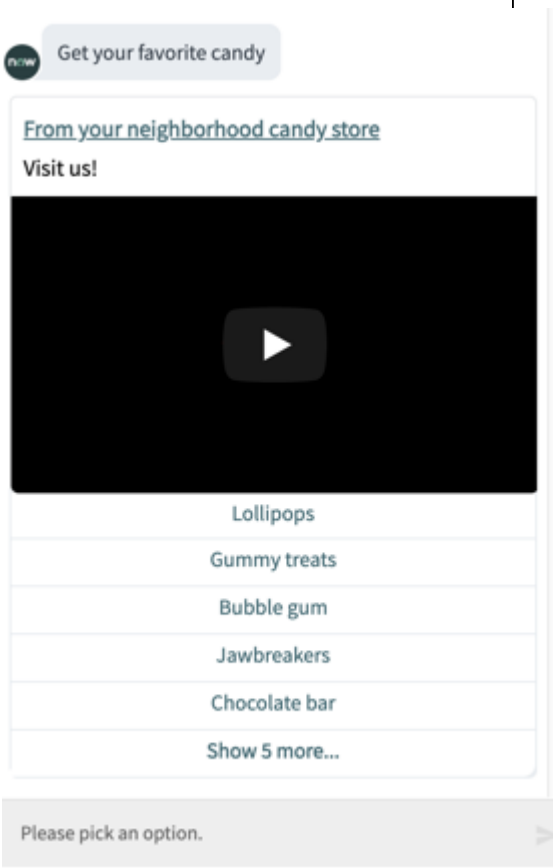© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List prompt
Add card dialog box (Header card advanced option) 	• The list includes a link at the end of the list to show more results. • A search icon displays in the prompt for filtering search results. Select the icon to open a search box and enter the filter. **Web UI Static Choice list with header card**  The choice list contains five items per page. When five or more results are returned, the list provides an option to show more results. **Note:** The search feature is suppressed when a header card is used.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support

Channel support for the Static Choice user input control

Channel	LLM support	NLU/ keyword support	Constraints
Web UI	Not supported	Supported	None
Mobile UI	Not supported	Supported	None
Now Assist panel	Not supported	Supported	None
Microsoft Teams	Supported	Supported	None
Slack	Not supported	Supported	Header cards aren't supported. When a choice list has three or fewer choices, Slack displays the list as buttons.
Workplace	Not supported	Supported	Header cards aren't supported.
Facebook Messenger	Not supported	Supported	In a quick reply, the label has the maximum character limit of 20 characters. You can view only 13 quick replies at a time. If there are more than 13 quick replies, the pagination format is used to view more options. The default value of the maximum number of replies for a page is set in the *sn_va_fb_messenger.max_quick_replies* system property. This property is located in the System Property [sys_properties] table.
SMS Twilio	Supported	Supported	Header cards aren't supported.
LINE	Not supported	Supported	In a quick reply, the label has a maximum limit of 20 characters. You can view only 13 quick replies at a time. If there are more than 13 quick replies, the pagination format is used to view more options. The default value of the maximum number of replies for a page is set in the *sn_va_line.max.picker.choices* system property. The property is located in the System Property [sys_properties] table.
WhatsApp	Supported	Supported	None
Apple Messages for Business	Not supported	Supported	None
Alexa (Voice)	Not supported	Supported	For screen devices, use touch scroll. For nonscreen devices, use voice pagination.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Grouped Choice user input control

Use the Grouped Choice user input control in a Virtual Agent topic to list multiple groups of choices in one message.

Grouped Choice list display

The Grouped Choice list prompts users to select related choices in one message through the default **Select a choice** button. You can enable multi-select for each choice's group and also provide images and short descriptions to create a richer user experience. Users are presented with groups of choices where they're required to submit one selection before returning to the Virtual Agent topic.

Inputs are recorded on the Interactions [interactions] table. For more information, see Virtual Agent interaction records.

Grouped Choice user input control properties

Property	Description
Node name	Name that identifies this Grouped Choice user control node in the topic flow.
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. For example: `Please select your meal preference.`
Group name	Name that identifies the grouped choice list in the property sheet. Add one (required) or multiple groups of related choices. Users must select one choice out of all groups. Use short phrases in your choice lists.
Choices	Number of choices added to each group.
Add a group of choices dialog box	
This dialog box only appears after **Add** is selected.	
Group name	Name that identifies the grouped choice list in the property sheet. A limit of 40 characters for choice list labels exists. The **Variable name** field is automatically generated from the group name. This read-only variable name appears in all lower-case text and substitutes any spaces in the group name for underscores. If multiple lists with the same name exist, the variable name is appended with _1, _2, _3, and so on. Use this variable in your conversation flow to retrieve user responses for each group within the Grouped Choice node.
Display as	Group heading title that appears in the rendered client.
Display name	Choice name that is displayed to users. At least two unique choices are required.
Value	String that is stored in the variable when the corresponding choice is selected. This value is automatically generated from the display name, but you can edit the field as needed.
Image	Option to an add image for the choice. Individual choice images are entered after you select **Add details**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	To set this field, do one of the following: • Specify the URL link by either entering the link text, using a data pill, or using a script. • Upload an image file by selecting **Upload Image**.
Description	Option to provide additional information about the choice. Individual choice descriptions are entered after you select **Add details**. For example: If the grouped choice list is about passengers selecting airplane amenities, like headphones, you could include a description about the type of headphones such as `Over-ear wired headphones`.
Allow the user to select more than one choice	Option to allow users to choose multiple options from the choice list by selecting **Yes**.
Advanced	
Customize group selection	
Update title	Option to customize the title of the grouped choice's prompt button. A limit of 40 characters for choice list labels exists. If this field is left empty, the default title that users see is `Select a choice`.
Image	Option to add an image for the grouped choice's prompt button. To set this field, do one of the following: • Specify the URL link by either entering the link text, using a data pill, or using a script. • Upload an image file by selecting **Upload Image**.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`.
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.


Example Grouped Choice user input control

Note:
Virtual Agent Designer controls may display and function differently in other channels.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List prompt

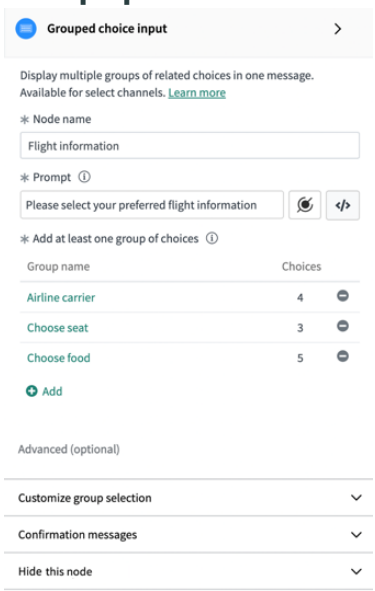
Grouped choice input control basic properties




Add a group of choices dialog box

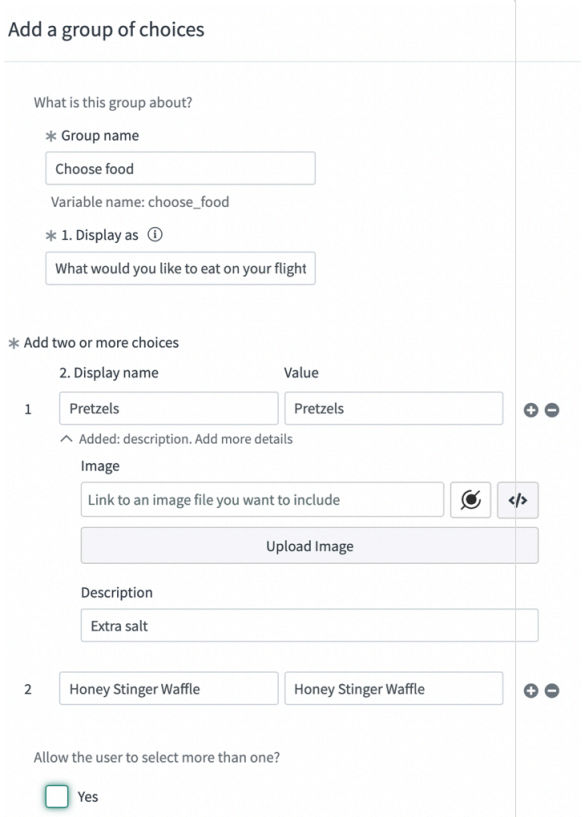

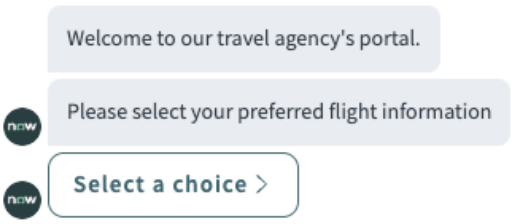
Web UI Grouped Choice list default prompt



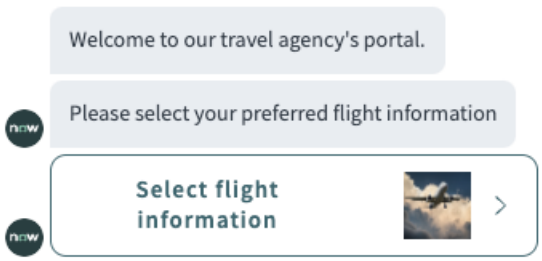Web UI Grouped Choice list with customized title and image



Web UI Grouped Choice list

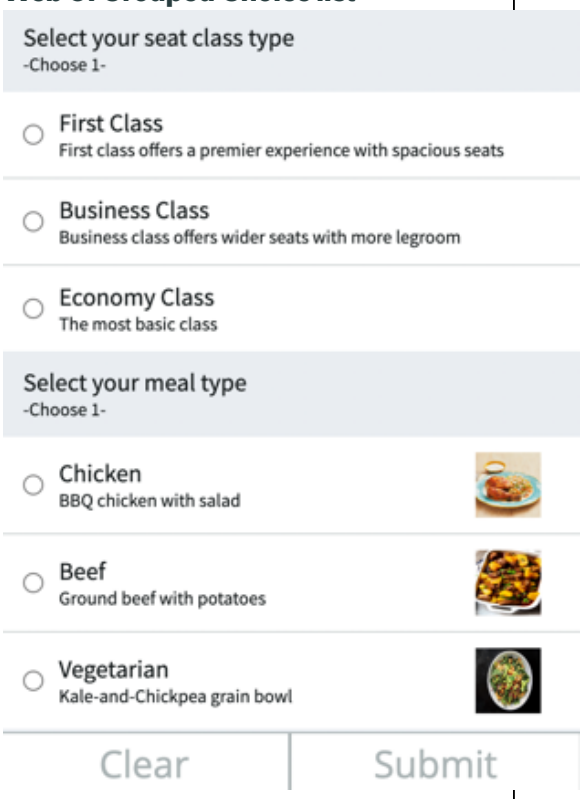

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support

Channel support for the Grouped Choice user input control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Not supported	Not applicable
Now Assist panel	Supported	None
Microsoft Teams	Not supported	Not applicable
Google chat	Not supported	Not applicable
Slack	Not supported	Not applicable
Workplace	Not supported	Not applicable
Facebook Messenger	Not supported	Not applicable
SMS Twilio	Not supported	Not applicable
LINE	Not supported	Not applicable
WhatsApp	Not supported	Not applicable
Apple Messages for Business	Not supported	Not applicable
Alexa (Voice)	Not supported	Not applicable

Dynamic Choice user input control

Use the Dynamic Choice user input control in a Virtual Agent topic to dynamically create a list of available choices for your users. Create these choices by querying a table or by using a script to dynamically create them.

Choice list display

The Dynamic Choice list contains up to 10 items per page. When more than 10 items exist in an NLU conversation, you have the option to show the additional items and also filter the search results. The choice list prompt contains a search icon that users can select to filter the results. When more than 10 items exist in an LLM conversation, a scroll bar appears. When more than 16 items exist in an LLM conversation, a search bar appears.

Tip:
If you want to change the default number of listed items per page for NLU conversations, you can modify the *com.glide.cs.picker_page_limit* system property. The default value is 10.

If selecting multiple choices is turned on, you can search within the **Search for options** field for filtering search results. Select or type all choices that apply, and then select the send icon . When you send your choices through an LLM topic, the LLM responds with whether your choices meet the validation criteria.

You can also select a choice or choices from a list in an LLM conversation by entering an utterance in the chat window. If there is no match for your input, the Virtual Agent informs you that it is not a valid choice, and prompts you to try a different input.

The Dynamic Choice control also provides the option to add a header card that displays above the choice list. Header cards are supported in web and mobile channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- The header card can contain a large or small image or a YouTube video card, along with descriptive text. The choice list contains up to five items by default, but the search feature is suppressed. If there are more than five items, users can choose to show the additional items.

- To control the number of items displayed below a header card, add the *com.glide.cs.web_header_picker_page_limit* system property. Use the **Value** to specify the number of items in the choice list. For details about creating a system property, see Add a system property.

Note:

If you populate a Dynamic Choice list node with only one choice, when testing or using the node, you receive a message reading "`We have [choice] as [node name], is this correct?`". Use multiple choices in the Dynamic Choice list node to avoid receiving this message.

You can also alter the message content by navigating to **ALL** > **sys_properties.list** and editing the *glide.cs.retry_question_message* system property. This message value is by default a string `We have {0} as {1}, is this correct?` and is used for slot-filling in multiple cases outside the Dynamic Choice list. Any changes you make are reflected in every use of this property.

Dynamic Choice user input control properties for LLM topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?` You can create rich text to alter the styling of the prompt: • Use single asterisks or underscores for italic text. For example, `*text*` or `_text_`. • Use double asterisks or underscores for bold text. For example, `**text**` or `__text__`. • Use triple asterisks or underscores for italic and bold text. For example, `***text***` or `___text___`. • Use a spaced hyphen to add a bullet point to a line. For example, `- text`. • Use a spaced right angle bracket to create a block quote. For example, `> text`.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	• Use between one and six hash marks to create headers. For example, `#text#` or `######text######` • Use brackets and parentheses to create a hyperlink. For example, `[Link text](url)`. Add an exclamation point to a hyperlink to display an image. For example, `![alt text](image url)`
NLU entity	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent. When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity. This field is available only when NLU discovery is enabled on the instance.
Choices	
Populate choices by	Type of dynamic variable to be used. Select one of the following options:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description

	• **Record**: Returns records from the table selected. The values for these options are GlideRecord objects.
	• **Script**: Expression that returns an array of options.
	
	Note:
	
	For more efficient pagination return results for a large data set when using a script expression, review the following script and determine whether you want to use this script:
	
	`(function execute() {`
	
	`var pagingUtil = new global.VirtualAgentChoicePagingUtil(null, "sys_user", null, "user_name,name", "active=true", null, vaVars);`
	
	`var gr = pagingUtil.getPagingGlideRecordSecure("name", false);`
	
	`var options = pagingUtil.getSecureOptions(gr, null,'user_name', ['user_name','name']);`
	
	`return options;`
	`})()`
	
	For more information about the preceding scripting details, review information about GlideRecords and the additional information:
	
	○ *`fieldName`*: Field name is optional information. Pass with `null`.
	○ *`table`*: Table name to query for displaying the available options.
	○ *`pageSize`*: Page size is optional information. Pass with `null`.
	○ *`searchColumns`*: Table columns in a comma-delimited list that applies to any searchText.
	○ *`encodedQuery`*: Initial query to apply to table rows. For example, `active=true`.
	○ *`searchText`*: Search text is optional information. Pass with `null`.
	○ *`vaVars`*: Reference to virtual agent context variables (`vaVars`).
	○ *`orderByColumn`*: Table column used to order the options.
	○ *`orderDescending`*: Options appear in descending order. Only `true` or `false` values accepted.
	○ *`gr`*: Glide record name.
	○ *`startRow`*: Starting row is optional information. Pass with `null`.
	○ *`valueColumn`*: Table column name to use as the value of each option.
	○ *`labelColumns`*: Array of table columns to use for each option display.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Table	Table to be searched, available only if you selected **Record** as the method to populate choices.
Filter choices	Option to use the Virtual Agent Designer condition builder or provide a script. Select one of the following: • **Condition Builder**: Creates a filter used to select a subset of records from the table. • **Script**: Defines the enumeration list for the options (choice list) to be displayed. The name-value pair is stored as a string object. This field is available only when the **Record** option is selected.
Allow the user to select more than one choice	Option to allow users to choose multiple choices from the choice list.
No records response message	Message displayed to the user when the table search doesn't return any records. The message can be either a text string or a script that returns text.
Advanced	
Header card	
Default value	
Default Value	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
This section is available only when NLU discovery is enabled on the instance.	
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

Example Dynamic Choice user input control for LLM topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

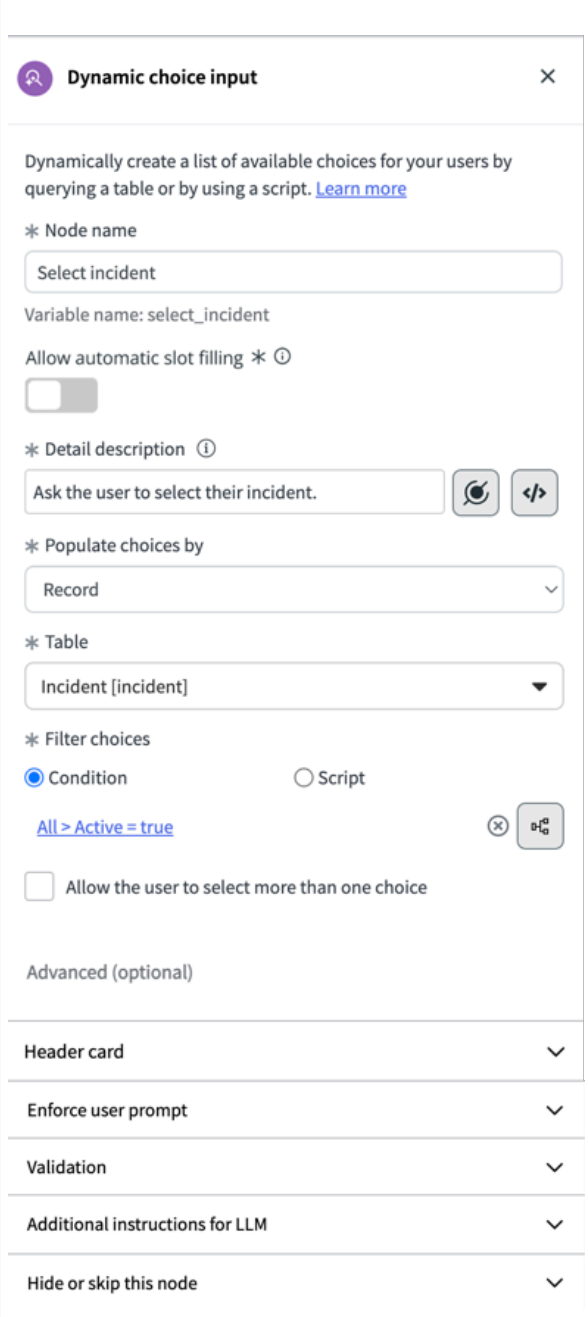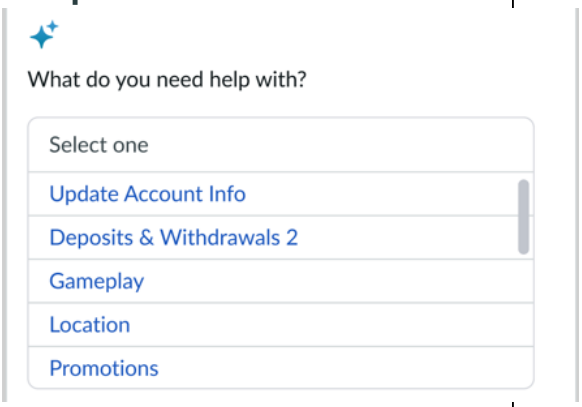© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List user prompt
	**Dynamic Choice list prompt example** 

Dynamic Choice user input control properties for NLU topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?` You can create rich text to alter the styling of the prompt: • Use single asterisks or underscores for italic text. For example, `*text*` or `_text_`. • Use double asterisks or underscores for bold text. For example, `**text**` or `__text__`. • Use triple asterisks or underscores for italic and bold text. For example, `***text***` or `___text___`. • Use a spaced hyphen to add a bullet point to a line. For example, `- text`. • Use a spaced right angle bracket to create a block quote. For example, `> text`. • Use between one and six hash marks to create headers. For example, `#text#` or `######text######` • Use brackets and parentheses to create a hyperlink. For example, `[Link text](url)`. Add an exclamation point to a hyperlink to display an image. For example, `![alt text](image url)`
NLU entity	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent. When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity. This field is available only when NLU discovery is enabled on the instance.
Choices	
Populate choices by	Type of dynamic variable to be used. Select one of the following options:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description

	• **Record**: Returns records from the table selected. The values for these options are GlideRecord objects.
	• **Script**: Expression that returns an array of options.
	
	Note:
	
	For more efficient pagination return results for a large data set when using a script expression, review the following script and determine whether you want to use this script:
	
	`(function execute() {`
	
	`var pagingUtil = new global.VirtualAgentChoicePagingUtil(null, "sys_user", null, "user_name,name", "active=true", null, vaVars);`
	
	`var gr = pagingUtil.getPagingGlideRecordSecure("name", false);`
	
	`var options = pagingUtil.getSecureOptions(gr, null,'user_name', ['user_name','name']);`
	
	`return options;`
	`})()`
	
	For more information about the preceding scripting details, review information about GlideRecords and the additional information:
	
	◦ *`fieldName`*: Field name is optional information. Pass with `null`.
	◦ *`table`*: Table name to query for displaying the available options.
	◦ *`pageSize`*: Page size is optional information. Pass with `null`.
	◦ *`searchColumns`*: Table columns in a comma-delimited list that applies to any searchText.
	◦ *`encodedQuery`*: Initial query to apply to table rows. For example, `active=true`.
	◦ *`searchText`*: Search text is optional information. Pass with `null`.
	◦ *`vaVars`*: Reference to virtual agent context variables (`vaVars`).
	◦ *`orderByColumn`*: Table column used to order the options.
	◦ *`orderDescending`*: Options appear in descending order. Only `true` or `false` values accepted.
	◦ *`gr`*: Glide record name.
	◦ *`startRow`*: Starting row is optional information. Pass with `null`.
	◦ *`valueColumn`*: Table column name to use as the value of each option.
	◦ *`labelColumns`*: Array of table columns to use for each option display.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Table	Table to be searched, available only if you selected **Record** as the method to populate choices.
Filter choices	Option to use the Virtual Agent Designer condition builder or provide a script. Select one of the following: • **Condition Builder**: Creates a filter used to select a subset of records from the table. • **Script**: Defines the enumeration list for the options (choice list) to be displayed. The name-value pair is stored as a string object. This field is available only when the **Record** option is selected.
Allow the user to select more than one choice	Option to allow users to choose multiple choices from the choice list.
No records response message	Message displayed to the user when the table search doesn't return any records. The message can be either a text string or a script that returns text.
Advanced	
Header card	
Default value	
Default Value	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
This section is available only when NLU discovery is enabled on the instance.	
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.


Example Dynamic Choice user input control for NLU topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List prompt

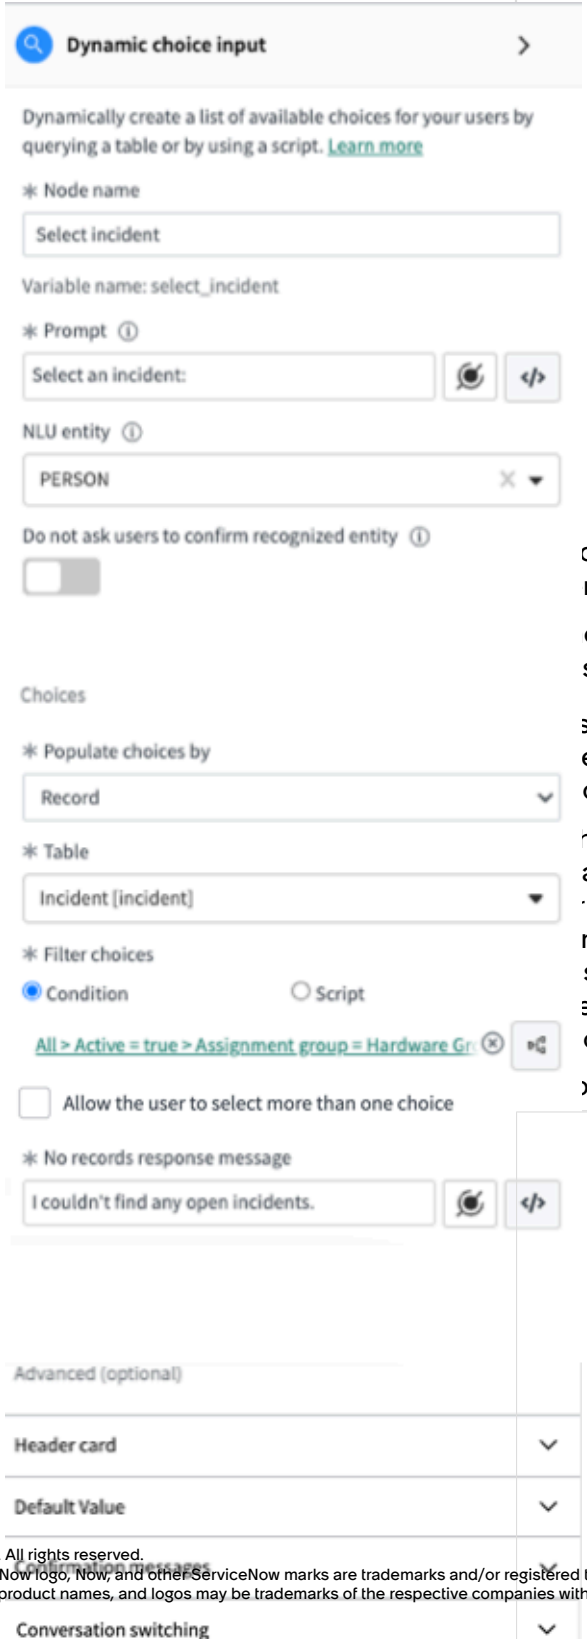Dynamic Choice user input control basic properties



Web UI Dynamic Choice list prompt

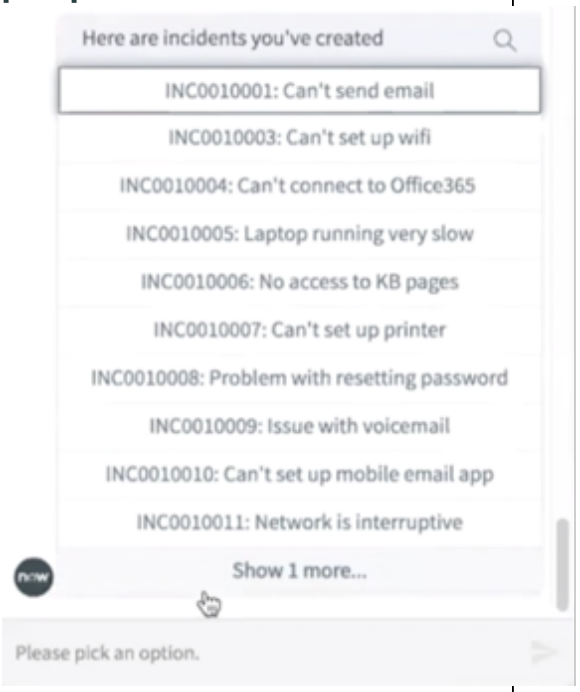


choice list displays 10 items per page.
n 10 or more results are returned:

e list includes a link at the end of the list
show more results.

search icon ( ) displays in the prompt for
ering search results. Users select the icon
open a search box and enter the filter.

nen selecting multiple choices, you can
arch within the **Search for options** field
filtering search results. If you input the
ript to enable secondary fields found in
s topic, the search filter results apply to
e secondary fields, too. Select or enter all
oices that apply, and then select the send
on .

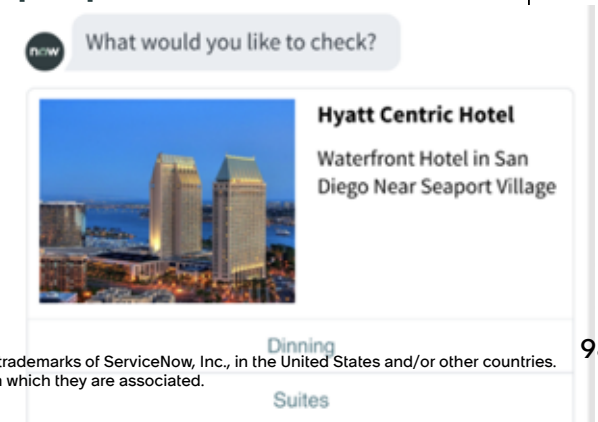Web UI Dynamic Choice list prompt with header card



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	List prompt
	The choice list contains five items per page. When five or more results are returned, the list provides an option to show more results. **Note:** The search feature is suppressed when a header card is used.

Dynamic Choice script examples

The following script example can be used in the **Define choices** field only if the value for **Populate choice by** is set to **Script**. This script enables requesters to see their previously selected choices if they choose to edit their choices later in the conversation. This script also displays secondary fields to requesters, such as an email address, gender marker, or both, to help them further differentiate their available choices. Displaying the secondary field to requesters can be especially helpful when dealing with similar values, such as selecting the correct employee name when working with the same or similar names (that is, Christopher Smith or Chris Smith).

```
(function execute() {
    var pagingUtil = new
 global.VirtualAgentChoicePagingUtil(null, "sys_user", 10,
 "user_name,name",
      "active=true", null, vaVars);
    var selectedOptions =
 pagingUtil.getSavedSelectedOptions("user", vaSystem);
    if (!selectedOptions || selectedOptions.length == 0) {
      // Secondary labels can be passed to selected options
       selectedOptions.push({ "value": "abel.tuter", "label":
 "Abel Tuter"
        ,"secondary_label": ["abel.tuter@example.com", "male"]
        });
       selectedOptions.push({ "value": "Beth.anglin", "label":
 "Beth Anglin"
        ,"secondary_label": ["beth.anglin@example.com",
 "female"]
        });
    }
    vaSystem.setSelectedOptions(selectedOptions, "user", false);
    // Topic authors have the ability to define which values
 should go in the
    // secondary labels by adding secondary label functions
    pagingUtil.addSecondaryLabelFunction(function (gr) {
      return gr.getValue("email");
    });
    pagingUtil.addSecondaryLabelFunction(function (gr) {
      return gr.getValue("gender");
    });
    var gr = pagingUtil.getPagingGlideRecordSecure("name",
 false);
    var options = pagingUtil.getSecureOptions(gr,
 null,'user_name', ['user_name']);
    return options;
})()
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Dynamic Choice list value expression

```
(function execute(table) {
        var options = [];
        var gr = new GlideRecordSecure(table);
        gr.addEncodedQuery('active=true');
        gr.setLimit(5);
        gr.query();
        while(gr.next()) {
            options.push({ 'value': gr.getUniqueValue(),
 'label': gr.getValue('short_description') });
        }
        return options;
})(table)
```

The script in the *Choice Value Expression* property defines and returns an array of choices. In the example, the script creates an array called `options`, and adds each record found in a GlideRecord query to this array. Each element in the array is given a value in the `value` and `label` keys using data from that GlideRecord. The *Table* property of the control defines the table used by the script. This example script uses `gr.setLimit(5)` to limit the number of records returned to 5. Using this method helps prevent returned records from creating an overly large choice list.

Dynamic choice control value expression keys

Key	Description
value	The value for the choice. When a user selects a choice from the control, this value is stored in the variable named in the *Variable name* property.
label	The label that appears for this choice in the choice list.

Channel support

Channel support for the Dynamic Choice user input control

Channel	LLM support	NLU/ keyword support	Constraints
Web UI	Not supported	Supported	None
Mobile UI	Not supported	Supported	None
Now Assist panel	Not supported	Supported	None
Microsoft Teams	Supported	Supported	None
Slack	Not supported	Supported	Header cards aren't supported.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Dynamic Choice user input control (continued)

Channel	LLM support	NLU/ keyword support	Constraints
Workplace	Not supported	Supported	Header cards aren't supported.
Facebook Messenger	Not supported	Not supported	Not applicable
SMS Twilio	Not supported	Supported	Header cards aren't supported.
LINE	Not supported	Not supported	Not applicable
WhatsApp	Supported	Supported	None
Apple Messages for Business	Not supported	Supported	None
Alexa (Voice)	Not supported	Supported	For screen devices, use touch scroll; clicking links not supported. For nonscreen devices, use voice pagination.

Boolean user input control

Use the Boolean user input control in a Virtual Agent topic to present a Yes/No prompt to the user.

Boolean user input controls prompt the user to answer a Yes/No question, and store the response as a string with a value of *true* or *false*. Use this value in topic utilities, such as the prompted Decision utility, to branch the topic flow based on the answer.

When you place this control on the canvas, a window appears with the header `Add a decision node?` The window message reads `A decision node will be added following this node` and has **No** and **Yes** options. If you select **No**, you must add a Decision utility to complete the Boolean. You can customize the names of the output values on the Decision node. For more information, see Decision utility.

Boolean user input control properties for LLM topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Allow automatic slot-filling	Toggle to allow this node's value to be automatically set by other nodes, as well as during topic discovery. When this toggle is activated, the Detail description field changes from dynamic Data Pill Picker and script options to a static text field.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Detail description	Description of the information that you need from users. If the **Allow automatic slot filling** toggle is deactivated, you can create a dynamic detail description by selecting the Data Pill Picker icon to define conditions, or select the Open Editor icon to enter a script. If the **Allow automatic slot filling** toggle is activated, you can only enter a static description. 
Advanced	
Enforce user prompt	Toggle to open a field for a custom message shown to the user instead of the message generated by the large language model (LLM). You can create custom messages in plain language, input a script, or define conditions with the data pill picker.
Validation	Add a script to validate the user input. For example, check if the user entered a valid email address.
Additional instructions for LLM	Further instructions to the LLM, such as adding data formats, restrictions, or default values for user responses. You can create additional instructions in plain language, input a script, or define conditions with the data pill picker.
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script. If users enter a value such as `skip this step` when the conditions do not allow skipping, they receive a message saying the node cannot be skipped and are re-prompted to provide an answer.

Example Boolean user input control for LLM topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

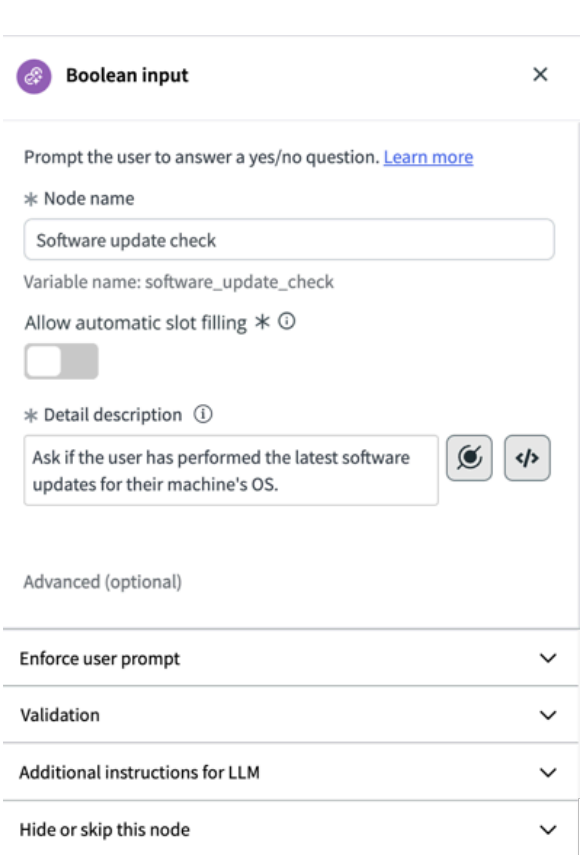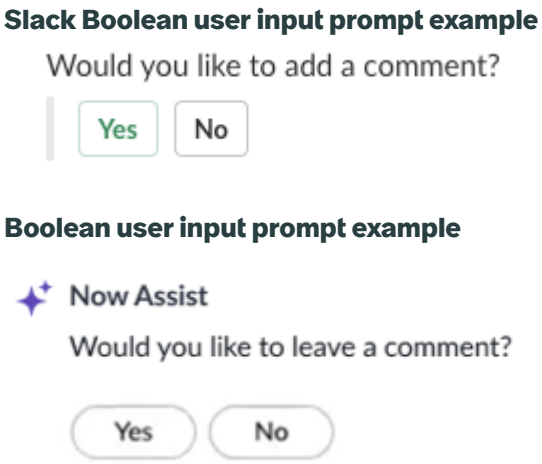© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	Input user prompt
	

Boolean user input control properties for NLU topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?`
NLU entity [NLU topic discovery only]	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent. When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity.
Advanced	
Default value	




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Predefine a value for user input	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	
This section is available only when NLU discovery is enabled on the instance.	
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

Example Boolean user input control for NLU topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

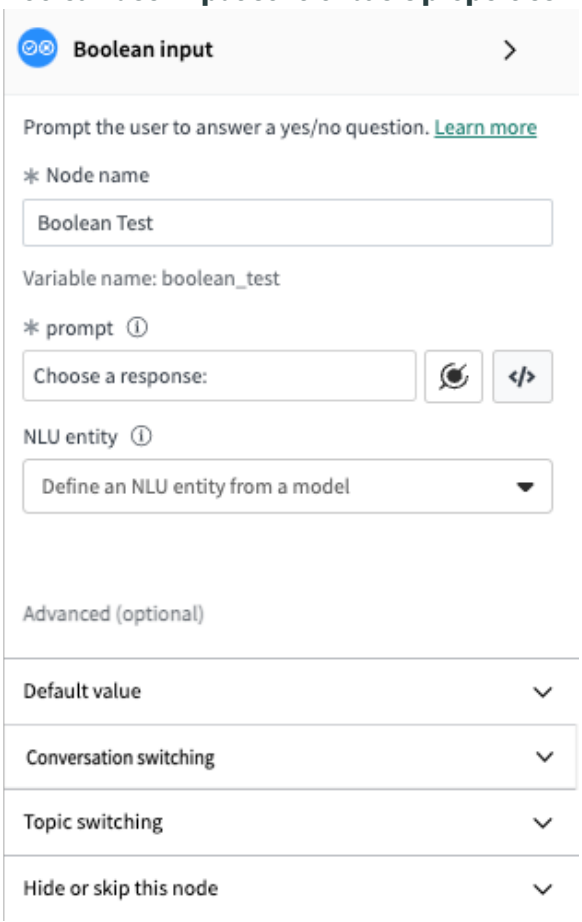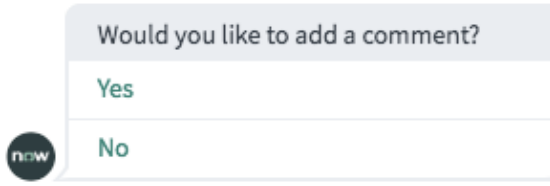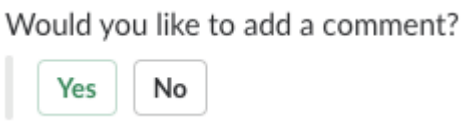© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	Input prompt
Boolean user input control basic properties 	**Web UI Boolean user input prompt**  **Slack Boolean user input prompt** 

Channel support

Channel support for the Boolean user input control

Channel	LLM support	NLU/keyword support	Constraints
Web UI	Not Supported	Supported	None
Mobile UI	Not Supported	Supported	None
Now Assist panel	Not Supported	Supported	None
Microsoft Teams	Supported	Supported	None
Slack	Not Supported	Supported	None
Workplace	Not Supported	Supported	None
Facebook Messenger	Not Supported	Supported	None
SMS Twilio	Not Supported	Supported	None
LINE	Not Supported	Supported	None
WhatsApp	Supported	Supported	None
Apple Messages for Business	Not Supported	Supported	None

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Boolean user input control (continued)

Channel	LLM support	NLU/keyword support	Constraints
Alexa (Voice)	Not Supported	Supported	None

Date Time user input control

Use the Date Time user input control in a Virtual Agent topic to enable the user to select a calendar date, time (hours and minutes), or both.

Date Time user input control properties for LLM topic discovery

The Date Time user input control accepts inputs from a calendar selection, or by entering plain language in the Virtual Agent chat window. If you type your answer, the Virtual Agent accepts different inputs depending on how your region handles dates. For example, if you're in the United States, the input control supports the MM-DD-YYYY format, while a user in Spain enters the date in DD-MM-YYYY format.

Date Time property	Description
Name	Name that identifies this node in the topic flow.
Variable Name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Allow automatic slot-filling	Toggle to allow this node's value to be automatically set by other nodes, as well as during topic discovery. When this toggle is activated, the Detail description field changes from dynamic Data Pill Picker and script options to a static text field.
Detail description	Description of the information that you need from users. If the **Allow automatic slot filling** toggle is deactivated, you can create a dynamic detail description by selecting the Data Pill Picker icon to define conditions, or select the Open Editor icon to enter a script. If the **Allow automatic slot filling** toggle is activated, you can only enter a static description. 
Input format	Type of Date Time control to be displayed. Select one of the following formats: • **Date**: Shows only the monthly calendar for the user to select the date. • **DateTime**: Shows both a monthly calendar and time picker. • **Time**: Shows only the time picker for the user to select the time (hours and minutes).
Advanced	



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Date Time property	Description
Enforce user prompt	Toggle to open a field for a custom message shown to the user instead of the message generated by the large language model (LLM). You can create custom messages in plain language, input a script, or define conditions with the data pill picker.
Validation	Add a script to validate the user input. For example, check if the user entered a valid email address.
Additional instructions for LLM	Further instructions to the LLM, such as adding data formats, restrictions, or default values for user responses. You can create additional instructions in plain language, input a script, or define conditions with the data pill picker.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script. If users enter a value such as `skip this step` when the conditions do not allow skipping, they receive a message saying the node cannot be skipped and are re-prompted to provide an answer.

Example Date Time user input control for LLM topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

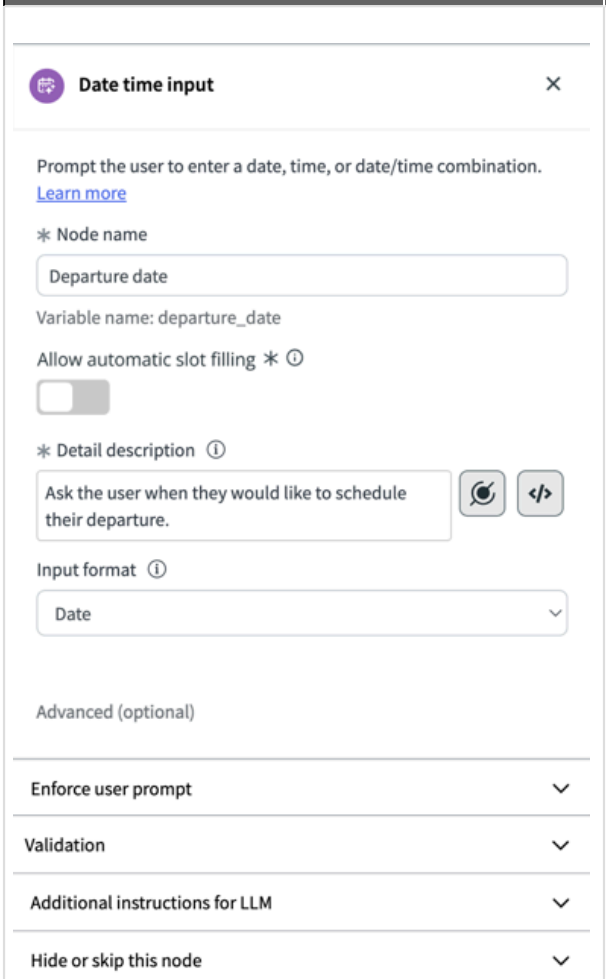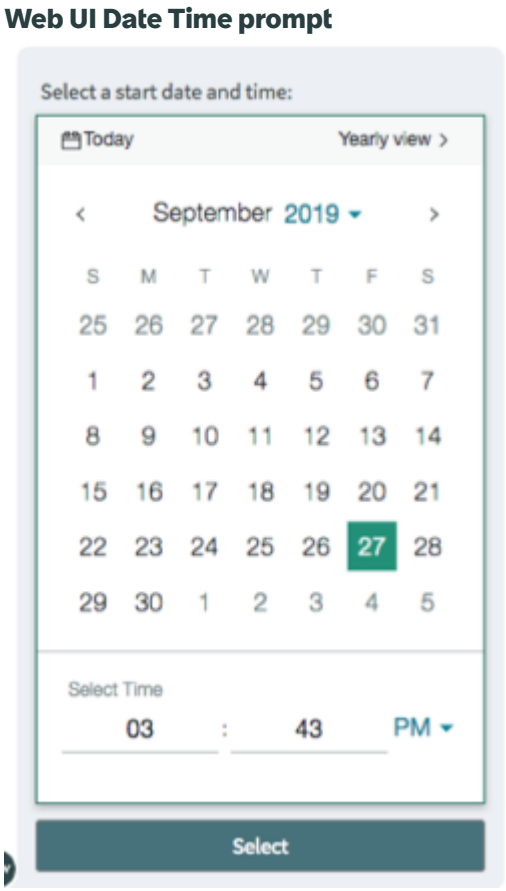© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Input properties	Date Time prompt
	

Date Time user input control properties for NLU topic discovery

Date Time property	Description
Name	Name that identifies this node in the topic flow.
Variable Name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?`
NLU entity [NLU topic discovery only]	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Date Time property	Description
	When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity.
Input format	Type of Date Time control to be displayed. Select one of the following formats: • **Date**: Shows only the monthly calendar for the user to select the date. • **DateTime**: Shows both a monthly calendar and time picker. • **Time**: Shows only the time picker for the user to select the time (hours and minutes).
Advanced	
Default value	
Predefine a value for user input	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	
This section is available only when NLU discovery is enabled on the instance.	
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Date Time property	Description
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

Example Date Time user input control for NLU topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

Input properties	Date Time prompt
Date Time user input control basic properties Date time input Prompt the user to enter a date, time, or date/time combination. Learn more * Node name Departure date Variable name: departure_date * Prompt When do you want to leave? Input format DateTime NLU entity DepartureDate Do not ask users to confirm recognized entity Advanced (optional) Default Value Confirmation messages Conversation switching Hide or skip this node	**Web UI Date Time prompt** Select a start date and time: Today Yearly view September 2019 S M T W T F S 25 26 27 28 29 30 31 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 1 2 3 4 5 Select Time 03 : 43 PM Select

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support

Channel support for the Date Time user input control

Channel	LLM support	NLU/ keyword support	Constraints
Web UI	Not Supported	Supported	None
Mobile UI	Not Supported	Supported	None
Now Assist panel	Not Supported	Supported	None
Microsoft Teams	Supported	Supported	None
Slack	Not Supported	Supported	None
Workplace	Not Supported	Supported	The Workplace interface does not natively support a date selection widget. Date and time selection is instead done with the buttons that are supported in these interfaces. The Date Time user input control prompts the user for a date, showing the current date and time. The user selects the month, day, year, or time button to modify that value. The time and day fields prompt the user to type in a new value. The month and year fields show a set of buttons with the current and upcoming months or years. Select one of these buttons or type in a value to set the time or year.
Facebook Messenger	Not Supported	Supported	If your administrator has set the option to request the time zone from the customer, the selected date and time reflect the customer's time zone. Otherwise, they appear in the UTC time zone. For more information about the time zone setting, see Set up Conversational Integration with Facebook Messenger.
SMS Twilio	Supported	Not supported	Not applicable
LINE	Not Supported	Supported	None
WhatsApp	Supported	Supported	None
Apple Messages for Business	Not Supported	Supported	None
Alexa (Voice)	Not Supported	Supported	For best results, enable NLU at the node.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

File Picker user input control

Use the File Picker user input control in a Virtual Agent topic to prompt a user to upload an image or any file type. After the user uploads an image file, the image appears immediately in the Virtual Agent client.

File Picker user input control properties

All file types are supported by the file picker, except the SVG format for image files. Although the image can be high resolution, the image displayed in the Virtual Agent client is scaled based on the aspect ratio. Images scale to fit within the chat window.

In Microsoft Teams, a file can be uploaded through the paper clip (attachment) icon, or using drag-and-drop. Copying and pasting only works for image files. Users can share attachments on Microsoft Teams through the Virtual Agent file picker user input control, and by sending attachments while chatting with a live agent.

The live agent picker scenario:

- Doesn't support the SVG format for image files.
- Supports a combination of text, files, and emojis. However, orders may show up differently between how a user sends these items versus how an agent views these items.
- Doesn't support formatted text.

When a file upload is in progress, you can't upload or enter text for the file picker control. The uploaded files go through a virus scan and validation.

You can link an uploaded file to a case you create using the Record Action utility. For more information, see Record Action utility.

The following table lists the details about the properties of the File Picker.

File Picker properties

Property	Description
Node name	Name that identifies the File Picker user input control node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the *Node name* property.
Prompt	Prompt or question asking the user to upload the item. The prompt can be a text string that includes variables or a script that returns text.
Allow user to upload	Type of file to upload. All file types are supported, except the SVG format for image files.
Advanced	
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

File Picker properties (continued)

Property	Description
	if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

Using the File Picker control in different client interfaces

The process to select an image differs based on the Virtual Agent client interface. Use the following steps to select an image in the client interface of your choice.

The following table lists details about the File Picker control in different client interfaces.

File Picker control in different client interfaces

Platform	Steps to select an image or file
Web UI	1. Select **Click here to upload an image.** or **Click here to upload a file.** 2. Select a file from your local computer. All file types are supported.
Slack	1. Select the Green **+** icon. 2. Select **Your computer**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.




File Picker control in different client interfaces (continued)

Platform	Steps to select an image or file
	3. Select an image file from your local computer. All file types are supported.
Microsoft Teams	**1.** On your local computer, copy an image file. **2.** Paste the image file into the text input field in Microsoft Teams.
Workplace	**1.** Select the Workplace image icon  . **2.** Select an image file from your local computer. All file types are supported.
ServiceNow mobile	**1.** Touch **Upload an image**. **2.** Select an image file from the photo library on your mobile device. **Note:** The **Upload a file** button is only available when you enable the **All file types** file picker property.

Example of a File Picker user input control

Note: Virtual Agent Designer controls may display and function differently in other channels.

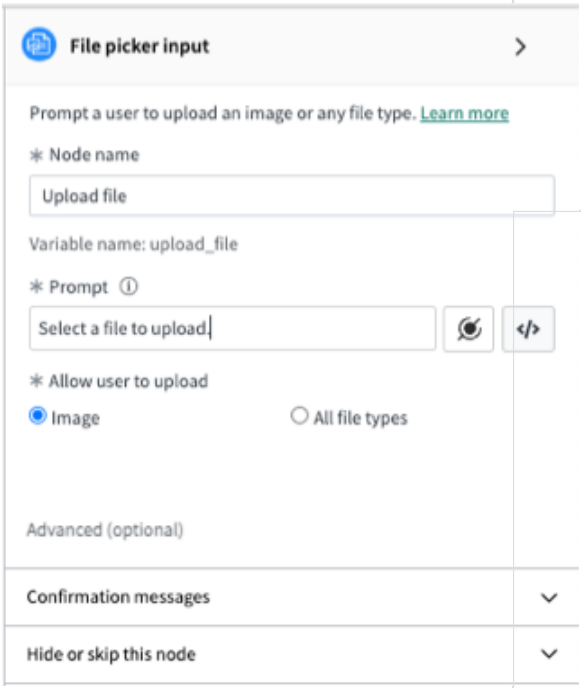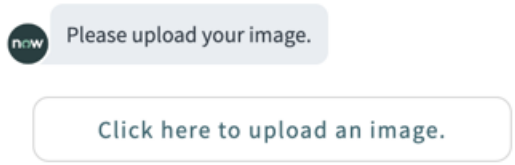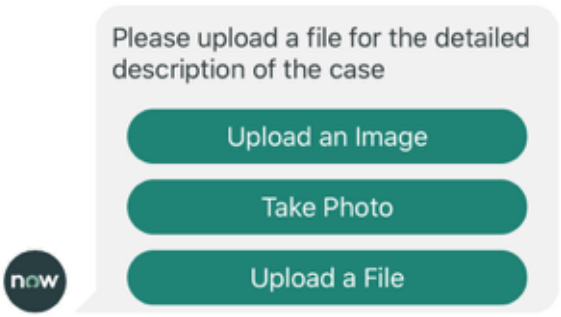
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

File Picker properties	File Picker prompt
File Picker user input control basic properties 	**Web UI file picker prompt (image)**  **ServiceNow mobile file picker prompt** 

Channel support

The following table lists the details about the channel support for the File Picker user input control.

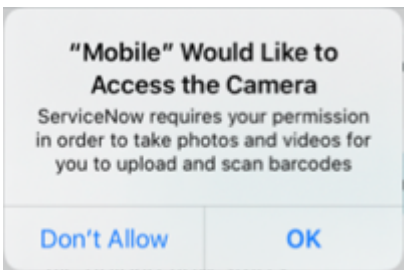Channel support for the File Picker user input control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	Prompt that users see asking for permission for the app to access a camera or file system if the user has not already given the permission. 
Now Assist panel	Supported	None

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the File Picker user input control (continued)

Channel	Support	Constraints
Microsoft Teams	Supported	None
Google chat	Supported	None
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Supported	Supported file types are JPG, PNG, BMP, and MP4. The files have a maximum size limit based on the file type: • For images, the maximum size limit is 10 MB. • For videos, the maximum size limit is 200 MB.
SMS Twilio	Partial support	Image files only
LINE	Supported	Supported file types are JPG, PNG, BMP, and MP4. The files have a maximum size limit based on the file type: • For images, the maximum size limit is 10 MB. • For videos, the maximum size limit is 200 MB.
WhatsApp	Supported	None
Apple Messages for Business	Supported	None
Alexa (Voice)	Not supported	Not applicable

Carousel user input control

Use the Carousel user input control in a Virtual Agent topic to present a prompt and a horizontal series of labeled images. The user can select a single item from the carousel.


Tip:
If you want to change the default number of listed items per page, you can modify the *com.glide.cs.picker_page_limit* system property. The default value is 10.

Carousel input control properties for LLM topic discovery

Note:
The Carousel user input control is not supported in Now Assist in Virtual Agent.

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.


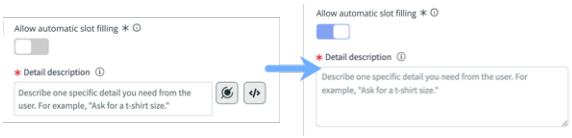
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Allow automatic slot-filling	Toggle to allow this node's value to be automatically set by other nodes, as well as during topic discovery. When this toggle is activated, the Detail description field changes from dynamic Data Pill Picker and script options to a static text field.
Detail description	Description of the information that you need from users. If the **Allow automatic slot filling** toggle is deactivated, you can create a dynamic detail description by selecting the Data Pill Picker icon to define conditions, or select the Open Editor icon to enter a script. If the **Allow automatic slot filling** toggle is activated, you can only enter a static description. 
Define carousel items	Use a script to create items for selection in your carousel. The script should return an array containing one or more items. See the Example carousel item expression section in this topic.
Advanced (optional)	
Enforce user prompt	
Enforce user prompt	Toggle to open a field for a custom message shown to the user instead of the message generated by the large language model (LLM). You can create custom messages in plain language, input a script, or define conditions with the data pill picker.
Validation	Add a script to validate the user input. For example, check if the user entered a valid email address.
Additional instructions for LLM	Further instructions to the LLM, such as adding data formats, restrictions, or default values for user responses. You can create additional instructions in plain language, input a script, or define conditions with the data pill picker.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true. This field is not applicable when the Carousel node is used within the Input Collector node.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	If users enter a value such as `skip this step` when the conditions do not allow skipping, they receive a message saying the node cannot be skipped and are re-prompted to provide an answer.

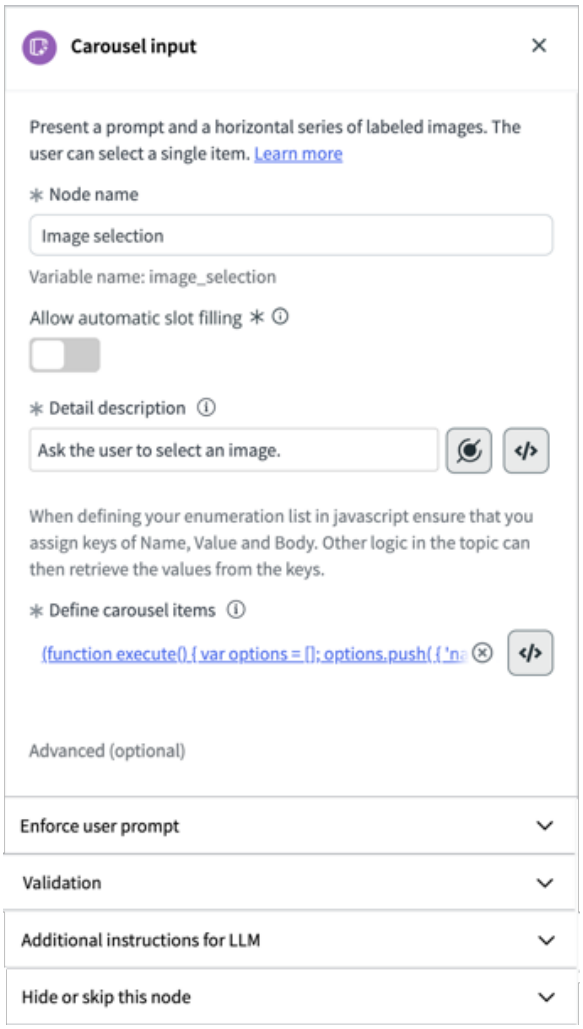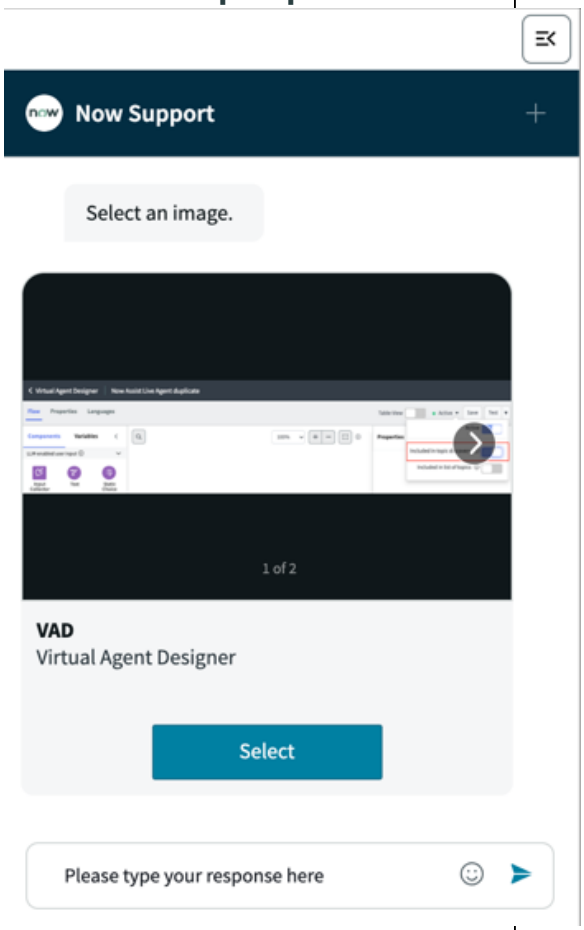Example Carousel input control for LLM topic discovery

Carousel properties	Carousel prompt
	**Web UI carousel prompt** 

Carousel input control properties for NLU topic discovery

Property	Description
Node name	Name that identifies this node in the topic flow.
Variable name	Name of the variable that stores the user response to this prompt. The variable name is automatically created from the **Node name** property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Prompt	Prompt or question for the user. The prompt can be either a text string or a script that returns text. This value is used only when the default value is not specified. For example: `What's your name?`
NLU entity	Option to associate an NLU entity with the node. If an NLU entity is associated with the input variable for this node, Virtual Agent can slot-fill the specified value based on the user's utterance. Select an entity from the list of entities associated with the topic intent. When you specify an entity for the node, the Do not ask users to confirm recognized entity toggle switch is displayed. When enabled, users are not prompted to confirm the extracted entity. This field is available only when NLU discovery is enabled on the instance.
Define carousel items	Use a script to create items for selection in your carousel. The script should return an array containing one or more items. See the Example carousel item expression section in this topic.
No records response message	Message displayed to the user when the table search doesn't return any records. The message can be either a text string or a script that returns text.
Advanced	
Default value	
Default value	Predefined value for the user response to the question or prompt. The response defined in the **Default value confirmation** field asks the user to confirm the default value. If the user responds with `no`, the value becomes null. The default value can be either a text string or a script that returns text. For example, if you're using dot-walking, the default value might be: `Script Variables > Last username`. Or if you're using a script, the default value might be: `{{vaScripts.lastUsername}}`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the **Default value** field is correct. This message is used instead of a value in the **Prompt** field. It can contain either a text string or a script that returns text. For example, if you're using dot-walking: `Are you (Input Variables > Username)?` Or if you're using a script, the confirmation message might be: `Are you {{vaScripts.lastUsername}}?`.
Conversation switching	
This section is available only when NLU discovery is enabled on the instance.	




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Turn on to let users change the subject	Option to enable NLU prediction for this node. If enabled, users can enter text to answer questions, regardless of the type of input control being used. Virtual Agent uses this utterance to match another existing intent, letting the user switch topics.
Hide or skip this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node if	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting if	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

Example Carousel input control for NLU topic discovery

Note:
Virtual Agent Designer controls may display and function differently in other channels.

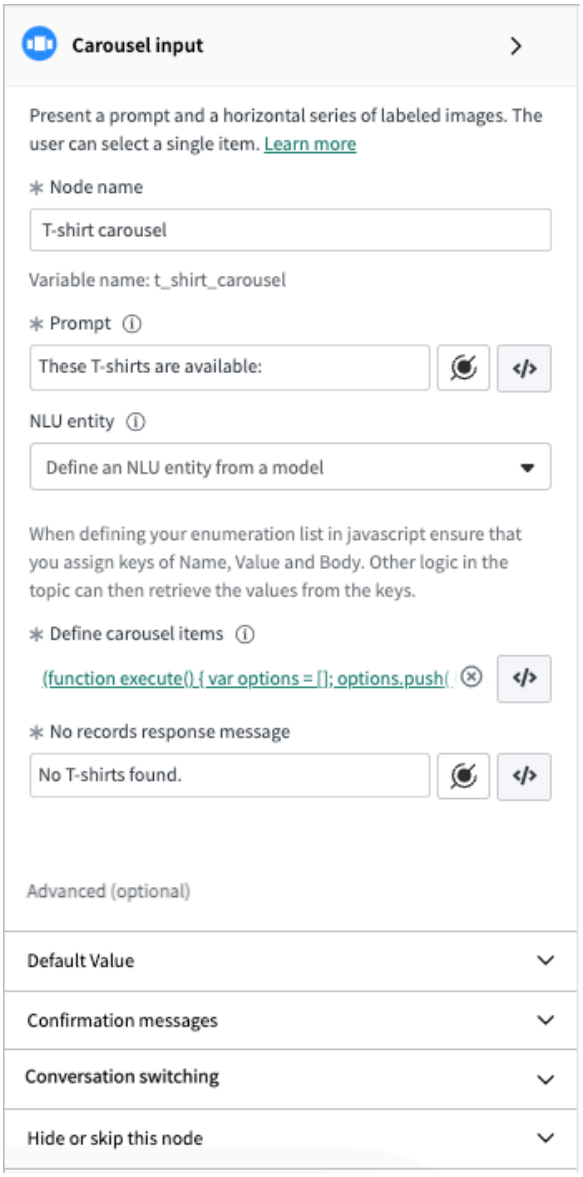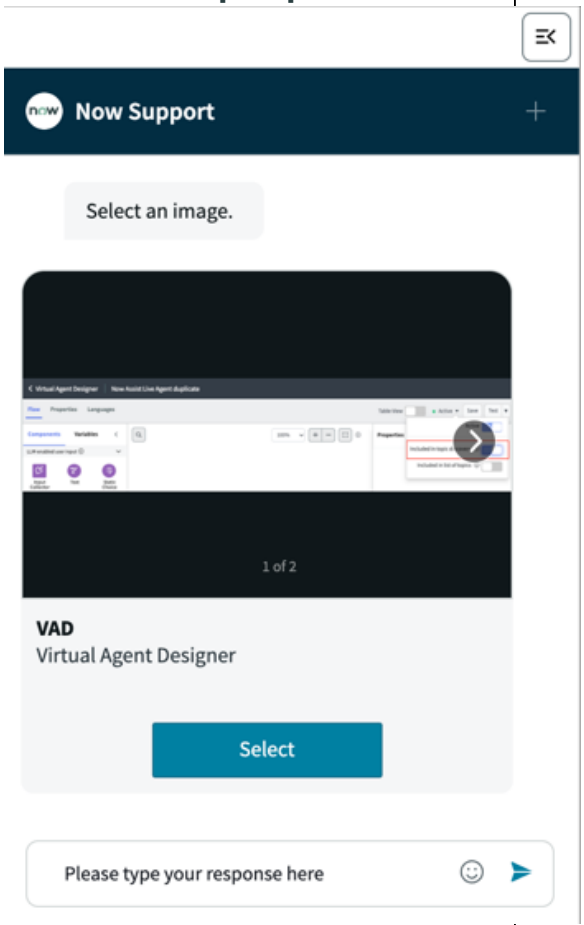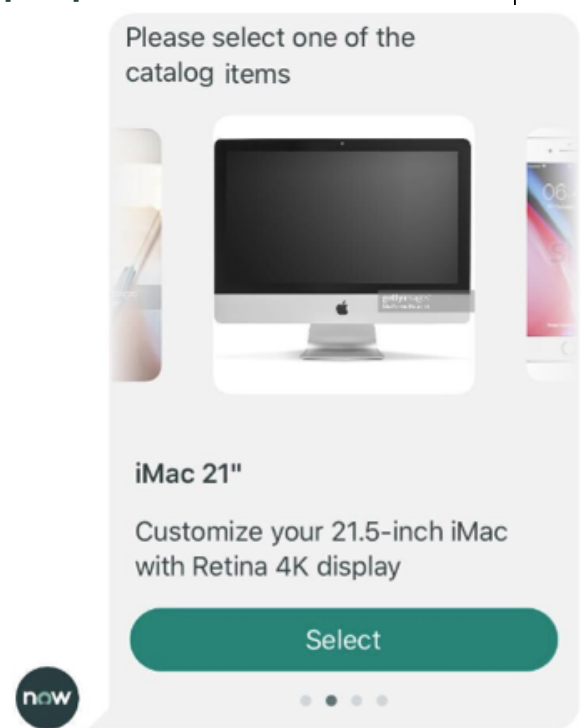© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Carousel properties	Carousel prompt
	**Web UI carousel prompt**  **ServiceNow mobile carousel prompt** 

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example carousel item expression

```
(function execute() {
    var options = [];
       options.push(
            {
                'Name': 'Item 1',
                'Value': 'item_1',
                'Description': 'Acme keyboard model 200',
                'Body':
 'https://images.pexels.com/photos/688666/pexels-photo-688666.jp
eg'
                'Card_name': 'AcmeCard'
                'Card_data': {"identifier":"IT hardware and
 software","header":"Acme keyboard model 200","description":"The
 model 200 keyboard is a ten-key-less keyboard."}
            }
       );
       options.push(
            {
                'Name': 'Item 2',
                'Value': 'item_2',
                'Description': 'Acme keyboard model 300',
                'Body':
 'https://images.pexels.com/photos/916472/pexels-photo-916472.jp
eg'
                'Card_name': 'AcmeCard'
                'Card_data': {"identifier":"IT hardware and
 software","header":"Acme keyboard model 300","description":"The
 model 300 keyboard is a full-size keyboard with a ten-key
 pad."}
            }
       );
       return options;

})()
```

The script in the *Carousel Item Expression* property defines and returns an array containing the items that appear in your carousel. The elements of this array must contain `name`, `value`, and `body` keys. In the example, the script creates an array called `options` and adds two elements, each with the required keys. The images here are hard-coded as an example.

Example code key

Key	Description
Name	Name of the carousel item. This name is shown below the image on the carousel.
Value	Value for the item. When a user selects a carousel item, this value is stored in the variable named in the *Variable name* property.
Description	Text string that describes the carousel item. The description is shown below the image name. A carousel with more than three items displays left and right arrows for scrolling through the images and a **Select** button under each item. If a description is over 140 characters, users can expand the content.
Body	Image used in the carousel item. The value is a URL for an image file.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example code key (continued)

Key	Description
Card_name	Text string header identifying the card shown in the carousel.
Card_data	Array containing text strings to be presented on the card. Values include identifier, header, and description.

Channel support

Channel support for the Carousel user input control

Channel	LLM support	NLU/ keyword support	Constraints
Web UI	Not Supported	Supported	None
Mobile UI	Not Supported	Supported	None
Now Assist panel	Not Supported	Supported	None
Microsoft Teams	Not Supported	Supported	None. If the carousel contains more than 10 items, users must select **Next** to review the remaining items.
Slack	Not Supported	Supported	None
Workplace	Not Supported	Supported	None
Facebook Messenger	Not Supported	Supported	The title for an image has a maximum limit of 40 characters. The text for the image has a maximum character limit of 60 characters. A user can view only 10 images at a time. If there are more than 10 images, the pagination format is used to view more options. The default value of the maximum number of images in a carousel for a page is set in the *sn_va_fb_messenger.max_carousel_cards* system property. This property is found in the System Properties [sys_properties] table.
SMS Twilio	Not Supported	Not supported	Not applicable
LINE	Not Supported	Supported	The title for an image has a maximum limit of 40 characters. The text for the image has a maximum character limit of 60 characters. A user can view only 10 images at a time. If there are more than 10 images, the pagination format is used to view more options. The default value of the maximum number of images in the carousel for a page is set in the *sn_va_line.max.carousel.cards* system property. The property is located in the System Properties [sys_properties] table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Carousel user input control (continued)

Channel	LLM support	NLU/ keyword support	Constraints
WhatsApp	Not Supported	Supported	None
Apple Messages for Business	Not Supported	Supported	None
Alexa (Voice)	Not Supported	Supported	For screen devices, use touch scroll. For nonscreen devices, use voice pagination.

Secure Text user input control

The Secure Text control provides a means to encrypt sensitive information provided as simple text or other formats. Use this control to encrypt sensitive information in topics that use large language model (LLM) discovery.

Use this control to gather and encrypt user information for topics using large language model (LLM) topic discovery. The Secure Text input also avoids sensitive information from being sent through an LLM.

Secure Text user input control properties



Property	Description
Node name	Name that identifies this Secure Text user input control node in the topic flow.
Prompt	Text string or script that returns text. This value is used only when the default value isn't specified. For example: `What is your password?`
Input format	Text format that is validated when a user enters certain text items. When the input isn't valid, the bot asks the user to reenter the text. Choose the format of the text item to be validated: • Text: Any text string (no validation). • Email: Format that consists of an email prefix (user name), the @ symbol, and domain. • IP address (IPV4, IPV6): Data communication delivery format for internet Protocol version 4 or version 6. • Phone number (E.164): Internationally recognized standard phone number format. • URL: Web address format. • Custom: A script that provides a validation rule for a custom text format. The script should include related error messages that are displayed when the expected format isn't entered. For phone and IP address format examples, see E.164 phone formats and IP address field types.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Hash function	The method digest algorithm based on the standard WS-Security specification.
Encryption salt	Random data that is used as an additional input to a one-way function that hashes data.
Advanced	
Default value	A value for the user response to the prompt. For example, if you already know the user name, the default value might be `(Script Variables > Last username)`.
Confirmation messages	
Input completion confirmation	Bot response shown to the user when the node interaction is complete. The message can be either a text string or a script that returns text. For example, if you're using dot-walking: `Thanks, (Input Variables > Username)!` Or if you're using a script, the acknowledgement might be: `Thanks, {{vaInputs.username}}!`
Default value confirmation	Message that asks the user to verify that the value in the Default value field is correct. This message is used instead of a value in the Prompt field. For example: `Are you (Script Variables > Username)?`
Hide or skip this node	
Conditionally show this node	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Allow user to skip this node	No-code condition statement or low-code script that specifies a condition for letting users skip this node in the conversation. The condition must evaluate to true. You can set this field using either the condition builder or a script.
Skip reprompting	No-code condition statement or low-code script that specifies a condition for letting users skip reprompting in the conversation. When a preceding node is revisited through a topic loopback or Dialog Act, the Virtual Agent bypasses this node and automatically retain its original value.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

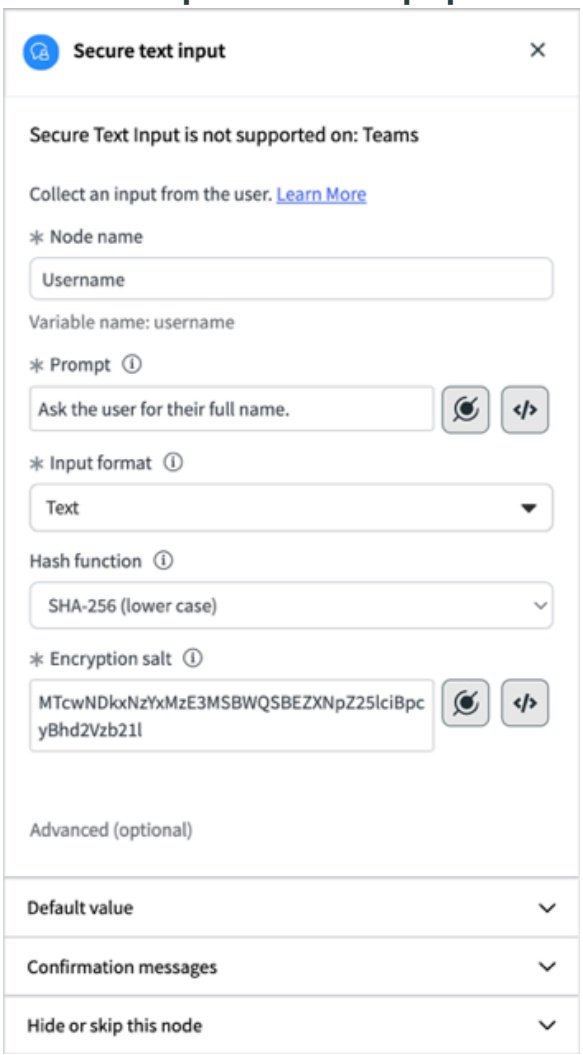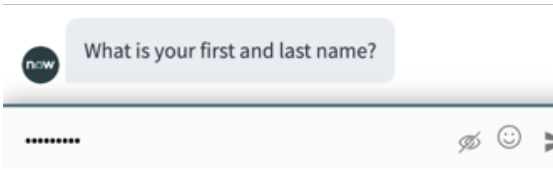Example Secure Text user input control

Input properties	Input prompt
Secure Text input control basic properties 	**Web UI Secure Text user input prompt** 

Channel support

Note:
Virtual Agent Designer controls may display and function differently in other channels.

Channel support for the Text user input control

Channel	Support	Constraints
Web UI	Supported	None.
Mobile UI	Supported	None.
Now Assist panel	Supported	None.
Microsoft Teams	Supported	None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Text user input control (continued)

Channel	Support	Constraints
Slack	Supported	Slack users can edit text previously entered in a conversation. However, Virtual Agent processes messages as they're first entered. If a Slack user edits text input, such as a comment to update a case, then Virtual Agent doesn't evaluate the edited update.
Workplace	Supported	None.
Facebook Messenger	Supported	The maximum character limit is 5000 characters.
SMS Twilio	Supported	None.
LINE	Supported	The maximum character limit is 5000 characters.
WhatsApp	Supported	None.
Apple Messages for Business	Supported	None.
Alexa (Voice)	Supported	For screen devices, character limits may apply. For more information, see the Alexa developer documentation.

Virtual Agent Designer bot responses

Virtual Agent Designer offers various controls for displaying bot responses in a conversation. Because the bot responses occur in third-party platforms, the format for each output may vary.

The following bot response controls are available for use within a Virtual Agent topic.

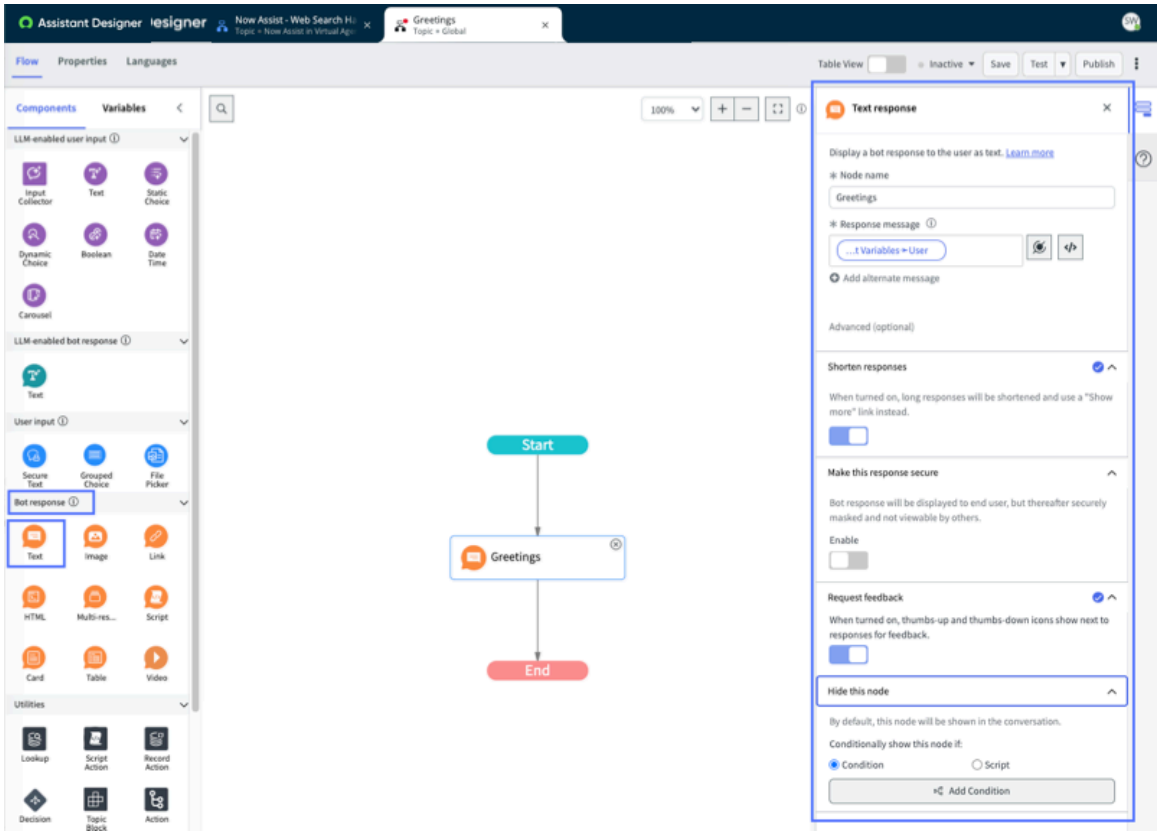
Text bot response control

Use the Text bot response control in a Virtual Agent topic to display a bot response as text. You can format the Text bot responses using the text editor controls. For example, you can bold or italicize the text, as well as include links, bulleted lists, and emojis.


Text bot response properties

Use the Text response properties panel to design bot responses to the user.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.





General options

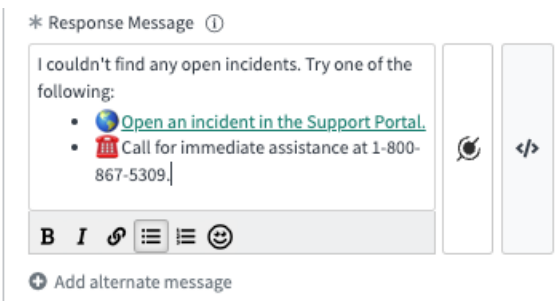Property	Description
Node name	Name that identifies this Text bot response node in the topic flow.
Response message	The Text bot response to the user. The response can be one of the following: • Rich text message. • Script, which can include Glide record variables or script variables. **Note:** The script can also include a temporary password for the end user. You can format the text messages using the text editor controls. For example, you can use the icons on the **Response Message** field to bold or italicize the text, as well as include links, bulleted lists, numbered lists, and emojis. 

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

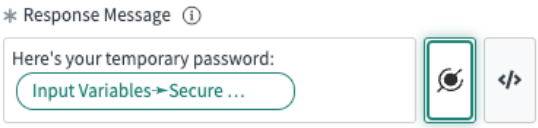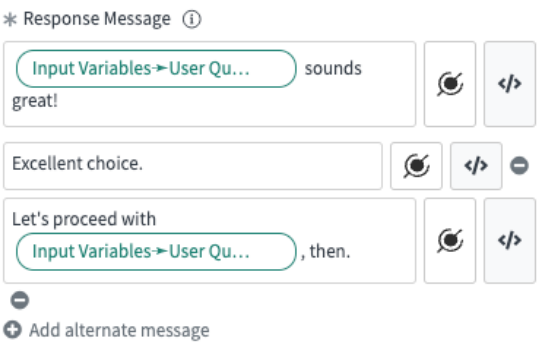General options (continued)

Property	Description
	You can also include an input variable, such as a temporary password, in the response message.  To include a link, do one of the following: • Select the link icon: . • Add your response message. Select the text to use as a link, and then select the link icon. Fill in the fields in the Confirmation window. Enter the text to use as the link, and then enter the URL in the Link field. Enter the display label for the link and a static URL, or use the data pill picker to create a dynamic URL.
Add alternate message	Add one or more alternate response messages for the user. Virtual Agent randomly chooses one of your responses for each conversation. 

Advanced options

Shorten responses	
Enable	When turned on, long bot responses are shortened. A **Show more** link is shown along with the truncated response. When the option is turned off, the entire response is used. By default, this option is turned on.
Make this response secure	
Enable	When enabled, the bot response is displayed to the user, but thereafter securely masked and not viewable by others.
Request feedback	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Advanced options (continued)

Enable	When turned on, thumbs up and down icons are displayed next to bot responses for feedback.
Hide this node	
Conditionally show this node if	A no-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Text bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Supported	None
Microsoft Teams	Supported	None
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Supported	Plain text string only
SMS Twilio	Supported	None
LINE	Supported	None
WhatsApp	Supported	None
Apple Messages for Business	Supported	None
Alexa (Voice)	Supported	For screen devices, full support. For nonscreen devices, the header is read.

Example Text bot response script

In this example, the script returns a string that greets the user. The *`gs.getUser().getFirstName()`* property is used to append the first name of the current user.

```
(function execute() {
    return 'Hello ' + gs.getUser().getFirstName();
})()
```

In this example, the script returns links to three instances in the response. Use **Markdown** to include multiple links in the script.

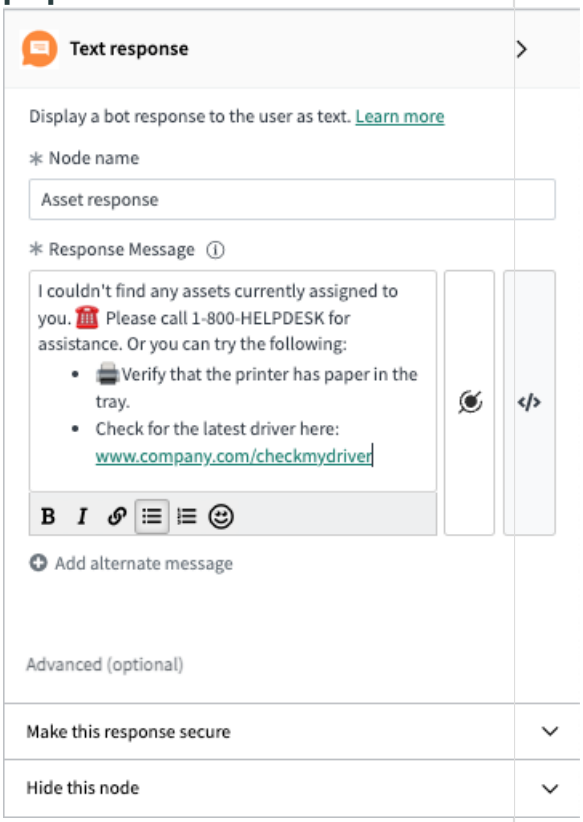
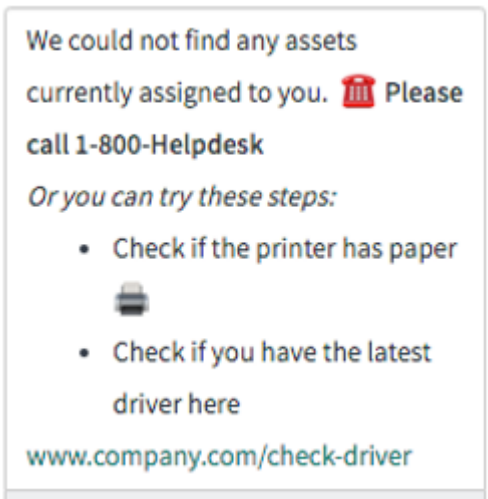
```
(function execute() {
    var output = 'Hello\n';
    output += '\n- [Instance 1](http://instance1.com)';
    output += '\n- [Instance 2](http://instance2.com)';
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
    output += '\n- [Instance 3](http://instance3.com)';
    return output;
})()
```

Example Text bot response control

Note:
Virtual Agent Designer controls may display and function differently in other channels.

Response properties	Text bot response output
Text bot response control basic properties 	**Web UI Text bot response output** 

LLM Text bot response control

Use this control to write a prompt description that will dynamically create an output message to the user in conversations that use large language model (LLM) topic discovery.

LLM Text bot response control properties

The Text bot response is available on the palette when you work with topics that use LLM topic discovery.

Property	Description
Node name	Name that identifies this LLM Text bot response control node in the topic flow.
Tell the LLM how to respond	What sort of message you want the LLM to send to the user. For example, `Greet the user in a friendly, professional manner.` You

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	can create messages using plain text, scripts, or conditions defined with the data pill picker.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Example Text bot response control

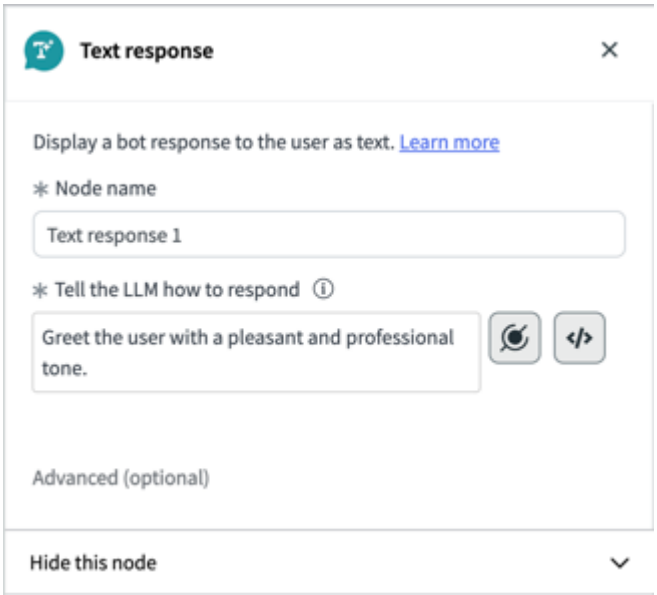



Image bot response control

Use the Image bot response control in a Virtual Agent topic to upload and display an image from a URL link. The image aspect ratio determines how the image is sized in the bot chat bubble.

Image bot response control properties

Property	Description
Node name	Name that identifies this Image bot response control node in the topic flow.
Image URL link	The URL link to an image file you want to include in the conversation. To set a value, do one of the following: • Specify the image URL by using the text field, data pill, or script. • Upload an image by clicking **Upload Image**. If you upload an image, then the selected image is uploaded to the server and is stored in the Images [sys_db_image] table and in the update sets. When the image is stored in the Images table and the update sets, then you can use the image in a production or non-production instance, as needed. After the image is uploaded, the URL link is included in the**Response Properties** sheet:

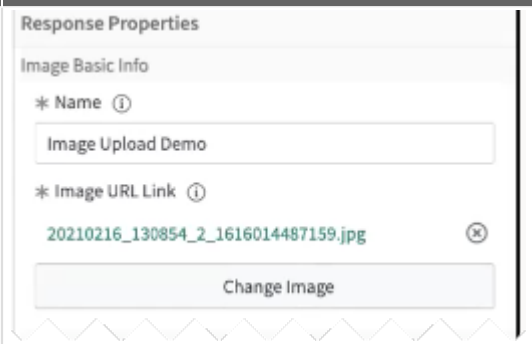© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	 Click the link to view the image. The URL is generated dynamically. The name of the instance is inserted at the front of the URL path. You can change or delete the link to the image. If you delete the link on this property sheet, only the reference to the URL is deleted. The image remains on the server for future use.
Image alt text	Alternative, screen-readable text included for accessibility. This text is used along with the image. Enter the text using the text field, data pill, or script. For more information about using data pills or scripts, see Virtual Agent Designer controls.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Image bot response control

Channel	Support	Constraints
Web UI	Supported	The maximum image size is determined by the *com.glide.attachment.max_size* system property. The default value is 1024 MB.
Mobile UI	Supported	The maximum image size is determined by the *com.glide.attachment.max_size* system property. The default value is 1024 MB.
Now Assist panel	Not supported	Not applicable
Microsoft Teams	Supported	None
Slack	Supported	For details about the maximum image size allowed, check the Slack documentation.
Workplace	Supported	For details about the maximum image size allowed, check the Workplace documentation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Channel support for the Image bot response control (continued)

Channel	Support	Constraints
Facebook Messenger	Supported	For details about the maximum image size allowed, check the Facebook Messenger documentation.
SMS Twilio	Supported	File size limits may vary. For Twilio limitations, check their Accepted Content Types for Media.
LINE	Supported	File size limits may vary. For details, see the LINE documentation.
WhatsApp	Supported	File size limits may vary. For details, see the WhatsApp documentation.
Apple Messages for Business	Supported	None
Alexa (Voice)	Partial support	Supported on devices with screens. For nonscreen devices, the user receives a message: `We found an image`. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.

Example Image bot response control

Note:
Virtual Agent Designer controls may display and function differently in other channels.

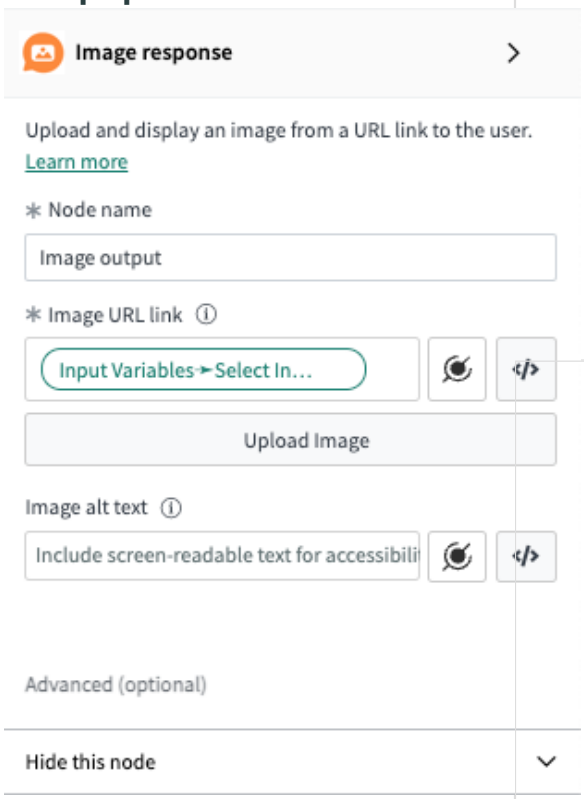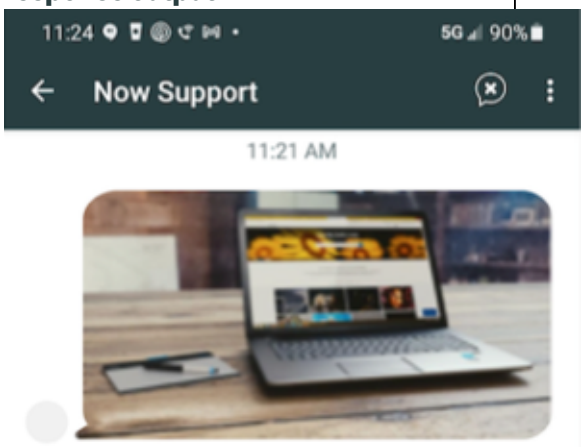© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response properties	Image bot response output
Image bot response control basic properties 	**Web UI Image bot response output**  **ServiceNow mobile Image bot response output** 

Link bot response control

Use the Link bot response control in a Virtual Agent topic to present a bot response. The response contains a header prompt with either a single URL link to an item or multiple URL links for up to three items.

Note:
If you are using the link bot response control for Virtual Agent conversations on Now mobile apps, web links open in the mobile browser. If you want links to open in a native mobile screen within the mobile app, create deep links for items in your conversation topics. For details about deep linking in mobile apps, see the MobileDeepLinkGenerator - Global API.

Link bot response control properties

Property	Description
Node name	Name that identifies this Link bot response control node in the topic flow.
Link list	Type of links returned in the output result.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	• Select **Single Link** to return one item in the output results. • Select **Multiple Links** to return up to three items in the output results.
Single link properties	
Header	Message displayed above the URL link. The message can be a string with variables or a script.
Label	Text that identifies a single link in the bot bubble. The text can be a string with variables or a script.
Link	Link to a single item, such as a website page or a particular record. The link can be a string with variables or a script that returns a valid URL as a string. For example, you can enter the complete URL, such as `https://servicenow.com`.
Multiple links properties	
Header Message	Text prompt that is displayed above the list of links. The prompt can be a string with variables or a script.
Link List Value Expression	Script that creates a list of links to display. The script includes the following parameters: link URL, link display label, link description, and link context.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Link bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Supported	None
Microsoft Teams	Supported	None
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Supported	The web link appears as a URL button in the conversation.
SMS Twilio	Supported	None
LINE	Supported	None
WhatsApp	Supported	None



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Link bot response control (continued)

Channel	Support	Constraints
Apple Messages for Business	Supported	Any URLs must be added to the allowed domain list [sys_cs_hostname_allow_list] table.
Alexa (Voice)	Partial support	Supported on devices with screens. For nonscreen devices, the user receives a message: `We found a link`. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.



Example single-link bot response control

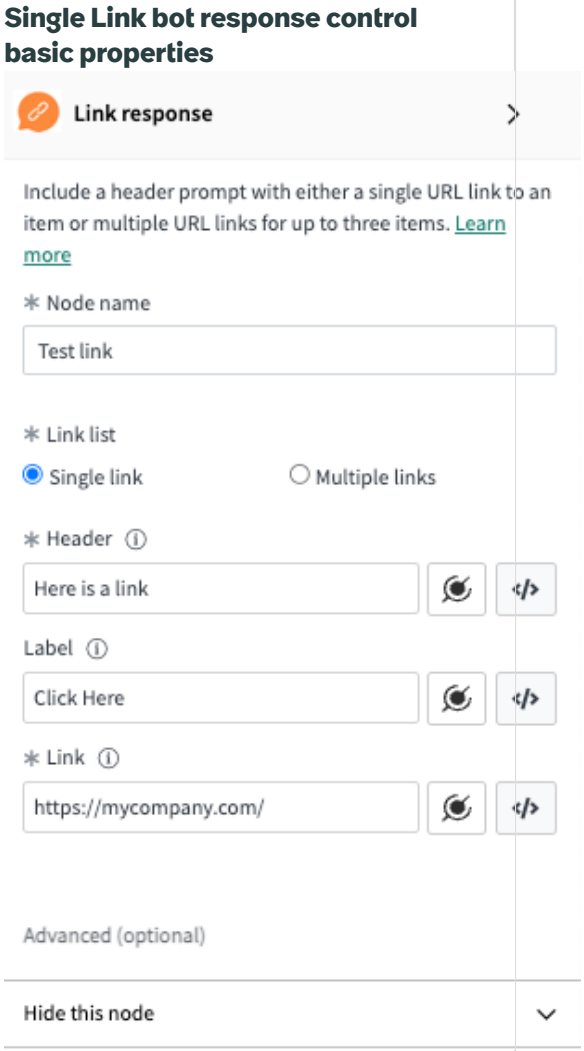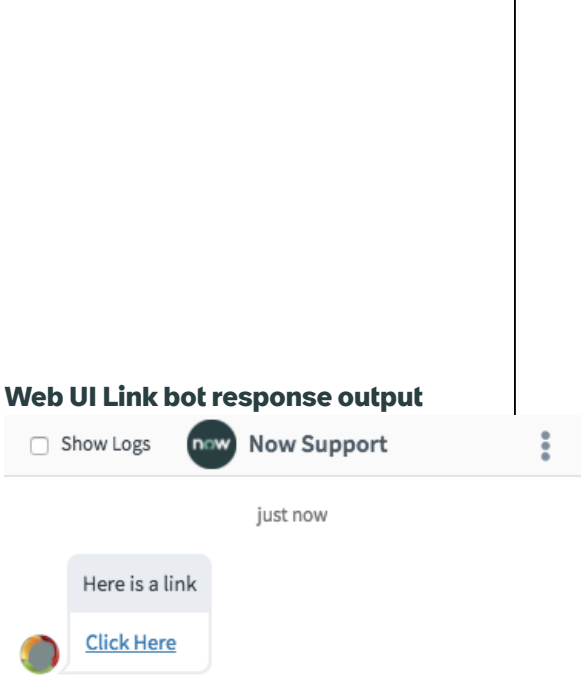Note:
Virtual Agent Designer controls may display and function differently in other channels.

Single link bot response properties	Link bot response output
	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

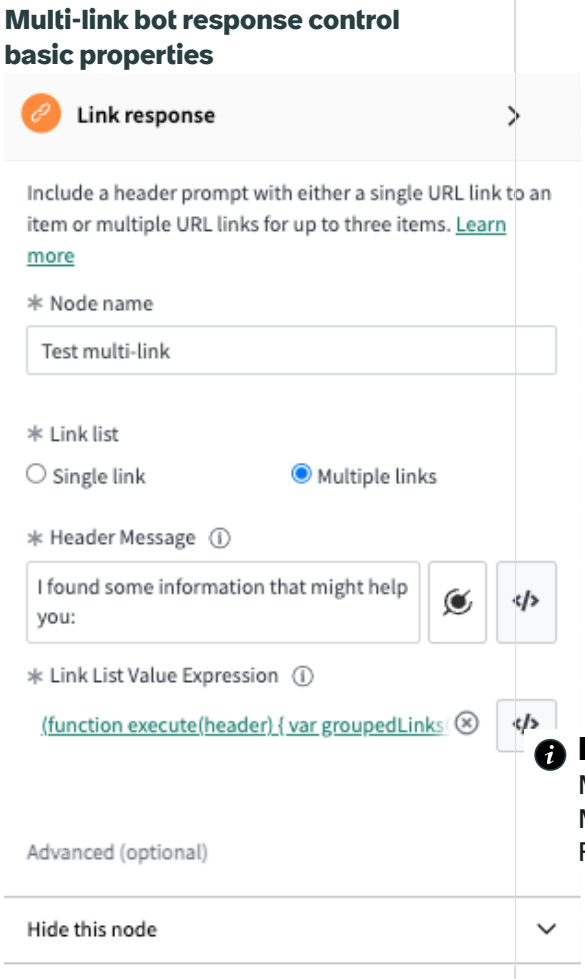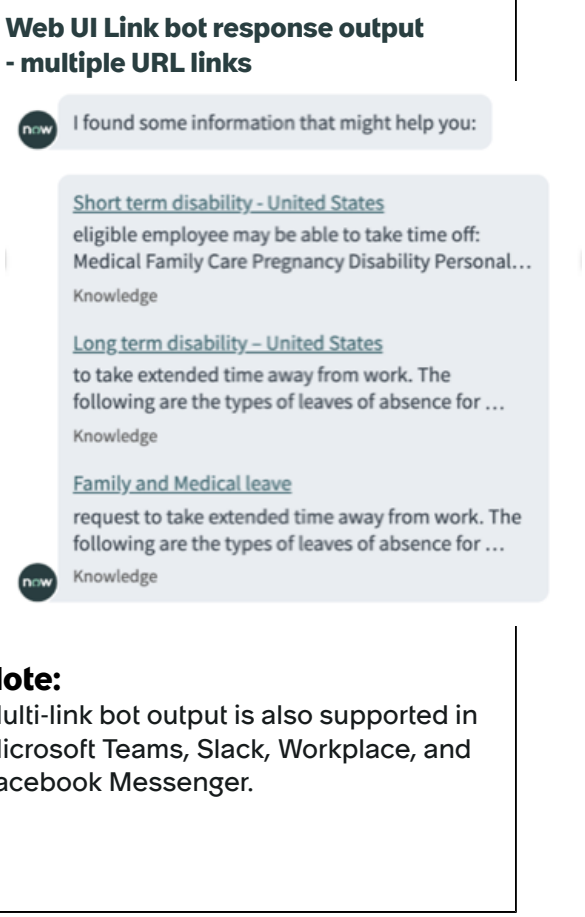Example multiple-link bot response control properties

Multi-link bot response properties	Link bot response output
	

HTML bot response control

Use the HTML bot response control to display static HTML text in the Virtual Agent bot response.

Note:
If you created conversations in earlier releases that use this bot response control to generate card layouts, consider updating your conversations to use the Card bot response control. The Card displays information from a record in your instance and contains a link to that related record.

Security considerations for HTML markup

For security reasons, an HTML sanitizer script runs automatically and checks all HTML markup used in the instance, including Virtual Agent conversations. The sanitizer script removes elements or attributes that might enable cross-site scripting attacks. You can edit the HTML sanitizer script to change the list of markup items to be preserved or removed. For details, see HTML sanitizer. For examples of adding markup items to the exclusion or inclusion lists, see Configure HTML sanitizer.

To disable the HTML sanitizer script only for Virtual Agent conversations, add the *com.glide.cs.html.sanitizer.enabled* system property and set the value to false. For details about creating a system property, see Add a system property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

HTML bot response control properties

Property	Description
Node name	Name that identifies this HTML bot response control node in the topic flow.
HTML message	HTML output to be displayed. Select the Script icon </> to open the HTML editor and enter the HTML text.
Height (Pixel)	Maximum height of the area for displaying HTML output in third-party messaging applications.
Width (Pixel)	Maximum width of the bot bubble for displaying HTML output in third-party messaging applications.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Note:
As shown in the examples, HTML output can vary in third-party messaging applications. Determine an appropriate **Height** and **Width** area by setting initial height and width values, previewing the HTML output in the messaging applications you intend to use, and then adjusting the height and width values.

Channel support for the HTML bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Supported	None
Microsoft Teams	Supported	Since HTML is rendered as an image in Microsoft Teams, other controls are recommended. For example, use images or cards instead of HTML for Microsoft Teams.
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Not supported	Not applicable
SMS Twilio	Not supported	Not applicable

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the HTML bot response control (continued)



Channel	Support	Constraints
LINE	Not supported	Not applicable
WhatsApp	Not supported	Not applicable
Apple Messages for Business	Not supported	Not applicable
Alexa (Voice)	Partial support	Supported on devices with screens. For nonscreen devices, the user receives a message: `We found a link`. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.

Example HTML bot response output

The HTML bot response shows a static HTML as a chat response. This example includes an image, headings, and paragraph text. The web UI presents this content as HTML. The Slack, Microsoft Teams, and Workplace user interfaces display the same content as a PNG image. URL links within the HTML are extracted and displayed below the image. The URL can be either an absolute or a relative link. If you use a relative link, it must be relative to the ServiceNow instance.

Note:
Virtual Agent Designer controls may display and function differently in other channels.

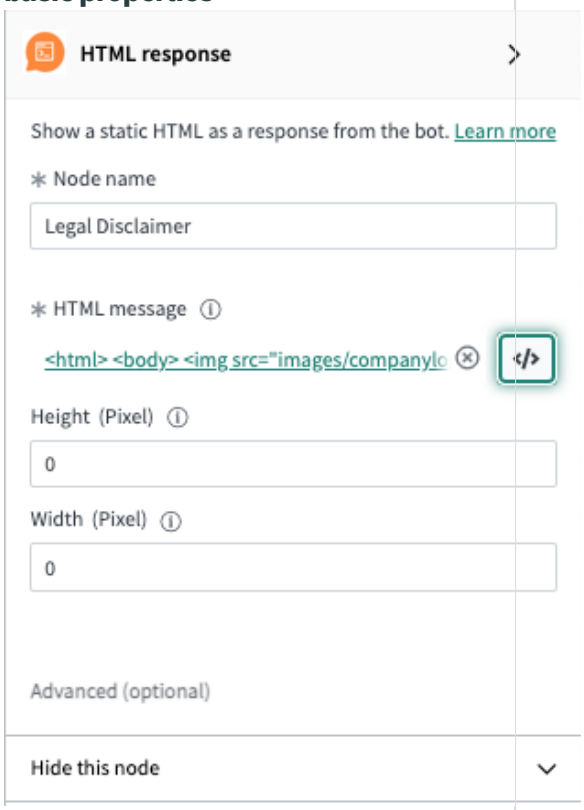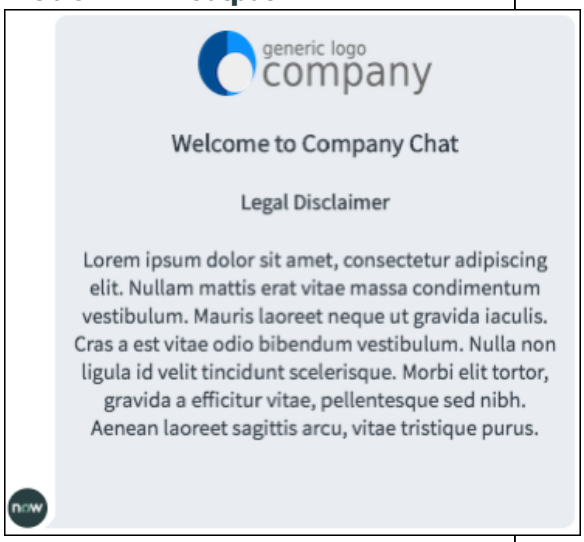© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

HTML bot response properties	HTML bot response output
HTML bot response control basic properties 	**Web UI HTML output** 

Multi-response bot response control

Use the Multi-response bot response control in a Virtual Agent topic to sequentially display two or more outputs. Outputs can be text, image, link, or HTML. Users can move from one output to the next through a provided navigation button.

Multi-response bot response control properties

Property	Description
Node name	The name that identifies this Multi-response control node in the topic flow.
Add a response	One or more bot responses. For each output type, select **+ Add a Response** to specify the output and define the output properties. **1.** In the Add a Response dialog box, select the **Type**, and specify the associated values: ○ **Text**: In the **Value** field, enter the text to be displayed in the response. ○ **HTML**: Enter the **Height** and **Width**, in pixels, to set the dimensions of the HTML block. In the HTML editor, enter the HTML markup to be displayed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	○ **Image**: Enter a URL in the **Image** field, or select **Upload Image** and choose the image file to upload. ○ **Link**: Enter the **Header**, **Label** (label for the link), and the **Link** (path or URL for the link). **2.** Select **Save**.
Advanced	
Navigation button label	
Label the button that lets the user continue the conversation	The label for the button displayed below the output. The button enables the user to move to the next output in the flow.
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Multi-response bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Not supported	Not applicable
Microsoft Teams	Supported	None
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Not supported	Not applicable
SMS Twilio	Not supported	Not applicable
LINE	Not supported	Not applicable
WhatsApp	Not supported	Not applicable
Apple Messages for Business	Not supported	Not applicable



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Multi-response bot response control (continued)

Channel	Support	Constraints
Alexa (Voice)	Partial support	Supported on devices with screens. For non-screen devices, the user receives a message if unsupported elements are used: `We found a link`. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.

Example Multi-response control

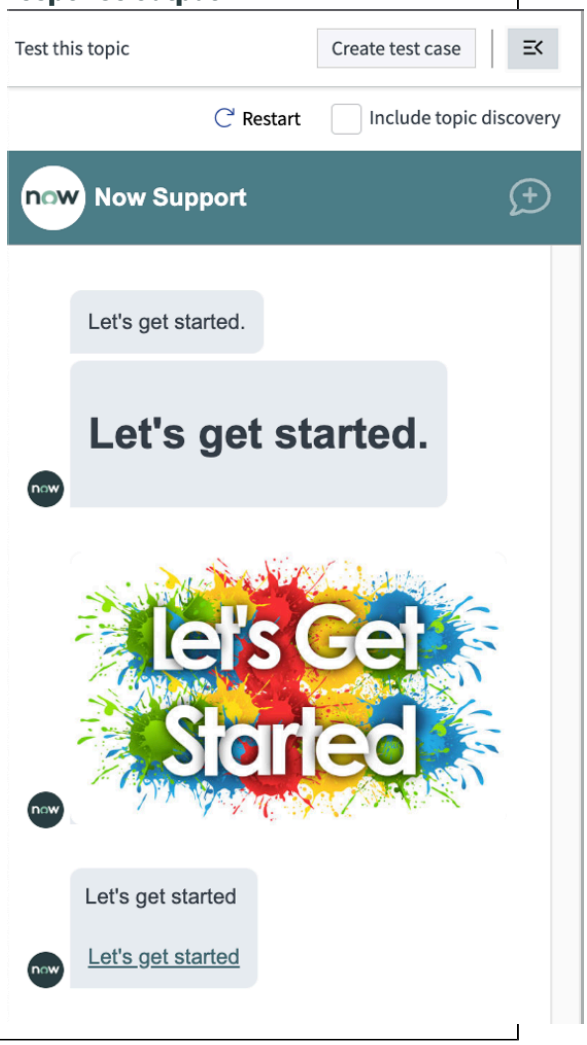Note:
Virtual Agent Designer controls may display and function differently in other channels.

Output properties	Multi-response output
Multi-response bot response control basic properties 	**Web UI Multi-response bot response output** 

Script bot response control

Use the Script bot response control in a Virtual Agent topic to run a script that returns a single response or a multi-part response.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use the Script bot response control when creating a more complex response that relies on scripted calculations or requires a multi-part response. Scripted output can include text, image, cards, links, and HTML to create a versatile response.

Script bot response control properties

Property	Description
Node name	The name that identifies this Script bot response control node in the topic flow.
Script output type	The type of output returned by the script, either single-part or multi-part.
Script response message	The script that generates the selected output type.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Script bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Not supported	Not applicable
Microsoft Teams	Supported	None
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Not supported	Not applicable
SMS Twilio	Not supported	Not applicable
LINE	Not supported	Not applicable
WhatsApp	Not supported	Not applicable
Apple Messages for Business	Not supported	Not applicable

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Script bot response control (continued)

Channel	Support	Constraints
Alexa (Voice)	Partial support	Support depends on the type of response. For example, images and links may only be available on devices with screens. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.

Example script

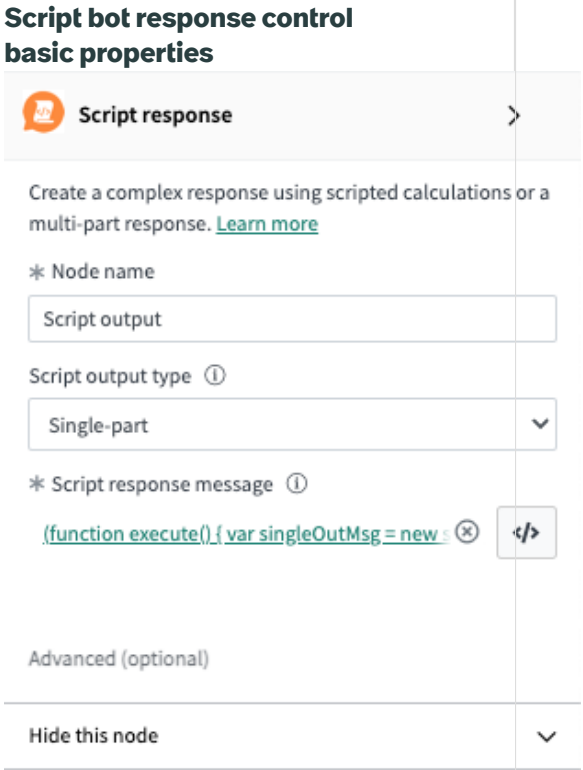
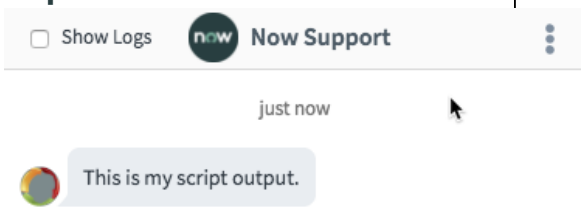
In this example, the script calculates the time two hours from the current time and outputs a multi-part message that includes this information.

```
(function execute() {
      var gdt = new GlideDateTime();
      var gt = new GlideTime();
      gdt.addSeconds(7200);
      gt = gdt.getTime();
      var multiOutMsg = new sn_cs.MultiPartOutMsg();
      multiOutMsg.addPlainTextPart('Thank you for submitting an
 incident.');
      multiOutMsg.addPlainTextPart('You should receive a
 response from a technician by ' + gt.getByFormat('HH:mm'));
      return multiOutMsg;
})()
```

Example Script bot response control

Note:
Virtual Agent Designer controls may display and function differently in other channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Script properties	Script bot response output
	

Card bot response control

Use the Card bot response control in a Virtual Agent topic to upload and display selected information from a record on your instance, along with rich content, such as a video or image.

A card can contain record information, an image, or a YouTube video content in a compact format. The compact format is designed for readability within the chat window.

The Card bot response can show the following types of content:

- Record: Displays content from a single record on your instance. This record can be referenced from variables in the flow or queried using a script that returns a single Glide record from a selected table. The record content includes the display field for the table at the top of the card, followed by any other fields specified by the properties of the bot response.
- Image: Displays a large or small image that you provide, along with a title and description. The property sheet provides a pre-configured template for the card layout. Specify the title, description, and the image source.
- YouTube video: Displays in an inline video player if supported on the channel. The image is displayed along with a title, description, and hyperlink to relevant content.

  In the Yokohama release, only YouTube videos are supported.

Tip:
You can also use the Video bot response control to include YouTube videos in conversations. The Video bot response control includes a navigation button that pauses the conversation. If you want the user to watch the video before continuing with the conversation, use this navigation button. When users have finished watching the video, they can click this navigation button to continue with the conversation.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If you previously created conversations that use the HTML bot response control to generate card layouts, consider updating your conversations to use the Card bot response control. The Card displays information from a record in your instance and contains a link to that related record. Or, it can display images and can include rich content such as a video.

Card bot response control properties

Property	Description
Node name	Name that identifies this Card bot response control node in the topic flow.
Card type	Type of card to be used. Choose one of the following options: • **Record** • **Large image with text** • **Small image with text** • **YouTube Video Card** **Note:** In the Yokohama release, only YouTube video cards are supported.
Type: Record	
Record	Reference to a specific record. Data for the card comes from a record referenced in a variable from another node in the flow. For example, the reference could be a Choice List or Glide Action. **1.** Select a variable from the current flow that contains a record object. **2.** Use the **fields** list to determine the fields displayed in the card.
Table	Table that references a single Glide record that contains the data shown in the card.
Filter this table by using	Enter the condition or script to filter data in the table and return the record. • **Condition**: Condition statement that returns the table record. • **Script**: Glide record query that returns the glide record.
fields	Fields from the ServiceNow record to be displayed in the card. Specify each field by clicking **Add Field**. **Note:** If you're using Workplace, a maximum of four fields is rendered on the card. If you have more than four fields, the remaining fields are displayed on a subsequent card, with up to four fields per card.
Type: Large image with text or Small image with text	
Template	A visual representation that shows the image card layout. Each area of the template is numbered.

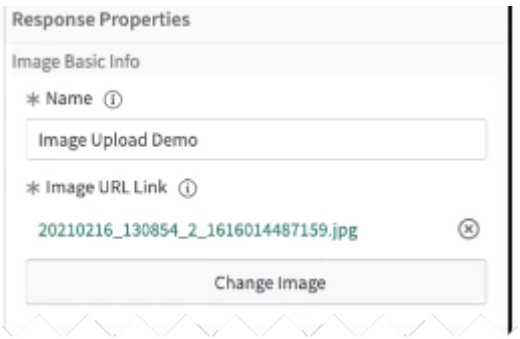© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Map data to fields on the card	Fields that correspond to the numbers shown on the template. These fields are the following: 1. **Title**: Name or label for the card 2. **Description**: Explanation of the image 3. **Image URL link**: Specify the image displayed in the card in one of the following ways: ○ Specify the image URL, using the text field, data pill, or script. ○ Upload the image by clicking **Upload Image**. If you upload an image, the selected image is uploaded to the server and is stored in the Images [sys_db_image] table and in the update sets. When the image is stored in the Images table and the update sets, you can use the image in a production or non-production instance, as needed. After the image is uploaded, the URL link is included in the**Response Properties** sheet.  Click the link to view the image. The URL is generated dynamically. The name of the instance is inserted at the front of the URL path. You can change or delete the link to the image. If you delete the link on this property sheet, only the reference to the URL is deleted. The image remains on the server for future use. 4. **Image alt text**: Alternative, screen-readable text that describes the image for accessibility programs. This text is used along with the image. Enter the text using the text field, data pill, or script.
Type: YouTube Video card	
Template	A visual representation of the layout of the video included in the card.
Map data to fields on the card	Fields that correspond to the numbers shown on the template. These fields are the following: • **Title**: Title of the card. • **Title Link**: URL to any relevant content. • **Description**: Description the card, such as the topic the video addresses.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	• **YouTube Video ID**: Unique identifier for the video used in the card. This identifier is the string following the equal sign (=) at the end of the video's URL path. For example, in the path shown below, the video identifier is `FVgtjdEOa5M`.  
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Card bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Partial support	Record cards and record cards with action only.
Microsoft Teams	Supported	The video control displays a thumbnail image of the video that users select to open the video in their preferred web browser.
Slack	Supported	Conversational Integration with Slack Version 2.0.0 and later. The video control displays a thumbnail image of the video that users select to open the video in their preferred web browser.
Workplace	Partial support	Image card output not available. Facebook apps no longer support vertical list templates. The card layout uses a horizontal, scrollable carousel template effective August 15, 2019. Cards also feature a button template.
Facebook Messenger	Supported	None
SMS Twilio	Supported	Records and image cards only.
LINE	Partial support	Records and image cards only.
WhatsApp	Partial support	Records and image cards only.
Apple Messages	Supported	None

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Card bot response control (continued)

Channel	Support	Constraints
for Business		
Alexa (Voice)	Partial support	Some types of output are only available on devices with screens. For nonscreen devices, the card title is read. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.

Example Glide record query

```
(function execute(table) {
    /* Write a glide record query, and return the glide record.
       For example:

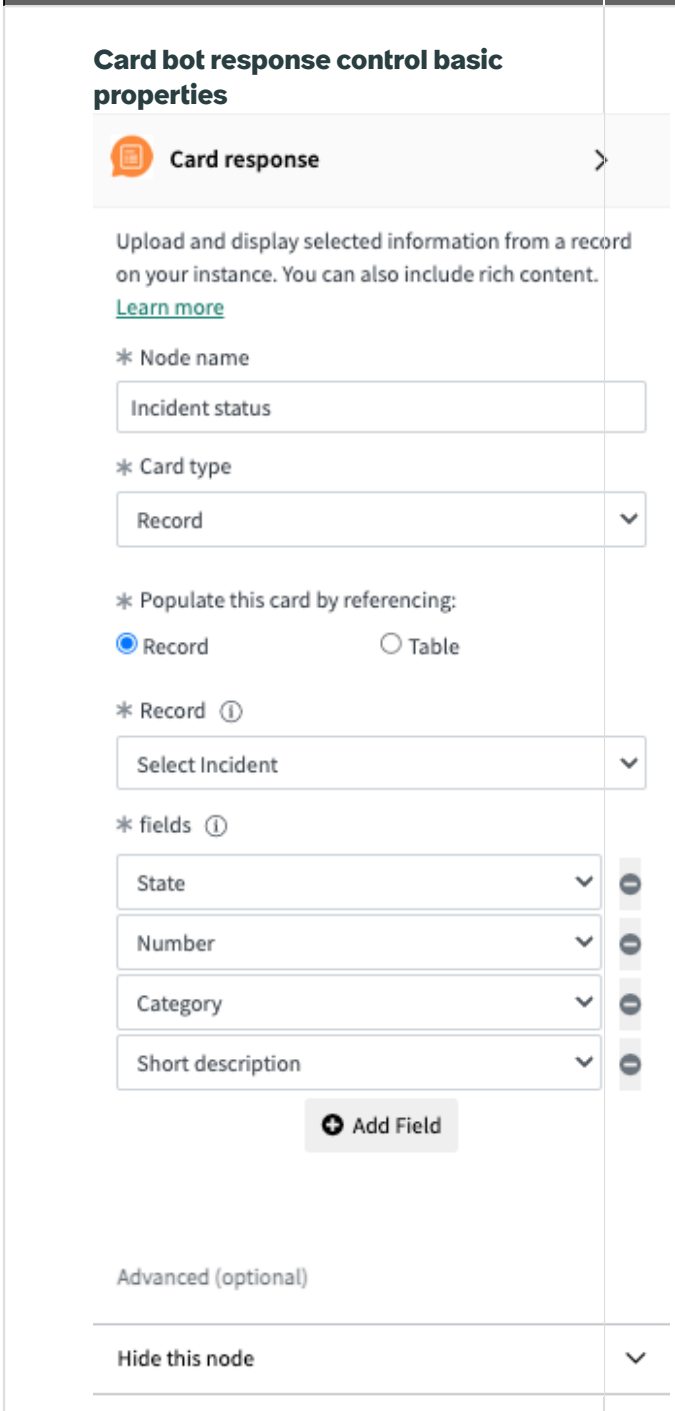
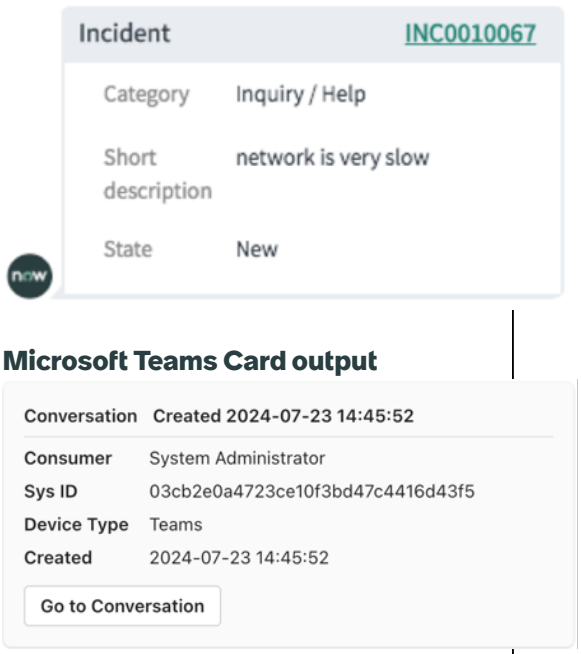
       var now_GR = new GlideRecord(table);
       gr.addEncodedQuery('active=true^number=INC0010099');
       gr.query();
       if(gr.next()) {
          return gr;
    }
    */
})(table)
```

In this example, the script creates a GlideRecord object, populates this object using a query that should return a single result, then returns the object. The **Table** property defines the table used in this query.

Example Card bot response output for records

Note:
Virtual Agent Designer controls may display and function differently in other channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response properties	Card output
	

Example Card bot response for a large image

The Card response layout for images may vary across channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response properties	Card output

Card response

Upload and display selected information from a record on your instance. You can also include rich content. Learn more

* Node name


Image large card

* Card type

Large image with text

To view supported channels, open Large image with text

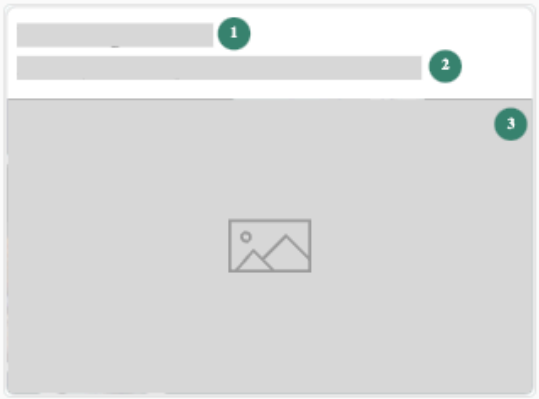Template



Illustrative card layout. May vary across channels based on template definitions.

Map data to fields on the card

* 1. Title

Don't forget we are going back to the office soon!

2. Description

You're scheduled to return to work October 7.

* 3. Image URL link

Tele_GettyImages-556454119_1647376622096.jpg

Change Image

4. Image alt text

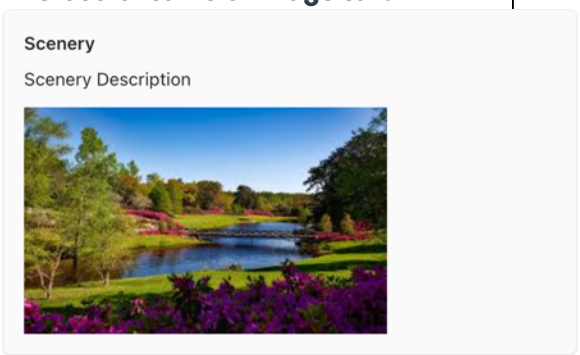
Advanced (optional)

Hide this node

Web UI image card output



Microsoft Teams UI image card



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Card bot response for a small image

The Card response layout for images may vary across channels.

Response properties	Card output
Card response Upload and display selected information from a record on your instance. You can also include rich content. Learn more * Node name: Image card * Card type: Small image with text To view supported channels, open Small image with text Template Illustrative card layout. May vary across channels based on template definitions. Map data to fields on the card * 1. Title: Save the date | Q1 Earnings Call 2. Description: Remember to tune in Wednesday, April 28th for our Q1 Earnings call. * 3. Image URL link: Tele_GettyImages-556454119_1647376115065.jpg Change Image 4. Image alt text: Join the call. Advanced (optional) Hide this node	**Web UI image card output** Now Support Hi, I'm your Virtual Agent. Let me know how I can help you today. What's your issue or request? Or take a look at what I can help with. When do we announce earnings? Save the date | Q1 Earnings Call Remember to tune in Wednesday, April 28th for our Q1 Earnings call. Thank you for using our support chat. Click here to start a new conversation


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Card bot response with video content


The way the Card bot response displays videos may vary across channels. For example, the display you see in Slack messages may be different from what you see on Microsoft Teams or Workplace from Facebook. Also, if an embedded player is supported on that channel, the player is included in the display. For more information about channels, see the documentation for the channel that you're using.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Response properties	Card output

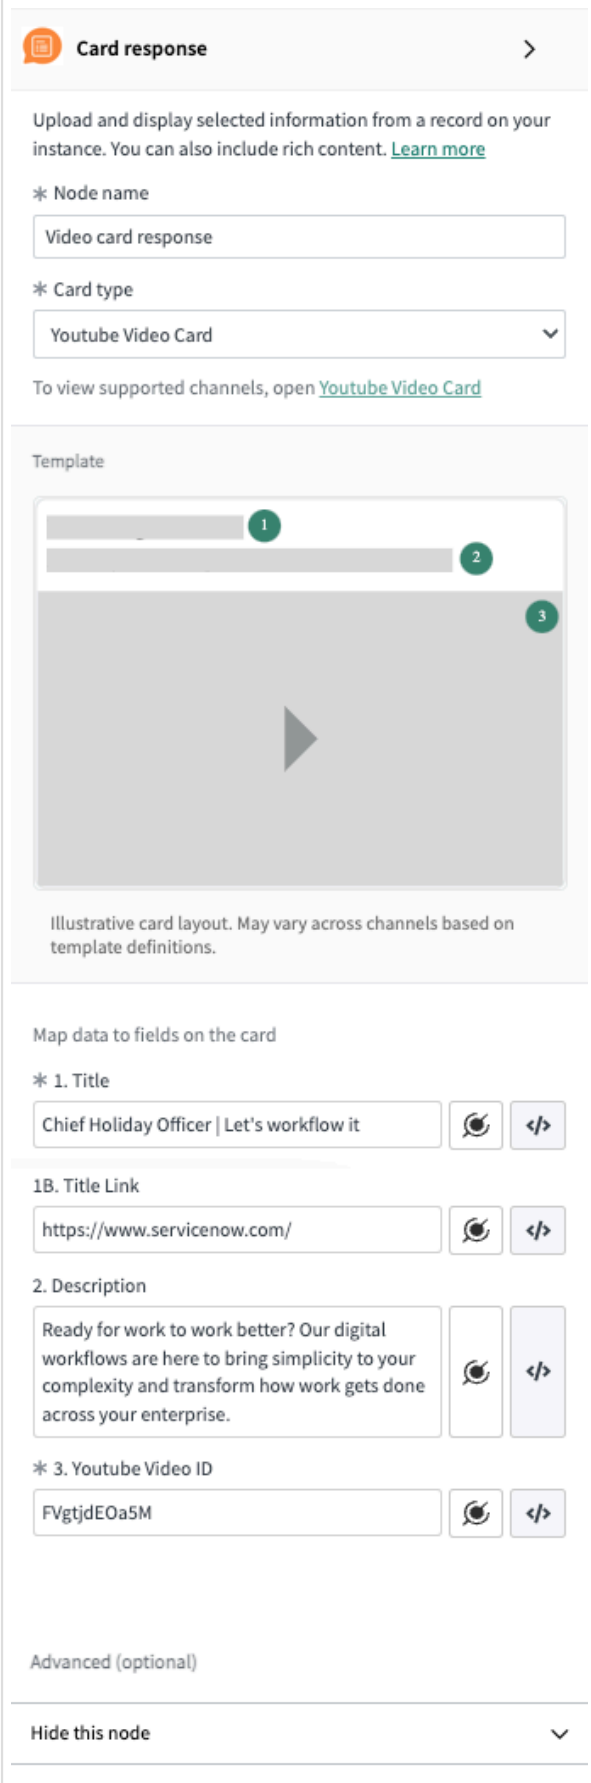

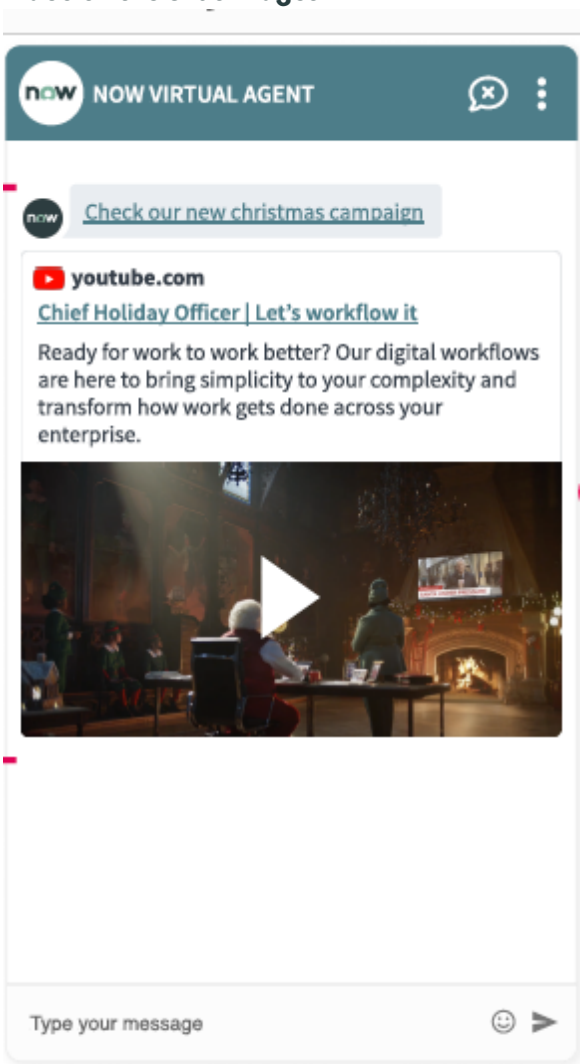Card bot response output with video on the chat widget



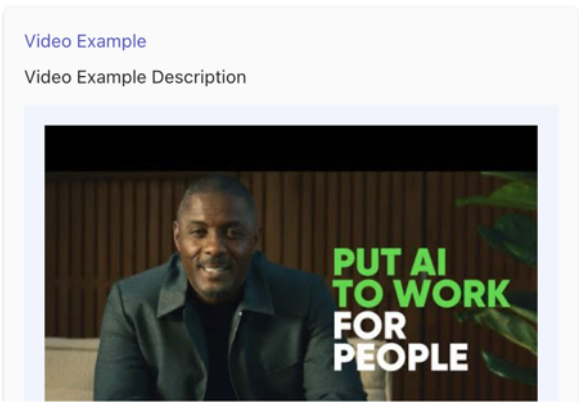Card bot response output with video on Microsoft Teams



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Table bot response control

Use the Table bot response control in a Virtual Agent topic to display a bot response as a table.

Table bot responses enable users to see information in a more organized way.

For example, you can organize and display information such as the following:

- Planned service changes
- Company holidays
- Contact information
- Testing sites

Output tables can have between one and four columns and may include optional column headers. You can populate tables using the conditioner builder or scripts.

Table bot response properties

Property	Description
Node name	Name that identifies this Table bot response control node in the topic flow.
Populate this table by	Options for populating the table. Select one of the following: • **Table**: Select the ServiceNow table that contains the data to be displayed. • **Script**: Enter code in the Define rows dialog box.
Table	The name of the table that contains the data. This field is available only when the **Table** option is selected.
Filter rows	Options for filtering the contents of the table. Choose one of the following: • **Condition**: Specify a no-code condition statement using the condition builder. For more information, see Condition builder. • **Script**: Enter a low-code script that specifies a condition. This field is available only when the **Table** option is selected.
No records response message	Message displayed if no records are found.
Show links for each record	Slide this toggle to activate links for each record in the output in your Virtual Agent conversation. The **Show links for each record** toggle is not available by default. It can be enabled by changing the value of the system property sn_cs_builder.table_show_links_enabled to true.
Columns and rows	
Columns (left to right)	Table columns that you want to display in the conversation. You can have up to 4 columns. • **Field**: Select a field from the ServiceNow table to be displayed in the column. • **Display name**: Reflects the selected column name. Use the default name or change the name.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	This field is available only when the **Table** option is selected.
Sort rows by	Option for sorting returned rows by column. You can sort by one of the selected columns, or by a column not shown in the response to the user. Choose **Ascending** or **Descending** order for the sort. If you don't specify a sort order, rows are sorted by creation date in descending order. If you specify a different sort order, creation date is used as a secondary sort order. This field is available only when the **Table** option is selected.
Advanced	
Headers	
Header	Header or title for the table when the table is displayed in the response output. The header can be a text string, variables, or a script.
Display Column Headers	Toggle switch that enables the display of column headings.
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Channel support

Channel support for the Table bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Not supported	Not applicable
Microsoft Teams	Supported	None
Slack	Supported	None
Workplace	Supported	None
Facebook Messenger	Not supported	Not applicable
SMS Twilio	Not supported	Not applicable
LINE	Supported	None
WhatsApp	Not supported	Not applicable
Apple Messages	Supported	None

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Table bot response control (continued)

Channel	Support	Constraints
for Business		
Alexa (Voice)	Partial support	Supported on devices with screens. For nonscreen devices, the table will be read, if possible. For details, see Fine-tune Virtual Agent settings and topics for the best Alexa voice chat experience.


Example Table bot response output

Note:
Virtual Agent Designer controls may display and function differently in other channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response properties	Table bot response output

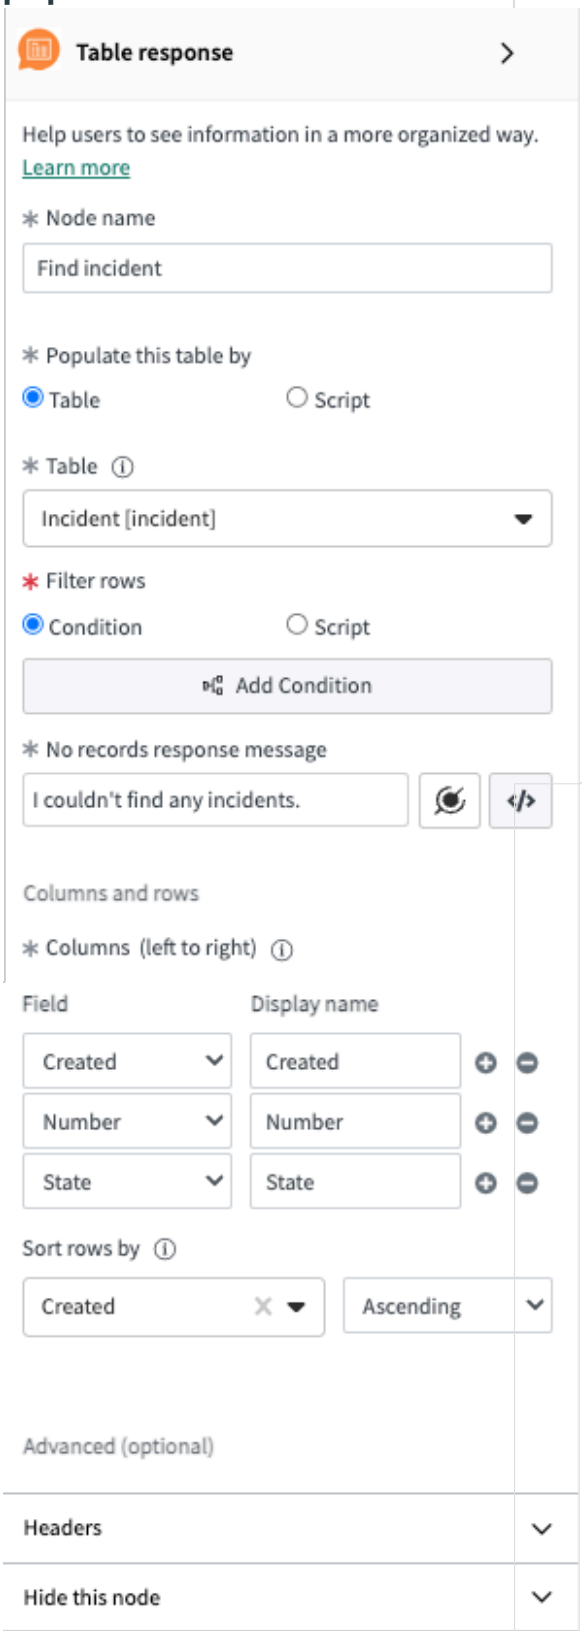Table bot response control basic properties



Web UI Table bot response output


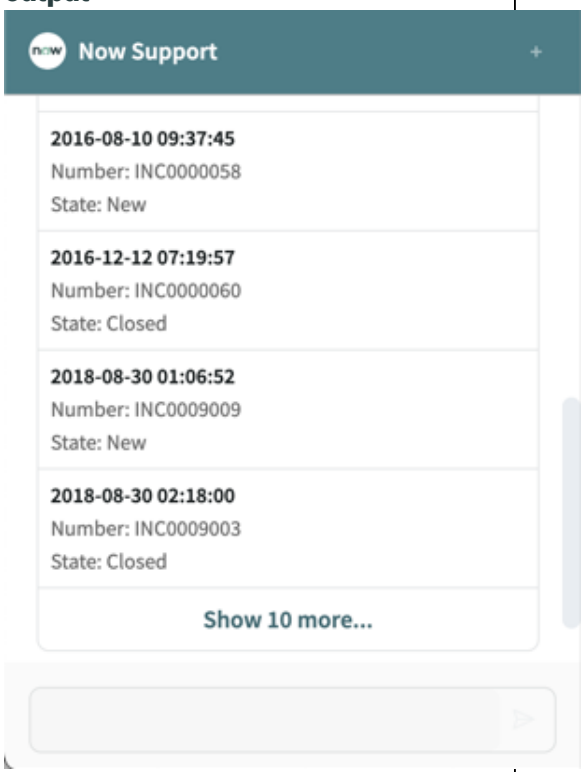


Table bot response output in ServiceNow mobile

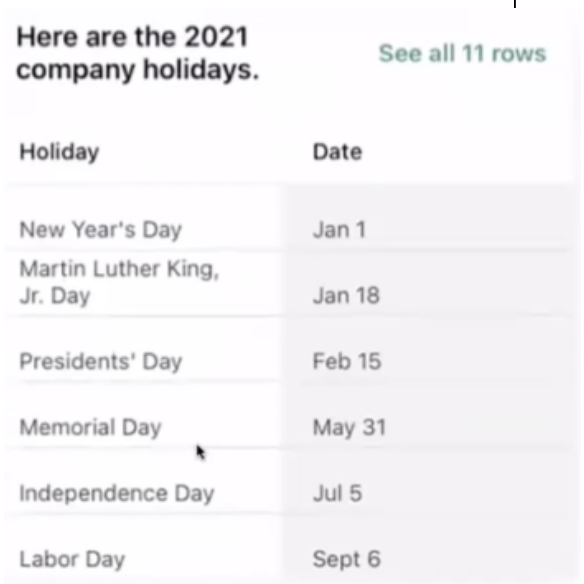

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Video bot response control

Use the Video bot response control in a Virtual Agent topic to include a video in the conversation.

The Video bot response control includes a navigation button, which gives users time to watch the video. If you want the user to the watch the video before continuing with the conversation, use this navigation button.

When users have finished watching the video, they can select the navigation button to continue with the conversation.

Note:
Topic authors can also use the Card bot response control to include a video in conversations. However, the Card bot response control doesn't include the navigation button, which gives users time to watch the video.

Video bot response control properties

Property	Description
Node name	Name that identifies this video bot response control node in the topic flow.
Card type	Type of card. Select **YouTube Video Card**. **Note:** In the Yokohama release, only YouTube video cards are supported.
Template	A visual representation of the layout of the video included in the card.
Map data to fields on the card	Fields that correspond to the numbers shown on the template. These fields are the following: • **Title**: Title of the card. • **Title Link**: URL to any relevant content. • **Description**: Description the card, such as the topic the video addresses. • **YouTube Video ID**: Unique identifier for the video used in the card. This identifier is the string following the equal sign (=) at the end of the video's URL path. For example, in the path shown below, the video identifier is `FVgtjdEOa5M`.  
Advanced	
Navigation button label	Navigation button used to continue with the conversation. By default, the button is labeled **Got it**, but you can change it. For example, you change the label to **Continue**. Users select this navigation button in the chat window to continue with the conversation.
Hide this node	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.
Node Conditions	Expression logic to specify a condition for presenting this topic to users. The condition must evaluate to true. You can set this field using either the condition builder or a script. • **Condition**: Use the condition builder to add or edit conditions. • **Script**: Use the script editor to create or edit a script that contains a condition statement.

Channel support

Note:
The way the Video bot response displays videos may vary across channels. For example, the video display you see in Slack messages may be different from what you see on Microsoft Teams or Workplace from Facebook. Also, if an embedded player is supported on that channel, the player is included in the display. For more information about channels, see the documentation for the channel you're using.

Channel support for the Video bot response control

Channel	Support	Constraints
Web UI	Supported	None
Mobile UI	Supported	None
Now Assist panel	Not supported	Not applicable
Microsoft Teams	Supported	The video control displays a thumbnail image of the video that users select to open the video in their preferred web browser.
Slack	Supported	Conversational Integration with Slack version 2.0.0 and later. The video control displays a thumbnail image of the video that users select to open the video in their preferred web browser.
Workplace	Supported	None
Facebook Messenger	Not supported	Not applicable
SMS Twilio	Not supported	Not applicable
LINE	Not supported	Not applicable
WhatsApp	Not supported	Not applicable
Apple Messages for Business	Not supported	Not applicable

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Channel support for the Video bot response control (continued)

Channel	Support	Constraints
Alexa (Voice)	Not supported	Not applicable


Example Video bot response control

Note:
Virtual Agent Designer controls may display and function differently in other channels.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Response properties	Card output

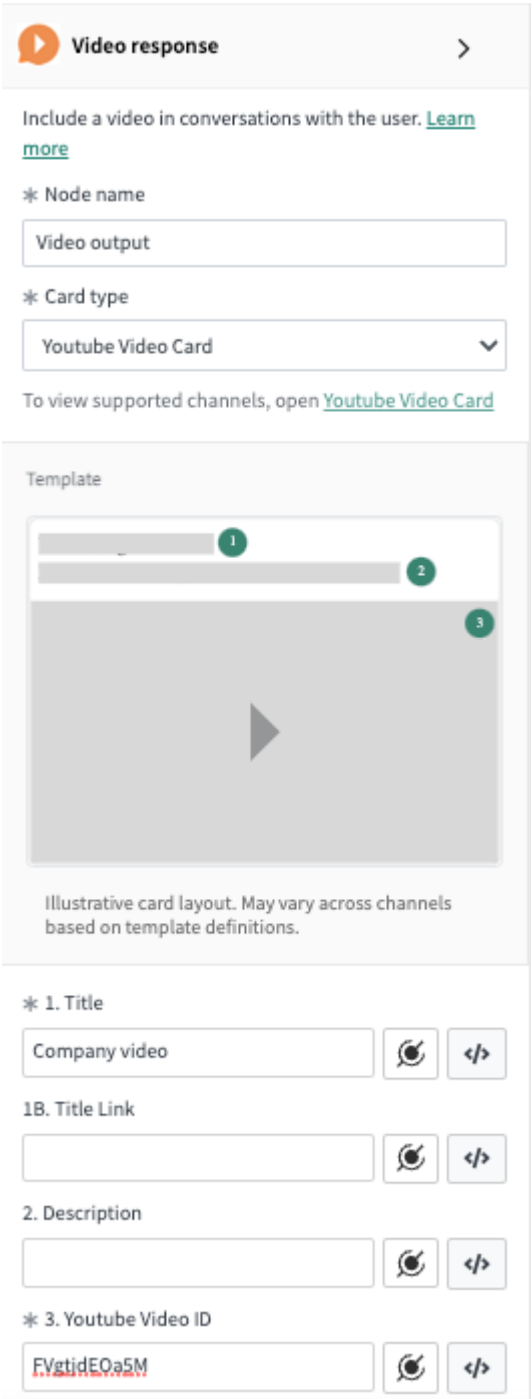
Video bot response control basic properties



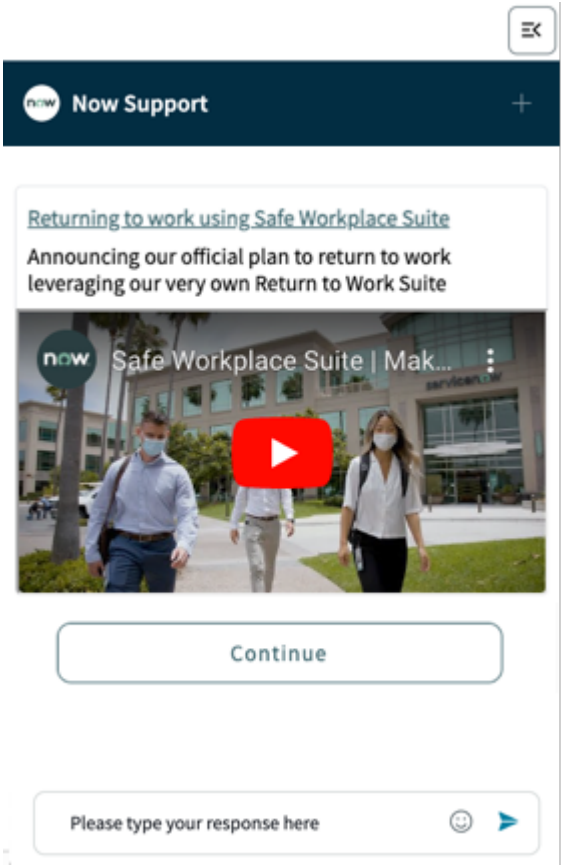Video bot response output on the chat widget with the navigation button



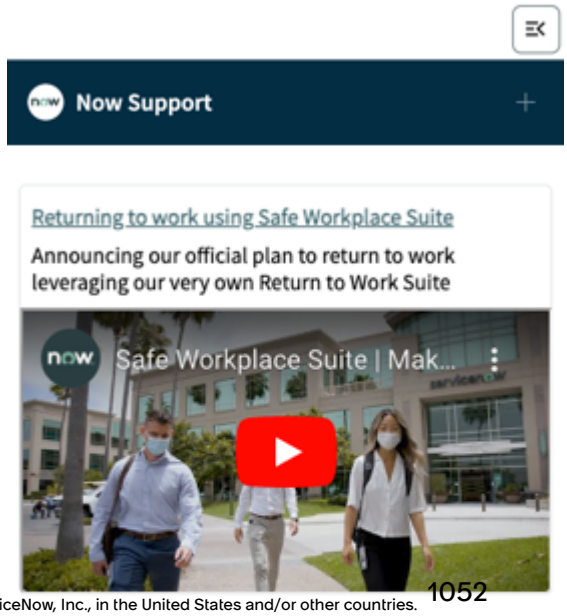Video bot response output on the chat widget without the navigation button



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Virtual Agent Designer utilities

You can control interactions within a topic by using utilities in Virtual Agent Designer. These utilities perform various actions such as adding topic blocks (reusable components), running a script, or adding different conversation paths (branches) in a topic. Utilities are represented as nodes in a conversation flow but do not display anything to the user.

The following utilities are available for use within a Virtual Agent topic.

Lookup utility

Use the Lookup utility in a Virtual Agent topic to return a ServiceNow record query.


Lookup utility properties

Property	Description
Node name	The name that identifies this Lookup utility node in the topic flow.
Variable name	The variable that stores the record returned by the script. The variable name is automatically created from the *Node name* property.
Table	The table used for the query.
Filter this table by using	The query to retrieve the record. Use the condition builder or a script to specify a query condition.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Lookup utility

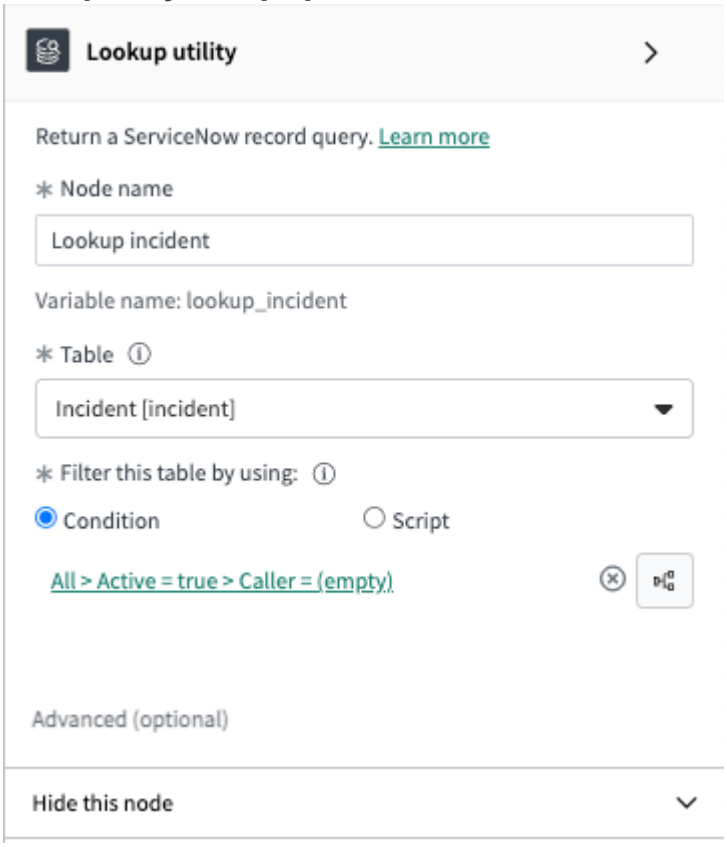Lookup utility basic properties



Example Lookup script

```
(function execute(table) {

       var now_GR = new GlideRecord(table);
       gr.addEncodedQuery('active=true');
       gr.setLimit(1);
       gr.query();
       if(gr.next()) {
          return gr;
    }
})(table)
```

In this example, a table is queried for the first active record. The table to be queried is defined in the **Table** property found in the lookup utility control. The `setLimit()` method ensures that only a single record is returned from the database. If a record is found, it is returned. For more information on GlideRecord queries, see Querying tables in script .

Script Action utility

Use the Script Action utility in a Virtual Agent topic to run a script.

Script Action utility properties


Property	Description
Node name	The name that identifies this Script Action node in the topic flow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Action expression	The script that performs an action.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Example Script Action utility

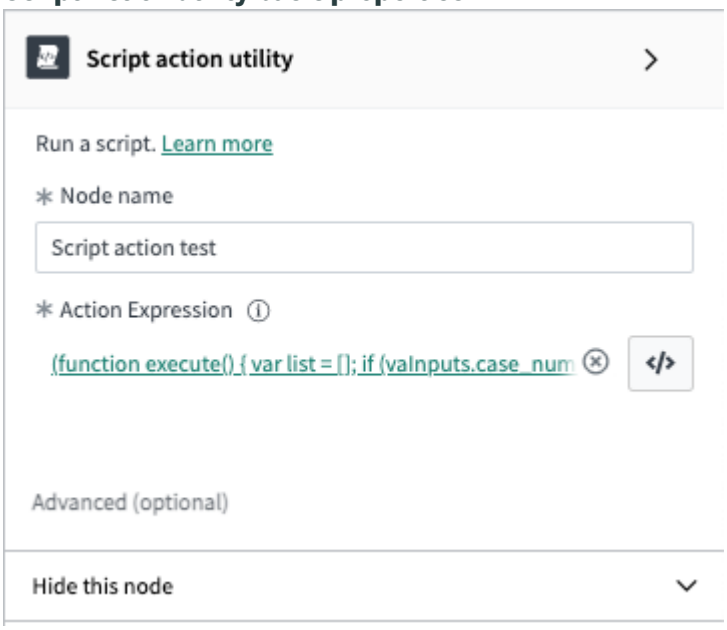Script Action utility basic properties



Example script action

```
(function execute() {
    var list = [];
    if (vaInputs.case_number != "") {
        var gr = new GlideRecord("sn_customerservice_case");
        gr.addQuery("number", "CONTAINS", vaInputs.case_number);
        gr.addQuery("active", "true");
        gr.orderBy("number");
        gr.query();
        while (gr.hasNext()) {
            gr.next();
            list.push(gr.getUniqueValue().toString());
        }
    }
    vaVars.case_list = list;
})()
```

This example performs a search on the [sn_customerservice_case] table for a specific case number based on the input from another control called `case_number`. The script then places the results in an array and stores them in the `case_list` variable, which is accessible by other nodes in the same topic. Because `vaVars` only supports string, number, and Boolean values,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

the script uses `toString()` to store these values as strings. The code is contained in an `if` statement, so it only executes if the `case_number` variable has a value. This `if` statement prevents the code from running if the user has not entered a number.

For more information about writing scripts for Virtual Agent, see Virtual Agent scripts.

Record Action utility

Use the Record Action utility in a Virtual Agent topic to create or update a ServiceNow record in a table.


Record Action utility properties

Property	Description
Node name	Name that identifies this record action node in the topic flow.
Variable name	Name of the variable that stores the created or updated record values. The variable name is automatically created from the **Node name** property. This option is not visible when the Action Type is **Update a Record**.
Action type	The type of action to perform. Select one of the following: • **Create a Record**: Creates a new record in the table that you specify. • **Update a Record**: Updates an existing record based on the context of the conversation.
Table	If you're creating a record, select any table that is available in the instance. If you're updating a record, select a variable for a record that is referenced in the conversation. For example, **User**.
Field	Select one or more fields in the ServiceNow table to be modified. For each field, select a valid value or specify input variables or script variables.
Advanced	
Attach file to record	A low-code method of attaching an image or other file to a record of your choosing. **Note:** Ensure that you've an uploaded file using the File Picker node before attaching it to a record with the Record Action node. The uploaded file is initially linked to the conversation table. When the incident is created with the uploaded file using the Record Action node, the file is linked to the incident table. It is no longer referenced through the conversation table, but the incident instead.
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Record Action utility

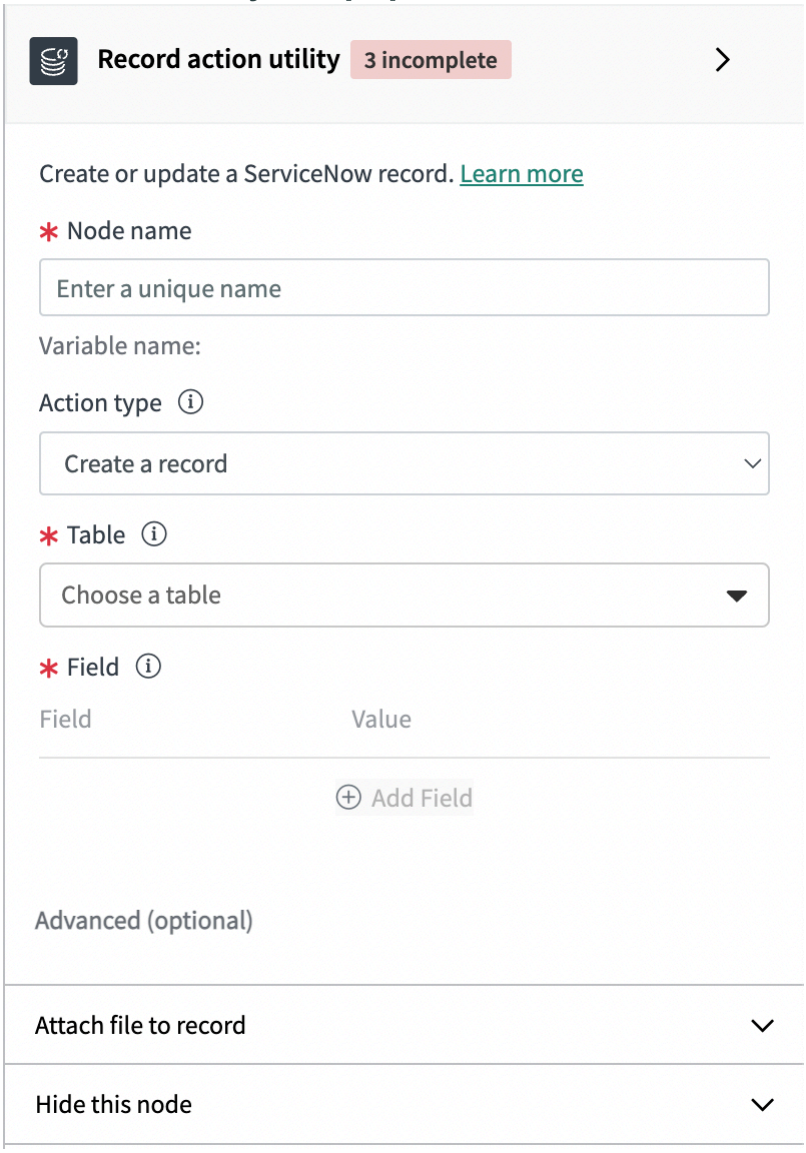Record Action utility basic properties



Decision utility

Use the Decision utility in a Virtual Agent topic to add two or more branches that represent different paths in a conversation.

Use scripts or variable conditions to set decision branches

Each branch below a Decision utility node has a condition property. You can define the condition using the condition builder or a script that returns a value of true or false. A branch that returns a value of true is followed, while a branch returning a value of false is not. When creating these scripts or conditions, ensure that only one branch in each Decision utility node evaluates to true.

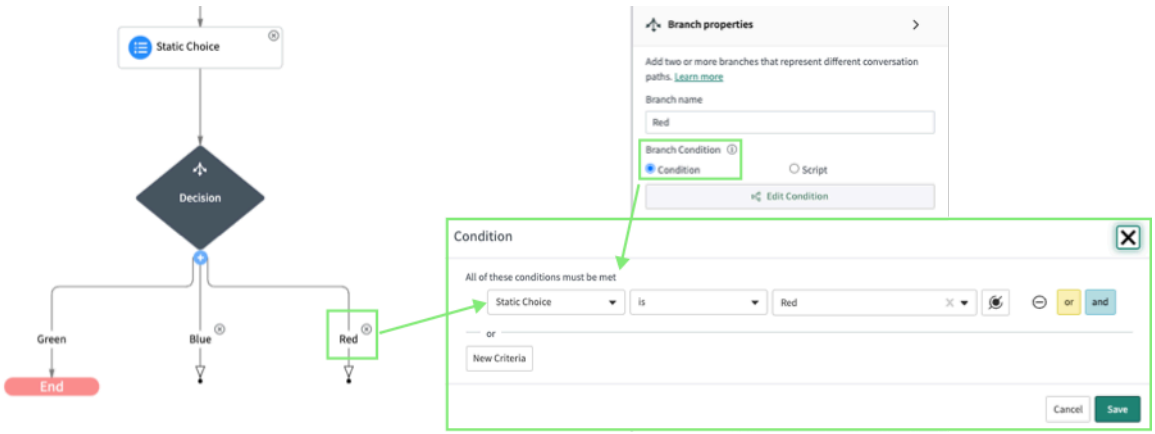
Note:
If you insert a **Boolean** user input control, you're prompted to add a **Decision** utility directly after the Boolean node on the canvas. Selecting **Yes** on the Boolean node's Decision utility prompt automatically generates two branches named *`True`* and *`False`*. The two branches conditions are automatically set through the condition builder.

For more information, see Branch a Virtual Agent conversation with a Decision utility.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example Decision utility node with branches

In this example, a static choice control prompts the user to select from three available colors and the selection is stored in a variable. The Decision utility control is configured with a branch for each possible selection. Each branch uses the condition builder, which returns true when the corresponding color is selected. In the example, the condition builder returns true when the choice is Red.



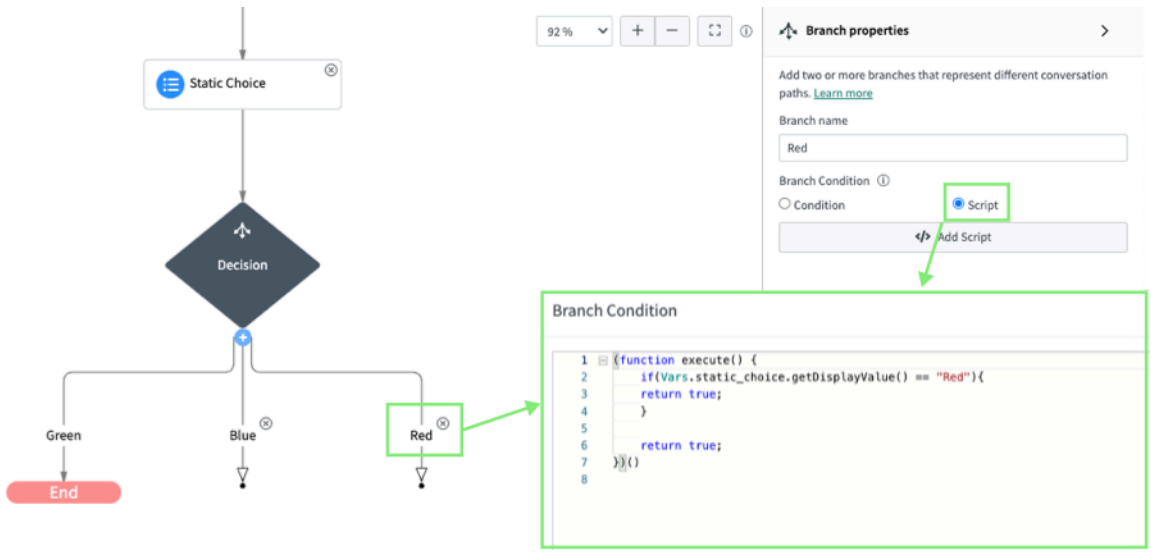You can also use the Script option for branch conditions. In the following example, the script provides the same functionality as the condition builder.



Topic Block utility



Use a Topic Block in a Virtual Agent conversation to perform a specific function or subflow that runs certain steps in a calling topic.

Topic Block utility properties

For more information, see Add a reusable topic block to a calling topic or topic block.

Property	Description
Node name	Name of the topic block node. The name is automatically assigned based on the topic block that you select. For example, if you choose the Acme Contextual Search topic block, the **Name** is Acme Contextual Search.

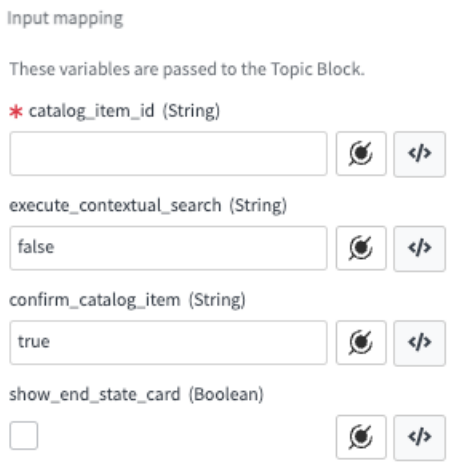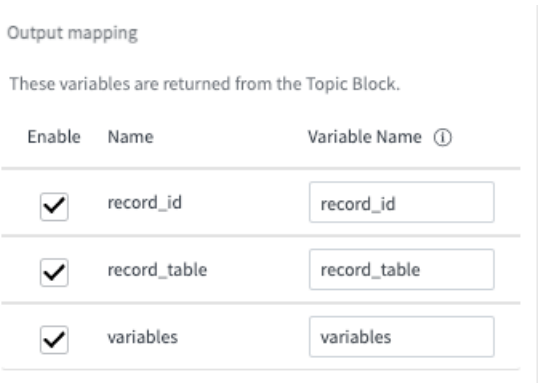© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	With **Use dynamic Topic Block** active, input a name of your choice.
Use dynamic Topic Block	Set this toggle to activate dynamic Topic Block options.
Topic block	A list of published topic blocks. Select a topic block to add to the calling topic. With **Use dynamic Topic Block** active, use the condition builder to input a condition or script instead.
Input mapping	The variables to be used as input to the selected topic block. In this example, input mapping variables include catalog item ID, execute contextual search, confirm catalog item, and show end state card.  The contents of this area change according to the topic block you selected. Options may include string input, referenced records, scripts, and so forth. With **Use dynamic Topic Block** active, you add all input mappings manually instead by selecting the Manage inputs to define icon . Inputs are handled similarly to the Input Parameters dialog box in the Start segment of a reusable topic block.
Output mapping	The variables to be output by the selected topic block. For example, the following image has example variables that are enabled:  The contents of this area change according to the topic block you selected.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	With **Use dynamic Topic Block** active, you add all input mappings manually instead by selecting the Manage outputs to define icon  . Inputs are handled similarly to the Input Parameters dialog box in the Start segment of a reusable topic block.
Advanced	
Hide this node	
Conditionally use this node if	A no-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

Example Topic Block utilities


The following Topic Block utility properties include the reference to an available topic block, input mapping variables to the topic block, and the output variables that the topic block will pass.

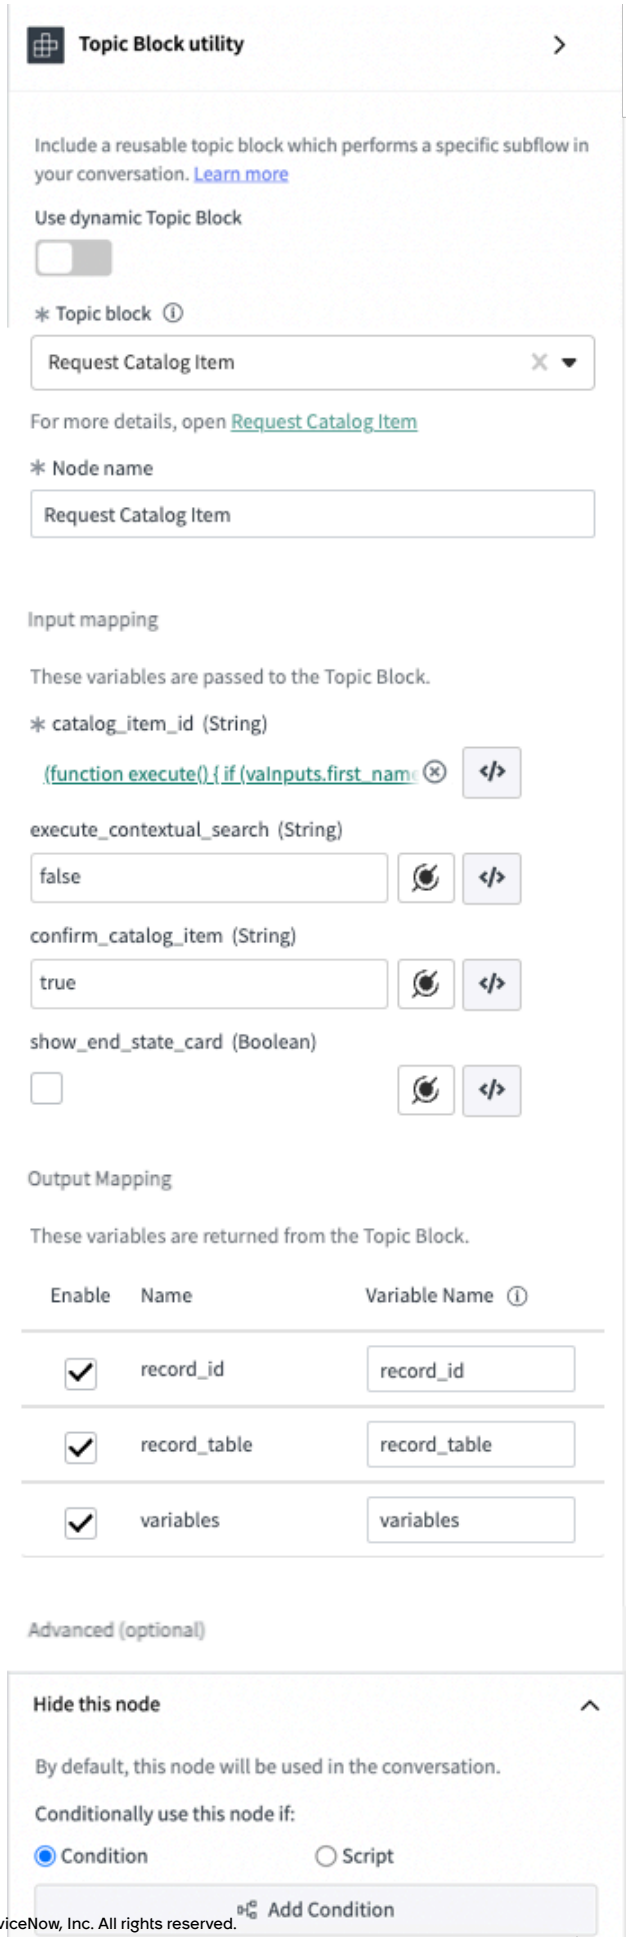© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

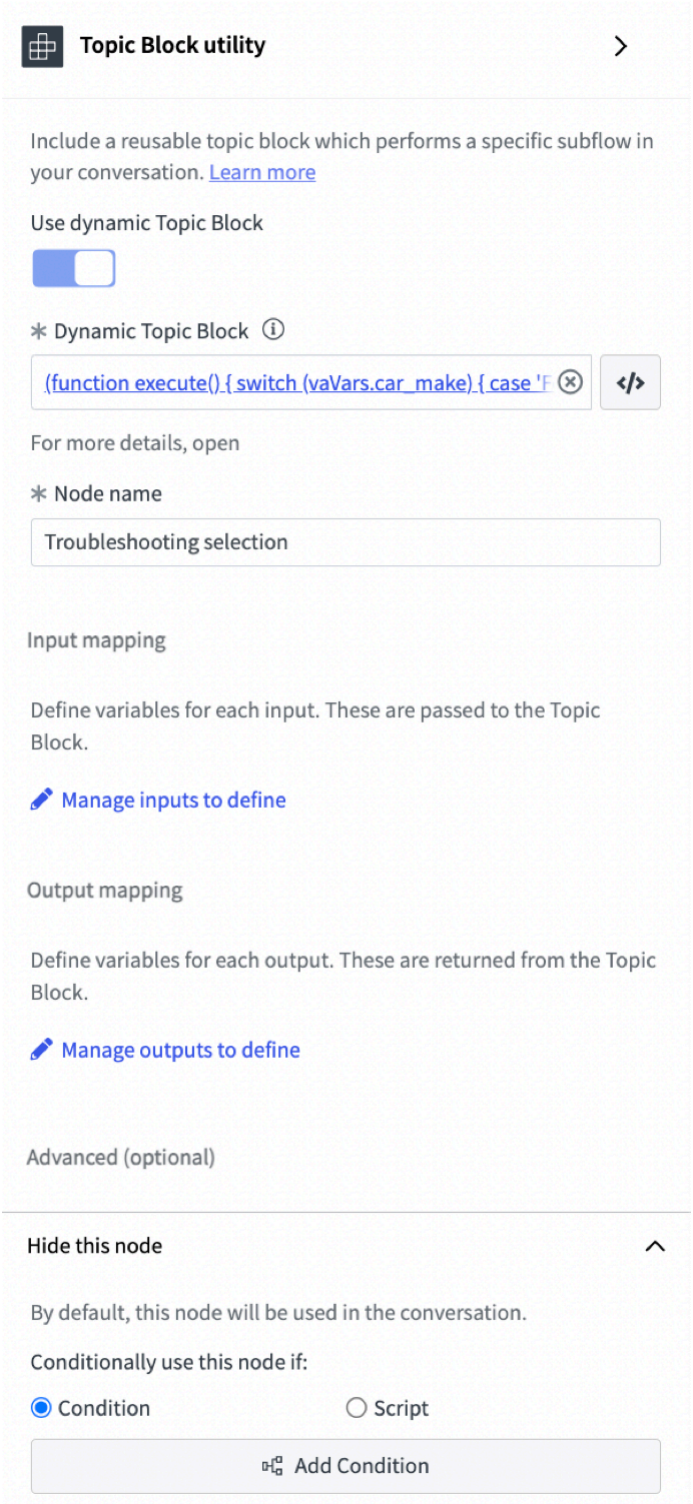The following Topic Block utility properties have the **Use dynamic Topic Block** toggle switch turned on.



Using dynamic Topic Blocks

Toggling the dynamic setting on the Topic Block enables you to programmatically choose which topic block or blocks to invoke, based on any number of conditions. You can pass in a dynamic set of inputs without an explicit, one-to-one match for a Topic Block definition.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

For example, assume you have two Topic Blocks. One sets your password by taking your username and returning a success or fail message. The other resets your password, but requires that you send two-factor authentication (2FA) token with the request before returning a success or fail message and a temporary password.

You can create two separate Topic Block invocations to handle the password-reset procedure, or you can create one Topic Block with the dynamic setting active and defined as follows:

- Add a script that checks if the reset type is `includesTwoFactor = true`. If the statement evaluates to `true`, then you return `TwoFactorReset`, otherwise you return `NormalPasswordReset`.
- Define two input mappings: `password` and `twoFactorToken`, both set equal to an object passed in which contains their values.
- Define two output mappings: `successful` and `tempPass`, the latter of which is only set if it exists in the return value for the Topic Block.
- Define two output nodes to output success or failure, and an output to confirm to you whether the `tempPass` value is true.

Example dynamic Topic Block expression

```
(function execute() {
    /* Return the name of the topic block to run. For example:
        switch (vaVars.car_make) {
            case 'Ford':
                return 'Ford troubleshooting';
            case 'Toyota':
                return 'Toyota troubleshooting';
            default:
                return 'General car troubleshooting';
        }
    */
})()
```

The script in the dynamic Topic Block expression returns a value based on your input. In this example, if you input `Ford` or `Toyota`, the Virtual Agent will call for the appropriate troubleshooting topic. If you input any other value, the Virtual Agent returns a general troubleshooting topic instead.

Custom control utility

Use the Custom Control utility in a Virtual Agent topic or topic block to reference a custom input control or a custom response control. Custom controls complement the controls provided in Virtual Agent Designer.

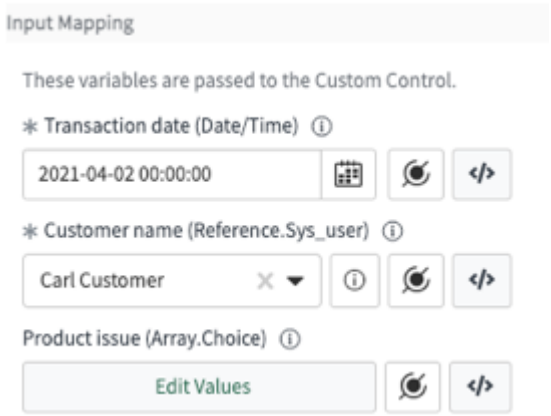
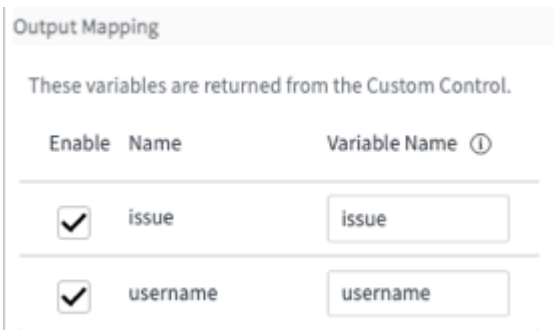
Custom control utility properties

Specify the properties of the custom input control or custom response control that you are adding to a topic or topic block. For more information about custom controls and their use, see Customizing Virtual Agent with custom controls.

Note:
Custom controls do not work on Internet Explorer version 11.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Custom control utility properties sheet

Property	Description
Custom control	The name of a custom control asset that has been published in Virtual Agent Designer.
Node name	The name of the custom control you selected.
Input mapping	The variables to be used as input to the selected custom control. For example, the following image has example variables:  The contents of this area change according to the custom control you selected. Options may include string input, referenced records, scripts, and so forth.
Output mapping	The variables to be output by the selected custom control. For example, the following image has example variables that are enabled:  The contents of this area change according to the custom control you selected.
Advanced	
Hide this node	
Conditionally use this node if	A no-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

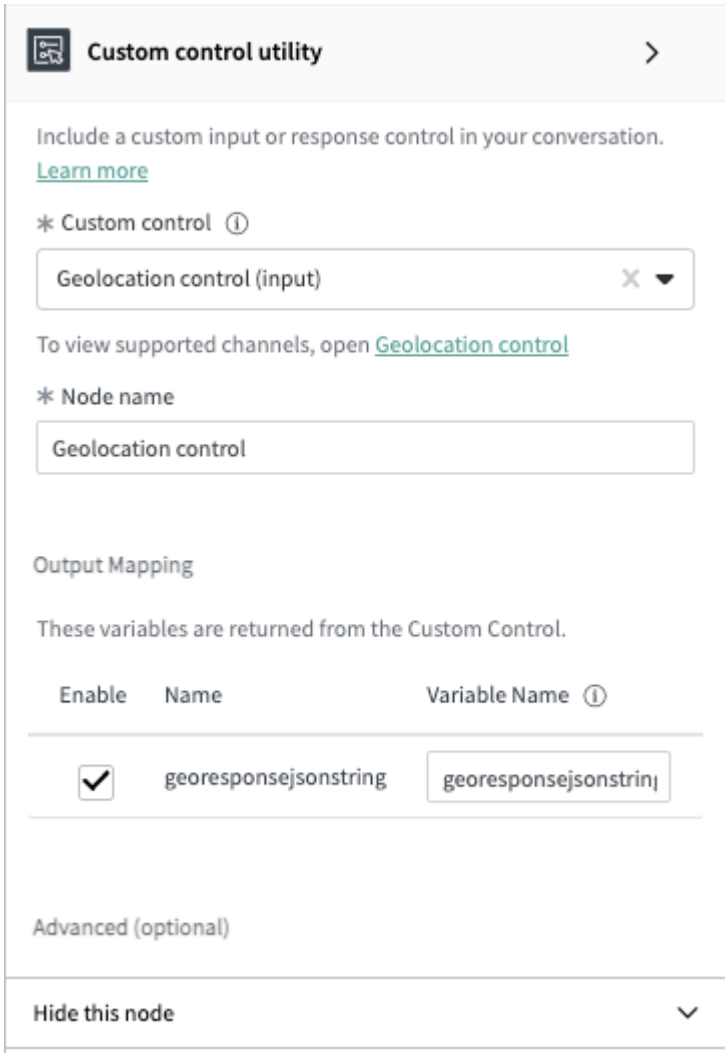Example custom control utility



Action utility

Use the Action utility in a Virtual Agent topic to select the flow action properties that the node should create. The Action utility integrates Virtual Agent with the ServiceNow Workflow Studio product.

Action utility properties

Specify the flow action properties for the node you want to create.


Property	Description
Node name	The name of this Action node.
Invoke Workflow Studio asset	Workflow Studio component type. Select one of the following: • **Action**: A reusable operation. • **Subflow**: An automated process that consists of a sequence of reusable actions, data inputs, and outputs.
Spoke	Name of the scoped application that contains Workflow Studio content that is dedicated to a particular application or record type.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
	For a list of default spokes, see Spokes.
Action/ Subflow	The Workflow Studio action or subflow to be performed in the instance. The **Input mapping** and **Output mapping** areas change depending on your selection. For details about the action, click the link beneath your selection to view it in Workflow Studio.
Wait for response?	Toggle switch that determines whether Virtual Agent waits for a response from the specified action before continuing.
Input mapping	The variables to be used as input to the selected action. The contents of this area change according to the action you selected. Options may include string input, referenced records, scripts, and so forth. For options that require a password, enable the **Include a password input** toggle switch to prompt the user for a password. Secure inputs must use the password2 data type. Input is securely masked and not viewable by others. **Note:** If a field is locked and you can't enter a string, the pill picker value must match the field type. For example, if the field type is document_id, the referenced value type must also be document_id. If no matching field exists, reference a field created in another FDIH action output or use a script.
Output mapping	The variables to be output by the selected action. The contents of this area change according to the action you selected.
Advanced	
Permissions	
Run as	Permissions to use for the action. Select one of the following options: • **User who initiates session**: When selected, the action runs using the same permissions that the current user has. • **System User**: When selected, the action runs using system privileges, some of which may be unavailable to the current user.
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

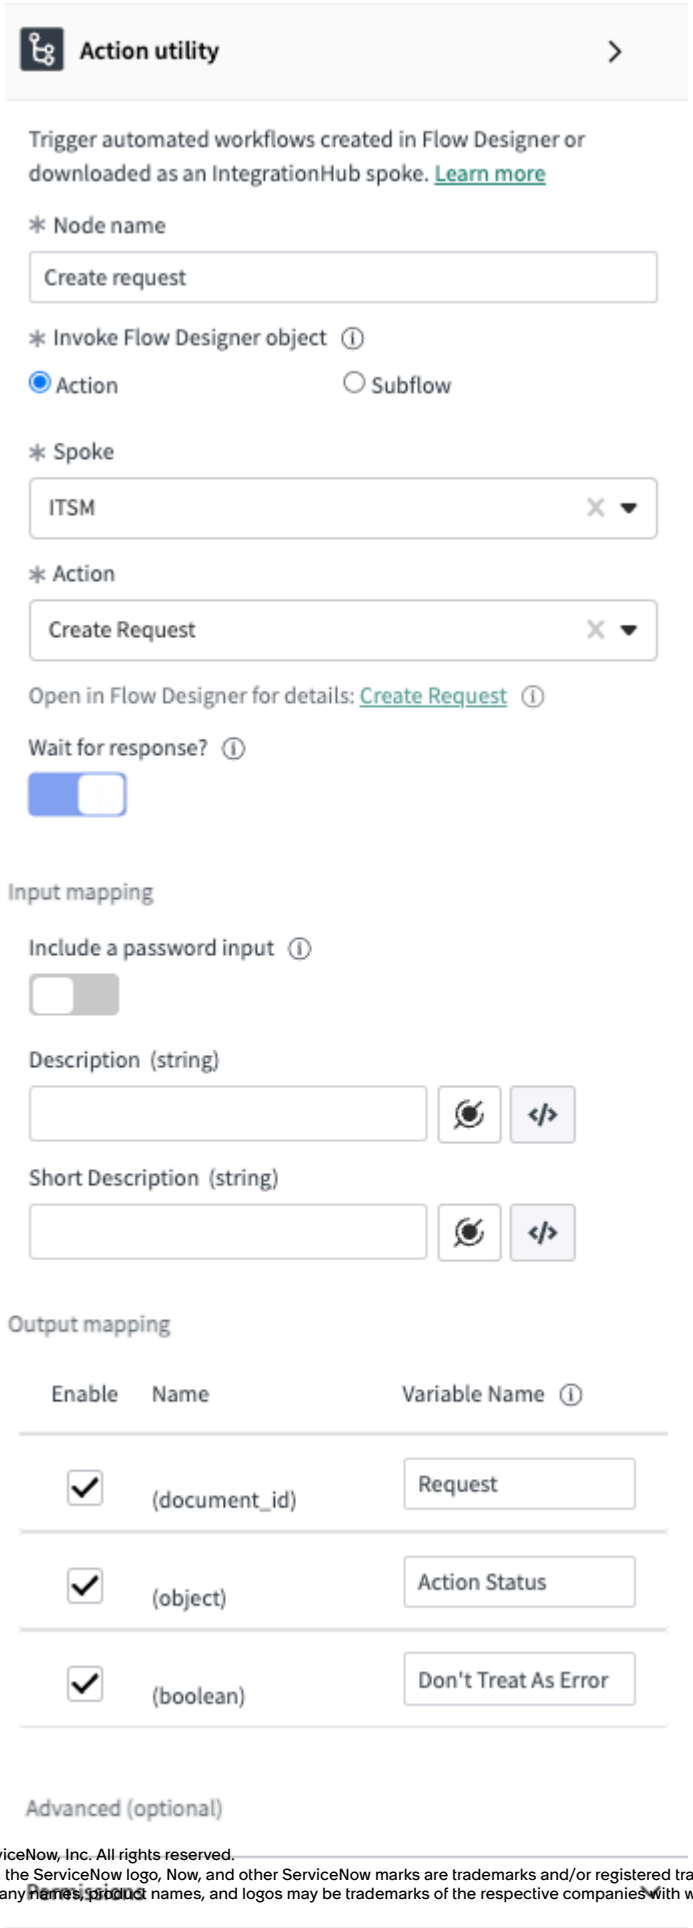Example Action utility



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Deflection utility

Use the Deflection utility in Virtual Agent to track issues that Virtual Agent helped to resolve or actually resolved for a user.


Deflection utility properties

Specify the flow action properties for the node that you want to create.

Property	Description
Node name	Name of the Deflection node.
Input mapping	
Deflection configuration	Select from a list of pre-defined deflection configurations. For more information, see Create deflection configurations and patterns.
Deflection pattern	Select from a list of pre-defined deflection patterns. Ensure that your selection is tied to a pre-defined deflection. See Create deflection configurations and patterns for more.
Activity table	Table name where the deflection activity occurs. Add incident or task tables related to the deflection.
Activity IDs	List of comma-separated Activity IDs. Add AI Search results or related tasks in the deflection occurrence.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

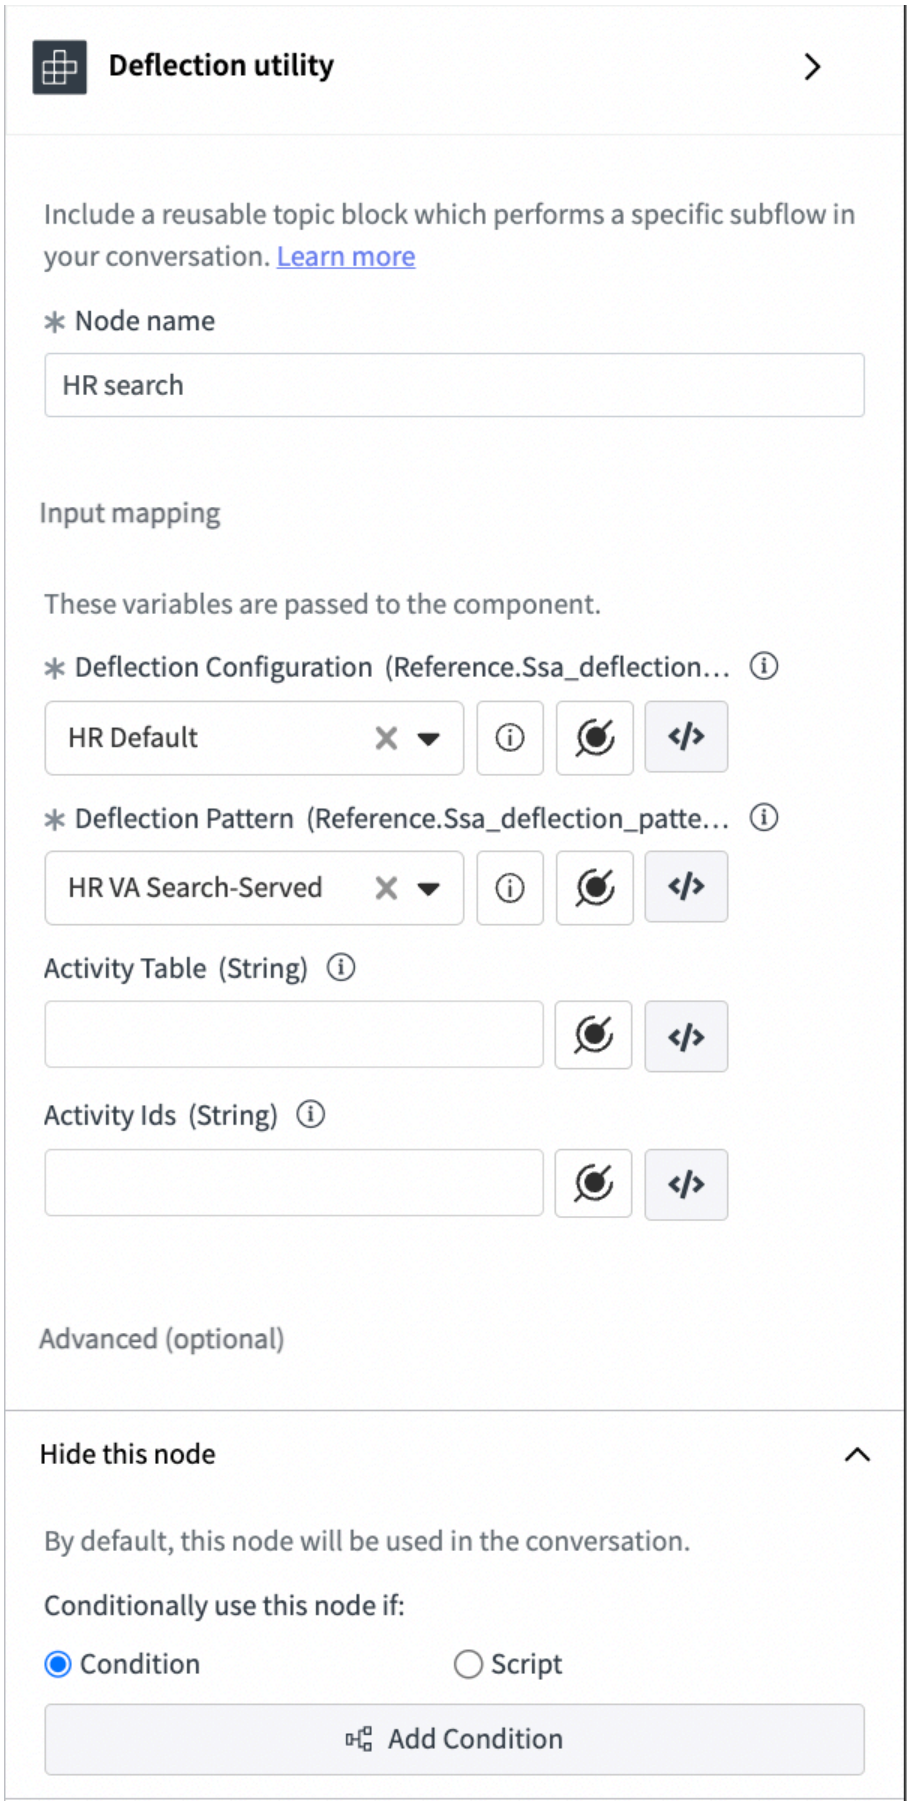Example Deflection utility



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Diagnostic Topic Executor utility

Use the Diagnostic Topic Executor utility in Virtual Agent to ensure the proper function of components in a topic.


Diagnostic Topic Executor utility properties

Specify the flow action properties for the node that you want to create.

Property	Description
Node name	Name of the node.
Input mapping	
Diagnostic content	String that is passed to the component being diagnosed.
Output mapping	
Is topic executed	Option to confirm that the topic executed properly, with variable data returned by the component. Select **Enable** to activate, and enter a custom variable name for the value if desired.
Is data collection topic executed	Option to confirm that the data collection executed properly, with variable data returned by the component. Select **Enable** to activate, and enter a custom variable name for the value if desired.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

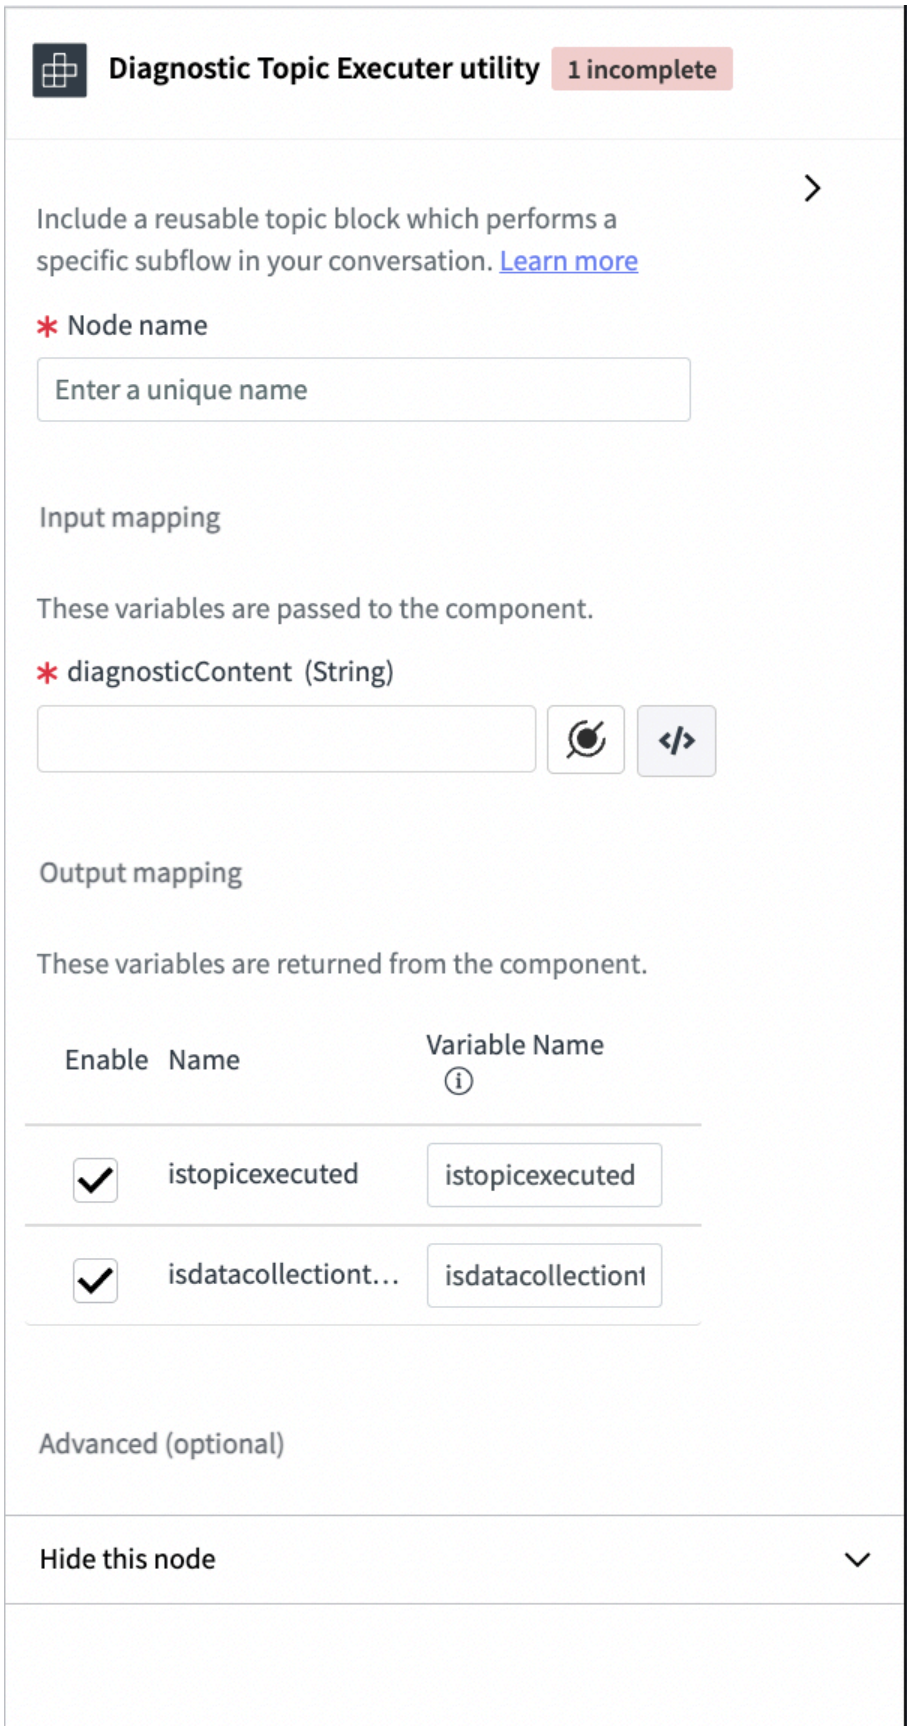Example Diagnostic Topic Executor utility



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Geolocation utility

Use the Geolocation utility to gather map coordinates from a user, to personalize topics to a user's location, provide data for navigation or on-site tasks, and other services.


Geolocation utility properties

Specify the flow action properties for the node that you want to create.

Property	Description
Node name	Name of the Geolocation node.
Input mapping	
Permission prompt	String for the custom prompt requesting geolocation from a user.
Output mapping	
Latitude	User's latitude returned after the Permission prompt. **Note:** All Output Mappings are customizable. Select **Enable** to activate each one, and input a custom variable name to store the value under if desired.
Longitude	User's longitude returned after the Permission prompt.
Error message	Message returned if the geolocation attempt encounters an error.
Error type	Type of error returned based on the error message.
Status	Status of the geolocation data.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

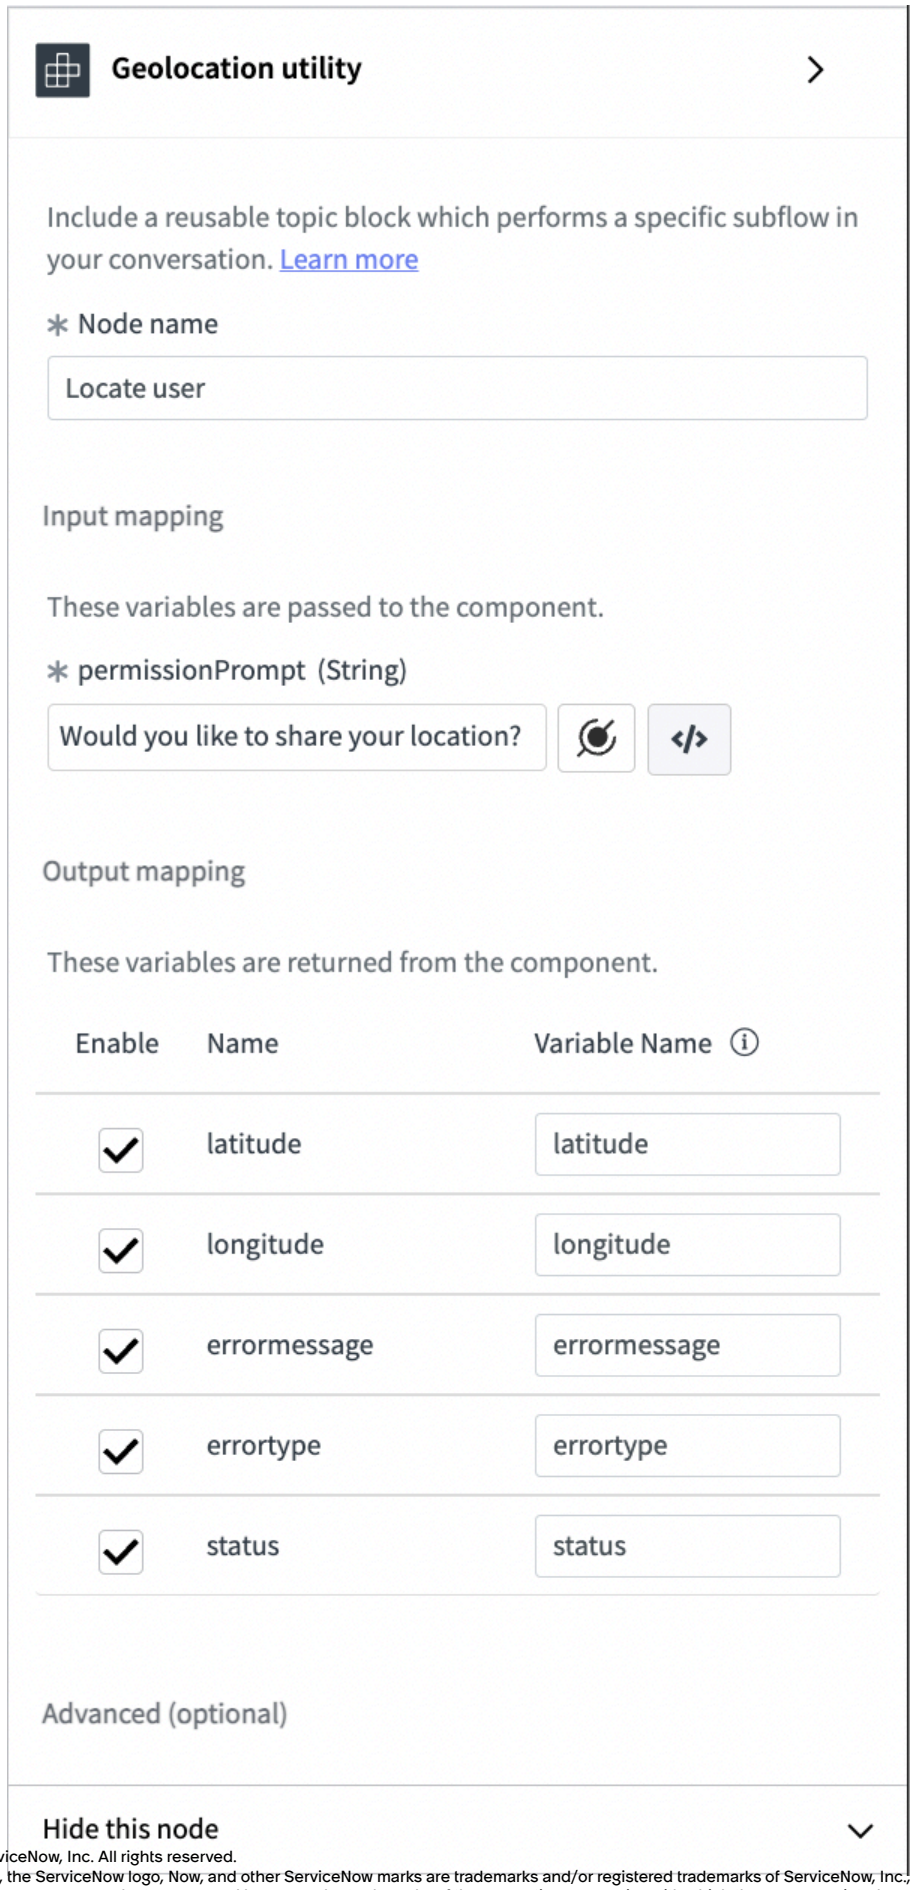Example Geolocation utility



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Multi File Upload utility

Use the Multi File Upload utility to upload more than one file at a time in a Virtual Agent conversation.

Multi File Upload utility properties

Specify the flow action properties for the node that you want to create.


Note:
The Multi File Upload utility is supported in Microsoft Teams, Slack, and Virtual Agent API only.

Uploaded files are stored in the Attachments [sys_attachment] table.

Property	Description
Node name	Name of the Multi File Upload node.
Input mapping	
Prompt	Text string prompting the user to upload files.
Allow user to skip	Option to skip uploading files if a user has none.
Max file count	Maximum number of files that can be uploaded.
Max file size	Maximum size of individual files uploaded, measured in megabytes.
Try Again message	Message sent to a user if the file upload fails.
User confirmation message	Message sent to a user confirming that files uploaded.
Allow all file types	Option to allow uploading all file types.
Output mapping	
Files	The message sent to the user that lists files uploaded. Select **Enable** to activate this output, and input a custom variable name to store the value under if desired.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

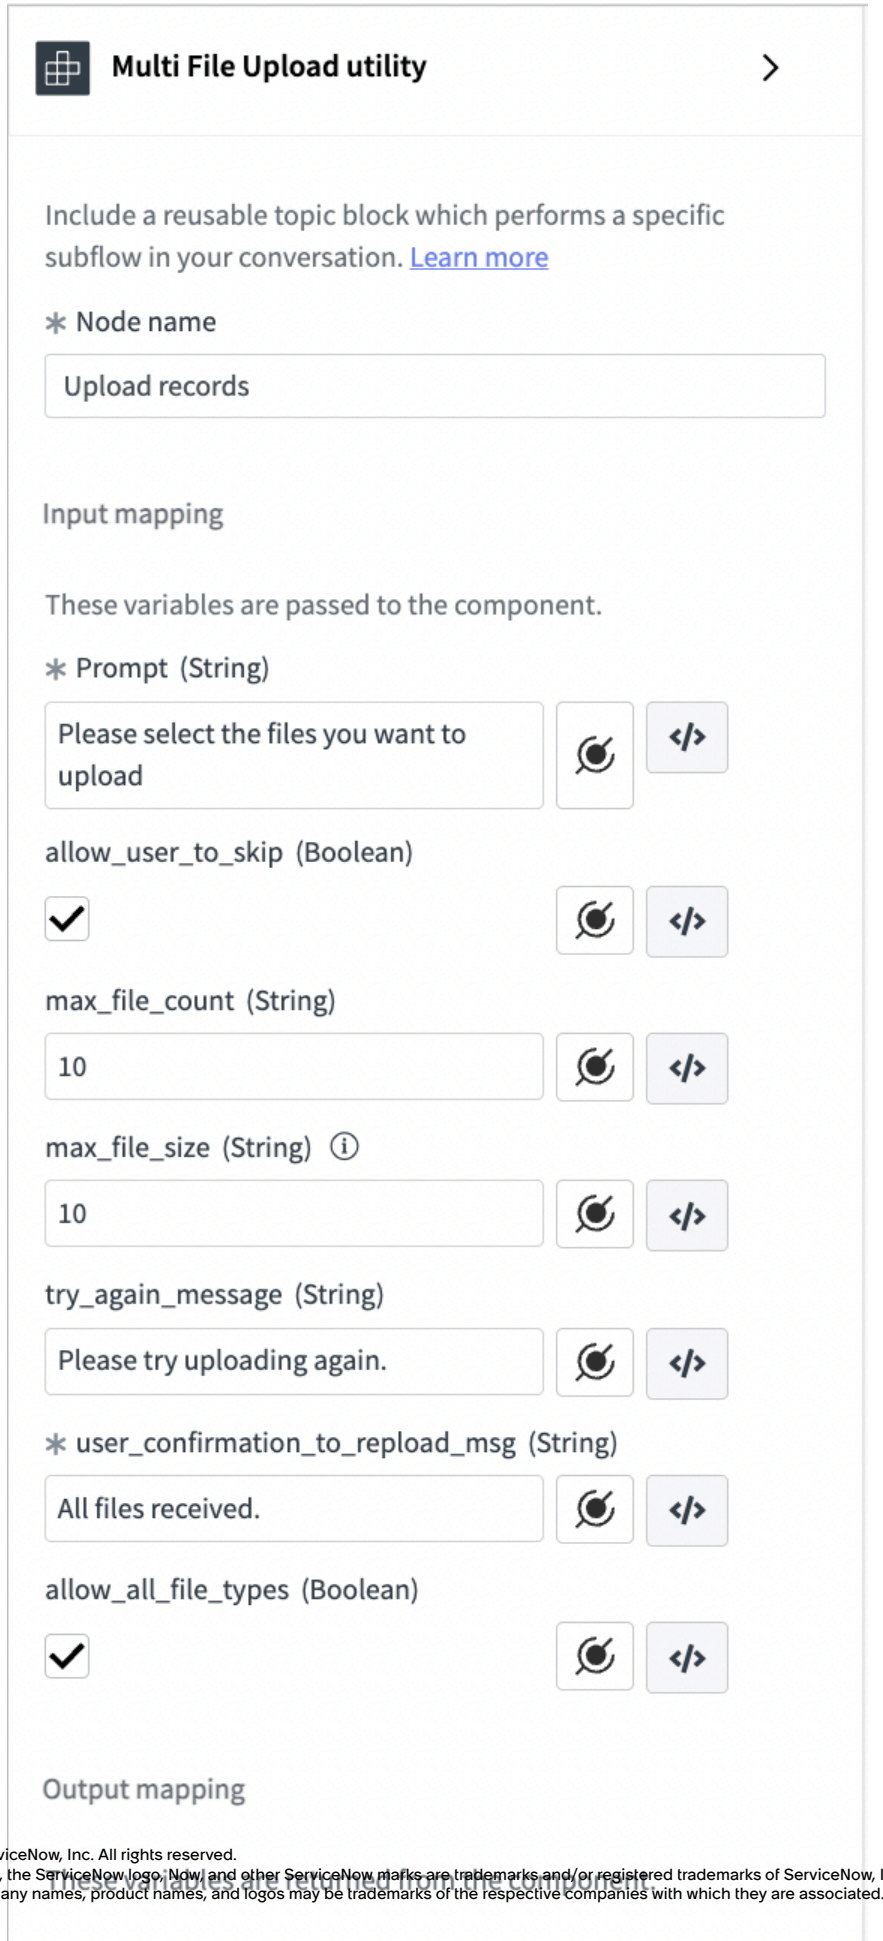Example Multi File Upload utility



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Pause utility

Use the Pause utility to create a temporary halt in your Virtual Agent conversations.


Pause utility properties

Specify the flow action properties for the node that you want to create.

Property	Description
Node name	Name of the Pause node.
Input mapping	
Seconds	Duration of pause. **Note:** Any duration value greater than the maximum defined in the system reverts to the maximum, or 60 seconds if not defined.
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

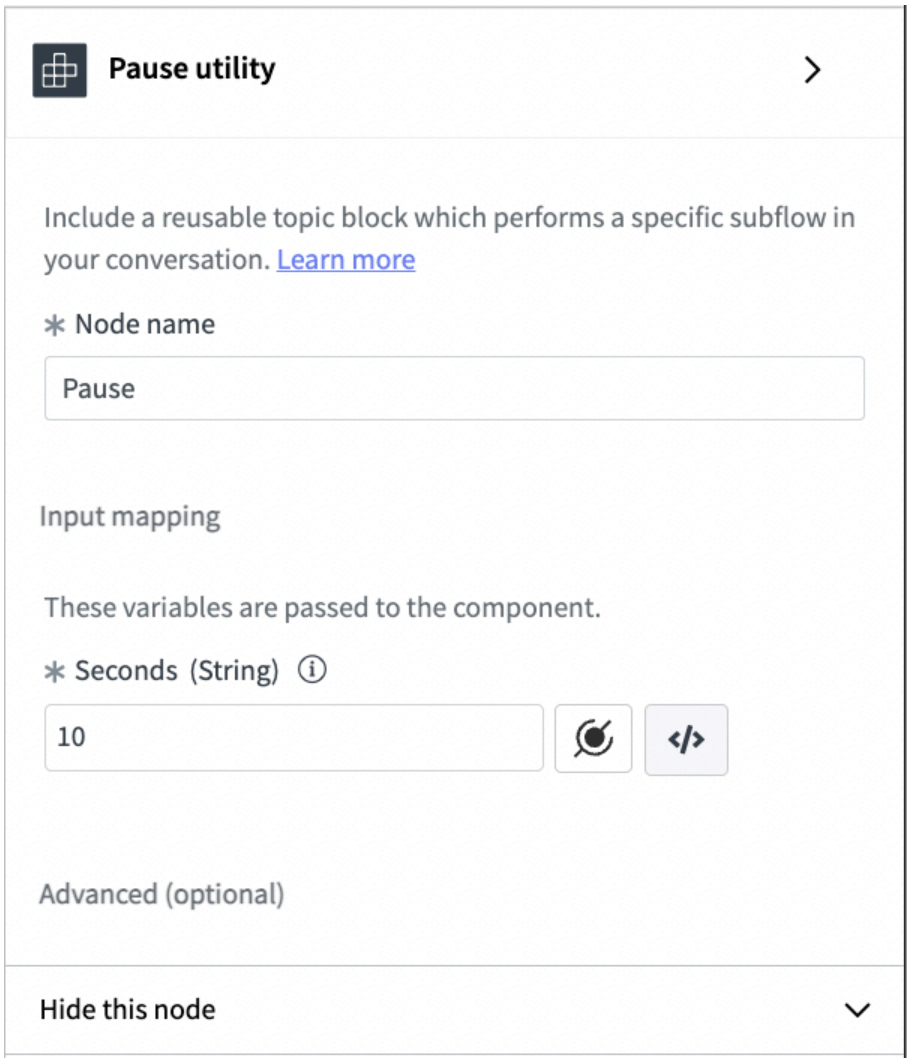Example Pause utility



AI Connector utility

Use this utility to link generative AI to custom skills for improved performance.

AI Connector utility properties


Specify the flow action properties for the node that you want to create.

Property	Description
Node name	Name of the AI Connector node.
Select custom skill	Open the drop-down menu to search for a custom skill.
Wait for response	Activate this toggle switch to wait for a response from the action before continuing the conversation.
Input and Output mappings	
All input and output mappings are based on the custom skill you select. For more information on custom skills, see Now Assist Skill Kit, Managing custom skills in Assistant Designer Asset library, and Using AI agents in Virtual Agent topics.	


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Property	Description
Advanced	
Hide this node	
Conditionally show this node if	No-code condition statement or low-code script that specifies a condition for presenting this node in the conversation. The condition must evaluate to true.

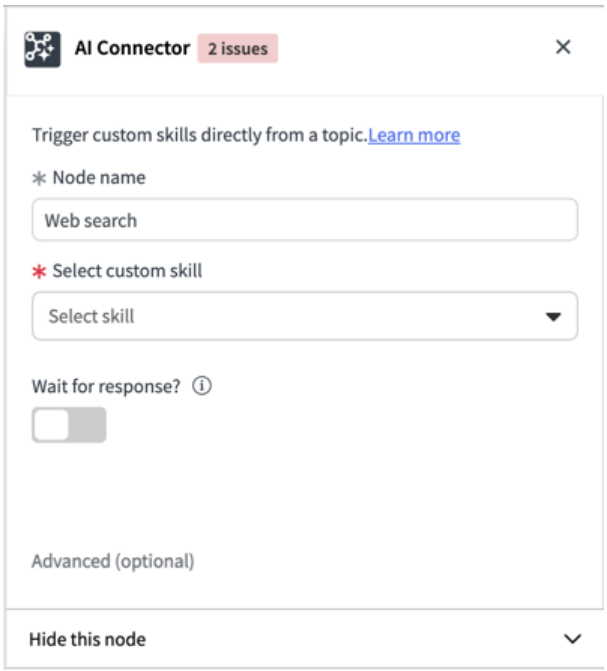Example AI Connector utility



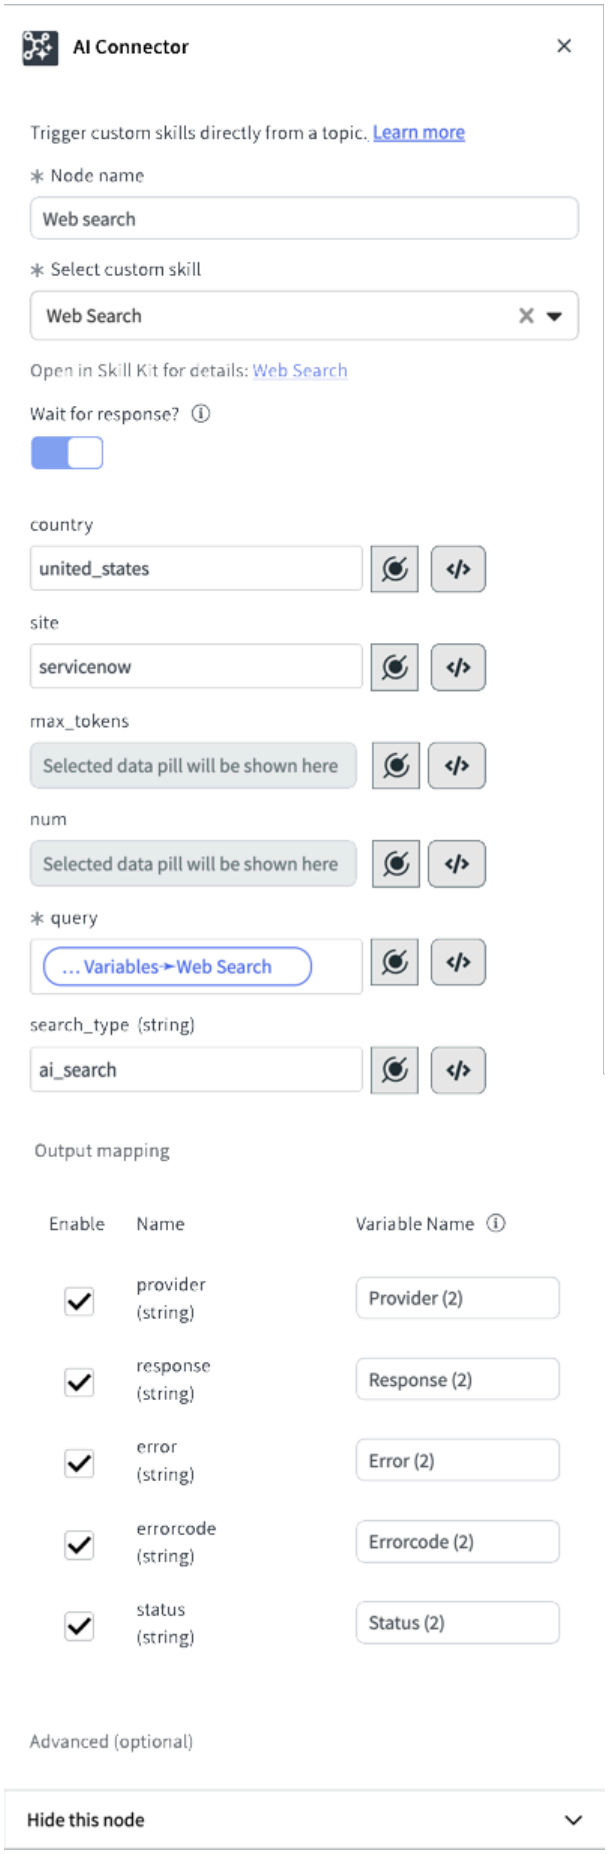© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Virtual Agent technical reference

Use these topics to learn more about scripting methods, NLU system entities, and the Virtual Agent Interactions table.

Virtual Agent utilizes a queuing system to process incoming messages coming from asynchronous channels. Dedicated worker threads pull from this queue and process the messages in their own transactions. This enables Virtual Agent to scale to meet traffic volume. Virtual Agent transactions run as non-interactive (the scriptable method `gs.isInteractive()` will return false).

Various roles and tables are available when you activate Virtual Agent. For more information, see Installed with Virtual Agent. Virtual Agent also has a data retention policy to manage table size. For more information, see Data management in Conversational Interfaces

The following technical reference topics are available.

Virtual Agent roles

Virtual Agent adds several roles for users operating as Virtual Agent administrators.

To learn more about managing subscriptions, see Managing per-user subscriptions in Subscription Management and contact your account representative.

Role description

Roles that are installed with Virtual Agent are listed below with the following information:

Role title [name]

Name of the role. Text within brackets matches the **Name** field in the Roles [sys_user_role] table.

Description

Description of the role and its intended use.

Contains Roles

List of roles contained within the role.

Groups

List of groups this role is assigned to by default.

Considerations

Warnings or other considerations for administrators.

Installed roles

Note:

Simplify user administration by creating groups that contain all the roles necessary for specific personas rather than to individual users. You can then assign individual users to those groups. When users transition to new roles, you can then re-assign their group memberships, and avoid scenarios where users retain unexpected roles.

For details on the administration of users, groups, and roles, see User Administration.

Issue auto resolution administrator [iar_admin]

Configures the delivery of automated task resolution messages in Virtual Agent, email, or SMS.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Contains Roles

List of roles contained within the role.

- *evam_admin*
- *search_application_admin*

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Chat survey administrator [chat_survey_admin]

Controls and configures post-chat surveys for gathering feedback on user experience, or for chat queues defined in Advanced Work Assignment.

Contains Roles

List of roles contained within the role: survey_admin.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Workflow Studio [action_designer]

Launches the Workflow Studio app, to automate tasks with sequences of related steps.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

EVAM administrator [evam_admin]

Accesses Entity View Action Mapping, to standardize display of different data sources in cards or lists.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Virtual Agent branding [va_branding]

Fetches branding settings via scripted rest API.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Activity subscriptions administrator [actsub_admin]

Creates subscribable objects and subscribes to activities on those objects.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Workflow Studio [action_designer]

Launches the Workflow Studio app, to automate tasks with sequences of related steps.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

EVAM administrator [evam_admin]

Accesses Entity View Action Mapping, to standardize display of different data sources in cards or lists.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Virtual Agent branding [va_branding]

Fetches branding settings via scripted rest API.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

None.

Special considerations

None.

Activity subscriptions administrator [actsub_admin]

Creates subscribable objects and subscribes to activities on those objects.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Flow designer [flow_designer]

Launches the Workflow Studio app, to create multi-step workflows.

Contains Roles

List of roles contained within the role.

- *decision_table_reader*
- *flow_operator*
- *rest_api_builder*

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Automated testing framework designer [atf_test_designer]

Creates and runs automated tests to confirm proper instance function after making changes to the instance.

Contains Roles

List of roles contained within the role: impersonator.

None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

NLU Administrator [nlu_admin]

Creates NLU models and associated intents in the NLU Workbench.

Contains Roles

List of roles contained within the role.

- *sn_nlu_workbench.nlu_feedback_admin*
- *nlu_editor*
- *nlu_user*

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

External application installation administrator [external_app_install_admin]

Installs external apps such as Slack, Microsoft Teams, and Workplace.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Any user assigned this role can alter or delete topics created in the Virtual Agent Designer system, including topics that other topics refer to or have as dependencies.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Automated Customer Experiences (ACE) user [sn_ace.ace_user]

Accesses and reads ACE records.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Conversational Interfaces guided setup administrator [sn_ci_gs_content.ci_guided_setup_admin]

Creates a guided setup to assist users with planning the roll-out of Conversational Interfaces materials, and performs the basic configurations to go live.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Localization requestor [localization_requestor]

Creates translation requests, and views completed translations in the Localization Framework.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Special considerations

None.

Self-service manager [sn_ssa_core.self_service_manager]

Performs CRUD operations on Pattern and Activity configuration and the Deflection data tables.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

None.

Image administrator [image_admin]

Manages image files on the Images [db_image] table.

Contains Roles

List of roles contained within the role.

None.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Search application administrator [search_application_admin]

Inserts data into, updates, and deletes search-UX related configuration tables including: [sys_search_context_config], [sys_search_source], [m2m_search_context_config_search_source], [sys_search_facet], and [sys_search_filter]. The AI Search administrator [ais_admin] role is included in this role to perform AI Search configuration.

Contains Roles

List of roles contained within the role.

- *ais_admin*
- *personalize_dictionary*

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Chat analytics administrator [chat_analytics_admin]

Sets up the Conversational Analytics dashboard, reconfigures its contents, and creates funnels to review performance of conversation flows.

Contains Roles

List of roles contained within the role: chat_analytics_viewer.

Groups

List of groups this role is assigned to by default.

None.

Special considerations

Note:
Avoid granting an admin role when more specialized roles are available.

Domain separation and Virtual Agent

Domain separation is supported in the Virtual Agent application. Domain separation enables you to separate data, processes, and administrative tasks into logical groupings called domains. You can control several aspects of this separation, including which users can see and access data.

Support level: Standard

- Includes all aspects of **Basic** level support.
- Application properties are domain-aware as needed.
- Business logic: The service provider (SP) creates or modifies processes per customer. The use cases reflect proper use of the application by multiple SP customers in a single instance.
- The instance owner must configure the minimum viable product (MVP) business logic and data parameters per tenant as expected for the specific application.

Sample use case: An admin must be able to make comments required when a record closes for one tenant, but not for another.

For more information on support levels, see Application support for domain separation.

Domain separation allows you to partition your organization's data and administrative control into separate domains. This lets you isolate the data and control access to it, which is particularly important in environments where multiple tenants share a common platform.

Domain separation in Virtual Agent works by creating separate Virtual Agent views that are isolated from each other. The chat configuration, branding, NLU settings, and topics and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

components can be assigned to a given domain within Virtual Agent. Users within a domain can only access the Virtual Agent conversations that are associated with their domain. This means that users in one domain cannot access data or functionality that belongs to another domain, including Virtual Agent conversations. Additionally, administrators who are assigned to a domain cannot see or manage Virtual Agent conversations in other domains, ensuring complete separation and security.

Domain separation is best for customers with any of the following requirements:

- You need to enforce absolute data segregation between business entities (data separation).
- Customize business process definitions and user interfaces for each domain (delegated administration).
- Maintain some global processes and global reporting in a single instance.
- Separate data between customers or sub-organizations.
- The session scope is set upon session establishment to the domain listed in the user's user record. Users can manually change their session domain scope with the domain picker.
- The record scope uses the domain of the record and is active when viewing the form of any record.

  By default, the record scope takes precedence over the session scope so that users in higher-level domains adhere to each record's data and process constraints. However, these users can choose to expand or collapse the domain scope to show or hide data from other domains. For example, a user in the service provider (SP) global domain also has visibility into child domains such as the ACME domain. When looking at an incident record from the ACME domain, the user can choose to expand the domain scope to show values from the MSP domain or collapse the domain scope to show only record values that match the record's ACME domain.

> **Note:**
> Users always have access to data from domains that have been explicitly granted to them by domain visibility.

When domain separation is used, guest users are restricted to the domain used in the session. For custom chat channels, the domain of the provider application is used. For the chat widget, you can associate a domain ID with the chat portal. For details, see Associate a domain ID with a chat portal.

For more information, see Domain scope.

Requirements

All domain support features require the Domain Support - Domain Extensions Installer [com.glide.domain.msp_extensions.installer] plugin. For details, see Request domain separation.

Configuring Virtual Agent with domain separation

Branding

Service providers can create a chat branding configuration per domain.

Chat experiences

Chat experiences, including the default experience and any custom experiences, allow for domain separation. Each chat experience profile belongs to a domain. Each child customization, such as a setup topic change, belongs to a domain. Each child customization implements system overrides so that sub-domains can override parent-domain customizations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

NLU settings

Only one NLU service provider can be set per domain-separated instance for all Virtual Agent clients. The managed service provider (MSP) logs in as a global user for the domain to configure NLU. For details, see Configure Natural Language Understanding in Virtual Agent.

Creating topics in subdomains in Virtual Agent Designer

Roles required: admin or virtual_agent_admin

The service provider either logs in to one of the subdomains and creates and publishes topics or allows subdomain admin users to create and publish their own topics.

Topic names within a domain must be unique, but Virtual Agent does allow you to create topics with the same name in other domains. For example, each domain might have a topic called **Greeting**.

Only service provider admins can do the following:

- Activate Virtual Agent conversation plugins or store apps for other ServiceNow business applications, such as ITSM, CSM, or HRSD, to enable pre-built topics for the subdomain.
- Assign roles on a particular subdomain to control which topics can be run by users.

Admin users assigned to the subdomain can do the following:

- Create topics in the instance.
- Be logged into the global domain and impersonate a user in the subdomain.
- Publish all available topics in the subdomain to chat widgets and messaging applications.

Domain separation in the chat widget channel

The chat widget does not support domain separation. However, you can provide a domain-separated chat experience in the chat widget channel by using separate, domain-separated portals. For example, you can create two separate support portals that are restricted to separate domains. Use the *domain_id* in the portal script to designate the domain. This gets passed as the *sysparm_domain_id* parameter in the portal URL.

To configure the portal, see Associate a domain ID with a chat portal.

For information about URL parameters, see Virtual Agent URL parameters.

Domain separation and Virtual Agent messaging app integrations

Roles required: admin or virtual_agent_admin

The domain-separated instance has one setup record for Slack, Microsoft Teams, Workplace, or Facebook Messenger.

Customers on the subdomain license either Slack, Microsoft Teams, or Workplace independently of the ServiceNow instance.

The admin of the subdomain installs the integrations within the subdomain and configures the appropriate credentials to access Virtual Agent from the third-party client. For details, see Integrating Virtual Agent with messaging apps.

For Facebook Messenger, the admin manually configures the integration. For details, see Integrating Virtual Agent with Facebook Messenger.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Related topics

Domain separation for service providers

Associate a domain ID with a chat portal

The Service Portal platform is not domain-separated, but you can create different versions of a portal and restrict each version's use to a single domain for chat purposes. For example, you could create two employee service portals and define a different domain for each.

Before you begin

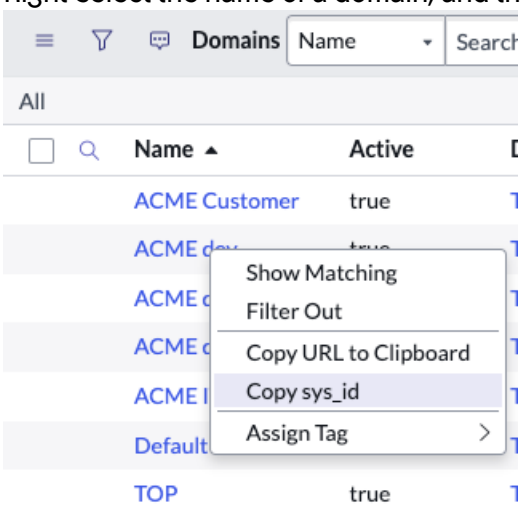
Role required: admin

About this task

Elements of the Service Portal platform such as settings, portals, pages and widgets are not domain-separated. However, the data within widgets does display when based on the appropriate domain. To provide different experiences, admins should create separate service portals, each with unique URLs, that they can redirect users to. For a domain-separated chat experience in the chat widget channel, create a portal and use the *sysparm_domain_id* parameter in the URL to designate the domain. For more information, see Virtual Agent URL parameters.


Procedure

1. **Optional:** Create a new domain and assign roles to the domain as needed.
2. Copy the domain's sys ID.
   a. Navigate to **All** > **Domain Admin** > **Domains**.
   b. Right-select the name of a domain, and then select **Copy sys_id**.



   c. Paste the ID in a text editor and save it for later.
3. Navigate to **All** > **Service Portal** > **Agent Chat**.
4. Select the name of the portal that you want to restrict to a domain, or create a new one. If prompted, open the record for editing.
5. In the **Server script** area, add the *domain_id* parameter and the domain's sys ID that you copied earlier.

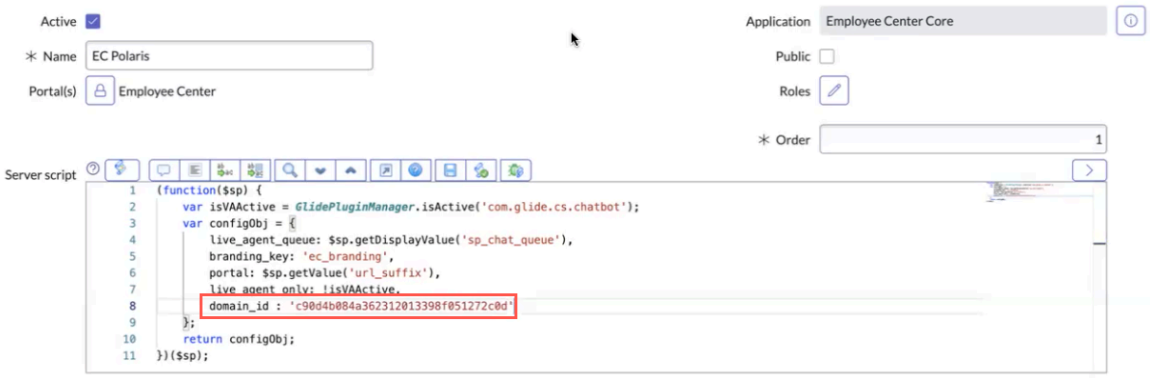© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



6. Select **Update** or **Submit** to save your changes.

Result

The *sysparm_domain_id* parameter gets passed in the portal URL.

Virtual Agent interaction records

Each time a Virtual Agent conversation occurs, an interaction record captures the entire conversation in the Interactions [interaction] table. The record includes all topic elements used in the conversation, as well as live agent transfers.

Interactions [interaction] table

Each conversation in an instance generates an interaction record in the Interactions [interactions] table, which logs the conversation between a requester and Virtual Agent. The interaction records include conversations that occur across the supported chat channels: chat widget, native mobile app, and messaging integrations.

Note:
The Interactions table is part of the Interaction Management plugin (com.glide.interaction). Virtual Agent, Agent Chat, and Connect Support use this plugin.

These interaction records provide administrators, Virtual Agent administrators, support agents, and support managers with a convenient way to review what happened during a conversation. The records also provide a quick way to see the type of conversations that occur: Virtual Agent, live agent transfers to Agent Chat, and live agent transfers to Connect Support.

Interactions [interaction] table

Interactions | Number | Search | Actions on selected rows... | New

All

Number	Opened	Opened for	State	Type	Agent chat	Virtual agent	Assigned to	Application
IMS0000002	2022-03-29 10:02:51	(empty)	Closed Complete	Chat	false	true	Virtual Agent	Global
IMS0000002	2018-02-20 11:05:47	Guest	Closed Complete	Walk-up	false	false	(empty)	Global
IMS0000003	2018-02-20 11:05:47	Guest	Closed Complete	Walk-up	false	false	(empty)	Global
IMS0000003	2022-03-29 10:09:29	(empty)	Closed Complete	Chat	false	true	Virtual Agent	Global

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Conversation transcripts are available only for Virtual Agent records that have Virtual Agent conversations and live agent transfers to Agent Chat.

- When a conversation transcript for live chat exceeds 4000 characters, the transcript is handled as an attachment to the interaction record.
- File attachments that the user uploads are recorded in the Attachments [sys_attachment] table, which corresponds to the interaction record. Attachments are automatically displayed in the activity stream.
- For Virtual Agent conversations that have live agent transfers to Connect Support, only the Virtual Agent conversation is included in the interaction transcript. Live agent conversations in Connect Support are recorded in the activity stream.

Key fields in the Interactions table

To view the Interactions table, navigate to **All**, and then enter `interaction.list` in the navigation filter. You can configure the fields displayed in the table using the list collector (slushbucket).

Field	Description

Agent average response time	Average time based on how long the agent takes to respond to each message sent by a requester. For example:
	`00:00 Requester: I have a question.`
	`00:01 Agent: What is it?`
	`00:04 Requester: How do I reset my password?`
	`00:05 Requester: I forgot it and can't access my account.`
	`00:07 Agent: Here is the answer.`
	Pair #1 00:01-00:00 = 00:01
	Pair #2 00:07-00:04 = 00:03
	(00:01 + 00:03) / 2 = 00:02 average

Agent chat	Flag that indicates the conversation was transferred to a live agent in Agent Chat: true or false.
Application	Scope of the application. Scope determines the accessible files and data available to other applications.
Assigned to	Name of the fulfiller: Live agent name or Virtual Agent
Domain	The domain the conversation took place in. For more information, see Domain separation and Virtual Agent.
Number	Number of the interaction record.
Opened	Date and time that the conversation started.
Opened for	Name of the requester. Anonymous users are identified as Guests.
Sentiment	Shows the sentiment level of the interaction, if sentiment analysis is enabled on the instance. This value can be shown to agents in the Agent Chat interface.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Field	Description
	Business rules can be created based on this value at handoff (Virtual Agent to live agent, live agent to live agent, or live agent to queue). Valid values are as follows: • Positive • Neutral • Negative • null (no value assessed) This value is also entered in the Interaction Insights table.
State	Conversation states: • In Progress: Conversation between requester and virtual agent is in progress. • Closed Complete: Virtual agent ends the conversation. • Closed Abandoned: Requester ends the conversation before completing the conversation with the virtual agent. **Note:** There are different State Reasons for the Closed Complete and Closed Abandoned states, depending on whether you're using Virtual Agent only, Virtual Agent with Live Agent, or Live Agent only. For details on the State Reasons, see Reasons for Closed Complete and Closed Abandoned states.
State Reason	Detailed explanations (reasons) for the conversation states Closed Complete and Closed Abandoned. To learn more, see Reasons for Closed Complete and Closed Abandoned states.
Transcript	Log of the conversation between the requester and agents (virtual or live).
Type	Type of interaction record. Virtual Agent conversations are record type Chat.
Updated	Date and time that the conversation record was last updated.
Virtual agent	Flag that indicates whether the conversation is for Virtual Agent: true or false. A Virtual Agent conversation is flagged when a requester selects a conversation topic or when the topic discovery process starts the appropriate conversation.

Reasons for Closed Complete and Closed Abandoned states

Virtual Agent closes completed and abandoned conversations for various reasons, depending on whether the conversation is for Virtual Agent (VA) only, Virtual Agent with Live Agent (VA-LA), or Live Agent (LA).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

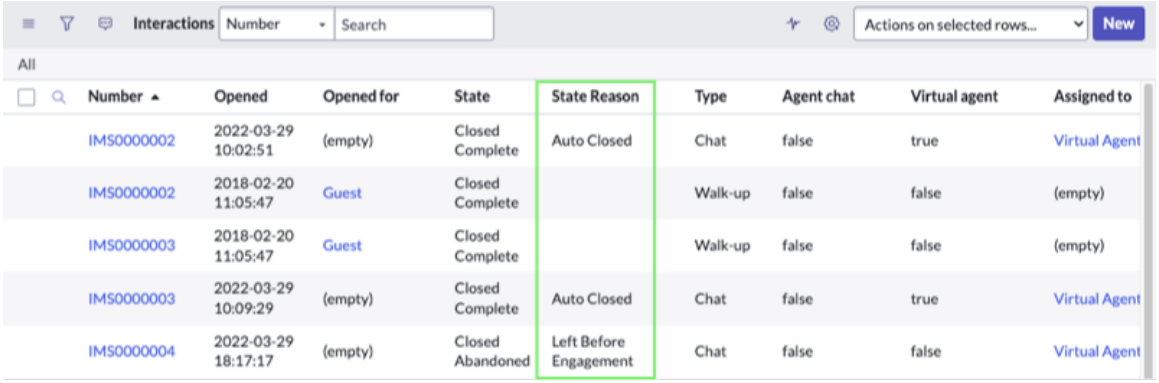Interactions table with State Reason column



Number	Opened	Opened for	State	State Reason	Type	Agent chat	Virtual agent	Assigned to
IMS0000002	2022-03-29 10:02:51	(empty)	Closed Complete	Auto Closed	Chat	false	true	Virtual Agent
IMS0000002	2018-02-20 11:05:47	Guest	Closed Complete		Walk-up	false	false	(empty)
IMS0000003	2018-02-20 11:05:47	Guest	Closed Complete		Walk-up	false	false	(empty)
IMS0000003	2022-03-29 10:09:29	(empty)	Closed Complete	Auto Closed	Chat	false	true	Virtual Agent
IMS0000004	2022-03-29 18:17:17	(empty)	Closed Abandoned	Left Before Engagement	Chat	false	false	Virtual Agent

The **State Reason** field provides details on the different ways in which a conversation ends. The following table describes the reasons and also the related message displayed for dashboard analytics. For details about how Virtual Agent and Agent Chat handle idle conversations and the corresponding default timeout periods, see Closing Virtual Agent and Agent Chat conversations.

State	State Reason	Virtual Agent	Virtual Agent & Live Agent or Live Agent only
Closed Abandoned	Left Before Engagement	Not applicable.	Requester chose to be routed to a live agent, but closed the conversation (selecting **+ End**) before an agent was assigned. Dashboard message: `User closed LA - before Agent engagement`
Closed Abandoned	No Activity	Requester opened a conversation, but didn't engage with the bot (for example, closed the browser) and didn't initiate topic discovery. The system closed the Virtual Agent idle conversation after the default timeout. • Virtual Agent idle chat timeout: Two hours (default) • Dashboard message: `System closed VA - user never engaged`	Requester chose to be routed to a live agent (not through pre-chat setup) but didn't engage with the agent. If the conversation timed out and the *`Time Out Abandoned VA Conversations`* scheduled job ran, the interaction state is Closed Abandoned with No Activity. Dashboard message: `System closed LA - before Agent engagement`
Closed Complete	User Ended	After engaging with the bot (requester entered at least one utterance during a conversation or completed a conversation), requester closed the conversation session by selecting **End**.	Requester started to chat with live agent but closed the chat client by selecting **End**. Dashboard message: `User closed LA - Clicked End/X`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

State	State Reason	Virtual Agent	Virtual Agent & Live Agent or Live Agent only
		Dashboard message: `User closed VA - Clicked End/X`	
Closed Complete	Auto Closed	Requester interacts with VA topic and completes the conversation. No live agent interaction. Dashboard message: `System closed VA - Auto Closed`	Not applicable.
Closed Complete	No User Response	Requester engaged with the bot (entered at least one utterance), but left without actively closing the conversation. The system closes the idle conversation after two hours (default). • Virtual Agent idle chat closed: Two hours • Dashboard message: `System closed VA - User no response`	Requester engaged with live agent but stopped and left the agent hanging (idle live chat). The system closes the idle live chat after six minutes (default). • Idle live chat closed: Six minutes • Dashboard message: `System closed LA - User no response`
Closed Complete	Topic Complete	Requester engaged with the bot in a topic but didn't respond to the Anything Else setup topic, or chose Yes to continue but didn't respond. The *`Time Out Abandoned VA Conversations`* job closes the interaction after the default timeout. • Virtual Agent idle chat closed: Two hours • Dashboard message: `System closed VA - Topic complete`	Not applicable.
Closed Complete	Left for search	Requester engaged with the bot (entered at least one utterance), but selected Search in the middle of the conversation and didn't return to the conversation. The system closes the conversation because of inactivity.	Not applicable.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

State	State Reason	Virtual Agent	Virtual Agent & Live Agent or Live Agent only
		Dashboard message: `System closed VA-Left with AI search`	
Closed Complete	Agent Ended	Not applicable.	After requester started a chat with a live agent, the agent actively closed the conversation by selecting **End Chat**. Dashboard message: `Agent closed LA - Clicked End/x`
Faulted	Error	A runtime exception occurred while processing a message.	Requester's conversation was closed due to a runtime error.

Detailed view of a Virtual Agent interaction record

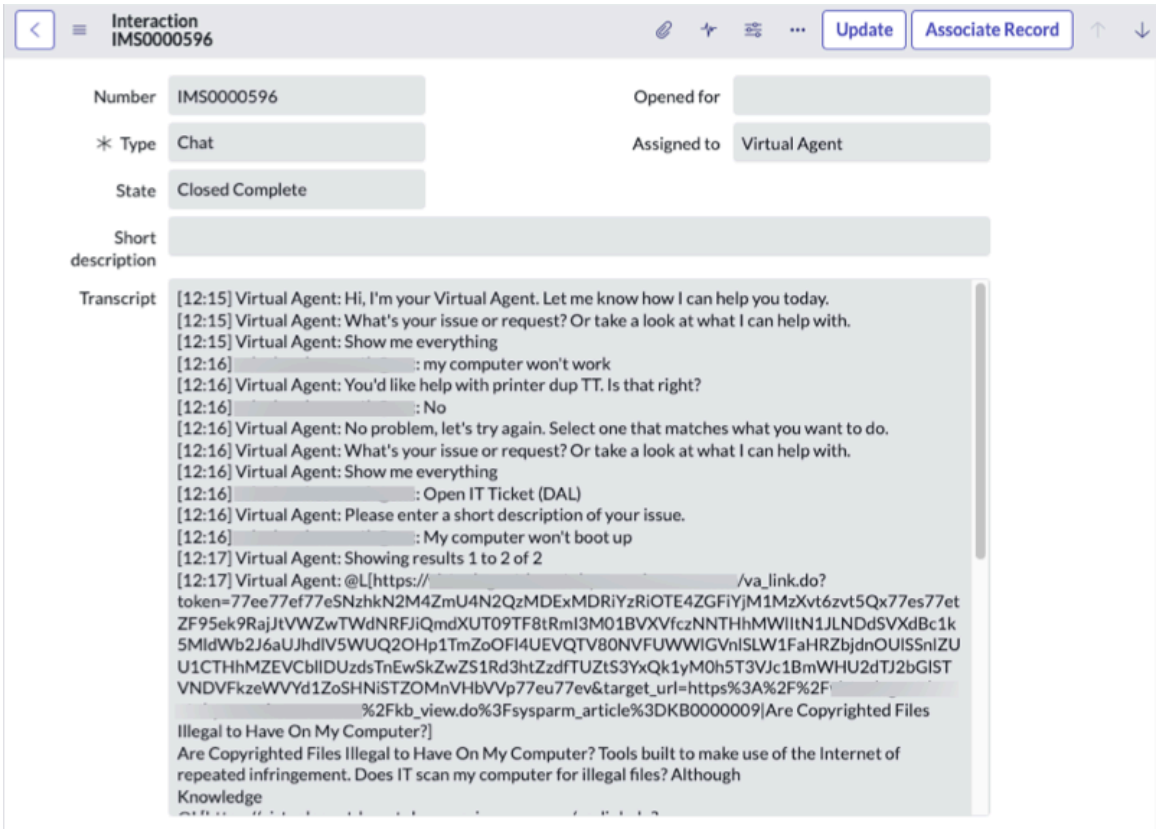
From the Interactions table, you can open a specific record to see additional details about the Virtual Agent interaction: a transcript of the conversation, related tasks, and interaction logs.

Note:
If a field is not visible, you can add it to the form view. For more information, see Configuring the form layout.

Conversation transcript


The transcript shows the dialog exchange between the agent (virtual or live) and requester, as well as the time stamp for each dialog turn.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Related Tasks

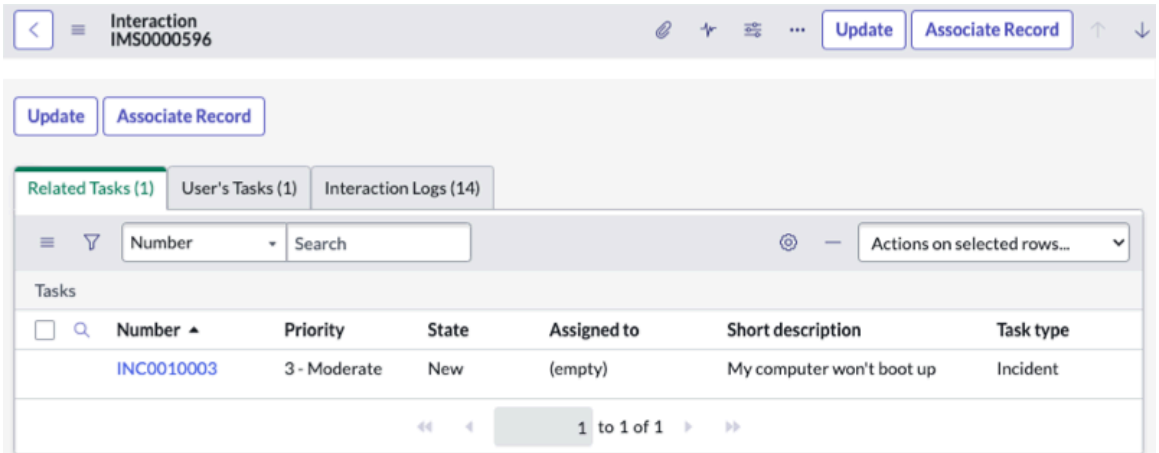
Any cases, incidents, or requests created or updated during the conversation are automatically attached to the interaction record as a Related Task. To ensure that these tasks are included with the interaction record, design your conversation topics using certain Virtual Agent Designer utilities and the system method *`vaSystem.attachRecordToConversation`*. For details, see Topic design considerations below.



Interaction Logs

The **Interaction Logs** tab lists all the topics that run in a conversation, including the setup topics and the topics executed by topic discovery or by user selection. Each topic element is assigned a number that indicates the sequential order in which the topics run.

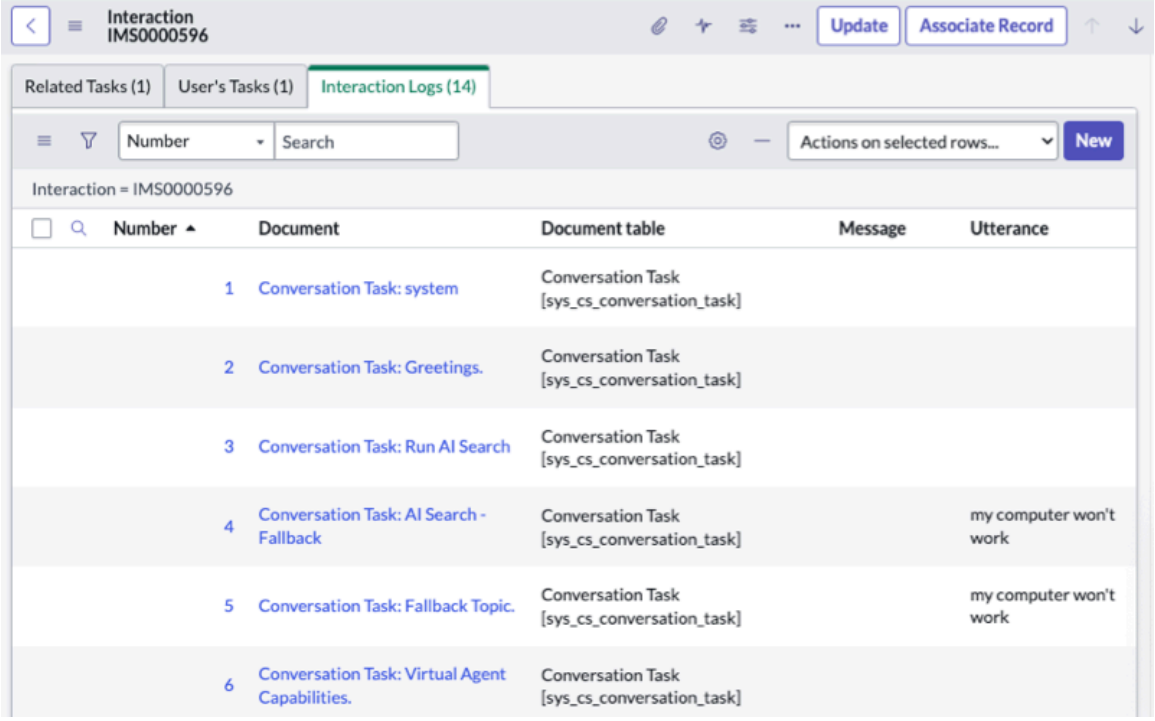© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Security considerations

Information in conversation transcripts is viewable to all users. If you need to control access to records containing sensitive information, you can use scoped access control lists (ACLs) and lock scripted access to those records by using the Restricted Caller Access (RCA) feature. For details, see Set application scope, application resource, and event access and Manage Restricted Caller Access.

Topic design considerations

If your Virtual Agent conversations create or update incidents, cases, or requests, consider designing your topics with the following Virtual Agent Designer utilities and system method:

- Action utility to create or update incidents or cases
- Lookup utility to view information
- System method `vaSystem.attachRecordToConversation(String tableName, String sysId)` to attach the task to the interaction record

Use these utilities and system method so that incidents, cases, or requests created during a Virtual Agent conversation are included in the **Related Tasks** list of the interaction record.

Note:
Records created or updated using the Script Action utility are not captured as related tasks in the interaction record.

Virtual Agent scripts

Use ServiceNow® Virtual Agent script methods and variables to write chat scripts, such as response, trigger, and flow scripts. Variables can also provide context for your live support topics and conversations.

Virtual Agent scripts can provide context for topics, such as retaining information about a user or a user's input. You can use this information to personalize a conversation, such as to present a scripted greeting or confirmation. Scripts can also specify certain actions to be performed on

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

information that was obtained during a conversation. These actions can be used for creating or updating ServiceNow records.

Scripts run on the server in the scope in which a topic is defined. All scope protections apply. If you're developing a conversation for a scoped application, you must use the scoped API. You can use most APIs that run in server scripts.

User input and ServiceNow record variables

In Virtual Agent, the following variables are available for use in scripts that you create for a topic.

User input variables

When you add an input control to a topic, the system automatically creates a variable to store the user input (a string, Boolean value, and so on.). The syntax is `vaInputs.myvar` where `myvar` is the name that you assigned to the input node.

For example, a text input prompt with the name `First prompt` has a system-defined variable called `vaInputs.first_prompt`. Spaces in the name are replaced with an underscore character, and uppercase characters are changed to lowercase.

ServiceNow record variables

If you create a script for a topic that queries a ServiceNow table, then the record object (GlideRecord) returned is automatically available for use in the topic. The variable syntax is `vaInputs.myvar` where `myvar` is the record object. For details on querying ServiceNow tables to return a record object, see Querying tables in script.

Use dot-walking in variables that contain a ServiceNow record to specify a particular field in the table. The syntax is `vaInputs.myvar.field`. For details on dot-walking within a script, see Dot-walking examples.

Accessing user input and ServiceNow record variables

Use *`vaInputs`* objects to access ServiceNow record variables in scripts. For example, the `vaInputs.myvar == "expected value"`. To access values from user inputs that are not records, use `vaInputs.myvar.getValue()`.

The following methods are available.

vaInputs methods

Method	Description
`vaInputs.myvar == "expected value"`	Evaluates whether `myvar` matches an expec **Note:** Values for user input variables are assign user input controls. These values can't b your scripts.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

vaInputs methods (continued)


Method	Description
	• The Yokohama release supports additional For more information, see Input data types Agent topics. • By default, the user variable is available an reference to the sys_user record for the use
`vaInputs.myvar.getValue();`	Returns the value.
`vaInputs.myvar.getDisplayValue();`	Returns the display value if the stored value i ServiceNow record. For variables that contain records, this method returns the display value by the display field for that table. The following example shows the label and c for a user input. In this case, `myVar.getVa` would return a value of 10, 20, or 30, while `myVar.getDisplayValue()` would retu Orange, or Pear. **Example choice list** Choice List Setting Label ⓘ Value ⓘ Apple 10 Orange 20 Pear 30
`vaInputs.myvar.getDefaultValue();`	Returns the default value in a confirmation m
`vaInputs.myvar.getDefaultDisplayValue();`	Returns the display value for the default value confirmation message.
`vaInputs.myvar.unbindEntity();`	Removes the value of input variables that the prediction service slot-filled with extracted en (unbinds it from the initial input value). For example, if the user decides to change th a confirmation prompt, you can unbind the en from the input variable. The user will then be again when they loop back to the correspond node. **Note:** NLU must be enabled on the topic. In the Agent Designer, select the **Properties** ta NLU. For information about defining NLU Entities.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Script variables

You can define script variables for information that is not stored in ServiceNow tables but that can be used to share that information elsewhere in a topic. Script variables are similar to workflow scratchpad variables that store primitives such as integers, Boolean values, or strings. A string value can be either a static or dynamic scripted value. Use the Variables sidebar to define script variables for a topic in Virtual Agent Designer.

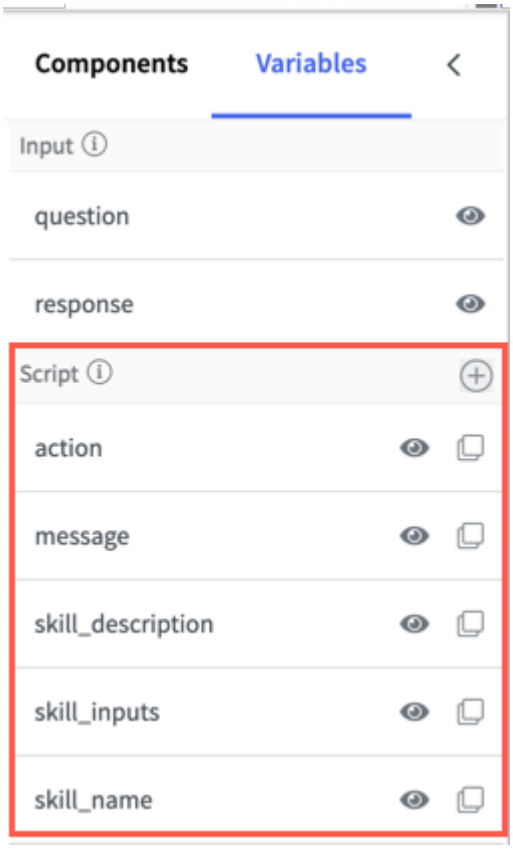Variables sidebar



Note:
Script variables are intended for use by topic authors with advanced scripting skills.

The variable syntax is `vaVars.myvar`, where `myvar` is the name that you assign to the variable. For example, you can assign a value to the variable using `vaVars.myvar = value;`. Unlike user input variables, script variables can be assigned values in a script.

For information about defining a script variable in a topic, see Define script variables for a topic.

Context variables

Context variables work in a global scope whereas system variables work within the scope of the topic. You can use context variables in system parameters within the web client URL. These variables can be used anywhere in the conversation using the `vaContext` object. Use these options to create links to Virtual Agent with predefined variables.

The following example link contains a parameter, `sysparm_city=milan`. In addition to opening a Virtual Agent conversation, using this link creates a variable called `city` with a value of `milan`. This variable can be accessed in a script using `vaContext.city`.

```
https://<instance>.service-now.com/$sn-va-web-client-app.do?sysparm_city=milan
```

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

A number of Live Agent variables are available for use in topic scripts. These variables include the following:

- *application*
- *language*
- *portal*
- *search_text*
- *short_description*

The variable syntax is `vaContext.LiveAgent_myvar`, where `myvar` is one of the available live agent context variables. Access the variable using `vaContext.LiveAgent_myvar = value;`.

To use Live Agent variables in topic scripts, open the topic in Virtual Agent Designer. On the **Properties** tab, select the pencil icon next to **Live Agent Variables** to add them to the topic.

For information about live agent context variables that are included with Virtual Agent, see Live agent chat context variables.

vaVars methods

Method	Description
vaVars.global_utterance	Updates when skill picker renders and an utterance is typed in.

vaSystem methods

You can use methods in the vaSystem object to do various tasks. Some of these tasks include the following:

- Attach images to records.
- Access the search string that was used to find the current topic.
- Verify that a live agent is available to receive a conversation.
- Connect the user to a live agent.

Note:
The use of undocumented system methods is not recommended, as they are unsupported and may be discontinued or altered at any time without prior notice.

Methods used in Virtual Agent topic scripts

Method	Description
vaSystem.applyLinkTemplate(String sysId, String tableName, String actionName)	Creates an external link that is
vaSystem.attachRecordToConversation(String tableName, String sysId)	Attach ServiceNow records to t list in a Virtual Agent interaction records are updated or created Agent conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Methods used in Virtual Agent topic scripts (continued)

Method	Description
`vaSystem.attachToRecord(String mediaId, String tableName, String sysId)`	Attach an uploaded image to a The method uses the following • `mediaId`: The path for the i be attached. To use an image by the customer, use `getVa` an image input variable. For e `vaInputs.image_input` • `tableName`: A string that co the table. • `sysId`: The sys_id of the rec
`vaSystem.connectToAgent()`	Connects the customer to a live information on this method, se Agent conversations to a live a
`vaSystem.didConnectToLiveAgent()`	Returns a Boolean (true or false current conversation was conn
`vaSystem.getClosingMessage()`	Returns a closing message for conversation from system prop *com.glide.cs.general.* (The message is different for th apps such as Microsoft Teams
`vaSystem.getConversationId()`	Returns the conversation ID of conversation.
`vaSystem.getGreetingMessage()`	Returns a greeting message fro the key "Hi, I'm your Virtual Age can help you today."
`vaSystem.getInteractionSysId()`	Returns the interaction ID of th conversation.
`vaSystem.getSearchText()`	Returns the last utterance type
`vaSystem.getTopicSelectionMessage()`	Returns a UI message with the issue or request? Or take a look with." (The message is different messaging apps such as Micro Slack). This method is returned property *com.glide.cs.to*
`vaSystem.getTranscript()`	Gets the conversation transcrip
`vaSystem.isLiveAgentAvailable()`	Checks whether a live agent is receive a conversation that is t from the bot. To transfer a conv a live agent, call this method be `vaSystem.connectToAge`
`vaSystem.isLiveAgentConfigured()`	Returns whether live chat is en
`vaSystem.resetAllEntities()`	Resets all entities logged in the
`vaSystem.sendBatchedMessages()`	Immediately sends queued me

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Methods used in Virtual Agent topic scripts (continued)

Method	Description
`vaSystem.sendSeparatorMessage()`	Sends a separator message lin closing message from `getClo`
`vaSystem.sendSystemMessage(String message, Boolean showAvatar)`	Sends a system message and message from `getGreeting`
`vaSystem.sendTopicPickerControl(String topicSelectionMessage, String topicPickerButtonLabel)`	Sends a topic picker control wi for the message and "Show me label.
`vaSystem.sendSkillPickerControl(skillSelectionMessage, args)`	Sends the skill picker control to The `skillSelectionMess` displayed before showing the parameter allows additional co • `hideSkillDetails` hide message. It defaults to `fals` • `hidePromotedTopics` hi from the skill picker. It defaul • `hideShowMeEverythin` Me Everything" button from t defaults to `false`. • `showNoSkillsConfigu` "No Skills Configured" messa applicable skills. It defaults t • `appendPromotedSkills` bulleted list of promoted skill message. It defaults to `true`
`vaSystem.switchTopicByName()`	Enables the user to jump from conversation topic to the speci The **X** button is available, so th the conversation. After the topi resumes the global topic. Whe ends, the user can select **Click conversation** at the bottom of restart the topic. The optional *resumeBehavi* specifies how the conversation follows: • If *resumeBehavior=res* resumes the calling topic. • If *resumeBehavior=ski* the calling topic. If *resumeBehavior* is not sp behavior for the instance is use

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Methods used in Virtual Agent topic scripts (continued)

Method	Description
`vaSystem.switchTopicById(sysid)`	This method is the sysid of *sy* and enables the user to jump f conversation topic to the speci **X** button is available, so that th the conversation. After the topi resumes the global topic. Whe ends, the user can select **Click conversation** at the bottom of restart the topic. The optional *resumeBehavi* specifies how the conversation follows: • If *resumeBehavior=res* resumes the calling topic. • If *resumeBehavior=ski* the calling topic. If *resumeBehavior* is not sp behavior for the instance is use
`vaSystem.topicDiscovery(String searchTextOverride, Boolean keywordImpl)`	Performs topic discovery base *searchTextOverride* para uses the following parameters: • `searchTextOverride`: A run topic discovery. • `keywordImpl`: A Boolean whether to use keywords.

Method that can be used outside Virtual Agent topics

Method	Description
`sn_cs.VASystemObject.getTranscriptById(<conversation sysId>)`	Gets the transcript for the current Virtual Agent conversation.

Input data types in Virtual Agent topics

You can define inputs of commonly used Glide Virtual Agent (com.glide.cs.chatbot) data types in Virtual Agent Designer without writing a script. Define the input data type on the Start node of a custom control or topic block.

Data types in Virtual Agent Designer

The data type designation allows Virtual Agent to perform secondary validation on NLU predicted values. For example, if your choice list has red, white, and blue, but the NLU prediction service returns green, the input won't be slot-filled because that wasn't a valid choice.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

When you specify an input with a data type on a calling topic, you can use the data pill picker to specify information collected from the user or previously looked up in a custom control or topic block.


Data type	Description
String	Alphanumeric text. The value uses JavaScript data conventions.
Boolean	Boolean value of true or false (yes or no).
Reference	Table record by sys_id. Select a ServiceNow table in the **Table** field. You can define conditions for the returned record.
Date/Time	Date and time values.
Array.String	Sequence of alphanumeric text values. To limit the number of strings that authors can specify, use the **Max Number of Rows** field.
Array.Datetime	Sequence of date and time values. To limit the number of dates that authors can specify, use the **Max Number of Rows** field. Click **+** to specify more than one default value.
Array.Reference	Sequence of table records by sys_id. Select a ServiceNow table in the **Table** field. You can define conditions for the returned record. To limit the number of records that authors can specify, use the **Max Number of Rows** field. **Note:** The *`Array.Reference`* input data type in Virtual Agent Designer corresponds to the *`List.[Table]`* input data type in Workflow Studio. For more information, see Action input and output data types.
Array.Choice	Sequence of choice list values for a specific choice field. For example, `printer`, `computer`, and `monitor`.

Note:
Duplicate default values are not allowed with array data types.

Example data type definition

This User Name Array.Reference input variable limits the number of records to 5. It references the sys_user table with the condition that all names must start with **a**.

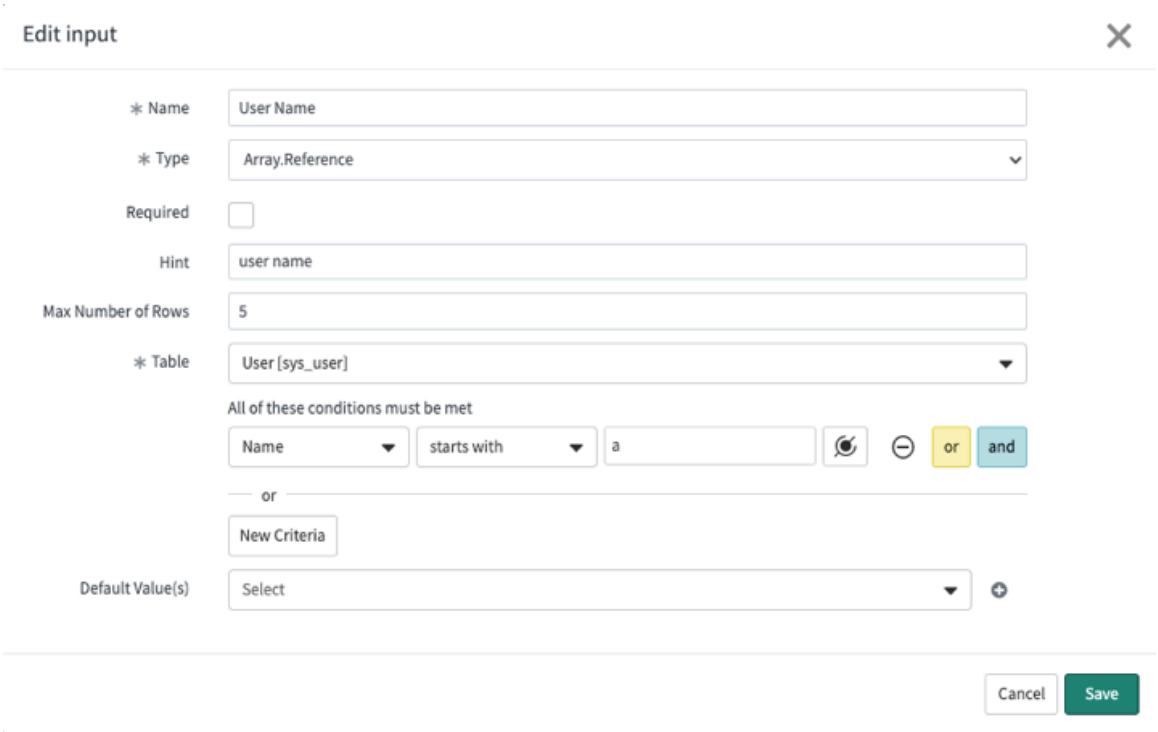© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



NLU system entities

Use globally defined NLU entities to identify system information that Virtual Agent can extract from the conversation. You can define entities as "nodeless" input variables for a topic. These variables can be slot-filled from NLU service provider predictions or provided outside of the scope of the topic.

System entities are enabled in NLU models by default. You can view them on the model **Entities** tab in NLU Workbench.

GLOBAL.DATE system entity

The DAY SubType returns a date string that is accurate to a specific date.

GLOBAL.DATE SubType = DAY usage

Usage	Example
Format	YYYY-MM-DD
Regular expression	\\d\\d\\d\\d-\\d\\d-\\d\\d
Input example	Mr. Smith left Friday, February 4, 2019.
Normalized value	2019-02-04

Code example	<pre>{
	"name": "DATE",
	"value": "...",
	"score": 1.0,
	"normalization": "2019-02-04"
	}</pre>

The WEEK SubType returns a date string of a specific week of a year.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.DATE SubType = WEEK usage

Usage	Example
Format	YYYY'W'WW
Regular expression	\\d\\d\\d\\d\\dW\\d\\d
Input example	Mr. Smith left the third week of 1999.
Normalized value	1999W3

Code example	{
	"name": "entity:GLOBAL.DATE",
	"value": "...",
	"score": 1.0,
	"normalization": {"type": "GLOBAL.DATE", "subType":
	"WEEK", "value":"1999W3"}
	}

The MONTH SubType returns a date string of a specific month of a year.

GLOBAL.DATE SubType = MONTH usage

Usage	Example
Format	YYYY'M'MM
Regular expression	\\d\\d\\d\\dM\\d\\d
Input example	Mr. Smith left in February of 1999.
Normalized value	1999M02

Code example	{
	"name": "entity:GLOBAL.DATE",
	"value": "...",
	"score": 1.0,
	"normalization": {"type": "GLOBAL.DATE", "subType":
	"MONTH", "value": "1999M02"}
	}

The YEAR SubType returns a date string of a specific year.

GLOBAL.DATE SubType = YEAR usage

Usage	Example
Format	YYYY
Regular expression	\\d\\d\\d\\d

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.DATE SubType = YEAR usage (continued)

Usage	Example
Input example	Mr. Smith left in 1999.
Normalized value	1999

Code example	{
	"name": "entity:GLOBAL.DATE",
	"value": "...",
	"score": 1.0,
	"normalization": {"type": "GLOBAL.DATE", "subType":
	"YEAR", "value": "1999"}
	}

The SEASON SubType returns a date string of a specific season of the year.

GLOBAL.DATE SubType = SEASON usage

Usage	Example
Format	One of the following: • **Winter**: YYYYWI • **Spring**: YYYYSP • **Summer**: YYYYSU • **Fall**: YYYYFA
Regular expression	One of the following: • **Winter**: \\d\\d\\d\\dWI • **Spring**: \\d\\d\\d\\dSP • **Summer**: \\d\\d\\d\\dSU • **Fall**: \\d\\d\\d\\dFA
Input example	Mr. Smith left in the fall of 1999.
Normalized value	1999FA

Code example	{
	"name": "entity:GLOBAL.DATE",
	"value": "...",
	"score": 1.0,
	"normalization": {"type": "GLOBAL.DATE", "subType":
	"SEASON", "value": "1999FA"}
	}

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.TIME system entity

The TIME SubType returns a time string that is accurate to an hour and a minute.

GLOBAL.TIME SubType = TIME usage

Usage	Example
Format	'T'HH:mm
Regular expression	T\\d\\d:\\d\\d
Input example	Mr. Smith left at ten minutes to three.
Normalized value	T02:50

Code example	{
	"name": "entity:GLOBAL.TIME",
	"value": "...",
	"score": 1.0,
	"normalization": {"type": "GLOBAL.TIME","subType":
	"TIME", "value": "T02:50"}
	}

The PARTSOFDAY SubType returns a time string that specifies parts of the day.

GLOBAL.TIME SubType = PARTSOFDAY usage

Usage	Example
Format	One of the following: • **Morning**: TMO • **Afternoon**: TAF • **Evening**: TEV • **Night**: TNI
Regular expression	One of the following: • **Morning**: TMO • **Afternoon**: TAF • **Evening**: TEV • **Night**: TNI
Input example	Mr. Smith left in the morning.
Normalized value	TMO
Code example	{ "name": "entity:GLOBAL.TIME",

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.TIME SubType = PARTSOFDAY usage (continued)

Usage	Example
	"value": "...", "score": 1.0, "normalization": {"type": "GLOBAL.TIME", "subType": "PARTSOFDAY", "value": "TMO"} }

GLOBAL.DATE_TIME system entity

The DATE_TIME SubType returns a date string that is accurate to a specific date and time string that is accurate to an hour and a minute.

GLOBAL.DATE_TIME SubType = DATETIME usage

Usage	Example
Format	YYYY-MM-DD'T'HH:mm
Regular expression	\\d\\d\\d\\d-\\d\\d-\\d\\dT\\d\\d:\\d\\d
Input example	Mr. Smith leaves on October 31st at 5:00 p.m.
Normalized value	2022-10-31T17:00

Code example	{
	"name": "DATE_TIME",
	"value": "October 31st at 5:00 p.m",
	"normalization": "2022-10-31T17:00","confidence":
	"1"
	}

GLOBAL.DURATION system entity

This entity returns a duration string that specifies the duration of the activity.

GLOBAL.DURATION usage

Usage	Example
Format	One of the following: • **Second**: 's'ss • **Minute**: 'm'mm • **Hour**: 'h'hh • **Day**: 'D'DD • **Week**: 'W'WW • **Month**: 'M'MM • **Year**: 'Y'YY

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.DURATION usage (continued)

Usage	Example
Regular expression	One of the following: • **Second**: s\\d\\d • **Minute**: m\\d\\d • **Hour**: h\\d\\d • **Day**: D\\d\\d • **Week**: W\\d\\d • **Month**: M\\d\\d • **Year**: Y\\d\\d
Input example	Mr. Smith stayed in Boston for 48 hours.
Normalized value	h48
Code example	`{ "name": "entity:GLOBAL.DURATION", "value": "...", "score": 1.0, "normalization": {"type": "GLOBAL.DURATION", "value": "h48"} }`

GLOBAL.LOCATION system entity

This entity returns a location string.

GLOBAL.LOCATION usage

Usage	Example
Format	String value. Example: `Santa Clara`
Regular expression	Not applicable.
Input example	Mr. Smith works in Santa Clara.
Normalized value	Santa Clara
Code example	`{ "name": "entity:GLOBAL.LOCATION", "value": "...", "score": 1.0, "normalization": {"type": "GLOBAL.LOCATION", "value":"Santa Clara"} }`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.PERSON system entity

This entity returns a name string.

Usage	Example
Format	String value. Example: `Joe Smith`
Regular expression	Not applicable.
Input example	Joe Smith works in Santa Clara.
Normalized value	Joe Smith
Code example	`{ "name": "entity:GLOBAL.PERSON", "value": "...", "score": 1.0, "normalization": {"type": "GLOBAL.PERSON", "value":"Joe Smith"} }`

GLOBAL.MONEY system entity

This entity returns a currency string.

GLOBAL.MONEY usage

Usage	Example
Format	String value. Example: USD 2000
Regular expression	Not applicable.
Input example	Show me laptops for less than $2000.
Normalized value	USD 2000 **Note:** The normalized value uses the three-letter ISO 3166 country code of the source currency.
Code example	`{ "name": "entity:GLOBAL.MONEY", "value": "...", "score": 1.0, "normalization": {"type": "GLOBAL.MONEY", "value":"2000", “currency”:”USD”} }`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

GLOBAL.NUMBER system entity

This entity returns a number.

Usage	Example
Format	String value. Example: 5 . 0
Regular expression	Not applicable.
Input example	I want to see the previous 5 transactions from my account.
Normalized value	5.0

Code example	{
	"name": "entity:GLOBAL.NUMBER",
	"value": "...",
	"score": 1.0,
	"normalization": {"numericValue":"5",
	“normalizedValue”: “5”}
	}

GLOBAL.SOFTWARE

Returns a software string.

Usage	Example
Format	String value. Example: `Java`
Regular expression	Not applicable.
Input example	How do I install Java?
Normalized value	Java

Code example	{
	"name": "entity:GLOBAL.SOFTWARE",
	"value": "Java",
	"score": 0.99930537,
	"normalization":
	{"type":"entity:GLOBAL.SOFTWARE",
	"subType":"SOFTWARE",
	"value":"Java"}
	}

GLOBAL.HARDWARE

Returns a hardware string.

Usage	Example
Format	String value. Example: `printer`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Usage	Example
Regular expression	Not applicable.
Input example	How do I order a printer?
Normalized value	printer

Code example	<pre>{
	  "name": "entity:GLOBAL.HARDWARE",
	  "value": "printer",
	  "score": 1.0,
	  "normalization":
	 {"type":"entity:GLOBAL.HARDWARE",
	  "subType":"HARDWARE",
	  "value":"printer"}
	}</pre>

Example NLU prediction result using Software system entity


```
{"status":"success",
   "response":{
      "utterance":"How do I install Java?",
      "intents":[
         {
            "intentName":"test intent",

 "nluModelName":"ml_x_snc_global_global_268a97a9dbd23c107906265d
1396191a",
            "score":0.90401393,
            "intents":[

            ],
            "entities":[
               {
                  "name":"entity:GLOBAL.SOFTWARE",
                  "value":"Java",
                  "score":0.99930537,
                  "normalization":{
                     "type":"entity:GLOBAL.SOFTWARE",
                     "subType":"SOFTWARE",
                     "value":"Java"
                  },
                  "startingPosition":-1
               }
            ]
         }
      ],
      "properties":{

 "all:ml_x_snc_global_global_268a97a9dbd23c107906265d1396191a":"
0.55",
         "entity:all":"0.01",
         "inference.sspace.time":"4",
         "inference.time":"33",
         "intent:all":"0.01",
```


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

```
        "nluPlatformLanguage":"en",
        "nluPlatformVersion":"rome.0"
      }
   }
}
```

Example NLU prediction result using DATE system entity

```
{
    "utterance": "We should meet next Sunday at Starbucks.",
    "intents": [
        {
            "intentName": "intent:Desire.Desire",
            "score": 0.83452,
            "entities": []
        },
        {
            "intentName": "intent:Meeting.MeetRequest",
            "score": 0.8919042,
            "entities": [
                {
                    "entityName":
 "entity:Meeting.MeetRequest.Where",
                    "value": "Starbucks",
                    "score": 1
                },
     {
                    "entityName": "entity:GLOBAL.DATE",
                    "value": "Sunday",
                    "normalization": { "type": "DATE",
                        "subType": "DAY",
                        "value": "1999-10-01"
                     },
                    "score": 0.87
                }
            ]
        }
    ]
}
```

Virtual Agent URL parameters

Virtual Agent provides various system parameters that admins can add to an instance URL to control how page content is rendered.

Virtual Agent URL structure

You can control the page rendered for an instance by adding URL parameters to the instance URL, which is `https://<instancename>.service-now.com`.

System parameters for Virtual Agent chat widget

The Virtual Agent chat widget is supported for use in portals or embedded in third-party pages. The following system parameters control the conversation content rendered in the Virtual Agent chat widget.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Parameter	Description	Example
sysparm_branding_key	Applies a chat branding configuration to the web chat client. Value: branding key for the configuration	• Apply the branding configuration to a destination page:`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_branding_key=<branding_key` • Apply the branding configuration to an embedded chat widget: `https://<instance_name>.service-now.com/$sn-va-web-client-app._embed.do?sysparm_branding_key=<branding_key`
sysparm_default_topic	Sets the default topic on launch via topic `sys_ID`.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_default_topic=<topic_sys_id`
sysparm_domain_id	Restricts the chat to the specified sys ID for a domain.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_domain_id=<domain_sys_id>`
sysparm_live_agent_only	Takes user directly to a live agent, if available.	`https://<instance_name>.service-now.com/$sn-va-web-client-app._embed.do?sysparm_live_agent_only=true`
sysparm_load_active_only	Loads the current active conversation. Values: • true: Loads only the active conversation • false: Doesn't load active conversations **Note:** If the sysparm_skip_load_history and sysparm_load_active_only parameters are both set to true, the existing sysparm_skip_load_history parameter takes precedence.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_load_active_only=true`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Parameter	Description	Example
sysparm_search_text	Sets the search text for the conversation.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_search_text=<search_text>` For example, <search_text> is request&laptop.
sysparm_skip_load_history	Skips the previous message history and starts a new conversation. Values: • true: Doesn't load message history • false: Loads message history **Note:** If the sysparm_skip_load_history parameter is set to false and the sysparm_load_active_only is set to true, the sysparm_load_active_only loads the current active conversation.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_skip_load_history=true`
sysparm_preview_mode	Displays the conversation in test mode.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_preview_mode=true`
sysparm_requester_session_language	Specifies the requester's language for the conversation session when Dynamic Translation for Virtual Agent is installed and configured.	`https://<instance_name>.service-now.com/$sn-va-web-client-app.do?sysparm_requester_session_language=<two-letter language code>`

Latency feedback in Virtual Agent

The *com.glide.cs.message.processing.enabled* system property notifies requesters whenever the generative AI large language model (LLM) is processing their request in the Virtual Agent chat widget and Now Assist panel.

Latency feedback messages

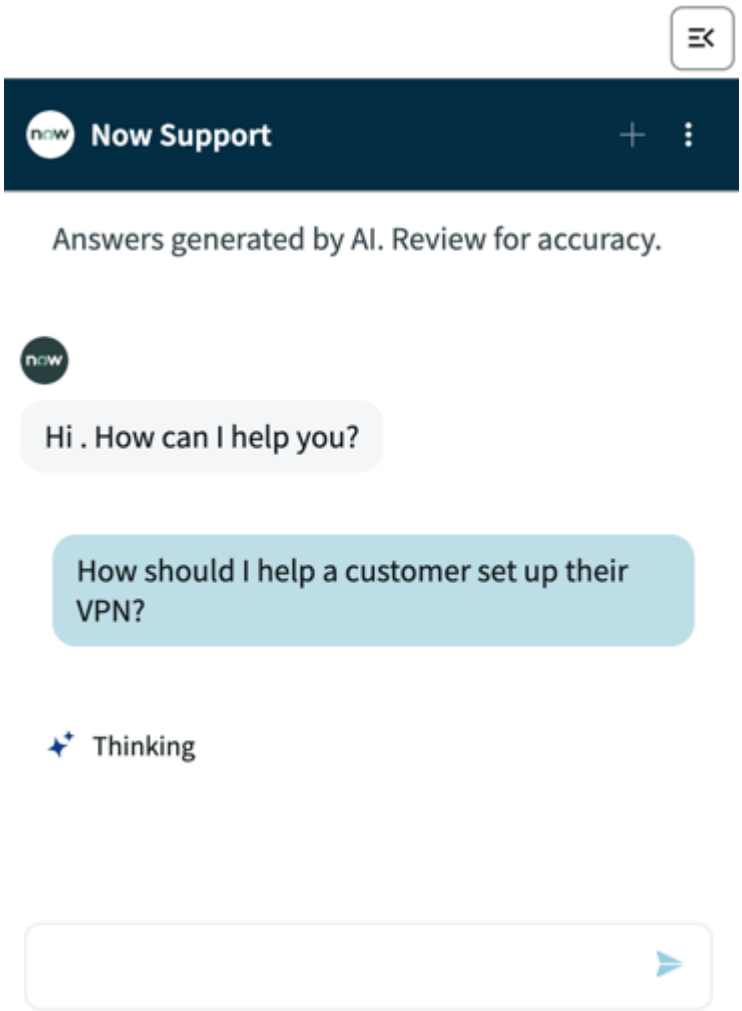
The *com.glide.cs.message.processing.enabled* property is off by default, but can be turned on in the System Properties [sys_properties] table. After turning on this system property, users receive a temporary response to indicate that the LLM call is running and that their request is being processed. One of the following messages appears to users:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Looking into your request...
- Reviewing key details...
- Gathering the needed info...

The latency feedback messages can't be customized and disappears after the LLM generates a response.

Example of a latency feedback message



Now Assist in Virtual Agent

Use generative AI skills in your conversational experiences. Now Assist in Virtual Agent uses large language models (LLMs) to create a natural-language conversational experience that can improve the success of your self-service workflows.

Get started

For an introduction to building a Virtual Agent with Now Assist, watch this video.

https://player.vimeo.com/video/995581833?h=177e4bc9f8&badge=0&autopause=0&player_id=0&app_id=58479

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Explore	Configure	Use
Learn about the generative AI skills available in Now Assist in Virtual Agent.	Activate Now Assist in Virtual Agent and configure generative AI skills.	Learn about the requester conversational experience.
Analyze Monitor the performance of Now Assist in Virtual Agent.	Reference Get details about user input and bot responses supported by Now Assist in Virtual Agent.	

Important:

- Not all model providers are available for customers with in-country SKUs, and some Now Assist products/features are currently unavailable for in-country customers. For more information, see the KB1584492 article in the Now Support Knowledge Base. Be sure to check for model provider availability updates in future releases.
- Some Now Assist products/features are currently unavailable for customers in the FedRAMP, NSC DOD IL5, or Australia IRAP-Protected data centers, self-hosted customers, or in other restricted environments. For more information, see the KB0743854 article in the Now Support Knowledge Base . Be sure to check for availability updates in future releases.
- Some Now Assist products/features are currently available only for customers in some regions. Be sure to check for availability updates in future releases.
- Some AI products and skills are not available in Regulated Markets. For more information, see KB2593939: Regulated Markets AI Products/Skills Not Available. Be sure to check for availability updates in future releases.

Troubleshoot and get help

- Virtual Agent community forum
- Search the Known Error Portal for known error articles
- Contact Customer Service and Support

AI limitations

This application uses artificial intelligence (AI) and machine learning, which are rapidly evolving fields of study that generate predictions based on patterns in data. As a result, this application may not always produce accurate, complete, or appropriate information. Furthermore, there is no guarantee that this

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

application has been fully trained or tested for your use case. To mitigate these issues, it is your responsibility to test and evaluate your use of this application for accuracy, harm, and appropriateness for your use case, employ human oversight of output, and refrain from relying solely on AI-generated outputs for decision-making purposes. This is especially important if you choose to deploy this application in areas with consequential impacts such as healthcare, finance, legal, employment, security, or infrastructure. You agree to abide by ServiceNow's AI Acceptable Use Policy, which may be updated by ServiceNow.

Data processing

This application requires data to be transferred from ServiceNow customers' individual instances to a centralized ServiceNow environment, which may be located in a different data center region from the one where your instance is, and potentially to a third-party cloud provider, such as Microsoft Azure. This data is handled per ServiceNow's internal policies and procedures, including our policies available through our CORE Compliance Portal.

Data collection

ServiceNow collects and uses the inputs, outputs, and edits to outputs of this application to develop and improve ServiceNow technologies including ServiceNow models and AI products. Customers can opt out of future data collection at any time, as described in the Now Assist Opt-Out page.

For more information, see the Now Assist documentation.

Exploring Now Assist in Virtual Agent

Now Assist in Virtual Agent uses large language models (LLMs) and generative AI skills to improve deflection rates and reduce the amount of time-consuming work that Natural Language Understanding (NLU) topic discovery requires.

Now Assist capabilities bring generative AI to Virtual Agent. Using LLMs for topic discovery simplifies the amount of setup and configuration required for Virtual Agent. Topics that use keyword and Natural Language Understanding (NLU) discovery often require months of development and the involvement of dedicated subject matter experts. Unusual issues or questions may lead a user to contact a live agent instead. You can continue to use your existing NLU topics and migrate them into new LLM topics using the topic migration feature within Virtual Agent Designer. For more information on topic migration, see Migrating NLU/keyword Virtual Agent topics to LLM topics.

Use the guided setup to configure Now Assist in Virtual Agent in a few minutes. No expertise is necessary to launch the experience. For more information, see Configuring assistants overview.

Now Assist in Virtual Agent is available through portals on the chat widget, the mobile app, and Microsoft Teams.

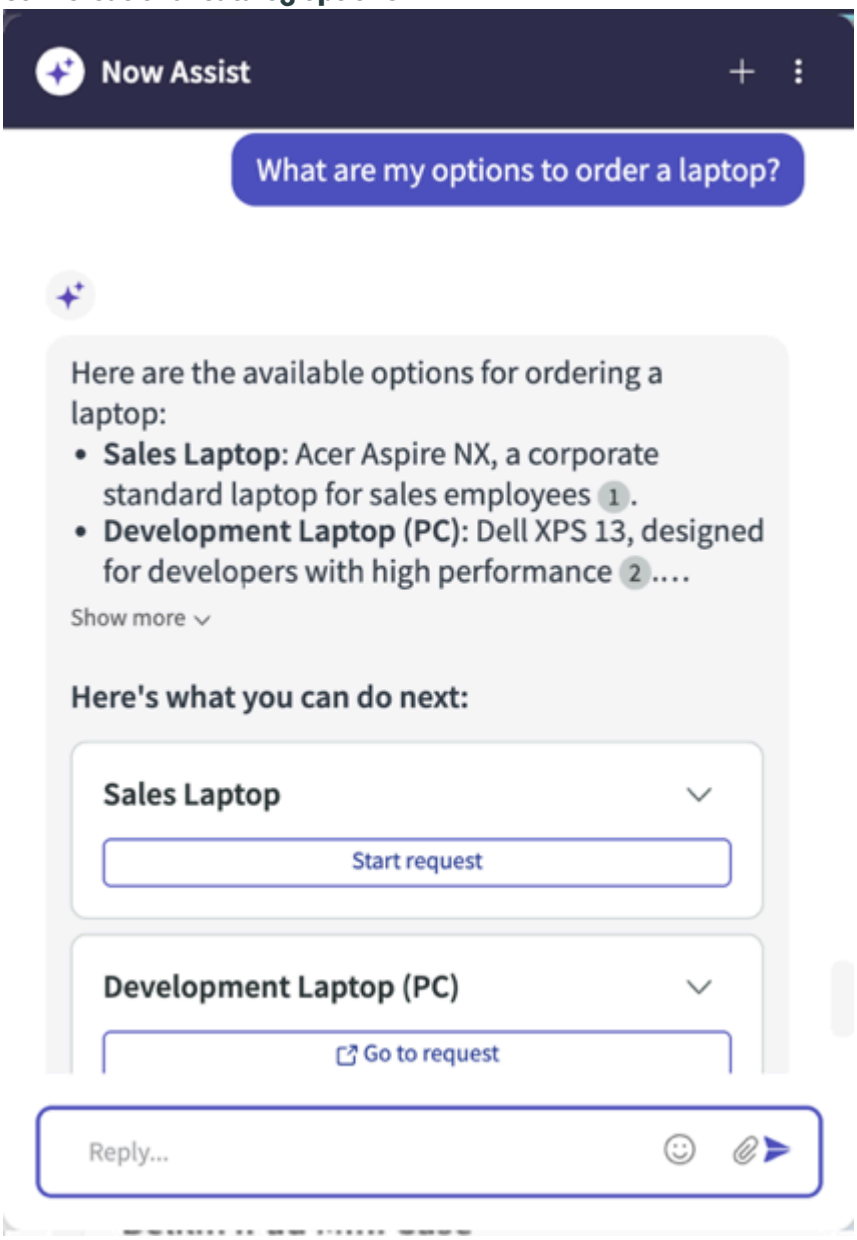
Now Assist skills in Virtual Agent

Now Assist skills in Virtual Agent enhance the user experience by combining AI Search with chat. These skills can increase issue resolution in Virtual Agent and reduce deflections to a live agent.

The following figure shows how the requester uses natural language rather than keywords in the chat. Now LLM Service determines the most likely option based on the requester's input and sends a synthesized response with possible action items. Queries can apply to both information searches and service catalog requests.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of standard chat's synthesized response with conversational and non-conversational catalog options



The Now Assist Q&A Genius Results skill shows users the best possible answer to a query, in the form of actionable options displayed along with the results. The bot may generate answers based on what it found, or return actionable options or links. Users have the option to see more results as needed.

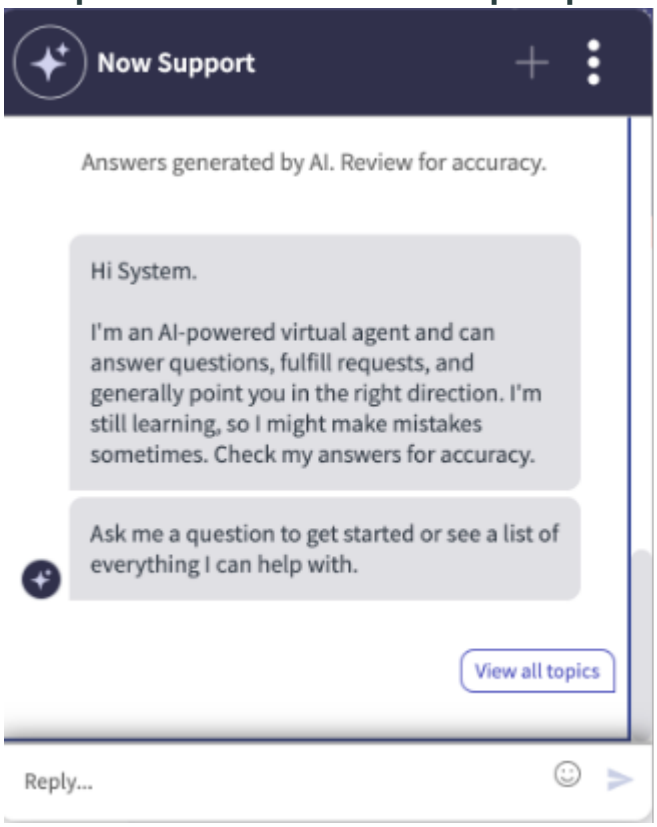
The Now Assist Multi-Turn Catalog Ordering skill gives users access to available options in the Service Catalog. Users can request an item, such as a mobile phone. The user can then provide more information to refine the search. For example, they may refine their request to a blue 256-GB iPhone. They can even request a new item instead, all in the same conversation, and the generative AI creates its responses using natural language.

The Now Assist Topics skill enables admins to create LLM topics for Now Assist in Virtual Agent. For more information, see LLM assistants. Activate the Now Assist Topics skill in the Now Assist guided setup. For more information, see Configuring assistants overview.

For more examples of having a conversation with Now Assist in Virtual Agent, see Using Now Assist in Virtual Agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of standard chat's View all topics option




Now Assist in Virtual Agent skills are available in the Now Assist Admin console. For full catalog functionality in the chat window, enable the generative AI experience for catalog item request submissions. For more information, see Configure Now Assist in Conversational Catalog Request.

The skill picker is configurable based on the user's requirements. For example, a user can change the **View all topics** label in the skill picker and add or remove the bullet list of promoted assets from the skill selection message.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

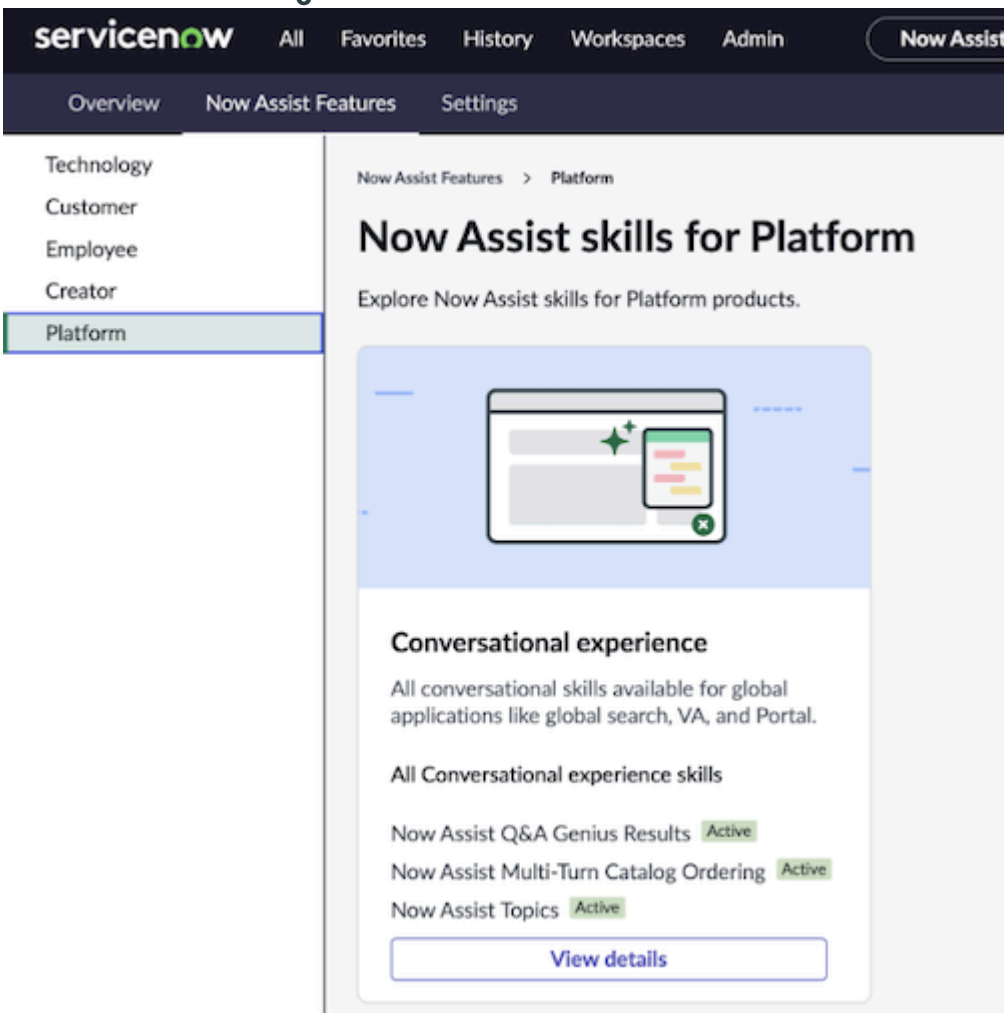Now Assist in Virtual Agent skills in the Now Assist Admin console



Benefits

Now Assist in Virtual Agent provides the following benefits.

Benefit	Feature	User
Configure Now Assist in Virtual Agent in a few minutes, from either the Conversational Interfaces console or the Now Assist Admin console.	Guided setup experience	virtual_agent_admin or admin
Now Assist skills can be turned on within the guided setup.	Activate a Now Assist skill	virtual_agent_admin or admin
Deploy Now Assist in Virtual Agent on multiple portals using the chat widget, the mobile app, and Microsoft Teams.	Configuring assistants overview	virtual_agent_admin or admin
Generative AI enhances the user search experience with the ability to generate answers and enabling the user to select the **Show more results** option for a new search.	Now Assist Q&A Genius Results skill	requesters
Give users in-chat access to available options in the Service Catalog.	Now Assist Multi-Turn Catalog Ordering skill	requesters

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Benefit	Feature	User
Now Assist lets Virtual Agent switch easily between requests, using plain language when new queries are made in the same conversation.	Mid-topic switching during Now Assist in Virtual Agent conversations	requesters
Monitor performance metrics for Now Assist in Virtual Agent from the Conversational Interfaces console.	Conversational Interfaces console	virtual_agent_admin or admin
Monitor value metrics (Now Assist usage versus Now Assist in Virtual Agent) from the Now Assist Admin console.	Now Assist Admin console	virtual_agent_admin or admin

LLM assistants

LLM assistants help with large language model (LLM) topic discovery. The Now Assist in Virtual Agent assistant is the default LLM assistant created during the Conversational Interfaces Assistants guided setup.

If LLM topics aren't associated with an LLM assistant, they aren't discoverable and can't be tested from the home page via **Test assistant**. The **Test assistant** option only appears if you have an assistant selected in the home page **Select assistant** filter.

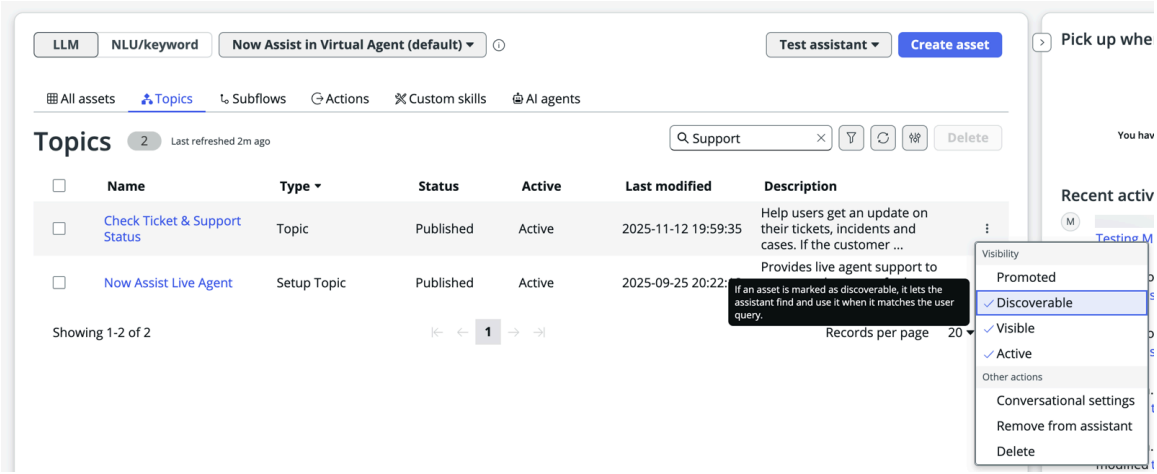
When using the **Select assistant** filter, topic blocks or custom controls that aren’t associated with an LLM assistant, but are called by a topic that's associated with an LLM assistant, appear in this filtered **Select assistant** home page view. Nested topic blocks or custom controls don’t appear in the filtered home page view unless they’re directly associated with an LLM assistant. For more information about testing LLM topics, see Testing LLM topics. When a topic is associated with only one LLM assistant, the Assistant drop-down list defaults to that assistant name. If you have multiple assistants, select which assistant you want to work with using the Assistant drop-down list. For more information about creating multiple LLM assistants, see Manage LLM virtual agents on the Assistants screen.

Tip:
On the Virtual Agent Designer home page, there's an **Assistant settings** option in the side panel. Use this option to navigate quickly to the Conversational Interfaces Assistants page to review or update your LLM assistants. For more information on the guided setup, see Configuring assistants overview.

If you want your LLM setup topic to be discoverable in an LLM assistant, you must flag the active setup topic as discoverable. For example, if you create an LLM setup topic by duplicating the Now Assist Live Agent setup topic and want to associate the setup topic with an LLM assistant, you must flag the duplicated topic as discoverable. Flag the topic as discoverable on the home page once you create an LLM topic and associate it with an assistant. Select the More actions on this row icon ⋮ next to your topic, and then select **Discoverable**. A checkmark appears by the text to indicate the topic is now discoverable.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Discoverable option in Asset library



Primary and secondary assistants

Primary and secondary assistants provide a framework enabling information flow between different assistants, with the flexibility to configure different experiences, such as search configuration, greeting, branding, and channels. The result is a seamless and integrated experience for the user.

Now Assist in Virtual Agent assistants can be set as a primary assistant and linked to one or more secondary assistants. A primary assistant inherits the information sources of the secondary assistants. When a user engages with a primary assistant, it understands the query and responds to the question even if the information sources required are within the secondary assistants. For Knowledge Graph, however, configurations must be done for each assistant.

A primary assistant uses search sources from secondary assistants. To set up your primary and secondary assistants, see Configuring assistants overview.

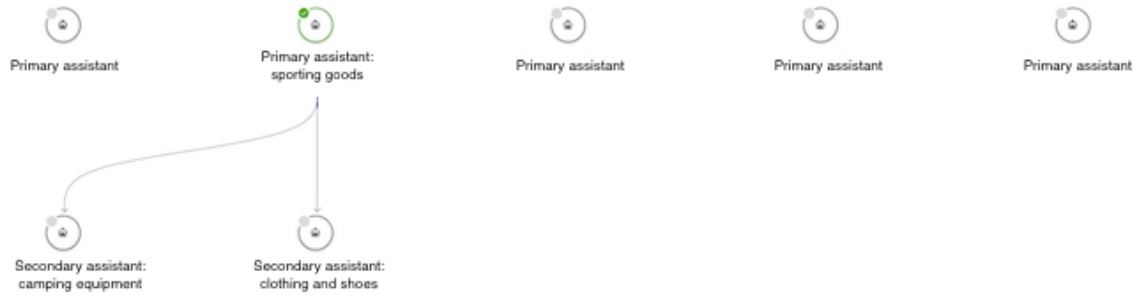
Information that is and isn't shared when linking primary and secondary assistants includes:

- Search application: The primary assistant uses its own settings.
- Now Assist skills: The primary assistant uses its own activation flags regardless of the secondary assistant's configuration.
- Stop words: When there's a conflict between the primary and secondary assistant, the most recent *sys_updated_on* value is used.
- Knowledge Base boosting condition: The primary profile should mirror the rules of all of its secondary assistants.

Using primary and secondary assistants is useful if different business units create and maintain their own assistants but want to have linkages between assistants to effectively share information.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Primary and secondary assistants agentic workflow example




Applicability at an assistant level

You can also control the applicability of a gen AI skill by assistant. When the applicability is set, the skill will only be applied to a specific assistant. To set the skill applicability:

1. Navigate to **All** and enter **sys_gen_ai_skill_applicability.list**
2. In the Generative AI Skill Applicabilities table, find the skill for which you want to set the applicability.
3. In the **Context Profile** column, select the assistant for which you want access to the selected skill.

In the following example, for the promoted generative AI skill - Send Email, when the context profile is set to the Now Assist Panel assistant, the skill appears when the assistant is called. But when the context profile is changed to a different assistant, the skill does not appear for the Now Assist Panel assistant.

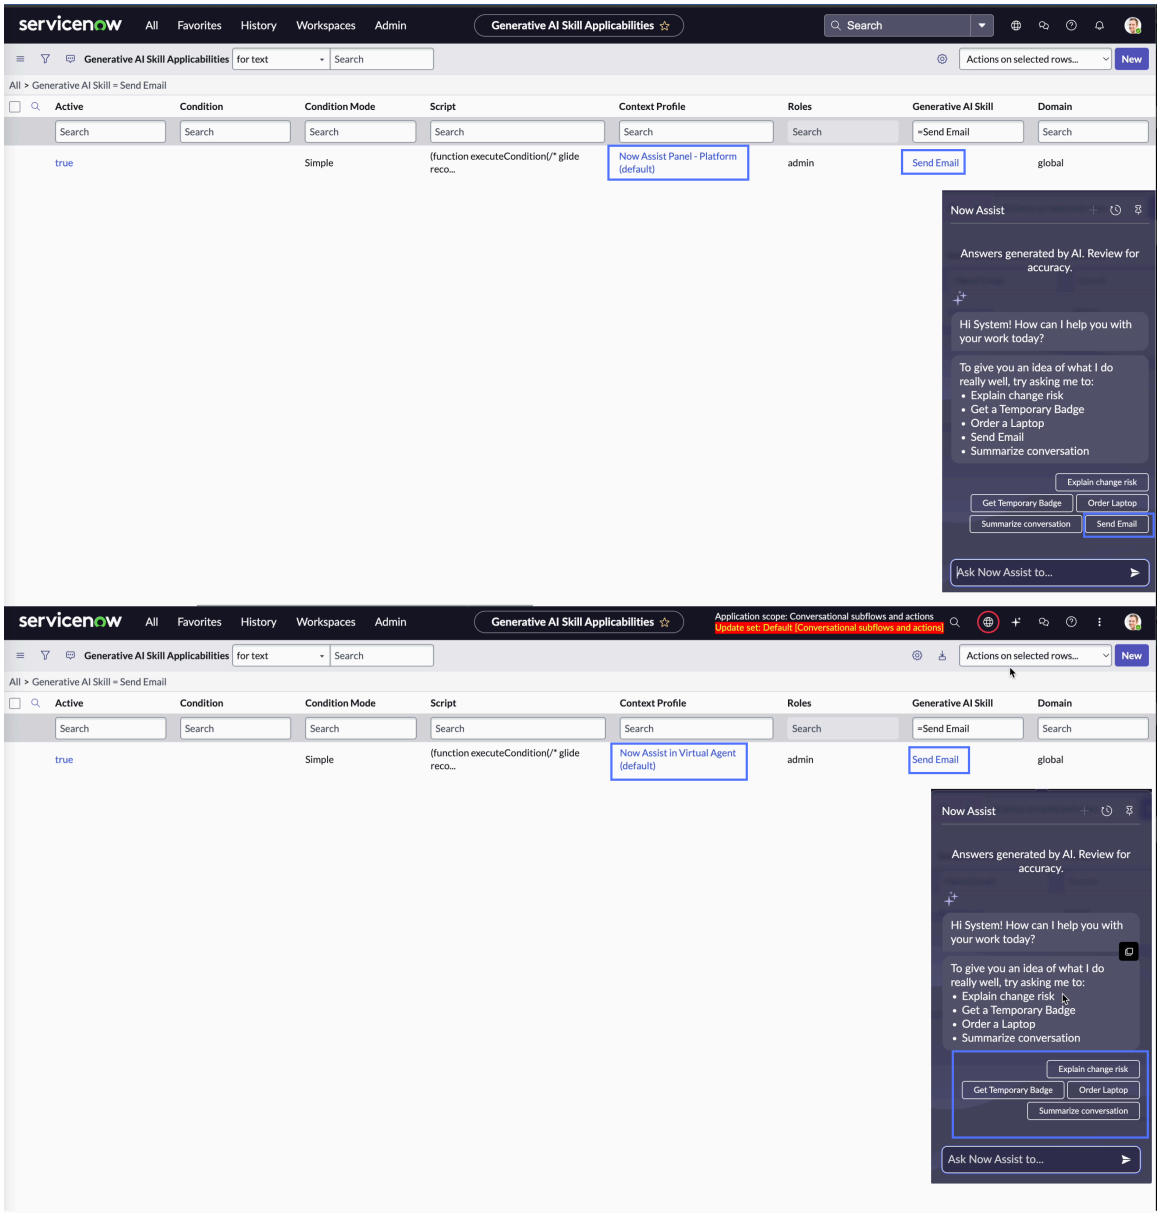© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Assistant Designer

Create, configure, manage, and test LLM-based chat and voice assistants within Assistant Designer, a centralized assistant administrator experience.

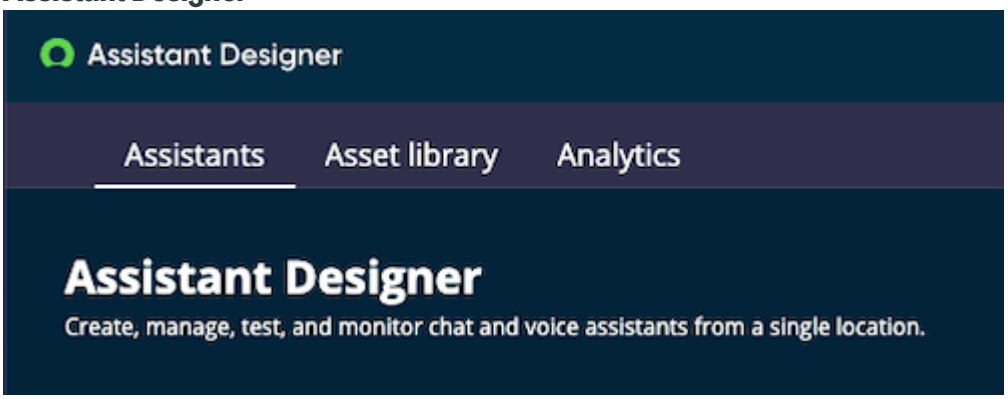
To access Assistant Designer navigate to **All** > **Assistant Designer**.

Assistant Designer is comprised of three main areas:

1. Assistants: From the **Assistants** tab, an admin creates, manages, and tests assistants. Voice assistants can't be tested within Assistant Designer at this time. Assistant Designer is only available if you have installed a Now Assist product. Customers who are only using Natural Language Understanding (NLU) can't access Assistant Designer. For more information about configuring chat or voice assistants, see Configuring assistants overview.
2. Asset library: The **Asset library** tab opens the Virtual Agent Designer home page where you can create NLU/Keyword topics and LLM assets. For more information, see Getting started with Virtual Agent Designer.
3. Analytics: Monitor, evaluate, and optimize the performance of your chat and voice assistants from the **Analytics** tab. For more information, see Analyzing assistants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Assistant Designer



Key terminology

Term	Definition
Virtual Agent	Virtual Agent provides user assistance through conversations within an intelligent messaging interface. It helps solve ordinary issues and delivers results for common requests, increasing the productivity of agents and technicians. Virtual Agent supports both large language model (LLM) and Natural Language Understanding (NLU) topic discovery. Assistant Designer only supports LLM conversations in Now Assist in Virtual Agent.
Assistant	An assistant is the container for the end-to-end administrative configuration for Now Assist in Virtual Agent. It's a Now Assist in Virtual Agent chat or voice conversation. An administrator can create multiple Now Assist in Virtual Agent assistants. By placing assistants in various channels such as a portal, mobile app, Microsoft Teams, and Sidebar discussions, any user benefits from the assistants.
Conversational assets	Conversational assets are components that an admin can use to build an LLM conversation. Asset types that are offered are: • Topics • Subflows • Actions • AI agents • Custom skills

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Key terminology (continued)

Term	Definition
Information sources	Information sources designate what content areas should be included in the assistant for AI Search queries. Currently, the following information source categories are offered: • Knowledge base (KB) articles • External content • Conversational catalog

Now Assist in Virtual Agent domain separation

Domain separation is supported for Now Assist in Virtual Agent. Domain separation enables you to separate data, processes, and administrative tasks into logical groupings called domains. You can control several aspects of this separation, including which users can see and access data.

Support level: Basic

- Business logic: Ensure that data goes into the proper domain for the application's service provider use cases.
- The application supports domain separation at run time. The domain separation includes separation from the user interface, cache keys, reporting, rollups, and aggregations.
- The owner of the instance must set up the application to function across multiple tenants.

Sample use case: When a service provider (SP) uses chat to respond to a tenant-customer's message, the customer must be able to see the SP's response.

For more information on support levels, see Application support for domain separation.

Related topics

Domain separation for service providers

Configuring assistants overview

Use Assistant Designer to build and optimize large language model (LLM) assistants for your conversational needs. Assistant Designer is a centralized assistant administrator experience that allows you to create and manage both chat and voice assistants.

Before you begin
See Assistant Designer.

Role required: virtual_agent_admin or admin

About this task
An admin can create and configure more than one chat or voice assistant within Assistant Designer.

For chat assistants, a primary assistant can be linked to one or more secondary assistants. The linkage enables a primary assistant to use search sources from secondary assistants, enhancing

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

its functionality and efficiency. For more information on primary and secondary assistants, see LLM assistants. If multiple assistants are created, users can chat simultaneously with multiple assistants. Conversations are independent from each other.

Each assistant can have more than one display experience, using either the standard chat or enhanced chat experience, depending on the display experience that's configured. Enhanced chat offers a conversational search experience that seamlessly integrates Virtual Agent chat with search results. For more information, see Standard chat or Enhanced chat. For a comparison of the two, see Using Now Assist in Virtual Agent.

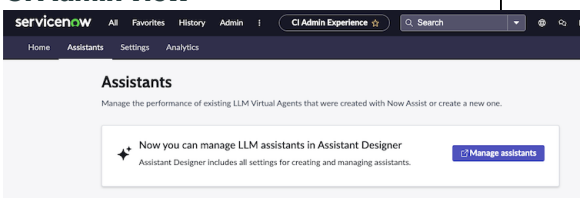
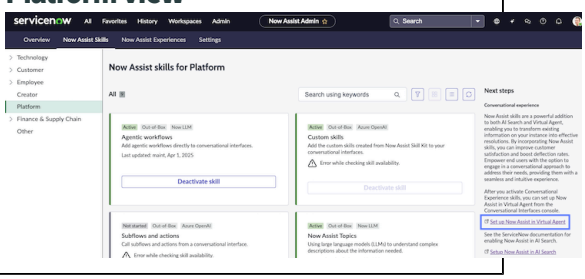
When configuring a chat assistant, notes throughout the procedures show where there are differences between the setup for Now Assist in Virtual Agent assistants and the setup for Now Assist panel assistants. Additional Now Assist panel assistants can't be created.

For voice assistants, a voice assistant can be mapped to one or more AI agents. The linkage enables a voice assistant to leverage agentic capabilities to resolve user queries over phone.

Procedure

1. To access assistants in Assistant Designer, navigate to **All** > **Assistant Designer** > **Assistants** tab.
   The **Assistants** tab in Assistant Designer can also be accessed from different entry points.

Entry points to create and manage a chat or voice assistant

Entry point	Accessing assistants
All > **Conversational Interfaces** > **Assistants**	Select **Manage assistants**. **CI Admin view** 
All > **Now Assist Admin** > **Now Assist Skills** > **Platform**	Select the **Set up Now Assist in Virtual Agent** link. **Now Assist Admin console > Platform view** 

2. To view and create chat or voice assistants, see View assistants.

What to do next

See View assistants.

View assistants

View and mange all existing chat and voice assistants on your instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

See Configuring assistants overview.

To view the **Assistants** tab in Assistant Designer, verify that the Now Assist for Platform plugin and/or the Now Assist for Creator plugin is installed. The plugins come with Now Assist products such as Now Assist for ITSM, Now Assist for CSM, and others.

Note:

- With the Now Assist for Platform plugin, you can see all Now Assist in Virtual Agent and Now Assist panel assistants.
- If you only have the Now Assist for Creator plugin installed, only the Now Assist panel - Developer assistant is shown.

Actions that can be taken for default assistants


Assistant type	Activate	Deactivate	Edit	Test	Delete
Now Assist in Virtual Agent (default)	Yes	Yes	Yes	Yes	No
Now Assist panel - Platform (default)	Yes	Yes	Yes	Yes	No
Now Assist - Developer	Yes	Yes	Yes	Yes	No
Now Assist Voice Deployment	Yes	Yes	Yes	No	No

Role required: virtual_agent_admin or admin

About this task

By default, chat assistants and voice assistants are shown as cards. Voice assistants show a voice label and icon on the card. Voice assistants can only be edited. They can't be tested in Assistant Designer at the moment.

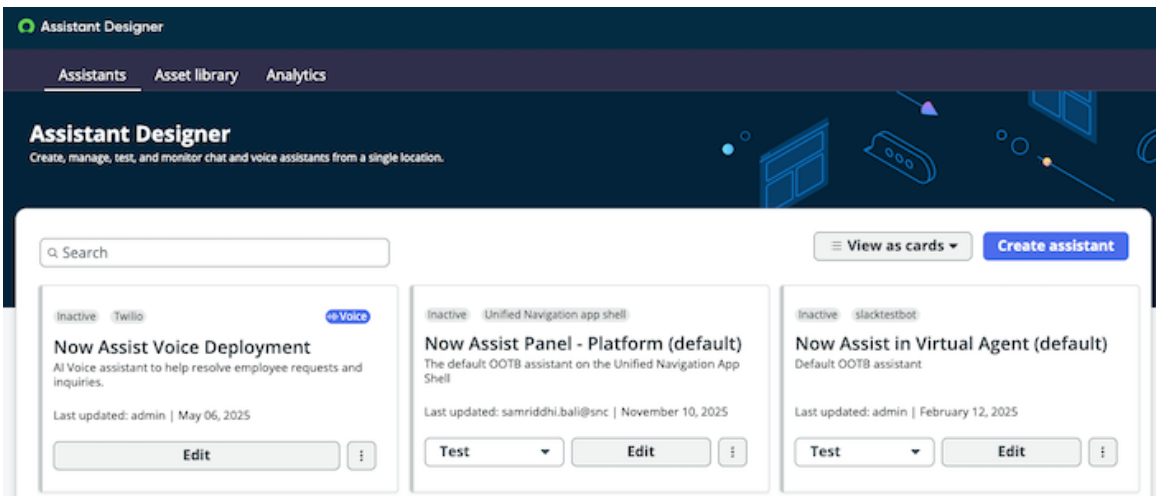Assistant card view



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Assistants are shown in card view and in map view.

- If an assistant's name or description is too long, it's truncated to fit the card view.
- An assistant status shows as active (in green) or inactive (in gray).
- Labels show in which display experiences the assistant is deployed, for example, HR portal.
- Last updated shows the name of the person who created the assistant and the date that the assistant was created.
- If a card shows **View** and not **Edit**, it means that you don't have the ability to edit the assistant because you only have access to assistants in specific domains.
- A domain label is displayed on all assistant cards if any assistant has been created outside of the global domain. The label shows the domain that the assistant is in. If assistants are only created within the global domain, the label isn't shown.
  - In any sub-domain (e.g., Asia), the assistants from that domain and the assistants from the global domain are shown on the card.
  - Assistants created within a non-global domain can be edited, turned on, off, or deleted only within that domain and not from within the global domain.
  - If you're in a specific domain while opening the edit flow of an assistant created in another domain:
    - Activate/deactivate is inactive.
    - Delete is inactive.
    - Edit triggers the assistant edit flow, but all fields are read-only.
  - Assistants from the global domain can be edited, activated, deactivated, or deleted as long as you're in the global domain. To switch domains, open a new browser tab and navigate to anywhere that has Unified Navigation and select the globe icon to switch domains. For more information, see Exploring Next Experience pickers. If the domain plugin is installed, these options are available:
    - **Domain scope: Default** determines the domain that you are in.
    - **Application scope: Global** determines the store app pr plugin scope that you are in.
    - **Update set: Default [Global]** determines where updates are made on the instance are saved.
  - For more information on domain separation, see Exploring domain separation and Domain separation for service providers.

Select the **View as cards** drop-down menu to toggle to the map view. The linkage between primary and secondary assistants is shown. For general information about primary and secondary assistants, see LLM assistants.

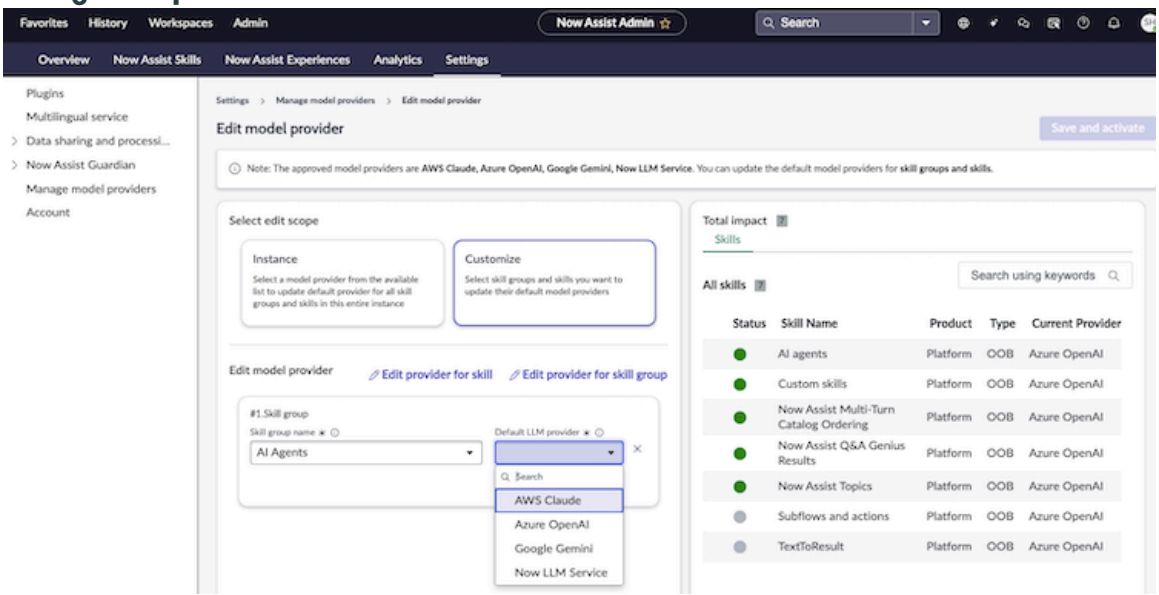
- In the map view, primary assistants on the top row show secondary assistants that are linked to them.
- Green indicates that the assistant is turned on. Gray indicates that the assistant is turned off.

The side panel shows where you left off, recent activity, and resources. The links that appear within the **Resources** section are hard-coded and can't be changed. If you select the **Manage model provider (Now LLM)** link, you will be redirected to Now Assist Admin console. For more information, see Edit model providers.

To change the LLM provider for all assistants on the instance, select **Customize** > **Edit provider for a skill group** > **AI agents**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Change LLM provider for an assistant



Procedure

1. To create a new chat or voice assistant, select **Create assistant**.
   The new assistant is a Now Assist in Virtual Agent assistant.

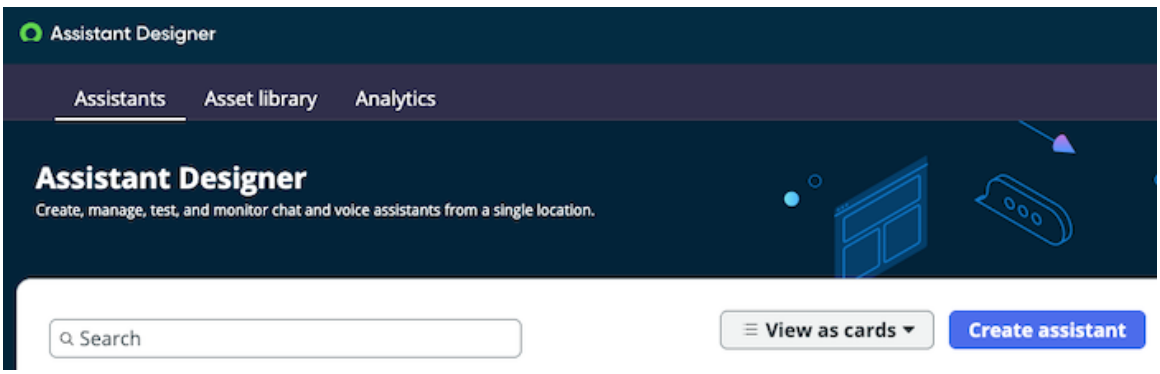
Create an assistant



The assistant creation flow launches where you can choose between a chat-based assistant or a voice-based assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

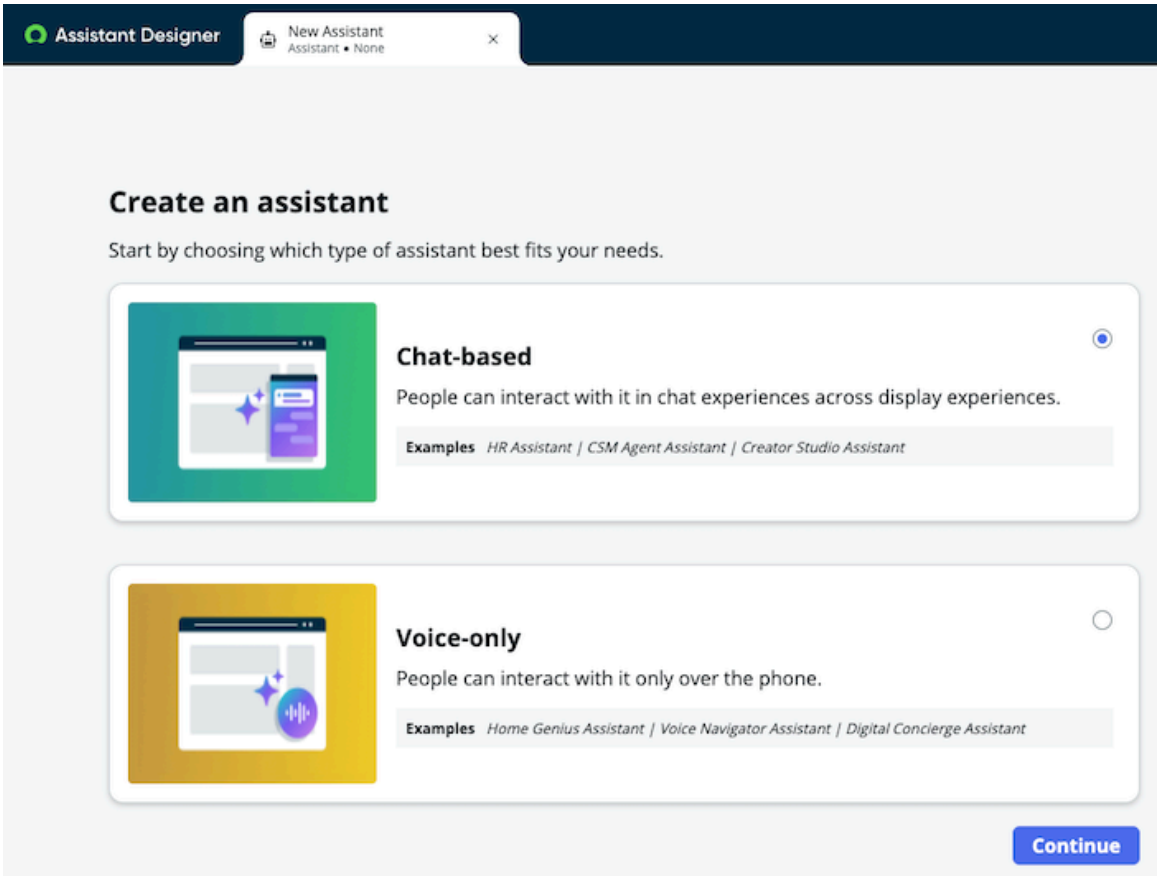Select a chat or voice assistant



Follow the procedures to set up your chat assistant or voice assistant.

2. To set up your chat assistant, see:

   a. Create a chat assistant.
   b. Use agentic support for a chat assistant.
   c. Assign search sources to a chat assistant.
   d. Add a Knowledge Graph schema to a chat assistant.
   e. Add assets to a chat assistant.
   f. Display your chat assistant on a portal, channel, or mobile app.
   g. For Now Assist panel assistants, see Display your assistant on Platform or ServiceNow Studio.
   h. Brand an assistant.
   i. Manage an assistant chat experience.
   j. Enable additional chat features.
   k. Review chat assistant settings.
   l. Test a chat assistant.
   m. Edit a chat assistant.

3. To set up your voice assistant, see Create a voice assistant.
4. Select the ellipsis to activate, deactivate, or delete an assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next
For chat assistants, see Create a chat assistant.

For voice assistants, see Create a voice assistant.

Create a chat assistant

Create a chat assistant on your instance. Add basic details and set your assistant as a primary assistant.

Before you begin
See View assistants.

When configuring a chat assistant, notes throughout the procedures show where there are variations between the setup for Now Assist in Virtual Agent assistants and the setup for Now Assist panel (Platform and Developer) assistants.

Now Assist in Virtual Agent assistants and Now Assist panel - Platform (default) assistant can be linked to other assistants.

Additional Now Assist panel assistants can't be created.

Role required: virtual_agent_admin or admin

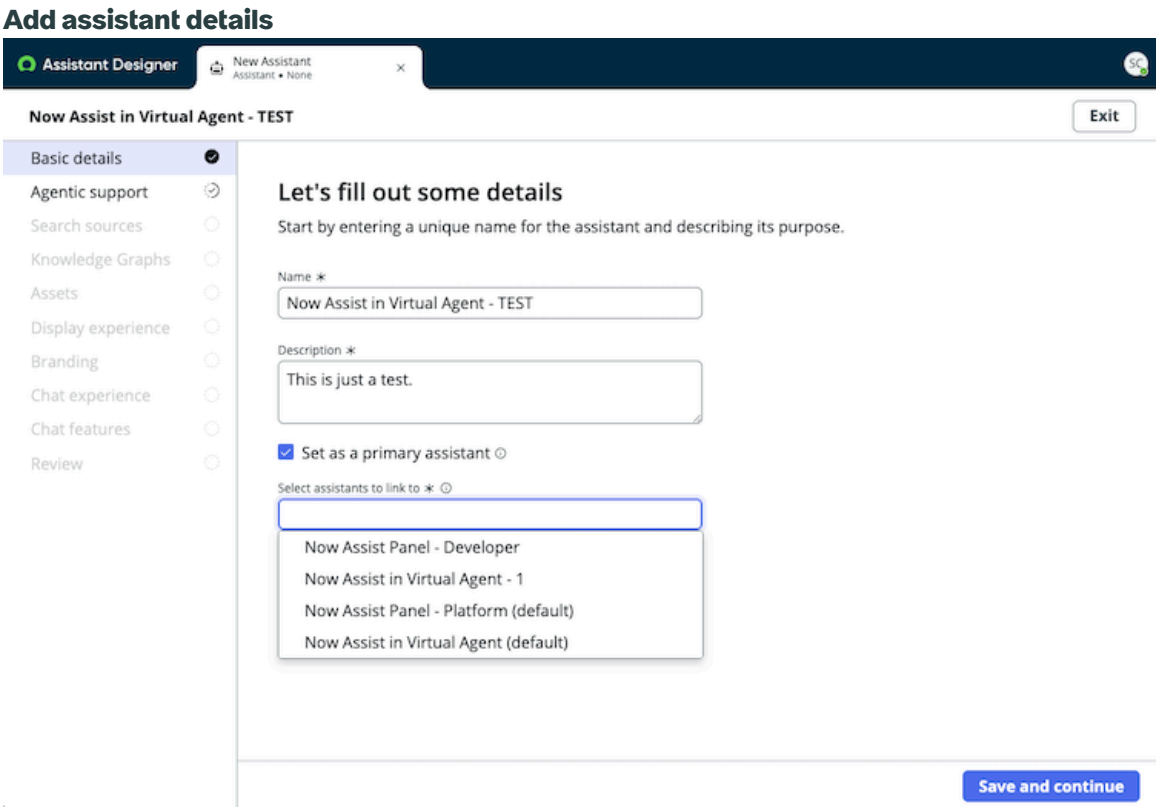
About this task
Set up basic details for your assistant and set it as a primary assistant. Primary assistants can be linked to secondary assistants. For general information about primary and secondary assistants, see LLM assistants.

Procedure

1. Provide a name and description for the assistant.
   The name of the assistant in this example is Now Assist in Virtual Agent - TEST. An alert is shown if you attempt to create an assistant with the same name as another assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The **Name** and **Description** fields for Now Assist panel assistants can't be modified.



2. Select the **Set as a primary assistant** check box if you want to make the assistant a primary assistant to which you can add secondary assistants.

   Note:
   The ability to link to another assistant is not available for Now Assist panel - Developer assistant.

3. Place your cursor within the **Select assistants to link to** field to see a list of available secondary assistants.
   Assistants that already have secondary assistants under them can't be selected. Any assistant that you select becomes a secondary assistant to the assistant that is being set as a primary assistant. The primary assistant will contain a combination of search profiles and assets from the secondary assistants.

   One or more secondary assistants must be selected. All assistants within the same instance and domain are shown in the drop-down list, enabling you to link your primary assistant with one or more secondary assistants. Two primary assistants can’t be linked to each other, and other primary assistants are unavailable in the list.

   If one or more secondary assistants selected are inactive, an alert shows **The following secondary assistants are off and will be inaccessible.** A list of inactive assistants is shown.

4. Select **Save and continue**.

What to do next

See Use agentic support for a chat assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Use agentic support for a chat assistant

Let the assistant use AI agents and agentic orchestration. AI agent skills are prompt-based and can perform complex tasks. Admins can choose between agentic or standard search Q&A modes.

Before you begin

See Create a chat assistant.

Agentic orchestration is a design approach that helps AI systems coordinate and manage multiple components such as AI agents, knowledge bases, and Q&A modules to accomplish complex multi-step tasks. These components work together, make real-time decisions, and adapt workflows based on context, ensuring responses use the most relevant skills and content.

Role required: virtual_agent_admin or admin

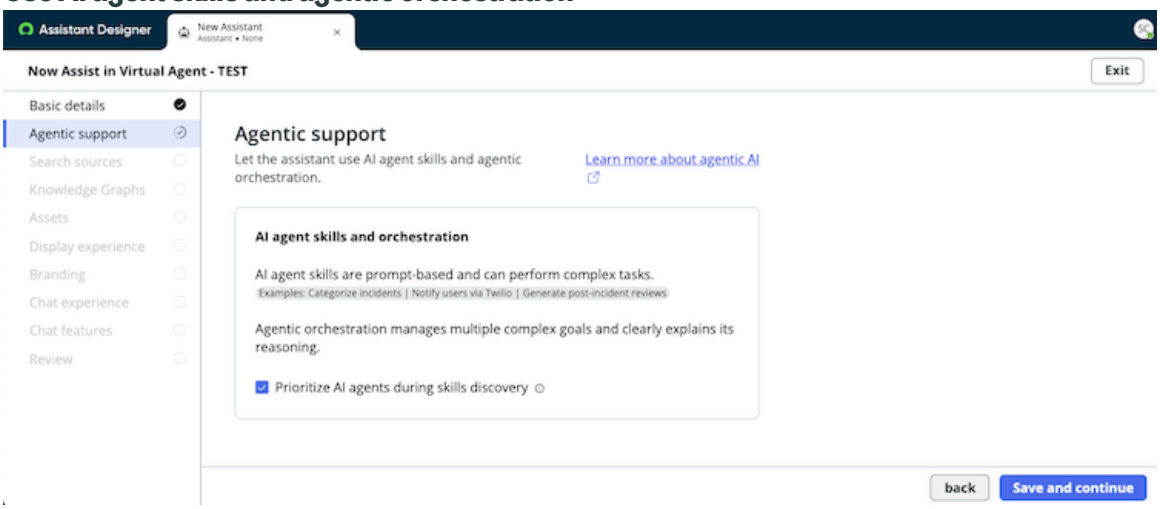
About this task

Select the operational mode of an assistant. For more information about agentic AI, see Exploring Now Assist AI agents.

Procedure

1. Toggle on **Use AI agent skills and orchestration**.
   The option to toggle on **Use AI agent skills and orchestration** only appears for existing customers that previously had the AI agent skill turned off for the assistant. Turning on **Use AI agent skills and orchestration** is an irreversible action. Agentic orchestration is a prerequisite to assign AI agents to an assistant.

Use AI agent skills and agentic orchestration



2. Select **Prioritize AI agents during skills discovery**.
   For new customers, when a new assistant is created, AI agent skills and orchestration are already turned on. However, you can opt out. When **Prioritize AI agents during skills discovery** is selected, all AI agents are prioritized over other assets for the assistant.
3. Select **Save and continue.**

What to do next

See Assign search sources to a chat assistant.

Assign search sources to a chat assistant

Assign search sources to a chat assistant. Search sources are used to determine what the assistant looks at to answer user queries.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

See Use agentic support for a chat assistant.

Role required: virtual_agent_admin or admin

About this task

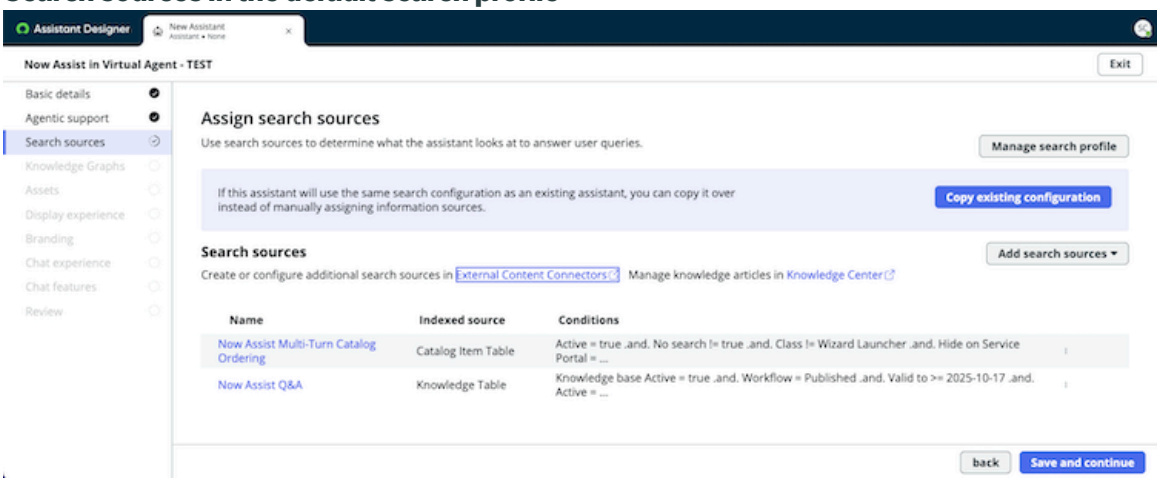
Each assistant has its own search configuration. If you have configured AI Search on any existing portal or mobile app, you can copy the existing configuration to your assistant's search configuration. You can also add external or internal search sources to the assistant.

Note:
Search configuration isn't applicable to Now Assist panel - Developer assistant.

Procedure

1. Assign search sources to your chat assistant.

Search sources in the default search profile



   When a chat assistant is created, a search profile for that assistant gets created. All search sources associated with the profile are listed. The default search sources are:

   - Now Assist Multi-Turn Catalog Ordering (catalog search sources)
   - Now Assist Q&A (knowledge base search sources)

2. Select the ellipsis if you want to edit the conditions of each skill.
3. Select **Copy existing configuration** if you have already configured AI Search for your portal, mobile app, or platform search, and you want the assistant to have those same search configurations.
   Copying an existing configuration imports an existing search configuration to the assistant's search profile and search configuration.

   Using existing search application configurations saves time building assistant search configurations. In addition, for the display experience that uses enhanced chat, the assistant search configuration takes over the portal, mobile app, and the platform search experience to ensure that search and the assistant always provide consistent answers.

4. Select a search application configuration from the **Copy configuration** drop-down list.
   The **Copy configuration** list includes all portal search configurations, mobile search configurations, platform search configurations, and the default assistant search configuration from the AI Search Admin console.

   For the Now Assist panel - Platform (default) assistant, copy the Global Search application configuration if you want the answers from the assistant and the platform Global Search to

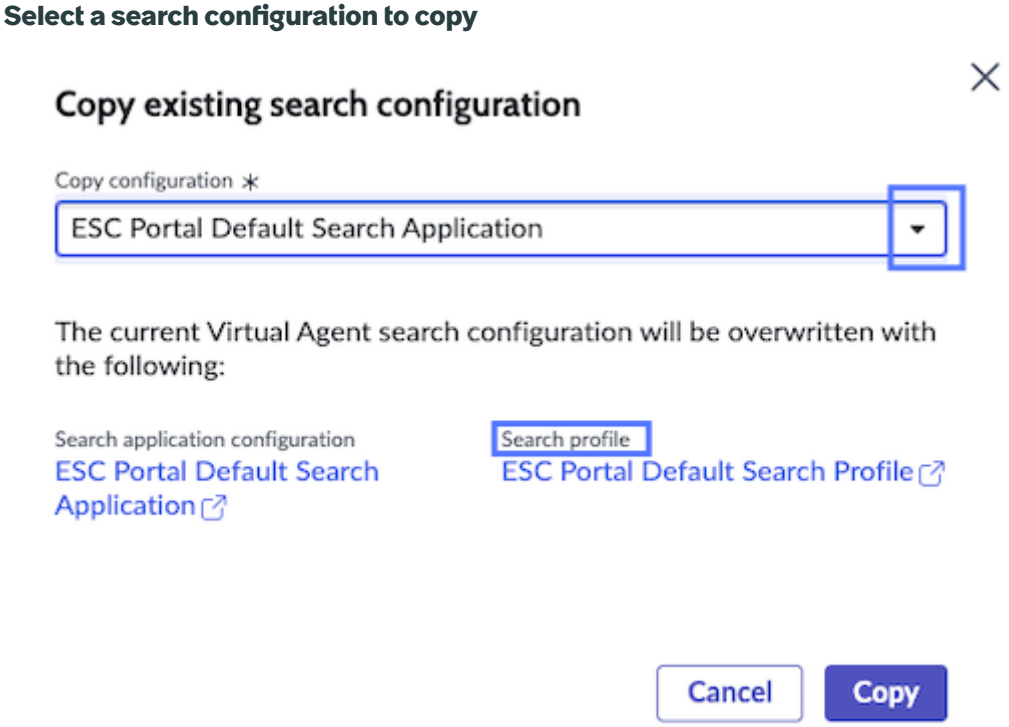
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

be consistent. The name of the default Global Search app is [AIS] Next Experience Search Configuration. However, AI Search admins can change which search app is configured for the Global Search.

When a user starts a chat with the Now Assist - Platform (default) assistant from the sparkle icon, search typeahead or the (+) button, the Now Assist - Platform (default) assistant search application configuration is used for both Virtual Agent and platform searches.

When a user selects **Ask a follow up** or requests a catalog item from the search results page of a specific workspace, the specific workspace search application configuration is used for both Virtual Agent and search.

The associated search profile is also shown.




5. Select **Copy**.
   After copying an existing configuration, the existing configuration for your portal, mobile app, or platform search overwrites your assistant's search application configuration. The latest configuration and the search sources are shown.

   Note:
   All search sources are copied into the assistant search profile. However, only knowledge base, conversational catalog items, and external content are used for the LLM-generated conversational responses. Other search sources are used for the query-based search results, and when the user selects **View more search results**, Virtual Agent responses are seamless with the portal or mobile app search results page.

6. Select the ellipsis at the end of each table row to edit conditions or add a new condition set.

   The **Edit conditions** pop-up window appears.

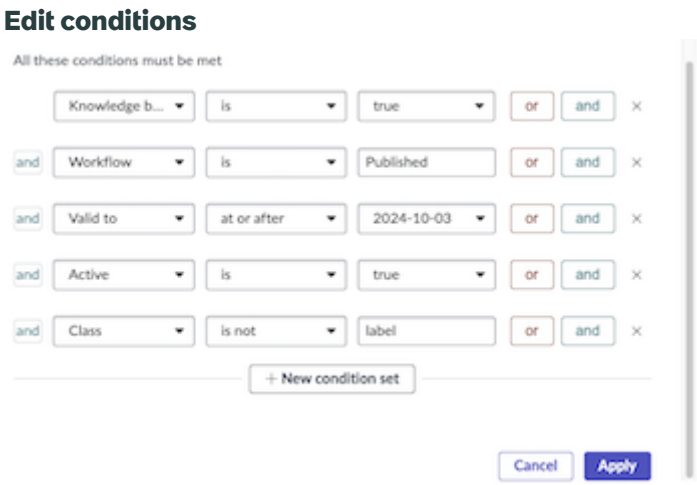© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



7. Select **Apply** after you have edited the conditions or added a new condition set.
8. Select the **External Content Connectors** link to create or configure additional search sources.

   Note:
   If you have any external search sources created on your instance, the external search sources are shown in the **Add search sources** drop-down list.

   The External Content Connectors application adds support for indexing content and metadata from documents in external repositories to make those documents searchable in AI Search applications. The External Content Connectors application ships with a default search source for each connector. Connector admins can link the default search source for a connector to a search profile as part of the connector creation process, or after the connector is created. For more information, see Create a GitHub Enterprise Cloud external content connector and Connect an external content connector to a search profile. For information about creating search sources and linking them to search profiles, see Search sources in AI Search.

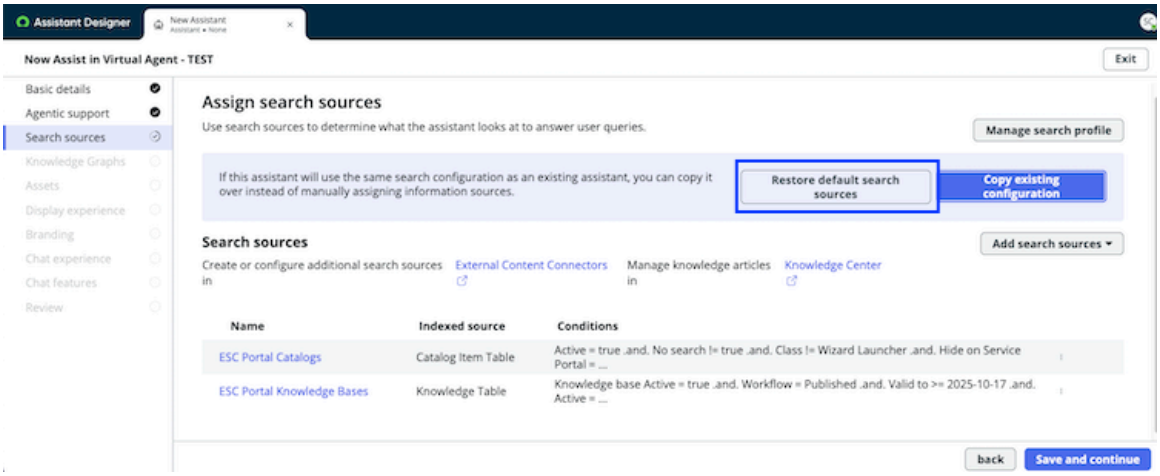
9. Select the **Add search sources** drop-down list to select or deselect search sources and save them into the assistant search profile.
   - An internal search source refers to all knowledge base search sources on the instance and all catalog search sources on the instance.
   - An external search source refers to all external content search sources on an instance. Examples of external search sources include Microsoft SharePoint or Confluence. For a complete list of external search sources, see Exploring External Content Connectors.

   Search sources that aren't a knowledge base, external content, or catalog won't be used for the LLM-generated responses, but they are used for query-based search results shown in the assistant. Tool tips are shown for non-LLM eligible search sources.

10. Select **Restore default search sources** if you want to revert to the default search sources of Now Assist Multi-Turn Catalog Ordering and Now Assist Q&A.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Restore default search sources



11. Select **Manage search profile** if you have not yet configured AI Search for your portal or mobile app and want to start building the search configuration for your assistant from scratch, or edit advanced settings such as dictionaries, improvement rules, and stop words.
A new browser tab opens with your assistant's search profile page from the AI Search Admin console page.

    You must first complete the build of your search profile in the AI Search Admin console, and then publish your profile for it to be saved. For more information, see Configure and manage AI Search in search applications.

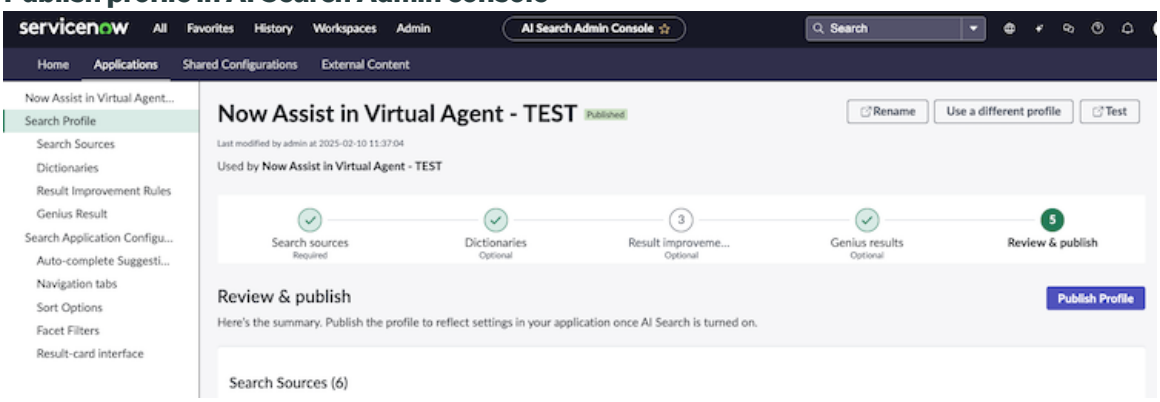Publish profile in AI Search Admin console



When navigating back to your assistant admin configuration in Assistant Designer, refresh your browser page to reflect published updates from the AI Search Admin console. For more information about the AI Search Admin console, see Using AI Search Admin console.

> **Note:**
> If you rename an assistant, the assistant's search profile name is automatically renamed to match the latest assistant's name.

12. Select the ellipsis if you want to remove a search source or edit the conditions, and then save the change.
13. Select **Save and continue**.
The assistant search profile needs to have at least one KB or external content search source in order to be saved.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

What to do next
See Brand an assistant.

Add a Knowledge Graph schema to a chat assistant

Create Knowledge Graph schemas to represent semantic relationships in your data. Schemas improve assistant responses by providing additional context about users and your organization.

Before you begin
See Assign search sources to a chat assistant.

Role required: virtual_agent_admin or admin

About this task
Knowledge Graph transforms search into an intelligent, predictive, and efficient experience, increasing accuracy, and improving productivity.

Note:
Knowledge Graph is not applicable to the Now Assist panel - Developer assistant.


For more information about Knowledge Graph, see Leverage Knowledge Graph prebuilt integration with Virtual Agent.

Note:
By default, search personalization is available with AI Search in the assistant, and delivers personalized, context-aware search experiences powered by Knowledge Graph. To disable the integration with Knowledge Graph for personalization, open support ticket.

An empty Knowledge Graph page is shown if the Knowledge Graph app isn't installed on the instance. Selecting **Go to Knowledge Graph** links to the ServiceNow Store's Knowledge Graph page.

Procedure
1. If Knowledge Graph is turned on, select the Knowledge Graph schema to apply to the assistant.

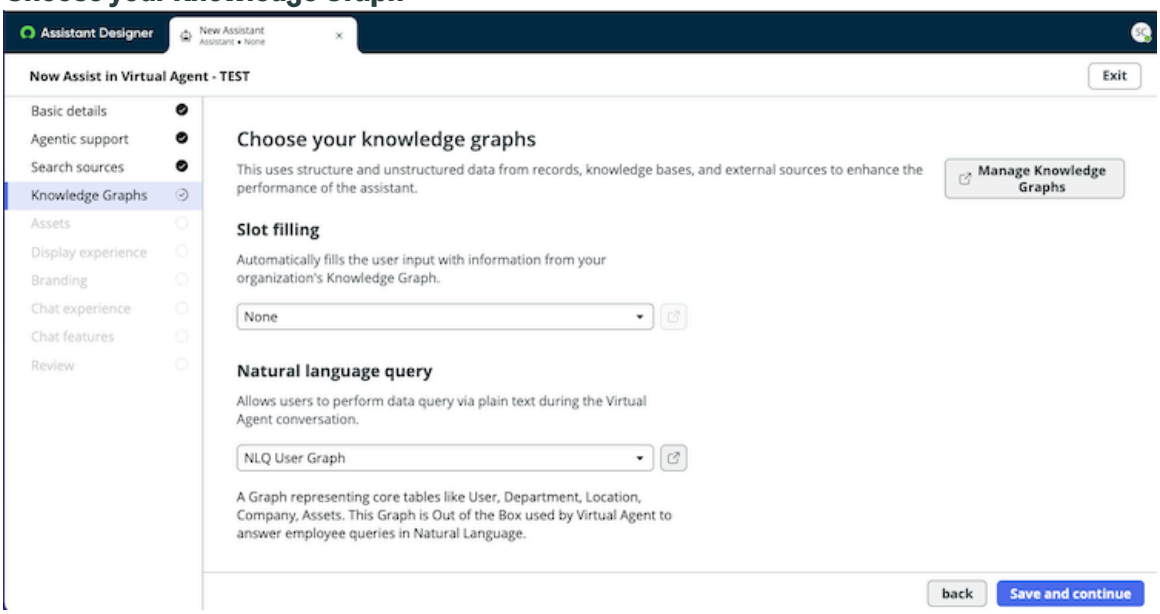Choose your Knowledge Graph



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
During a platform upgrade, if you previously created an assistant and assigned a Knowledge Graph schema to the assistant, you may need to reassign the schema to the assistant as it may show as **None**.

Slot filling schema (optional): Slot filling automatically fills the user input with information from your organization's Knowledge Graph. The drop-down list consists of Knowledge Graph schemas that are available on the instance. There's no default schema for slot filling. If you select Enterprise Graph, you have the option to add tags.


Natural language query schema (optional): Natural language query enables users to perform data query via plain text during the chat. The drop-down list consists of Knowledge Graph schemas that are available on the instance. The default schema for Natural Language Query is User Graph (now_user_graph_nlq). If you select Enterprise Graph, you have the option to add tags.

Enterprise Graph is a predefined graph schema that represents all tables. Use tags to annotate tables in the global schema for higher accuracy responses to questions on a specific subject matter. Selecting the button next to the Enterprise Graph selection directs you to the Knowledge Graph console where you can edit the specific Knowledge Graph.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
For Now Assist panel - Platform (default) assistant, if Enterprise Graph and Enterprise Graph (Small) are selected within the NLQ schema, tags can be selected for specific workspaces that are active on the instance.

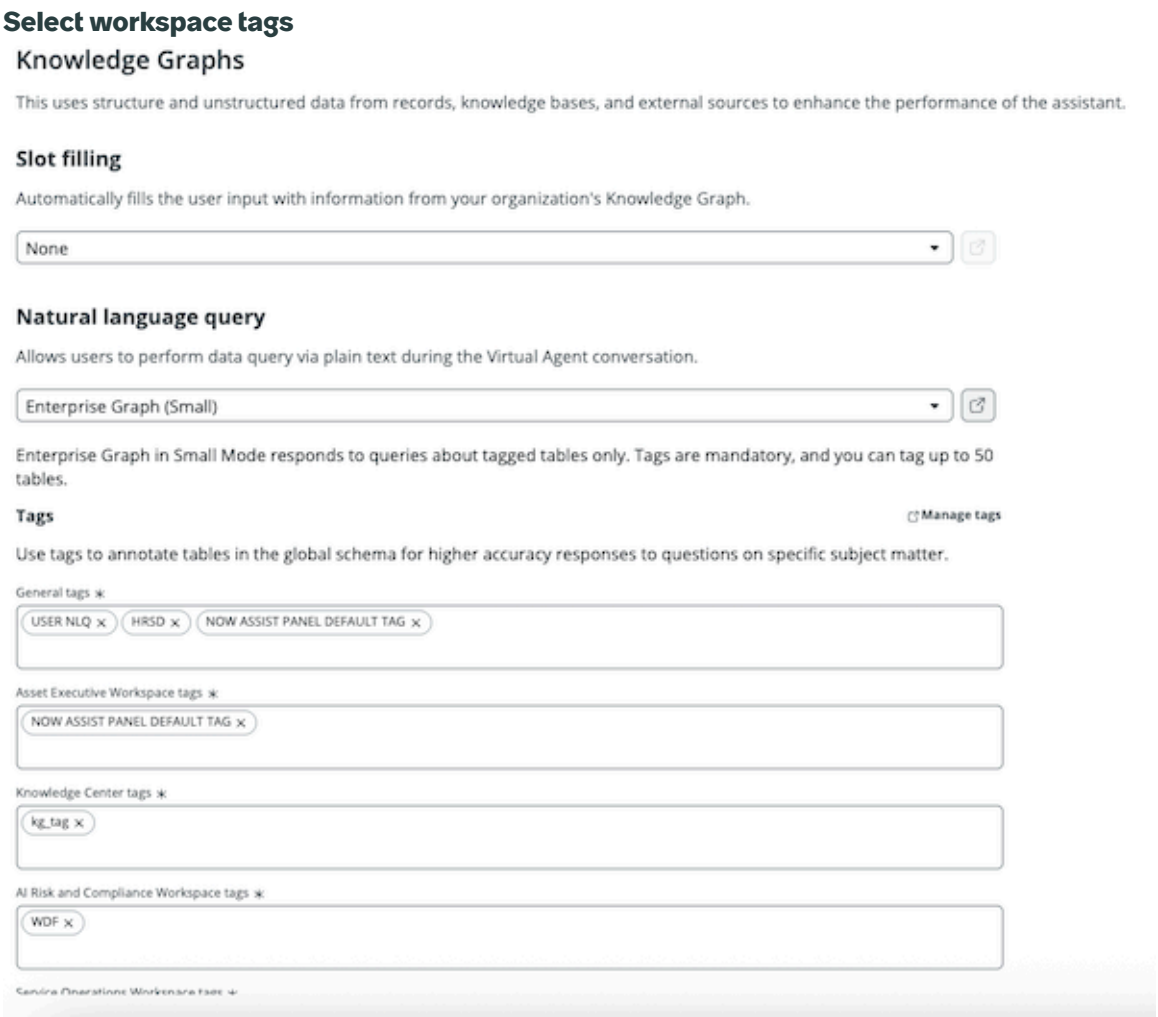
For more information about Knowledge Graph tags, see .



2. Select**Manage tags** to open the tag list from the Knowledge Graph as a new browser tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

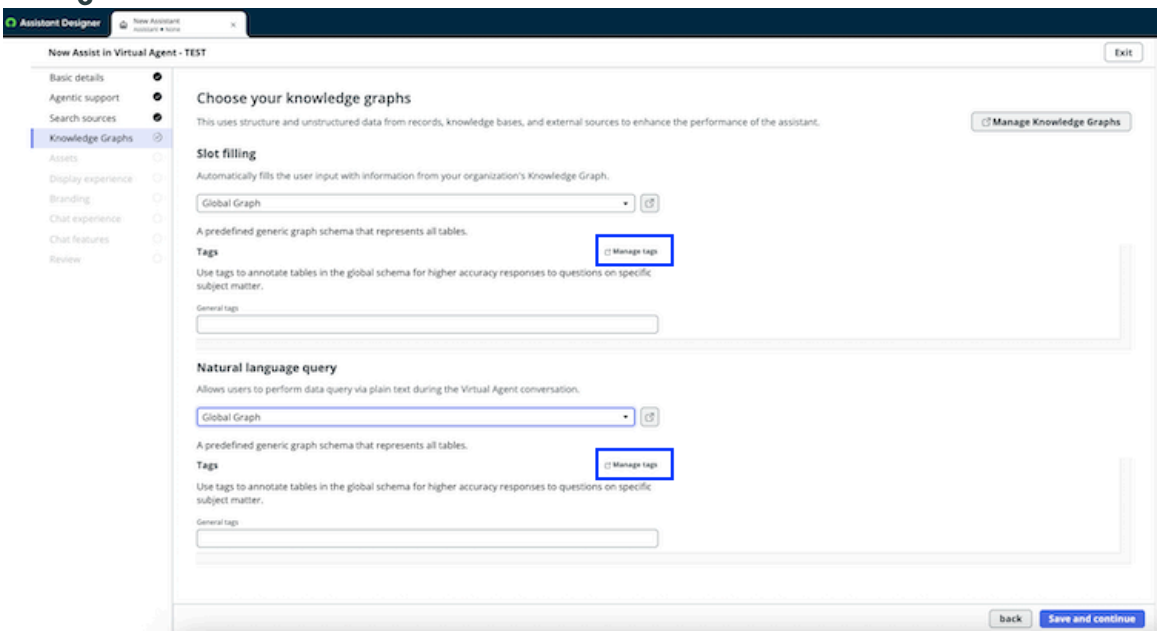Manage



3. Select **Manage Knowledge Graph** to open a new browser tab that directs you to the Knowledge Graph app.

What to do next

See Add assets to a chat assistant.

Add assets to a chat assistant

Map an asset to an assistant. Assets are the building blocks of each assistant, providing them with instructions and functionality for helping users.

Before you begin

See Add a Knowledge Graph schema to a chat assistant.

Role required: virtual_agent_admin or admin

About this task

Assets are LLM-powered components that admins can create to define all issues that the assistant could be equipped to solve.

When viewing or editing an existing assistant, you can view or edit the assets that are associated with an assistant. Assets can also be added to an assistant from the Asset Library and/or Topic Migration.

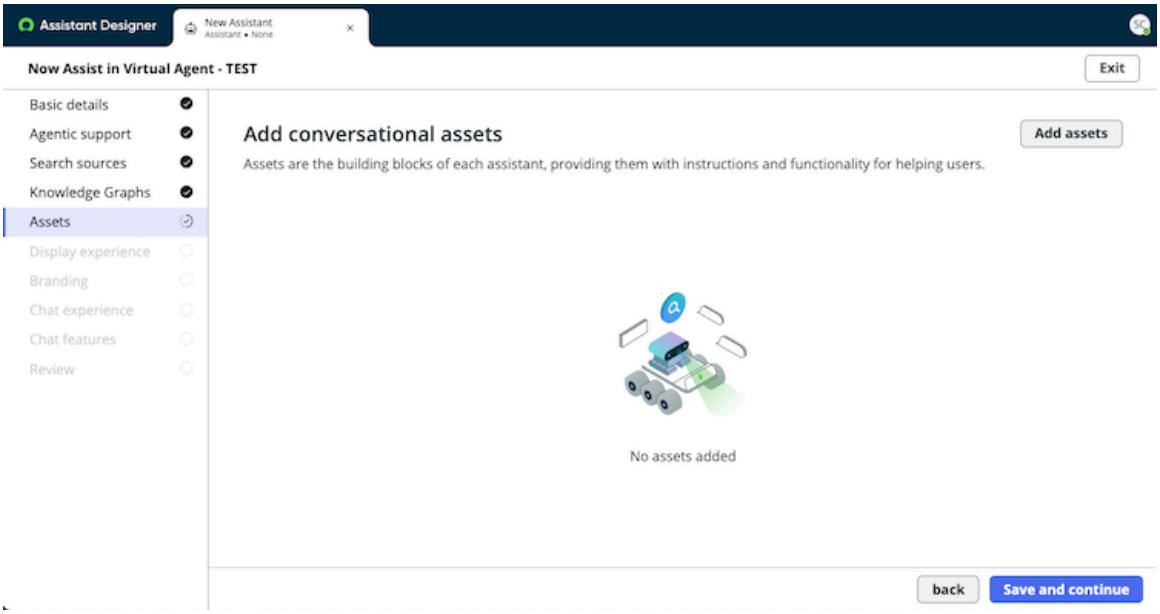
Note:
If you're an existing customer who previously turned on or off a skill type for an existing assistant, you can add or remove any individual asset when editing an assistant.

Procedure

1. Select **Add assets**.
   By default, no assets are mapped to the assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Add assets




The **Add assets from library** modal appears where you can multi-select assets that you want to assign to the assistant. Asset types include:

- Topics
- Subflows
- Actions
- Custom skills
- AI agents


Note:
For Now Assist panel - Developer assistant, only topics are available.

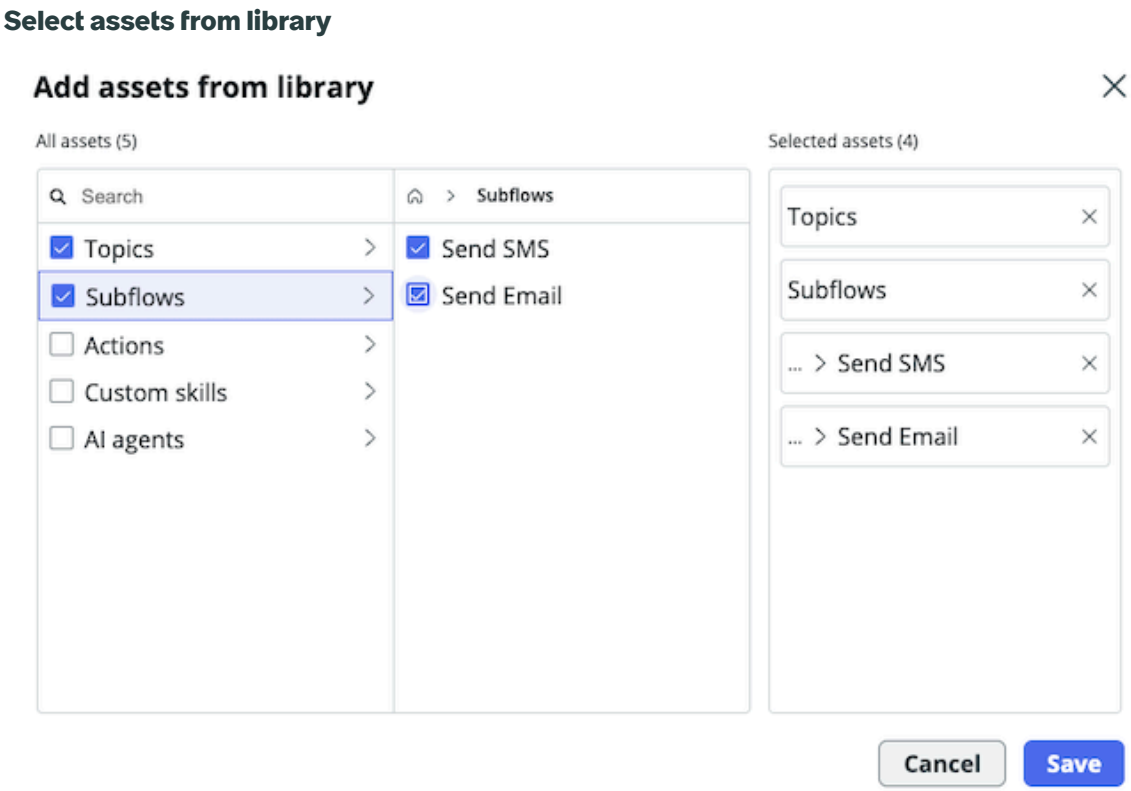© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



2. Select **Save**.

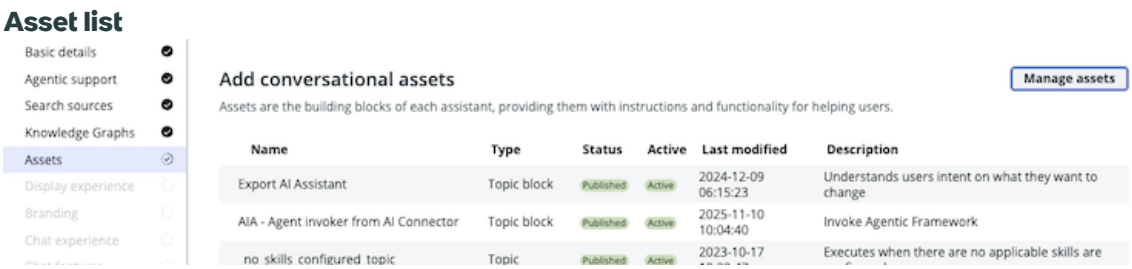   The list view appears where you can manage assets that are associated with an assistant. The table is not editable from this view. To further edit the assets, navigate to the assistant edit flow.



   To unmap an asset, select **Manage assets** and uncheck the desired asset.

3. Select **Save and continue**.

What to do next

See Display your chat assistant on a portal, channel, or mobile app.

See Display your assistant on Platform or ServiceNow Studio.

Display your chat assistant on a portal, channel, or mobile app

Select at least one portal, or integrate with your preferred messaging channels, to display your assistant. Display experiences are the different places where a user can find and interact with an assistant.

Before you begin

See Add assets to a chat assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If you're using a display experience for a Now Assist panel assistant (Platform or Developer), see Display your assistant on Platform or ServiceNow Studio.

Role required: virtual_agent_admin or admin

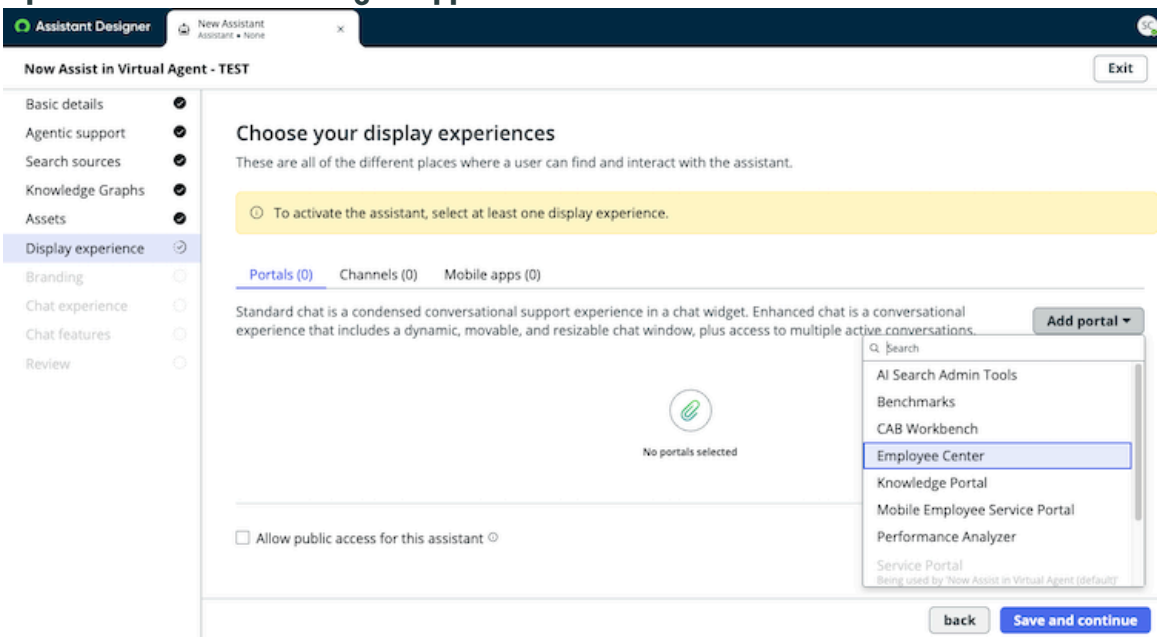
About this task

You must configure at least one display experience for an assistant before activation.

Procedure

1. In **Portals**, select one or more portals from the **Add Portal** drop-down list or integrate with your preferred messaging channels to display a chat assistant.

Options for where Virtual Agent appears



One portal can only include one assistant. Any portal in the list that is already used is unavailable for selection.

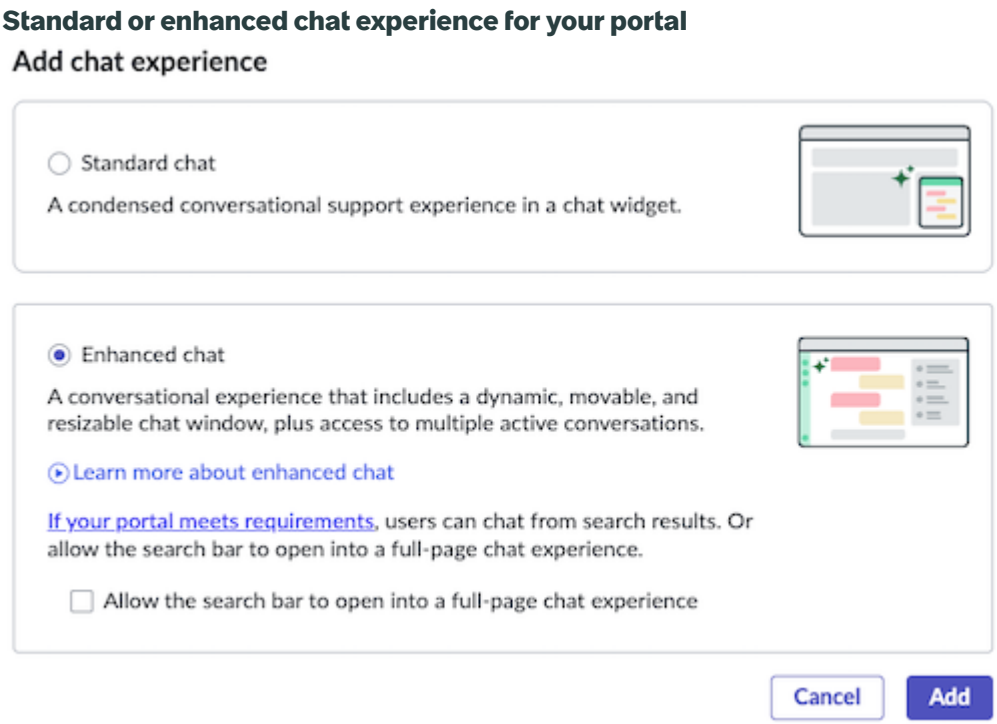
Natural Language Understanding (NLU) and large language model (LLM) topic discovery cannot coexist in the same portal.

a. Choose between the standard or enhanced chat experience, and then select **Add**. For more information, see Standard chat and Enhanced chat.

> **Note:**
> If you're a new customer and haven't set up an assistant with a display experience, only the enhanced chat option is available.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Standard or enhanced chat experience for your portal



If your portal has AI Search activated, enhanced chat includes the option to turn on the full-page chat experience. Select **Allow the search bar to open into a full-page chat experience**. For more information about whether your portal meets the requirements to have users chat from search results, see Portal prerequisites for enhanced chat.

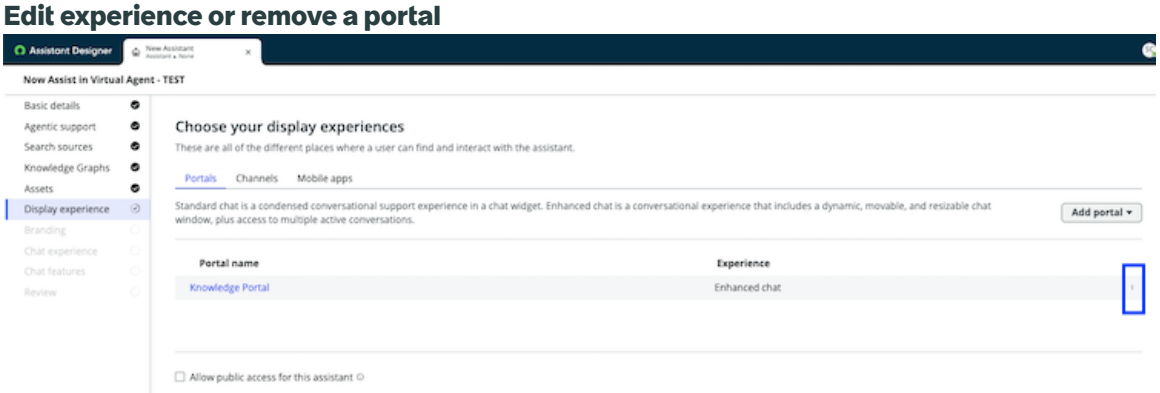
Note:
When you activate enhanced chat in a portal or mobile app, that portal or mobile app uses the assistant search application configuration rather than the portal or mobile app's search application configuration. VA Search Profile instead of the search profile specified in the portal's search application configuration. To learn more about search profiles and how they affect search behavior, see Search profiles in AI Search.

For information about the enhanced chat experience option, see Using Now Assist in Virtual Agent.

Note:
Customer Service Management (CSM) portals don't have the enhanced chat option.

b. Select the ellipsis to remove a portal or edit settings to toggle between enhanced chat and standard chat.

Edit experience or remove a portal



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

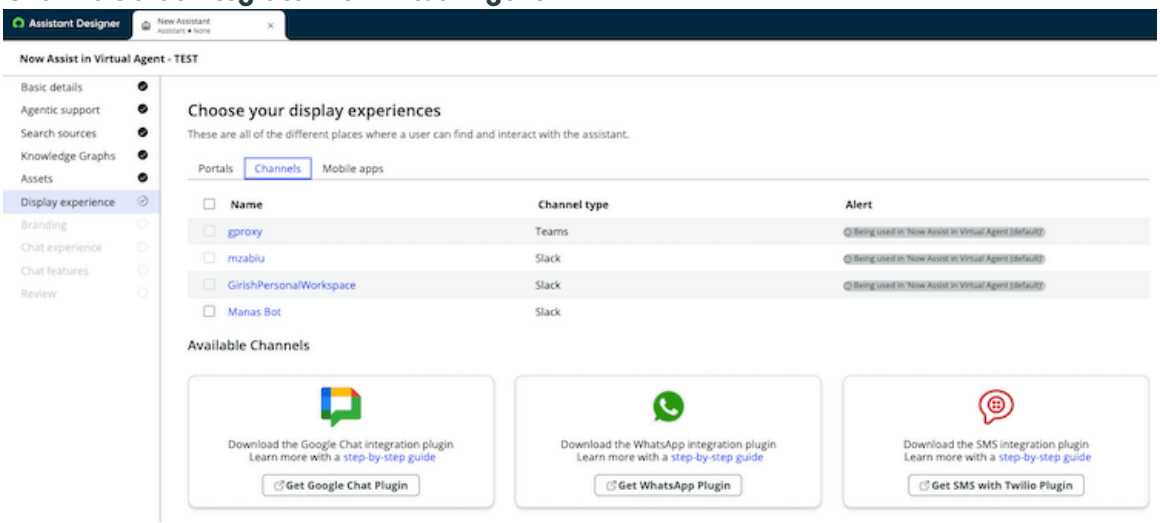
c. Select the **Allow public access for this assistant** check box to enable the assistant on public pages for all selected portals.

   Selecting the check box only makes the assistant response available to guest users. In addition to selecting the check box, ensure that the UI page and chat client are also set to public. For more information, see Make UI pages public or private, Configure page security by role, and Configure widget security.

   For public access across the entire instance, see **Conversational** > **Interfaces** > **Settings**.

2. In **Channels**, select your preferred channels.
   Now Assist in Virtual Agent integrates with these channels: Slack, Microsoft Teams, Google chat, SMS with Twilio, WhatsApp, and Amazon Connect. If the plugins are already installed, the available channel cards aren't displayed. For more information on integrating Virtual Agent with messaging apps, see Integrating Virtual Agent with messaging apps.

   Channels that integrate with Virtual Agent



   Getting the plugin redirects you to the ServiceNow Store. After the plugins are installed and configured, you can then select the ones that you want the assistant to integrate with.

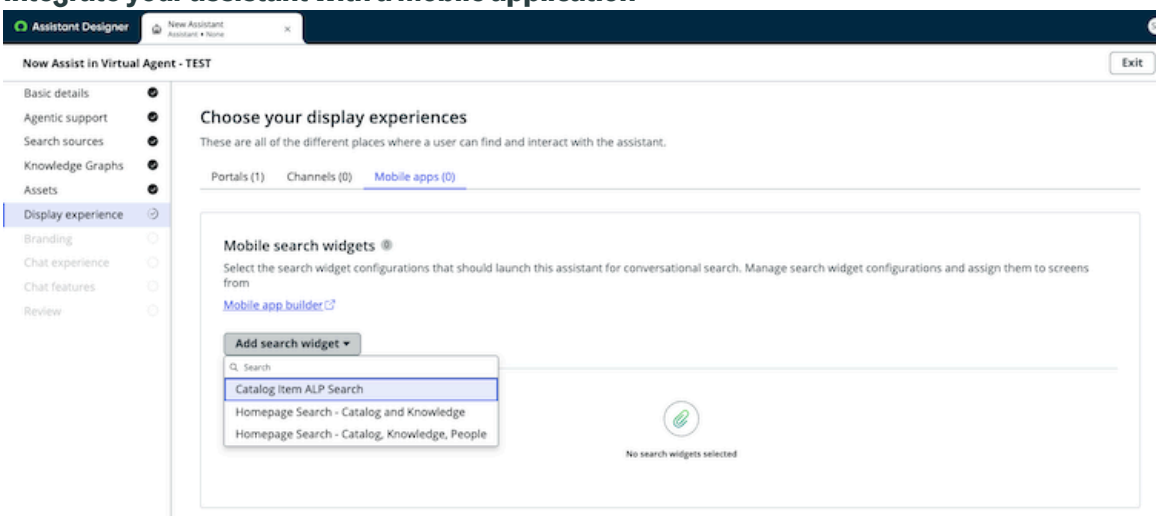
3. In **Mobile**, select a mobile app display experience.
   In the **Mobile** tab, if no mobile app is selected to display standard chat or enhanced chat, users see the traditional NLU Virtual Agent in the mobile app. There are different mobile app components that admins can display with an assistant: mobile search widget, chat launcher, prominent action button override, and a custom app (mobile SDK).

   a. To use Now Assist in Virtual Agent on your mobile app, download the Now Mobile App or Agent App and use Mobile App Builder to configure Virtual Agent in the app. For information about mobile prerequisites, see Mobile app prerequisites for enhanced chat.

   b. Select a mobile search widget from the **Add search widget** drop-down list. The assistant must have the enhanced chat experience enabled.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Integrate your assistant with a mobile application



The **Add chat experience** pop-up window appears.

Select a mobile search configuration and select **Allow the search bar to open into a chat experience** if you want enhanced chat to launch directly from the mobile search bar. If you don't select the check box, synthesized responses on the standard search results page are shown. Select **Add**.

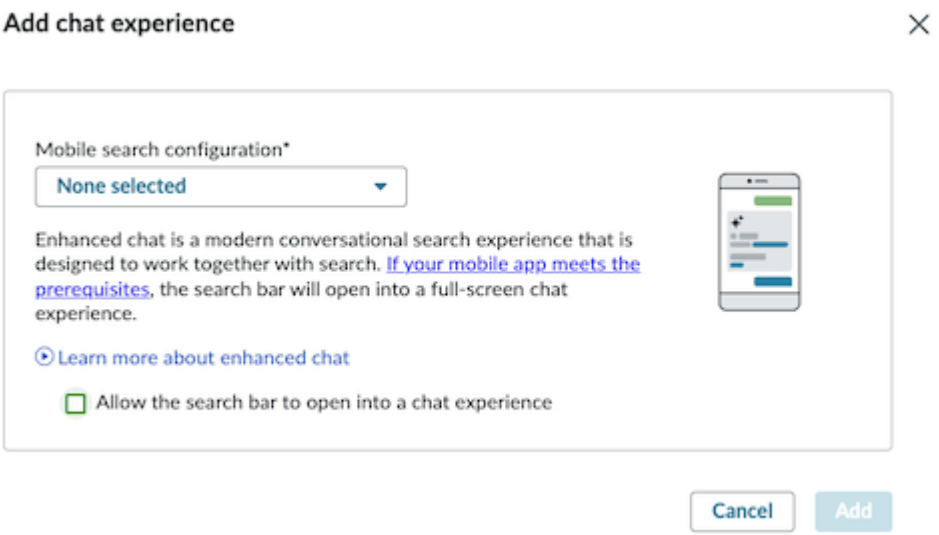Select a mobile search configuration for the assistant




The search widget configuration is added to the search widget name list.

c. In **Chat launcher functions**, select the drop-down menu to add a chat launcher function to open the assistant.

The **Add chat experience** pop-up window appears where you can optionally select a mobile search configuration if you have enhanced chat. All new customers only have enhanced chat enabled. Selecting a mobile search configuration is not available for standard chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

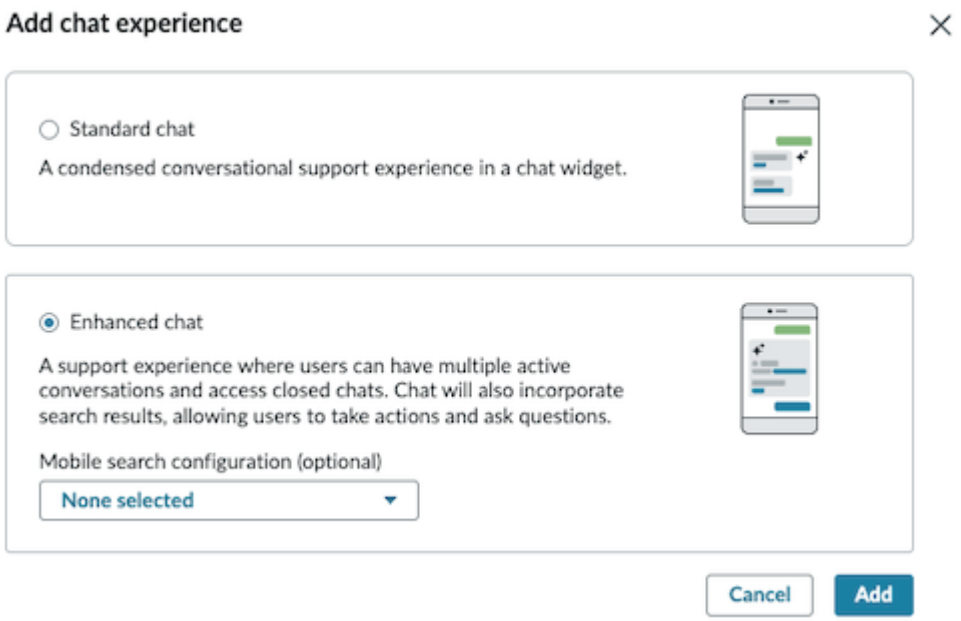Select an optional mobile search configuration for the assistant




Note:
Any prior Virtual Agent configurations that applied to the NOW mobile or Agent apps are migrated to apply to the chat launcher functions.

d. In **Prominent action button override**, select from the **Add tab override** drop-down menu to allow a prominent action button to launch the assistant when it's opened from the selected mobile navigation tab. This overrides what's been defined in the chat launcher function from any other assistant record.

The default setting for the chat launcher function associated with a prominent action button should still be configured in the chat launcher functions. If there is no record in the chat launcher function, the override won't work.

The same chat experience must be used to override the same prominent action button. For example, if the chat launcher section is configured to be enhanced chat, only an override record for enhanced chat would work.

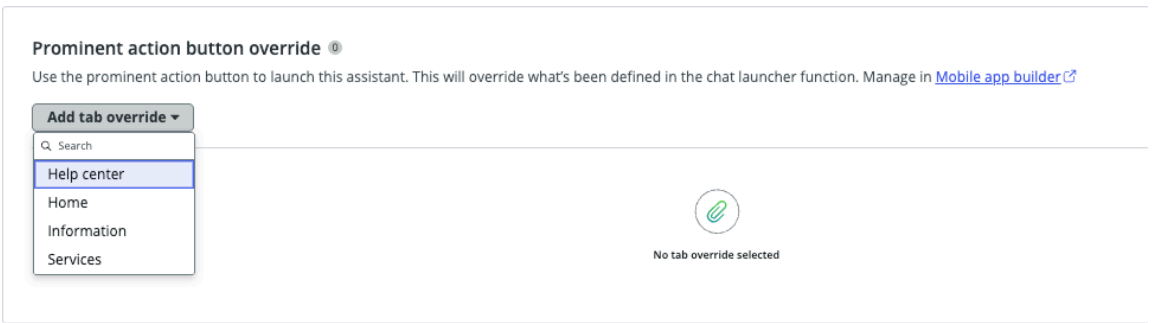Prominent action button override



The **Add chat experience** pop-up window appears where you can optionally select a mobile search configuration. For more information, see Using the prominent action button and Configuring a prominent action button.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

e. The **Custom apps section** is displayed when a mobile SDK plugin is installed. Select a custom mobile app integrated with the mobile SDK that launches this assistant.

   The **Add custom app** pop-up window appears. Select standard chat or enhanced chat.

4. Select the ellipsis to remove a mobile app or edit settings to toggle between the enhanced chat and standard chat experience, if standard chat is available to you.
5. Select **Save and continue**.

What to do next

See Brand an assistant.

Display your assistant on Platform or ServiceNow Studio

Use a chat experience for your Now Assist panel - Platform (default) assistant or Now Assist panel - Developer assistant.

Before you begin

See Add assets to a chat assistant.

Role required: virtual_agent_admin or admin

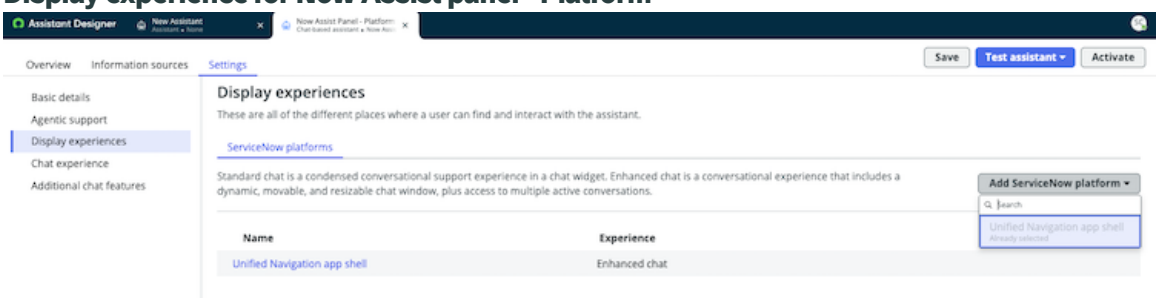
Procedure

1. Select a chat experience for your Now Assist panel - Platform (default) assistant.
   For Now Assist panel - Developer assistant, go to step 2.

   For Now Assist panel - Platform (default) assistant, new customers only have access to the enhanced chat experience. For more information on enhanced chat for Now Assist panel - Platform (default) assistant, see Now Assist panel.

   a. The **Add ServiceNow platform** > **Unified Navigation app shell** is preselected as the display experience. If you're using the standard chat experience, you can change it to the enhanced chat experience. However, changing it to the enhanced chat experience can't be undone. If you're a new customer, the **Unified Navigation App Shell** isn't preselected, and you will have to select it from the **Add ServiceNow platform** drop-down menu.

Display experience for Now Assist panel - Platform




   b. Select the ellipsis if you want to change the chat experience from standard chat to enhanced chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:
Switching to enhanced chat is permanent and can't be undone after you have selected **Save** and then **Save and continue**. If you're a new customer, enhanced chat is the only option.

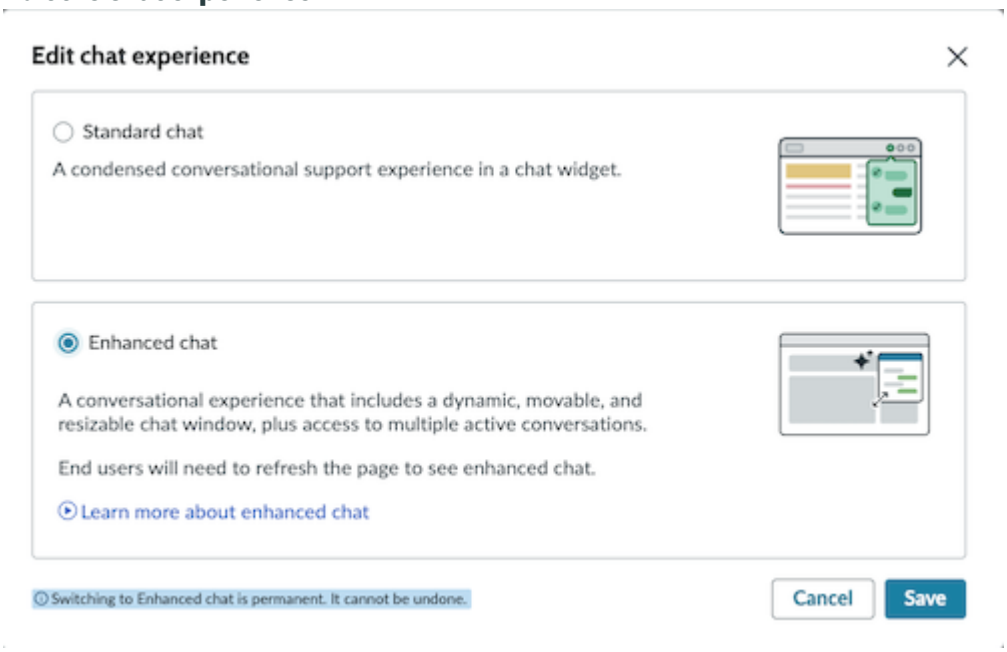
Edit the chat experience



2. Use ServiceNow Studio with standard chat for your Now Assist panel Developer assistant.

   ServiceNow Studio with standard chat is the only available display experience for the Now Assist panel - Developer assistant.

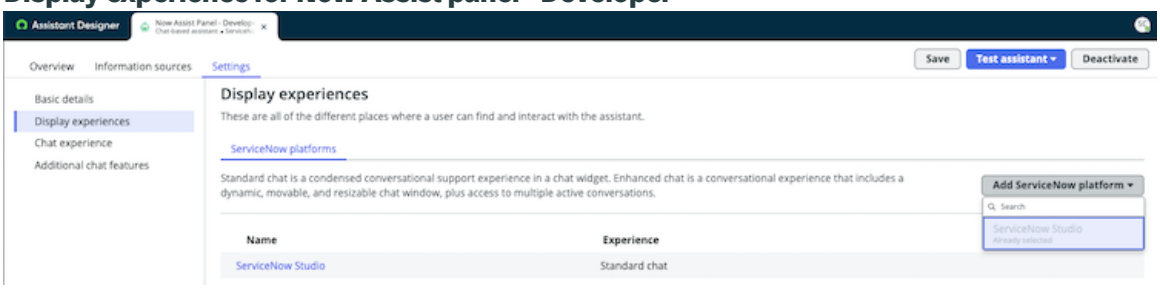Display experience for Now Assist panel - Developer



3. Select **Save and continue**.

What to do next
See Brand an assistant.

Brand an assistant

Decide how your Now Assist in Virtual Agent assistant should look by using the default branding or by creating a branding.

Before you begin
See Display your chat assistant on a portal, channel, or mobile app for Now Assist in Virtual Agent assistants.

See Display your assistant on Platform or ServiceNow Studio for Now Assist panel assistants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: virtual_agent_admin or admin

Procedure

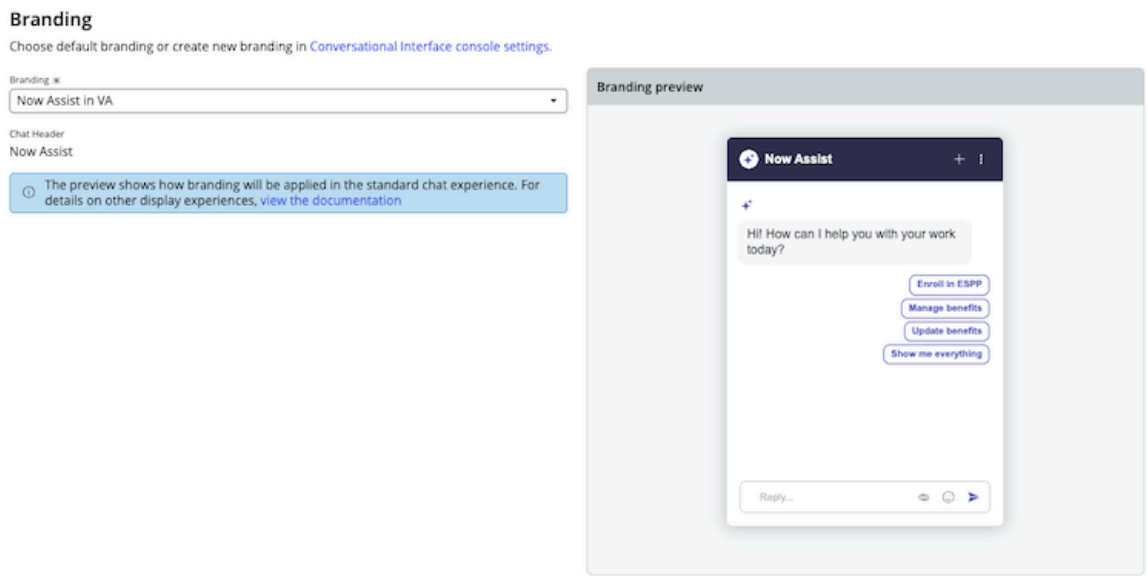
1. Select a default branding or an existing customized branding.

   Note:
   Branding isn't supported for Now Assist panel assistants (Platform and Developer). To create a branding, navigate to **Conversational** > **Interfaces** > **Settings**.

   To create a branding, navigate to **Conversational** > **Interfaces** > **Settings**.

   The preview shows how branding is applied to standard chat.

   Preview pane of a standard chat assistant

   - To customize your standard chat branding, see Set up your Now Assist in Virtual Agent branding.
   - To customize your enhanced chat branding Theming for Now Assist in Virtual Agent enhanced chat.

2. To configure the branding options in the drop-down list, navigate to **All** > **Conversational Interfaces** > **Settings** > **Branding**, and then select **View all**.
3. Select **Save and continue**.

What to do next
See Manage an assistant chat experience.

Manage an assistant chat experience

Manage the chat experience of your assistant.

Before you begin
See Brand an assistant.

Role required: virtual_agent_admin or admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Define your greeting, closing messages and fallback options. A standard chat preview pane is shown for the default greeting topic and the default closing topic. Selecting custom topics won't show a preview pane.

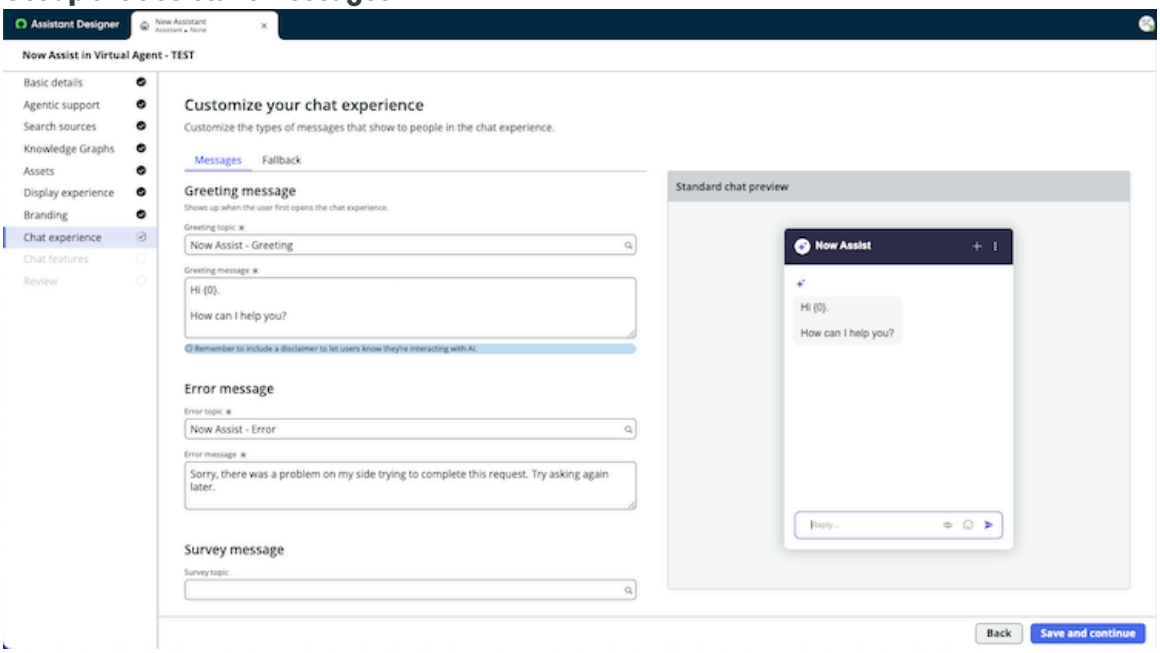
Fallbacks are shown in the preview pane when you toggle on each or all fallbacks.

Note:
Fallbacks aren't supported for Now Assist - Developer assistant.

Procedure

1. Select the **Chat experience** page.
2. In the **Messages** section, set up your greeting topic, closing topic, error topic, and survey.


Set up the assistant messages



Selecting a default topic shows its corresponding default message. You can also create your own topic from **All** > **Assistant Designer** > **Asset Library**, and use it as the greeting or closing topic. When selecting a custom topic, the message field isn’t shown in the preview pane.

Closing message only appears if you have a display experience with standard chat.

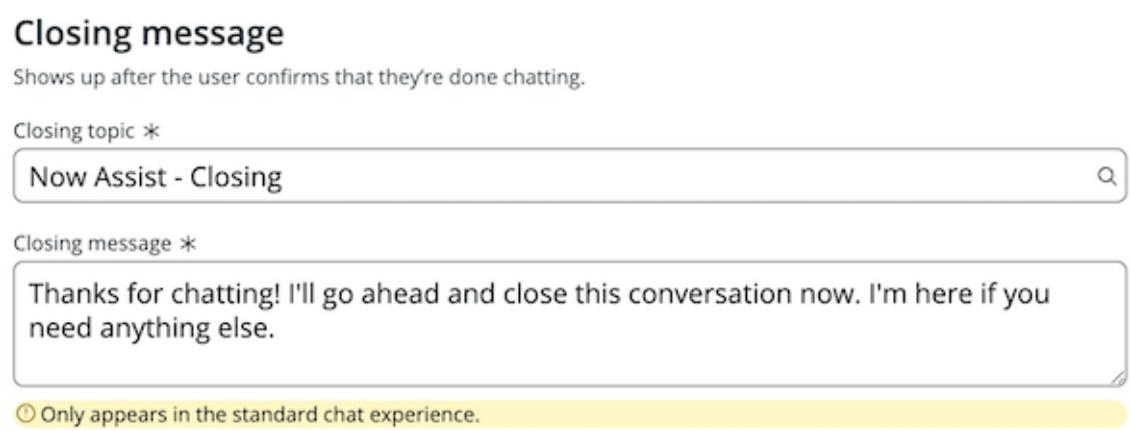Standard chat closing message



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Configuration options differ between different assistant types and display experiences.

Standard message options for assistants

Field	Description	Available in Now Assist in Virtual Agent assistants	Available in Now Assist panel - Platform assistant	Available in Now Assist panel - Developer assistant
Greeting topic	Now Assist - Greeting is the default greeting topic for Now Assist in Virtual Agent assistants. Now Assist Panel - Greeting is the default greeting topic for Now Assist panel assistants. Select a custom greeting if you want to replace the default greeting topic.	Yes	Yes	Yes
Greeting message	If the default greeting topic is used, the default greeting message is shown. If a custom greeting topic is selected, the **Greeting message** field doesn't appear.	Yes	Yes	Yes
Closing topic	The closing topic is only applicable for the standard chat experience. Now Assist - Closing is the default closing topic. To replace it, select a topic	Yes (only for standard chat)	No	No

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Field	Description	Available in Now Assist in Virtual Agent assistants	Available in Now Assist panel - Platform assistant	Available in Now Assist panel - Developer assistant
	from the drop-down menu.			
Closing message	**Closing message** field is shown and used if the default Now Assist - Closing topic is selected. If a custom topic is selected, the **Closing message** field isn't shown.	Yes (only for standard chat)	No	No
Error topic	Now Assist - Error is the default topic for Now Assist in Virtual Agent assistants. Now Assist Panel - Error is the default topic for Now Assist panel assistants. To replace the default topic, select a custom topic from the drop-down menu.	Yes	Yes	Yes
Error message	If the default Now Assist - Error topic is used, the default Error message is used. If a custom topic is used, the error message field isn't shown.	Yes	Yes	Yes
Survey	You can optionally select a custom topic to use it as a	Yes	Yes	No

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description	Available in Now Assist in Virtual Agent assistants	Available in Now Assist panel - Platform assistant	Available in Now Assist panel - Developer assistant
	survey topic. If you don't select any topic, the default survey experience is applied.			

3. In the **Fallback** section, activate one or more fallback options.

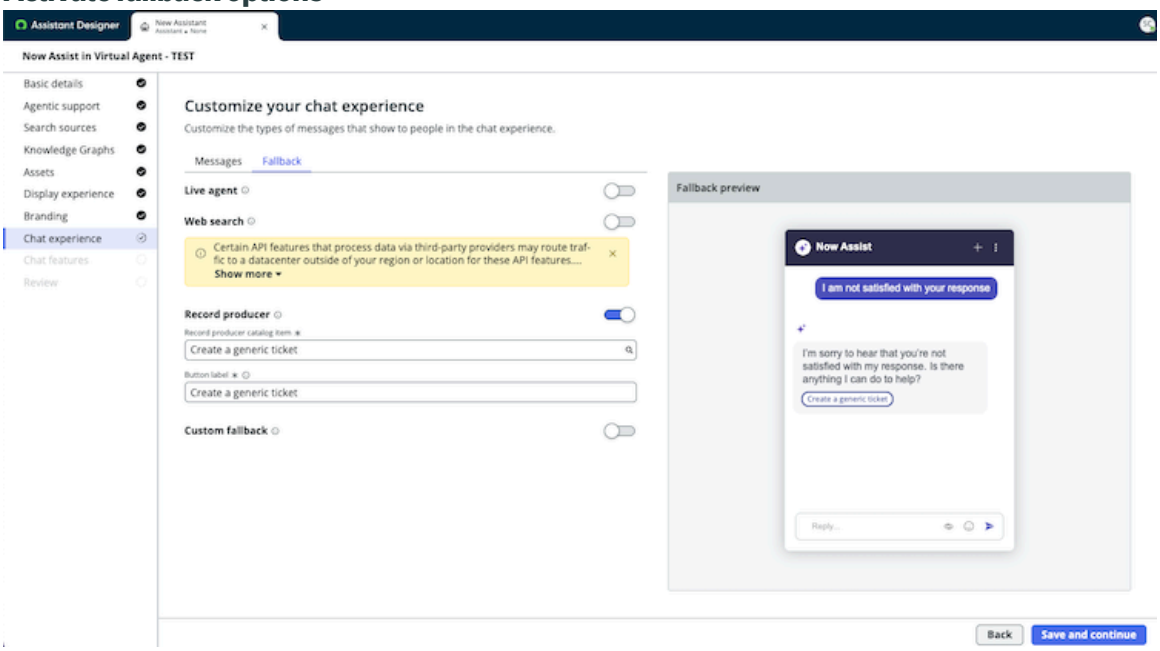Activate fallback options



Note:
For Now Assist panel - Platform assistant, web search, record producer, and custom fallback are available options. End this chat and survey are available for the standard chat experience.

Examples for when you might want to select more than one fallback option:

- To transfer a user to a live agent while also creating an incident record.
- To end a conversation while creating an incident report.
- To use a custom topic while having the live agent transfer option.

a. Route the user to an available agent by turning on **Live agent**. Selecting the **Live agent topic** field displays a drop-down for topics, and the text input is used for the fallback button in the assistant. The default **Live agent topic** is **Now Assist Live Agent**.The default button label is **Request a live chat**.

Note:
If your instance doesn't have Live Agent configured, the **Live Agent** fallback option is unavailable. To configure Live agent, select the **Configure** link and navigate to **CI Admin console** > **Settings** > **Agent chat** tab. Use the default Now Assist Live Agent topic or select a topic.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

b. Provide the user with web search results by turning on **Web search**. The web search option is useful when the synthesized response can't generate answers. The **Web search** check box displays a text input that is used for the name of the fallback button in the assistant. The default button label is **Search the web**. The default web search provider is Google Gemini.

> **Warning:**
> Certain API features that process data via third-party providers may route traffic to a datacenter outside of your region or location for these API features. See KB2596322 for a list of third-party APIs. Please consider your organization's data policies before using this feature.

If the instance is self-hosted or regulated, the warning message won't be shown.

c. Direct the user to a record producer catalog item to create an incident or a case by turning on **Record producer**.

A **Record producer catalog item** field check box displays a drop-down where you can select a catalog item. The default record producer catalog item is **Create a generic ticket**. The button label default is **Create a generic ticket**.

d. End the chat between the user and the assistant by turning on **End this chat**. End this chat is a fallback option for the standard chat experience. For the enhanced chat experience, conversations don't end. The text input is used for the fallback button in the assistant, and the default text input is **End this chat**. The button label default is **End this chat**.

e. Select a topic from the **Custom fallback topic** field by turning on **Custom fallback**. There isn't a default topic. The text input is used for the fallback button in the assistant. The default text input is **Custom fallback button**.

For more information about fallback options, see Enhanced chat.

4. Select **Save and continue**.

What to do next
See Enable additional chat features.

Enable additional chat features

Add chat features to your chat assistant.

Before you begin
See Manage an assistant chat experience.

Role required: virtual_agent_admin or admin

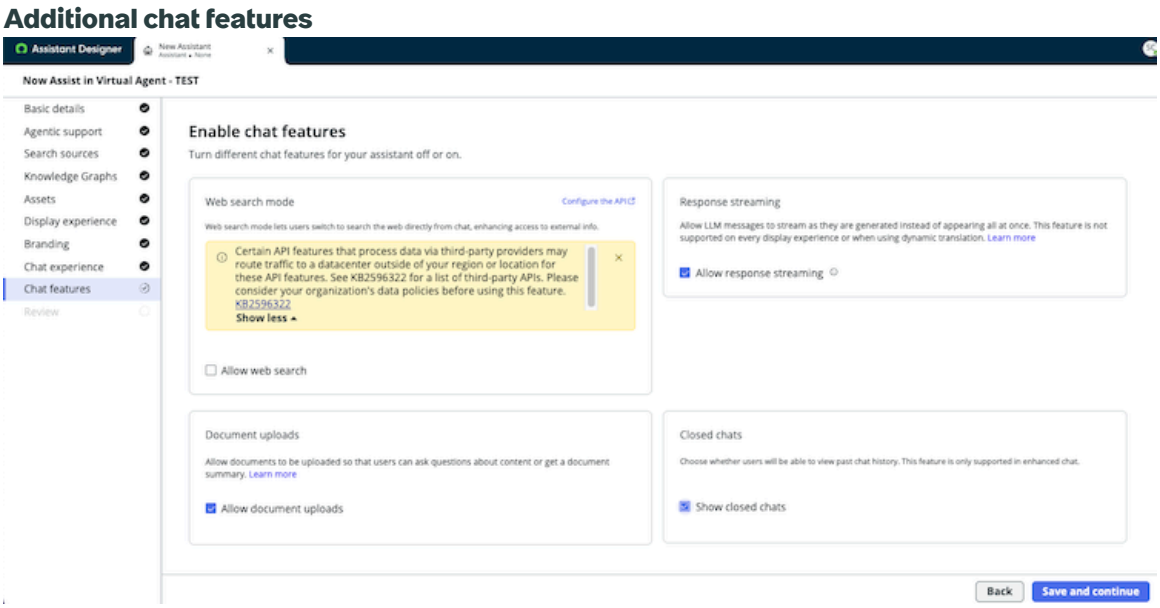
About this task
By default, all chat features, except web search mode, are turned on.

> **Note:**
> For Now Assist panel - Developer assistant, only response streaming is available.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. **Allow web search** to let users switch to search the web directly from chat, enhancing access to external info.



Web search mode enables users to search the internet by selecting a globe icon within the chat window. The default web search provider, at the instance level, is Google Gemini.

> **⚠ Warning:**
>
> Certain API features that process data via third-party providers may route traffic to a datacenter outside of your region or location for these API features. See KB2596322 for a list of third-party APIs. Please consider your organization's data policies before using this feature.

If the instance is self-hosted or regulated, the warning message won't be shown.

To change the web search provider, select **Configure the API** to bring you to the Now Assist Admin LLM model-selection page.

- If you want to use AWS Anthropic as the web search provider, switch the instance-level LLM to Claude.
- If the instance LLM is selected as Now LLM Service, Azure OpenAI, or Google Gemini, Gemini will still be the web search provider.
- If you want to use Perplexity AI or Azure OpenAI as the web search provider, you'll need to perform a custom manual configuration. For more information, see Edit model providers.

To change the LLM provider for Now Assist in Virtual Agent, select the AI agents skill group in Now Assist Admin console. Navigate to **All** > **Now Assist Admin** > **Settings** > **Manage AI models** > **Manage model providers** > **Edit model provider** > **Customize**.

2. **Allow response streaming** for LLM messages to stream as they are generated instead of appearing all at once.
   Response streaming is not supported on every display experience or when using Dynamic Translation. Streaming at the assistant level can be turned on regardless of whether Dynamic Translation is turned on or off. However, response streaming won't work when Dynamic Translation is turned on at the instance level.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Dynamic Translation can be turned off in the Now Assist Admin console. Turning off Dynamic Translation impacts the entire instance.

For more information, see Chat streaming responses.

3. **Allow document uploads** so that users can ask questions about content or get a document summary.
   For more information on file formats for uploading files to an assistant, see Upload documents in a chat.
4. **Show closed chats** to allow users to view past chat history.
   Closed chat is only supported in the enhanced chat experience.
5. **Allow voice input** so that users can speak to their assistant instead of typing.
   Voice input is only available for Now Assist panel - Platform (default) assistant. For more information about voice input, see Standard chat, Enhanced chat.

What to do next
See Review chat assistant settings.

Review chat assistant settings

Review your chat assistant settings.

Before you begin
See Enable additional chat features.

Role required: virtual_agent_admin or admin

About this task
The configuration for each step is shown on the review page. You will need to **Save and activate** or **Save and close** your assistant to be able to test it.

Procedure
1. Review your assistant settings.

Note:
Settings for Now Assist panel assistants differ from Now Assist in Virtual Agent assistants.

If a portal, messaging channel, or mobile app wasn't selected, the following alert appears at the top of the page.

Warning:
Select at least one display experience in order to activate this assistant. You can still save the assistant and add a display experience later.

   a. **Basic details** show the name of the assistant and the primary and secondary assistants that are linked.
   b. **Search sources** show the search profile, the internal and external search sources, and any copied search configurations that have been added to the assistant.
   c. **Knowledge Graphs** show the schemas that have been selected for the assistant.
   d. **Assets** show the asset types that have been selected (topics, subflows and actions, AI agents, and custom skills).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

e. **Display experience** shows which portals, channels, or mobile apps are selected for your assistant.

f. **Branding** shows the type of branding that you have selected.

g. **Chat experience** shows your greeting, closing, and fallback options that are selected for your assistant.

h. **Additional chat features** show which chat features are turned on for your assistant.

2. Select **Save and activate** or **Save and close**.

What to do next
See Test a chat assistant.

Test a chat assistant

Test your chat assistant.

Before you begin
See Review chat assistant settings.

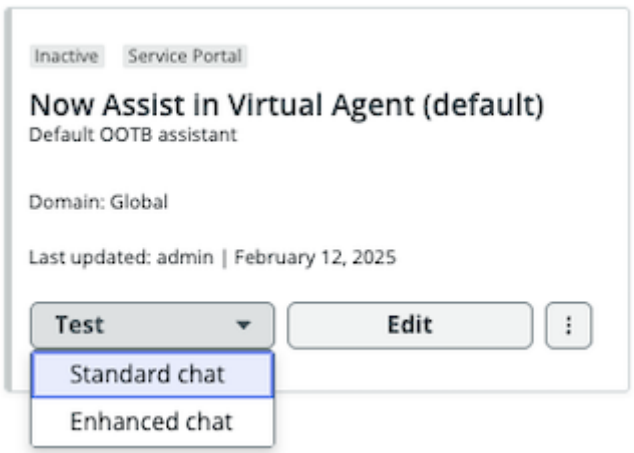
Role required: virtual_agent_admin or admin

About this task
It's important to test your assistant to judge the quality of results for common agentic workflows before moving your experience into a production environment. Validate the user interface experience, agentic workflow results, and fallback options.

Procedure

1. Navigate to **All** > **Assistant Designer** > **Assistants** tab and select **Test** for the assistant you wish to test.
   If selected portals only have the standard chat experience or only the enhanced chat experience enabled, the drop-down list doesn't appear. If both experience types are enabled, the drop-down list shows both of them.

Test a chat assistant



2. If you select **Enhanced chat**, the Virtual Agent Designer test panel for the enhanced chat experience is launched.
   If you select **Standard chat**, the chat widget panel is launched within Virtual Agent Designer.

Edit a chat assistant

Edit a chat assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

See View assistants

Role required: virtual_agent_admin or admin

About this task

When editing a chat assistant, actions may differ.

Actions that can be taken for default assistants

Assistant type	Activate	Deactivate	Edit	Test	Delete
Now Assist in Virtual Agent (default)	Yes	Yes	Yes	Yes	No
Now Assist panel - Platform (default)	Yes	Yes	Yes (except for name and description)	Yes	No
Now Assist panel - Developer	Yes	Yes	Yes (with limited configuration)	Yes	No
Now Assist Voice Deployment (default)	Yes	Yes	Yes	No	No

Procedure

1. Navigate to **All** > **Assistant Designer**.
2. From the **Assistants** tab, select **Edit** for the assistant that you want to edit.

   If you're only able to view an assistant and are unable to edit it, it's because you don't have permission to edit the assistant in a specific domain. For more information about assistants in different domains, see View assistants.

   Edit mode opens the assistant in a sub-tab where you can manage and test your chat assistant.

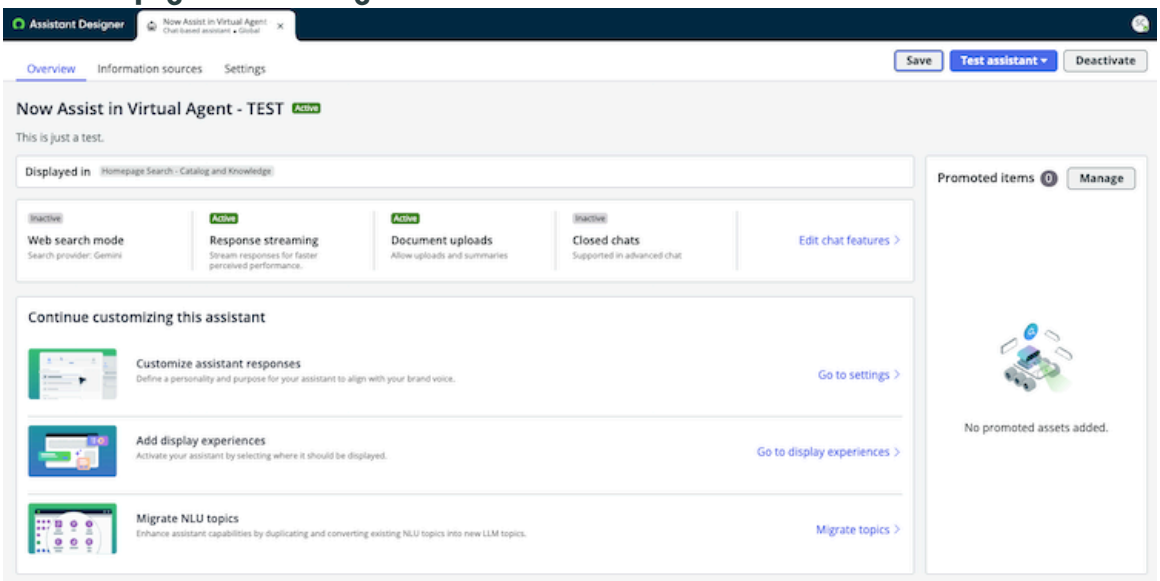
   The sub-tab shows the assistant name and whether it's a chat or voice assistant.

   The Overview page shows the following components:

   - Assistant name
   - Assistant status: active or inactive
   - Assistant hierarchy: primary or secondary assistant. This section only appears if an assistant is set as a primary or secondary assistant.
   - Assistant description
   - Display experience
   - Additional chat features: web search mode, response streaming, document uploads, closed chats, and voice input (for Now Assist panel Platform assistant).
3. From the Overview page, select the appropriate button or link to make your edits.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Overview page when editing an assistant



The main action buttons include:

- **Save**: Saves updates made to the assistant configuration.
- **Test assistant**: Test panel is an overlay. At the moment, voice assistants can't be tested.
- **Activate/Deactivate**: Turn on or off an assistant. One or more display experiences must be selected to activate an assistant.

a. To edit chat features, select the **Edit chat features** link. The **Settings** > **Additional chat features** page is displayed. For more information about web search mode, response streaming, document uploads, closed chats and voice input, see Enable additional chat features.

b. Customize assistant settings by selecting **Go to settings** link. For more information, see Create a chat assistant.

c. To add a display experience, select the **Go to display experiences** link. For more information, see Display your chat assistant on a portal, channel, or mobile app. For Now Assist panel assistants, see Display your assistant on Platform or ServiceNow Studio.

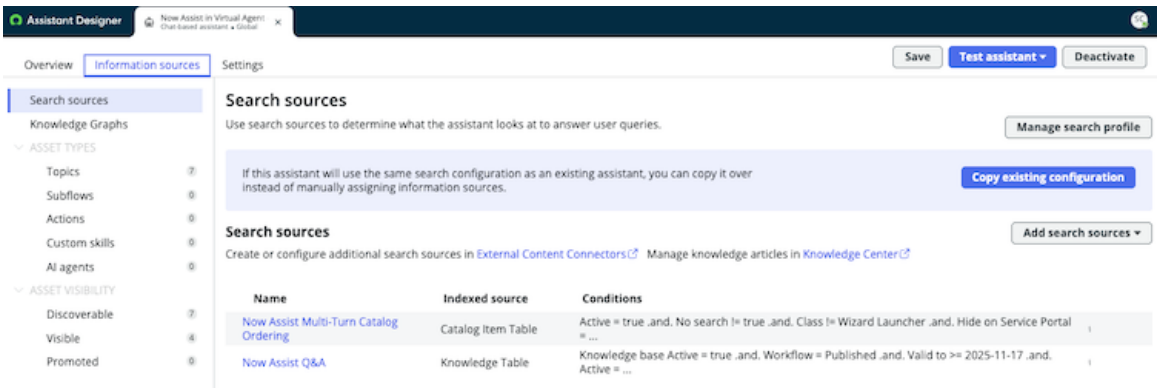
d. To migrate NLU topics, select the **Migrate topics** link. The Topic Migration application opens a new browser tab. For more information, see Migrate NLU topics to LLM topics.

e. To manage promoted assets, select the **Manage** button. The **Information sources** > **Promoted** page is displayed. All the assets that have been manually promoted for the assistant are shown.

4. From the **Information sources** tab, select the page that needs editing.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Edit information sources



- In **Search sources**, assign search sources to a chat assistant. Search sources are used to determine what the assistant looks at to answer user queries. If there were any search configurations that were previously done, those configurations would remain. For more information, see Assign search sources to a chat assistant.
- In **Knowledge Graphs**, edit your Knowledge Graph schema to represent semantic relationships in your data. For more information, see Add a Knowledge Graph schema to a chat assistant.
- In **Asset types**, add assets or migrate NLU topics. For more information, see Add assets to a chat assistant.
- In **Asset visibility**, all assets that are assigned to the assistant are shown.
  - Discoverable: The asset can be matched to the user utterances.
  - Visible: The asset is visible to the end user when **Show me everything** is selected.
  - Promoted: Promoted assets are shown on the assistant as the top welcome pill buttons when the user accesses the assistant. The maximum number of promoted assets is 6.
    - The number of manually promoted assets is shown.
    - The assets that have been manually promoted are shown, including asset name, asset description, asset type, and the condition label.
    - The manually promoted assets can be reordered.
    - When a promoted asset is deleted by selecting the trash can icon, the asset is demoted from the assistant. The asset still exists within the assistant.
    - When you select **Add Assets** you can select an **Asset Type** from the drop-down menu and then select a specific existing asset. Select **Save** to promote the asset.

5. From the **Settings** tab, select the page that needs editing.

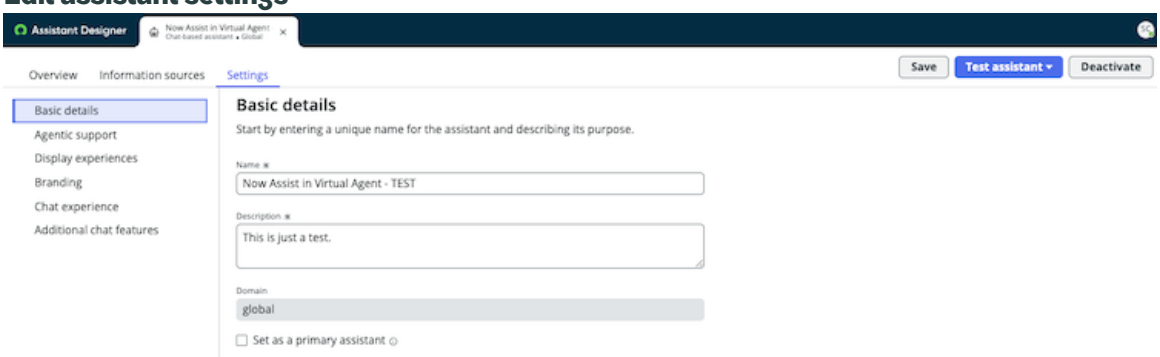Edit assistant settings



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- In **Basic details**, you can edit the name and description of the assistant. Names can't be duplicative of another assistant. You can set your assistant as a primary assistant and link it to secondary assistants.

  Note:
  For Now Assist panel Platform and Developer assistants, the basic details, such as name and description, can't be edited. For more information, see Create a chat assistant.

- In **AI agent support**, you can prioritize AI agents during skills discovery. For more information, see Use agentic support for a chat assistant.
- In **Display experiences**, you can select at least one portal, or integrate with your preferred messaging channels, to display your assistant. For more information, see Display your chat assistant on a portal, channel, or mobile app.
- In **Branding**, the option selected only applies to the standard chat experience. For more information, see Brand an assistant.
- In **Chat experience**, you can edit your greeting and closing messages, and fallback options. For more information, see Manage an assistant chat experience.
- In **Additional chat experience**, by default, all chat experiences except web search, are turned on. For more information, see Enable additional chat features.

Portal prerequisites for enhanced chat

Now Assist in Virtual Agent provides users with a content-driven and search-driven generative AI experience. To benefit from chat and search capabilities, your portal must have AI Search enabled before configuring your assistant.

Standard chat or enhanced chat offers different experiences. Enhanced chat provides users with a resizable chat window and search experience. To understand the differences between standard chat, enhanced chat, and enhanced chat with an additional full-page experience option, see Using Now Assist in Virtual Agent. If you only want a chat experience, there's no dependency on a portal's search configuration. However, ensure that your portal has the default chat widget button.

To benefit from enhanced chat's search capabilities, your portal should have AI Search enabled. To configure AI Search for your portal, navigate to **All** > **AI Search Admin Home**. For more information, see Enable and configure AI Search in Service Portal.

Note:
When you activate enhanced chat in a portal, that portal uses the VA Search Profile instead of the search profile specified in the portal's search application configuration. To learn more about search profiles and how they affect search behavior, see Search profiles in AI Search.

Within the enhanced chat experience, the full-page experience is an additional option.

The prerequisites for both the enhanced chat experience and the enhanced chat with full-page experience are:

1. Portal AI Search configuration
2. Faceted Search widget
3. ServiceNow default Typeahead Search widget (required only for the enhanced chat with full-page experience)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If you customized the Faceted Search widget or the Typeahead Search widget, you must reconcile your customizations with the latest versions to ensure that you have all of the updates.

Mobile app prerequisites for enhanced chat

Now Assist in Virtual Agent provides users with a content-driven and search-driven generative AI experience. Depending on whether you have opted into standard or enhanced chat when configuring your assistant, you can integrate three different mobile app components with an assistant.

For information on choosing how you want Now Assist in Virtual Agent to display on your mobile app, see Mobile Now Assist display experience for Virtual Agent. To understand the differences between Now Assist in Virtual Agent standard and enhanced chat experiences, see Using Now Assist in Virtual Agent.

The three different mobile app components that admins can integrate with an assistant are a mobile search widget, chat launcher, and custom app.

Mobile app components and offerings

Mobile app component	Description	Standard chat	Enhanced chat
Mobile search widget	The search bar widget within the ServiceNow Mobile App	No	Full-page experience only
Chat launcher	The default Virtual Agent chat widget	Yes, but only offered to existing Now Assist in Virtual Agent customers	Yes
Custom app (Mobile SDK)	The tool to display native Virtual Agent interface in a customer's own third-party app.	Yes, but only offered to existing Now Assist in Virtual Agent customers	Yes

Mobile app enhanced chat prerequisites

Mobile app component	Enhanced chat behavior	Prerequisites
Mobile search widget	Typing an utterance in the search bar opens a full-screen chat experience. Users can launch the search results page from the chat.	Admins must select the mobile search configuration to be used. For more information, see Display your chat assistant on a portal, channel, or mobile app.
Chat launcher	Selecting the chat function in a mobile app opens native Virtual Agent. A user can ask questions in native Virtual Agent and get Now Assist responses. Users can also	Admins can optionally select the Mobile Search Configuration to improve the metadata quality.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Mobile app enhanced chat prerequisites (continued)

Mobile app component	Enhanced chat behavior	Prerequisites
	launch the search results page from the chat.	
Custom app (mobile SDK)	Selecting the custom chat function in a third-party mobile app opens native Virtual Agent. Users can ask questions in native Virtual Agent and get Now Assist responses.	You can't use the Now Assist in Virtual Agent AI Search experience in a custom app. Search is run by the customer's third-party mobile app/

Create a voice assistant

Create an AI voice assistant to enable natural, conversational voice interactions between users and AI voice agents.

Before you begin

Role required: virtual_agent_admin or admin

Set up your preferred user identification and authentication methods to allow access to AI voice agents. See Authentication factors for more information.

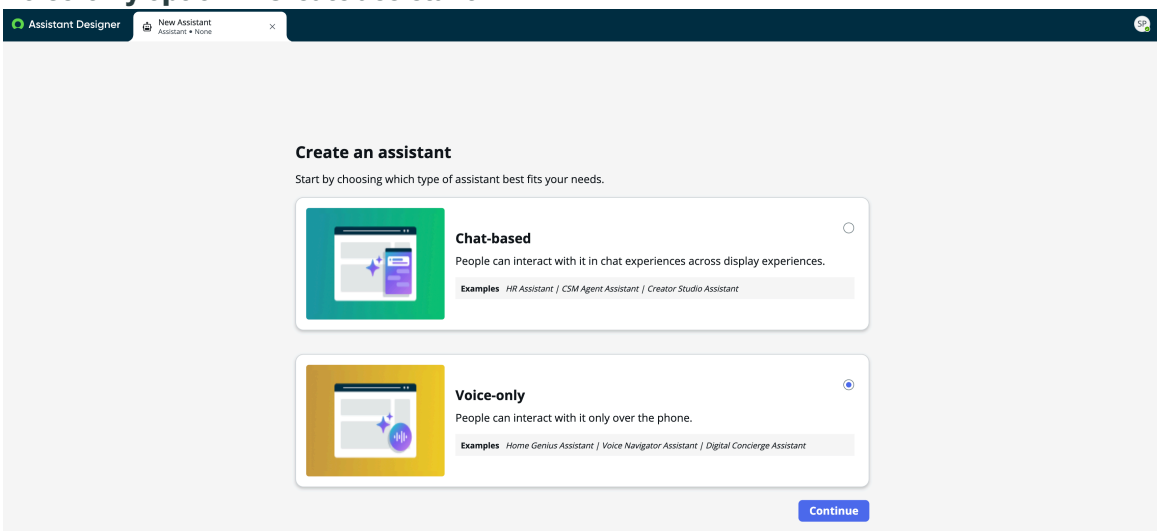
About this task

An AI voice assistant enables natural, conversational voice interactions between users and AI voice agents. It uses speech-to-text (STT), large language model (LLM), and text-to-speech (TTS) to understand and respond to callers in real time. You can configure a voice assistant with personalized voice and welcome message, fallback options, and assign AI voice agents with specific AI instructions. The fallback options include live agent transfer and ticket creation.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Assistant Designer** > **Assistants** and select **Create assistant**.
2. Select **Voice-only** option in the Create an assistant window and select **Continue**.


Voice-only option in Create assistant



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. Add basic details of the assistant.

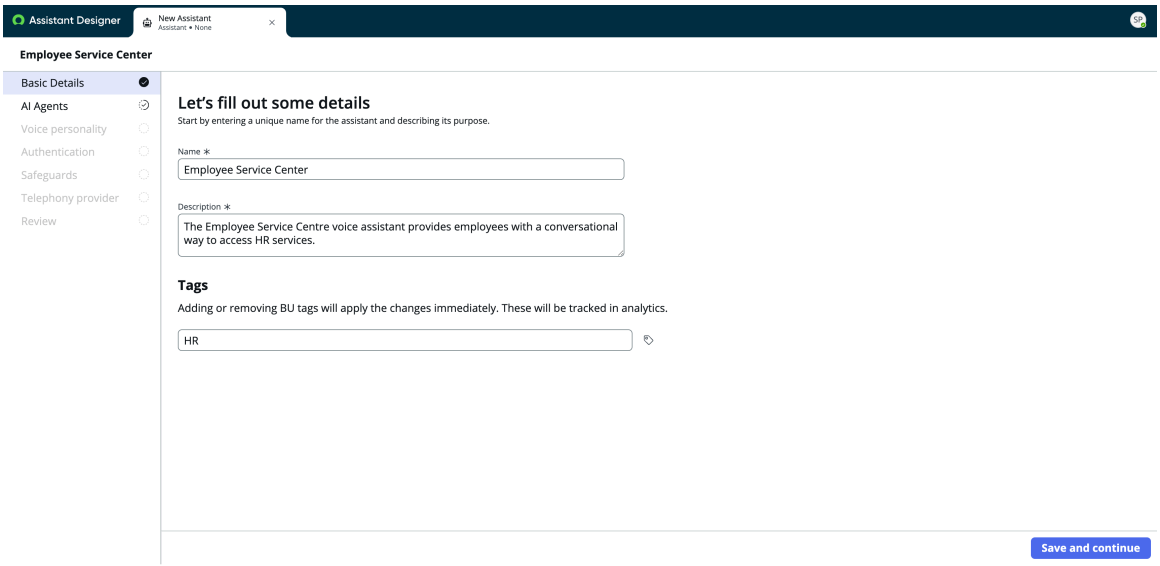Basic details form



a. On the form, fill in the fields.

Basic details form

Field	Description
Name	Name of the voice assistant. Provide a name according to the business outcome that the voice assistant targets. For example: HR Service Desk
Description	Brief summary of the business outcomes that your voice assistant targets. Example for the HR Service Desk: HR service desk to help resolve employee requests and inquiries.
Tags	Add tags to track analytics for the voice assistant. For example: HR Business Unit Tags do not affect the functionality of the AI voice agent or the end user experience.

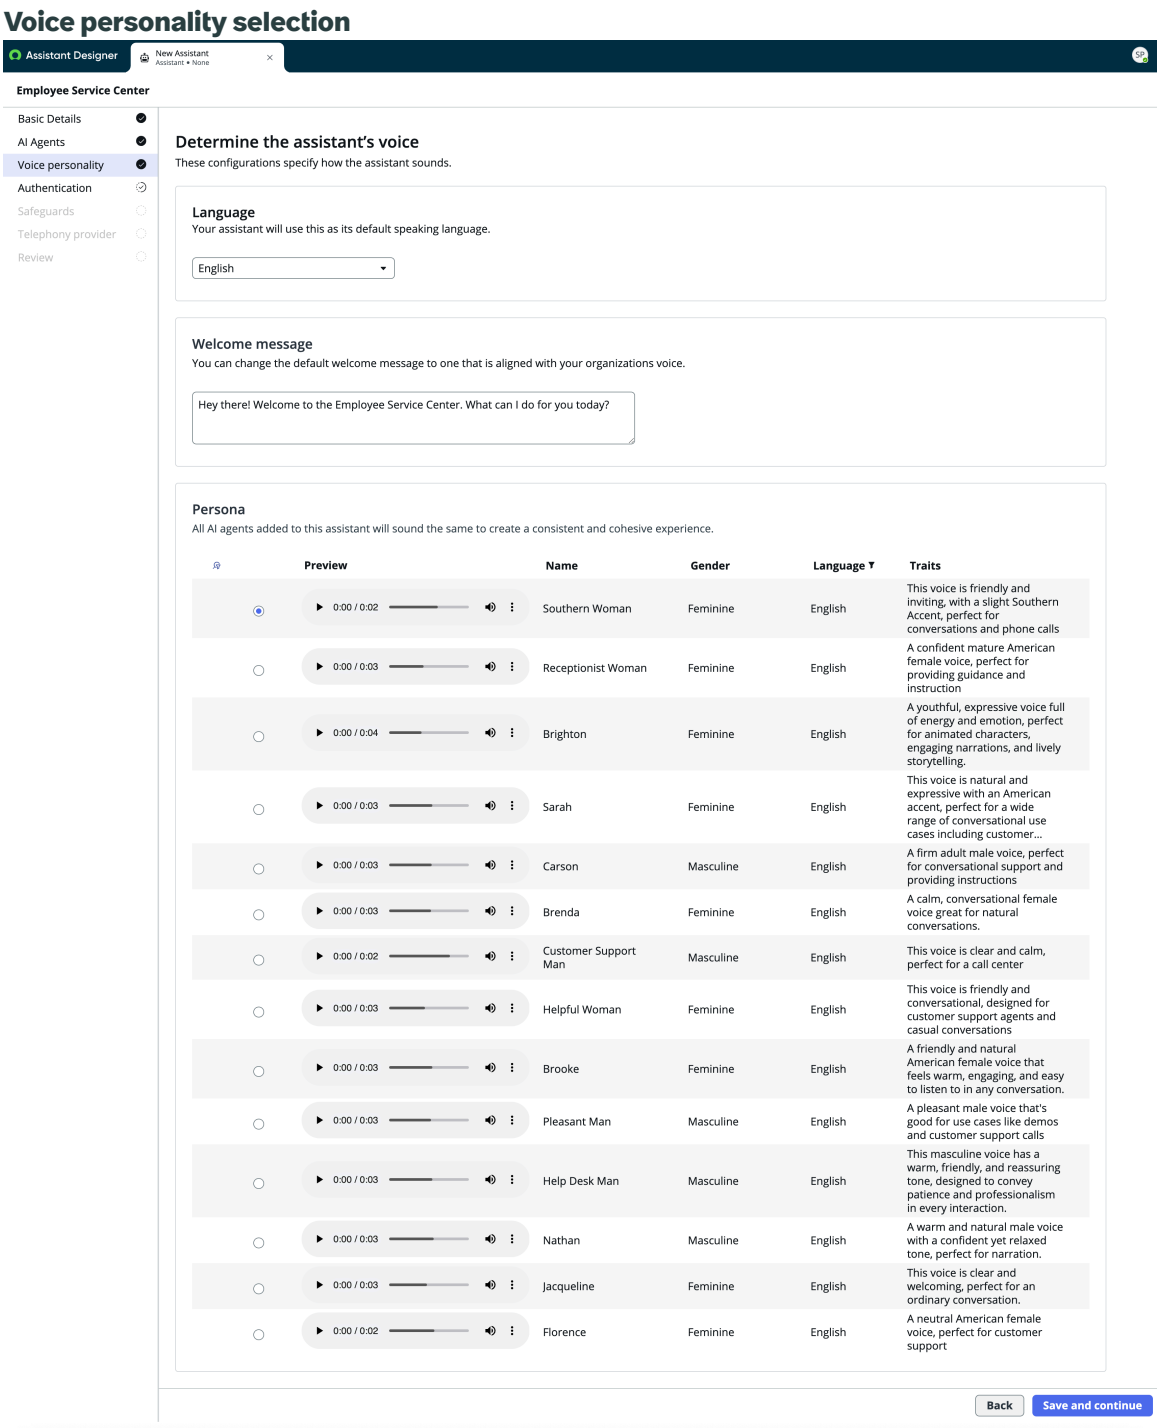
b. Select **Save and continue**.
You're directed to the AI Agents page.

4. Add one or more AI voice agents to the voice assistant by selecting **Add from library** and select **Save and continue**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
The voice assistant uses the AI voice agents to execute AI instructions. You can also create an AI voice agent on the fly by selecting **Create**. See Create an AI voice agent for more information.

5. Choose a voice personality.



a. Select the language your assistant will use as the default speaking language for interacting with the callers.
You can select from the following languages

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- English
- German
- Spanish

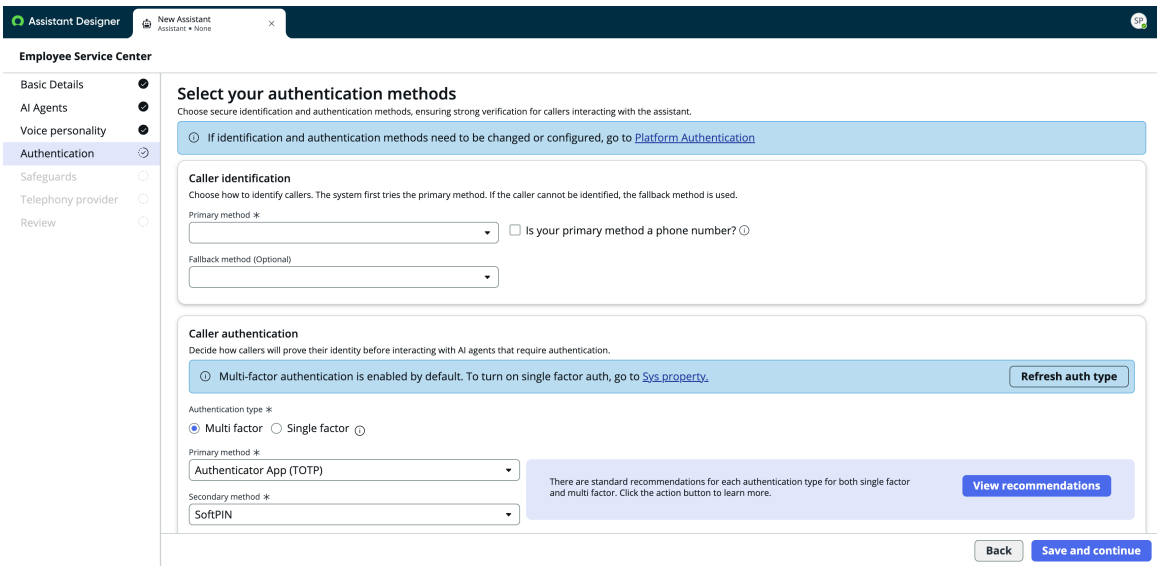
b. Add a personalized welcome message to greet the callers calling into the voice assistant.

c. Select a voice persona that best suits the conversational experience that you want to deliver through the voice assistant.
Preview the voice samples to determine the appropriate voice and tone. All AI voice agents connected to the voice assistants share the same voice.

d. Select **Save and continue**.
You're directed to the Authentication page.

6. Identify and authenticate the caller.

Authentication method selection



Identification and authentication factors must be configured at the platform level, where you define which tables and columns the system should use for both identification and authentication. After the factors are defined, they appear here as selectable options for your voice agent configuration. For more information, see Authentication factors.

a. Select the method used to identify the caller when the call begins.
Caller identification determines who the caller is before any authentication occurs. The information provided by the caller is matched with system records to identify the caller. If you select phone number as the primary identification method, enable the checkbox to allow the system to automatically match the caller's phone number to the incoming caller Id received from the telephony system.

b. Optional: Select the fallback method to identify the caller.
If the caller can't be uniquely identified through the primary method, the system automatically retries using the fallback method.

c. Enable the caller access to AI voice agents by selecting the authentication type and methods used.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Caller authentication verifies the caller's identity before allowing access to AI voice agents that require authentication.

Select from the following authentication types.

- Multi-factor authentication (MFA) requires callers to successfully complete more than one verification method configured before the system grants access. MFA is required by default.
- Single factor authentication requires the user to complete the configured verification method. To enable single factor authentication, you must set the `glide.voice.authenticate.mfa_mandatory` system property to `false`.

Select from the following authentication methods.

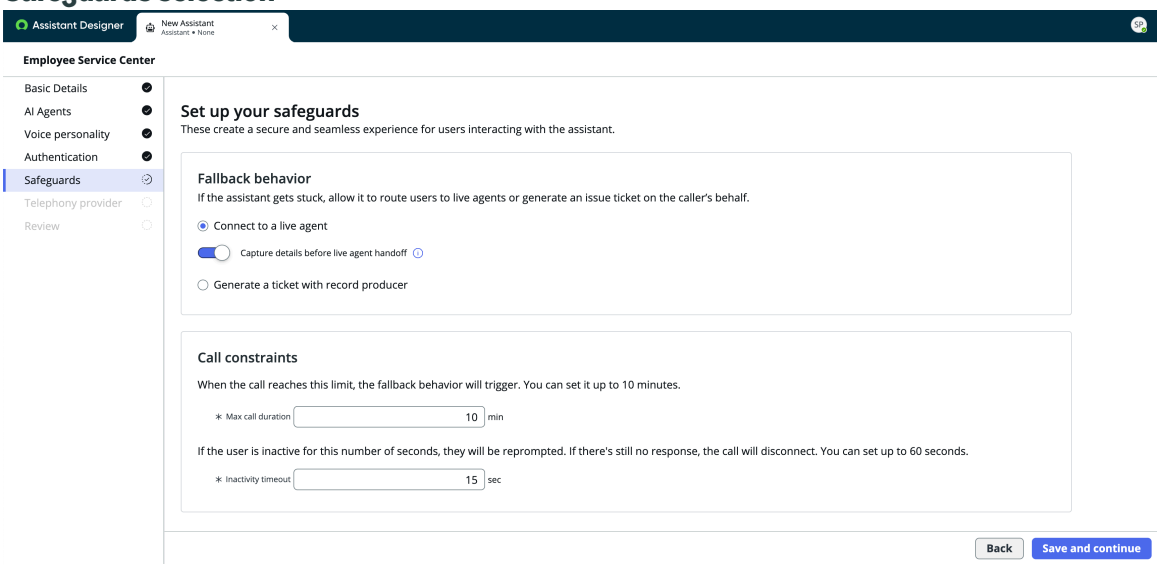
- Knowledge-based authentication (KBA)
- Okta Verify push notification
- SMS verification code
- Authenticator app time-based One Time Password (TOTP)
- Soft PIN

Note:
KBA authentication, for example, employee security questions, requires you to configure the questions and response fields at platform level and explicitly map them to the voice assistant before they can be selected here. To ensure secure and consistent verification, KBA authentication factor must use numeric data only, for example, date of birth, Social Security Number, or employee Id. Additionally, the source table used must reference the `sys_user` table so that caller identity can be validated reliably across the platform. See Knowledge-based authentication (Security Questions) for more information.

d. Select **Save and continue**.
You're directed to the Safeguards page.

7. Set up safeguards to create a secure and seamless experience for users interacting with the assistant.

Safeguards selection



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. Set fallback options to route the call to a live agent or create a ticket.

- **Connect to live agent** option. When selected, this option redirects the caller to a live agent. You must set up live agent transfer for your Contact Center as a Service (CCaaS) provider separately.

  Note:
  You can enable the **Capture details before live agent handoff** option, in which the voice agent prompts the caller to provide details in order to triage the call to the appropriate live agent.

- **Generate a ticket with record producer** option. When selected, this option creates a ticket for further tracking.

  Note:
  If you choose to use generating a ticket with record producer as the fallback option, you must keep the fields in the record producer simple and short to optimize the user experience for the phone channel. For example, a short description, description, and an optional field for the callback number should suffice. You can also enable the **Require authentication** option which ensures only confirmed employees are able to generate tickets.

b. Set the time limits for call duration and reprompting users after inactivity.

- Set Max call duration to trigger fallback behavior when the call reaches this limit.
- Set the duration of inactivity after which the user is reprompted for a response. If there's still no response, the call is disconnected. You can set upto 60 seconds.

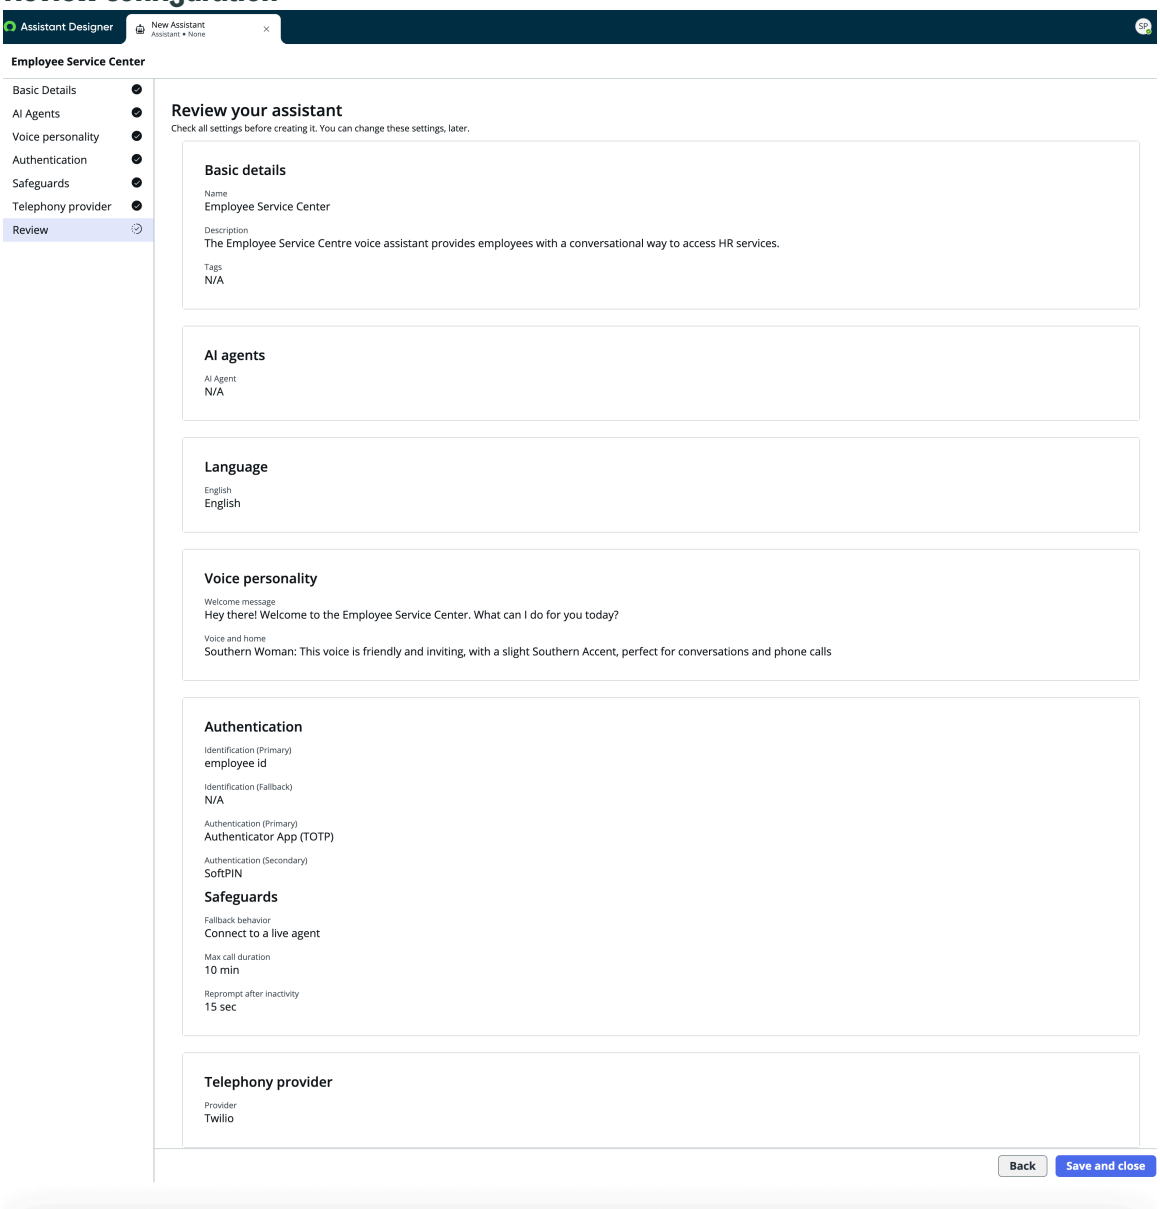
8. Integrate a telephony provider to power the voice assistant.
For more information, see Integrating voice assistant with CCaaS provider.

9. Review your voice assistant configuration.

You can change the configuration later.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Review configuration



10. Select **Save and close** to complete the configuration steps or review a previous step by selecting **Back**.

What to do next

Test the execution of your AI voice agent by manually calling in the telephony number to see if the AI voice agent functions the way you defined it. Review the transcript and logs for troubleshooting and improving the conversational experience of users. See AI voice agent reference for information on the tables containing transcript and logs.

Configure Now Assist in Conversational Catalog Request

Speed up and provide a conversational and streamlined experience based on generative AI while submitting a catalog item request in Virtual Agent. Your organization can increase self-service and reduce operating costs.

Before you begin

Role required: admin or catalog_admin, and flow_designer (to edit the subflow)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

About this task

Generative AI capabilities are leveraged to provide a human-like and efficient catalog request experience over the Virtual Agent conversational interface. It reduces the turnaround time for the request submission.

When the generative AI experience is configured for catalog item request submission, the following experience is available for a requester:

- Contextual question prompts that enable a more human-like conversation based on answers to previous questions.
- Slot filling that recognizes answers to 1 or more questions on the requester's input. For example, if the search keyword is `I'd like to request for a Windows Virtual Machine with 1TB disk space` and if the catalog item has questions about operating system and hard disk space, then the requester doesn't have to answer these questions again.
- Ability to answer multiple catalog item questions at the same time.
- Multi-turn catalog ordering where requesters can change answers at any point. For example, while answering a question about a phone's memory size, the requester can mention about changing the phone model selected in the previous question.
- Validation of questions' answers.
- Ability to exit the request submission process at any point.

Note:

- Read-only questions, questions with pre-filled answers, and questions that are already answered in the requester's search keyword are skipped.
- Though the following catalog item question types are supported in the conversation mode, natural language responses aren't supported for them:
  - Attachment
  - Masked

Procedure

1. To configure the Now Assist for Virtual Agent application that installs the Now Assist in Conversational Catalog Request application, see Configuring assistants overview.
   With this configuration, the *sn_now_assist_cr.llm.conversational.request.question.limit* system property value is set to 500 by default if that property wasn't edited earlier.
2. Enable the generative AI experience for a catalog item request submission in Virtual Agent.
   a. Navigate to **All** > **Service Catalog** > **Catalog Definition** > **Maintain Items**.
   b. Select a catalog item that must be requested in the conversation mode.
   For information about catalog items that are supported in the conversation mode, see Service Catalog topic blocks in Virtual Agent powered by Now LLM.
   c. On the catalog item form, confirm that the **Make the item non-conversational in VA** check box isn't selected.
   d. On the catalog item form, confirm that the **Turn off Now Assist (LLM)** check box isn't selected.
   If you select this check box, LLM isn't used and the data isn't sent to LLM. The item might become non-conversational.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:

- If you want the catalog item non-conversational, then select the **Make the item non-conversational in VA** check box. But if the catalog item contains some sensitive information that you don't want to send to LLM, then select the **Turn off Now Assist (LLM)** check box.
- If you clear the **Make the item non-conversational in VA** check box, the item will become conversational only if all the conditions are met for making an item conversational. For more information about such conditions, see Service Catalog topic blocks in Virtual Agent powered by Now LLM.

e. Select **Update**.

3. Confirm that the fallback record producer is configured in the **Fetch generic ticket producer for conversational catalog request** subflow.

   In a few cases, when a requester is searching for a catalog item, AI Search might not be able to return any results. For example, when the catalog item isn't available or when the requester has no access to view the catalog item. In such cases, the fallback mechanism is activated for the Virtual Agent conversation. Virtual Agent tries to connect the requester to a live agent. If a live agent isn't available, then the **Create a generic ticket** record producer, which creates an incident to resolve the issue, is triggered.

   - The **Now Assist Fallback** topic controls the fallback mechanism. This topic triggers the record producer returned by the **Fetch generic ticket producer for conversational catalog request** subflow.
   - This subflow returns the value of the *sn_nowassist_va.now.assist.generic.ticket.fallback.record.producer* property. By default, this property's value is the sys_id of the **Create a generic ticket** record producer.

   Note:
   Both the *sn_nowassist_va.now.assist.generic.ticket.fallback.record.producer* property and the **Create a generic ticket** record producer are available in an instance when the Now Assist for Virtual Agent application is installed.

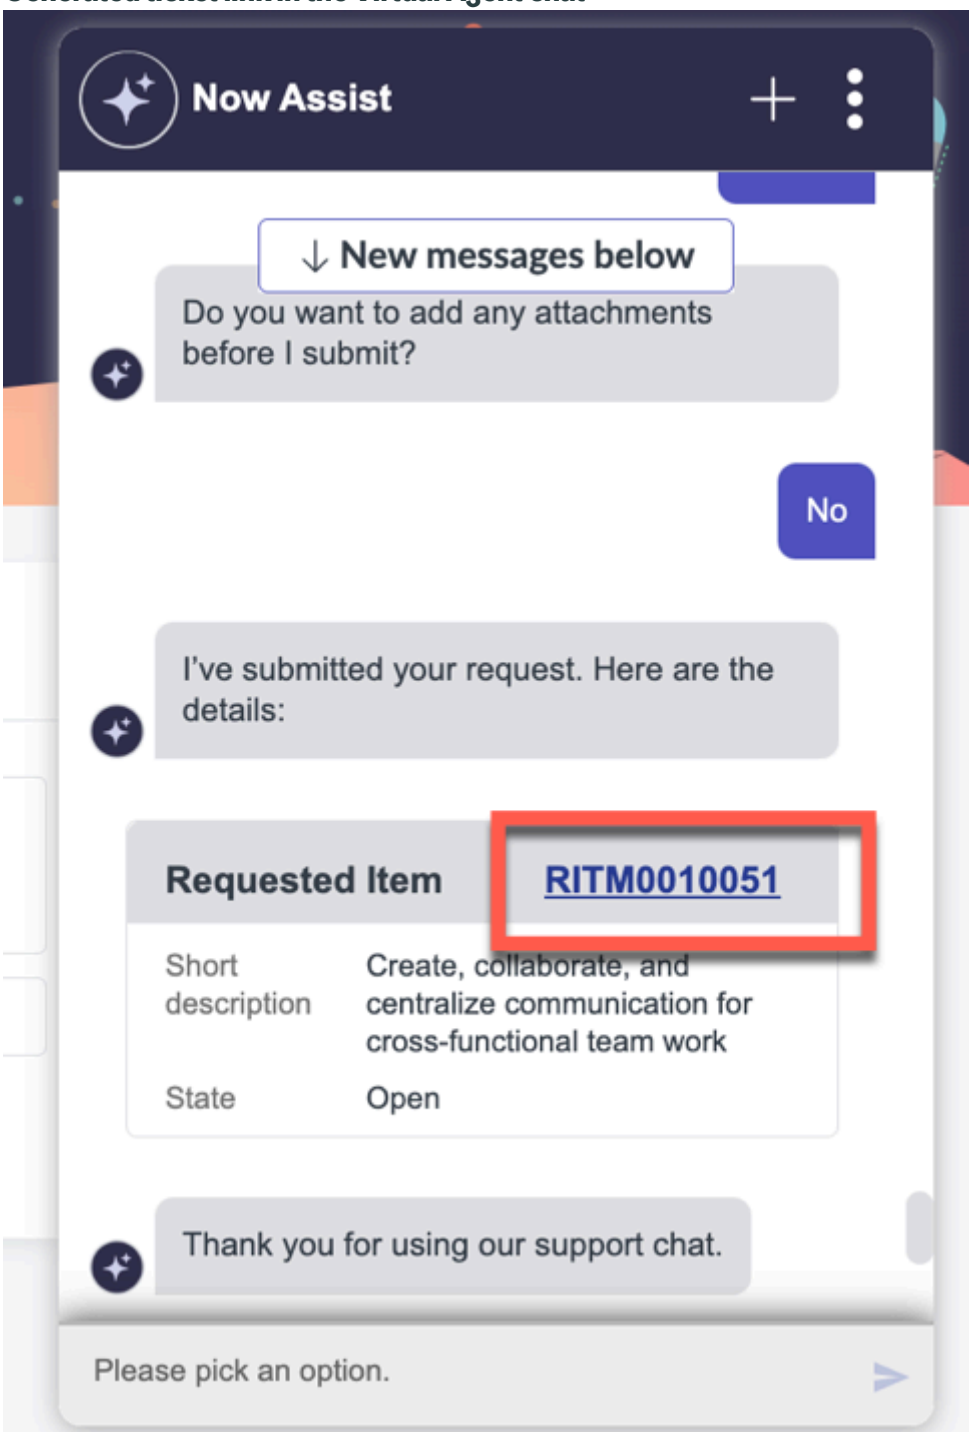
   Additionally, you can customize the fallback process by configuring your own record producer or by building additional logic in a new subflow.

4. **Optional:** Configure URL navigation settings to specify where the generated ticket link in the Virtual Agent chat opens, see Configure URL navigation for chat links.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

(Optional) For information about URL navigation in Virtual Agent, see URL navigation in Conversational Interfaces. For information about Virtual Agent scripts, see Virtual Agent scripts.

Generated ticket link in the Virtual Agent chat



Related topics

Service Catalog topic blocks in Virtual Agent powered by NLU

Service Catalog topic blocks in Virtual Agent powered by Now LLM

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Turn on the subflows and actions skill

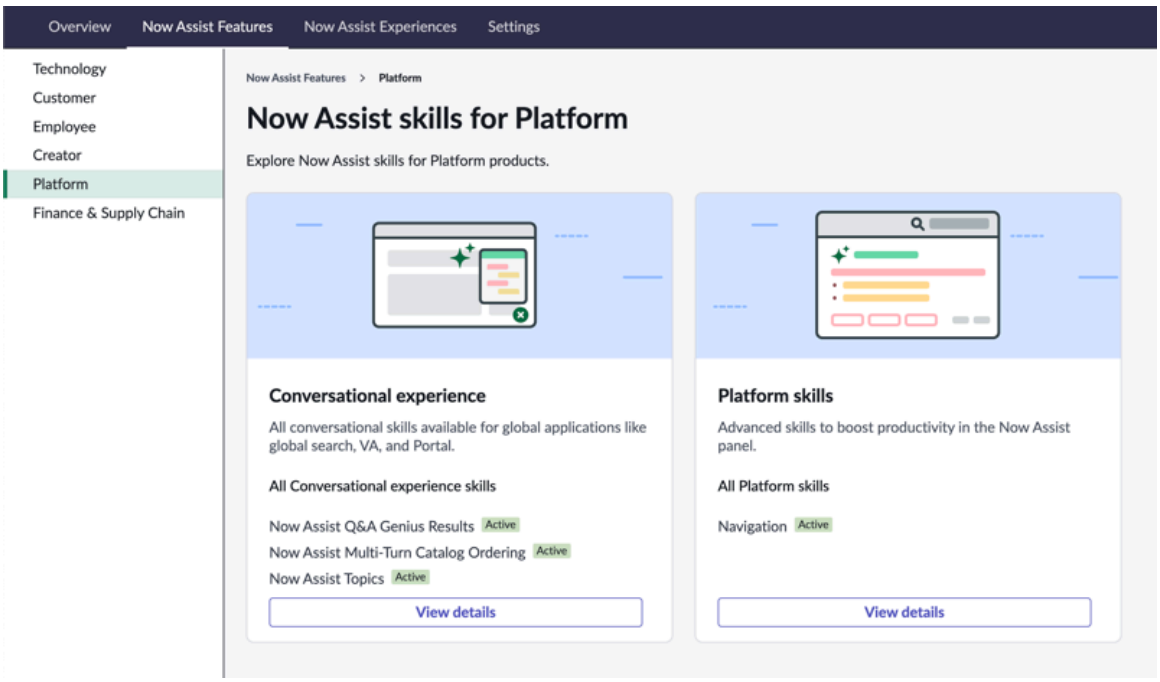
Turn on the subflows and actions skill to run subflows and actions from Now Assist conversations.

Before you begin

- Configure the Now Assist in Virtual Agent application. See Configuring assistants overview.
- Role required: virtual_agent_admin or admin

Procedure

1. Navigate to **All** > *Now Assist Admin* > **Now Assist Features**.
2. In the workflow list, select **Platform**.



3. In the Conversational experience card, select **View details**.
4. Select **All available Conversational experience skills** > **Subflows and actions** > **Turn on skill**.
5. In the Conversational experience card, verify that the **Subflows and actions** skill is activated under **All Conversational experience skills**.

What to do next

Grant one or more user roles to personnel who will work with conversational subflows and actions. For a list of available user roles, see User roles for conversational subflows and actions.

Disable the org chart

Disable your organizational chart either for a particular deployment channel or for the instance.

Before you begin

Role required: admin

About this task

The org chart displays in the Virtual Agent's interactive view whenever you open a people citation's popover. You can disable the org chart so that it doesn't display as an option in the people citation's popover.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Decide whether you want to disable the interactive view's org chart at the deployment level or instance level.
2. Choose one of the following scenario's and complete the steps.

Customize citation message

Inline citations are intended to show from which ServiceNow knowledge articles the response is generated. This can include information from attachments and knowledge blocks, or from external content such as Microsoft SharePoint and Confluence. Inline citations also appear when the user is presented with an action to perform, for example, within a Virtual Agent topic or a catalog item.

Before you begin

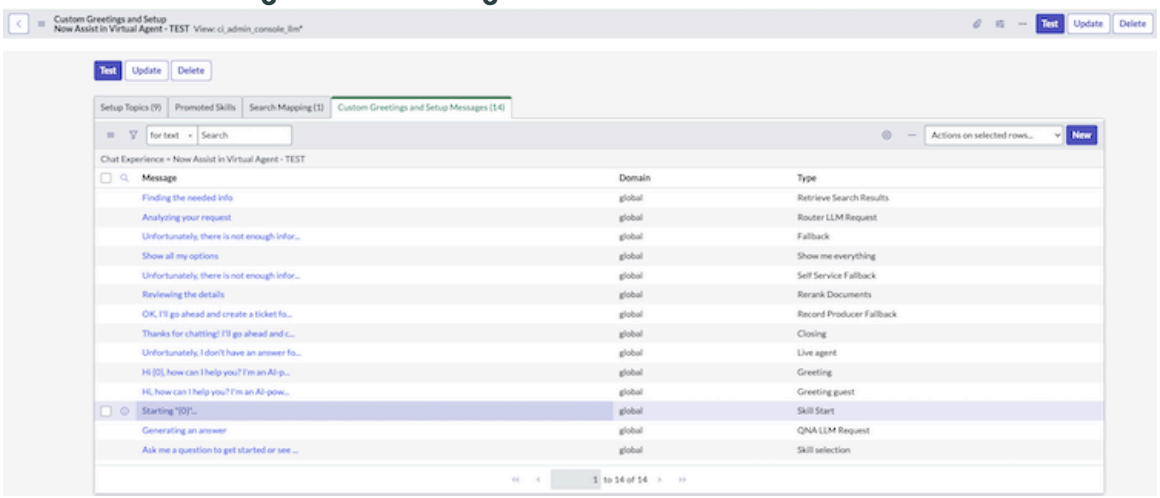
For more information about Now Assist in Virtual Agent citations, see Using Now Assist in Virtual Agent.

Role required: admin

Procedure

1. To change the citation text within the **Sources** section of an LLM-generated message before auto-executing the first step in the action, navigate to **All** > **sys_cs_context_profile.list**.
2. Select an assistant.
3. In the **Custom Greetings and Setup Messages** tab, select **Starting "{0}"** to modify the LLM-generated message in the citation.

Customize the LLM-generated message in the citation



4. Select **Update**.

Set up your Now Assist in Virtual Agent branding

Create different Now Assist in Virtual Agent branding configurations for the various organizations that use your instance. These configurations only apply to chat widget branding on portals.

Before you begin

For more information about Now Assist in Virtual Agent, see Now Assist in Virtual Agent and Configuring assistants overview.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Role required: virtual_agent_admin or admin

About this task

Create different chat widget branding configurations.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. In the Display Options section, select **View All** next to **Branding**.
3. Select **New** to create a branding configuration or select **Now Assist in VA** to update it.
4. To edit the settings, see Set up your Virtual Agent bot's branding.

Theming for Now Assist in Virtual Agent enhanced chat

You can customize the look and feel of the Now Assist in Virtual Agent enhanced chat experience in your ServiceNow portal by updating the relevant Cascading Style Sheet (CSS) variables.

As a Virtual Agent admin or admin, you can customize the default enhanced chat theming variables. Information on how to customize theming can be found in Create a portal theme. Edit these variables in the following table within the CSS variables field (sp_theme) record. You can also configure these variables with a CSS Include associated with a portal's theme.

Note:
For the variables, nass refers to enhanced chat.

For more information about enhanced chat, see Enhanced chat.

CSS variables for Now Assist in Virtual Agent enhanced chat

Variable	Description	Default Values
$now-sp-nass-agent-bubble-font-color	Agent text message font color.	$text-color
$now-sp-nass-chat-user-message-bubble-bg-color	User text message bubble background color.	$brand-primary-lightest
$now-sp-nass-user-bubble-font-color	User text message font color.	$text-color
$now-sp-nass-timestamp-color	Timestamp text color.	$text-muted
$now-sp-nass-secondary-text-color	Secondary text color for example for Active.	$gray-dark
$now-sp-nass-system-msg-text-color	System message text color.	$text-muted
$now-sp-nass-base-input-field-placeholder-and-highlight-text-color	Input text color and with .45 opacity for placeholder.	$text-color
$now-sp-nass-base-link-color	Link color.	$brand-primary
$now-sp-nass-color-secondary_2	Now Design System secondary-2 color.	$brand-primary-darker
$now-sp-nass-modeless-dialog-header-bg-color	Background color for primary Now Assist header bar.	#ffffff

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

CSS variables for Now Assist in Virtual Agent enhanced chat (continued)

Variable	Description	Default Values
$now-sp-nass-modeless-dialog-header-text-color	Text color for primary Now Assist header.	$text-color
$now-sp-nass-base-toolbar-labels-and-icons-color	Left-panel tool bar icons.	$gray-light
$now-sp-nass-toolbar-icons-color--hover	Left-panel tool bar icons in hover state.	$gray-dark
$now-sp-nass-toolbar-icons-color--active	Left-panel tool bar icons in active state.	$text-color
$now-sp-nass-toolbar-icons-fullscreen-mode-color	Left-panel tool bar icons in full-screen mode.	darken ($brand-primary-darker, 15%)
$now-sp-nass-toolbar-icons-fullscreen-mode-color--active	Left-panel tool bar icons in full-screen mode for active state.	$brand-primary-darker
$now-sp-nass-window-control-icons-color	Window controls icons.	$text-muted
$now-sp-nass-window-control-icons-color--hover	Window controls icons in hover state.	$text-color
$now-sp-nass-window-control-icons-color--active	Window controls icons in active state.	$text-color
$now-sp-nass-feedback-and-search-result-panel-color	Feedback panel and search result icon.	$text-muted
$now-sp-nass-feedback-and-search-result-panel-selected-color	Selected icon in feedback panel.	$text-muted
$now-sp-nass-action-and-kb-citation-color	Action and Knowledge Base link color	$link-color
$now-sp-nass-color-primary-0	Primary-0 for pills/primary buttons.	$brand-primary-lightest
$now-sp-nass-color-primary-2	Primary-2 for pills/primary buttons in active state.	$brand-primary-darker
$now-sp-nass-button-primary-bg-color	Submit button in choice picker control.	$btn-primary-bg
$now-sp-nass-button-primary-bg-active-color	Button primary active background color.	$btn-primary-bg
$now-sp-nass-button-selection-text-color	Now Design System secondary-1 color	$brand-primary
$now-sp-nass-tooltip-bg-color	Tooltip background color for input field icons.	$tooltip-bg
$now-sp-nass-tooltip-text-color	Tooltip text color for input field icons.	$tooltip-color
$now-sp-nass-alert-critical-color	Unread indicator color.	$brand-danger

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

CSS variables for Now Assist in Virtual Agent enhanced chat (continued)

Variable	Description	Default Values
$now-sp-nass-input-field-icon-color	Icon and attachment icon in the input field	$text-muted
$now-sp-nass-color-alert-moderate-3	Animated loading icon color.	#4345a6
$now-sp-nass-body-bg	Body primary background color.	#ffffff
$now-sp-nass-base-highlight-color	Background-color of matched text when searching emojis.	lighten ($warning, 35%)
$now-sp-nass-color-primary-3	Bare buttons color in active state.	darken ($brand-primary-darker, 15%)
$now-sp-nass-color-background-primary	Content background color.	#ffffff
$now-sp-nass-header-panel-bg-color	Header panel background color.	#ffffff
$now-sp-nass-button-bg-action-color	Image picker select button background color.	$brand-primary
$now-sp-nass-primary-button-action-text-color	Image picker select button color.	$sp-btn-text-color
$now-sp-nass-base-separator-color	Separator.	$border-tertiary
$now-sp-nass-chat-agent-message-bubble-bg-color	Agent message bubble background color.	$gray-light
$now-sp-nass-citation-badge-color	Citation badge color.	$gray-lighter
$now-sp-nass-divider-and-border-tertiary-color	Divider and border color of mid-topic switch in search results.	$border-tertiary
$now-sp-nass-highlight-value-tertiary-info-bg-color	Highlighted info value in the mid-topic card.	$state-info-bg
$now-sp-nass-FAB-icon	Icon imagery that appears on the floating action button.	ai-sparkle-icon
$now-sp-nass-FAB-gradient-color-1	First color of background gradient for chat floating action button icon.	$brand-primary-lighter
$now-sp-nass-FAB-gradient-color-2	Second color of background gradient for chat floating action button icon.	$brand-info
$now-sp-nass-FAB-gradient-hover-color-1	First color of background gradient for chat floating action button icon in hover state.	$brand-primary-darker
$now-sp-nass-FAB-gradient-hover-color-2	Second color of background gradient for chat floating action button icon in hover state.	darken ($brand-info, 10%)

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

CSS variables for Now Assist in Virtual Agent enhanced chat (continued)

Variable	Description	Default Values
$now-sp-nass-FAB-gradient-active-color-1	First color of background gradient for chat floating action button icon in active state.	$brand-primary
$now-sp-nass-FAB-gradient-active-color-2	Second color of background gradient for chat floating action button icon in active state.	$brand-info
$now-sp-nass-FAB-icon-size-factor	Handles size of Image within the chat icon.	1

Using Now Assist in Virtual Agent

Now Assist in Virtual Agent enhances the user experience by combining AI Search with generative AI chat skills. These skills can speed up issue resolution and reduce deflection to a live agent.

Standard chat and enhanced chat

During the Now Assist in Virtual Agent guided setup, you may be presented with two user experiences to select from: standard chat or enhanced chat.

Standard chat is a conversational support experience within a static chat widget. Enhanced chat is a conversational experience within a resizable and movable chat window that includes the ability to have multiple active conversations. Enhanced chat enables users to choose their way of engaging with Now Assist on their ServiceNow portals from a variety of entry points. When choosing enhanced chat from the guided setup, if you also have AI Search enabled on your portal, you're presented with the **Allow the search bar to open into a full-page chat experience** option. If you select this option, your conversational and search experience appears as a full page inside the portal. The conversational fluidity and citation behavior between the enhanced chat and enhanced chat's full-page experience remains the same regardless of which chat experience you choose. You can still access enhanced chat's resizable and moveable chat window when you have full-page experience turned on and are on screens other than the full-page experience itself. Turning on enhanced chat's full-page experience further combines chat and search capabilities by redirecting you into a full-page chat after entering a query into a portal's search bar.

Note:
For more information about selecting a chat experience in the admin guided setup, see Display your chat assistant on a portal, channel, or mobile app.

The following table outlines feature differences between standard and enhanced chat.

Standard and enhanced chat

Feature	Standard chat	Enhanced chat
Portal's search bars redirect to include chat capabilities or directly into chat	No	Yes
Chat window resizable and moveable	No	Yes
Interactive view	No	Yes

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Standard and enhanced chat (continued)

Feature	Standard chat	Enhanced chat
Multiple active conversations	No	Yes
Conversations remain active after task completion	No	Yes
View all topics/Show all options	Yes	Yes

The types of citations that appear in synthesized responses are the same between standard and enhanced chat, but their formatting differs. The following citations may appear in your synthesized results:

- Catalog
- Topic, subflows, or actions
- Q&A Knowledge Base articles
- External content connections
- People

For more information on these citations, see their respective sections in Standard chat and Enhanced chat.

The appearance of the default chat widget button varies depending on whether you have standard or enhanced chat turned on. The default standard chat button displays as a traditional message icon and the default enhanced chat button displays as the universal AI-generated sparkle icon. This button is only accessible through portal pages. While in enhanced chat's full-page experience, you're unable to access the chat widget button.

Example of the Now Assist in Virtual Agent standard chat widget button



Example of the Now Assist in Virtual Agent enhanced chat widget button

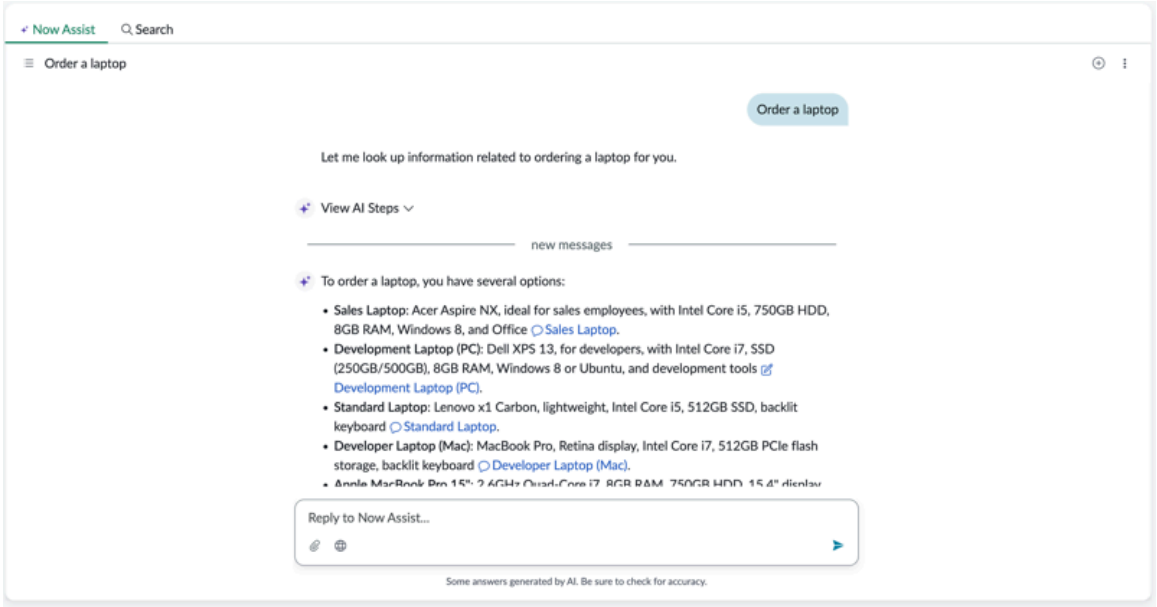


Enhanced chat's full-page experience

Where your users learn about search results differs between the enhanced chat and enhanced chat's full-page experience. For enhanced chat, when you enter a search query through your portal's search bar, you're redirected to the portal's search results page. At the top of the search results page, you see Genius Results in a synthesized response generated by Now Assist. When you're using enhanced chat's full-page experience and you enter a search query through one of the portal's search bars, you're redirected to the full-page experience's chat tab. Within the chat tab, you may see a synthesized response generated by Now Assist within a conversation depending on your utterance. You continue the conversation within the chat tab.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of the chat tab, labeled Now Assist, in the full-page experience




The conversational fluidity and citation behavior between the enhanced chat and enhanced chat's full-page experience remains the same regardless of which chat experience you use. The conversations that you have either through the enhanced chat's window or full-page experience remain in synchronization, and the conversational history is retained in both mediums. For example, if you enter `Order a loaner laptop` the conversational fluidity and citations that appear are the same whether in enhanced chat or enhanced chat's full-page experience. If you begin the laptop catalog request in the full-page experience, you can still view and continue the conversation in the enhanced chat's window because the chat experiences remain in synchronization with one another. For more information about conversational behavior and citations, see Enhanced chat.

Each Virtual Agent response includes a feedback icons panel. The feedback icons panel appears on the latest Virtual Agent response and whenever you hover over any previous Virtual Agent response. You can indicate if the response was helpful by selecting the like thumbs up icon ( ). If the response wasn't helpful, select the dislike thumbs down icon ( ). This feedback is used to train the LLM model and improve responses over time. Depending on the context of the response, an additional go to search results icon ( ) may appear in the feedback icons panel. This icon appears alongside synthesized responses in Virtual Agent, clarifying questions in Virtual Agent, and fallback topics whenever a synthesized response is unavailable but there are regular search results available. When the full-page experience is on and you select the go to search results icon ( ), you're redirected to the **Search** tab. After redirecting to the **Search** tab, a search query using the last five chat utterances you entered begins. Additionally, a copy message icon ( ) appears on received Virtual Agent responses.

The Now Assist sub-header consists of four elements. The following figure and table shows an example and description of those elements.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

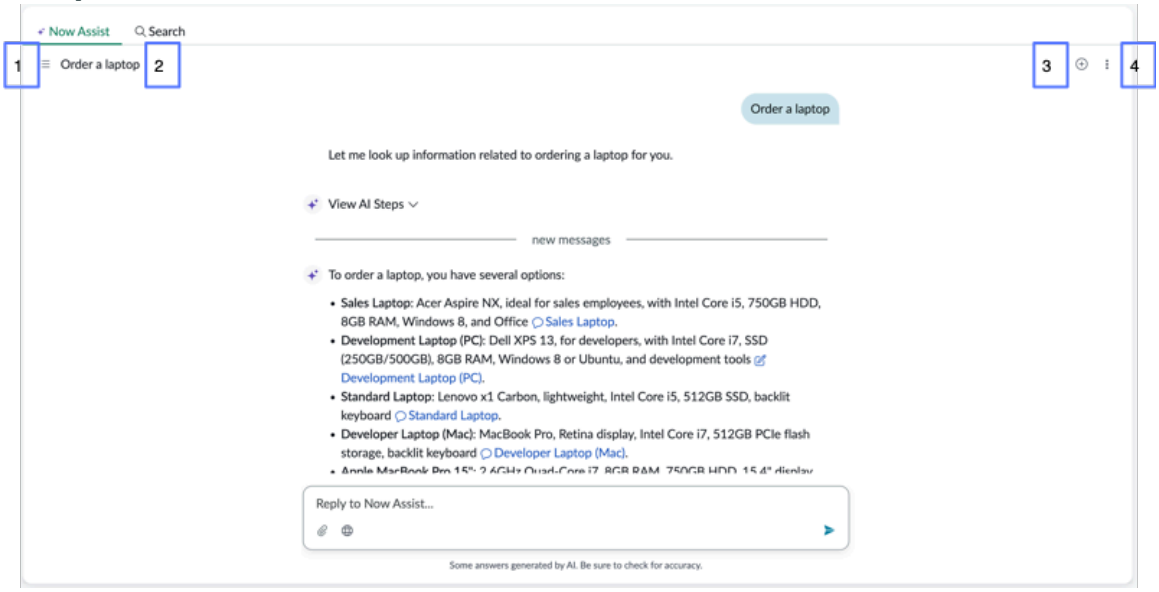Example of chat controls



Now Assist sub-header elements

Element	Description
1. Chats (☰)	All chats appear. Chats are organized with the most recent conversations at the top. Selecting a chat opens the chat in the conversation area. If there are unread chats or notifications, a badge number appears on the Chats icon (☰). Any unread chat or notification appears with a red dot next to it and the chat title appears in bold. Additionally, if you switch to a new chat while another active chat is ongoing, a pop-up message on the Chats icon (☰) appears: `Your previous chat was saved. You can revisit all of your past chats and continue ones that are still active.` The following list includes the chat sections that you may see in the chats area. • Active: Chats where you can continue the conversation. If applicable, active chats move to the Closed chats section after two hours of inactivity. This 2 hour time limit can be configured within the Messaging Channels {sys_cs_channel.list} table. To change the inactivity time limit, from the Messaging Channels {sys_cs_channel.list} table, select the **NASS** record and populate the **Conversation Idle Timeout** field with your preferred active chat time limit. If you have no active chats, `No chatter at`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist sub-header elements (continued)

Element	Description
	`the moment` is displayed. If more than 12 active chats are running, a **Show more** link appears to view more chats. Selecting **Show more** displays an additional 10 chats. • Updates: Updates for important notifications and reminders can be configured to display. When *`sn_nowassist_va.nass_notification_enabled`* is set to `true` (the default), simple (nonactionable) Virtual Agent notifications appear on your portal home page. After selecting a notification, you're redirected to this Updates section. If you have no updates, `You're all caught up` is displayed. If more than four updates are available, a **Show more** link appears to view more updates. Selecting **Show more** displays an additional 10 updates. **Note:** If *`sn_nowassist_va.nass_notification_enabl`* is set to `false`, the Updates section doesn't appear. • Closed: Closed chats can be configured to display. You know that a message has closed when the designated time has passed (2 hours of inactivity) or you receive the following response in the chat: `It looks like you're finished with this chat, so I'll go ahead and close it.` Turn on closed chats by selecting the **Show closed chats** check box within **Conversational Interfaces** > **Assistants** > **[Selected Assistant Name]** > **Chat experience** > **Closed chats**. After being turned on, closed chats are displayed for as long as they're available within the Conversations (sys_cs_conversation) table. Closed chats appear in a read-only mode and can't become active again. If more than four closed chats are available, a **Show more** link appears to view more closed chats. Selecting **Show more** displays an additional 10 closed chats. After a conversation has closed, you can't reopen it. Hovering over a closed chat displays the delete icon (🗑). Confirm the chat deletion on the Delete this chat? modal to permanently delete the chat from the interface.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist sub-header elements (continued)

Element	Description
2. [Chat name]	The name of the conversation. If you select a promoted asset or query, that asset's title appears as the chat name. If instead you enter an utterance into the **Reply to Now Assist** field, your initial utterance becomes the chat name. The chat name appears in both the Now Assist subheader and **Chats list** > **Active** section.
3. New chat ( )	A new conversation begins. You may be prompted with a greeting message along with any promoted conversational assets such as topics, subflows, and/or actions, or suggested queries.
4. Support and settings ( )	Support contact information such as phone numbers and email addresses are listed. If live agents are available, an active **Contact Live Agent** button is displayed. Although multiple active conversations are possible, you can only have one live agent conversation at a time. Selecting **Contact Live Agent** begins a chat with a live agent. After a live agent enters the chat, the **Contact Live Agent** button becomes inactive. If live agents are unavailable, an inactive **No live agents currently available** button is displayed. Settings toggles for Audio notifications and Notifications appear. By default, audio notifications are turned on and notifications are turned off. If admins have enabled notifications within the guided setup, users can turn on the notifications.
5. Interactive view (or)	**Note:** This icon only appears in the sub-header whenever the interactive view is available. Open or close the interactive view. The interactive view appears towards the right of the conversational chat area. Interactive view is available whenever an organizational chart is an available option in a people citation popover. If multiple interactive views are available in the same conversation, for example, you opened multiple people's org

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist sub-header elements (continued)

Element	Description
	charts in a conversation, a drop-down is available to switch between the different interactive views' tabs.

While in the full-page experience, you can select the **Search** tab. Selecting the **Search** tab auto-populates the search bar with the first utterance found in the chat tab, but a search query doesn't begin. The chat and **Search** tabs are otherwise independent of the other, so running a search doesn't impact your existing chats nor does starting new chats impact your existing search results. You must enter text into the search bar so that the search bar becomes active and then you can submit your search. The search results that appear in the **Search** tab resemble the search results found on the portal page, excluding the Genius Results synthesized response. Two icons may appear next to the search results:

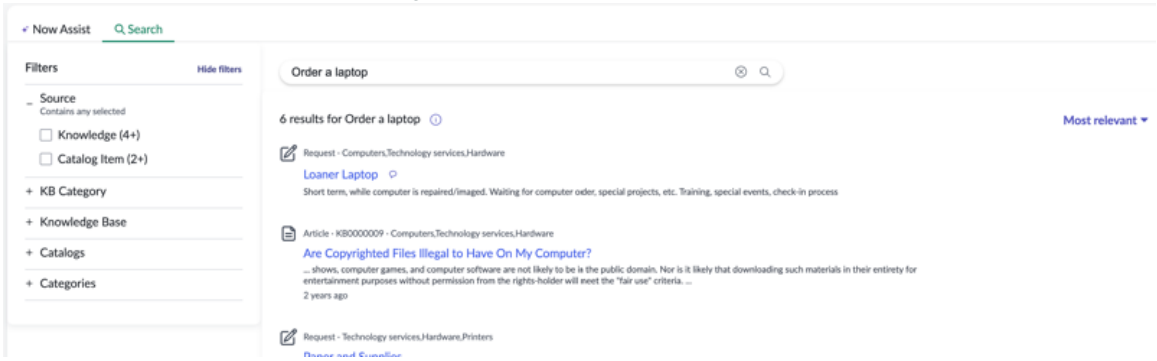
- (Request in Chat)

  The (Request in Chat) icon opens the conversational catalog into a new chat.

- (Open in New Tab)

  The (Open a New Tab) icon redirects you to either complete a catalog form or view content in a new tab.

Example of Search tab in full-page experience



The following table outlines the preceding feature differences between enhanced chat window and enhanced chat full-page experience.

Requester differences in enhanced chat

Feature	Enhanced chat	Enhanced chat full-page experience
Entry points	• Entering an utterance into the chat through the chat widget button. • The portals search results page's synthesized response via chat icon ( )	• Entering an utterance into the portal's search bar. • The go to search results icon ( ) from an enhanced chat's chat window response.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Requester differences in enhanced chat (continued)

Feature	Enhanced chat	Enhanced chat full-page experience
	or Request in chat link from popover. • Notifications	
Portal search bar results	Redirects to the portal's search page results.	Redirects into the full-page experience's chat tab.

Prerequisite requirements for standard and enhanced chat

Both standard and enhanced chat require the ServiceNow default chat widget button to be turned on. The following actions must be completed for enhanced chat to display a synthesized response after entering a search query through the portal:

- Configure the portal's AI Search
- Turn on the ServiceNow default Search page widget.
- Turn on the ServiceNow default chat widget button.

The following actions must be completed for enhanced chat to display a synthesized response in the full-page experience after entering a search query through the portal's search bar:

- Configure the portal's AI Search configured
- Turn on the ServiceNow default Search page widget.
- Turn on the ServiceNow default chat widget button.
- Turn on the ServiceNow default Search Typeahead widget.

More information

Want to learn more? Visit these resources.

- For more information on enhanced chat, see Enhanced chat.
- For more information on enhanced chat in Employee Center, see Enhanced chat in Employee Center.
- For more information on enhanced chat in self-service portals, see Using the Now Assist in Virtual Agent enhanced chat in self-service portals.
- For more information on Now Assist, see Now Assist.
- For more information on Now Assist in AI Search, see Now Assist in AI Search.
- For more information on language support, see Multilingual service for Now Assist.
- For more information on Now Assist in Virtual Agent analytics, see .

Standard chat

Now Assist in Virtual Agent standard chat is a conversational support experience within a static chat window.

Now Assist in Virtual Agent enhances the user experience by combining AI Search with generative AI chat skills. These skills can speed up issue resolution and reduce deflection to a live agent.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
For more information about selecting a chat experience in the admin guided setup, see Display your chat assistant on a portal, channel, or mobile app.

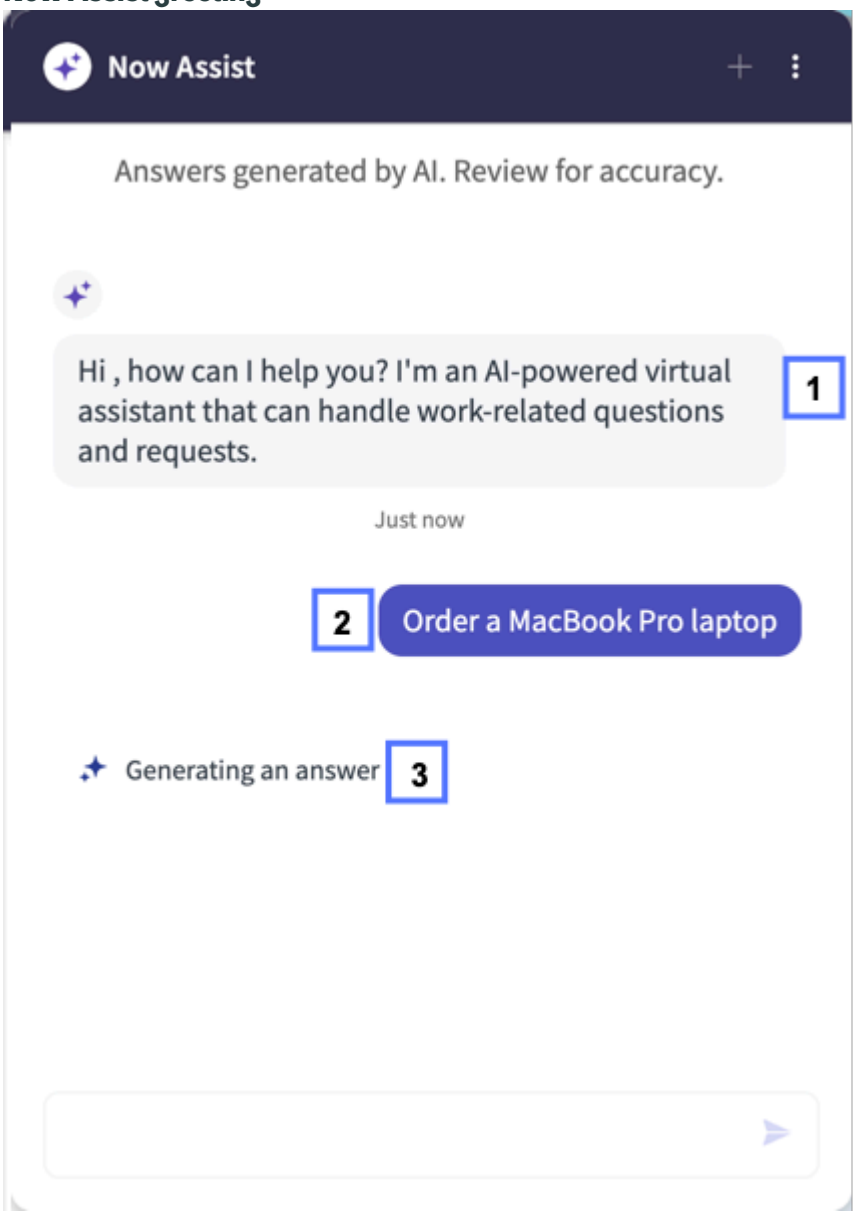
Now Assist in Virtual Agent provides your users with an interactive generative AI experience. A friendly, natural language conversation is easier to understand and helps users to be more comfortable with chatting with a bot.

The following sections highlight how a conversation powered by generative AI might look in Virtual Agent.

Starting the conversation

The following figure shows an example of the beginning of a new conversation.

Now Assist greeting



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist greeting elements

Element	Description
1: Bot greeting	**Note:** The `Answers generated by AI. Review for accuracy.` message prior to the greeting can't be edited or turned off. After greeting the user, the bot provides an explanation of what the user can expect. Because the large language model (LLM) is still learning, the bot indicates that it may make mistakes, and that the user should check answers for accuracy.
2: User request	The user can enter any utterance.
3: Response indicator	While the LLM processes the utterance, an animated avatar appears alongside latency feedback messages in the chat window to let the user know that the bot is working.

Chatting with the Virtual Agent

After the user enters an utterance and a search result is found, a synthesized response may appear. A synthesized response includes a brief summary of the requested information and search results along with Genius Results. For more information on how these search results are found, see Now Assist Actions Genius Results and Now Assist Q&A Genius Results.

If multiple results are found, they are presented to users, and users can view inline citations and/or the Sources section at the bottom of the synthesized response. Users can view Knowledge Base articles, Virtual Agent topics, subflows or actions, external content, people citations, and complete catalog request items. Virtual Agent can only return available catalog items that match a user's request when the Now Assist Multi-Turn Catalog Ordering skill is enabled. Users can follow up on a synthesized response and receive an answer that considers the previous context. For example, if you previously were chatting about the company's travel policy and then enter `International`, the system recognizes that you're wanting additional information on the company's international travel policy.

Note:
For full catalog functionality in the chat window, enable the generative AI experience for catalog item request submissions. For more information, see Configure Now Assist in Conversational Catalog Request.

Whenever a single Virtual Agent topic is found within a synthesized response, users are brought directly into that action's flow. You may consider bypassing the synthesized response and options by automatically launching catalog items, too. For more information on automatically launching single search result actions, search for the *`sn_nowassist_va.synthesized_autostart_items`* system property in Available system properties.

Responses generated in Now Assist in Virtual Agent can come from a combination of catalog items, Virtual Agent topics, subflows and actions, Knowledge Base articles, attachments, external content, and people sources. The following citations may appear inline and/or within the expandable Sources section depending on what search results are returned:

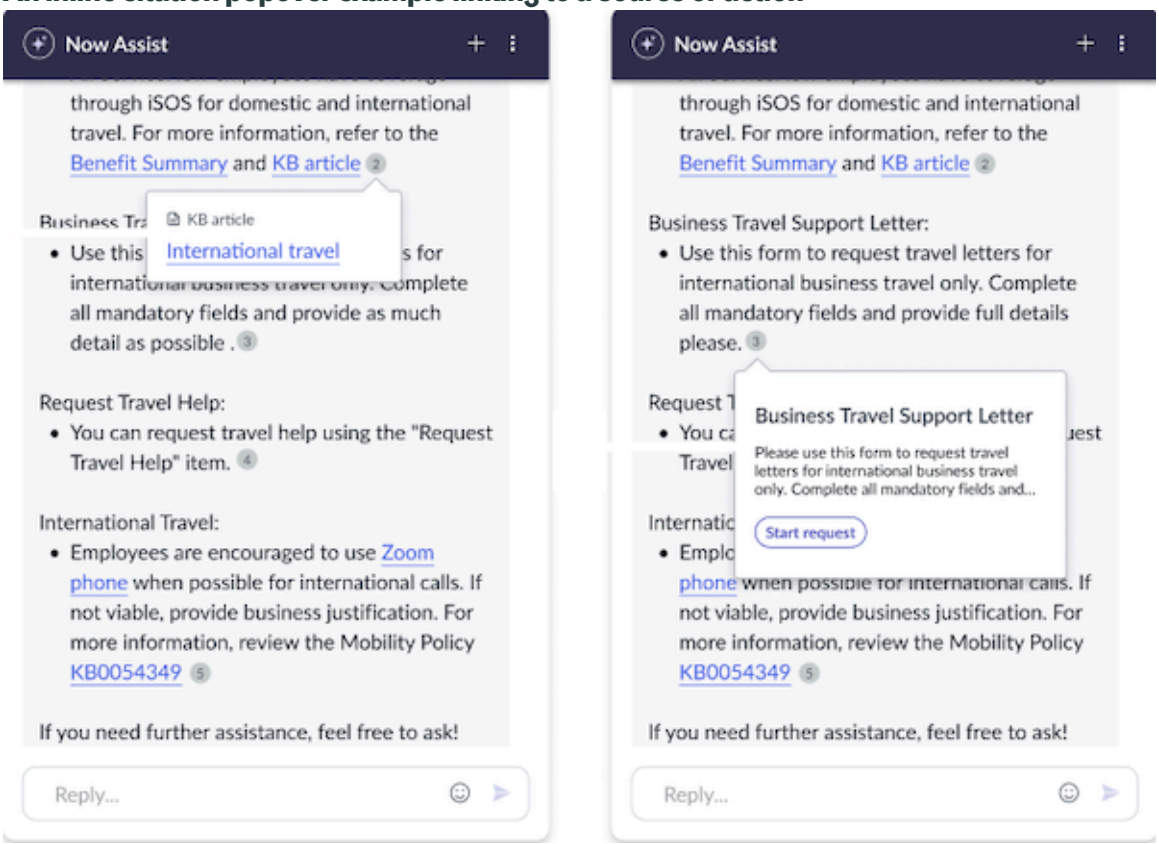
- Catalog
- Topic, subflows, or actions
- Q&A Knowledgebase articles

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- External content connections
- People

If you select an inline citation, a popover appears containing either additional information or an action to start a request.

An inline citation popover example linking to a source or action



Responses can also be generated based on content from the catalog item description and the Virtual Agent topic description. When this occurs, citations lead the user to one of the items in the *`Here's what you can do next`* section of the response.

Each Virtual Agent response includes a feedback icons panel. The user can indicate if the response was helpful by selecting the like thumbs up icon ( ). If the response wasn't helpful, the user can select the dislike thumbs down icon ( ). This feedback is used to train the LLM model and improve responses over time.

If Now Assist Guardian is enabled and your request contains profane content, the Virtual Agent responds with a message prompting you to re-enter an appropriate request without profanity or offensive content. If your request is too ambiguous in a Virtual Agent chat, Virtual Agent asks a clarifying question and displays a citation with an action. Citations are presented starting from the second clarifying question. Select a citation to start the request. If there are no actions relative to the request, citations aren't shown.

If you need more help, Now Assist in Virtual Agent directs you to either a live agent, resets the conversation, or creates an incident. The option is determined by the admin in the Now Assist in Virtual Agent guided setup. For more information, see Configuring assistants overview.

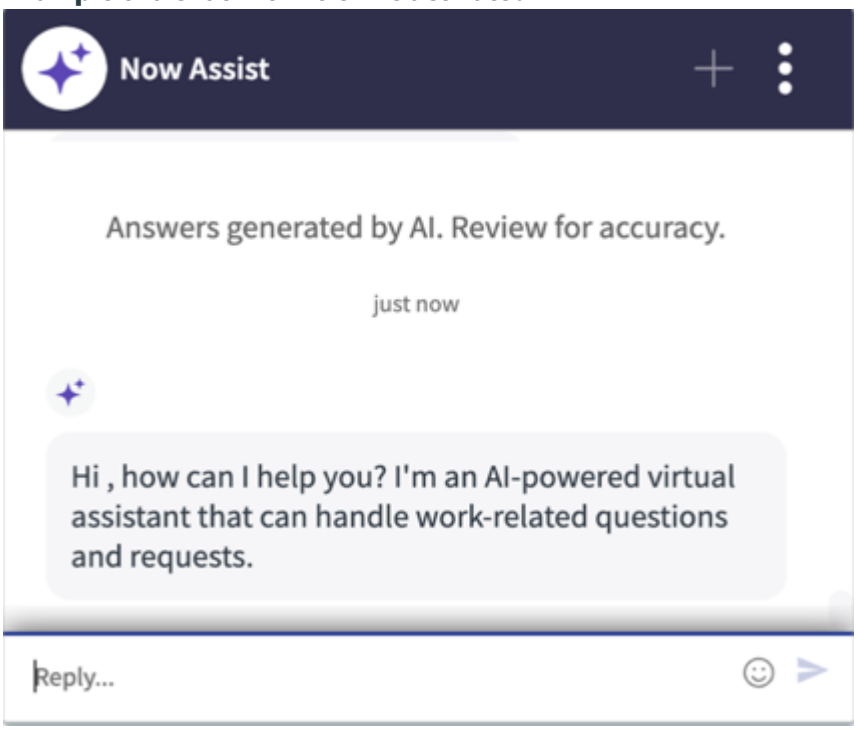
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. Live agent support routes the user to an available agent when configured.
2. Reset the conversation restarts the conversation to the beginning to ask another question.
3. Record producer directs the user to a catalog record producer to create an incident or case.

If you entered a single message with multiple questions or requests, a **Ready to move on to your next task?** card appears. For example, a response like `Order a loaner laptop and also what is spam`? When you select the **Continue to next task** button on the **Ready to move on to your next task?** card, Virtual Agent searches for a response to your second question or request. In this example, Virtual Agent would search for an answer to your `what is spam`? question.

If an administrator didn't configure any skills, no available skills are shown. However, the chat bar remains available for the user to enter an utterance. This triggers AI Search for a Knowledge Base article or catalog item.

Example of a chat with no skills activated



For information about configuring a Now Assist skill, see Activate a Now Assist skill.

Agentic conversations

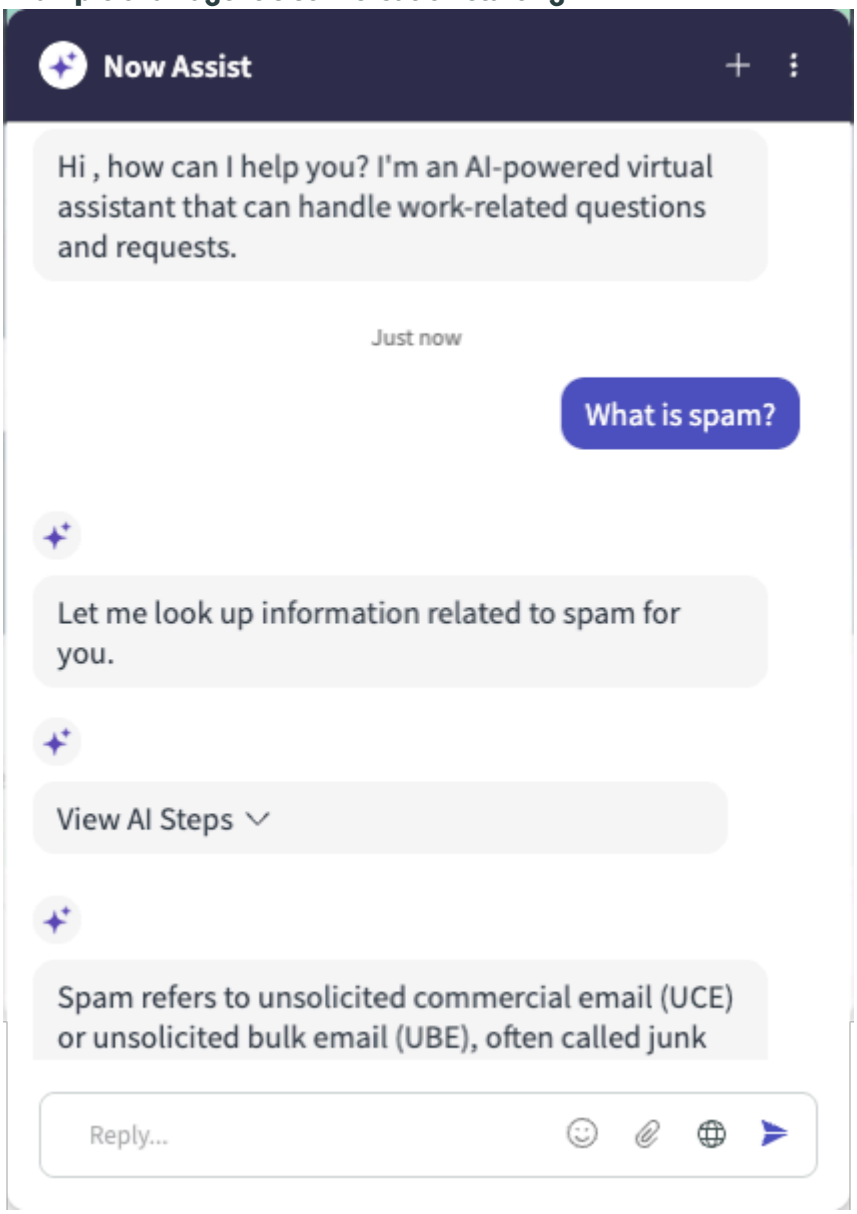
Note:
Admins must first enable AI agents before end users can experience agentic conversations. For more information on how to set up AI agents for agentic conversations, see Agentic conversations in Virtual Agent. Now Assist in Virtual Agent discovers and executes AI agents. For more information about AI agents, see Now Assist AI agents.

When you submit a single question to the Virtual Agent, the agent understands the query and begins a flow. When you submit a message with multiple questions or requests, Virtual Agent answers the multiple questions consecutively in a response. It can reason, plan, and execute across AI agents, Virtual Agent topics, conversational actions and subflows, catalogs, Knowledge Base articles, custom skills, and any Now Assist in Virtual Agent supported skills to help you. Before receiving a response, you receive acknowledgment messages from the Virtual Agent and on-screen messages to let you know where the agent is at in the agentic processing flow.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

After the processing has completed its flow, a View AI Steps section header appears, where the processing flow steps can be expanded and viewed. You can stop the agentic processing flow at anytime by selecting the End flow icon ( ). After an action starts, it cannot be stopped. Selecting the End flow icon ( ) only stops the proceeding processing steps.

Example of an agentic conversation starting




Catalog citations

For conversational catalogs, the **Start request** option appears, and if selected, the catalog request flow launches within the Virtual Agent. For non-conversational catalogs, the **Go to request** option appears with an external link that if selected, either redirects you to a new browser or pop-up window to order the catalog item.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

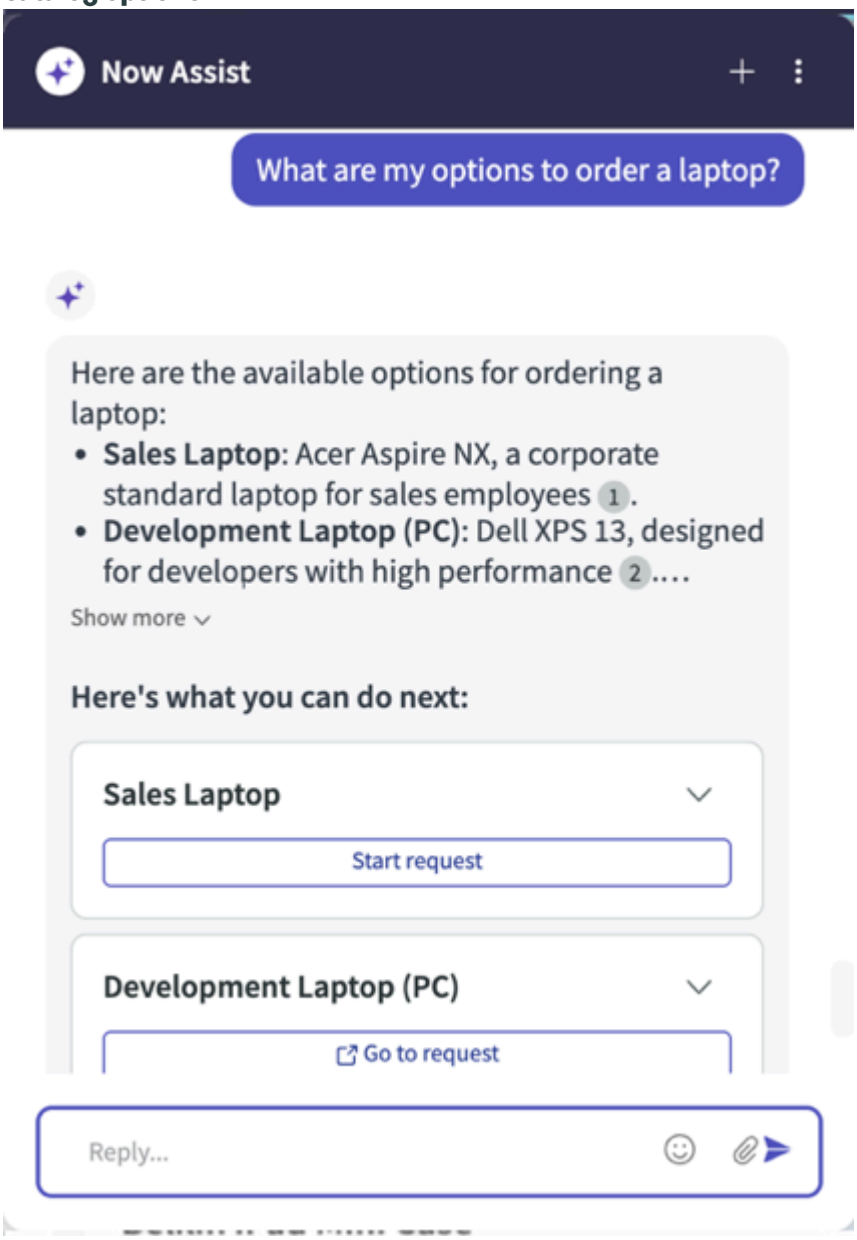Example of a synthesized response with conversational and non-conversational catalog options




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

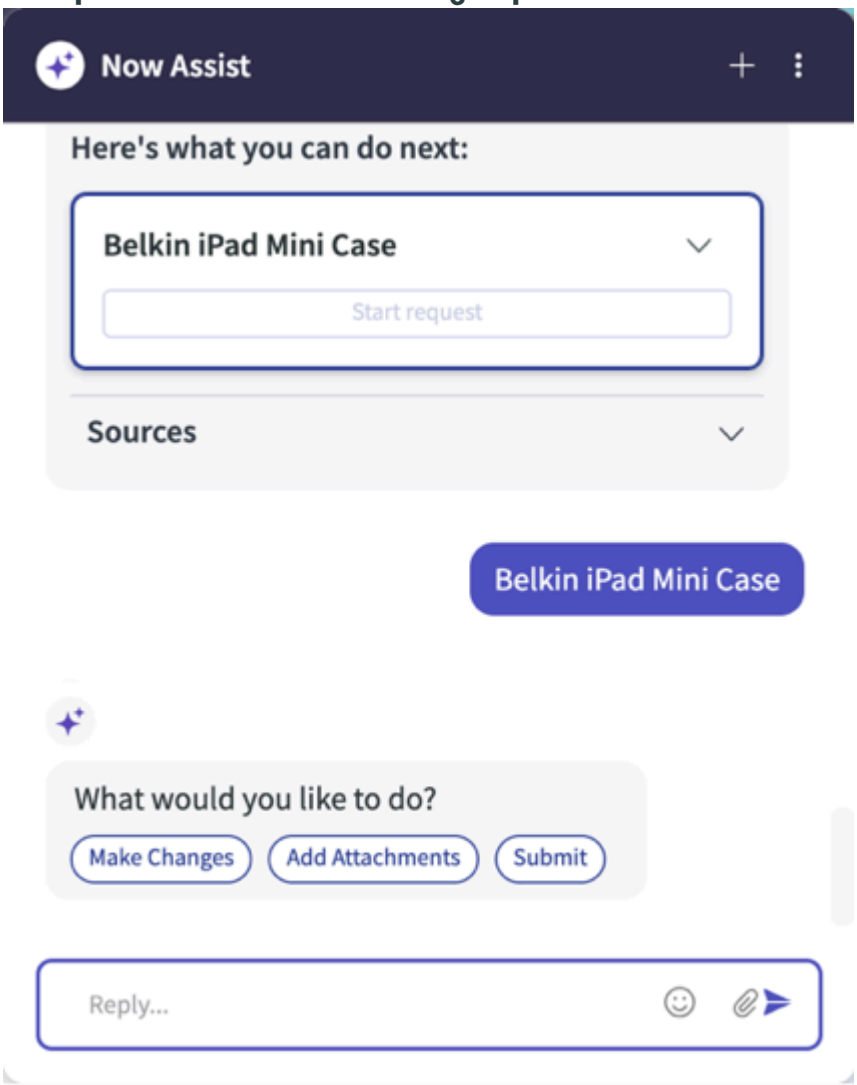Example of a conversational catalog response flow



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

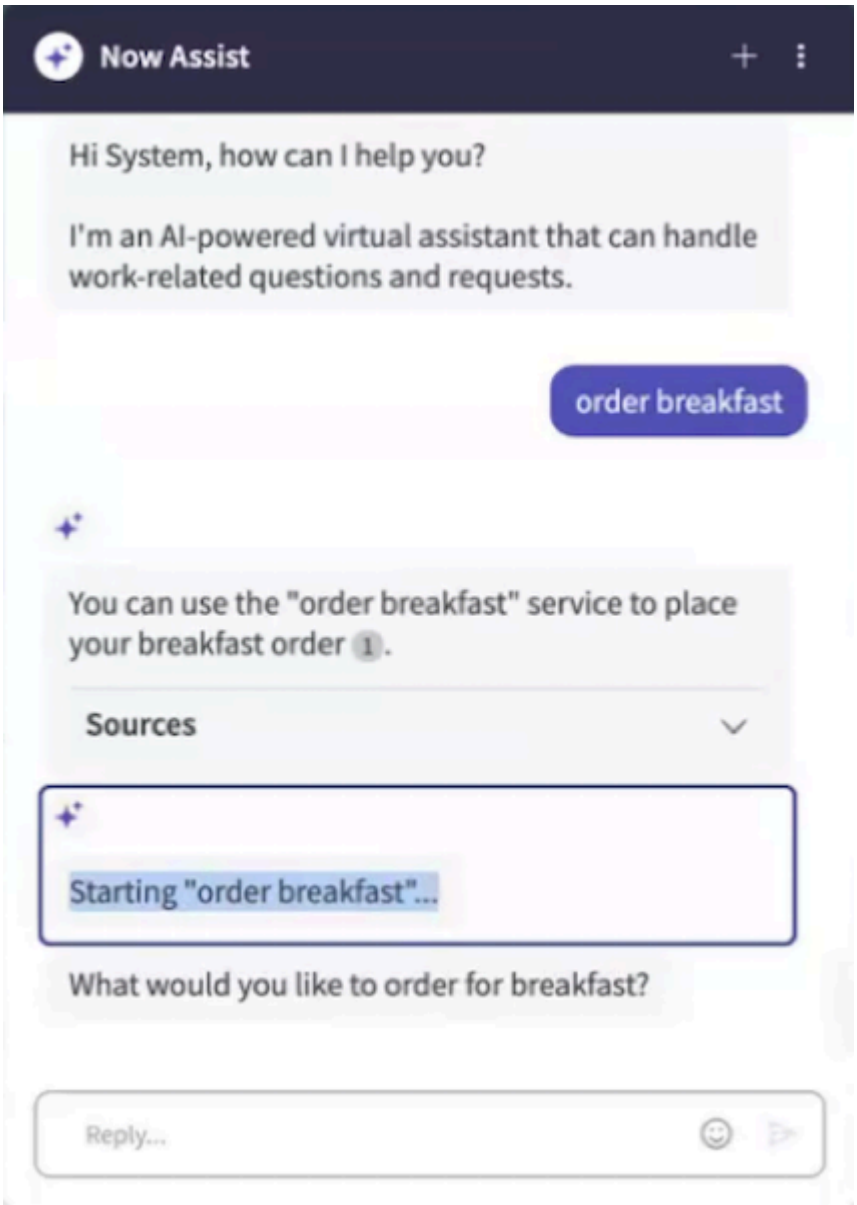
Example an LLM-generated message before auto-executing the first step in the action



When the catalog order is complete, Virtual Agent displays a card for the order.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

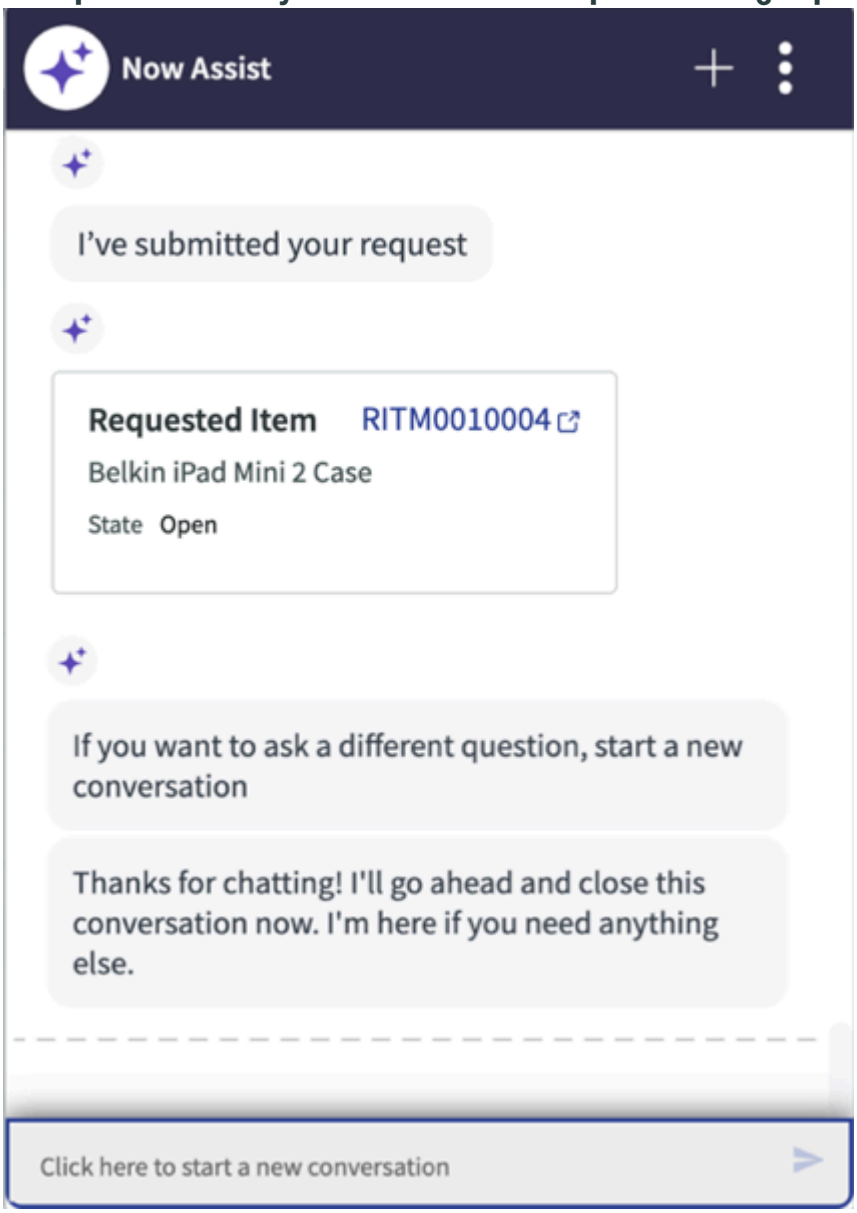Example of a summary confirmation for a completed catalog request



Topic, subflows, or actions citations

The **[Asset's name]** option appears, and if selected, the asset flow begins in Virtual Agent.

Q&A Knowledge Base citations

The answer is shown with the option to view your sources through the numbered inline citations icon (1). These Knowledge Base inline citations show which ServiceNow knowledge articles were used to generate the response.

Note:
If you have activated Knowledge Graph, you may get more personalized Q&A Knowledge Base responses depending on whether the user schema attributes were triggered. For more information about receiving these personalized responses, see Access Knowledge Graph Schema.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

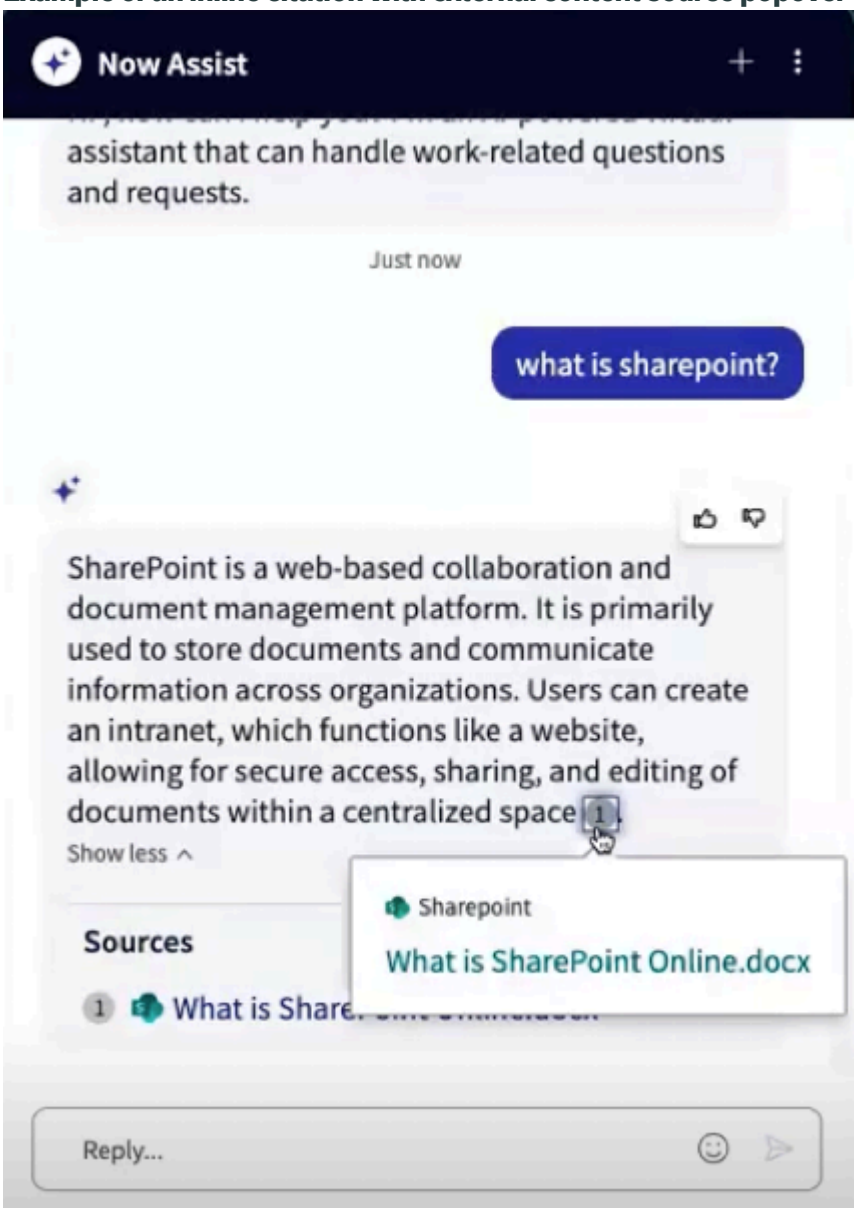
External content connections citations

If external search sources are added to your information sources when Configuring assistants overview, you can search through external content connections. This can include information from attachments and knowledge blocks, or from the following list of content connection:

- Microsoft SharePoint
- Confluence
- Atlassian Jira Cloud
- Google Drive
- Microsoft Teams
- Predefined web sources
- ServiceNow® documentation
- Slack

For more information about external content connections, see External Content Connectors.

Example of an inline citation with external content source popover




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

People citations

Information about people in your organization can be found if you have activated Knowledge Graph. Information about the person you're searching for appears in the synthesized response, along with an in-line numbered citation and people citation in the **Sources** section. If a direct match doesn't occur and multiple people are found, try providing more information to narrow down the people search results. Up to three people can appear in a synthesized response. You may be asked a clarifying question, such as `Are you asking about [user_1], the programmer, or [user_2], the faculty member?` to yield better results. Selecting the person's name in the **Sources** section redirects you to the portal's user profile landing page.

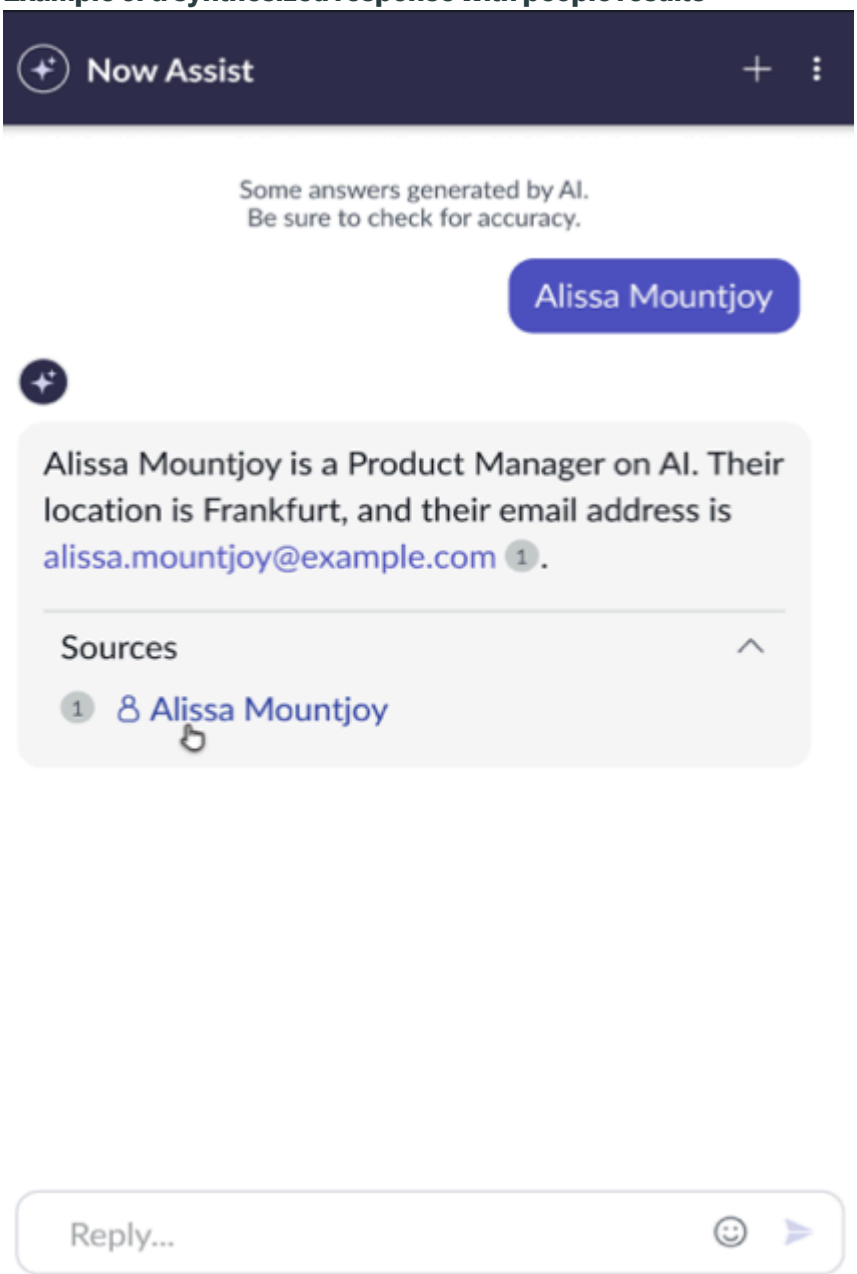Example of a synthesized response with people results



Selecting the person's inline numbered citation presents a popover. The information in the popover can include the following information:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

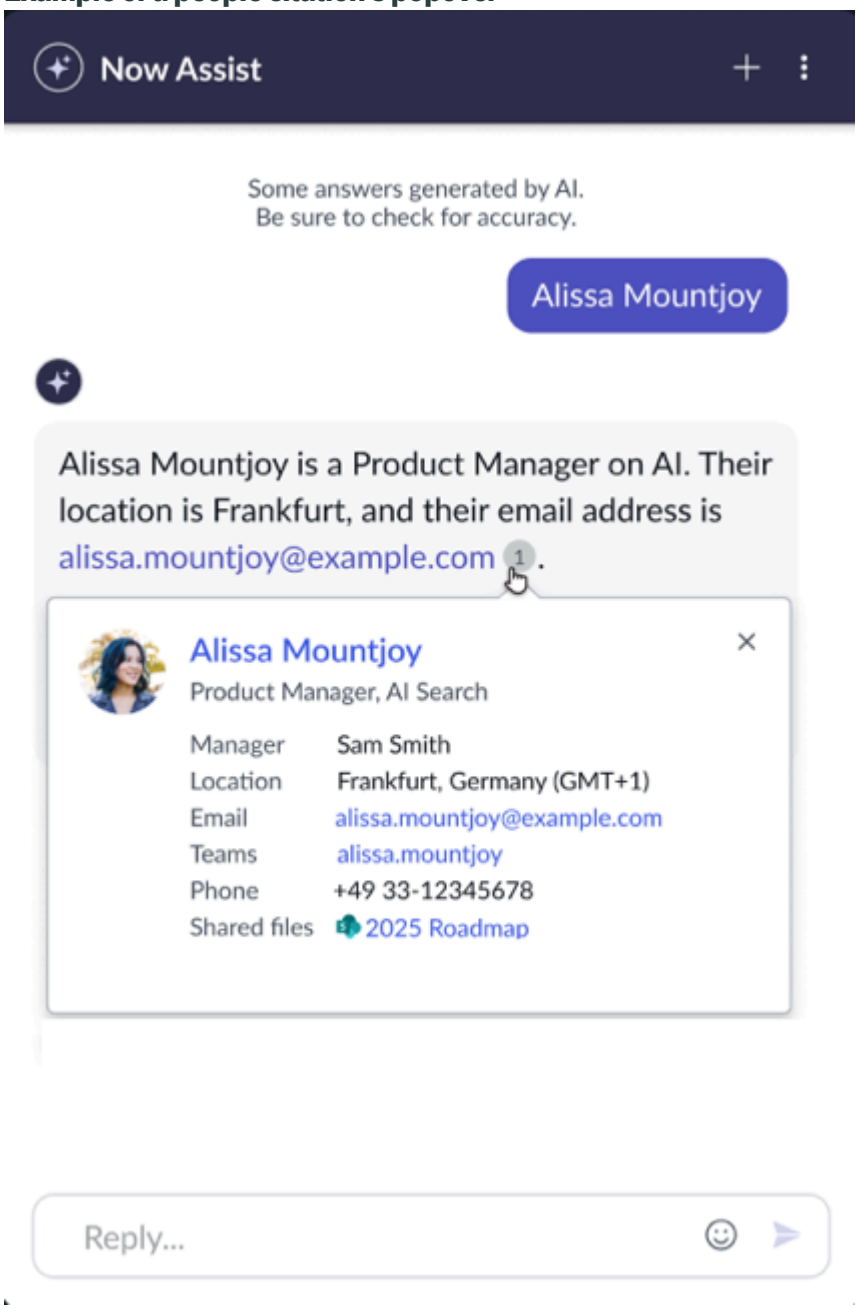
Note:
The following popover details can be customized through EVAM. For more information about customizing the data details, see Define an EVAM view template.

- Manager
- Location
- Email
- Teams
- Phone
- Shared files

Important:
Shared Microsoft SharePoint files between you and the person found appear only on the people popover. These shared files only appear after you have completed the prompt to **Log in**, signed in successfully, and have entered a new search query for that person. A new search query is necessary after you have signed in so that up to three shared Microsoft SharePoint files can appear. You're automatically logged out of your Microsoft account every three months and must repeat the **Log in** prompt again to see shared files.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of a people citation's popover



Although rare, when you receive a synthesized response that includes a person, you may also receive other citations associated with that person. For example, a Knowledge Base article that was authored by the person you searched for may also appear.

Extended entities and view records

Extended entity information can be found if you have activated Knowledge Graph.

Note:
To enable the Knowledge Graph natural language query (NLQ) schema, configure this schema for the assistant. To configure the schema for an assistant, see Assign search sources to a chat assistant.

These extended entities that come from the additional custom tables associated with the Knowledge Graph natural language query (NLQ) schema can include:

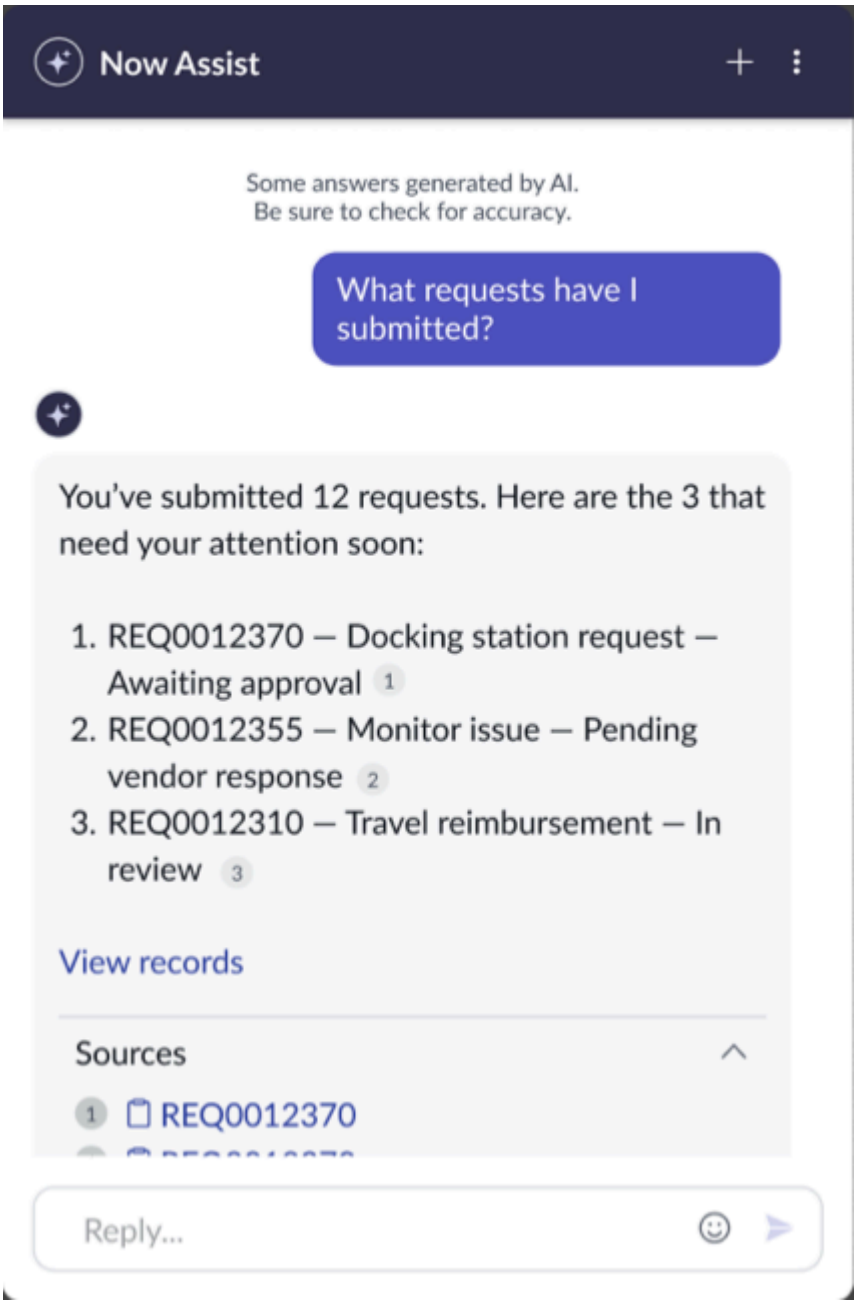
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Assets
- Incidents
- Recently viewed knowledge base articles
- Requests
- Tasks

Select an entity in-line citation to view that entity record in a popover, or select **View records** to view a list of additional entities. Selecting a link from the **View records** pop-up opens a new tab with that entity table's data.

Example of extended entities and view records

The following example is of a conversation showing 3 out of 12 requests and the option to view records and sources.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Fallback options

Note:
For more information about where and how to enable fallback options, see Manage an assistant chat experience.

A fallback state can occur whenever search results are unavailable. Scenarios where search results are unavailable include the Virtual Agent didn't understand the query, complaint small talk was found, or an error occurred. When search results are unavailable, a single or multiple fallback options may appear. These fallback options include:

- **Request a live chat**: Triggers live agent mode and routes you to a human support representative.
- **Search the web**: Triggers web search mode and uses the internet to search for the results.

  Note:
  Only the last query entered into the conversation is considered when entering web search mode via this **Search the web** fallback option.

- **Create a generic ticket**: Creates a record.
- **End this chat**: Ends the chat.

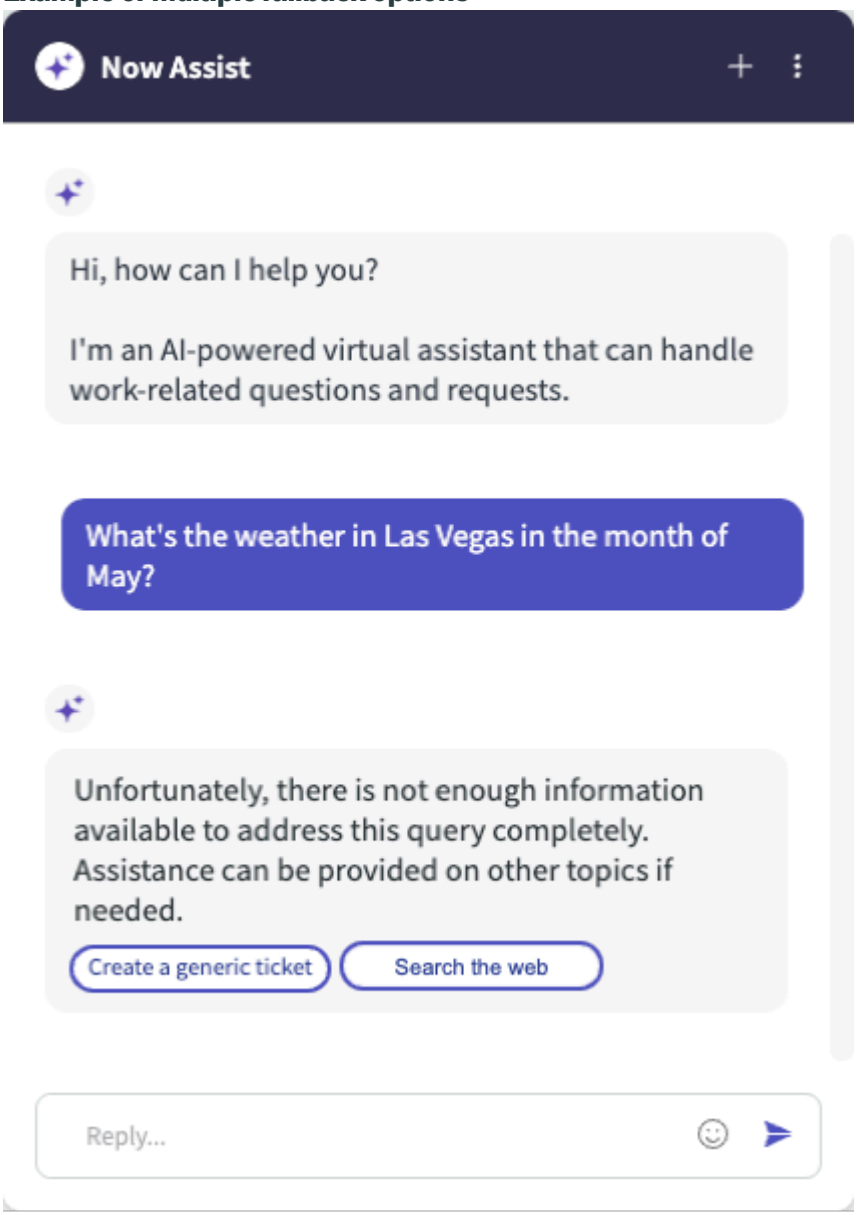
  Note:
  This option is only available to standard chat conversations.

- **Custom fallback option**: Presents a fallback Virtual Agent topic.

Select a fallback option to launch that mode or action.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of multiple fallback options



Enhanced chat

Now Assist in Virtual Agent enhanced chat is a conversational support experience within a dynamic window that also includes the ability to have multiple active conversations and superior search capabilities. Turning on enhanced chat's full-page experience further combines chat and search capabilities by redirecting you into a full-page chat after entering a query into a portal's search bar.

https://player.vimeo.com/video/1116073820?h=3bb4f47d4e&badge=0&autopause=0&player_id=0&app_id=58479

Now Assist in Virtual Agent enhances the user experience by combining AI Search with generative AI chat skills. These skills can speed up issue resolution and reduce deflection to a live agent.

Note:
For more information about selecting a chat experience in the admin guided setup, see Display your chat assistant on a portal, channel, or mobile app.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist in Virtual Agent provides your users with an interactive generative AI experience. A friendly, natural language conversation is easier to understand and helps users to be more comfortable with chatting to a bot.

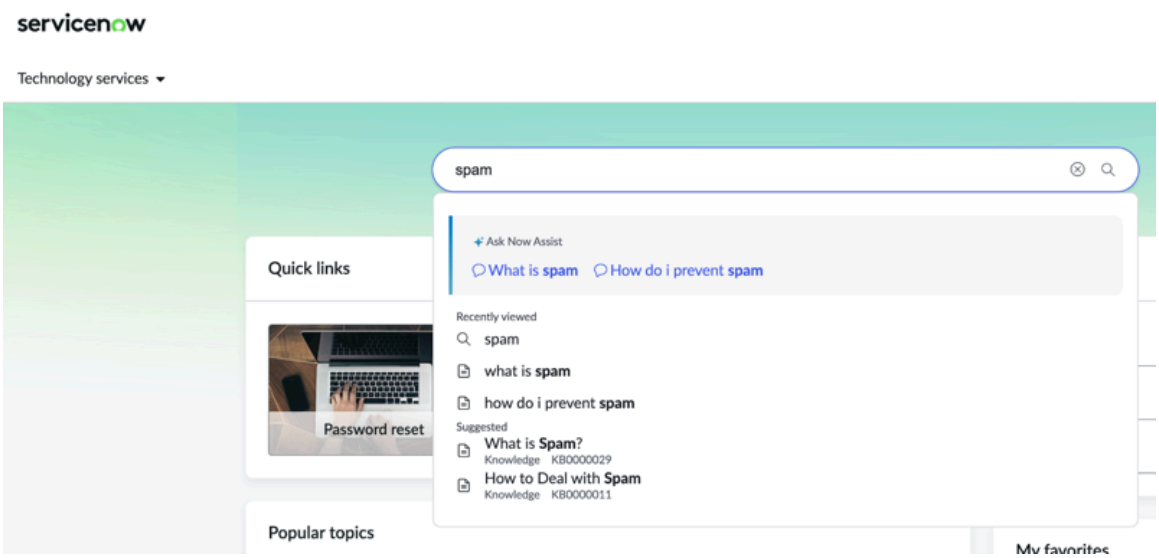
The following sections highlight how a conversation powered by generative AI might look in Virtual Agent.

Note:
This content's primary focus is on enhanced chat's default chat window rather than on the optional full-page experience. The conversational fluidity and citation behavior between the enhanced chat and enhanced chat's full-page experience remains the same regardless of which chat experience you use. The conversations that you have either through the enhanced chat's window or full-page experience remain in synchronization, and the conversational history is retained in both mediums. For more information about the full-page experience, see that relevant section in Using Now Assist in Virtual Agent.

Starting the conversation

With enhanced chat, chat and search capabilities are combined. Suggested conversational prompts and searches may appear in a drop-down list on the portal's search bar. The Ask Now Assist section header may appear at the top of the portal search bar's drop-down list. When you select one of these suggested queries, you're redirected into a conversation within a chat window or full-page experience. You receive relevant answers based on the prompt that you have selected. If you select a suggested type-ahead search outside of the Ask Now Assist header, that search query begins in either the portal's search results page or within the full-page experience's **Search** tab.

Example of type-ahead portal search




Note:
For more information about how Now Assist in Virtual Agent and Now Assist in AI Search combine to include these suggestion type-ahead searches, see Auto-complete suggestion types included with Now Assist in AI Search. To learn how to activate suggestion term bold highlighting, see Configure AI Search as the source for Ask Now Assist suggestions.

When you're using enhanced chat and you enter a search query through your portal's search bar, you're redirected to the portal's search results page. At the top of the search results page, you see Genius Results in a synthesized response generated by Now Assist. This synthesized response answer provides inline citations that appear at the end of each sentence. You can select citations and if applicable, such as for conversational catalog items, select whether to

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Request with form or **Request in chat**. Similar options also appear in the regular search results area, as indicated by the request in chat icon ( ) and request with form icon ( ). Depending on your selection, the catalog request flow launches within either the Virtual Agent chat or a form.

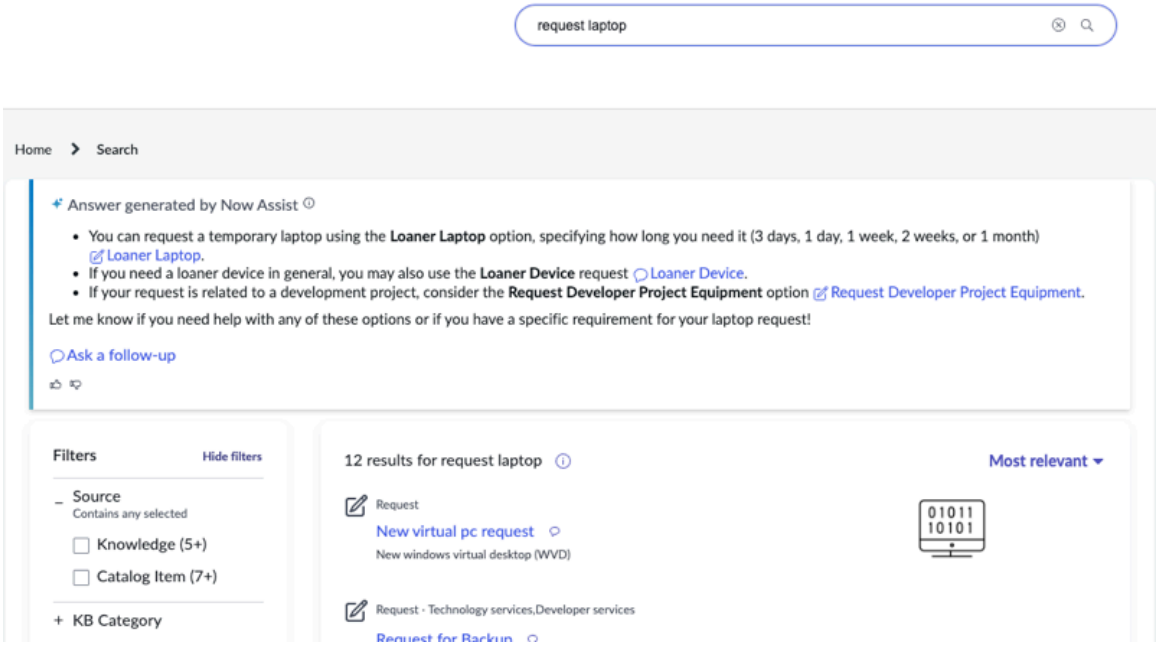Example of enhanced chat synthesized response on the portal's search results page




You can start the chat experience either through the chat icon on the portal's search results page or through the portal's chat widget button.

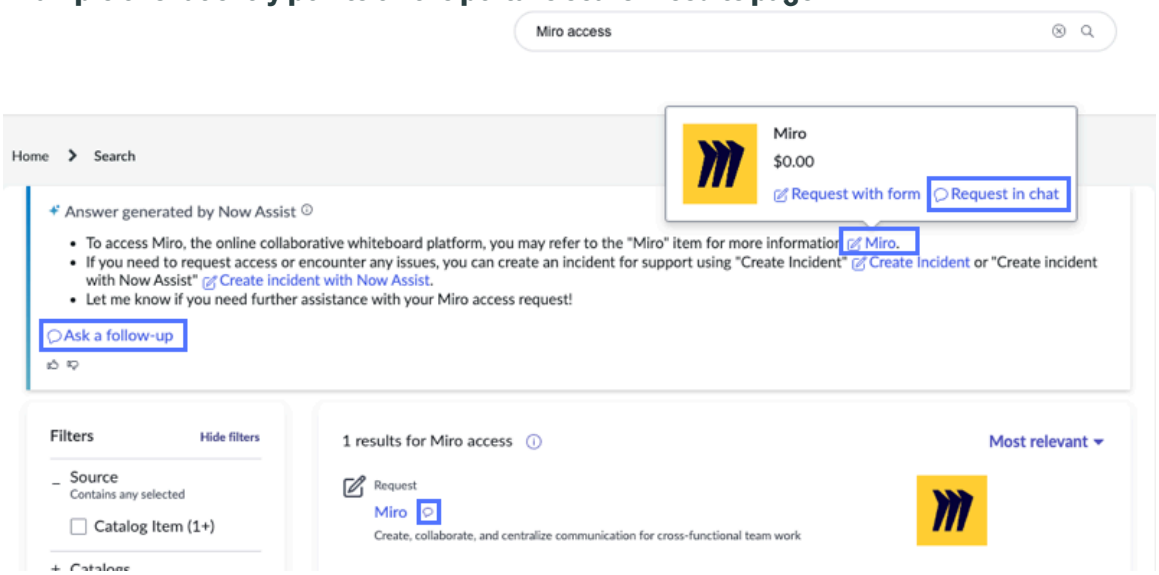Example of chat entry points on the portal's search results page



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

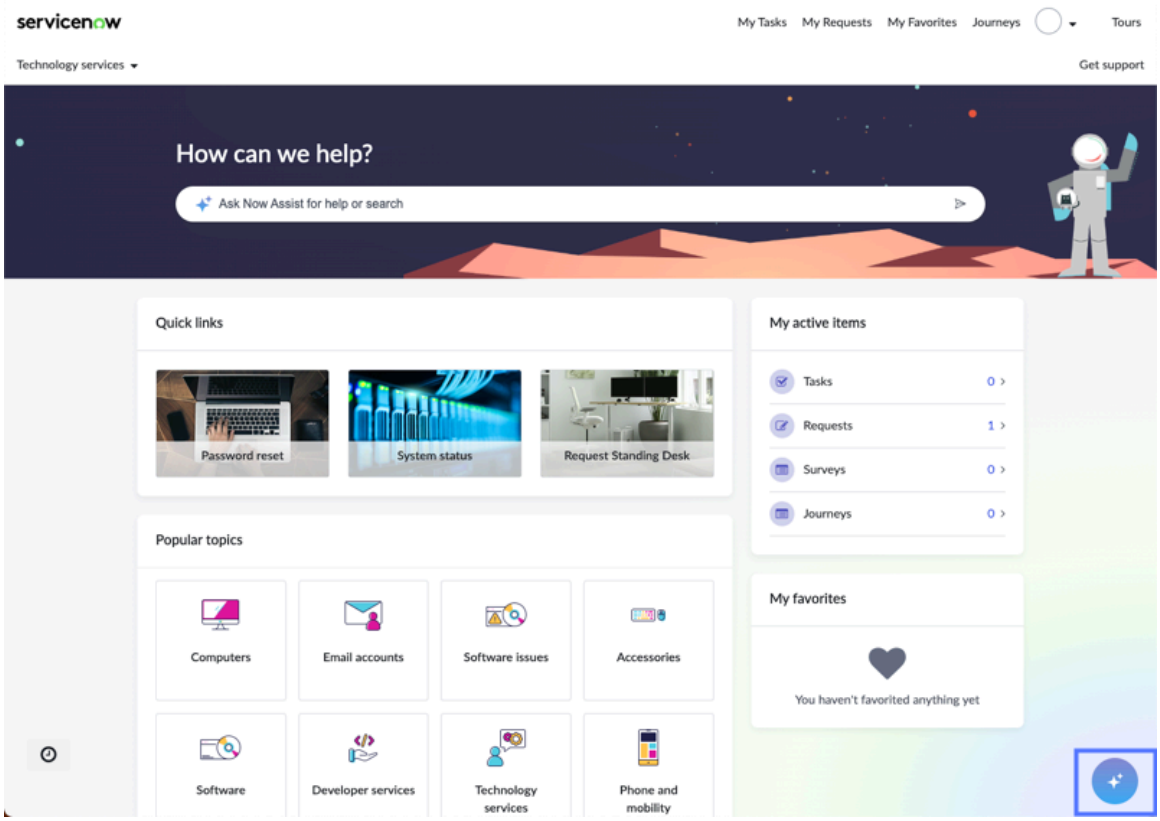Example of a chat widget button




After selecting the chat widget button on the portal, the floating chat window opens and replaces the chat button. A greeting message appears, and a chat is created only after you have entered an initial utterance. If you have an active chat ongoing, the current active chat appears instead of a greeting message. You can select a predefined action, topic, suggested search query, start a new conversation, or view all options, if applicable. The **View all options** link only shows if more than one suggested search query or promoted topic is available.

Note:
Any search query entered into the portal's search bar or Virtual Agent is incorporated into the greeting topic for future conversations as a suggested search query. Suggested search queries can be viewed in the Search Suggestions [sys_search_suggestion.list] table. For more information on how to enable suggested search queries, see Now Assist in Virtual Agent system properties.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

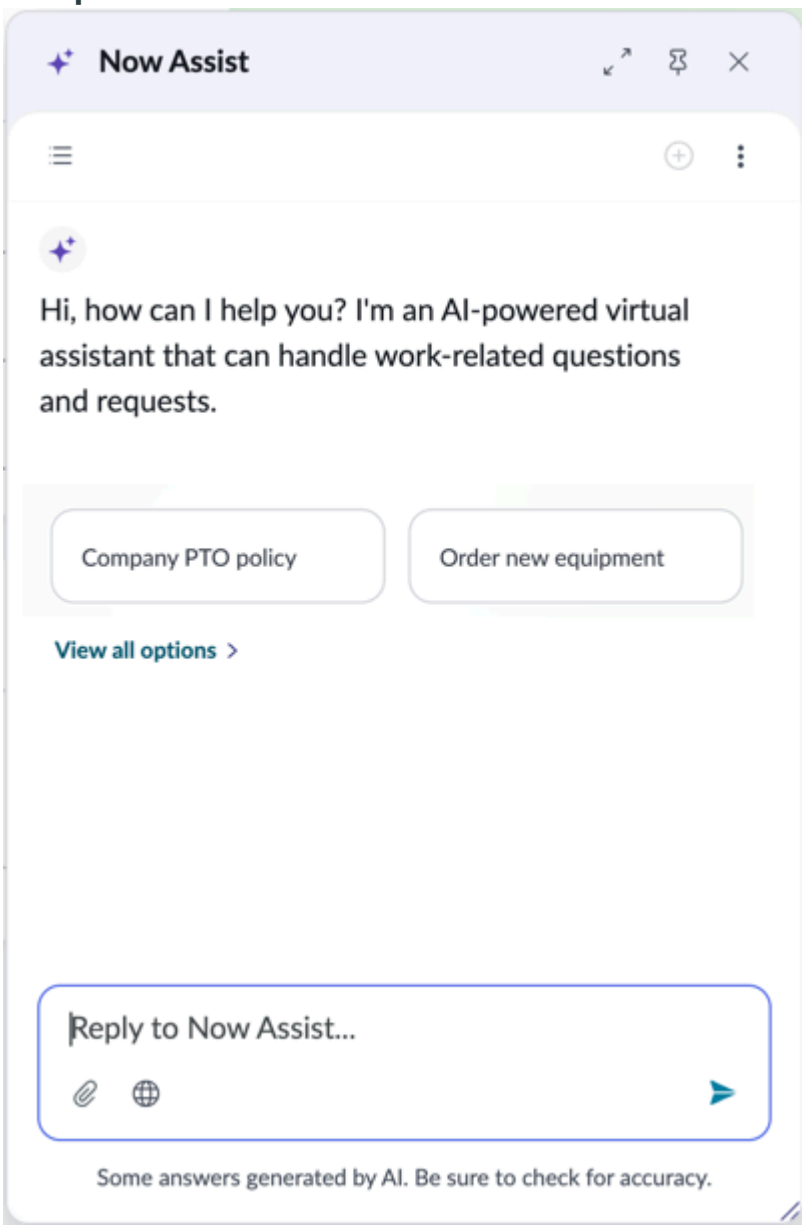Example of the start of an enhanced chat conversation



If language detection is turned on and the initial utterance entered into the portal's search bar or chat differs from the user's profile language preference, the conversational language automatically switches to the detected language. For more information and examples of language detection in enhanced chat conversations, see Using language detection and dynamic machine translation in Virtual Agent enhanced chat conversations.

Navigating the chat window resizing options and controls toolbar

After selecting the chat widget button, the floating chat window opens and replaces the chat button. You can move the chat window by selecting the header and dragging the chat window to the desired location. You can resize the chat window by using the window's edges to resize to your desired size or use the toolbar icons. The following list details the chat window adjustment icons:

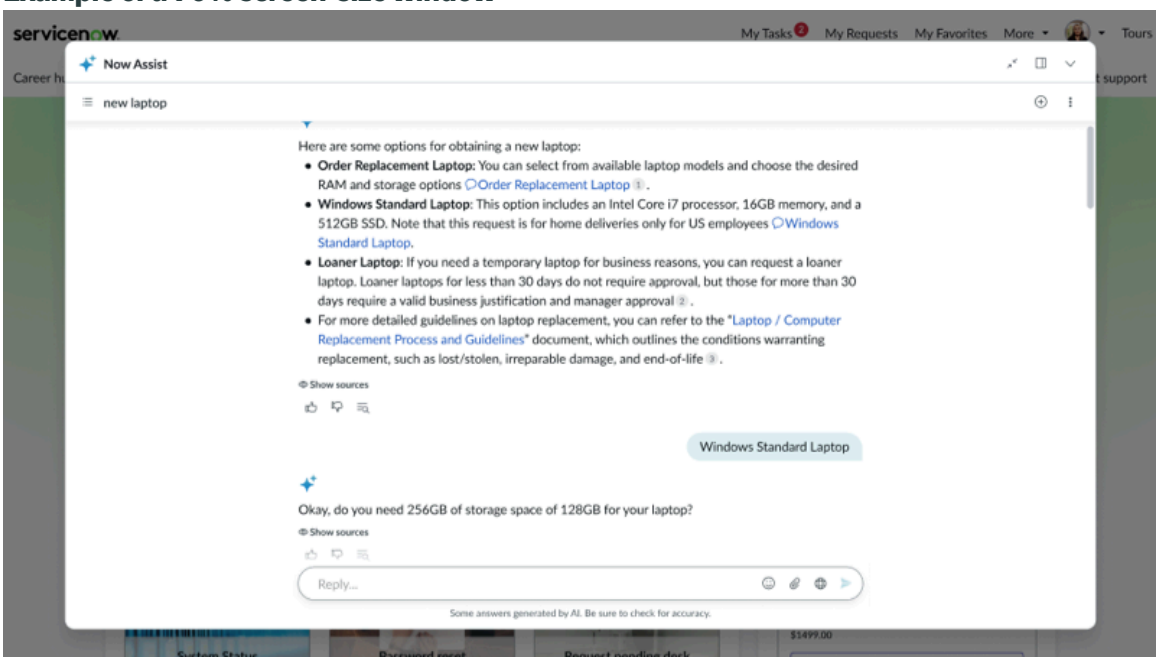
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- : Selecting the expand icon expands the chat into a 90% screen-size window. The 90% screen-size window can't be resized or moved. Selecting outside of the 90% screen-size chat window resizes the chat back into the floating window.
- : Selecting the pin icon pins the chat to the side of the browser but you can still resize this window to fill half the browser, if desired. When you duplicate a browser tab, open a new tab, or use the browser back button, the chat window state persists as long as you have not minimized the chat.

> **Important:**
> By default, pinning a chat window is enabled for Service Portal. For all other portals, an admin needs to create a system property to enable pinning a chat window. For more information, see Now Assist in Virtual Agent system properties.


- : Selecting the down arrow minimizes the chat and the chat widget button reappears.

Example of a 90% screen-size window



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

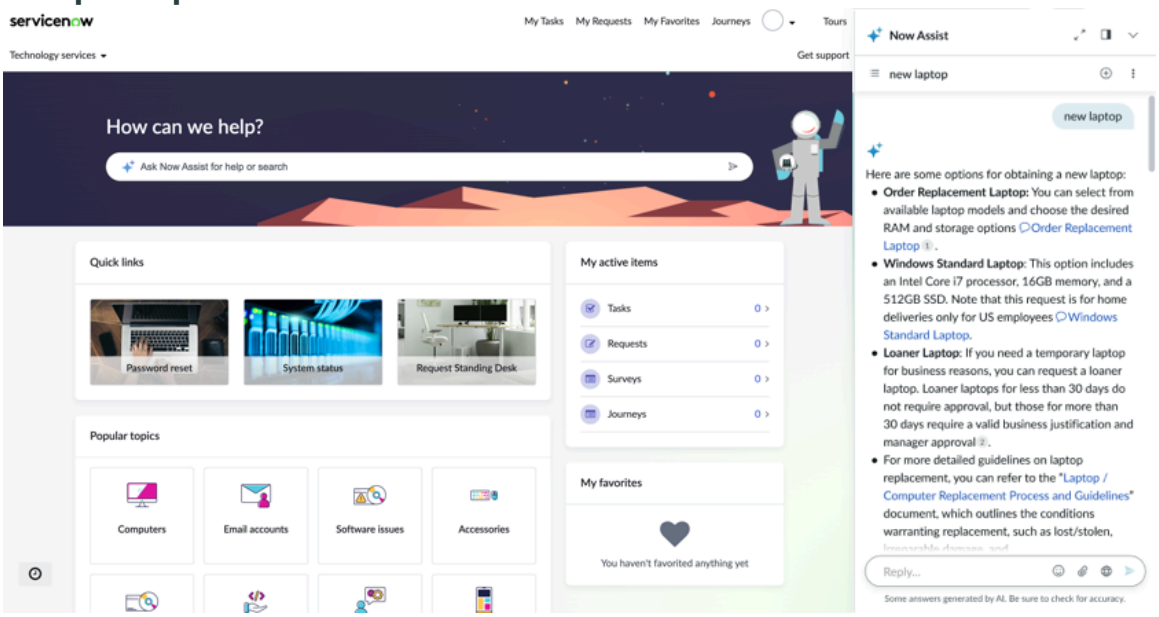
Example of a pinned chat



The Now Assist sub-header consists of four elements. The following figure and table shows an example and description of those elements.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

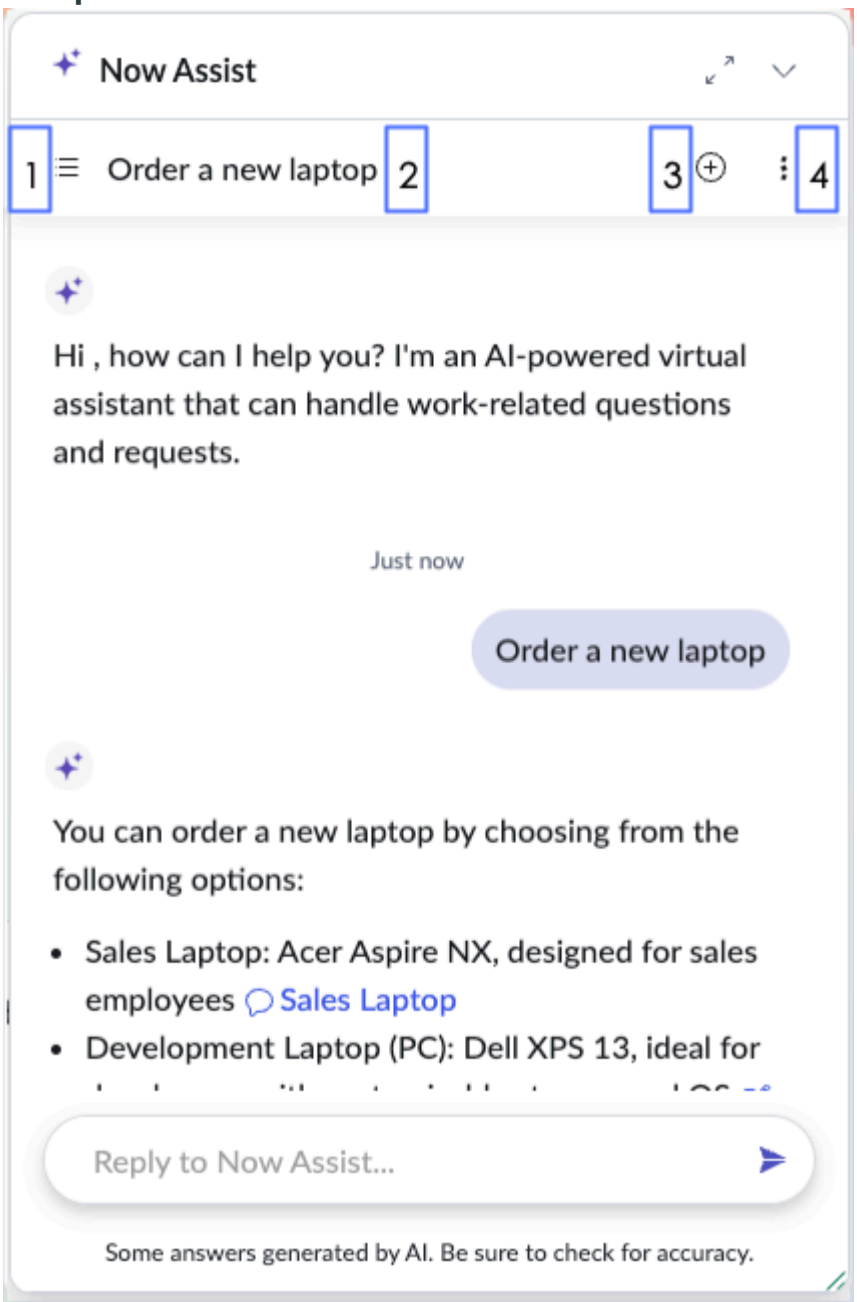Example of chat controls



Now Assist sub-header elements

Element	Description
1. Chats (☰)	All chats appear. Chats are organized with the most recent conversations at the top. Selecting a chat opens the chat in the conversation area. If there are unread chats or notifications, a badge number appears on the Chats icon (☰). Any unread chat or notification appears with a red dot next to it and the chat title appears in bold. Additionally, if you switch to a new chat while another active chat is ongoing,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist sub-header elements (continued)

Element	Description
	a pop-up message on the Chats icon ( ) appears: `Your previous chat was saved. You can revisit all of your past chats and continue ones that are still active.` The following list includes the chat sections that you may see in the chats area. • Active: Chats where you can continue the conversation. If applicable, active chats move to the Closed chats section after two hours of inactivity. This 2 hour time limit can be configured within the Messaging Channels {sys_cs_channel.list} table. To change the inactivity time limit, from the Messaging Channels {sys_cs_channel.list} table, select the **NASS** record and populate the **Conversation Idle Timeout** field with your preferred active chat time limit. If you have no active chats, `No chatter at the moment` is displayed. If more than 12 active chats are running, a **Show more** link appears to view more chats. Selecting **Show more** displays an additional 10 chats. • Updates: Updates for important notifications and reminders can be configured to display. When *`sn_nowassist_va.nass_notification_enabled`* is set to `true` (the default), simple (nonactionable) Virtual Agent notifications appear on your portal home page. After selecting a notification, you're redirected to this Updates section. If you have no updates, `You're all caught up` is displayed. If more than four updates are available, a **Show more** link appears to view more updates. Selecting **Show more** displays an additional 10 updates. **Note:** If *`sn_nowassist_va.nass_notification_enabl`* is set to `false`, the Updates section doesn't appear. • Closed: Closed chats can be configured to display. You know that a message has closed when the designated time has passed (2 hours of inactivity) or you receive the following response in the chat: `It looks like you're finished`

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist sub-header elements (continued)

Element	Description
	`with this chat, so I'll go ahead and close it.` Turn on closed chats by selecting the **Show closed chats** check box within **Conversational Interfaces** > **Assistants** > **[Selected Assistant Name]** > **Chat experience** > **Closed chats**. After being turned on, closed chats are displayed for as long as they're available within the Conversations (sys_cs_conversation) table. Closed chats appear in a read-only mode and can't become active again. If more than four closed chats are available, a **Show more** link appears to view more closed chats. Selecting **Show more** displays an additional 10 closed chats. After a conversation has closed, you can't reopen it. Hovering over a closed chat displays the delete icon ( ). Confirm the chat deletion on the Delete this chat? modal to permanently delete the chat from the interface.
2. [Chat name]	The name of the conversation. If you select a promoted asset or query, that asset's title appears as the chat name. If instead you enter an utterance into the **Reply to Now Assist** field, your initial utterance becomes the chat name. The chat name appears in both the Now Assist subheader and **Chats list** > **Active** section.
3. New chat ( )	A new conversation begins. You may be prompted with a greeting message along with any promoted conversational assets such as topics, subflows, and/or actions, or suggested queries.
4. Support and settings ( )	Support contact information such as phone numbers and email addresses are listed. If live agents are available, an active **Contact Live Agent** button is displayed. Although multiple active conversations are possible, you can only have one live agent conversation at a time. Selecting **Contact Live Agent** begins a chat with a live agent. After a live agent enters the chat, the **Contact Live Agent** button becomes inactive. If live agents are unavailable, an inactive **No live agents currently available** button is displayed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Assist sub-header elements (continued)

Element	Description
	Settings toggles for Audio notifications and Notifications appear. By default, audio notifications are turned on and notifications are turned off. If admins have enabled notifications within the guided setup, users can turn on the notifications.
5. Interactive view (or)	**Note:** This icon only appears in the sub-header whenever the interactive view is available. Open or close the interactive view. The interactive view appears towards the right of the conversational chat area. Interactive view is available whenever an organizational chart is an available option in a people citation popover. If multiple interactive views are available in the same conversation, for example, you opened multiple people's org charts in a conversation, a drop-down is available to switch between the different interactive views' tabs.

Chatting with Virtual Agent

After the user enters an utterance and a search result is found, a synthesized response may appear. A synthesized response includes a brief summary of the requested information and search results along with Genius Results. For more information on how these search results are found, see Now Assist Actions Genius Results and Now Assist Q&A Genius Results.

If multiple results are found, you can follow inline citations to either begin an action or learn more. The option to **Show sources** appears at the end of the synthesized response for internal and external Knowledge Base articles. Virtual Agent can only return available catalog items that match a user's request when the Now Assist Multi-Turn Catalog Ordering skill is enabled.

Note:
For full catalog functionality, enable the generative AI experience for catalog item request submissions. For more information, see Configure Now Assist in Conversational Catalog Request.

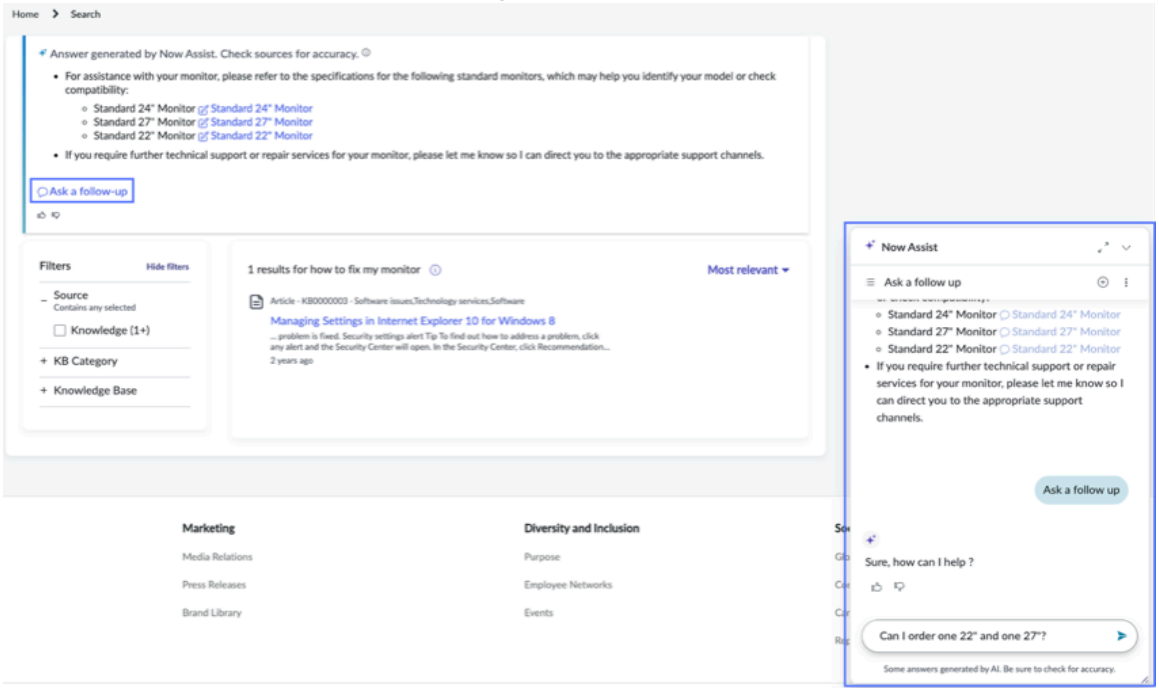
Whenever only a single search result for topics is found, the synthesized response and options are bypassed by default and users are brought directly into that action's flow. You may consider bypassing the synthesized response and options by automatically launching catalog items, too. For more information on automatically launching single search result actions, search for the `sn_nowassist_va.synthesized_autostart_items` system property in Available system properties.

You can create a new query from within a Now Assist conversation using mid-topic discovery. For more information, see Mid-topic switching during Now Assist in Virtual Agent conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

If Now Assist Guardian is enabled and your request contains profane content, the Virtual Agent responds with a message prompting you to re-enter an appropriate request without profanity or offensive content. If your request is too ambiguous on the portal search, a synthesized response appears along with an **Ask a follow up** option. Selecting the **Ask a follow up** option redirects you to a Virtual Agent chat. In the Virtual Agent chat, you can submit your follow-up question or request, but the synthesized response links are only available to select on the portal page and are unavailable to select in the chat window. If your follow-up question or request is too ambiguous in the Virtual Agent chat, Virtual Agent asks a clarifying question and displays the go to search results icon ( ) in the feedback panel.


Example of Ask a follow up in Virtual Agent



Each Virtual Agent response includes a feedback icons panel. The feedback icons panel appears on the latest Virtual Agent response and whenever you hover over any Virtual Agent response. You can indicate if the response was helpful by selecting the like thumbs up icon ( ). If the response wasn't helpful, select the dislike thumbs down icon ( ). Depending on the context of the response, an additional go to search results icon ( ) may appear in the feedback icons panel. This icon appears alongside synthesized responses in Virtual Agent, clarifying questions in Virtual Agent, and regular search results or Virtual Agent fallback topics whenever a synthesized response is unavailable. Selecting the go to search results icon ( ) redirects you to the search results page and begins a search query using the last five chat utterances you entered. Additionally, a copy message icon ( ) appears on received Virtual Agent responses.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

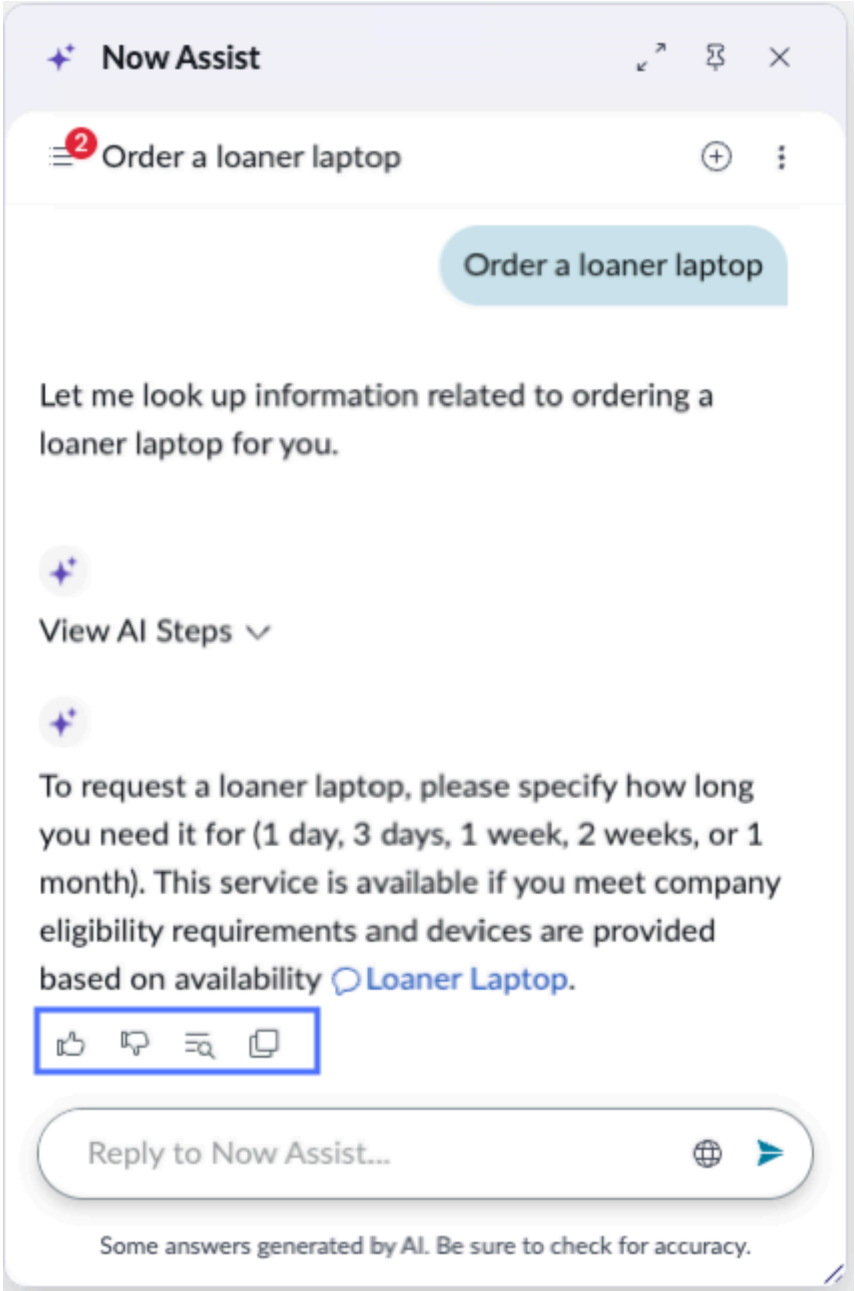Example of feedback panel in enhanced chat



Responses generated in Now Assist in Virtual Agent can come from a combination of catalog items, Virtual Agent topics, subflows and actions, knowledge articles, attachments, external content sources, and people citations. Inline citations appear at the end of the relevant synthesized response sentence. Selecting an inline citation results in a popover containing either a link to an article or source, or a description and action to start the action. The following options may appear as synthesized response in-line citations depending on what search results are returned:

- Catalog
- Topic, subflows, or actions
- Q&A Knowledge Base articles
- External content connections
- People
- Extended entities and additional records

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Q&A Knowledge Base and external content connection citations also appear within the expandable **Show sources** option.

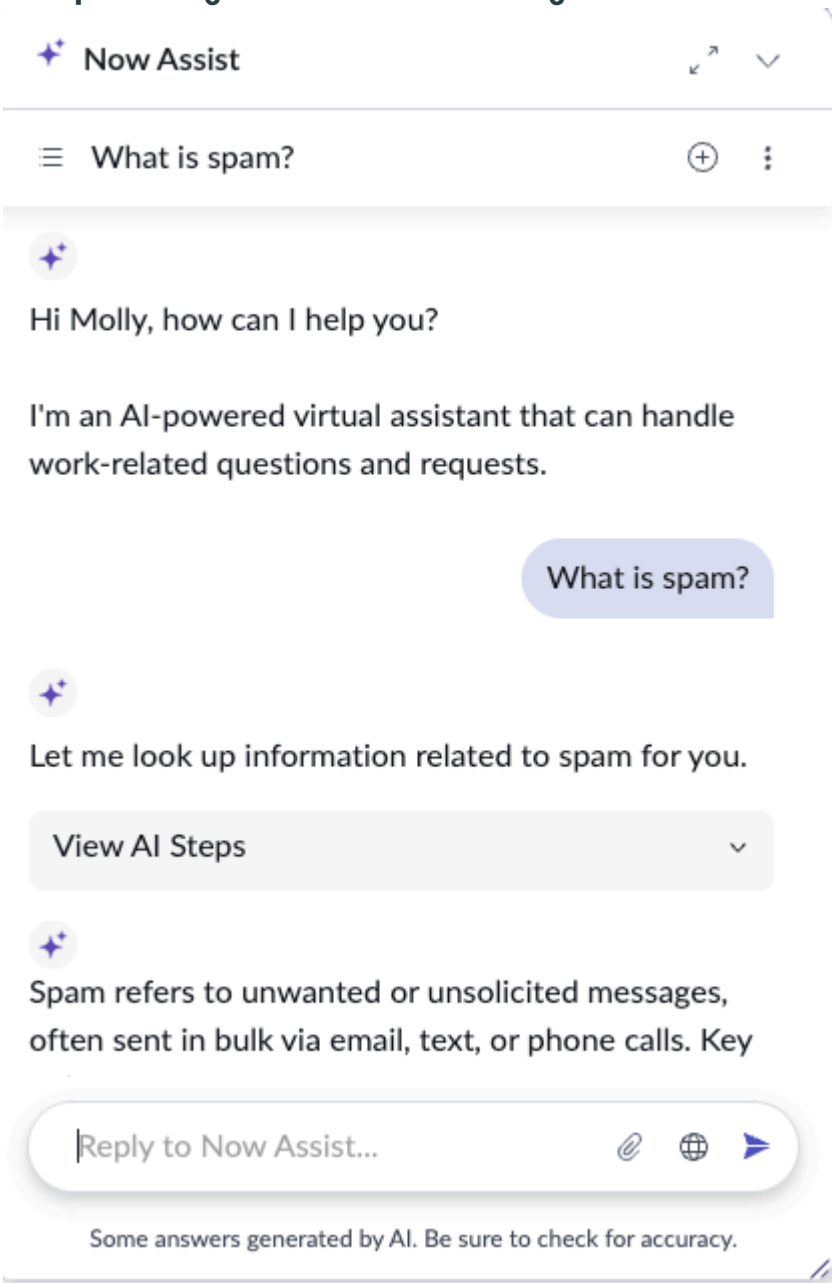
Agentic conversations

Note:
Admins must first enable AI agents before end users can experience agentic conversations. For more information on how to set up AI agents for agentic conversations, see Agentic conversations in Virtual Agent. Now Assist in Virtual Agent discovers and executes AI agents. For more information about AI agents, see Now Assist AI agents.

When you submit a single question to the Virtual Agent, the agent understands the query and begins a flow. When you submit a message with multiple questions or requests, Virtual Agent answers the multiple questions consecutively in a response. It can reason, plan, and execute across AI agents, Virtual Agent topics, conversational actions and subflows, catalogs, Knowledge Base articles, custom skills, and any Now Assist in Virtual Agent supported skills to help you. Before receiving a response, you receive acknowledgment messages from the Virtual Agent and on-screen messages to let you know where the agent is at in the agentic processing flow. After the processing has completed its flow, a View AI Steps section header appears, where the processing flow steps can be expanded and viewed. You can stop the agentic processing flow at anytime by selecting the End flow icon ( ). After an action starts, it cannot be stopped. Selecting the End flow icon ( ) only stops the proceeding processing steps.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of an agentic conversation starting




Catalog citation

If you're accessing the catalog citation through the synthesized response popover, the popover options vary depending on where you're located. The only popover option when in chat is the **Start request** option which begins the catalog action within the chat. There are two popover options when you select the synthesized response through the portal's search bar: **Request with form** and **Request in chat**. Similar options also appear in the regular search results area, as indicated by the request in chat icon ( ) and request with form icon ( ). Depending on your selection, the catalog request flow launches within either the Virtual Agent chat or a form.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

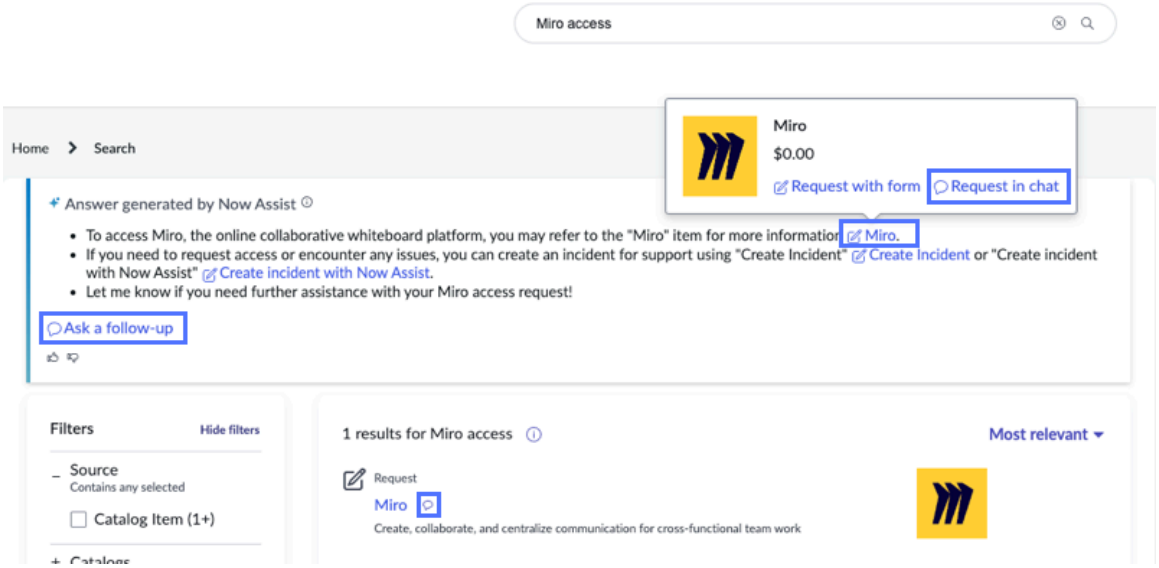Example of synthesized response popover on the portal's search results page



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

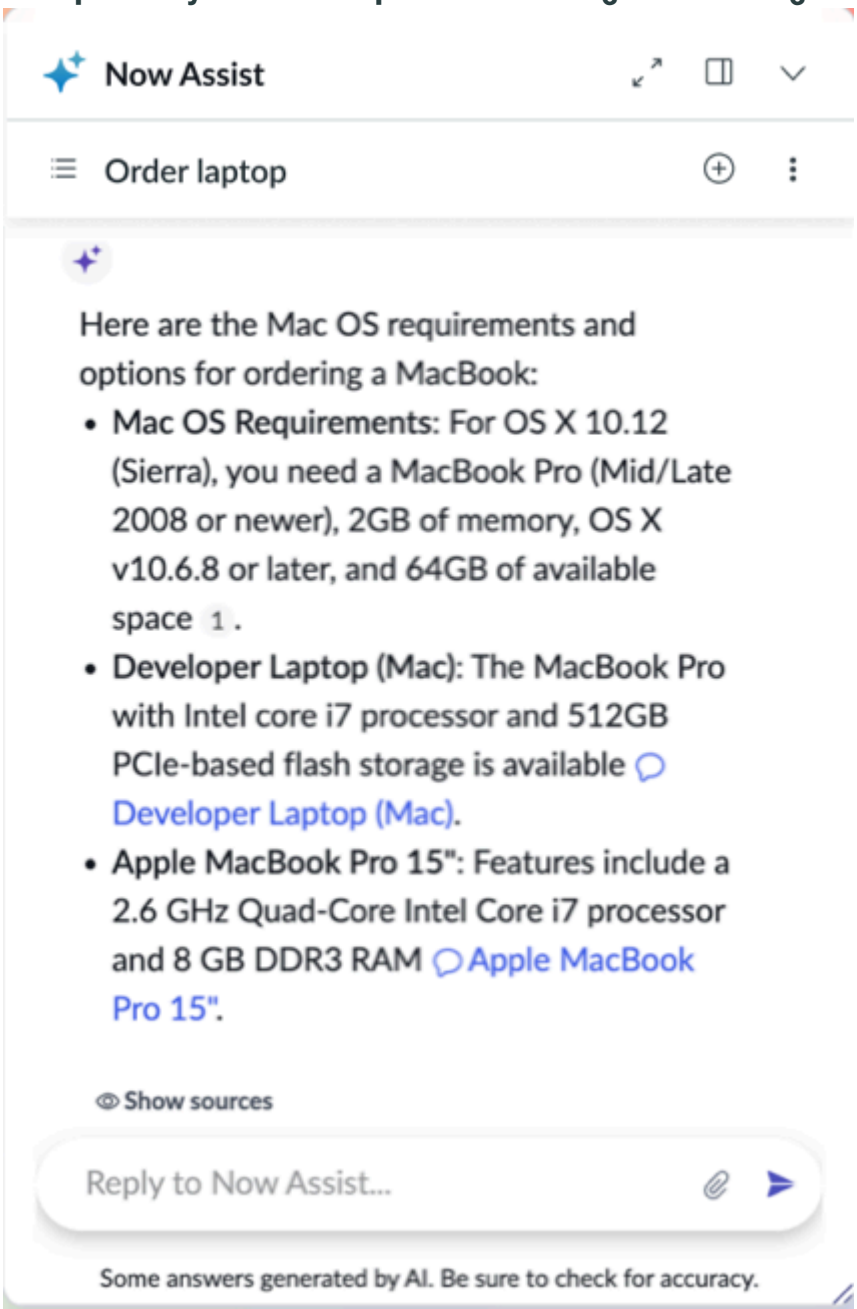
Example of a synthesized response with catalog and knowledge base citations



If you chose to complete the catalog request through chat, after the catalog order is complete, Virtual Agent displays a summary card for the order.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

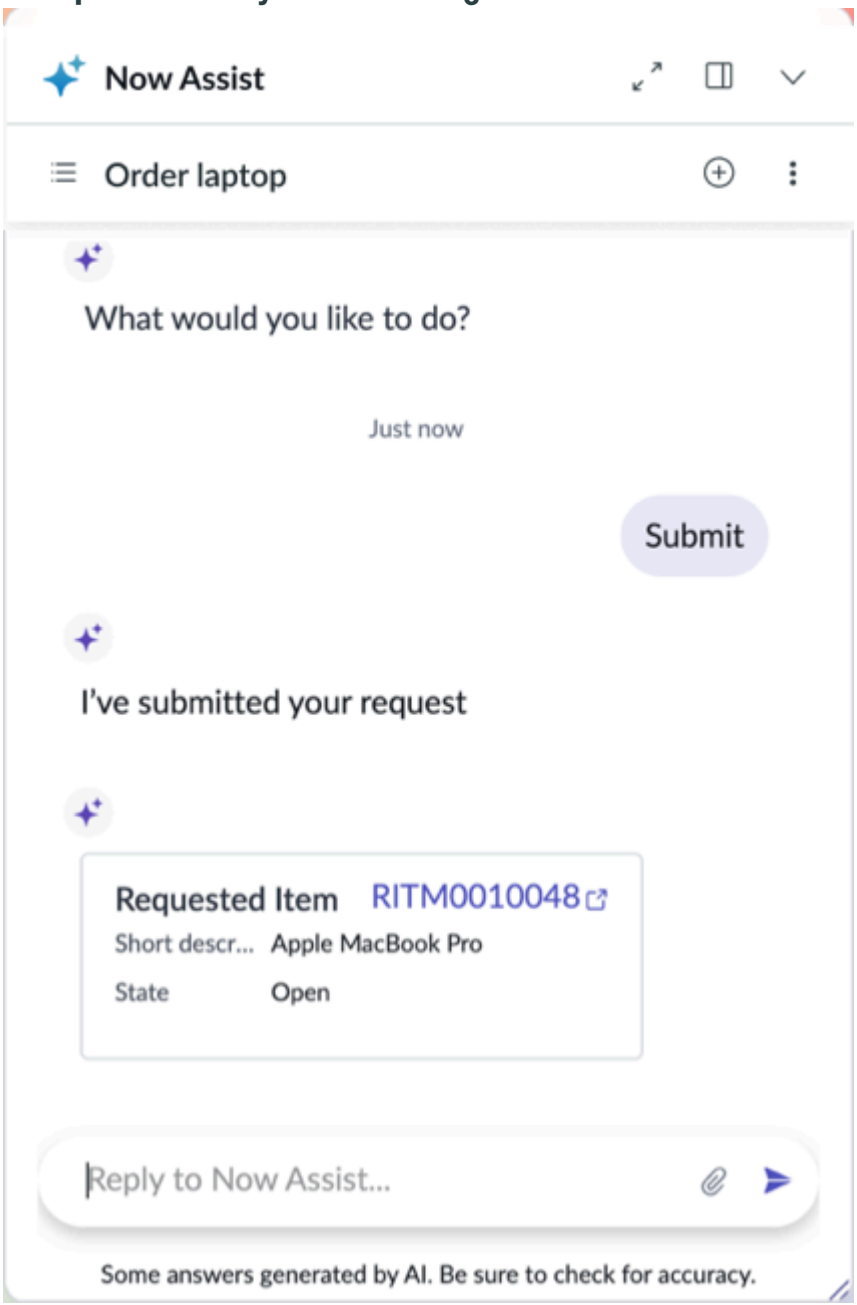Example of summary card for catalog order in chat



Topic, subflows, or actions citations

These assets are associated with the chat icon ( ) and if selected, that flow begins within Virtual Agent. The popover is not applicable to these types of assets.

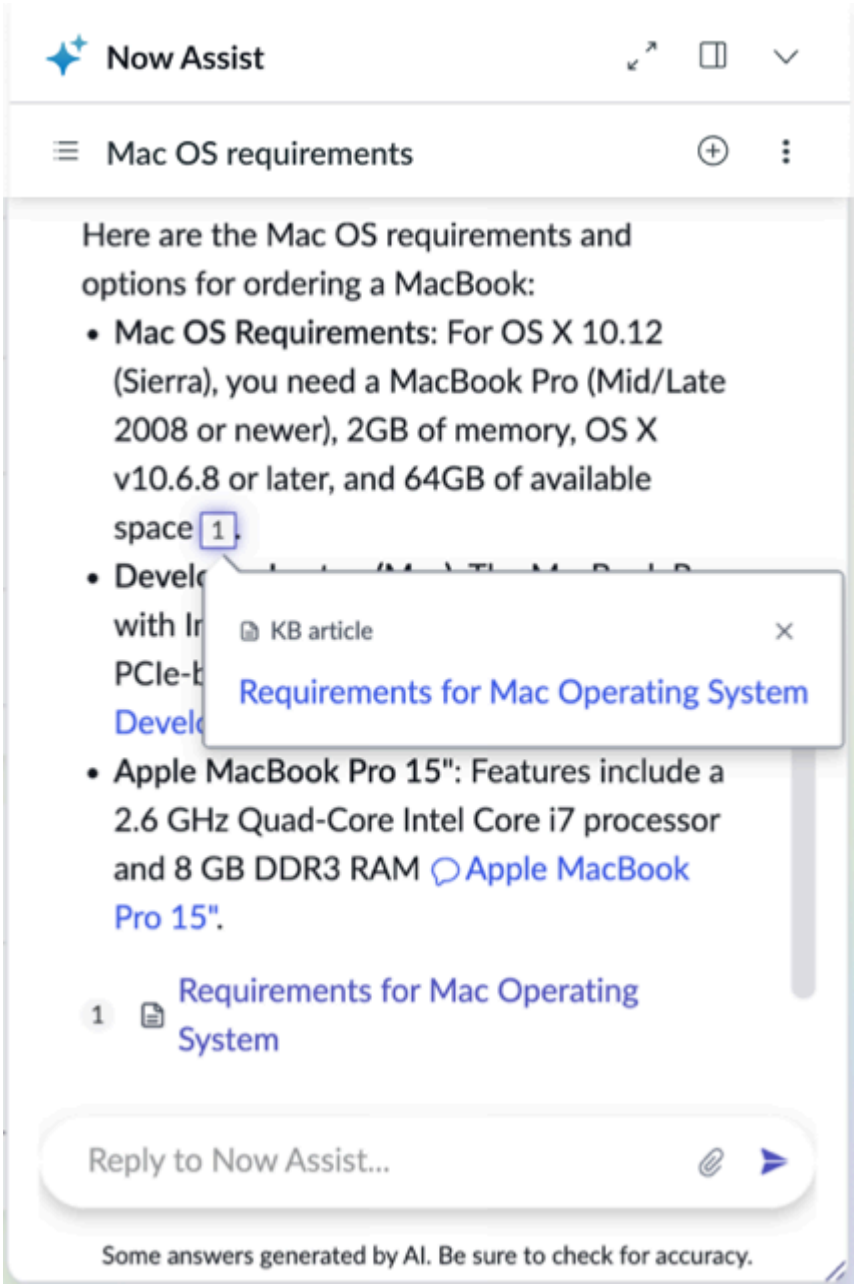
Q&A Knowledge Base citations

The answer is shown with the option to view your sources through the numbered inline citations icon (1) and in the **Show sources** section. These Knowledge Base inline citations show which ServiceNow knowledge articles were used to generate the response.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
If you have activated Knowledge Graph, you may get more personalized Q&A Knowledge Base responses depending on whether the user schema attributes were triggered. For more information about receiving these personalized responses, see Access Knowledge Graph Schema.

Example of Knowledge Base inline citation, popover, and Show sources expanded



External content connections citations

The answer is shown with the option to view your sources through the numbered inline citations icon (1) and in the **Show sources** section. If external search sources are added to your information sources when Configuring assistants overview, you can search through external content connections. This can include information from attachments and knowledge blocks, or from the following list of content connections:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Adobe Experience Manager as a Cloud Service external content connector
- Amazon S3 external content connector
- Asana external content connector
- Atlassian Confluence Cloud external content connector
- Atlassian Jira Cloud external content connector
- Box external content connector
- Docusign external content connector
- Dropbox external content connector
- GitHub Enterprise Cloud external content connector
- GitLab external content connector
- Google Drive external content connector
- HubSpot external content connector
- Lucidchart external content connector
- Microsoft OneDrive external content connector
- Microsoft SharePoint Online external content connector
- Microsoft Teams external content connector
- Microsoft Viva Engage external content connector
- Miro external content connector
- monday.com external content connector
- Notion external content connector
- SAP DMS external content connector
- ServiceNow documentation external content connector
- ServiceNow instance external content connector
- Slack external content connector
- Smartsheet external content connector
- Trello external content connector
- Webcrawler external content connector
- WordPress external content connector
- Workday external content connector
- Zendesk Guide external content connector
- Zoom external content connector

For more information about external content connections, see External Content Connectors.

People citations

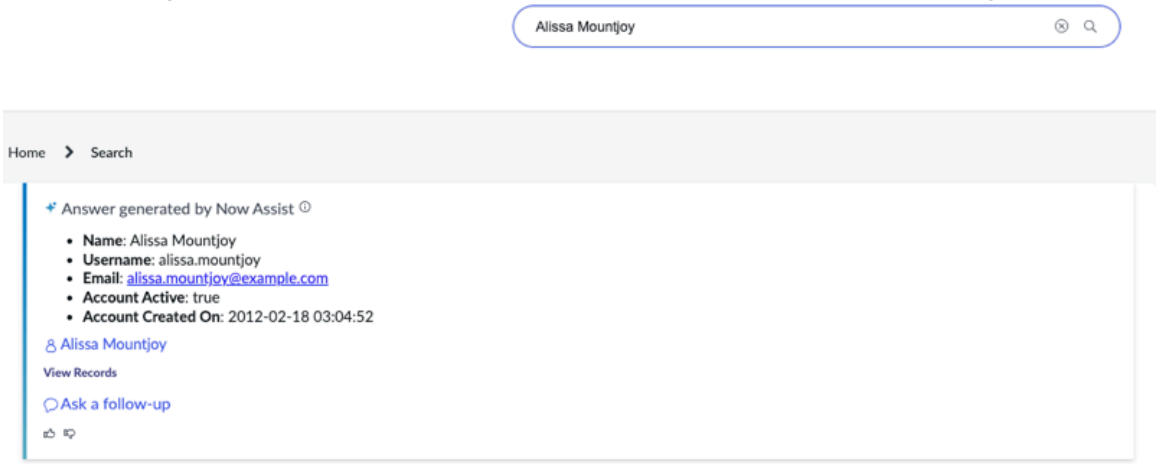
Information about people in your organization can be found if you have activated Knowledge Graph.

Information about the person you're searching for appears in the synthesized response, along with an inline people citation. If a direct match doesn't occur and multiple people are found, try providing more information to narrow down the people search results. Up to three people can

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

appear in a synthesized response. You may be asked a clarifying question, such as `Are you asking about [user_1], the programmer, or [user_2], the faculty member?` to yield better results. Selecting the person's name redirects you to the portal's user profile landing page.

Example of synthesized response for people on the portal's search results page



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of synthesized response with people inline citations in chat



Selecting the person's name presents a popover. The information in the popover can include the following information:

Note:
The following popover details can be customized through EVAM. For more information about customizing the data details, see Define an EVAM view template.

- Manager
- Location
- Email
- Teams
- Phone
- Shared files

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:
Shared Microsoft SharePoint files only appear if a Knowledge Graph admin has activated the *sn_kg_conn_user_shared_files* record in the Knowledge Graph Related Data Map [sn_kg_related_data_map_list] table. Shared Microsoft SharePoint files between you and the person found appear only on the people popover. These shared files only appear after you have completed the prompt to **Log in**, signed in successfully, and have entered a new search query for that person. A new search query is necessary after you have signed in so that up to three shared Microsoft SharePoint files can appear. You're automatically logged out of your Microsoft account every three months and must repeat the **Log in** prompt again to see shared files.

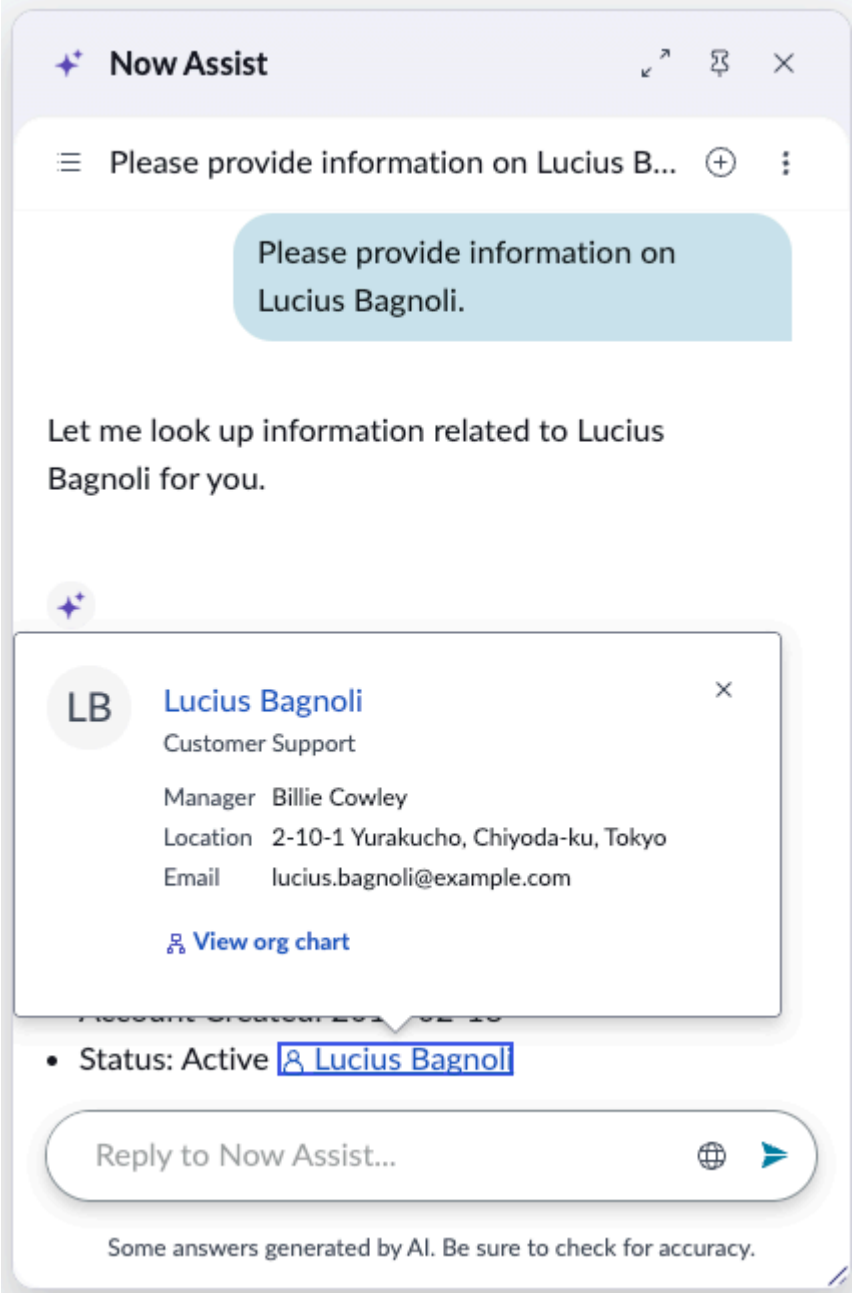
If you do not have a valid token, you are prompted to sign in and are redirected to the Microsoft login page. If you have not configured the Microsoft OneDrive application, see Configure Microsoft OneDrive application for Knowledge Graph.

- View org chart

Note:
Selecting **View org chart** opens the interactive view to the right of the chat conversation. The person's information is shown along with their reporting structure in their company's organization chart. You can view and select contact options in the reporting structure of the organization chart. Secondary links like **View profile** open in a new tab and do not disrupt the conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of people citation's popover



Although rare, when you receive a synthesized response that includes a person, you may also receive other citations associated with that person. For example, a Knowledge Base article that was authored by the person you searched for may also appear.

Note:
If you have activated Knowledge Graph, you may get more personalized Q&A Knowledge Base responses depending on whether the user schema attributes were triggered. For more information about receiving these personalized responses, see Leverage Knowledge Graph prebuilt integration with Virtual Agent.

Extended entities and view records

Extended entity information can be found if you have activated Knowledge Graph.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
To enable the Knowledge Graph natural language query (NLQ) schema, configure this schema for the assistant. To configure the schema for an assistant, see Assign search sources to a chat assistant.

These extended entities that come from the additional custom tables associated with the Knowledge Graph natural language query (NLQ) schema can include:

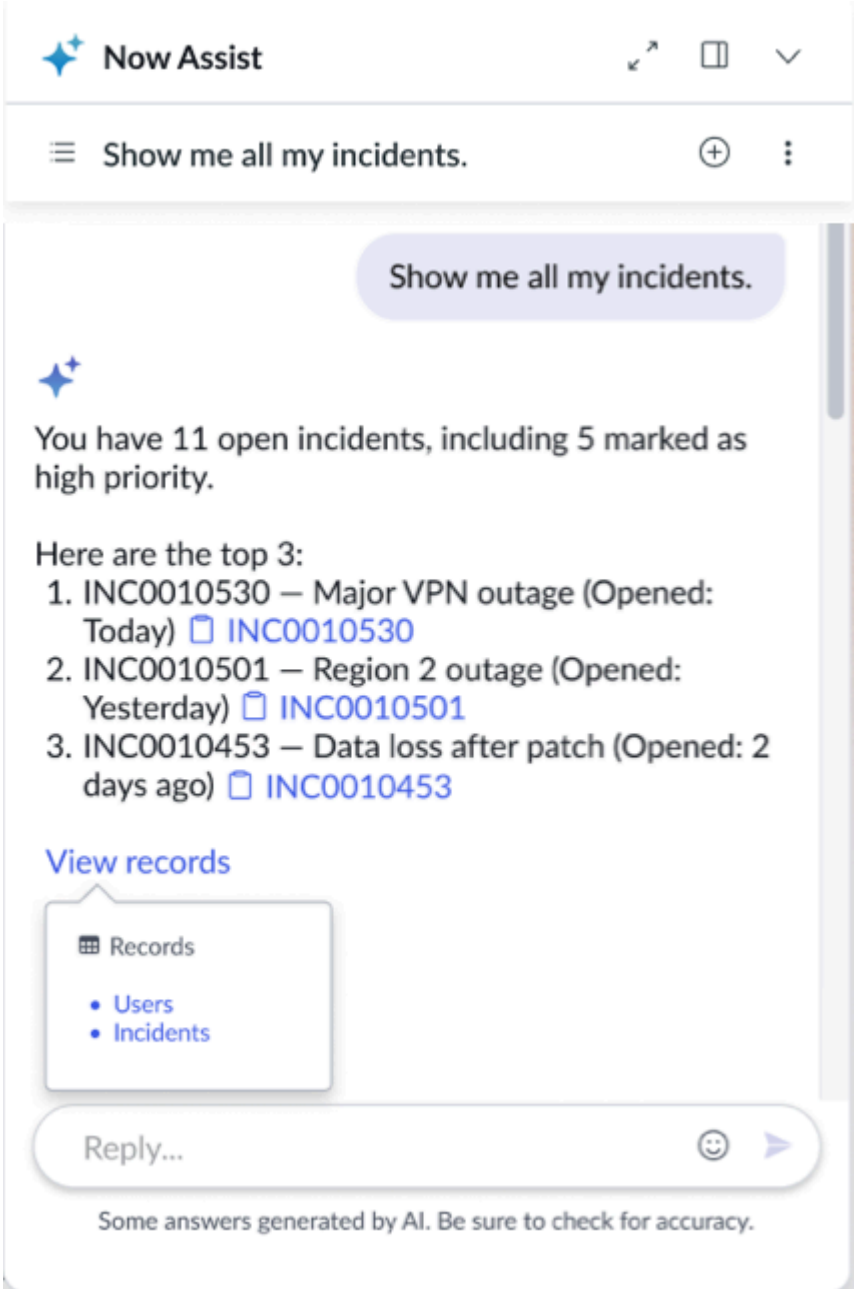
- Assets
- Incidents
- Recently viewed knowledge base articles
- Requests
- Tasks

Select an entity in-line citation to view that entity record in a new tab, or select **View records** to view a list of additional entities. Selecting a link from the **View records** pop-up opens a new tab with that entity table's data.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of extended entities and view records

The following example is of a conversation showing 3 out of 11 incidents and the option to view records to view additional users and incident records.




Chatting with a live agent in Virtual Agent

You can chat with a live agent if you need more support. Select the **Contact Live Agent** button found in the Support and settings (⋮) option, enter a request such as `Chat with live agent` into the chat, or select the **Request a live agent** fallback option. After an agent has accepted your chat, the agent's name and avatar appears at the top of the chat in a banner. Only one live agent chat at a time is permitted. To exit the live chat, select **End live chat**. The chat history then moves to the Closed chat section.

Note:
When enhanced chat is turned on, post-chat surveys only appear after a live agent conversation has ended.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

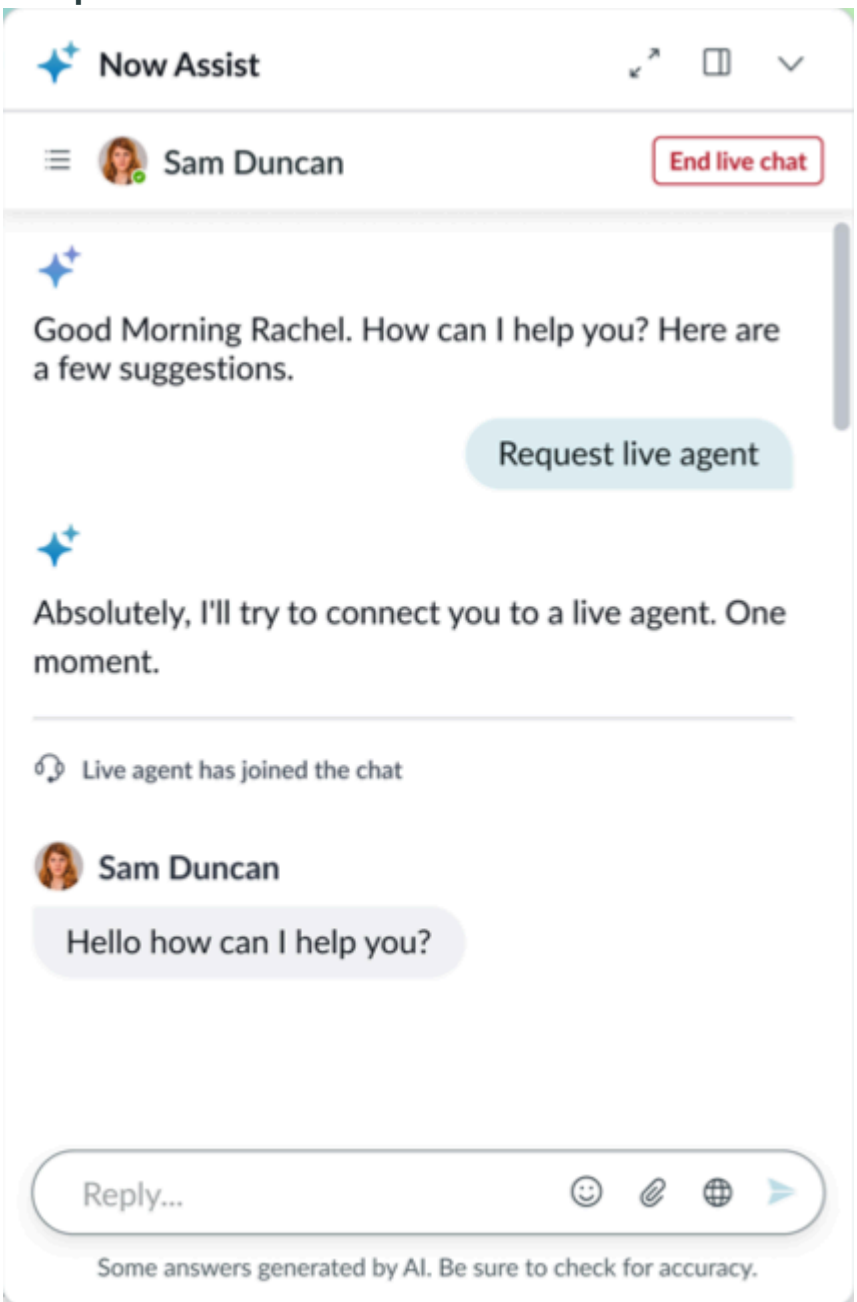Example of the live chat banner



Fallback options

Note:
For more information about where and how to enable fallback options, see Manage an assistant chat experience.

A fallback state can occur whenever search results are unavailable. Scenarios where search results are unavailable include the Virtual Agent didn't understand the query, complaint small talk was found, or an error occurred. When search results are unavailable, a single or multiple fallback options may appear. These fallback options include:

- **Request a live chat**: Triggers live agent mode and routes you to a human support representative.
- **Search the web**: Triggers web search mode and uses the internet to search for the results.

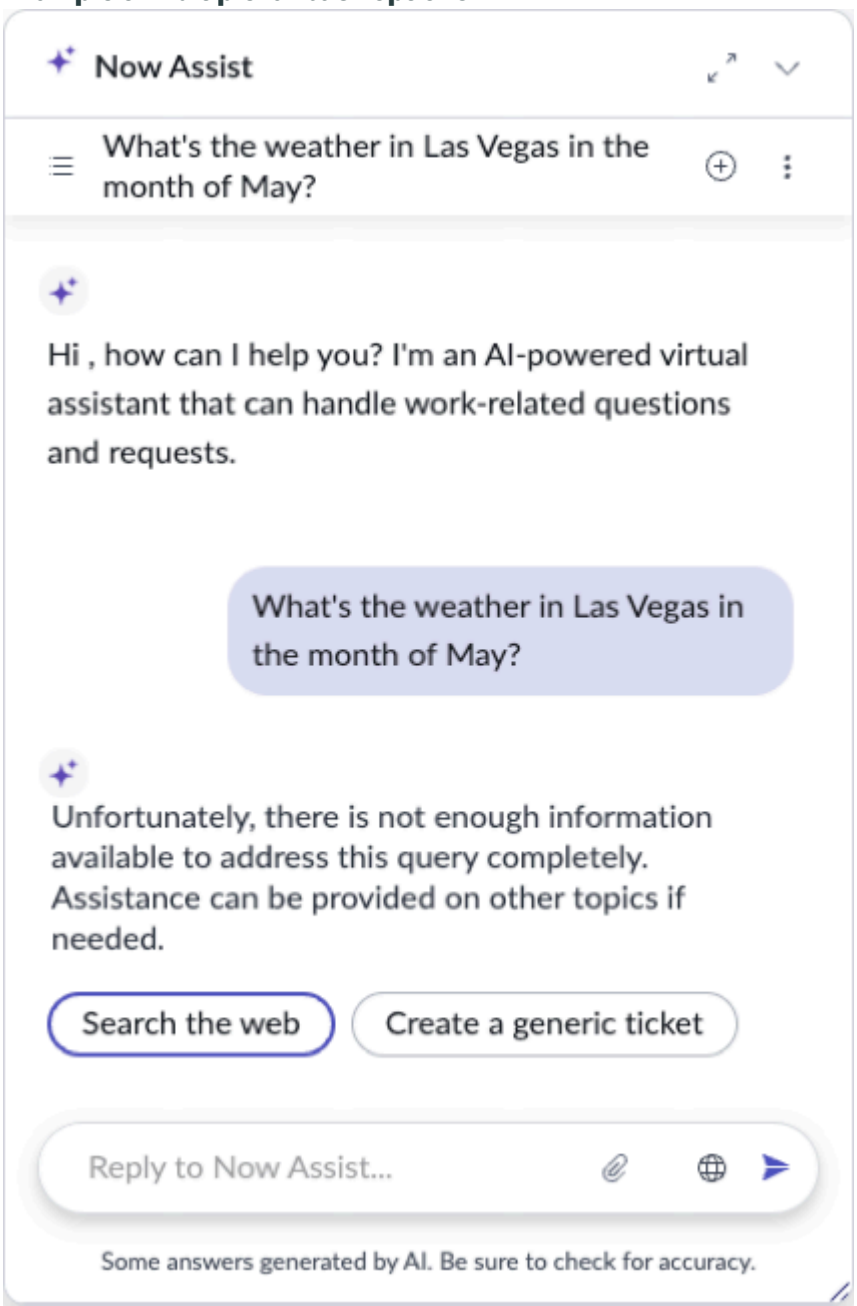
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Only the last query entered into the conversation is considered when entering web search mode via this **Search the web** fallback option.

- **Create a generic ticket**: Creates a record.
- **Custom fallback option**: Presents a fallback Virtual Agent topic.

Select a fallback option to launch that mode or action.

Example of multiple fallback options




Proactive triggers and Virtual Agent notifications in enhanced chat

Proactive triggers and Virtual Agent notifications can be selected and completed in a Virtual Agent conversation.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Proactive triggers and simple Virtual Agent notifications are displayed the same way on the portal as a pop-up rectangle box.

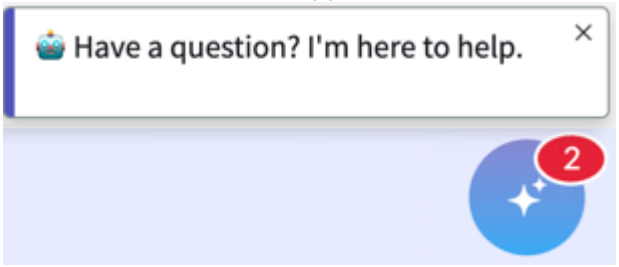Example of proactive trigger or notification in enhanced chat



Proactive triggers and Virtual Agent notifications only display on the portal pages with the chat button and are unavailable in the full-page experience view. Selecting a proactive trigger redirects you to a new chat. If you switch to a new chat while another active chat is ongoing, a pop-up message on the chats icon appears: `Your previous chat was saved. You can revisit all of your past chats and continue ones that are still active.` For more information on Proactive Triggers, see Exploring Proactive Triggers.

Virtual Agent notifications display as an unread message and after you select the notification, the notification displays in the chat conversation. For Virtual Agent notifications, the *`sn_nowassist_va.nass_notification_enabled`* system property defaults to `true` in System Properties (sys_properties.list). When *`sn_nowassist_va.nass_notification_enabled`* is set to `true`, Virtual Agent notifications appear on your portal home page. Selecting a notification redirects you to the conversation in a chat. Simple (nonactionable) notifications are displayed in the navigation area's **Chats** > **Updates** section. Actionable notifications are displayed in the navigation area's **Chats** > **Active** section. These actionable notifications create a chat with the notification title as the chat title. Selecting an actionable notification loads the conversation with the notification and associated actions. If you don't act and initiate a search, after viewing the search results, you can switch back to the notification that triggered the conversation by entering `Show notifications`. Entering `Show notifications` in a non-notification conversation results in a message indicating that there are no actionable notifications to view. To view your actionable notifications, it's best to select the chats icon ( ). When you select a notification, the unread badge count on the chats icon ( ) goes down. After you have worked with the actionable notification, the notification moves to the **Chats** > **Closed** section. For more information on configuring Notifications, see Configuring Virtual Agent notifications and Configure a delivery channel for Virtual Agent notification.

Chat streaming responses

Synthesized responses stream in real time for Now Assist LLM chat conversations instead of waiting for the entire message to render. Streaming enables responses from the LLM to be sent immediately to help improve performance when replying to requests.

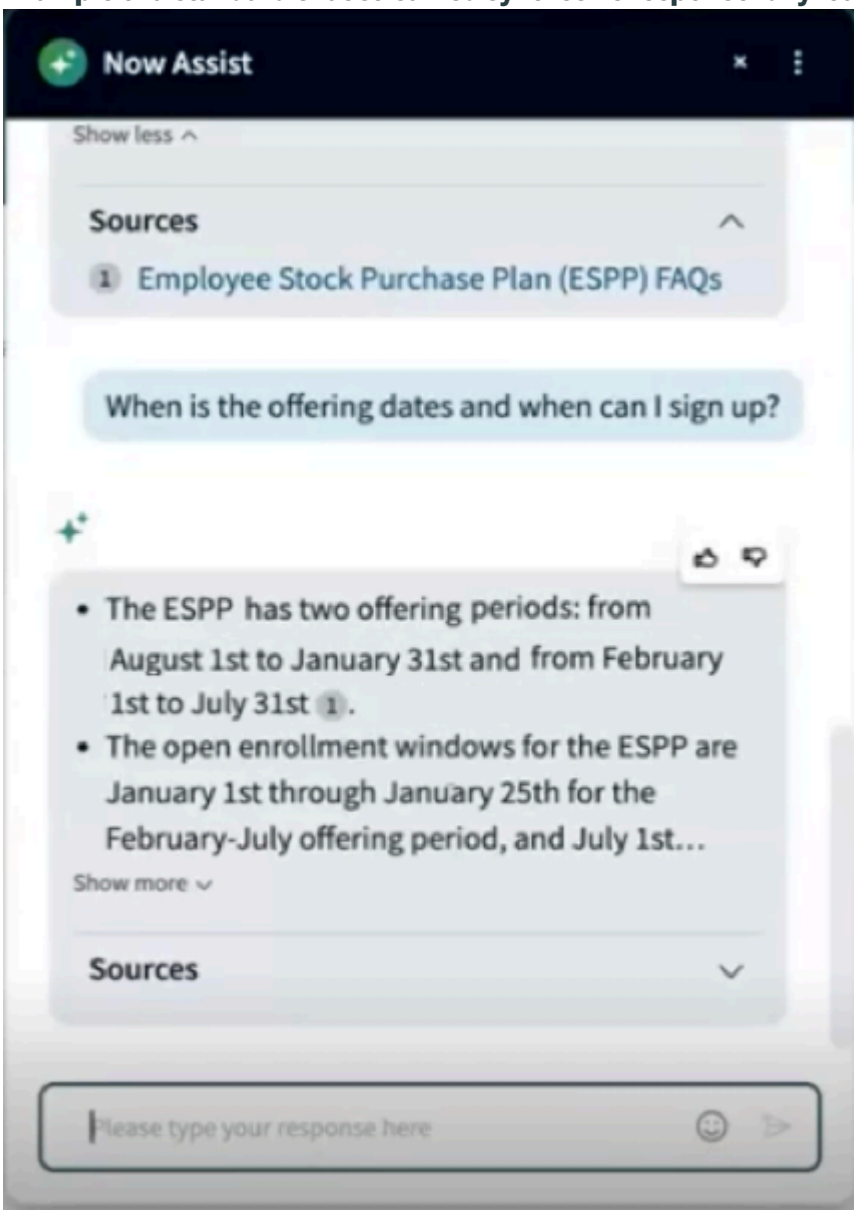
LLM response messages stream for synthesized responses as they're generated instead of appearing all at once to end users. Responses stream in either one letter or one word at a time. After end users enter a question or request into the chat, synthesized responses begin to stream in and stop streaming after the full message has been delivered. While the response is generating, various loading messages (such as `Generating an answer`) appear. For more information and examples of loading messages, see Latency feedback in Virtual Agent. An animated sparkle icon appears while the response is generating. The animated sparkle icon changes to the static branded Virtual Agent icon after the response has fully loaded.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Tip:
If you want to turn off the animated sparkle icon during streaming, set *sn_nowassist_va.nass_animated_avatar_enabled* to `false` in the System Property [sys_properties] table. When the animated sparkle icon is off, the loading messages are followed by an animated ellipsis ••• icon. For more information about this system property, see Available system properties.

For standard chat, the **Show more** link appears after six lines of text is streamed. Selecting **Show more** streams the remainder of the message until the full message is delivered.

Example of a standard chat streamed synthesize response fully loaded



For enhanced chat, streaming is applicable to the synthesized response wherever it applies. When streaming completes, the entire synthesized response displays, rather than a truncated response, in the chat window or enhanced chat. The synthesized response can stream in the chat window or on the portal's search results page, as well as the enhanced chat's **Now Assist** tab.

To enable streaming, configure your AI assistants to stream responses during the Now Assist in Virtual Agent guided setup. For more information, see Configuring assistants overview.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Important:
The streaming feature isn't available when dynamic translation is turned on. To enable streaming, dynamic translation must be turned off.

Mid-topic switching during Now Assist in Virtual Agent conversations


Mid-topic switching easily lets you switch between requests, using plain language whenever new queries are made in the same Now Assist in Virtual Agent conversation.

During a Now Assist in Virtual Agent conversation, you can switch the conversation request without having to restart the conversation. For example, you are in the middle of a conversational catalog item and ordering an iPad when you remember open enrollment is coming up at your company. You can ask Virtual Agent about when open enrollment is without having to exit out of your existing conversation. The Virtual Agent provides a synthesized response which includes a summary about open enrollment, but also informs you that you can either continue with the existing conversation (ordering an iPad) or switch the conversation to focus on your new request (open enrollment).

The following images show examples of how mid-topic switching can appear based on your conversational settings.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

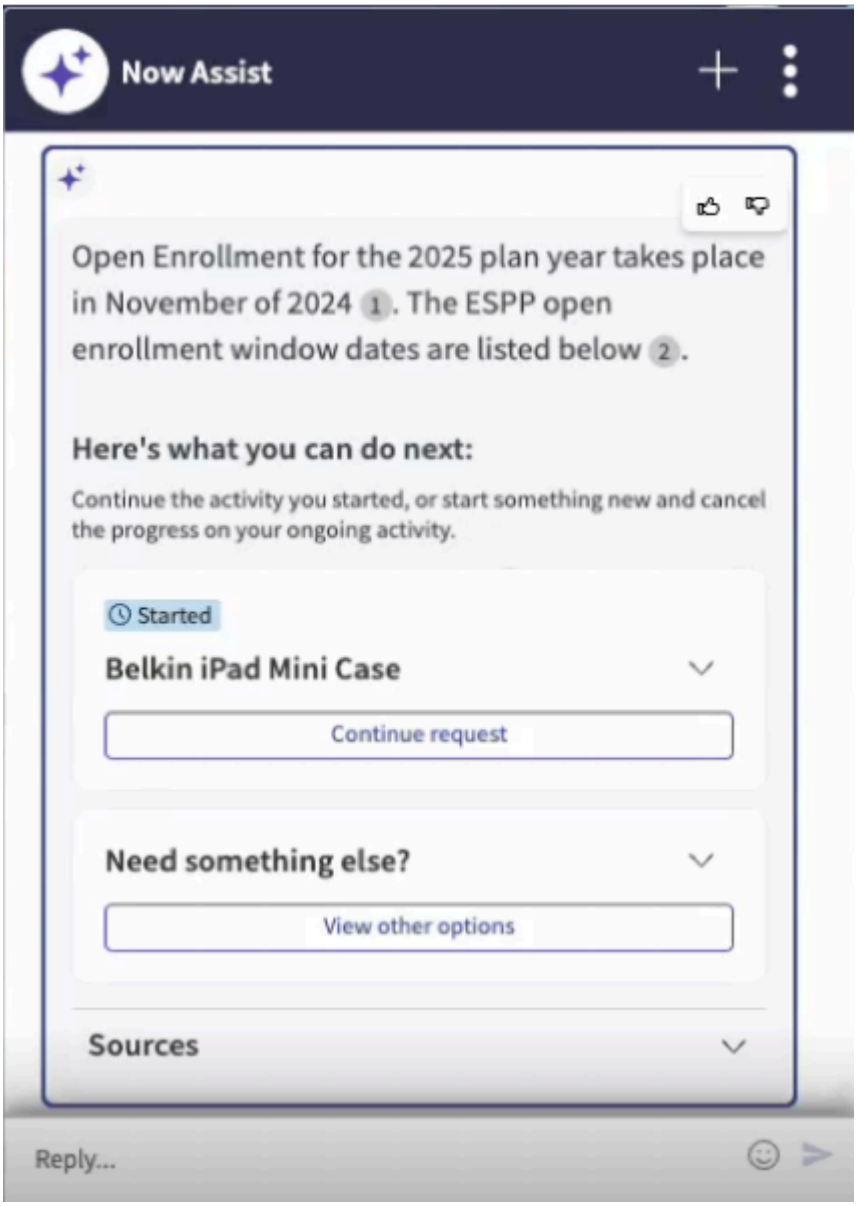Topic switching example in a standard chat conversation



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

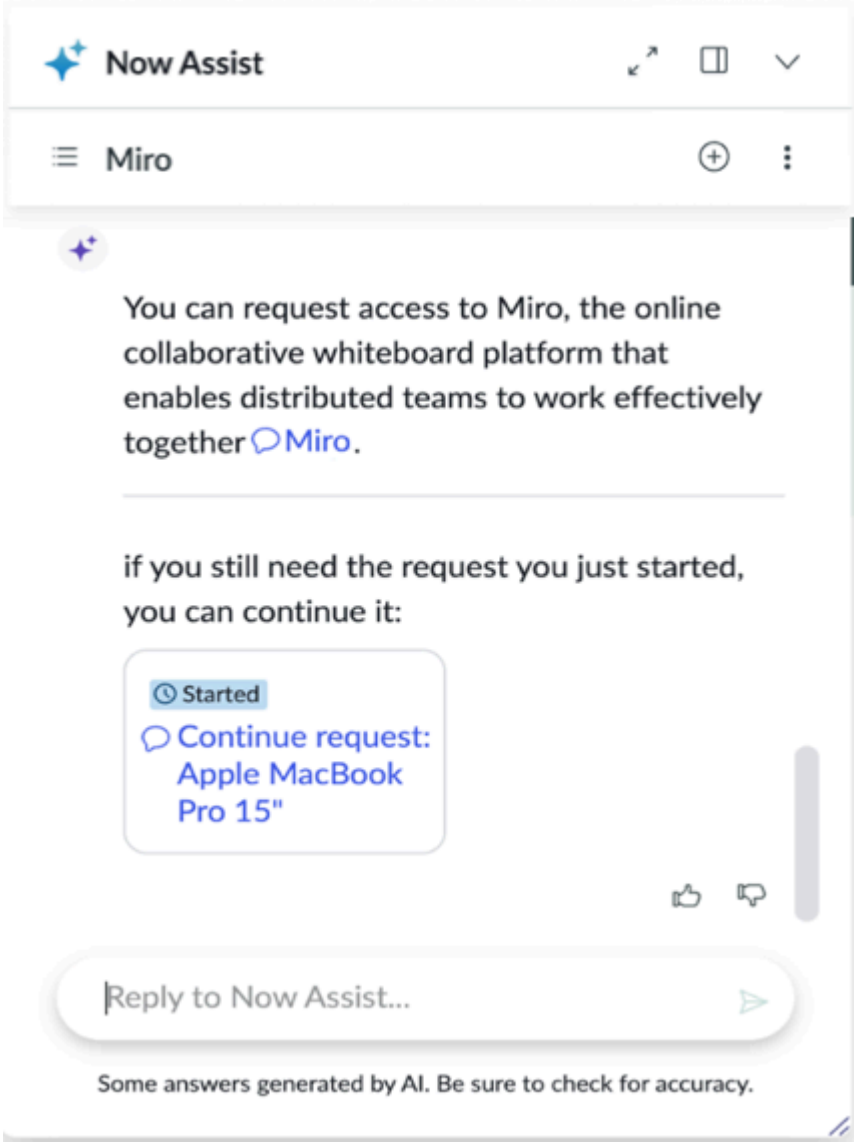Topic switching example in an enhanced chat conversation



If you decide to continue with your original request, you return to the previous conversation. If you decide to switch the conversational focus to something else, you can view additional information about your new request.

Upload documents in a chat

Upload or drag files into Now Assist in Virtual Agent to extract relevant data from a file. The assistant analyzes and understands the content of the files, and you can ask questions about the content of the files or get a summary.

Before you begin

Now Assist in Virtual Agent standard and enhanced chat support uploading documents to the assistant. For more information about the different chat capabilities, see Standard chat and Enhanced chat. Uploading a document within a chat is available to you when an admin activates this feature in the admin guided setup. For more information, see Configuring assistants overview.

Uploaded file formats include text and image files such as PDF, Word (.doc, .docx), JPEG, and PNG. The maximum size of a file is 5 megabytes (MB).

Role required: requestor

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

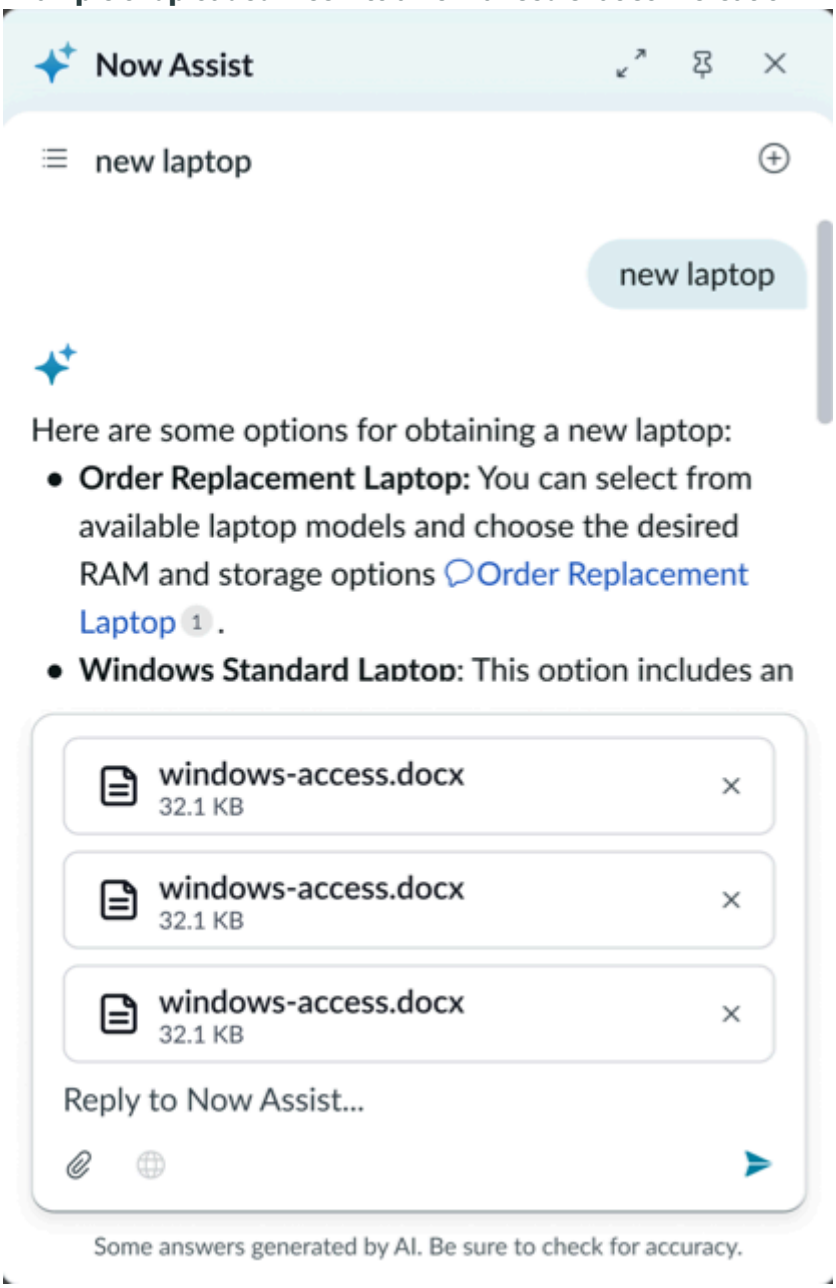
Procedure

1. Navigate to the portal home page that is using Now Assist in Virtual Agent.
2. Launch the Now Assist in Virtual Agent chat window.
3. Select the paperclip icon to upload the file or drag the file into the chat.

   One or more files can be uploaded to the chat. The maximum number of files that can be uploaded is three. You see the progress as the file uploads, until its completion. If the file fails to upload, or the content can't be properly parsed, take corrective action.

   The file is checked for viruses, and an error message appears when a file is non-security compliant. After the file passes the virus scan, the document is secure, and sensitive data isn't retained beyond the chat session. You can't ask follow-up questions about the file after the chat session ends.

   Example of uploaded files into an enhanced chat conversation



4. To ask questions about another file, exit the chat, and upload or drag a new file to the assistant.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Web search

The web search mode performs an internet search to answer a query. Web search mode provides external search results from the internet and these results don't represent company content or policies.

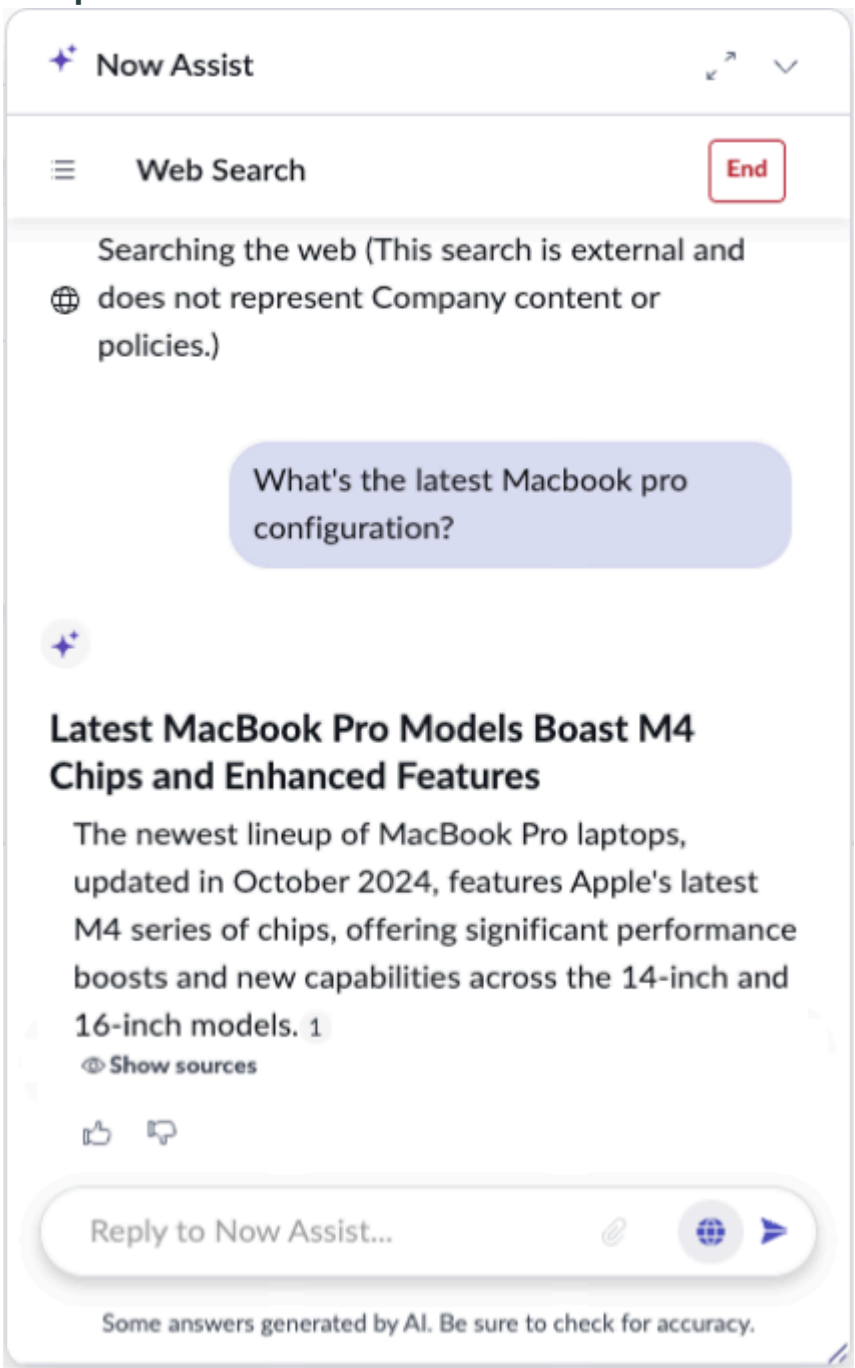
Note:
For more information about how to configure web search and turn on web search, see Web search custom skill and Manage an assistant chat experience.

Web search mode is applicable to Now Assist in Virtual Agent standard chat and enhanced chat conversations. Select the Start web search mode icon ( ) to enter into the web search mode. While in this mode, all queries are answered via internet search results rather than internal company search results. When in web search mode, a divider line appears to indicate a conversational shift and the following text appears: `Searching the web (This search is external and does not represent Company content or policies.)`

For example, if you ask `What's the latest Macbook pro configuration?` in web search mode, a synthesized response appears along with inline citations and sources.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of enhanced chat's web search mode



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

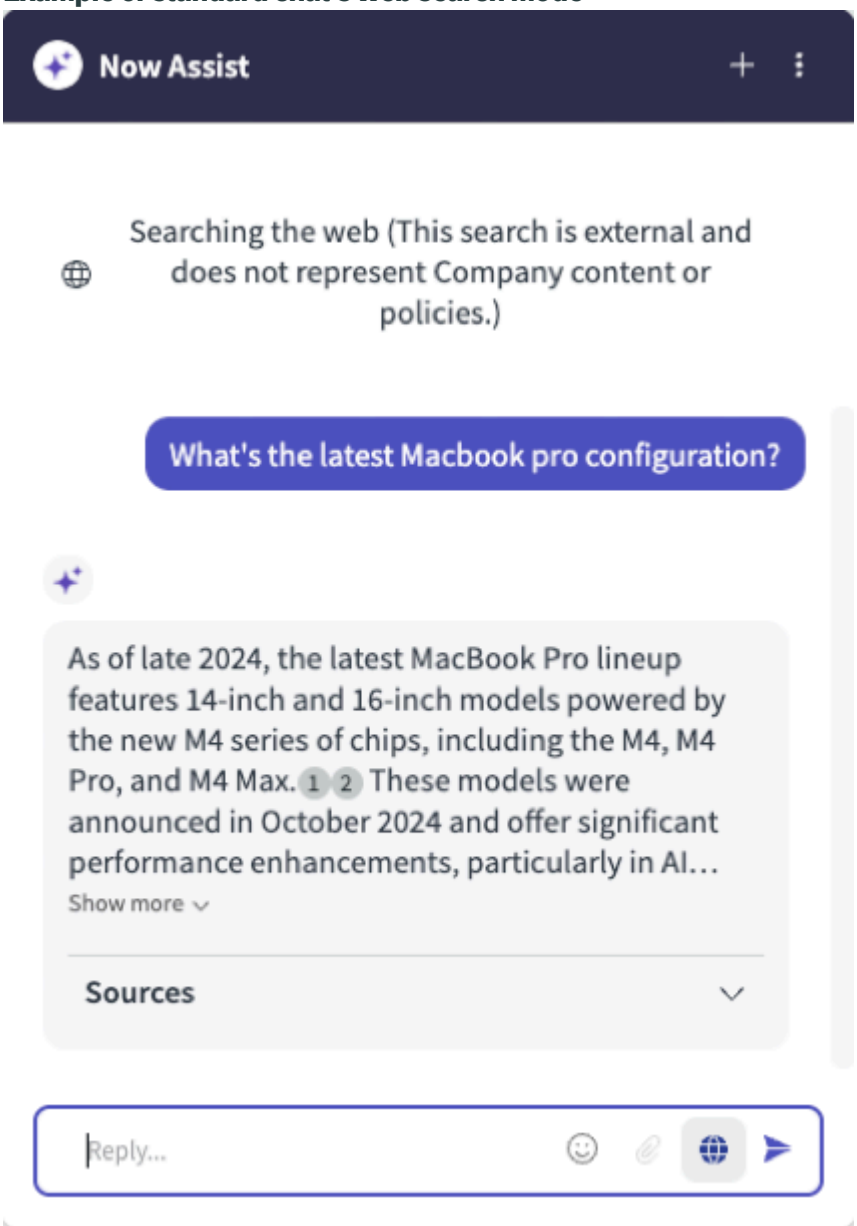
Example of standard chat's web search mode



You can also use web search as a fallback option. For example, if you ask `What's the weather in Las Vegas in the month of May?`, the LLM and AI Search are unable to find an answer through internal sources. Instead, you can be presented with the fallback option to **Search the web**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

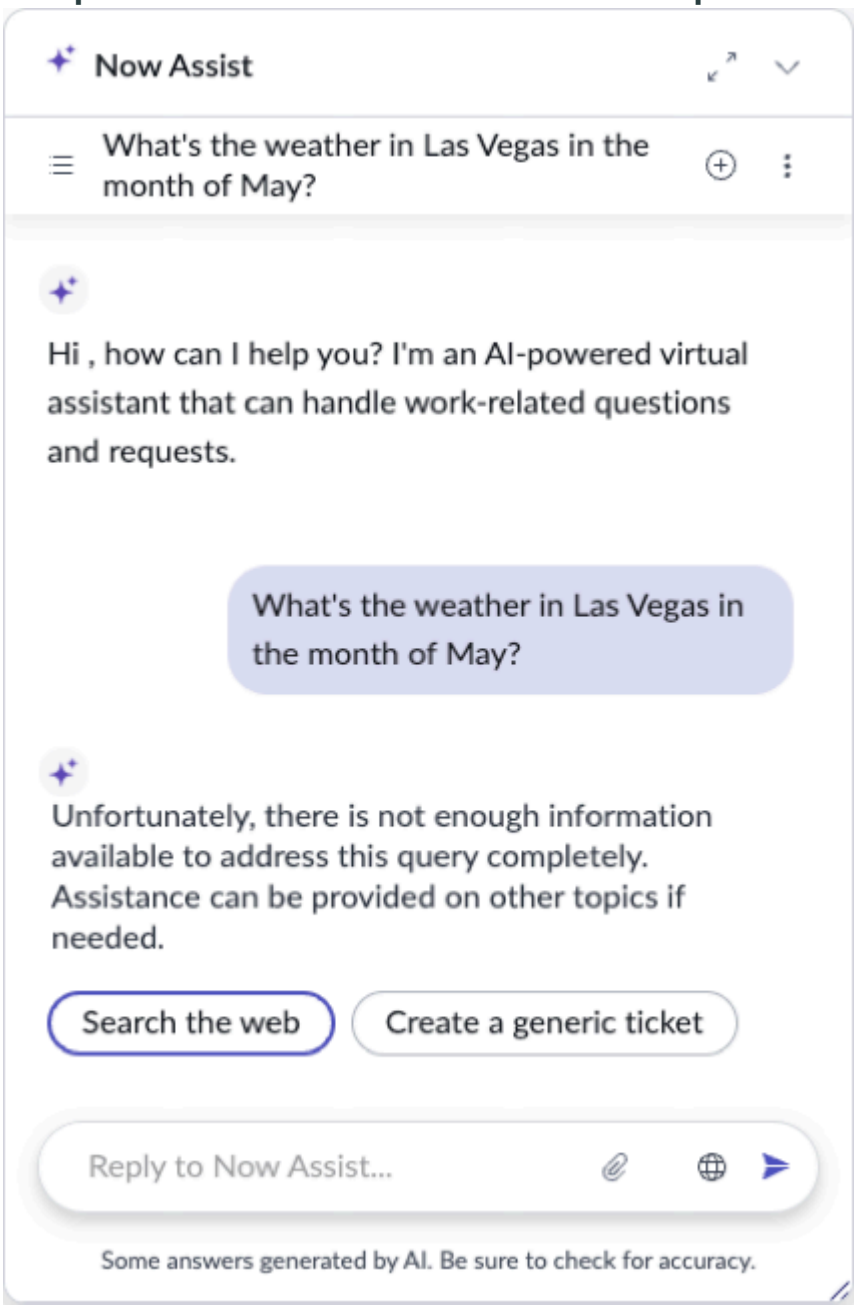Example of enhanced chat's search the web fallback option



Note:

When entering web search via the Start web search icon ( ), the prior conversational history is blanked out. When entering web search via the fallback **Search the web** option, only the last query prior to entering web search mode is taken into account.

To exit out of web search mode and return to internal search results, do one of the following:

- Enter `Exit`.
- Select the End web search icon ( ).
- Select **End** in the Web Search banner.

Note:

The Web Search banner is only applicable to enhanced chat conversations.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Small talk in conversations

Small talk topics and small talk utterances from the Semantic Filter Framework are recognized in Now Assist in Virtual Agent chat conversations.

Small talk is supported by your primary and fallback languages. The semantic filtering recognizes these types of small talk:

- Greetings: For example, `Hi, how are you today?`
- Gratitude: For example, `Thanks, this was helpful!`
- Complaint: For example, `This answer doesn't help me.`

  Chat conversations with complaints may prompt you to request a live agent or another fallback topic, such as, a create a support request topic.

- Closure: For example, `That's all I needed. Bye.`

  For standard chat conversations, the conversation ends when closure small talk is recognized.

  For enhanced chat conversations, conversations do not end and remain in the Active chat section. You can return to the same chat conversation as long as the conversation has not closed. You know that a message has closed when you receive the following response in the chat: `It looks like you're finished with this chat, so I'll go ahead and close it.` Chat conversations eventually close after a designated time has passed. For more information on the closed chats, see Enhanced chat.

  Note:
  For closure types of small talk, you may receive a confirmation message prior to exiting the conversation. The confirmation message asks, `You'd like to end this topic. Is that right?` with the **Yes** and **No** controls displayed. The confirmation message only appears if the *`sn_vad_genai.com.glide.small_talk.closure.prompt_enabled`* system property is switched to `False`. Closed conversations eventually move to the Closed chats.

Suggested actions

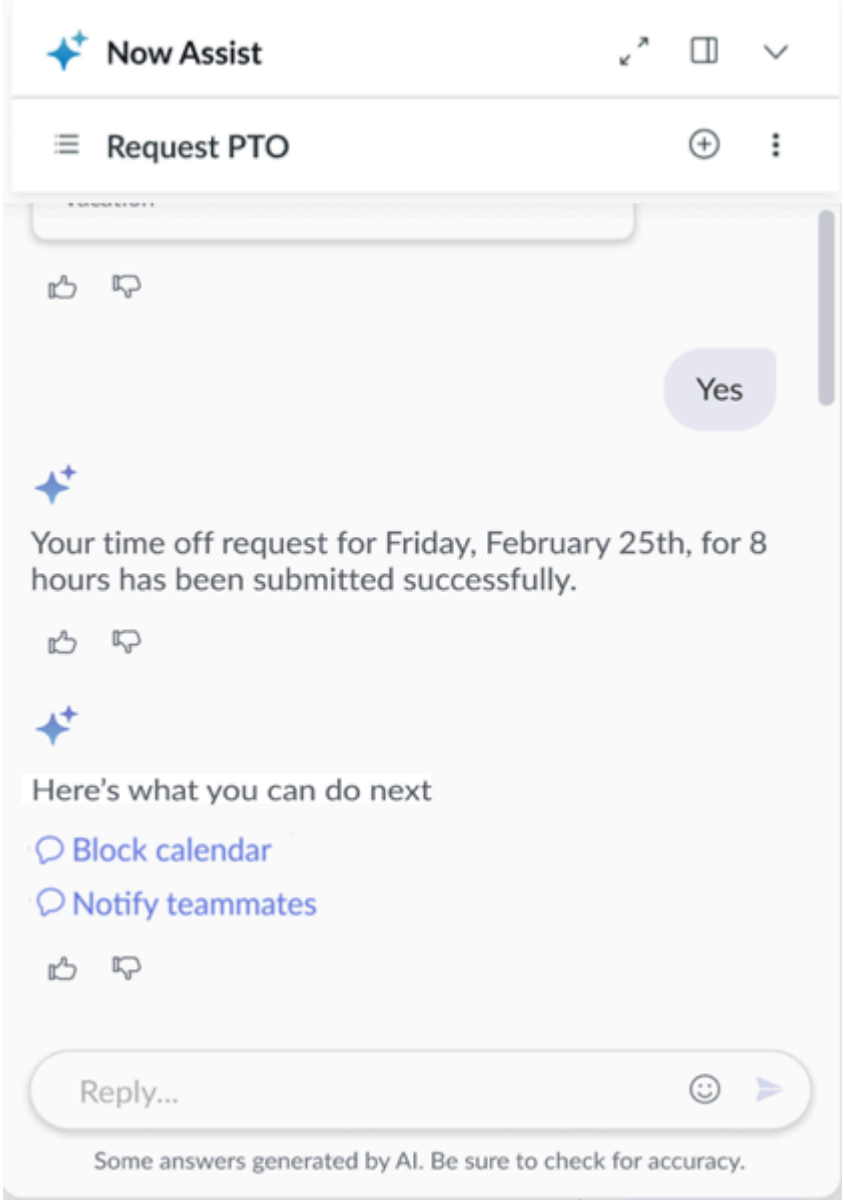
Suggested actions prompt you with two suggested actions related to your prior conversation that you may consider doing next. Suggested actions appear at the end of your Now Assist in Virtual Agent conversation.

Note:
Suggested actions must be turned on through the *`sn_nowassist_va.enable_suggested_actions`* system property. For more information on turning on this feature, see Now Assist in Virtual Agent system properties.

Suggested actions are applicable to Now Assist in Virtual Agent standard chat and enhanced chat conversations. After completing a conversational catalog request, conversational subflow, or Virtual Agent topic, the suggested actions appear after a `Here's what you can do next` header.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example of suggested actions in enhanced chat



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

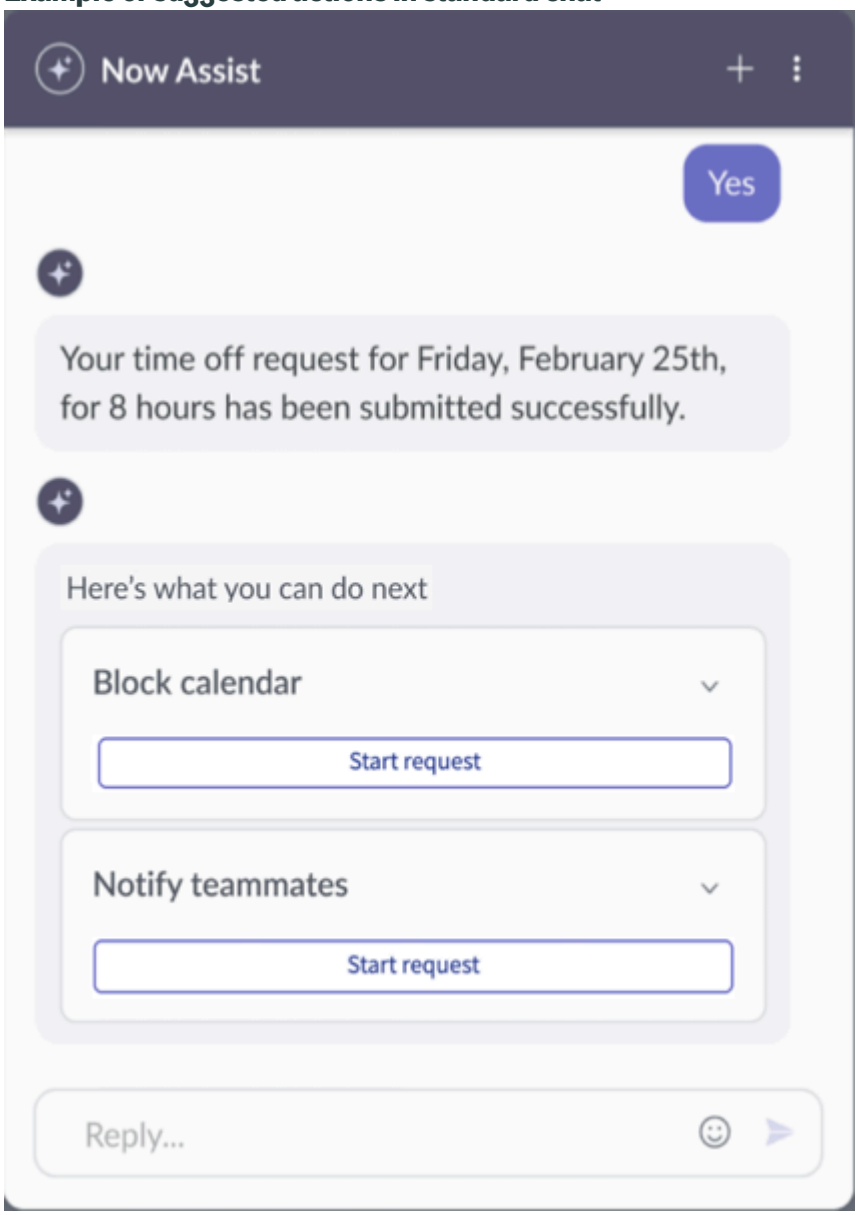Example of suggested actions in standard chat



Selecting a suggested action begins that action within the same chat conversation. If applicable, relevant information from the prior conversation, such as your name, is brought into the selected action. Suggested actions appear only once per last completed action. After completing the suggested action, standard chat conversations close and enhanced chat conversations remain active.

Integrating Now Assist in Virtual Agent with Microsoft Teams

Now Assist in Virtual Agent uses large language models (LLMs) and generative AI to improve the deflection rates and reduce the amount of time-consuming work that Natural Language Understanding (NLU) topic discovery once required.

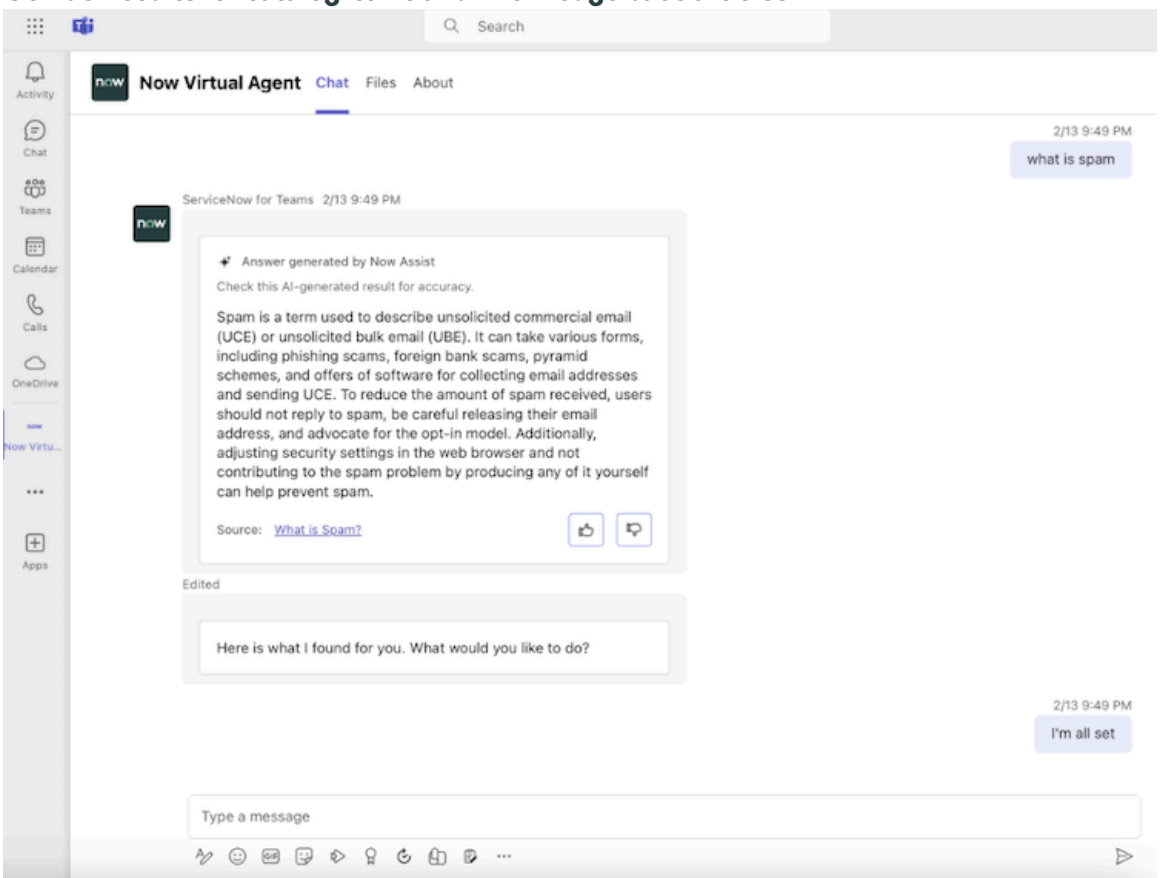
Now Assist in Virtual Agent is available through portals on the chat widget, the mobile app, and Microsoft Teams. To integrate Now Assist in Virtual Agent with Microsoft Teams, see Configuring assistants overview. In step 3 of the procedure to Configuring assistants overview, you can choose where to display Virtual Agent. Select Microsoft Teams.

Now Assist in Virtual Agent with Microsoft Teams relies on AI Search fallback topics. Within AI Search fallback topics, two types of results can appear:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. Genius Results: Catalog items (conversational and non-conversational) and knowledge base articles (single-turn and multi-turn Q&A).

Genius Results for catalog items and knowledge base articles



2. Regular search results (multi-link outputs in conversations).

For more information, see Exploring Now Assist in Virtual Agent and Virtual Agent feature support in Microsoft Teams conversations.

Analyzing assistants

Monitor, evaluate, and optimize the performance of your AI-powered assistants from the Analytics tab of the Assistant Designer.

Assistant analytics overview

Assistant analytics is a centralized dashboard experience within the Analytics tab of Assistant Designer. It's designed to help assistant administrators gain visibility into the performance of their AI-powered assistants across channels and workflows. It provides actionable insights into how assistants are being used, how effectively they are resolving user issues, and where improvements can be made to enhance the self-service experience.

By surfacing key metrics such as assistant usage trends, adoption and engagement, user sentiment, and assist consumption, Assistant analytics enables data-driven decisions that improve assistant configuration, asset design, and overall user satisfaction.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Assistant analytics users

Accessing the Analytics tab in the Assistant Designer requires you to have the virtual_agent_admin role.

Assistant analytics benefits

Assistant analytics dashboard helps you in the following ways.

- Accelerate decision-making through real-time insights into assistant adoption and engagement, enabling you to respond quickly to trends, optimize assistant deployment, and scale your conversational AI footprint.
- Improve discoverability and transparency of assistant assets and performance, making it easier to identify which assistants and conversational assets are driving value.
- Quantify the impact of automation by tracking the number of user intents resolved without human intervention, reducing support costs and increasing operational efficiency.

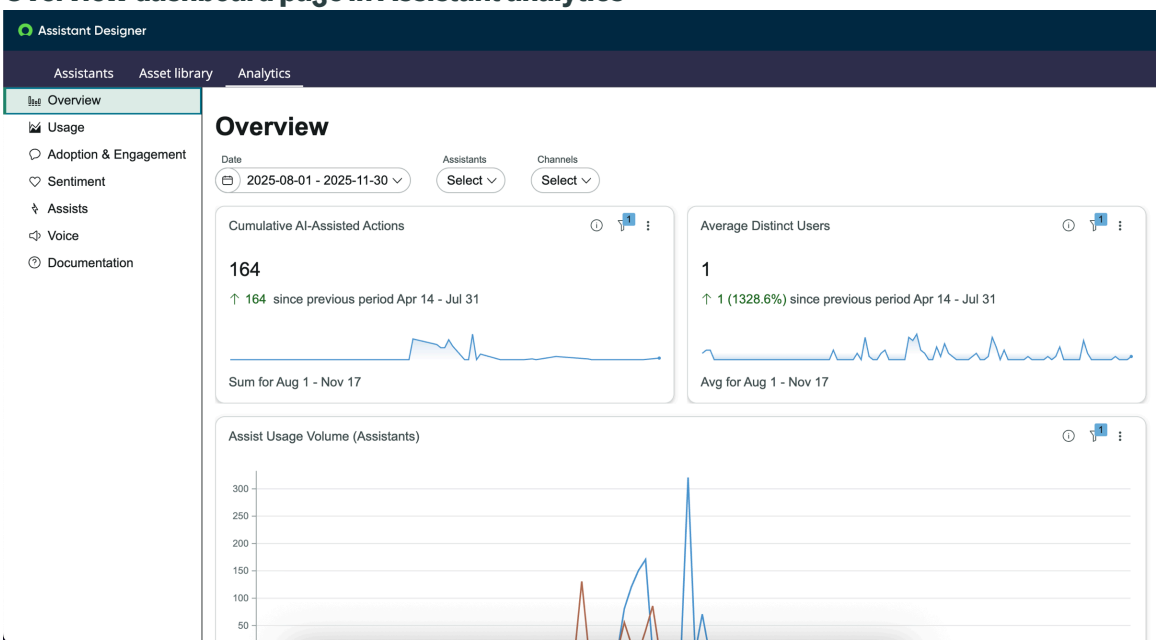
See for information on the indicators and calculations behind the metrics.

Overview page in Assistant analytics

View high-level summary of assistant activity, assist usage, user engagement and overall customer satisfaction (CSAT) score.

The Overview dashboard page aggregates key metrics across all active assistants and channels, presenting total actions, user engagement, assist usage volume, and overall CSAT score.

Overview dashboard page in Assistant analytics



The visualizations on the Overview page provide the following insights.

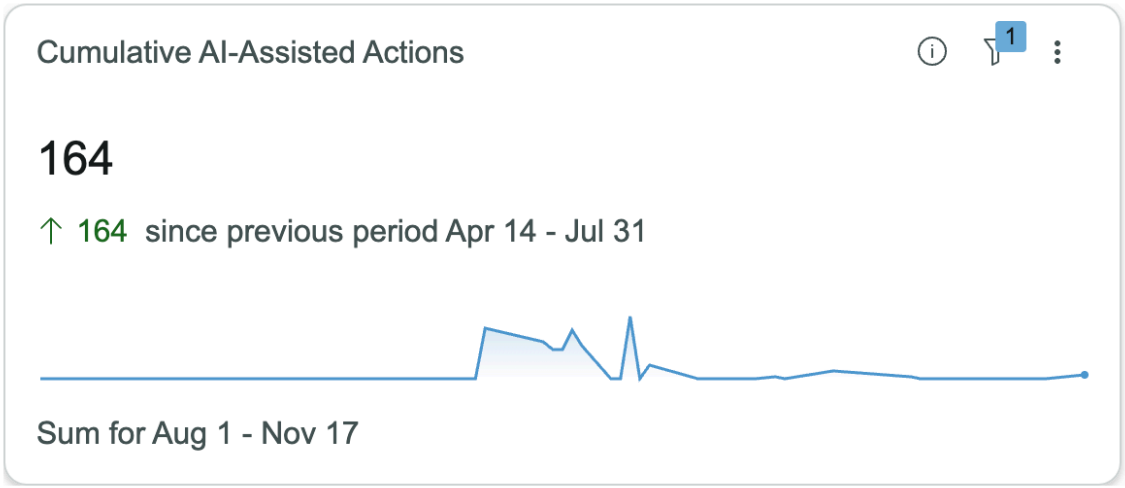
- Overall CSAT score, which is an indicator of user sentiment, enables you to monitor assistant quality and make targeted improvements.
- Assist usage volume reveals assist consumption patterns across assistants.
- Average distinct users reveals user adoption across assistants.

Cumulative AI-assisted Actions

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

This area of the dashboard shows the total number of actions completed by AI assistants, aggregated over the selected date range. This metric helps you understand the volume of AI-driven interactions and track growth in AI adoption.

Cumulative AI-Assisted Actions



Average Distinct Users

This area of the dashboard shows the average number of unique users interacting with assistants in the selected date range. This metric helps you identify periods of increasing or decreasing user engagement to take necessary action.

Average Distinct Users

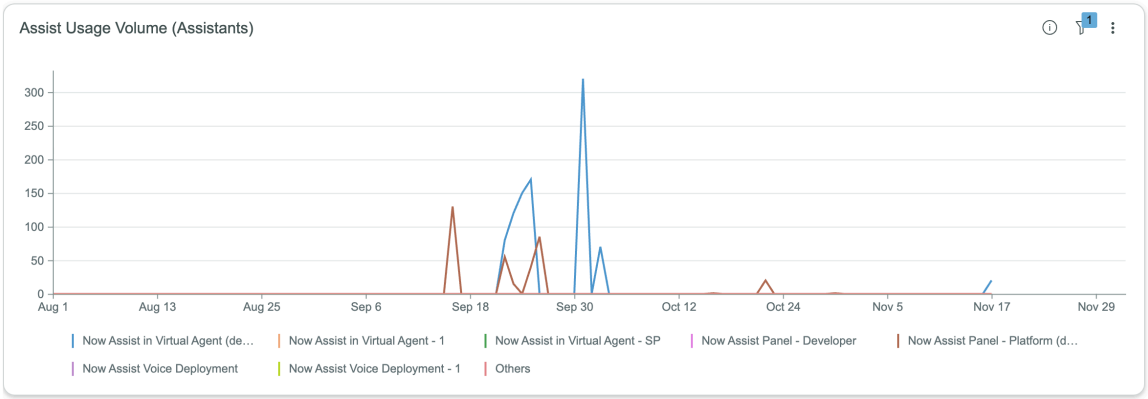


Assist Usage Volume

This area of the dashboard shows the trend of assists consumed via AI assistants within the selected date range. The assists are determined by the Now Assist actions executed. This metric reveals the assistants that are lowest and highest consumers of assists.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.


Assist Usage Volume (Assistants)



Overall Average Conversation CSAT

This area of the dashboard shows the average inferred CSAT score for conversations handled by assistants in the selected date range. This metric measures the user sentiment and satisfaction with assistant interactions. Use the CSAT trends to identify areas for improvement in assistant responses or workflows.

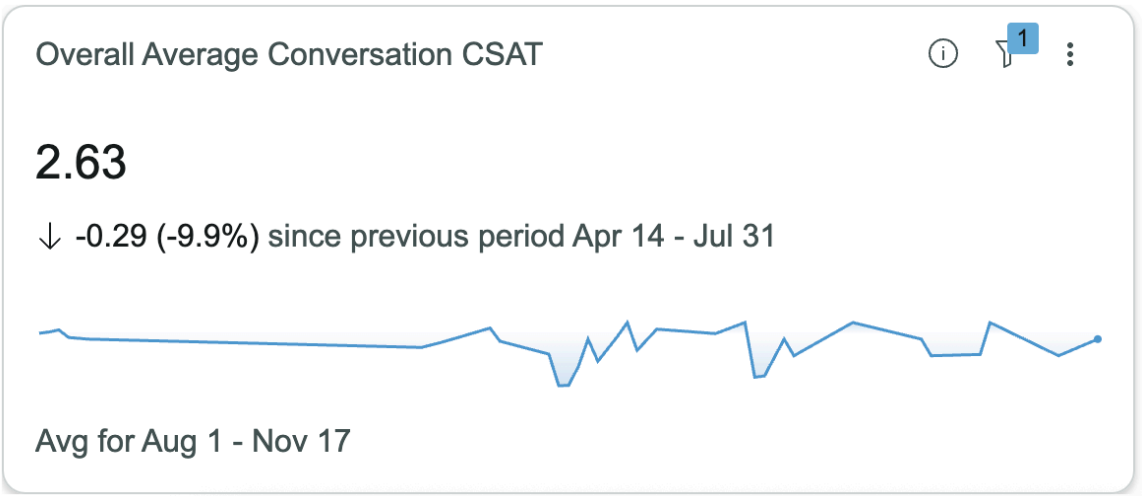Overall Average Conversation CSAT




Total Assist Usage

This area of the dashboard shows the total number of assists consumed by the assistants in the selected date range. The assists are determined by the now assist actions executed. Use this metric to optimize assist usage and track progress towards usage goals.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

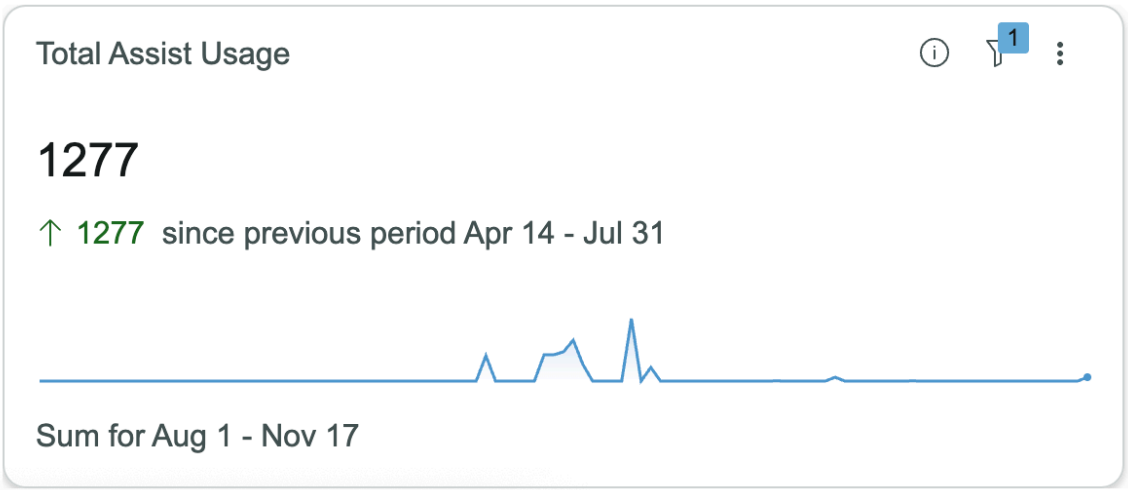Total Assist Usage




Usage page in Assistant analytics

View assistant activity, highlighting conversation volumes, channel distribution, and conversation outcomes.

The Usage dashboard page aggregates key metrics related to assistant usage, including the total number of conversations by assistant, conversations by channel, citations associated with the results, and the flow of conversation states.

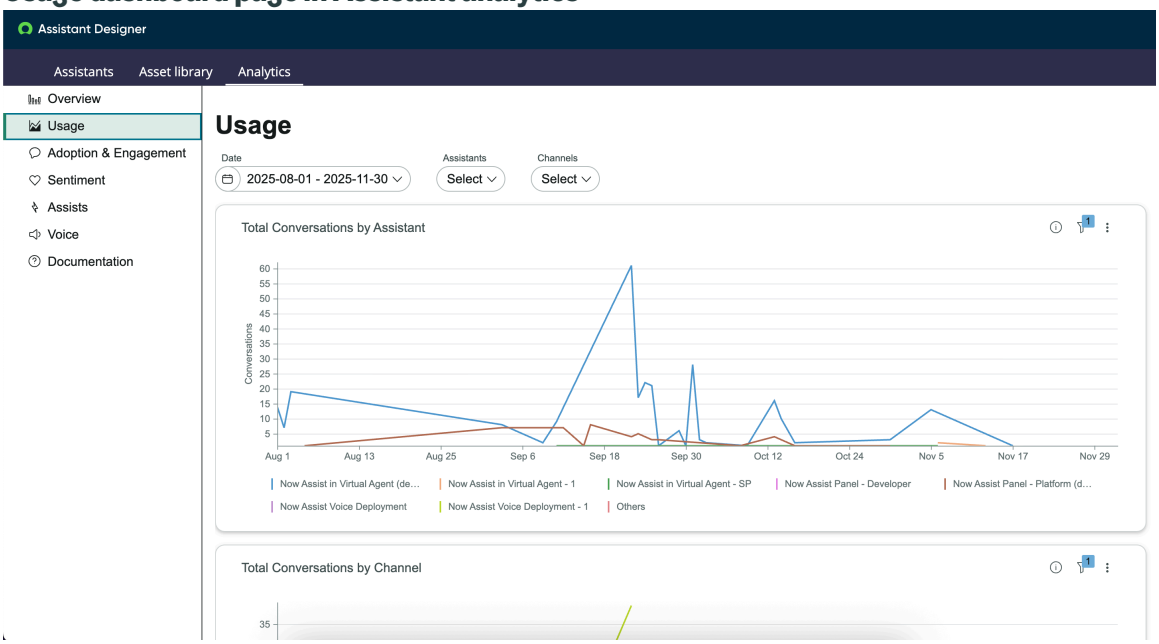Usage dashboard page in Assistant analytics



The visualizations on the Usage page help you with the following.

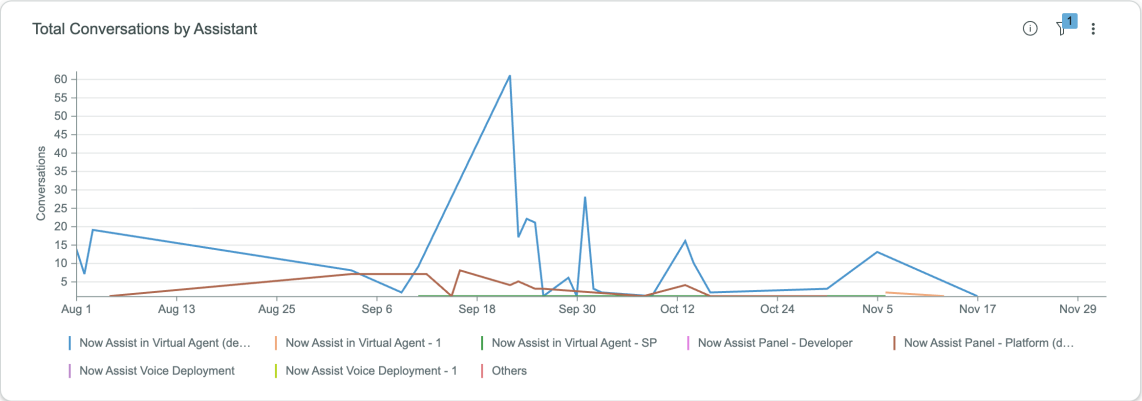
- Conversations by assistant tracks assistant engagement by visualizing conversation volumes over time and across different assistants.
- Conversations by channel identifies channel preferences and usage patterns, helping you optimize assistant deployment and support.
- Result types help you understand the diversity and relevance of responses provided by assistants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Total Conversations by Assistant

This area of the dashboard shows the number of conversations handled by each assistant over the selected date range. This metric enables comparison of activity and identification of high- and low-performing assistants in the selected period. Use this data to focus optimization efforts on assistants with lower engagement or to replicate best practices from high-performing assistants.


Total Conversations by Assistant



Total Conversations by Channel

This area of the dashboard shows the distribution of conversations across different channels, for example, Teams, Slack, and so on. This metric shows which channels are most popular for assistant interactions, helping you adjust channel support, and maximize reach and effectiveness.

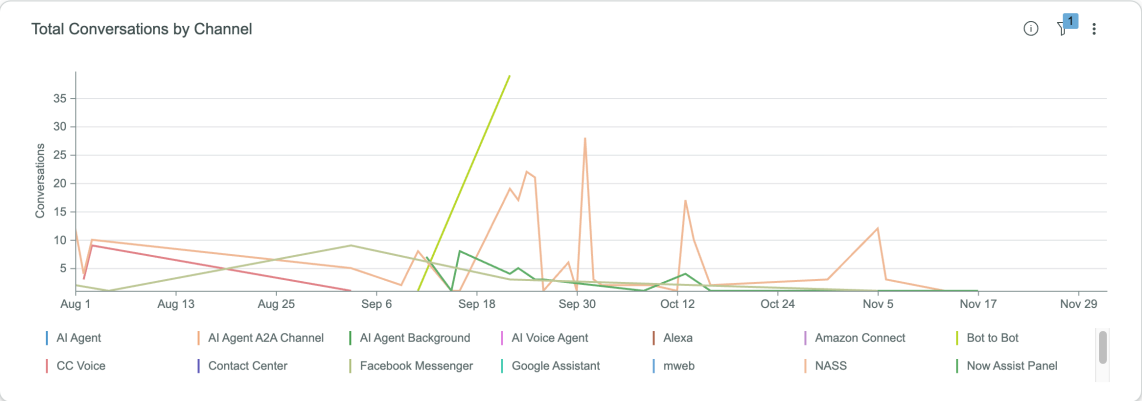Total Conversations by Channel




Result Types Offered

This area of the dashboard shows the types of results, for example, catalog items, knowledge articles, and so on, offered in response to user queries, categorized by assistants.

The chart displays a horizontal bar for each result type. The color intensity within each bar indicates frequency—darker shades represent higher counts, while lighter shades represent lower counts. Hover over a bar segment to view the exact count, percentage, and associated assistant. Use this visualization to identify which result types are most frequently delivered by assistants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

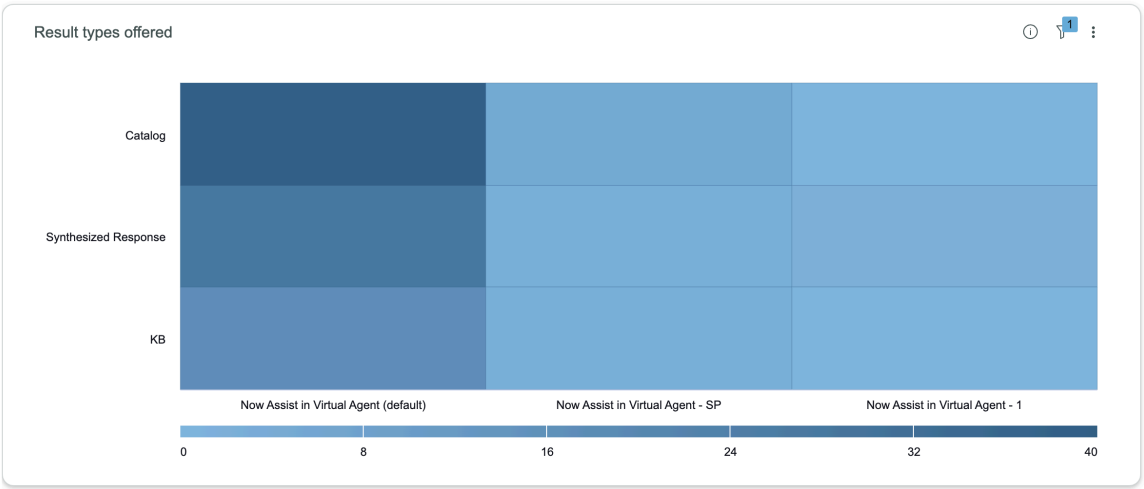
Result Types Offered



Conversation State Flow

This area of the dashboard shows the trend of conversations by the states they are in, for example, Open, Completed, Faulted, and Canceled. This visualization provides insight into how conversations are progressing and where they encounter issues, helping you target improvements to the conversation flow.

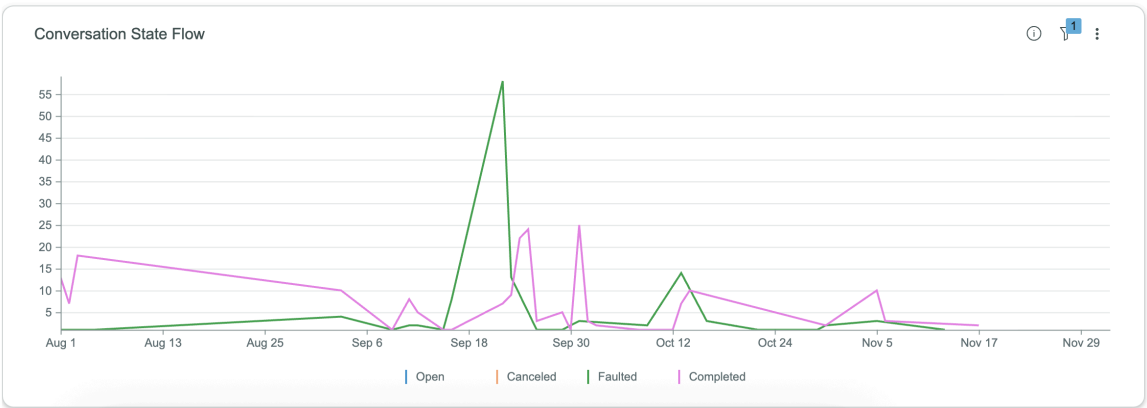Conversations State Flow




Adoption and Engagement page in Assistant analytics

View how users are adopting assistants and engaging with them over time, helping you track growth, activity, and interaction patterns.

The Adoption & Engagement dashboard page aggregates metrics related to user adoption and engagement, including average active users, new user growth, conversation volume trends, assist-to-execution trend, and channel distribution. The visual widgets enable administrators to monitor how assistants are being adopted, how frequently they are used, and how engagement evolves across different channels and time periods. These insights support targeted strategies to drive adoption and improve user engagement.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

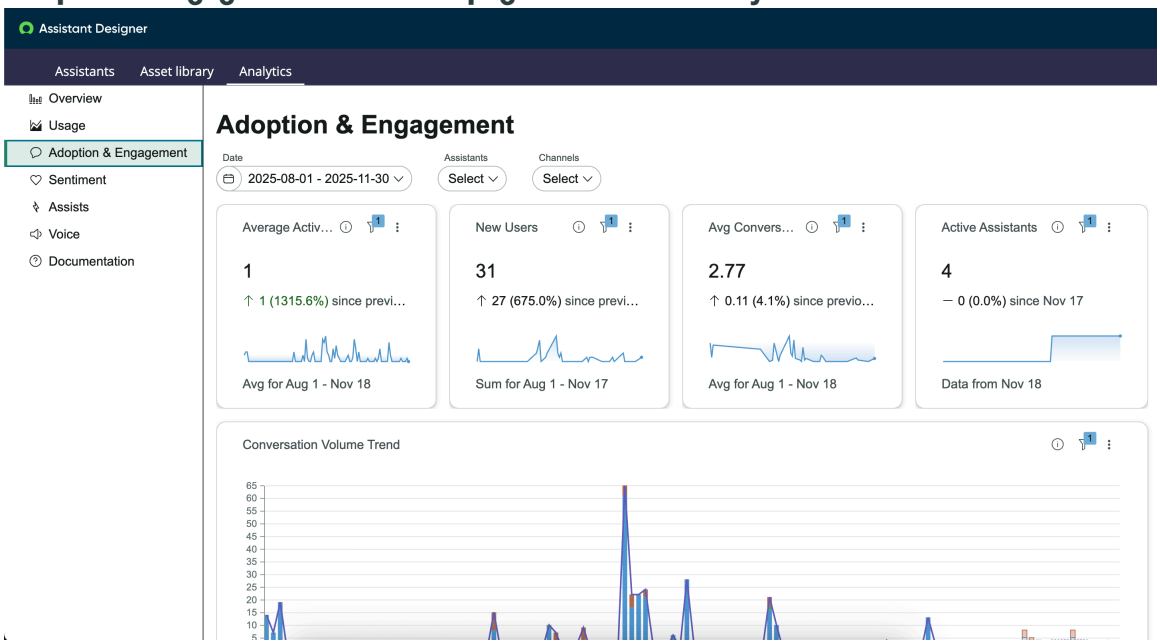Adoption & Engagement dashboard page in Assistant analytics



The visualizations on the Adoption & Engagement page help you with the following.

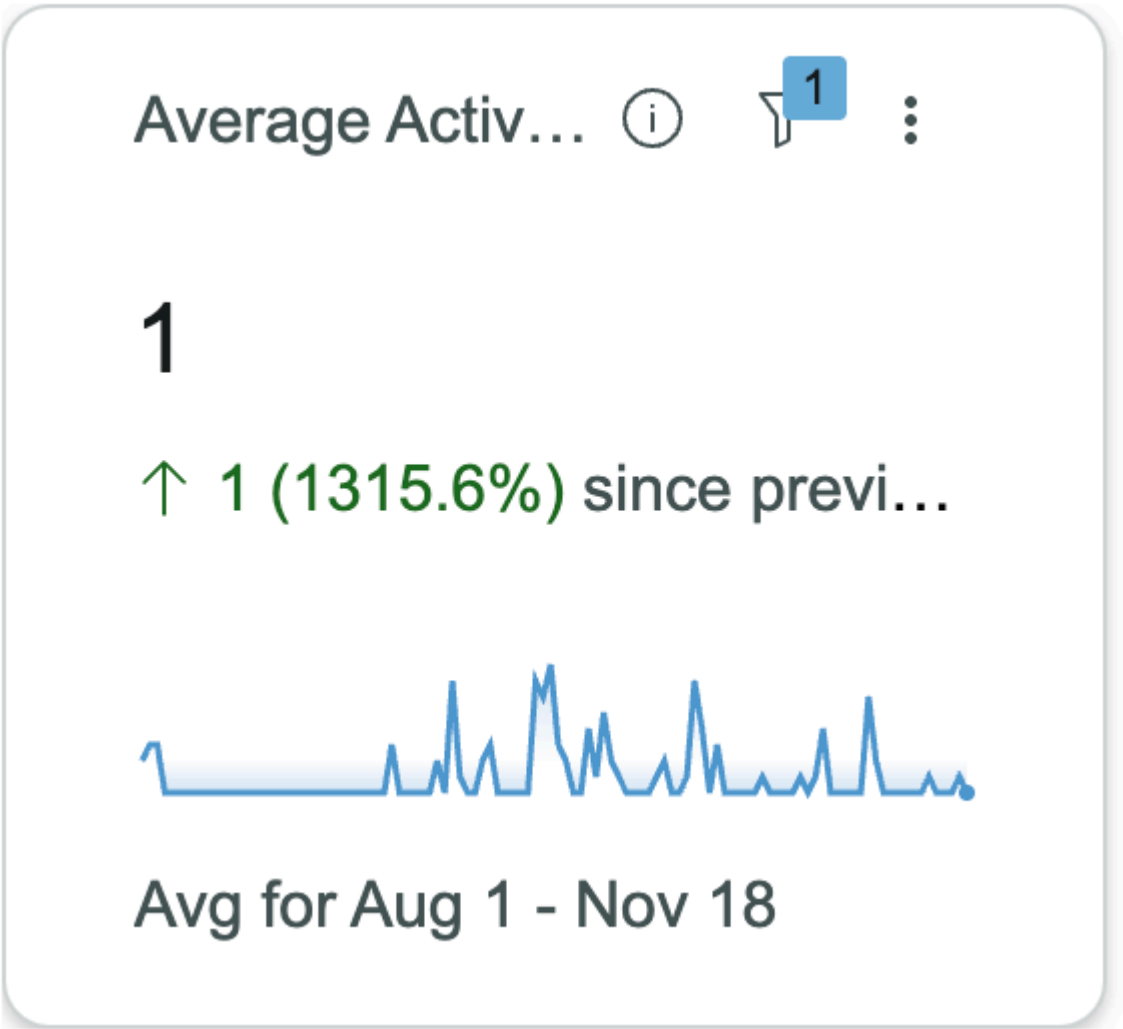
- Track user growth and engagement trends to inform strategies for increasing assistant adoption and user retention.
- Identify patterns in conversation volume and channel usage, enabling you to optimize assistant deployment.
- Monitor assist-to-execution trends to assess how effectively assistants are using assists to deliver desired outcomes.

Average Active Users

This area of the dashboard shows the average number of users actively engaging with at least one assistant in the selected period. This metric indicates the level of ongoing engagement and helps track the effectiveness of adoption initiatives.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Average Active Users




New Users

This area of the dashboard shows the number of new users interacting with assistants for the first time in the selected date range. This metric highlights the growth in user base and helps you assess the effectiveness of adoption initiatives.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

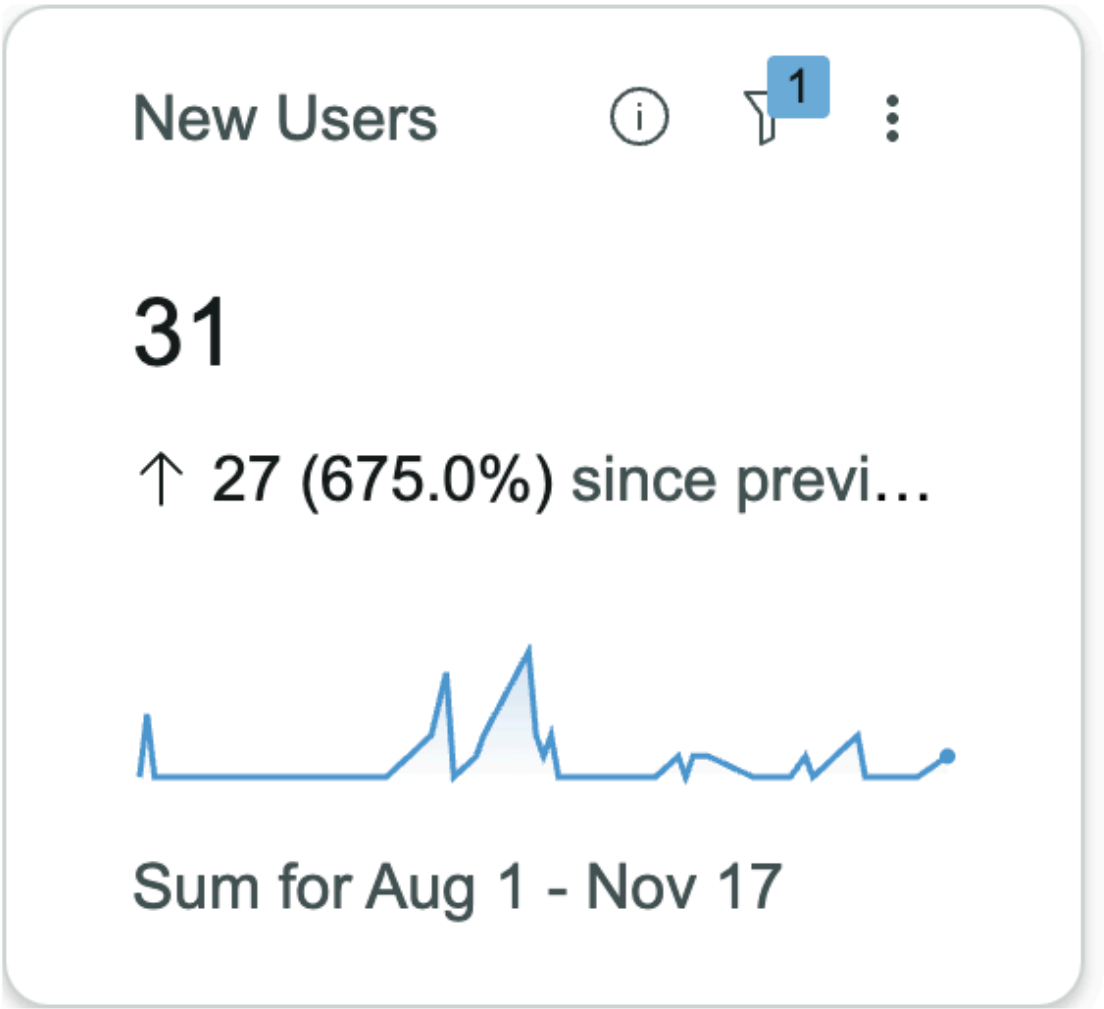New Users




Avg Conversations/User

This area of the dashboard shows the average number of conversations per unique user in the selected date range. It's calculated using the following formula: (Total AI assistant conversations)/(Number of unique users). This metric reveals how frequently users are interacting with assistants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

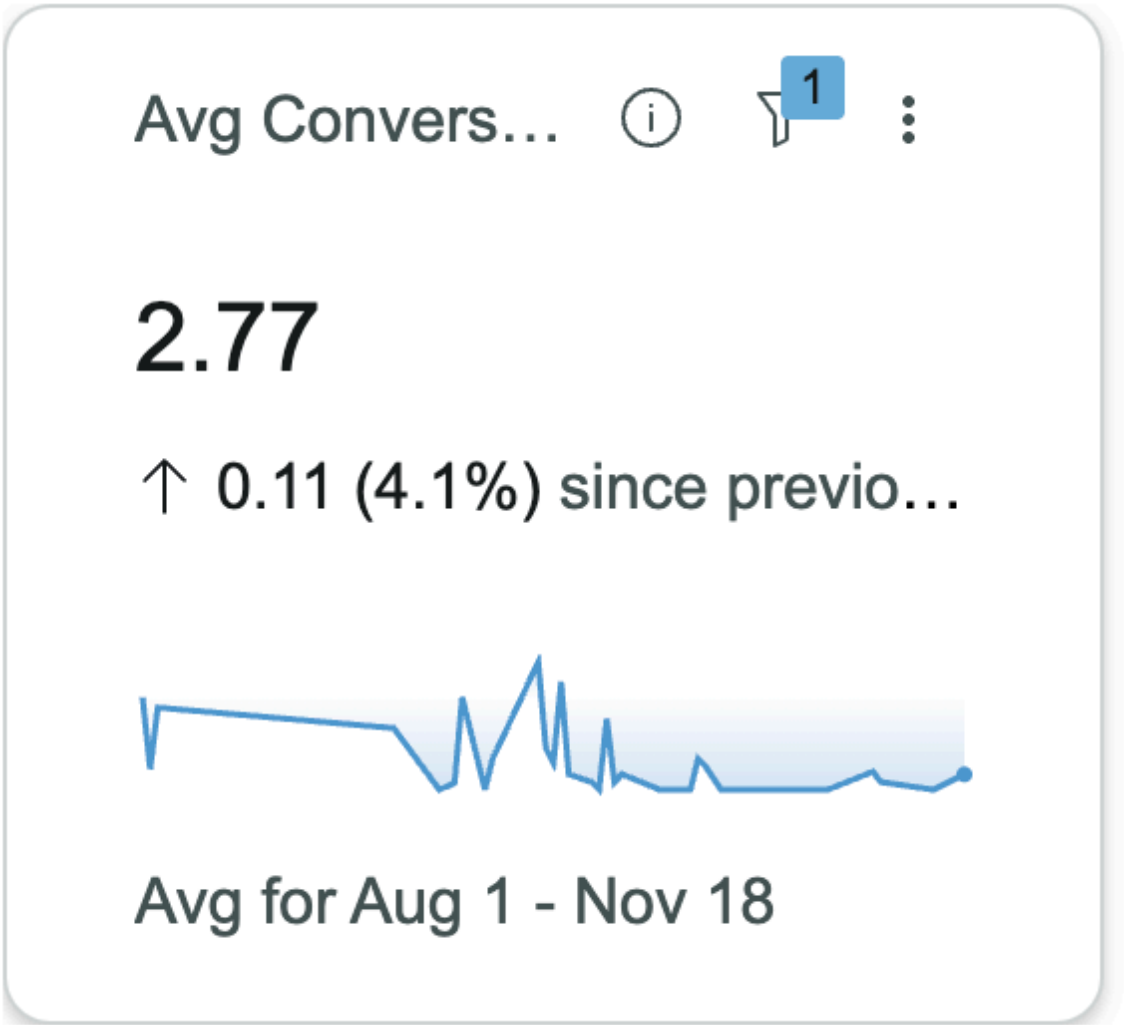Avg Conversations/User




Active Assistants

This area of the dashboard shows the number of active assistants as on the last date of the selected date range. This metric helps you in identifying the assistants which are currently driving engagement and contributing to adoption.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

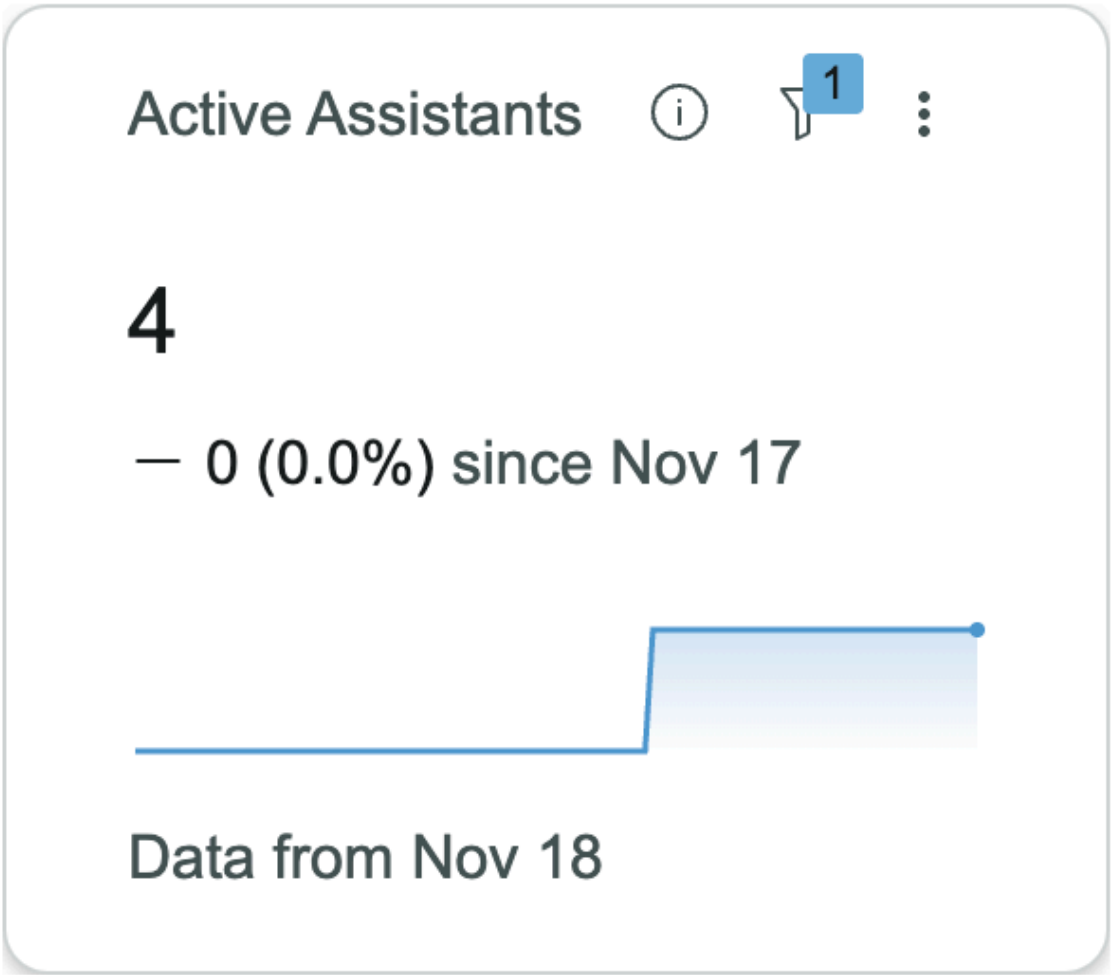
Active Assistants



Conversation Volume Trend

This area of the dashboard shows the trend of conversation volumes over time, broken down by assistant. Hover over the chart to see total conversations by assistants and to view the % of conversations on that day relative to the total number of conversations in the selected date range. This metric helps you investigate periods of high or low activity to understand underlying causes and adjust engagement strategies.

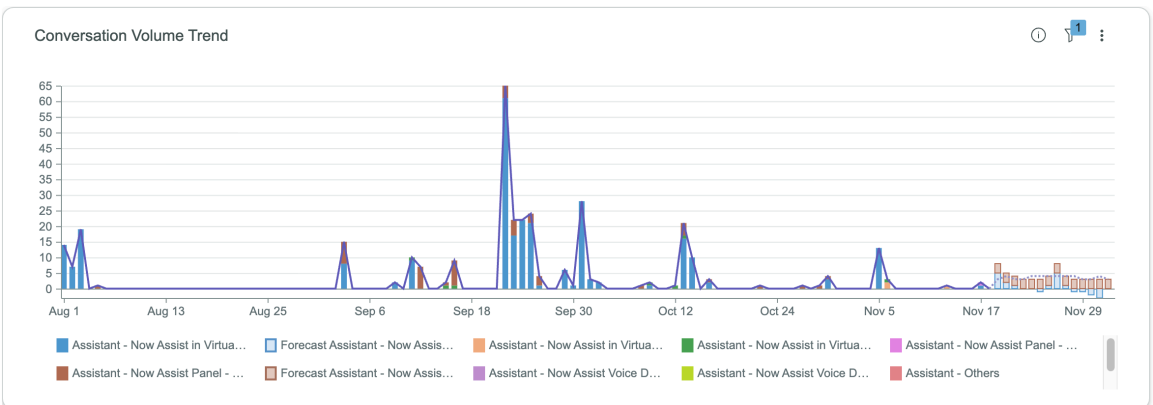Conversation Volume Trend




Assist to Execution Trend

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

This area of the dashboard shows the average number of assists consumed per execution or action on a given day. For example, if 100 assists were consumed to complete 50 executions, the assist to execution ratio is 2:1. This metric helps you assess how effectively assistants are using assists to deliver desired outcomes.

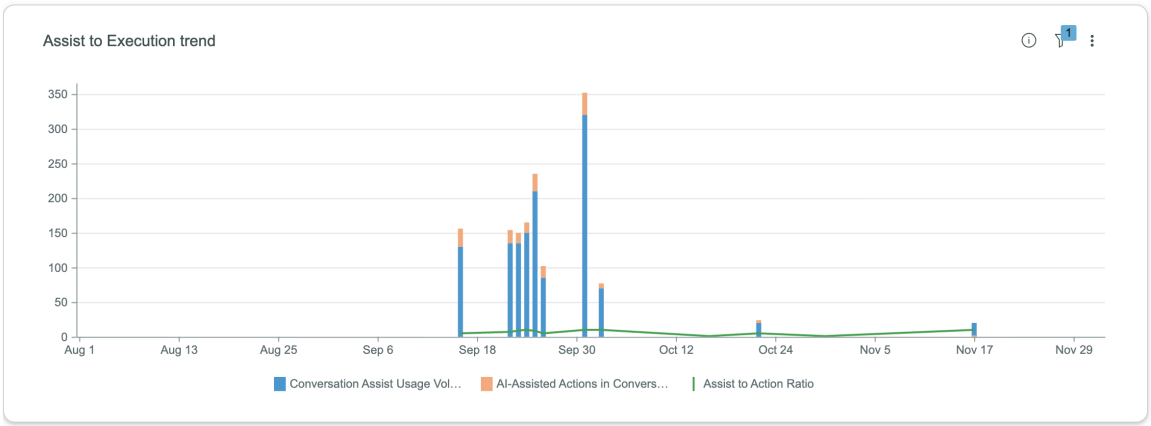
Assist to Execution Trend



Conversations per Channel

This area of the dashboard shows the distribution of conversations across different channels such as Teams, Slack, and so on.

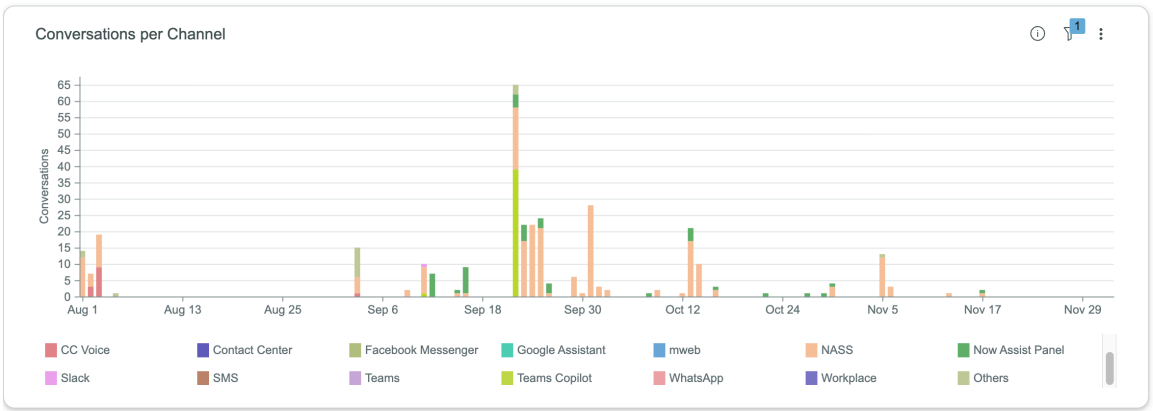Conversations per Channel




New User Growth

This area of the dashboard shows the growth of new users in a selected date range. A new user is a user who has had their first conversation with an assistant in the selected date range. Track new user growth to evaluate the success of onboarding and adoption efforts.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

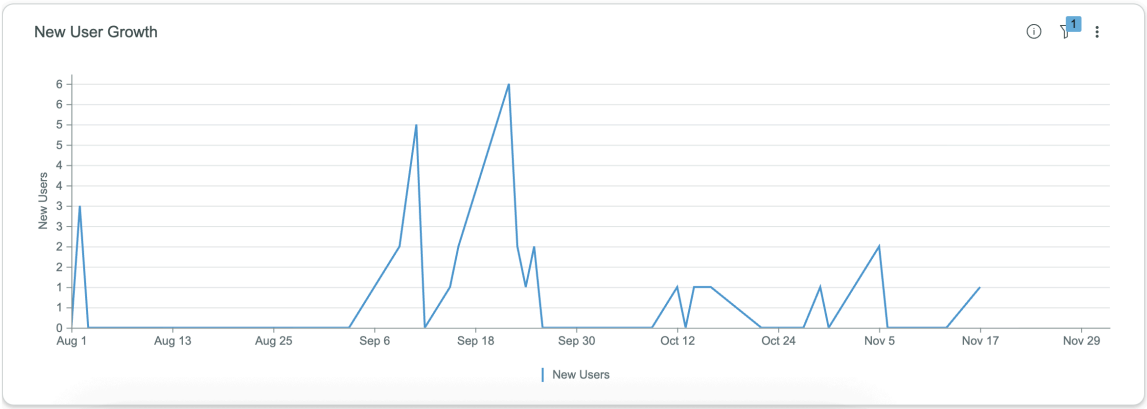New User Growth




Sentiment page in Assistant analytics

Analyze user sentiment through customer satisfaction (inferred CSAT) score and CSAT factors such as empathy, frustration and confusion, transfers and escalations from conversations with assistants to improve the quality of user interactions.

The Sentiment dashboard page aggregates metrics related to user satisfaction, emotional feedback, empathy levels, and conversation outcomes. These metrics enable you to monitor inferred CSAT, track transfers and escalations, analyze empathy distribution, and review negative emotion trends. The insights from these metrics support targeted improvements to assistant behavior, response quality, and overall user experience.

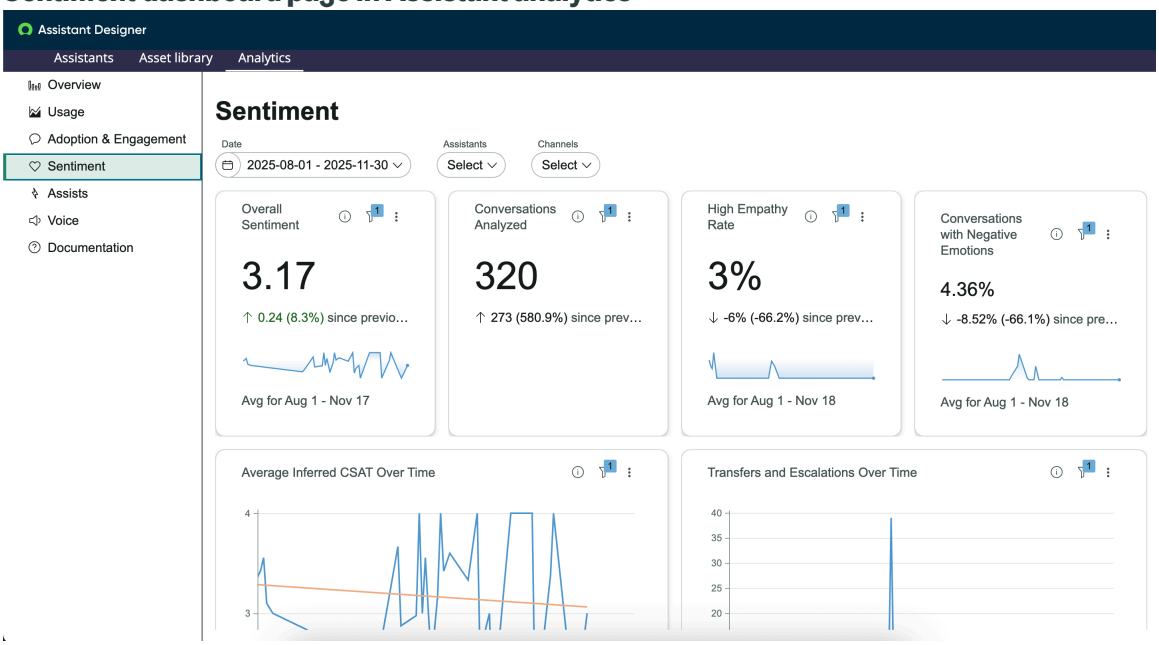Sentiment dashboard page in Assistant analytics



The visualizations on the Sentiment page help you with the following.

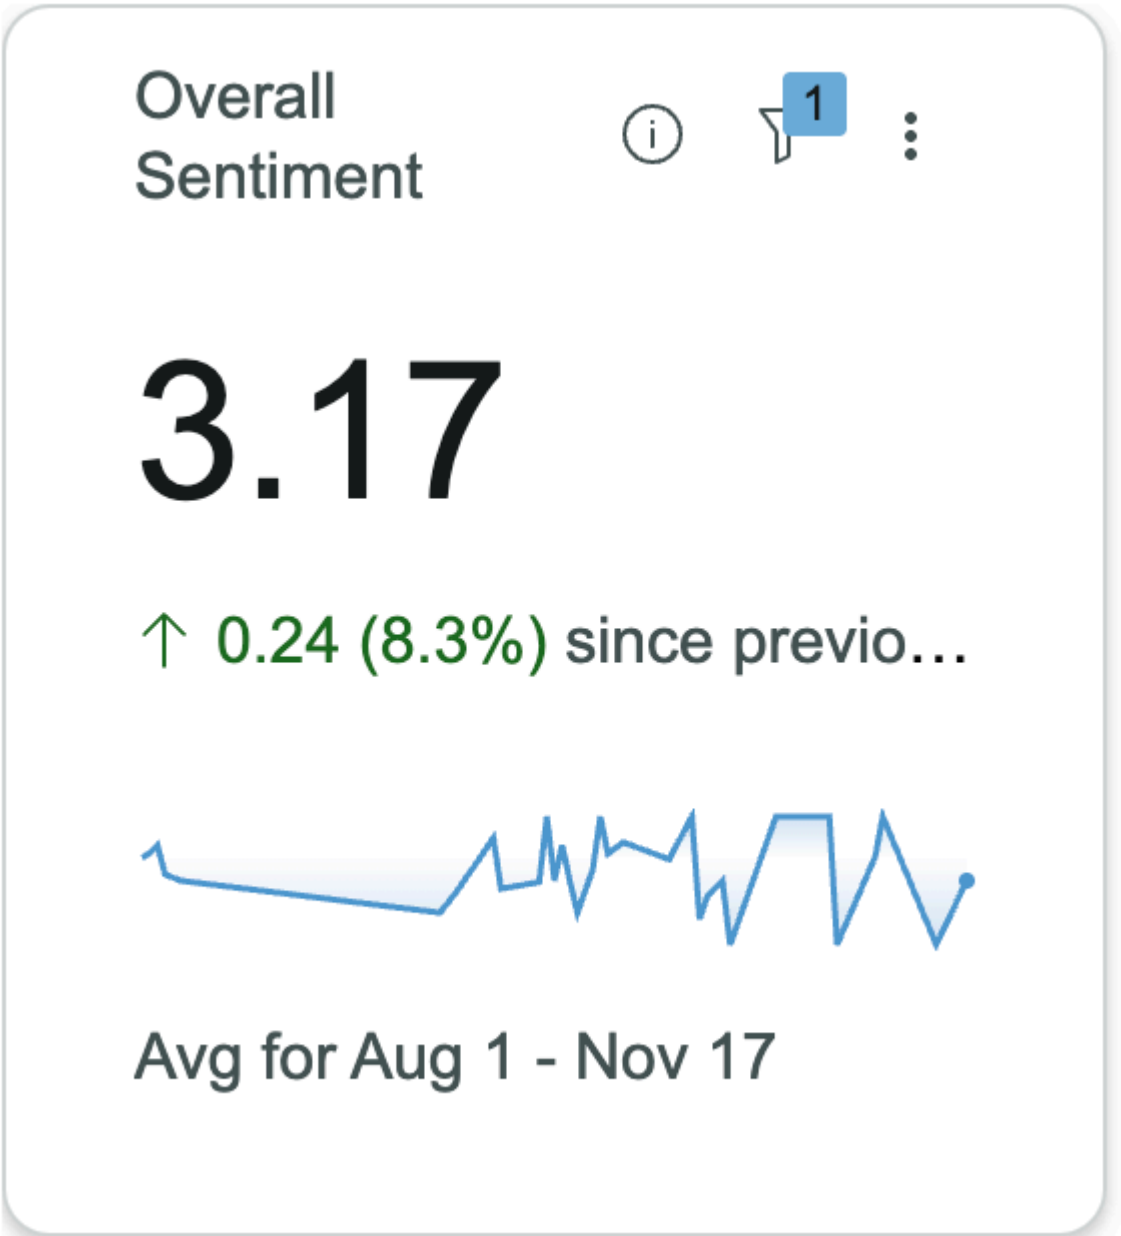
- Monitor user satisfaction and sentiment trends to identify strengths and areas for improvement in assistant interactions.
- Track emotional feedback and empathy levels, enabling you to address frustration, confusion, and other negative emotions.
- Analyze conversation outcomes and recommended next steps to guide assistant optimization and enhance resolution rates.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Overall Sentiment

This area of the dashboard shows the overall average inferred CSAT score for analyzed conversations in the selected date range. The CSAT score is measured on a scale from 0 to 5, where 0 represents the lowest satisfaction and 5 represents the highest. Use this metric to track changes in sentiment over time and evaluate the impact of assistant updates.

Overall Sentiment




Conversations Analyzed

This area of the dashboard shows the total number of conversations analyzed for sentiment in the selected date range. This number indicates the breadth of data supporting CSAT scores.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

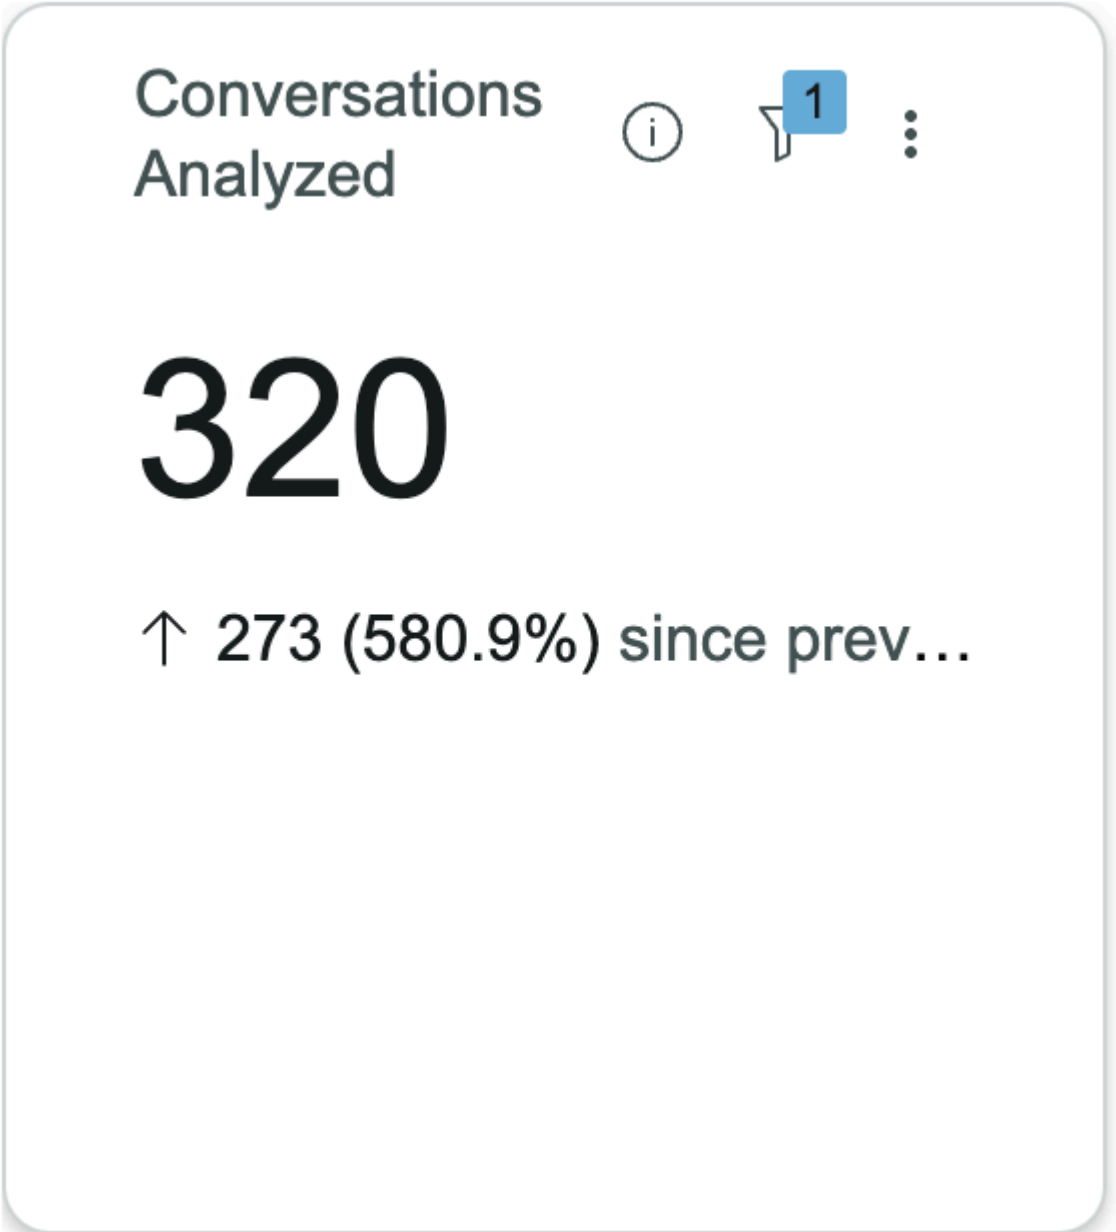Conversations Analyzed




High Empathy Rate

This area of the dashboard shows the percentage of conversations where high empathy was detected in assistant responses. It's calculated as ((Number of conversations with high empathy)/(Total number of conversations analyzed)) x 100. High empathy rate is an indication of the assistant's ability to respond with empathy to users queries.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

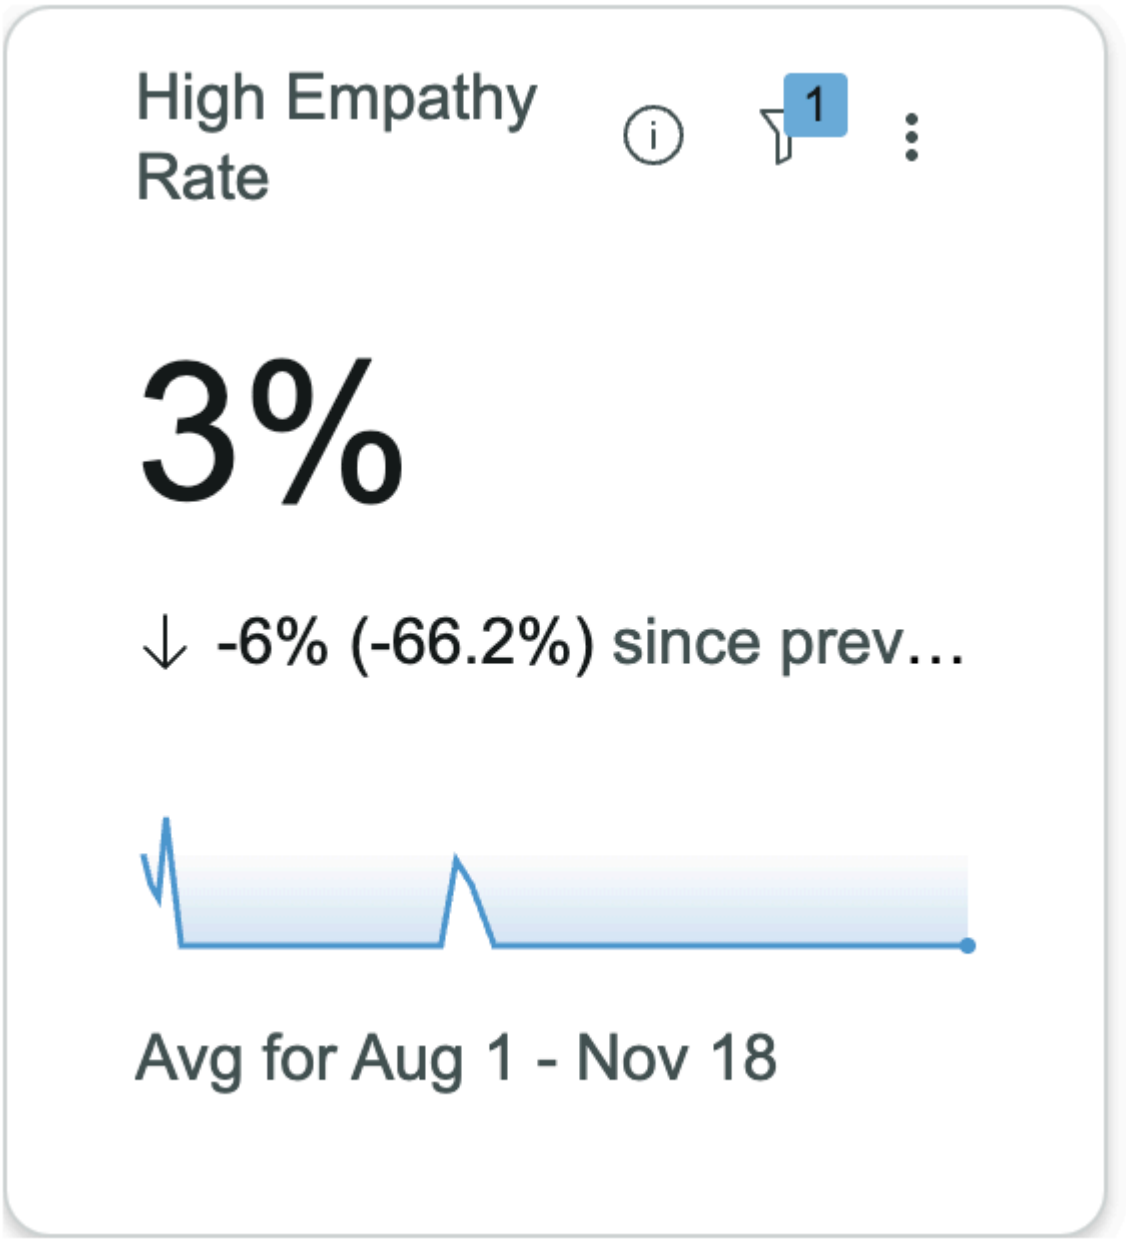High Empathy Rate




Conversations with Negative Emotions

This area of the dashboard shows the percentage of conversations where negative emotional feedback in terms of confusion or frustration was detected. It's calculated as ((Number of conversations with Frustration or Confusion)/(Total number of conversations analyzed)) x 100. This metric highlights the prevalence of negative experiences in assistant interactions. Use the metric to monitor and reduce negative emotion rates through targeted assistant improvements.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

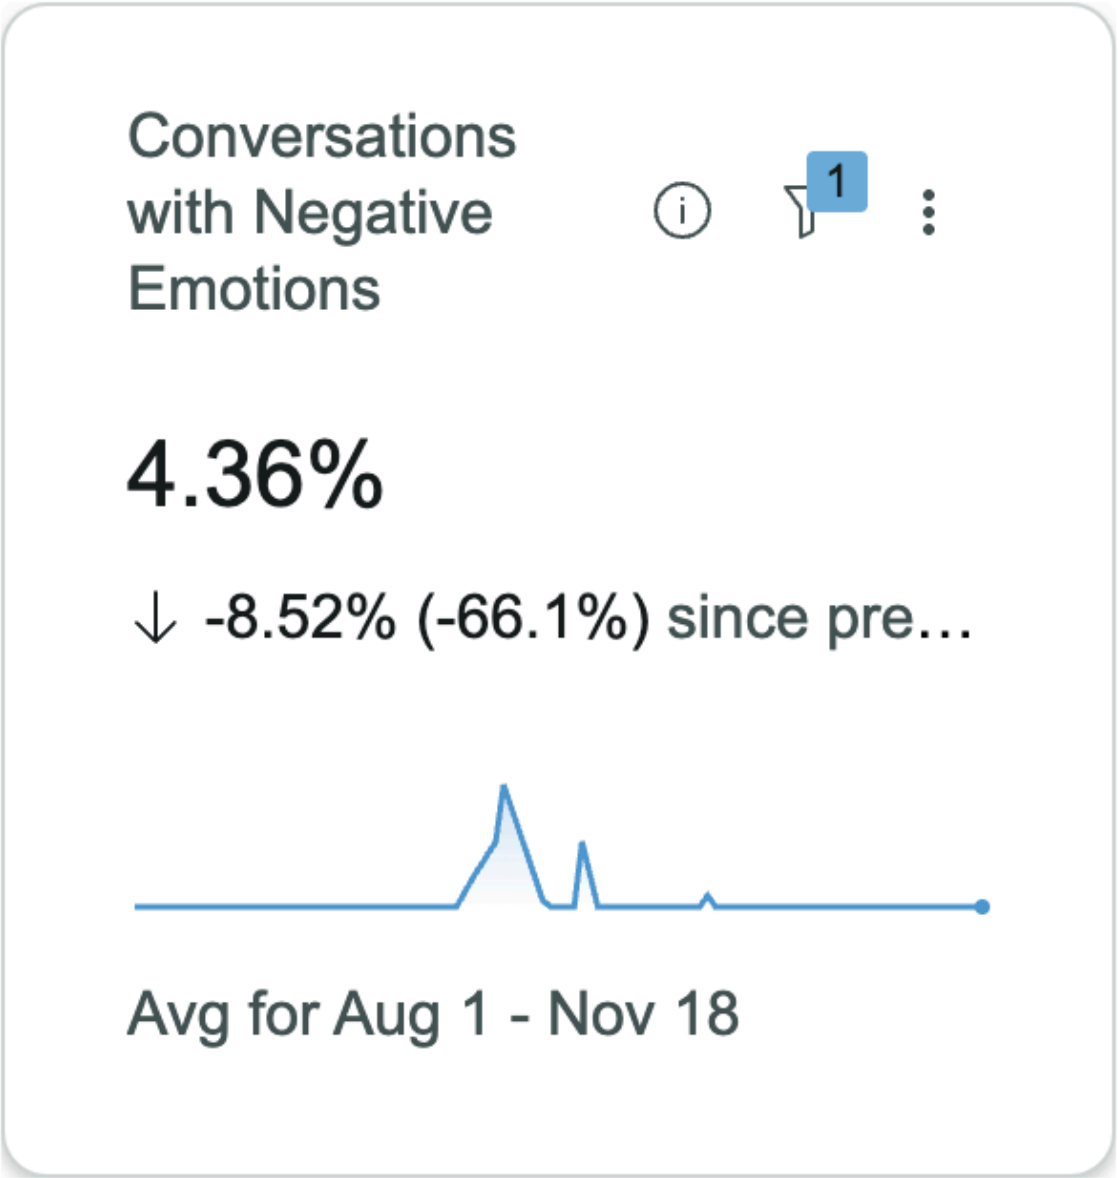Conversations with Negative Emotions




Average Inferred CSAT Over Time

This area of the dashboard shows daily average of inferred CSAT scores in the selected data range. The CSAT scores are measured on a scale from 0 to 5, where 0 represents the lowest satisfaction and 5 represents the highest. This chart highlights periods of improvement or decline in user sentiment.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

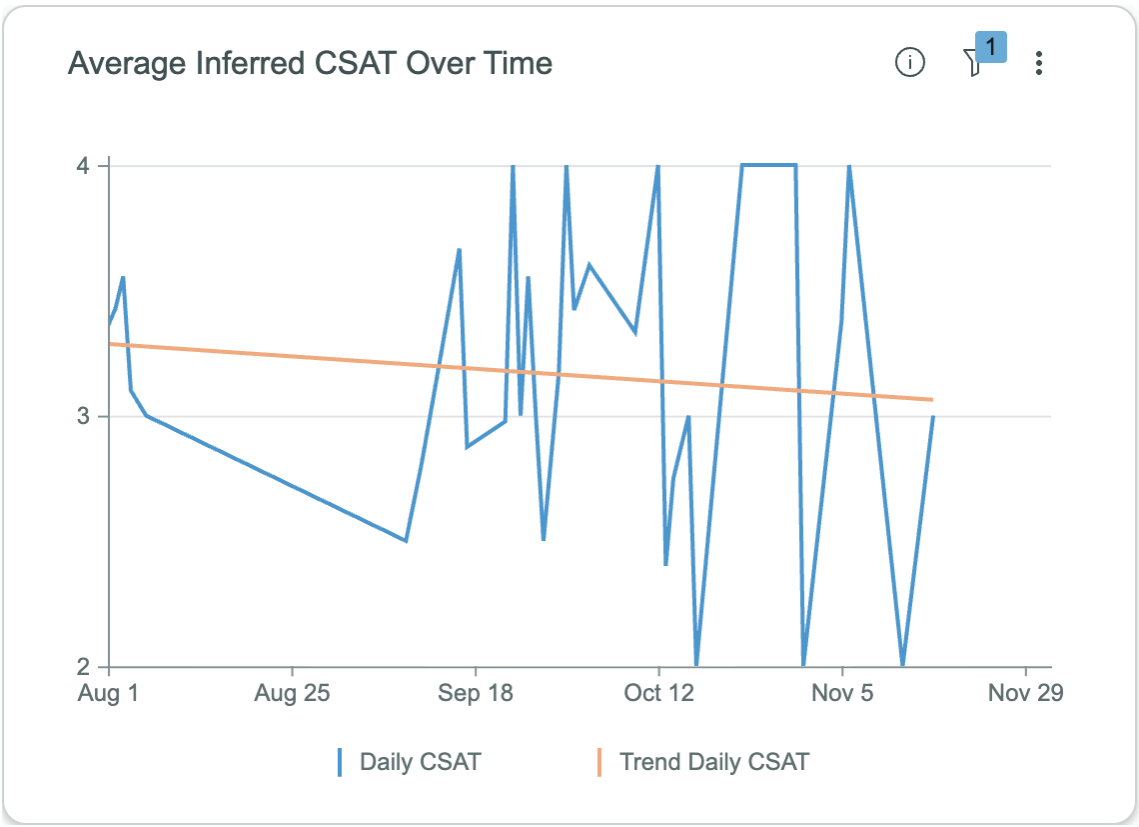Average Inferred CSAT Over Time




Transfers and Escalations Over Time

This area of the dashboard tracks the number of conversations transferred or escalated to live agent. Hover over the trend line to view the number of conversations transferred or escalated to live agent on a given day. This chart helps you with how often assistants require human intervention.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

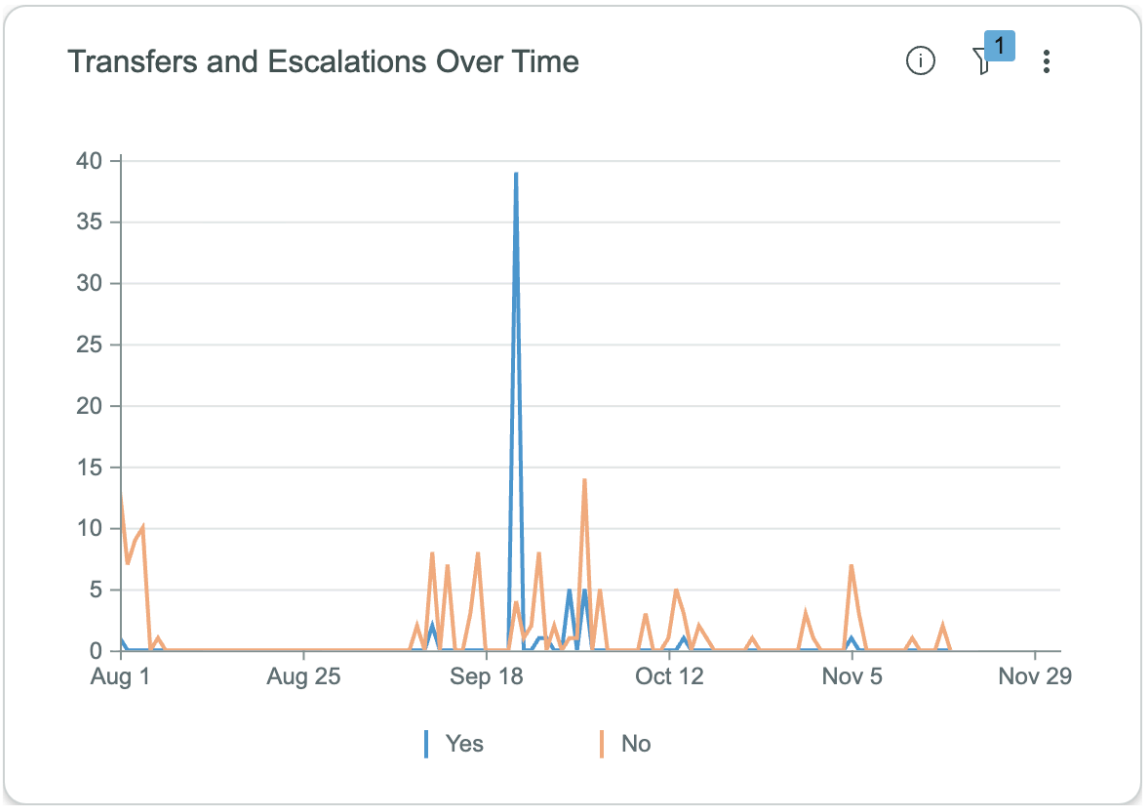Transfers and Escalations Over Time




Average Inferred CSAT (Virtual Agent)

This area of the dashboard shows the average Inferred CSAT score for Virtual Agent interactions in the selected period. For conversations involving both Virtual Agent and live agent, this score reflects only the Virtual Agent CSAT. Scored on a 5-point scale, 0 = least satisfied and 5 = most satisfied. Use this metric to benchmark assistant performance and prioritize improvements where satisfaction is lowest.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

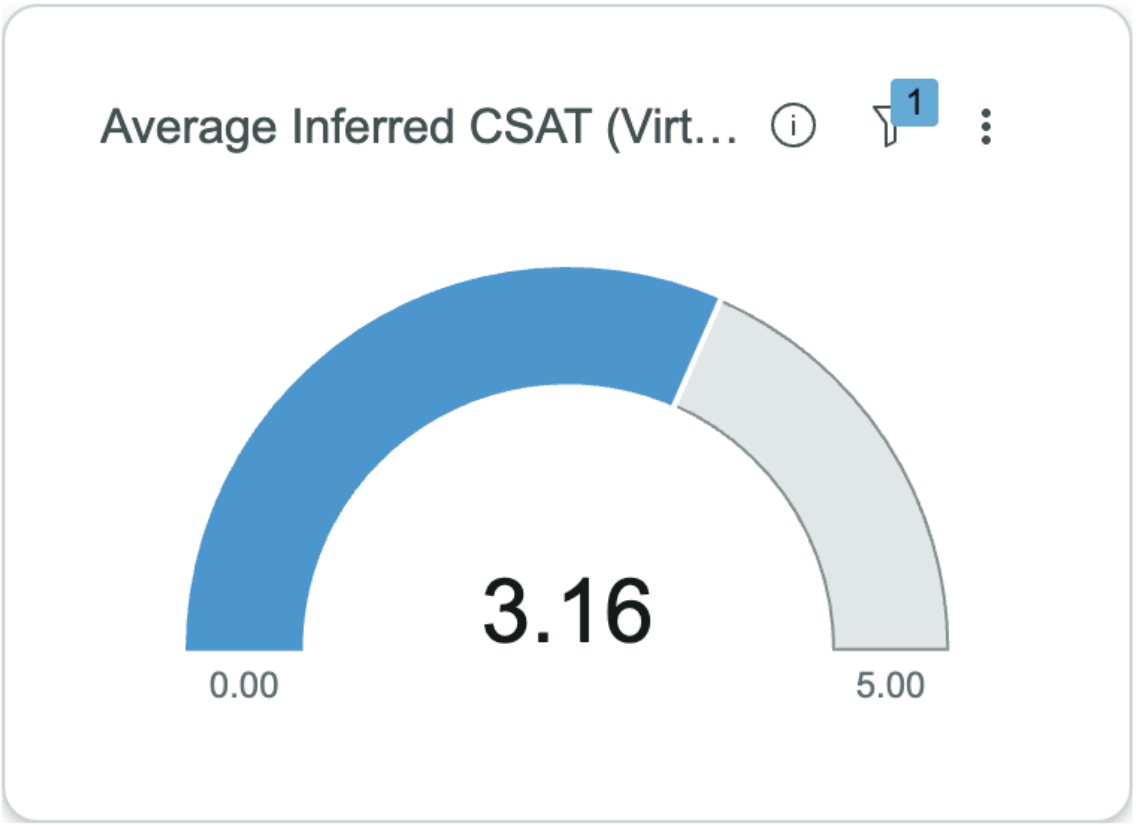Average Inferred CSAT (Virtual Agent)




Average Inferred CSAT (Live Agent)

This area of the dashboard shows the average Inferred CSAT score for live agent interactions in the selected period. For conversations involving both Virtual Agent and live agent, this score reflects only the live agent CSAT. Scored on a 5-point scale, 0 = least satisfied and 5 = most satisfied. Use this metric to benchmark assistant performance and prioritize improvements where satisfaction is lowest.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

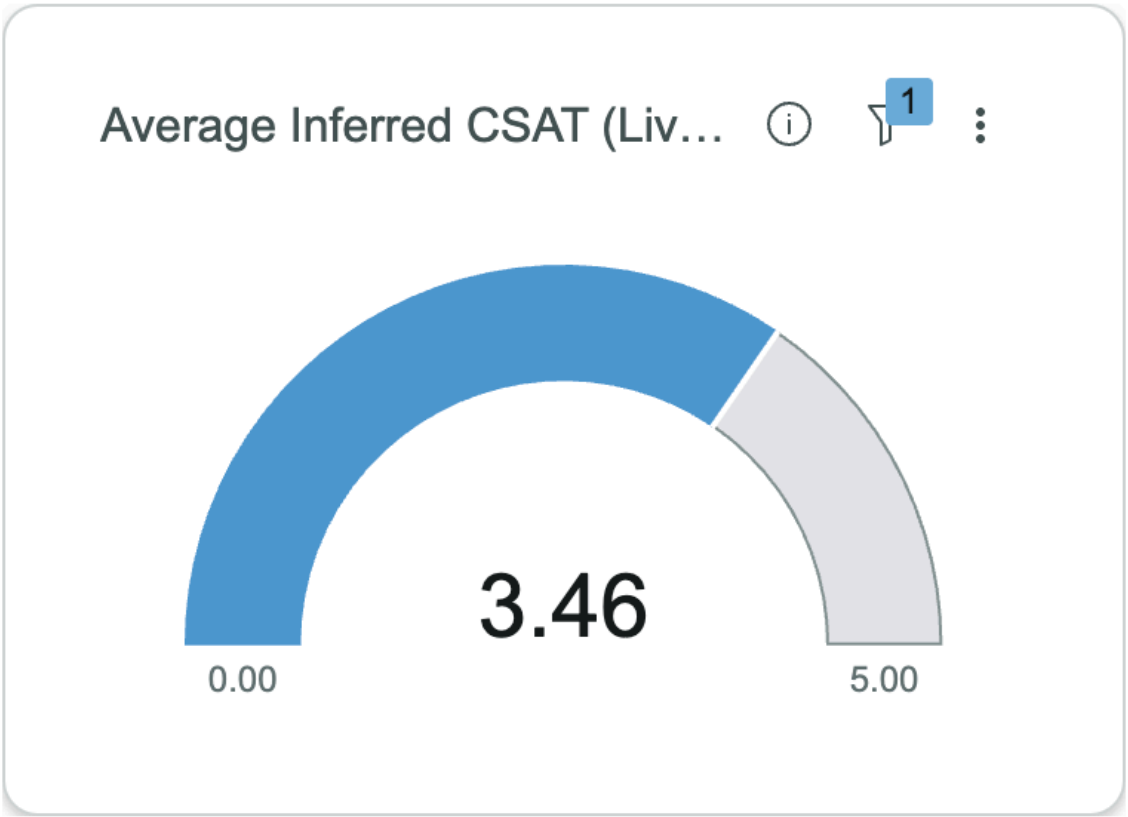Average Inferred CSAT (Live Agent)




Average Inferred CSAT (Session)

This area of the dashboard shows the average Inferred CSAT score for all interactions handled by Virtual Agent or a combination of Virtual Agent and live agent in the selected period. Scored on a 5-point scale, 0 = least satisfied and 5 = most satisfied.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

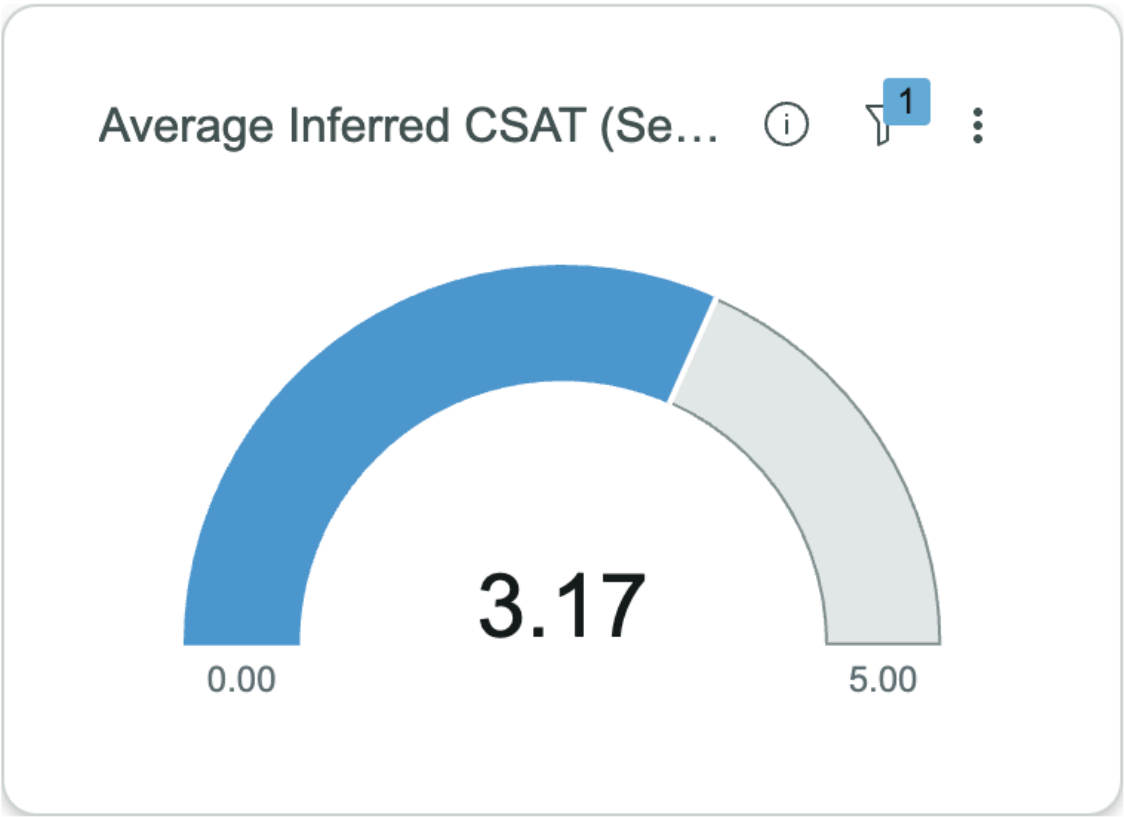Average Inferred CSAT (Session)




Assistant Recommended Next Steps

This area of the dashboard shows how clearly the assistant explained what happens next or what the user should do. Low: Conversations where no clear guidance was provided. Medium: Conversations where some guidance was provided. High: Conversations where clear and complete guidance was provided.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

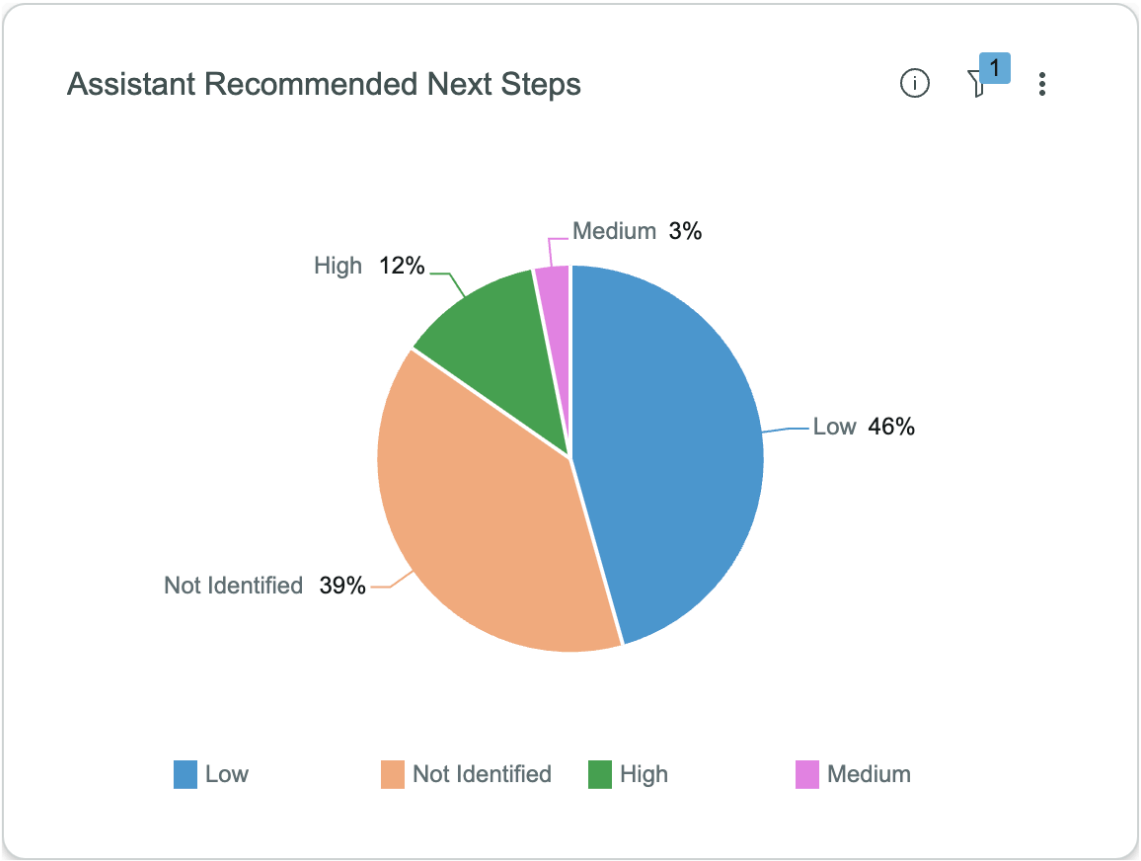Assistant Recommended Next Steps




Conversation Insight Inferred Resolution State

This area of the dashboard shows the conversations where the user's issue was resolved. Yes: conversations where the assistant met the user's needs. No: conversations where the assistant didn't meet the user's needs. Unknown: conversations where the resolution state couldn’t be determined.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

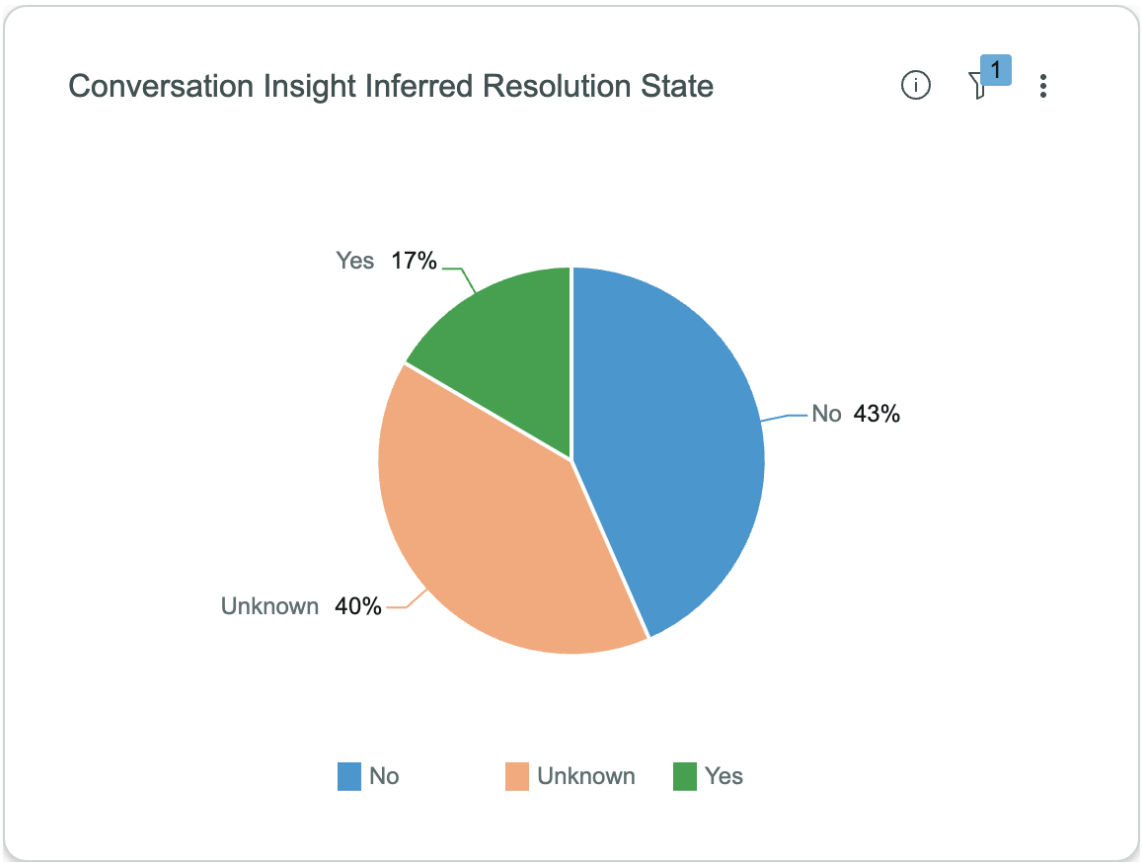Conversation Insight Inferred Resolution State




Empathy Levels Distribution Over Time

This area of the dashboard shows the distribution of empathy levels (High, Medium, Low) in assistant responses in the selected date range. Use this chart to assess the emotional intelligence of assistant interactions and target improvements.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

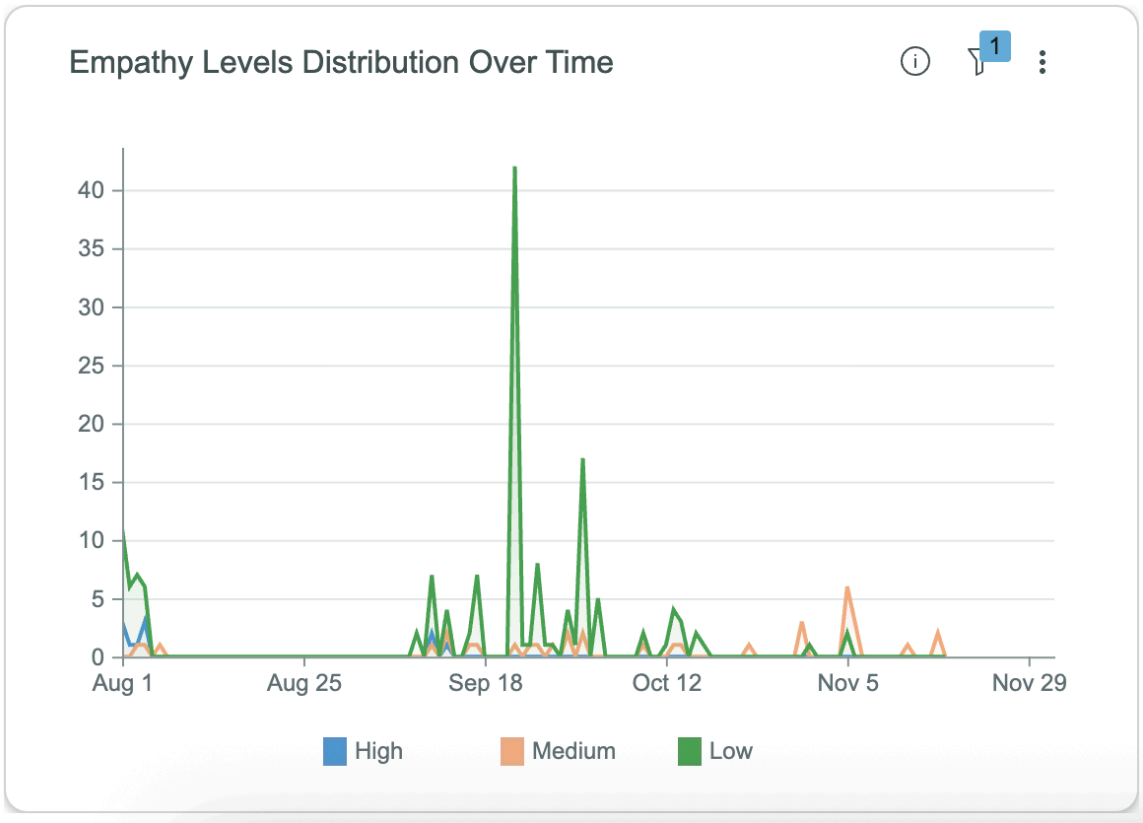Empathy Levels Distribution Over Time




Negative Emotion Feedback Over Time

This area of the dashboard tracks the feedback related to negative emotions: frustration and confusion in conversations with assistants. This chart helps you identify trends in negative user experiences and take necessary steps to reduce the negative feedback.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

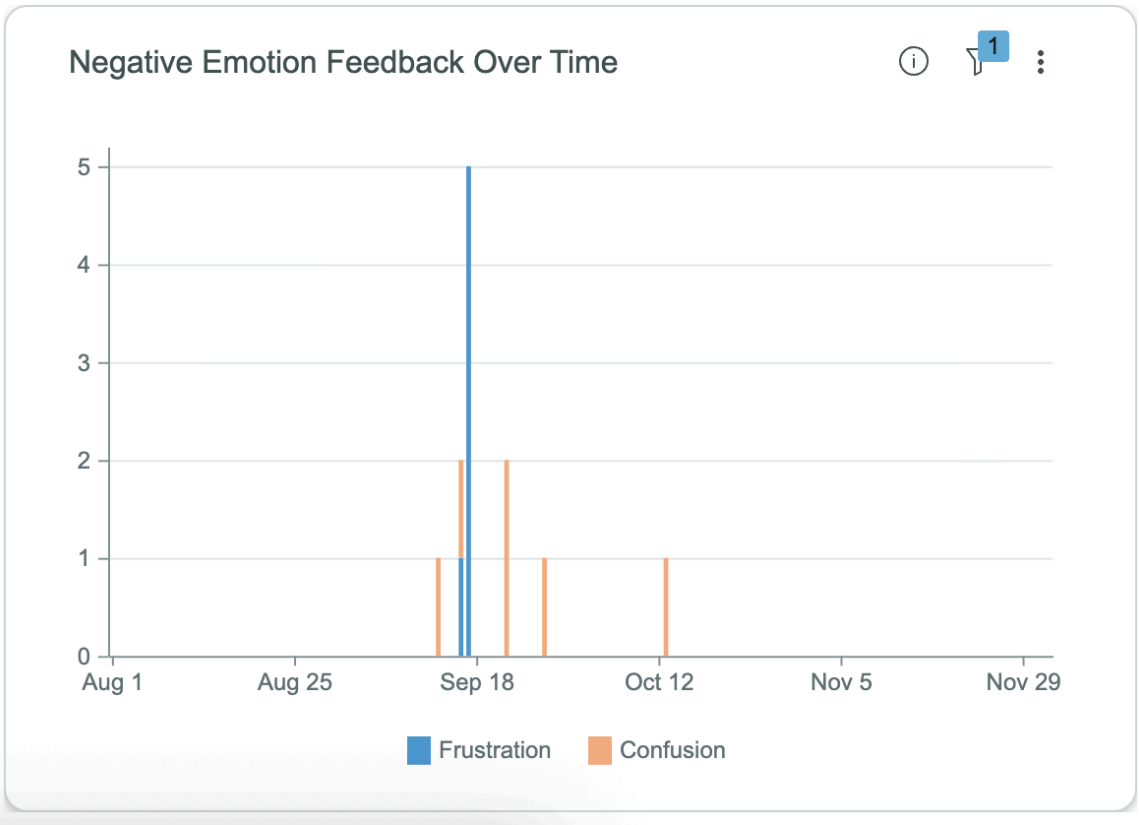Negative Emotion Feedback Over Time




Assists page in Assistant analytics

View usage of assists across assistants and optimize their consumption for improved outcomes.

The Assists dashboard page aggregates metrics related to conversational assists, including total assists consumed, usage breakdown by assistant, usage trends, and features which used the most number of assists.

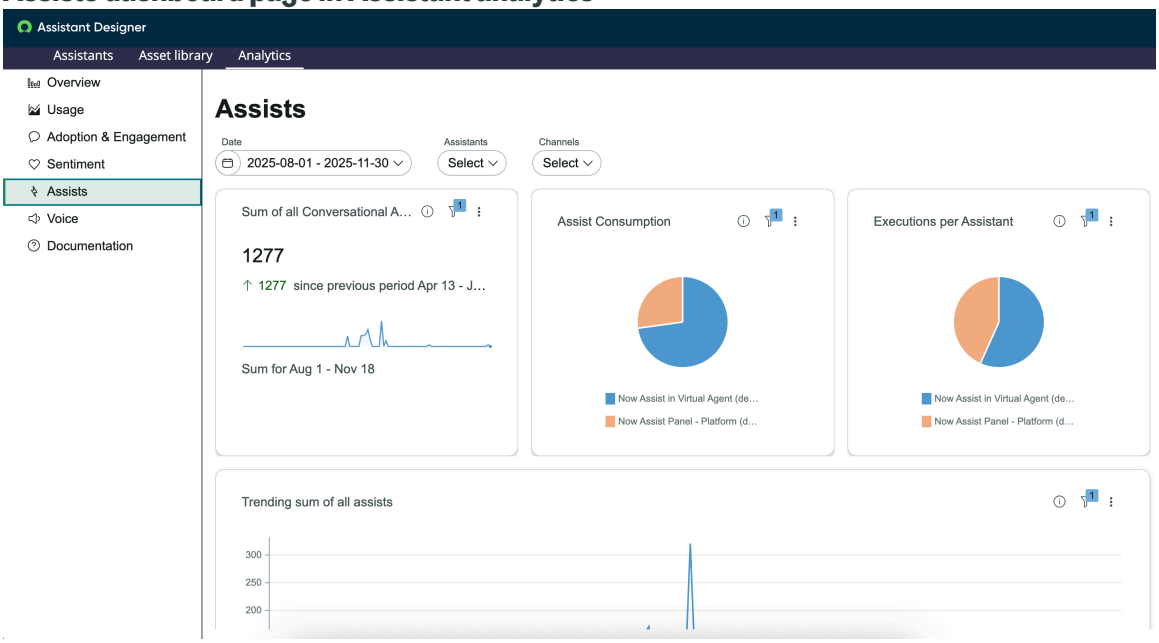Assists dashboard page in Assistant analytics



The visualizations on the Assists page help you with the following.

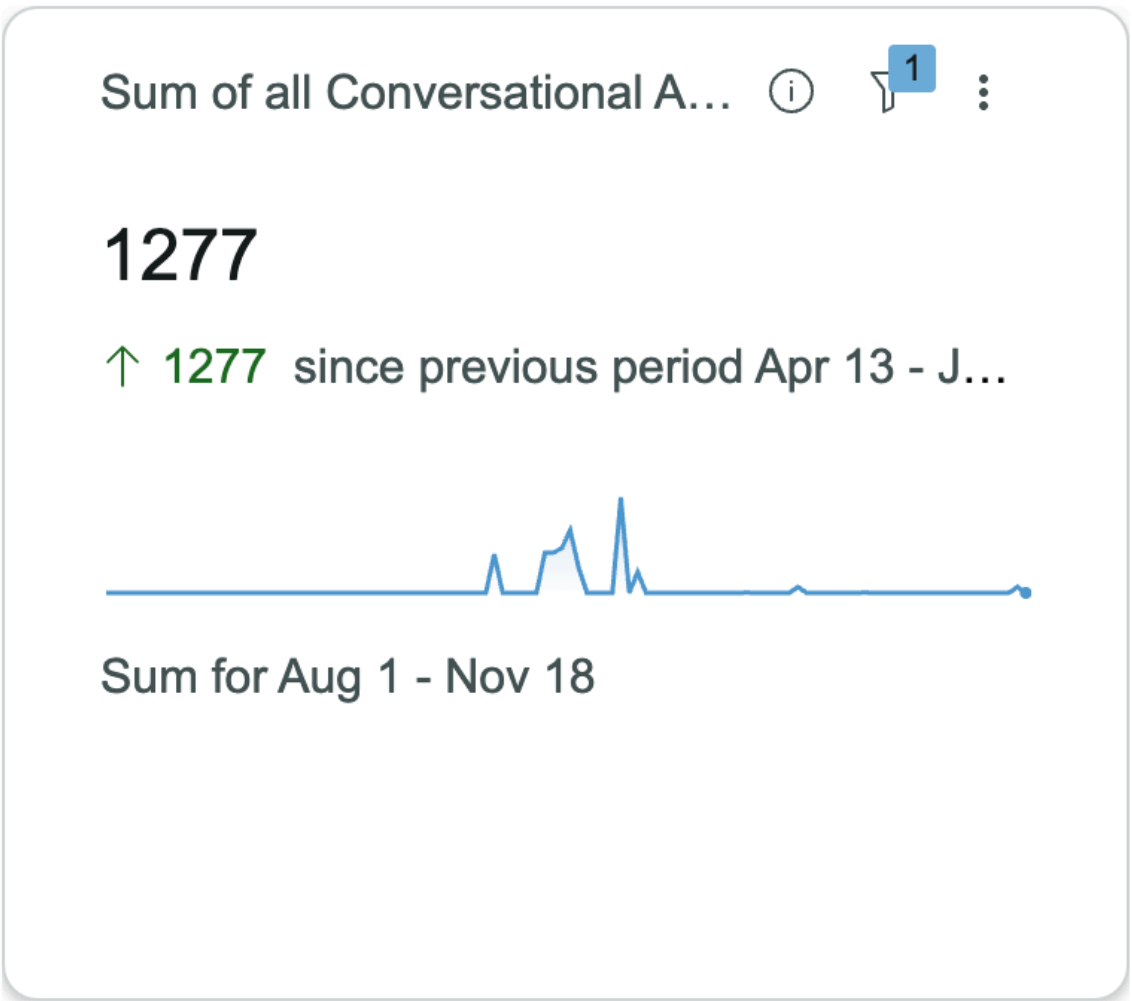
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Track overall consumption of assists and the usage breakdown by assistants.
- Identify the most popular AI features and usage patterns across assistants.

Sum of all Conversational Assists

This area of the dashboard shows the total number of assists consumed across all assistants in the selected date range. Use this metric to track growth in conversational assist usage from time to time.

Sum of all Conversational Assists




Assist Consumption

This area of the dashboard shows the distribution of assist usage across different assistants. Reveals which assistants are driving most usage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

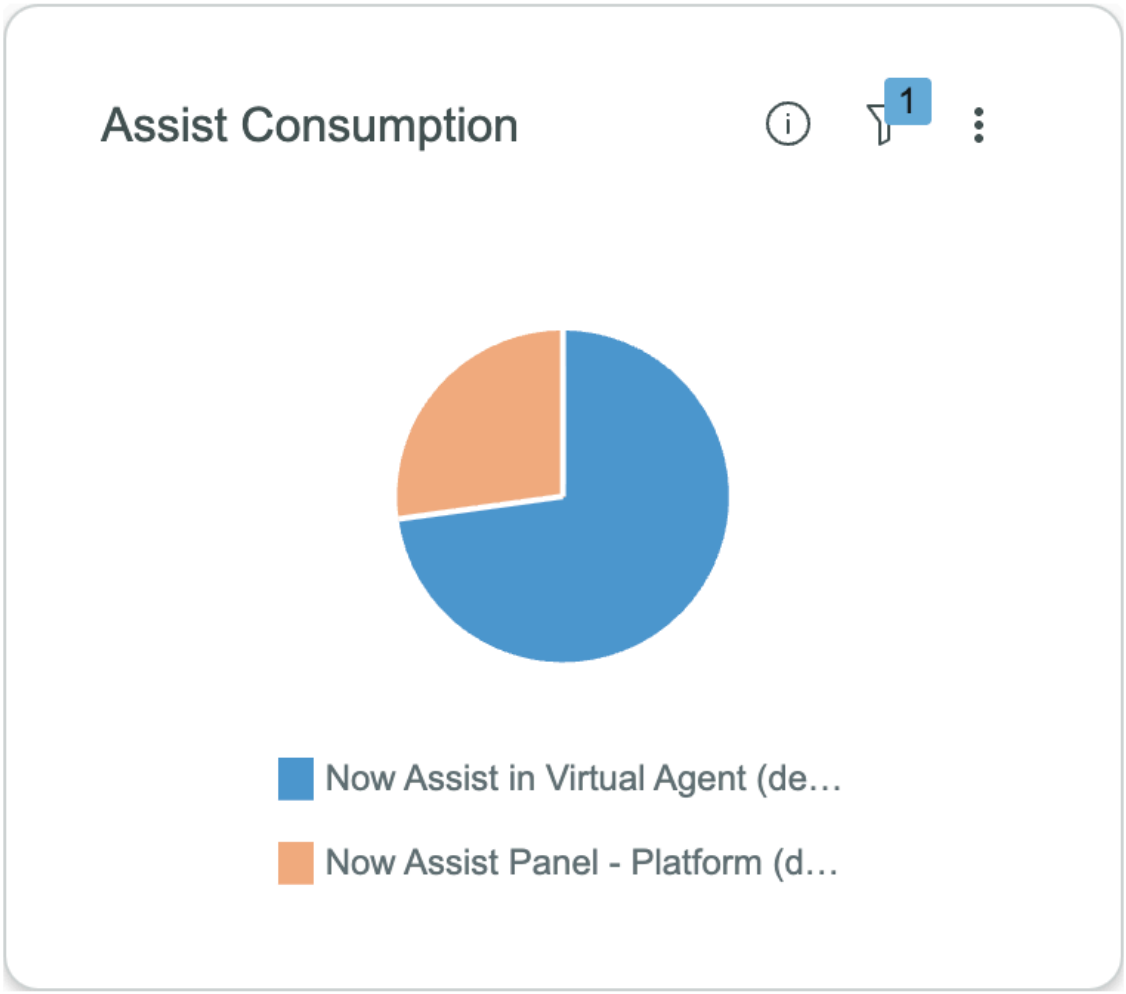Assist Consumption




Executions per Assistant

This area of the dashboard shows the number of executions broken down by assistants.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

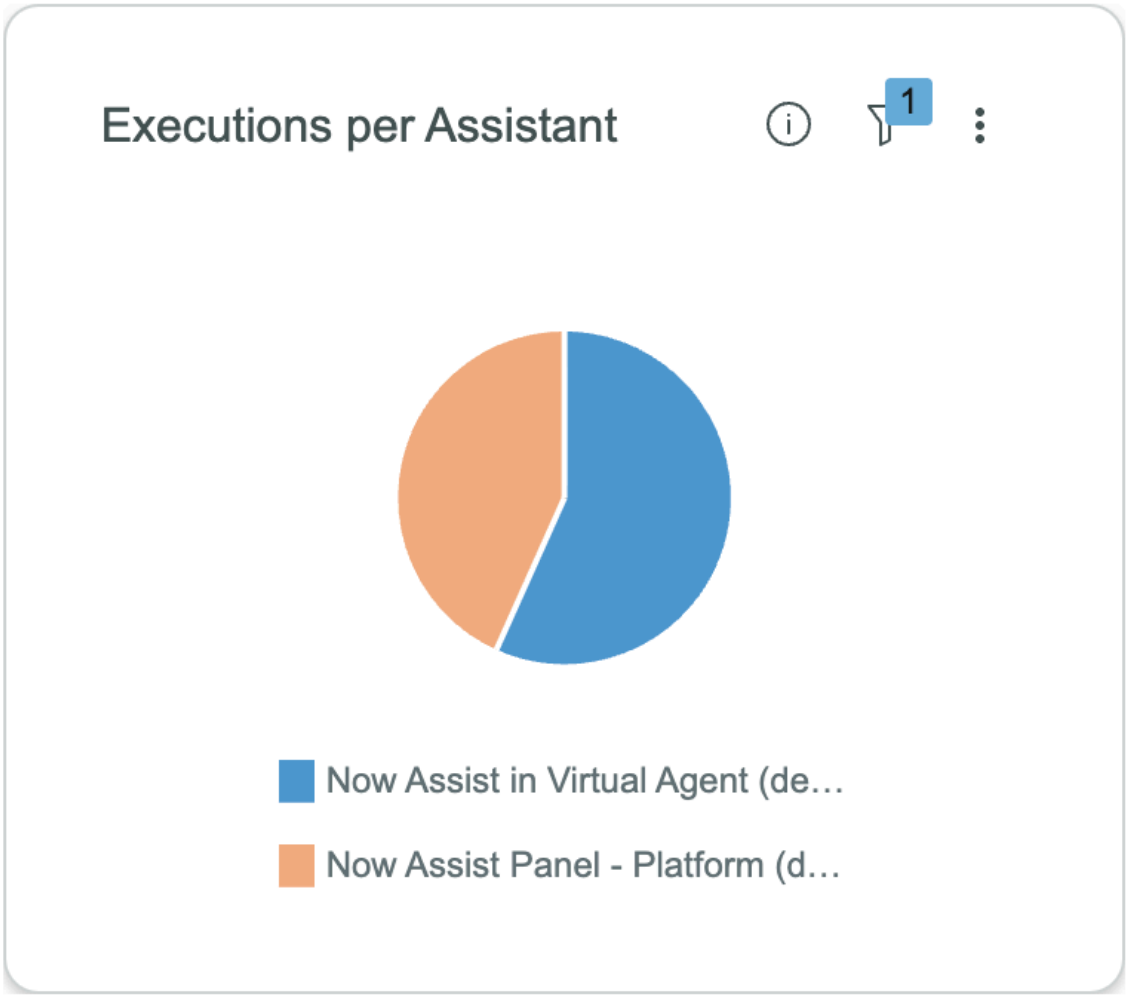
Executions per Assistant



Trending sum of all assists

This area of the dashboard shows the trend of assist usage over time, broken down by assistant. Use this metric to spot spikes or drops in assist usage for different assistants to understand underlying causes.

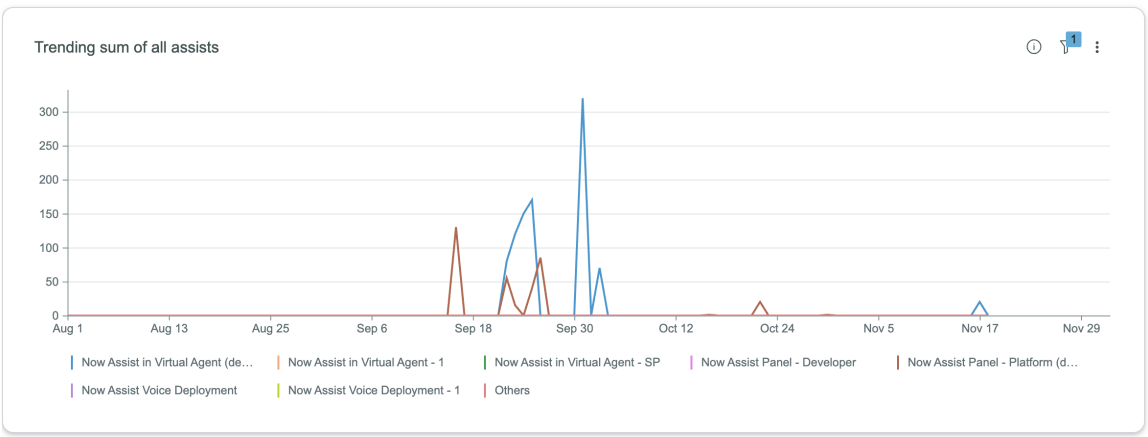Trending sum of all assists



Top 10 used AI Features

This area of the dashboard lists the top ten AI features, for example, skills, agentic workflows, AI agents, in decreasing order of assists consumed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Top 10 used AI Features

Top 10 most used AI Features


Feature	Executions ▾	Assists Used
Custom Call	6,536	6,536
Multi-context Synthesized Answer Generat	218	0
Virtual Agent Conversation	76	760
Now Assist Panel Conversation	42	210
Now Assist AI Agents	4	0
Record Sentiment Analysis	4	0
Analytics Generation	3	0
Email Response	3	0
Web search	3	0
Record summarization	2	0
Total	**6,891**	**7,506**

Voice page in assistant analytics

View how voice assistants are performing, including total calls, average call duration, conversation outcomes, and user sentiment.

The Voice dashboard page aggregates key metrics related to voice assistant usage and performance, including total voice conversations, deflected conversations, conversation outcomes, satisfaction scores, and performance of AI agents invoked by voice assistants.

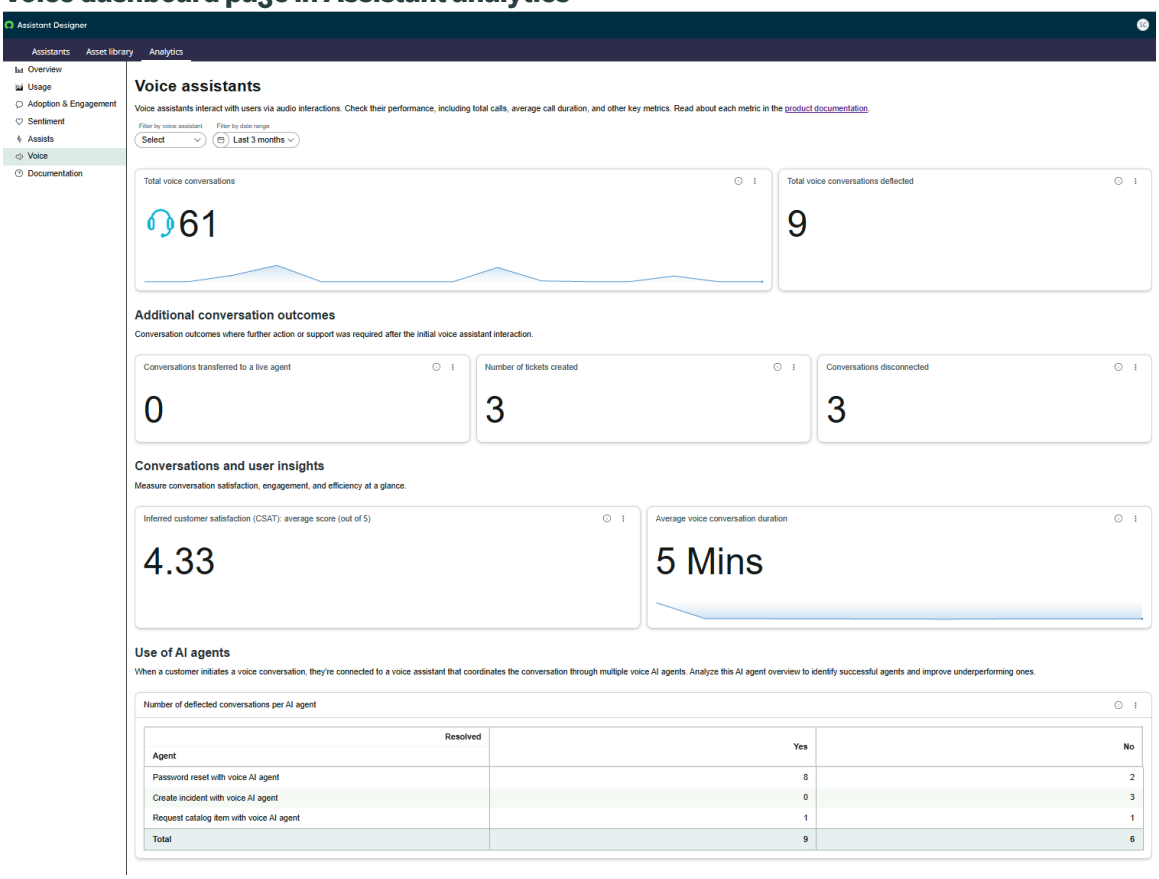Voice dashboard page in Assistant analytics



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The visualizations on the Voice page help you with the following.

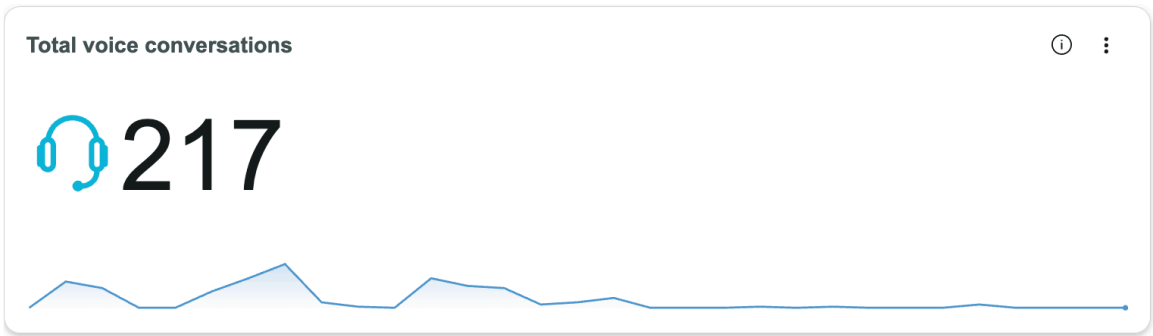
- Monitor the volume and outcomes of voice assistant interactions to assess adoption and identify areas for improvement.
- Track inferred customer satisfaction (CSAT) score and engagement metrics, helping you enhance user experience and efficiency.
- Analyze AI agent performance and conversations deflected to optimize voice workflows and reduce reliance on live agents.

Voice assistants

Total voice conversations

This area of the dashboard shows the total number of conversations with voice assistants in the selected date range. Use this metric to track growth in voice interactions and set benchmarks for assistant performance.


Total voice conversations



Total voice conversations deflected

This area of the dashboard shows the number of voice conversations successfully self-handled by voice assistants, measured through large language model (LLM) transcript analysis. This metric measures the effectiveness of voice assistants in handling user queries independently.

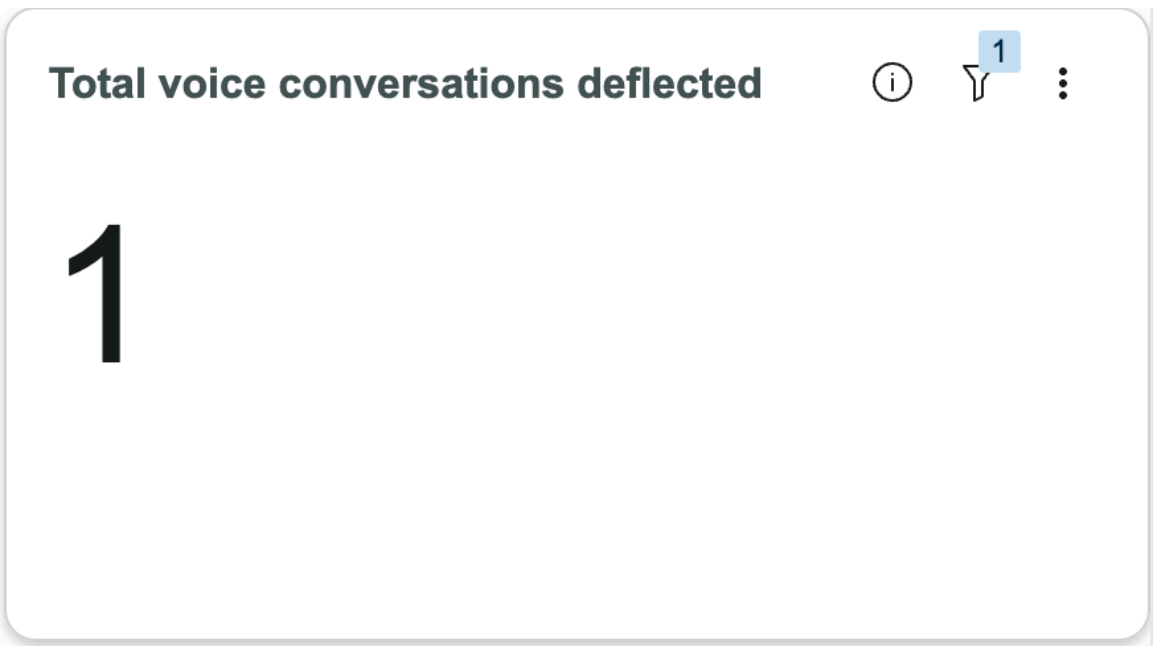Total voice conversations deflected




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Additional conversation outcomes

Conversations transferred to a live agent

This area of the dashboard shows the number of conversations transferred from a voice assistant to a live agent for further assistance. This metric indicates how often users require support beyond what the voice assistant can provide. Use this data to identify common escalation triggers and optimize assistant workflows to reduce unnecessary transfers.

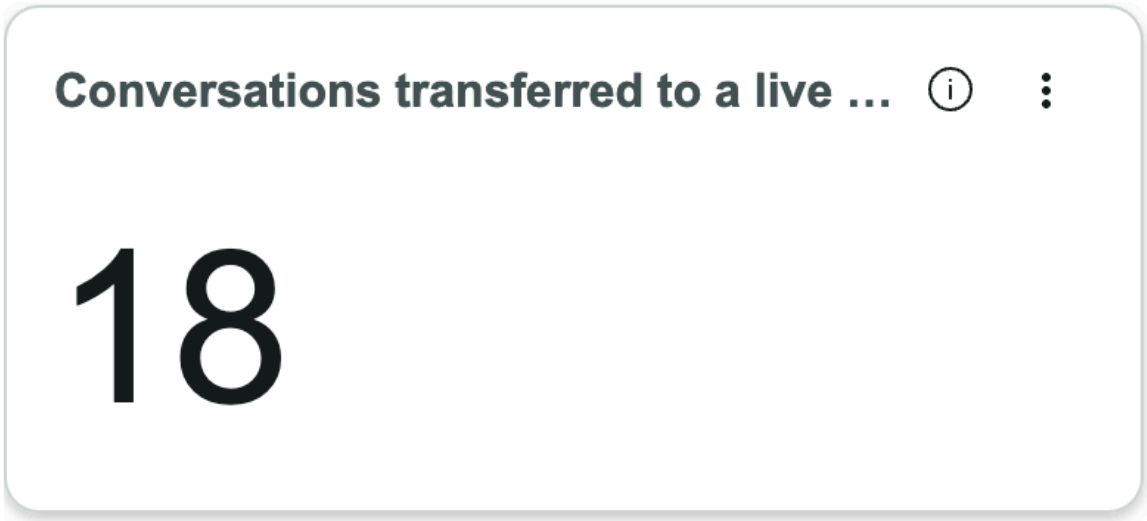
Conversations transferred to a live agent



Number of tickets created

This area of the dashboard shows the number of tickets, for example, incident and case records, created for follow up actions after a conversation. This highlights instances where user issues required formal tracking and resolution. Monitor ticket creation trends to assess assistant effectiveness and identify areas for improvement in issue resolution.

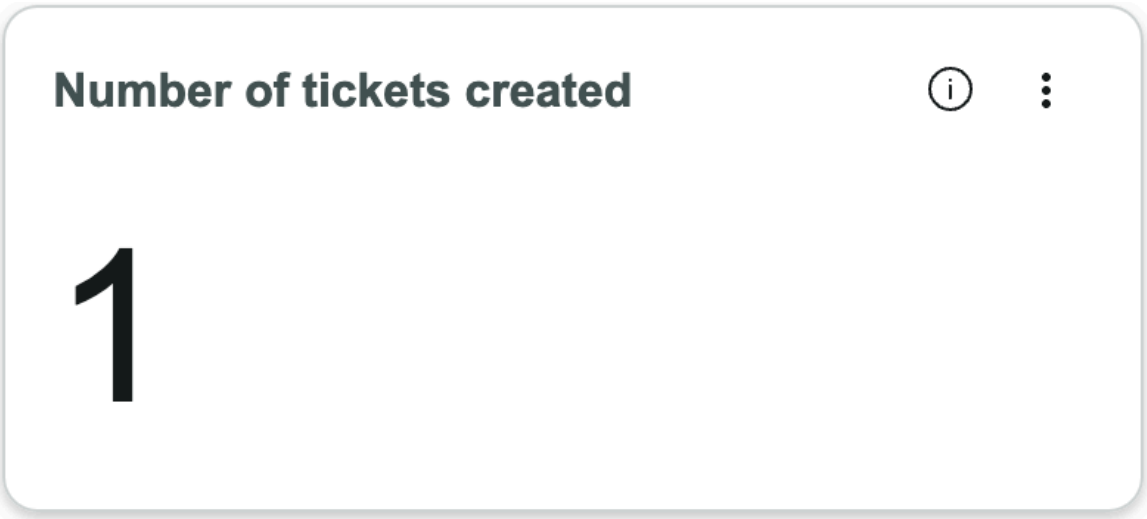Number of tickets created




Conversations disconnected

This area of the dashboard shows the number of conversations that ended abruptly or disconnected before completion. Reveals potential friction points or technical issues in voice interactions. Investigate disconnected conversations to improve assistant reliability and user experience.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

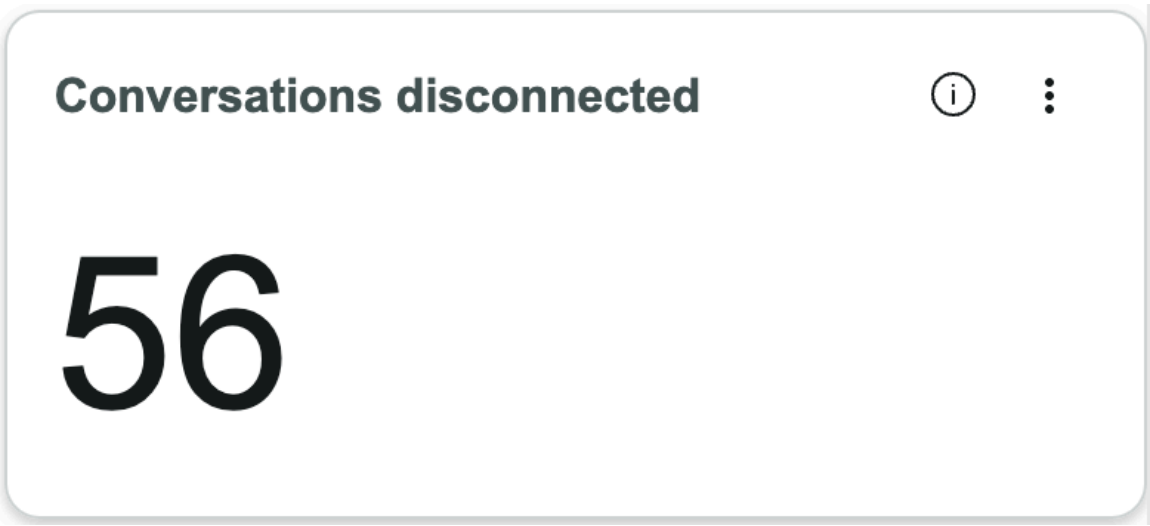Conversations disconnected




Conversations and user insights

Inferred customer satisfaction (CSAT) score

This area of the dashboard shows the average inferred CSAT score for voice conversations in the selected data range, calculated through LLM transcript analysis. Scored on a 5-point scale, 1 = least satisfied and 5 = most satisfied. This metric tracks user sentiment for voice assistant interactions. Track CSAT trends to evaluate the impact of assistant updates and guide improvements in user experience.

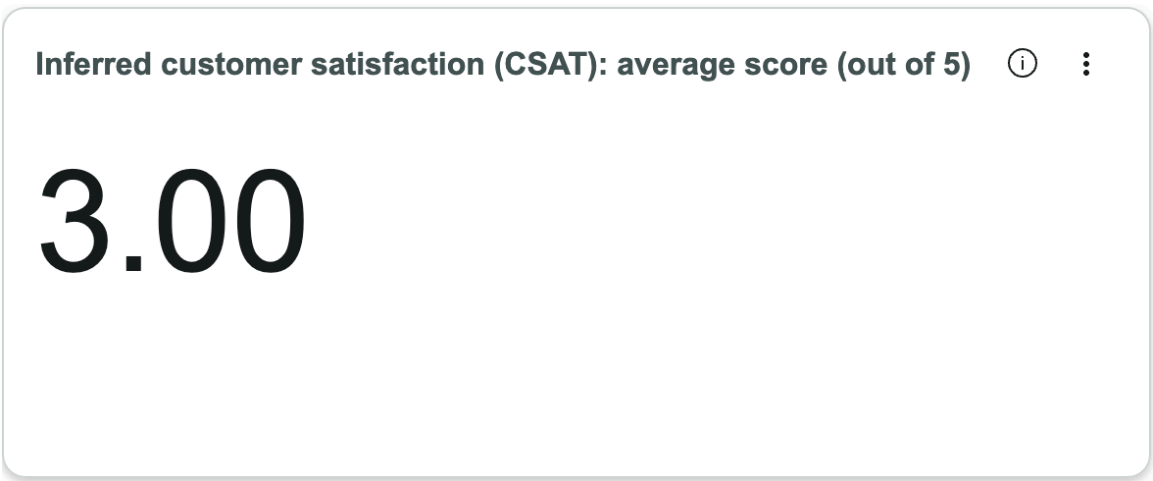Inferred customer satisfaction (CSAT) score




Average voice conversation duration

This area of the dashboard shows the average duration of voice conversations before resolution or transfer to live agent. This metric helps assess the efficiency of voice interactions. Use this metric to identify opportunities to streamline conversations and reduce resolution time.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

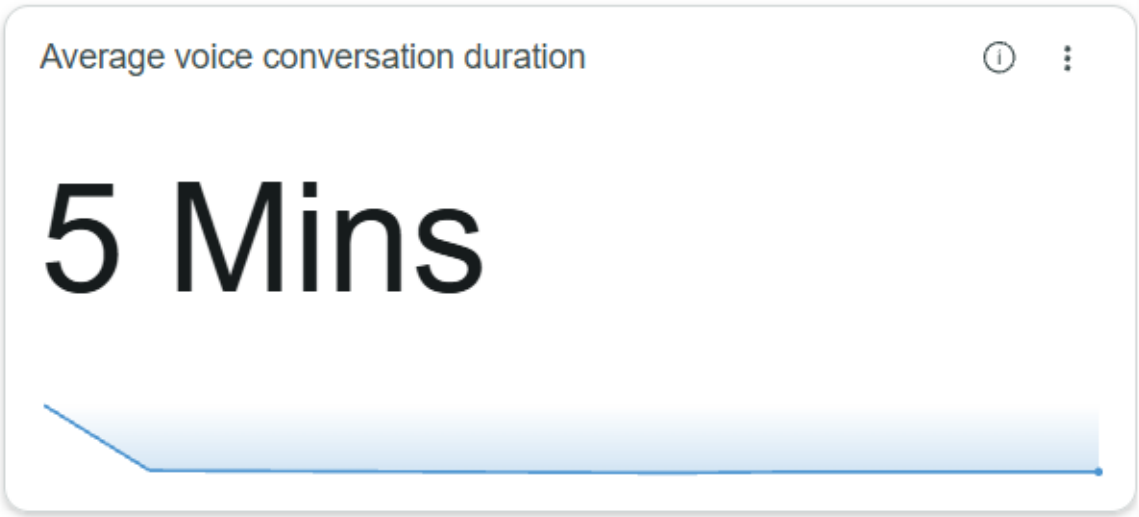Average voice conversation duration




Use of AI agents

Deflection by AI agent

This area of the dashboard shows the number of conversations deflected per AI agent. This metric measures the effectiveness of individual agents in resolving user issues independently.

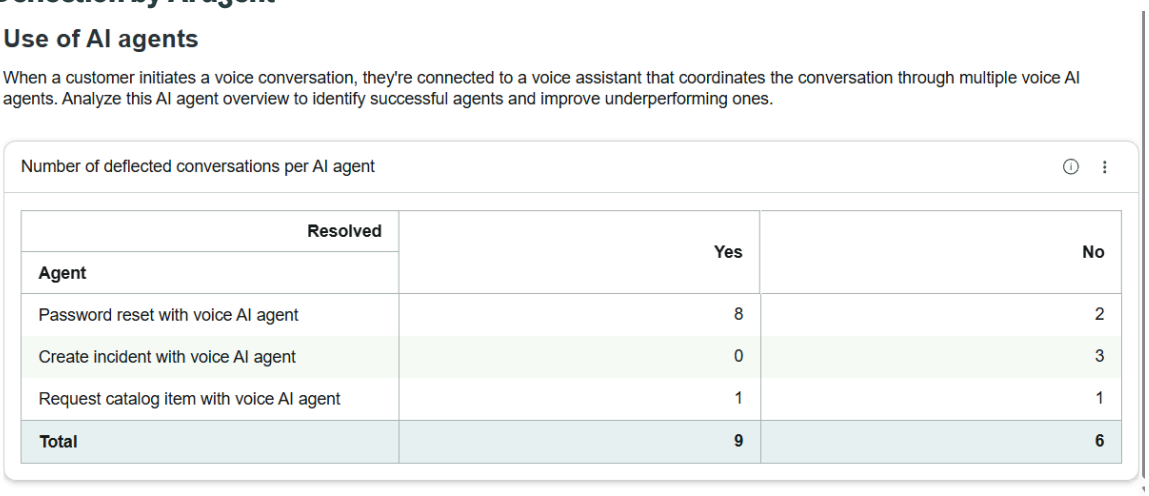Deflection by AI agent



Resolved / Agent	Yes	No
Password reset with voice AI agent	8	2
Create incident with voice AI agent	0	3
Request catalog item with voice AI agent	1	1
Total	**9**	**6**

Now Assist in Virtual Agent reference

Virtual Agent topic developers can create topics for use in the Now Assist panel channel. The following Virtual Agent Designer controls are currently supported.

For more information about the Now Assist panel channel, see Channels in Conversational Interfaces.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Supported controls for the Now Assist panel channel

Control type	Supported controls
User input controls	• Input Collector • Text • Static choice • Dynamic choice • Boolean • Date Time • Carousel For more information, see Virtual Agent Designer user input controls.
Bot response controls	• Text • Link • HTML • Card (record card and record card with action only) For more information, see Virtual Agent Designer bot responses.

Interactive view customization tables

Make your own user interface applicable to the interactive view with some customization in the following two tables: Now Canvas Definition [sn_now_canvas_definition.list] and Now Canvas Configuration [sn_now_canvas_configuration.list].

Interactive view customization tables overview

You must first work with the Now Canvas Definition table [sn_now_canvas_definition.list] before working with the Now Canvas Configuration table [sn_now_canvas_configuration.list] because the configuration table relies upon data found in the definition table. The Now Canvas Definition table [sn_now_canvas_definition.list] defines the user interfaces and the Now Canvas Configuration table [sn_now_canvas_configuration.list] serves as the action of when to call the interactive view for the defined user interface. The Now Canvas Definition table [sn_now_canvas_definition.list] only has one default definition: iframe.

The following tables list the fields that you must work with to create those customized interactive views. Some of these fields may not be available upon default. For more information about how to add or remove fields from the form layout, see Configuring the form layout.

Now Canvas Definition table [sn_now_canvas_definition.list]

Field	Description
Name	Name of the user interface that is going to use the interactive view.
Definition type	Select either UX macroponent or UX component. Depending on this selection,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Now Canvas Definition table [sn_now_canvas_definition.list] (continued)

Field	Description
	either the **UX Component Definition** field or **UX Macroponent Definition** field displays.
UX Component Definition	Name of the independent seismic component.
UX Macroponent Definition	Name of the UXF page that uses UI builder.

Now Canvas Configuration table [sn_now_canvas_configuration.list]


Canvas ID	Name of the user interface that is pulled from the Now Canvas Definition table [sn_now_canvas_definition.list].
Active	Status of whether this is an active or non-active interactive view.
Related Table Name	Related table can be one of the following: • AI Agent • Generative AI skill • Tool • Topic • Use case
Related Record	Related record associated with the related table.
M2M Canvas Configuration Deployment Channels related list	Related list that displays the name of the active or in-active deployment channel associated with this interactive view. Select **New** to associate this interactive view configuration with a deployment channel. You must do this to complete the interactive view association with the intended deployment channel. Searching at the **Deployment Channel** field level opens up the Now Assist Deployment Channels [sys_now_assist_deployment_channel_list.do] table to select a channel.

Now Assist in Virtual Agent system properties

Use system properties to customize your assistant. Some properties are available on a system properties form, but some lesser-used properties are available only from the System Property [sys_properties] table.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

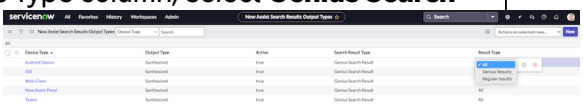Miscellaneous

Property	Description
com.glide.cs.doc_qna.va_attachment.max_attachments	Set the maximum number of attachments that can be attached at one time for the assistant. Default value = 3.
com.glide.cs.nass.synthesized_response.disabled_catalog_item_popover	Hide the popover for disabled catalog items for Now Assist in Virtual Agent and Now Assist panel's enhanced chat. The default value is `false`.
com.glide.interactive_view.enabled	Open an interactive side panel view next to the chat window. The default value is `true` to activate AI Experience on your instance.
sn_ai_websearch.perplexity_model_name	Specify the Perplexity model to use for web search. The default value is `sonar`.
now_assist_va_search_results_output_type.list	Turn off regular results and only have Genius Results shown within Virtual Agent. Use the system property to access the Now Assist Search Results Output Types table. By default, regular results and Genius Results are shown for all channels (Android device, iOS, Web Client,Now Assist Panel, and Microsoft Teams). In the Search Results Type column, select **Genius Search Result**. 
sn_nowassist_va.enable_nass_show_all_option	Displays the **Show all options** link in enhanced chat and enhanced chat's full-page experience. The default value is `false`.
sn_nowassist_va.display_default_catalog_image	Show or don't show the default cart image if a catalog item doesn't have an image set in its record. **Value** = `true` shows the default cart image. This is the default value. **Value** = `false` removes the default cart image. **Note:** A catalog item that is associated with an image continues to be displayed irrespective of the system property.
sn_nowassist_va.enhanced_chat_pin_enabled.<portal url>	Create a system property to enable pinning a chat window on a portal. In the system property, *<portal-url>* is the URL suffix for the portal application. For example, the system property for enabling a chat window in Employee Center would be *sn_nowassist_va.enhanced_chat_pin_enabled.e* By default, pinning a chat window is enabled for Service Portal. For all other portals, create

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Miscellaneous (continued)

Property	Description
	the system property. For a list of URL suffixes, navigate to **All** > **Service Portal** > **Portals**.
sn_nowassist_va.show_view_more_for_synthesized	Show the **Need more help** button in a standard chat conversation. The **Value** field is empty by default so the button doesn't appear. To show the **Need more help** button, enter `regular`, `clarification`, or `regular,clarification`. • `regular`: The **Need more help** button appears only for synthesized responses. • `clarification`: The **Need more help** button appears only for clarification responses. Clarification responses typically occur when an end user's response is too vague and clarification is needed for a more targeted response. • `regular,clarification`: The **Need more help** button appears for both synthesized responses and clarification responses.
sn_nowassist_va.synth_response_revisit_position	Change the order of the fallback and revisit options in a conversation. In the **Value** field, enter BEFORE_FALLBACK or AFTER_FALLBACK, and then select **Update**.
sn_nowassist_va.synthesized_autostart_items	When synthesized response only returns a singular action, configure whether to automatically launch the action. By default, only Virtual Agent topics and agents automatically launch. You can configure this for whenever synthesized response returns a single conversational catalog item, a single Virtual Agent topic along with Knowledge Base information appears, a single conversational catalog item along with Knowledge Base information appears, or an agent response with sourced Knowledge Base information appears. • Type: string • Default value: topic, agent, agent_with_sources • Location: System Property [sys_properties] table

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Miscellaneous (continued)

Property	Description
sn_nowassist_va.use_planner2_response_as_fallback	Set to `false` (default value) to use the Virtual Agent fallback message when an answer cannot be found. Set to `true` to use an LLM-generated fallback message that is more specific in response whenever an answer cannot be found.

Knowledge Graph

Property	Description
sn_ais_assist.kgnlq_schema_name	Control the information available to Now Assist in Virtual Agent through Knowledge Graph. The default value is `sn_kg.now_user_graph_nlq`.

Suggested queries

Property	Description
sn_nowassist_va.enable_suggested_queries	Enable suggested search queries for enhanced chat to appear in the chat window. Any search query performed in the portal's search bar appears as a part of the greeting topic for subsequent new conversations. The default value is `false`.
sn_nowassist_va.max_suggested_queries	Determine the maximum number of suggested search queries to display within the greeting topic for enhanced chat window conversations. The default value is 6.

Suggested actions

Property	Description
sn_nowassist_va.enable_suggested_actions	Enable suggested actions in Now Assist in Virtual Agent so that users are offered options for what they can do after completing a prior action. Suggested actions is applicable to standard and enhanced chat, mobile, and Microsoft Teams. These are the possible values: `False`: Suggested actions remain off with no background processes running. `Log only`: Feature runs in the background with no suggested actions shown in the UI. The suggested actions are logged in a table that is visible to admins.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Suggested actions (continued)

Property	Description
	`True`: Shows the suggested actions in Now Assist in Virtual Agent and log only mode. Log only mode logs the actions predicted in a table that is visible to the admin.

View the table showing actions executed and corresponding suggested actions in the instance. The table is visible when the system property is set to `Log only` or `True`. The table location is: *`sys_now_assist_va_suggested_actions_result_log`*.

Actions executed and corresponding suggested actions

Executing action name	Executing action description	SA1 name	SA1 description	SA1 model type	SA2 name	SA2 description	SA2 model type

Agent Chat

Agent Chat provides features that streamline the agent and requester chat experience and enables managers to monitor and assist agents.

Provide your agents with a workspace that has built-in productivity features for engaging with customers. Your agents can do the following:

- Use shortcuts, known as quick actions, for common activities, such as transferring a chat to another queue or displaying contextual info related to the chat.
- Reuse common responses, such as greetings or answers to frequent questions, with response templates.
- Get possible solutions for issues, derived from searches of related issues in Knowledge articles, Q&A, and previous incidents or cases with Agent assist..
- Interact with customers in their native language using Dynamic Translation for Agent Chat.
- Manage work assignments delivered to agents' inboxes, enabling them to set their availability and accept, reject, or transfer chats.
- Trigger a Virtual Agent self-service topic that walks end users through a task with Conversation Autopilot.
- Provide agents with the option to add work notes or updates after they finish a support session with Interaction wrap up.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Get started

Explore	Configure
	
Learn about Agent Chat concepts and features.	Install and configure Agent Chat and activate relevant plugins.
Use	**Reference**
	
Use Agent Chat to help agents have discussions with others to solve issues faster.	Get Agent Chat details for domain separation, building reports, and interaction related records.

Exploring Agent Chat

Agent Chat enables live agents to interact directly with end users through chat. Your end users can chat with a live agent to ask questions and receive information.

Agent Chat overview

The chat system starts with virtual chat, which is an autonomous chat powered by artificial intelligence. The requester can then ask to chat with a live agent using Agent Chat. Using Agent Chat, agents can communicate with requesters, create incident or case records, or transfer chats to another agent or queue.

Agent Chat uses a persistent widget for chat conversations on any portal page of the portal that you're using. You can establish assignment rules to enable chat conversations to reach the best agent available who has the capacity and skills to handle the job or the agent can transfer the chat to another agent. Agents can use response templates to enable reusable, consistent messages to requesters.

Virtual chat conducts a survey before and after the Agent Chat. The pre-survey gets preliminary information about the requester to aid in the chat session. The post-chat survey gets feedback on the requester's satisfaction with the agent who helped.

Note:
Starting with the Quebec release, legacy Agent Workspace is no longer deployed, enhanced, or supported. For details, see the Deprecation Process [KB0867184] article in the Now Support Knowledge Base.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent Chat benefits

Benefit	Feature	Users
Agents and chat managers have a conversation without the requester knowing.	Agent Whisper	Agents, chat managers
Gather important information from end users through conversational questionnaires.	Chat surveys	Agents
Download a transcript of the conversation between the agent and the requester.	Chat transcript downloads for requesters	Requester
Carry out a conversation in another language.	Dynamic Translation for Agent Chat overview	Agent, requester
Initiate conversations with requesters on a messaging app of the requester's choice.	Agent-Initiated Messaging Interface	Agent, requester
Read a summarization of the chat (this is available only if you have Now Assist installed).		Agent

Routing chats

Requesters start chats with virtual chat. When they request to chat with a live agent on Agent Chat, their request goes into a queue controlled by Advanced Work Assignment (AWA), which routes chats to different agents based on availability, queue length, and expertise.

Unfurling links

If an agent or requester enters a link during an Agent Chat conversation, the links are "unfurled" or displayed with a preview of the website's content. Links in Agent Chat conversations are unfurled in the same manner as Virtual Agent. For more information, see Using link unfurling in Virtual Agent.

Cross-channel conversation history and cross-channel message-level sentiment

Agents can see cross-channel conversation history and cross-channel message-level sentiment in real time when an agent is having a live conversation with a requester in the chat panel in Agent Chat. For more information, see Getting work from chats.

Agent Whisper

Agent Whisper lets agents and chat managers have a conversation without the requester knowing.

During a chat between a requester and an agent, the agent may want to privately ask a chat manager for assistance or a chat manager and an agent may want to converse without the requester knowing. Using Agent Whisper, the agent can request help and the chat manager and agent can send messages to each other without the requester knowing.

For example, if an agent is newly hired, still in training, or unsure about how to proceed with a requester's request, the agent can ask a chat manager to join the conversation to help walk the agent through the steps of the procedure privately.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Another scenario is if an agent needs to escalate a customer conversation to a chat manager. Agents can request help and chat managers can join the chat conversations publicly to communicate directly with the customer to help deescalate the situation.

You activate Agent Whisper in Agent Chat settings. For details, see Setting up Agent Chat.

Using the Help quick action

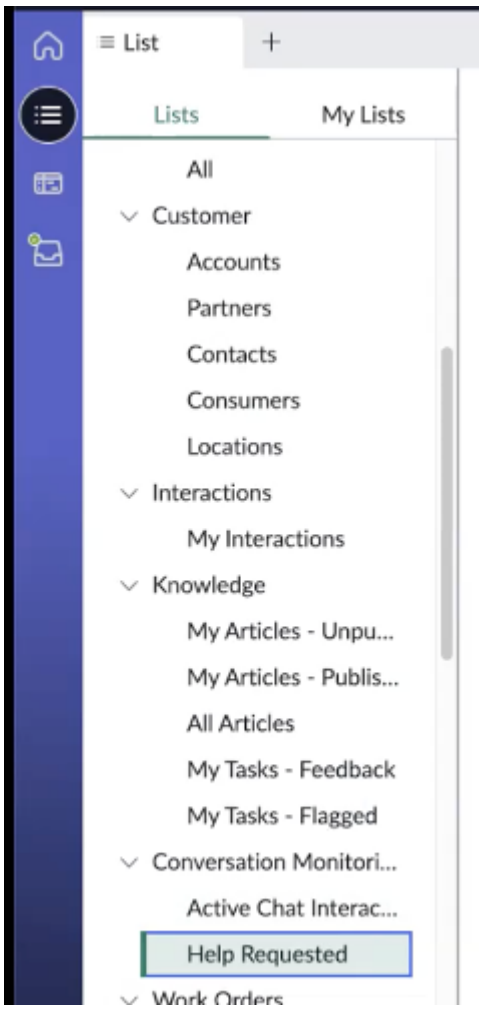
Agents can ask chat managers to join chat conversations with requesters by raising the help flag. Agents can open the Quick Action menu or enter `/help` to request for help. When using the help quick action, agents can also type a brief private message explaining what they need help with. This way, when a chat manager enters the conversation, they already know what the agent needs.

Chat managers can view the conversations with help requested from different views: interactions list view, manager dashboard, and lists.

- Interactions list view: Agents can navigate to the interactions list view and add in the help requested column to see which conversations agents have requested help in. From here, managers can click directly into the interaction record and join the conversation with the agent and requester.
- Manager dashboard: With the Workforce Optimization for Customer Service (com.snc.wfo.csm) plugin installed, managers can see that the Help requested tile on the manager dashboard homepage.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Lists: From Conversation Monitoring > Help Requested, managers can view a list of chat interactions in which agents have requested help.



To learn more about Workforce Optimization for CSM, see Workforce Optimization for Customer Service.

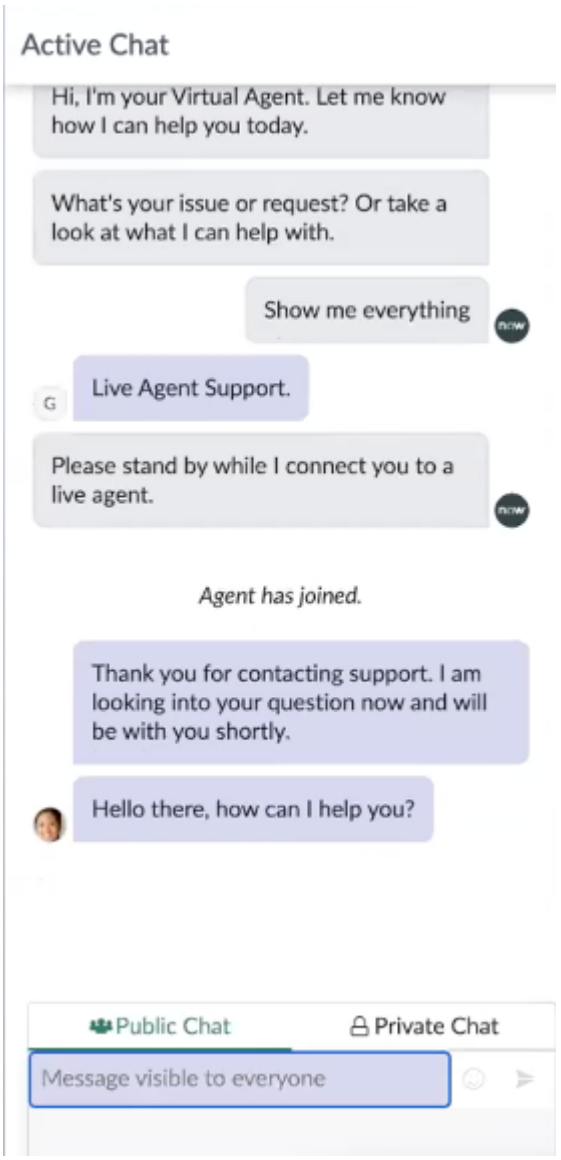
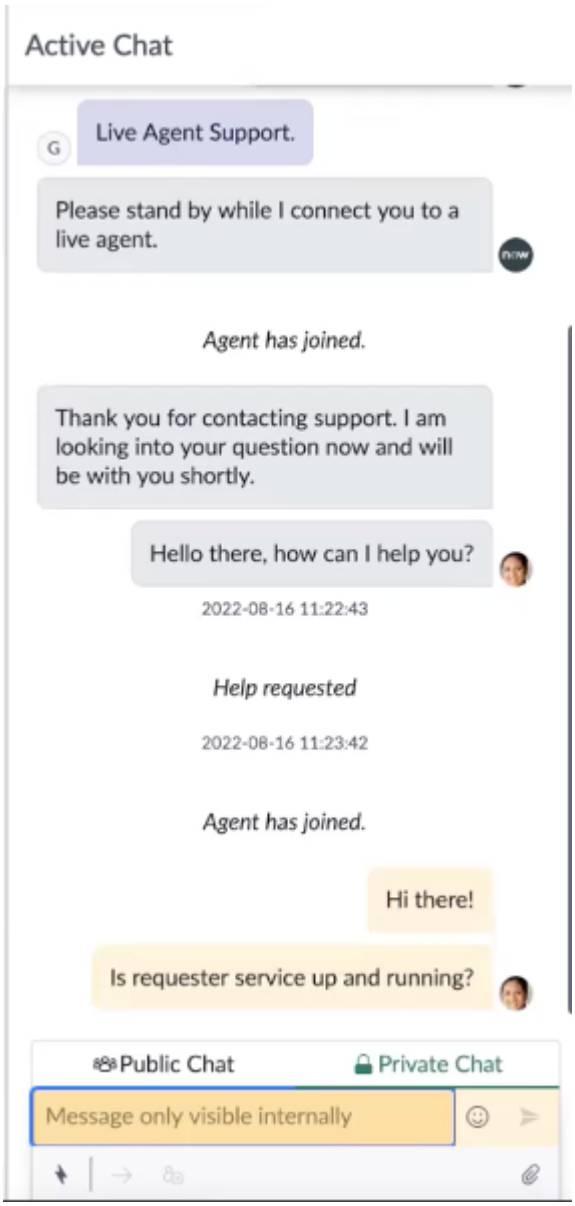
Sending and receiving messages in Private Chat

The agent and chat manager can converse without the requester knowing that they are having a conversation. Messages that only seen by the agent and chat manager are private messages. The requester does not see private messages. The agent and chat manager can toggle between the public and private messages using the **Public Chat** and **Private Chat** tabs. The **Private Chat** tab has a yellow background with "Message only visible internally" and private messages appear on the yellow background. When someone types in the **Private Chat** tab, the typing event indicator does not display. For example, when the chat manager types in the **Private Chat** tab, the agent's and requester's screen do not display the typing event indicator.

The tab that the agent types on and sends the message from determines whether a message is posted privately or publicly. If an agent starts typing a message on the **Public Chat** tab and then switches to the **Private Chat** tab, the **Private Chat** tab does not display the message. If the agent then goes back to the **Public Chat** tab, the message is still there. However, agents can see private messages regardless of whether they are on the **Private Chat** tab or the **Public Chat** tab.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Public versus Private chat

Example of Public Chat	Example of Private Chat
	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

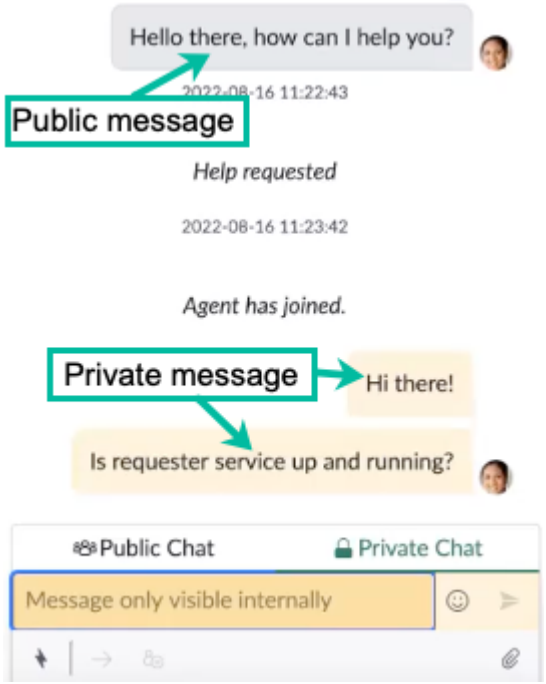
Example of public and private messages



Joining a chat conversation in Private Chat

The first time a chat manager switches from a private conversation (on the **Private Chat** tab) to a public conversation (on the **Public Chat** tab), a dialog box displays. The dialog box informs the chat manager that they are about to join the public conversation and the requester will be notified that the chat manager is joining the conversation. The chat manager can select **Yes, I'm sure** to join the public conversation or select **Cancel** to remain in the private conversation.

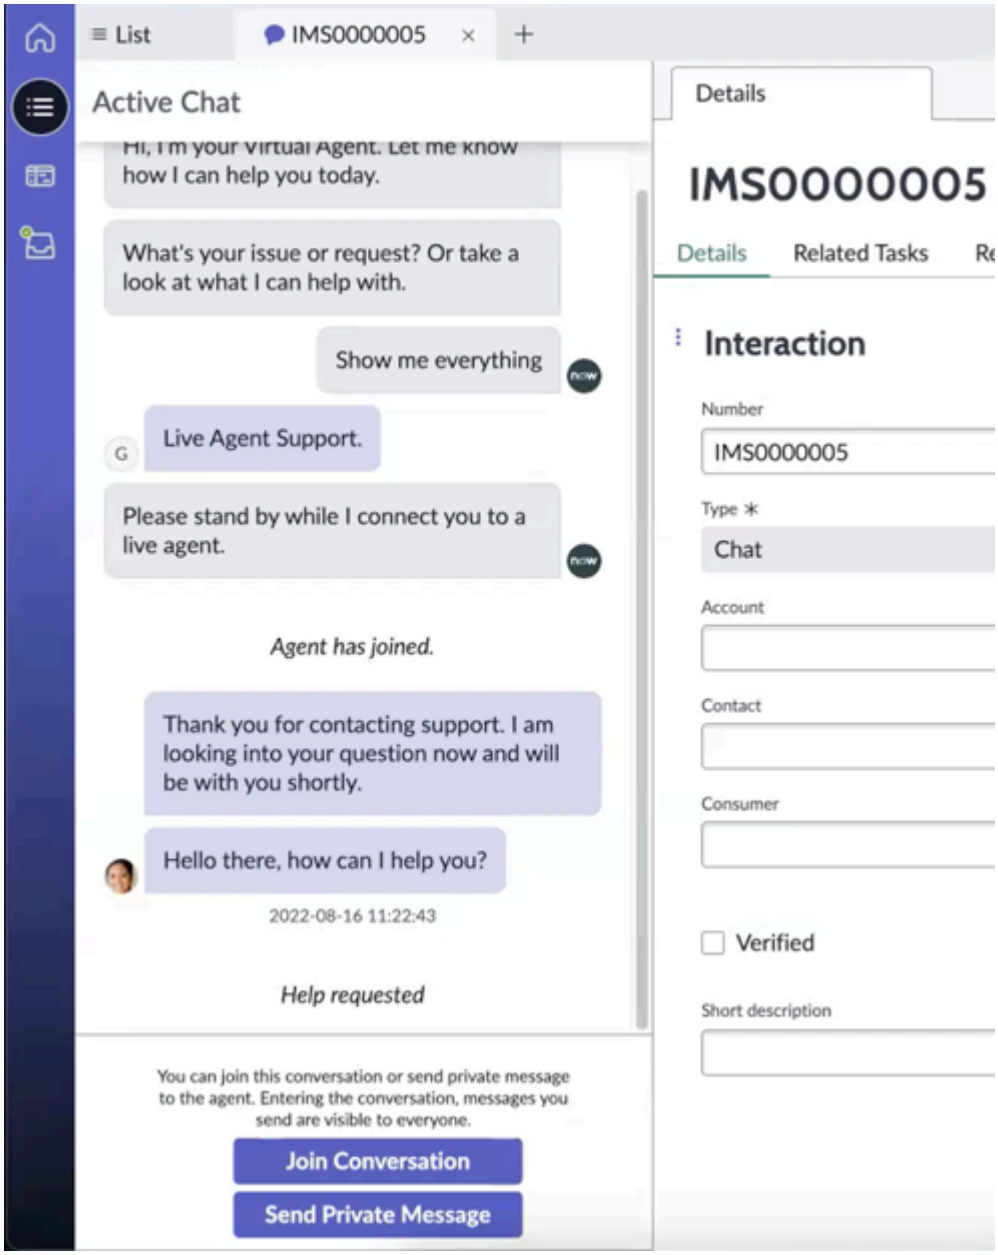© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Sharing attachments in Private Chat

If agents send an attachment while on the **Private Chat** tab, the attachment is sent only to the agent and chat manager. Message Sent confirmation messages do not display for private message conversations.

Private messages stored in internal chat transcripts

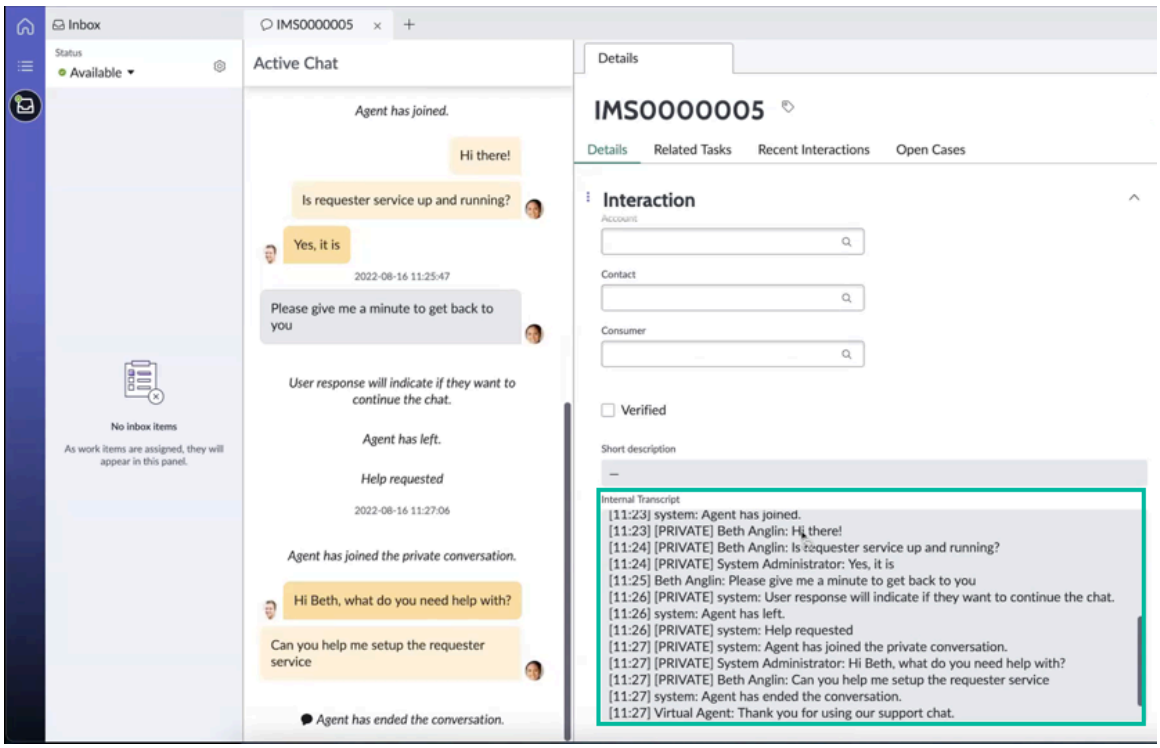
Once the conversation ends, one external transcript and one internal chat transcript are generated.

The public chat transcript does not include private messages and is accessible for the requester to download if the Download Transcript capability has been enabled.

The private chat transcript is shown on the interaction record by default and does include private messages exchanged between agents and managers. Private messages are prefixed with the word [PRIVATE] to clearly indicate when a message came through the Private Chat.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

To learn more about downloading the chat transcript, see Chat transcript downloads for requesters.



Custom report

Admins can build a custom report to track the number of help requests, see Build a report to track the number of help requests for instructions.

Chat surveys

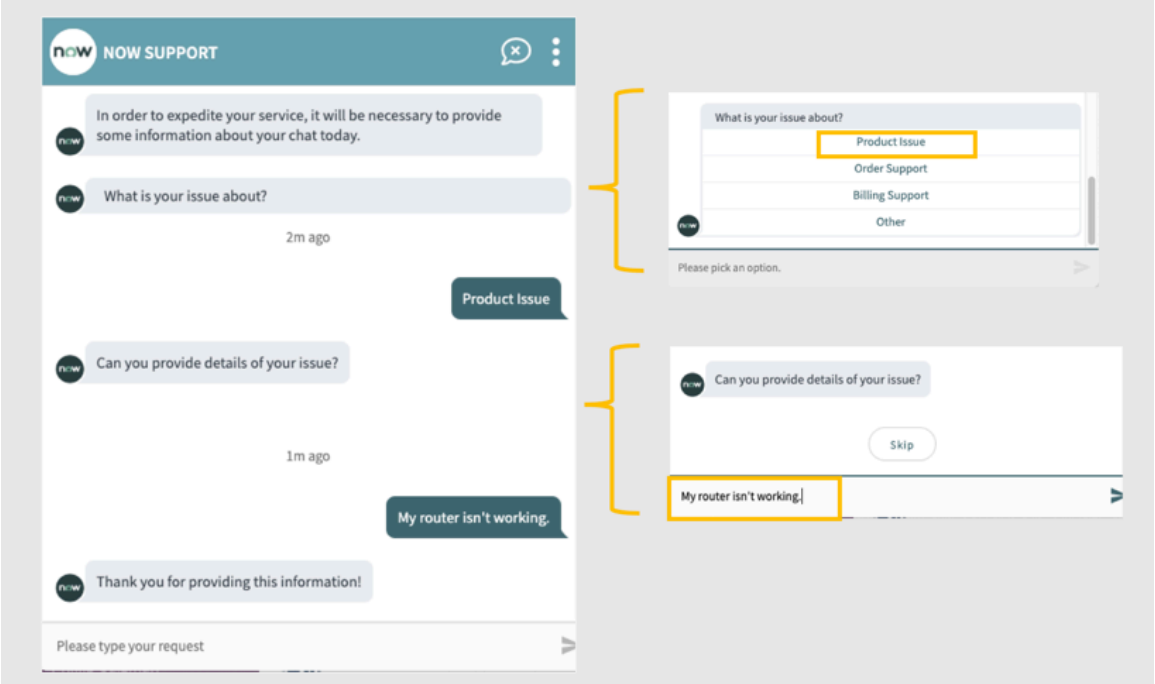
Display conversational questionnaires to your end users to gather important information from them, before and after they chat with a live or virtual agent.

How chat surveys work

Instead of using forms to collect information from your requesters, you can create different questionnaires that run in the chat client to capture preliminary user information or post-chat feedback. The questions in the following pre-chat survey example ask users to identify their service issue and to provide additional details.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Example pre-chat survey conversation



Survey administrators and administrators use Survey Designer to:

- Build survey content: Survey Designer provides various controls for defining survey questions. The example above shows the choice list control, which displays a list of items that your users can choose from. Each survey question has corresponding properties that you can set to manage survey behavior. For instance, you can make a survey response mandatory. If you make a survey response optional, users can skip the question in the survey. You can also configure your survey so that an introductory note starts the survey and an end note displays after users finish the survey.
- (Optional) Save certain survey responses as chat context: When defining your survey, you can map a particular survey question to a chat context variable so that survey responses are stored in the context variable. You can then use these variables to route chats to live agents in certain queues, by specifying the chat context variables in routing conditions or to the virtual agent.

After creating the surveys, administrators configure the surveys to run as conversations in the chat client. The chat client renders the chat survey as a live chat conversation.

Activating and deactivating pre-chat surveys in Now Assist

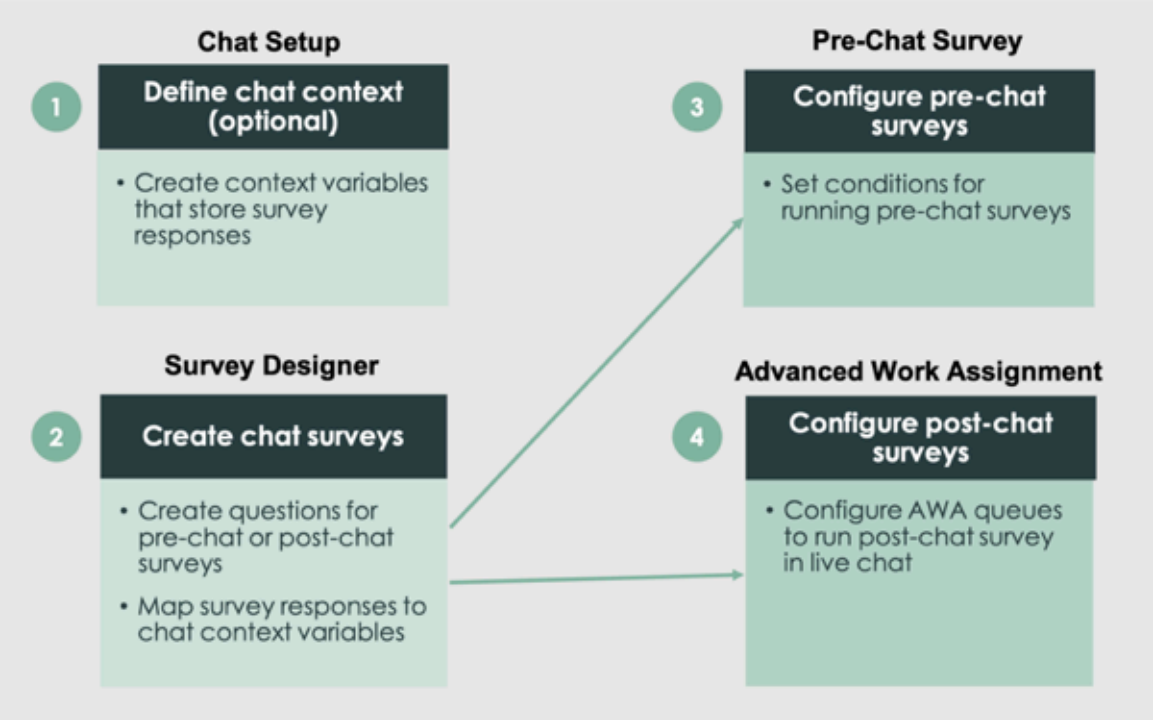
By default, you can manage pre-chat surveys by navigating to **All** > **Conversational interfaces** > **Settings** and and opening **Pre-chat surveys** in the **General** tab. Now Assist honors these settings in both Virtual Agent and Self-service.

You can also turn pre-chat surveys on and off specifically for Now Assist Self Service. Navigate to **All** > **sys_properties.list**, and under *`com.glide.cs.nass.prechat.enabled`* set the value to `True` or `False`.

What to do next

Setting up chat surveys involves these main steps:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



1. (Optional) Define chat context.

Configure the chat context variables for storing survey responses using **Context Variables** in Chat Settings.

2. Create chat surveys

In Survey Designer, build your conversational questionnaires for gathering pre-chat information and post-chat feedback from your requesters. If you defined chat context variables to store certain survey responses, you can map the appropriate survey question to the corresponding chat context variable.

3. Define pre-chat survey configurations.

Determine the pre-chat questionnaire to be presented to your requesters based on conditions that you apply.

4. Define post-chat survey configurations.

Control the post-chat questionnaire displayed to your requesters to gather feedback on their experience with live agents.

5. If using Virtual Agent, define context topic intent configurations.

Use pre-chat survey information to determine the appropriate Virtual Agent conversation topic automatically displayed to your requesters, rather than prompting them to choose from a list of conversation topics.

The Interaction Related Records list stores the post-survey chat results and creates a related record that links the assessment to the live agent (fulfiller).

Chat transcript downloads for requesters

Once a conversation between a requester and a live agent ends, the requester can download a transcript of the conversation.

After a conversation between a requester and a live agent ends, the requester's chat window displays a **Download** button that enables the requester to download a chat transcript. If the requester clicks the **Download** button, a .txt file is automatically downloaded from the window of the requester's current web browser. The chat transcript contains only the written text from

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

the conversation; attachments and images from the conversation appear as URLs. Even after the requester starts a new chat session, the **Download** button from the previous session is still available if the requester scrolls up. The chat transcript files are generated at the end of each chat session and multiple chat sessions are not combined into one file.

The requester must be configured for chat transcript downloads for the **Download** button to appear. For information about configuring the download of chat transcripts, see Setting up Agent Chat.

Two types of chat transcripts are generated from the conversation: internal and external.

Internal chat transcripts:

- Are available only to the agent and chat supervisor.
- Include any conversations between the requester and virtual agent.
- Include any conversations between the agent and chat supervisor that occurred through Agent Whisper.
- Include customer sentiments (if Agent Chat is configured to display customer sentiments).

The internal transcript field in the interaction table contains all private and public messages and is populated as soon as the chat is close completed.

External chat transcripts:

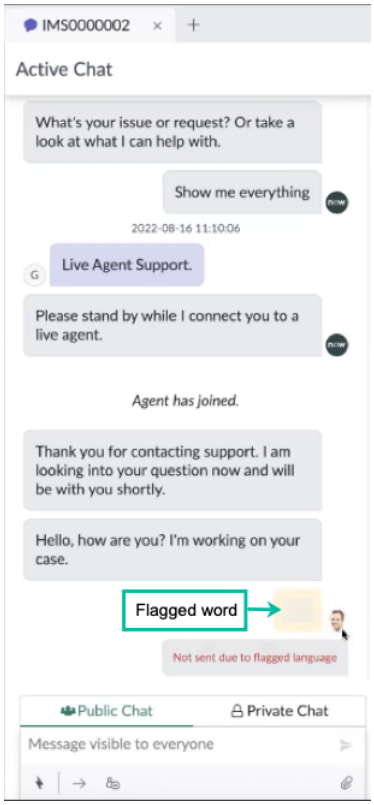
- Are available to the requester.
- Include only conversations between the requester and the live agent.
- Do not include pre- or post-chat survey information.

Profanity Filter for Agent Chat overview

The Profanity Filter for Agent Chat prevents agents from sending messages to requesters that include profane language (also known as forbidden keywords). If an agent is upset and tries to send a message with offensive language, the Profanity Filter prevents the requester from seeing the message.

If an agent tries to send a message with profane language, the Profanity Filter blocks the message and flags the forbidden keywords. The Profanity Filter warns the agent that the message contains forbidden keywords and alerts the chat manager to the agent's use of profane language.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



When the Profanity Filter detects forbidden keywords in a message entered by the agent:

- the message containing the forbidden keywords is highlighted in the agent's chat window.
- the agent receives a notification that they have used a forbidden keyword.
- the message with the forbidden keyword is not sent to the requester.
- if the agent has exceeded the number of forbidden keywords in a specified amount of time, a message is sent to the chat manager.
- the forbidden keyword is marked in the transcript of the chat conversation.

Notifying the chat manager

You can configure the Profanity Filter to notify the chat manager if an agent tries to use more than the specified number of forbidden keywords over the specified time. The Profanity Filter considers all conversations owned by the agent when determining the number of forbidden keywords used. If the agent tries to send a message with a forbidden keyword, the chat manager receives a notification. If the Manager Workspace or Agent Workspace is the active window, a real-time notification displays. If the Manager Workspace or Agent Workspace isn't the active window, a notification displays on the summary view in the Workspace notification menu. In the incident entry, the chat manager can review the incident and the chat log and privately message the agent.

Machine learning-based or keyword-based

The Profanity Filter uses a machine learning-based model or a keyword-based model to determine whether a message includes forbidden keywords. The machine learning-based model analyzes keywords and phrases in the context of the agent's entire message before determining whether any forbidden keywords in the message should be considered profane. For example, the statement "I made a silly mistake" would be considered not profane while "You sound so silly" would be considered profane. The machine learning-model is not on each instance individually – you cannot change the model directly to account for customized keywords and phrases.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

The keyword-based model compares a message against a list of forbidden keywords to determine whether something should be considered profane. You can allow certain keywords or phrases even if those keywords are considered profane in a generic sense. Common examples are book or movie titles that might contain forbidden keywords and but should still be allowed in a conversation. Conversely you can configure the Profanity Filter to block certain keywords or phrases even if the words may not always seem profane. The Profanity Filter analyzes each message against the list of allowed and forbidden keywords before running it through the model-based mode.

Example of machine learning-based model

Allowed keyword	Forbidden keyword	Message to be analyzed	System behavior
		You are a dummy.	Message is blocked.
UNIX for Dummies		The reference book "UNIX for Dummies" might be useful.	Message is allowed.
UNIX for dummies	stupid	"UNIX for Dummies" is a stupid book.	Message is blocked.
	foolish	I feel so foolish for not knowing the answer to your question.	Message is blocked.
		I feel so foolish for not knowing the answer to your question.	Message is allowed.

Example of keyword-based model

Allowed keyword	Forbidden keyword	Message to be analyzed	System behavior
	dummy	You are a dummy.	Message is blocked.
		You are a dummy.	Message is allowed.

Domain separation

The Profanity Filter works with domain separation. If the domain is set to Global, then the keywords apply to both the agent and requester domains. For the agent and requester to see each other's domain, the administrator must do one of the following:

- Include the domain where the regular expression should be visible as a child domain to the corresponding parent domain.
- Grant necessary access to the appropriate domain if it's a sister domain.
- Set the keywords under a global domain.

Sensitive Data Handler

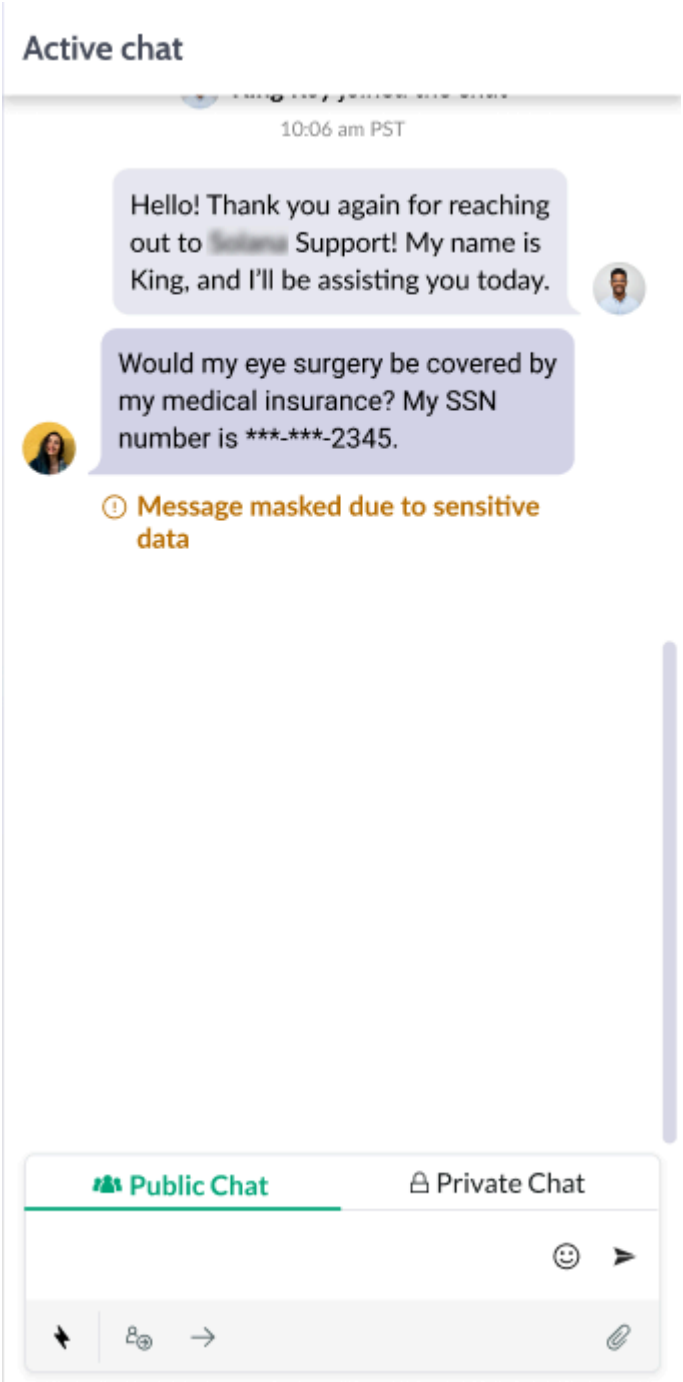
During an Agent Chat or Virtual Agent conversation, the agent or requester may accidentally enter sensitive data. The Sensitive Data Handler detects and masks the sensitive data so it is not viewed by the agent or requester. The Sensitive Data Handler can also collect sensitive data as part of a business process, such as user authentication.

Possible situations when the Sensitive Data Handler might detect and mask sensitive data include:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- A requester enters sensitive data, such as a social security number, during a conversation with a live agent or virtual agent.
- An agent enters company information, such as a manager's confidential email address, that the requester should not have access to.
- A requester enters sensitive data in a pre-chat or post-chat survey.

The Sensitive Data Handler detects and masks sensitive data when the requester is conversing through the chat widget, mobile (iOS/Android), or any of the supported adapter channels (SMS/Slack/Teams/Workplace).



You can configure the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Regular expressions for each type of sensitive data (for example, social security number or credit card number).
- Whether sensitive data handling works only for inbound (from a requester) messages, outbound (from a live agent) messages, or both.
- Messages that displays to the requester or agent informing them that sensitive data has been masked.

If the requester sends a message containing sensitive data to an agent, a system message is sent to the requester and agent notifying both that the message contained sensitive data. The sensitive data is masked on the transcript and marked as sensitive on the internal transcript.

If an agent tries to send a message containing sensitive data to a requester, the message is not sent to the requester. Instead, an error is displayed to the agent and the message is tagged as sensitive in the internal transcript.

The Sensitive Data Handler can be configured to pass user authentication information to another entity. The requester might provide sensitive data during a conversation to prove their identity (for example, social security number, date or birth, email address).

The Sensitive Data Handler plugin [com.glide.sensitive_data_handling] can be installed by itself, without a Glide Virtual Agent or Agent Chat plugin. Regular expressions can be added, edited, and deleted from the Sensitive Data Handling module.

Regular Expressions

The base system of the Sensitive Data Handler comes with pre-defined regular expressions for credit/debit card numbers, social security numbers, and email addresses. When the Sensitive Data Handler detects a regular expression, it uses the defined masking pattern to mask sensitive data. To define your own regular expressions and patterns to mask other sensitive data, see Configuring Sensitive Data Handler. If a regular expression is not properly configured, the system may get stuck while attempting to match the regular expression with the message. To prevent the system from getting stuck, the system times out after one second.

Pre-defined Regular Expressions

Name	Regular expression	Details
Credit Card - Visa	\b4[0-9]{12}(?:[0-9]{3})?\b	• Card number starts with 4. • New card number has 16 digits, old card number has 13 digits.
Credit Card - American Express	\b3[47][0-9]{13}\b	• Card number starts with 34 or 37. • Card number has 15 digits.
Credit Card - Mastercard	\b(?:5[1-5][0-9]{2}|222[1-9]|22[3-9][0-9]|2[3-6][0-9]{2}|27[01][0-9]|2720)[0-9]{12}\b	• Card number starts with a number between 51-55 or 2221-2720. • Card number has 16 digits.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Pre-defined Regular Expressions (continued)

Name	Regular expression	Details
Credit Card - Diners Club	\b3(?:0[0-5]|[68][0-9])[0-9]{11}\b	• Card number starts with 36, 38, or 300-305. • Card number has 14 digits. • Cards that start with 5 and have 16 digits should be processed like a MasterCard.
Credit Card - Discover	\b6(?:011|5[0-9]{2})[0-9]{12}\b	• Card number starts with 65 or 6011. • Card number has 16 digits.
Social security number	\b(?!666|000|9\d{2})\d{3}-(?!00)\d{2}-(?!0{4})\d{4}\b	• First 3 digits cannot be 000, 666, or 900-999. • Hyphen (-) • Middle 2 digits should be 01-99 and cannot be 00. • Hyphen (-) • Last 4 digits should be 0001-9999 and cannot be 0000.
Email	\b[\w!#$%&'*+/=?`{\|}~^-]+(?:\.[\w!#$%&'*+/=?`{|}~^-]+)*@(?:[a-zA-Z0-9-]+\.)+[a-zA-Z]{2,6}\b	• Word • Period (.) • Word • @ symbol • String of alphanumeric characters at least one character long. • Period (.) • Alphabetical string 2-6 characters long.

Dynamic Translation for Agent Chat overview

Dynamic Translation for Agent Chat (DTAC) translates chat conversations from one language to another. This translating enables agents and requesters to have chat conversations with each other without the need of a shared language.

For example, a requester who speaks only French starts a chat conversation with a live agent who speaks only English. From the requester's view, the entire conversation is conducted in French, while from the agent's view, the entire conversation is conducted in English.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

DTAC enables cross-locale support teams and merger and acquisition projects to save time and money by handling larger volumes of chat conversations from other regions.

Note:

- DTAC is supported on Agent Workspace, not on Connect Support.
- DTAC is currently not supported when autopilot is in progress. When the requester responds to prompts from autopilot topics, these responses are not translated for the agent, even if DTAC is turned on for that conversation. See Conversation Autopilot for more information.

How DTAC works

DTAC uses Dynamic translation and a translation service provider to translate chat conversations in real time. Available translation service providers include:

- Set up Google cloud translator service spoke
- Microsoft Azure Translator Service spoke
- Microsoft Azure OEM

Mobile clients

DTAC is available for requesters on Agent Chat in mobile for iOS and Android.

Translation support limited to one language

DTAC can only support translation from one language to another therefore additional agents or managers joining chat sessions should speak the same language as the primary agent.

- Agent chat transfers – Agents transferring a chat conversation should both speak the same language.
- Managers joining chat conversation – Managers joining chat conversation to monitor or assist agents should speak the same language as the primary agent.

Chat summarizations

DTAC also translates chat summarizations.

Agent presence states

DTAC does not translate agent presence states.

Attachments within DTAC

When inserting an attachment into a chat, DTAC does not translate the file name or the contents of the attachment.

Agent-Initiated Messaging Interface

Enable agents to initiate conversations with customers on a messaging app of customers' choice by using the ServiceNow® Agent-Initiated Messaging Interface application.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Overview of Agent-Initiated Messaging Interface

The Agent-Initiated Messaging Interface application supports agent-initiated conversations for any type of messaging channels such as SMS.

Note:
The messaging channels are available based on the application associated with the service channel you install. For more information, see Service channels.

By default, the application is configured for the Conversational SMS service channel in the CSM Configurable Workspace. For more information, see Conversational SMS service channel and Initiate messaging conversations from the CSM Configurable Workspace.

Configuring Agent Chat

Configure Agent Chat to enable customers to ask questions and receive information by chatting with a live agent.

Review these sections on configuring Agent Chat features.

Setting up Agent Chat

Configure Agent Chat to enable live agents to chat with customers and manage various conversation features for agents and end users. Through Agent Chat, agents interact with end users, create incident or case records, or transfer chats to another agent or queue.

Before you begin
Configure the following before starting this task:

- Install the Agent Chat plugin (com.glide.interaction.awa).
- If you want to use the Profanity Filter, activate the Profanity Filter plugin (sn_va_profanity).
- In Advanced Work Assignment:
  - Configure service channels.
  - Define work item queues.
  - Set up work assignments.
- Update your Live Feed profile to display agent names and avatars in the chat client.
- Configure Agent Chat in Service Portal

Role required: workspace_admin

Note:
You must be in the global view to edit the settings.

About this task
Use Agent Chat settings to do the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Activate or deactivate:
  - Agent Chat (enabled by default).
  - Display of agent names and avatars the chat window.
  - Display of the agent name in the header.
  - Chat transcript downloads.
  - Display of estimated wait time for live chat support (transfer from the virtual agent to a live agent).
  - Agent Whisper, which enables supervisors to message agents privately when agents are interacting with an end user. For new instances, Agent Whisper is enabled by default.
  - Emojis.
  - Conversation history.
  - Conversational autopilot client system messages.
- Set the system messages that are displayed when a live agent transfer occurs.
- Manage Quick Action controls.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Home**.
2. Select the **Agent Chat** tile.
   The Agent Chat settings screen titled "Customize how your users chat with live agents" appears.

   Note:
   Agent Chat is automatically activated when the Agent Chat plugin is installed. If you're not using Agent Chat, slide the toggle switch to deactivate it and select **Save**.

3. Activate Agent Chat by enabling the **Activate** option.
4. Configure the options.

User chat settings

Field	Description
Agent names and avatars	Slide the toggle switch to activate or deactivate the display of the agent names and avatars in the Agent Chat client when a live agent enters, transfers, or exits a chat. Agents set their names and pictures in their Live Feed profiles. ○ If activated, the **Agent name in header** is automatically activated and displays the agent name at the top of the chat client. ○ If deactivated, agent identities remain anonymous. No names or avatars are displayed in the chat window.
Agent name in header	Slide the toggle switch to activate or deactivate the display of the agent name in the header of the chat window. This option is active by default.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	This field appears if **Agent names and avatars** is active.
Transcripts	Slide the toggle switch to activate or deactivate the ability for requesters to download a transcript of the conversation they had with an agent.

Chat statuses and messages

Field	Description
Live chat wait status	Select whether to display the estimated wait time for live agent support in the chat menu for chat widgets. If you're using the Conversational Integration with Microsoft Teams, the wait time displays in a card that shows the approximate wait time to chat with an agent. ○ The wait time is the estimated time, in minutes, for the transfer from the virtual agent to a live agent. ○ The wait time updates once per minute. Wait time is based on the Queue Average Wait Time minus the waiting time.
Agent Transfer Message	Enter the message that users see when they are transferred to a live agent or another queue. For example: "Please stand by while I connect you to a live agent." **Note:** You can define only one transfer message and it is displayed for all queues in your instance. The Agent Transfer message does not support HTML, only plain text.
"No agent available" message	Enter the message that users see when a live agent is not available. For example: "No agents are available at the moment. Please try again later." **Note:** You can define only one agent availability message and it is displayed for all queues in your instance.

Agent chat features

Field	Description
Agent Whisper	Slide the toggle switch to activate or deactivate Agent Whisper, which enables supervisors to message agents privately when agents are interacting with a requester. **Note:** If you deactivate Agent Whisper, you must manually deactivate the /help quick action.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Emojis	Slide the toggle switch to activate or deactivate emojis.
Conversation Autopilot	Slide the toggle switch to activate or deactivate notifications related to Conversation Autopilot, which enables agents to use autopilot quick actions to invoke Virtual Agent topics.
Dynamic language translation	Slide the toggle switch to activate or deactivate the dynamic translation of end user's messages.
Profanity detection	Select **View all** to display the Profanity Filter settings screen. This option only displays if the Profanity Filter plugin has been installed. For more information, see Configuring the Profanity Filter settings.
Conversation History	Select **View all** to display the Conversation History screen. Set maximum number of past conversation to display in the conversation window and apply filters to only show what is most relevant to agents based on channel type, assignment group, and more. For details on configuring the Conversation History options, see Setting up conversation history.

Quick action configurations

Field	Description
Quick action configurations	Select **View all** to display the Quick Action Toolbar Controls screen. For details on configuring the toolbar controls, see Setting up quick action toolbar controls.

5. Select **Save**.

Configuring Agent-Initiated Messaging Interface

Set up the Agent-Initiated Messaging Interface application to enable agents to send messages to customers through different messaging channels.

Agent-Initiated Messaging Interface configuration tasks

Task	Description
1. Install agent-initiated messaging interface.	Install the Agent-Initiated Messaging Interface application to integrate a messaging channel with your ServiceNow instance.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent-Initiated Messaging Interface configuration tasks (continued)

Task	Description
2. Set up agent-initiated message interface for a messaging channel.	Set up the Agent-Initiated Messaging Interface application to send messages from a messaging channel.
3. (Optional) Associate user profiles with agent-initiated messages.	Use scripted extension points to call custom scripts for associating user profiles with agent-initiated messages.
4. (Optional) Validate recipient IDs for agent-initiated messagesValidate recipient IDs for agent-initiated messages .	Use scripted extension points to call custom scripts for validating the format of a recipient ID associated with a messaging channel.
5. (Optional) Determine whether messaging channels are available for agent-initiated messages.	Use scripted extension points to call custom scripts for determining whether a messaging channel is applicable to a user profile in an agent-initiated message.

Install Agent-Initiated Messaging Interface

You can install the Agent-Initiated Messaging Interface application (sn_agent_initiated) if you have the admin role. The application installs related ServiceNow® Store applications and plugins if they are not already installed.

Before you begin

- Ensure that the application and all of its associated ServiceNow Store applications have valid ServiceNow entitlements. For more information, see Get entitlement for a ServiceNow product or application .

Role required: admin

About this task

The following items are installed with Agent-Initiated Messaging Interface:

- Plugins
- Store applications
- Tables

For more information, see Components installed with Agent-initiated messaging interface.

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. Find the Agent-Initiated Messaging Interface application (sn_agent_initiated) using the filter criteria and search bar.

   You can search for the application by its name or ID. If you cannot find the application, you might have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. In the Application installation dialog box, review the application dependencies.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Dependent plugins and applications are listed if they will be installed, are currently installed, or need to be installed. If any plugins or applications need to be installed, you must install them before you can install Agent-Initiated Messaging Interface.

4. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
5. Select **Install**.

Set up Agent-Initiated Messaging Interface for a messaging channel

Set up the Agent-Initiated Messaging Interface application to send messages from a messaging channel.

Before you begin

- Install agent-initiated messaging interface.
- Review the list of messaging channels available for the Agent-Initiated Messaging Interface application.
- Set the application scope to the application associated with the messaging channel using the application picker. For more information, see Application picker.

  For example, for using the SMS messaging channel, set the application scope to the Conversational SMS service channel application.

Role required: admin

About this task

A messaging channel is available when you install the application associated with a service channel.
For example, use the SMS messaging channel to send an SMS message to a customer. The SMS messaging channel is available when you have installed the Conversational SMS service channel application.

Procedure

1. In the navigation filter, enter `sn_agent_initiated_msg_config.list`.
2. In the Agent initiated messaging configurations list, modify an existing configuration or create another configuration for a messaging channel.
   - To modify an existing configuration, in the **Active** column, click the value link corresponding to the messaging channel displayed in the **Channel** column.

     For example, to send messages by using the SMS messaging channel, click the link in the **Active** column corresponding to the **SMS** channel.
   - To create another configuration for a messaging channel, click **New** in the Agent initiated messaging configurations list.
3. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Agent initiated messaging configuration form

Field	Description
Channel	Messaging channel using which agents can initiate messages to connect with requesters.
Check if active recipient profile exists	Option to ensure that an active channel user profile exists when sending messages to the user from the channel. If there are no active channel user profiles, the associated channel is not available for agent-initiated messages. In this case, the channel does not appear in the **Channel** field of the Compose Message form. For information on the Compose Message form available in CSM Configurable Workspace, see Initiate messaging conversations from CSM Configurable Workspace.
Show option to enter recipient ID manually	Option to display the field to manually enter recipient ID. For example, select this check box to enable agents to enter a phone number manually for sending an SMS message to a consumer.
Application	Scope of the application that contains the channel. This field is automatically set based on the application scope selected in the application picker.
Active	Option to activate the use of the channel for agent-initiated messages.
Order	Order number for each channel in which they appear for agent on the Compose Message form when composing messages. The channel that has the lowest order number is displayed first. For information on the Compose Message form available in CSM Configurable Workspace, see Initiate messaging conversations from CSM Configurable Workspace.

4. Save the configuration setting.
   - If you created a new configuration setting, click **Submit**.
   - If you modified an existing configuration setting, click **Update**.

Associate user profiles with agent-initiated messages

Use scripted extension points to call custom scripts for associating user profiles with agent-initiated messages.

Before you begin

Install the Agent-Initiated Messaging Interface application. For more information, see Install agent-initiated messaging interface.

Role required: admin

About this task

An agent can compose messages from an interaction of type other than Message in the CSM Configurable Workspace. By default, the `AgentMessagingInteractionUserDocument` script include is available for retrieving user profiles associated with consumers and customer contacts in an interaction record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

By using extension points, you can easily integrate customizations without having to alter the base code. You can extend standard base functionality using customized scripts. For more information, see Using extension points to extend application functionality.

Procedure

1. Navigate to **All** > **System Extension Points** > **Scripted Extension Points**.
2. In the **API Name** column, search for and select **sn_agent_initiated.AgentInitiatedMessagingUserDocument**.
3. On the Extension Point form, either modify a script include to use the `sn_agent_initiated.AgentInitiatedMessagingUserDocument` extension point or create and register a custom script include.
   - Create and register a custom script include.
   - Modify the existing script include by going to the Implementations related list and selecting a script include in the **Class** column.

   Note:
   By default, the `AgentMessagingInteractionUserDocument` script include that use the `sn_agent_initiated.AgentInitiatedMessagingUserDocument` extension point is available for the Agent-Initiated Messaging Interface application. This script include is configured to retrieve user profiles associated with consumers and customer contacts from the Interaction [interaction] table record.

4. Associate user profiles for an agent-initiated messages by adding the `sn_agent_initiated.AgentInitiatedMessagingUserDocument` extension point to the script include.
   You can create multiple implementations for an extension point and provide an order number for each implementation. The implementation that has the lowest order number is executed first.

Customization	Implementation
Associate a table record from which the message was initiated	Include the `isValidForTableRecord` method in the `sn_agent_initiated.AgentInitiatedMessagingUserDocument` extension point.
Retrieve the user details associated with the table record from which the message was initiated	Include the `getUserDocument` method in the `sn_agent_initiated.AgentInitiatedMessagingUserDocument` extension point.

Note:
Based on the table record set in the `isValidForTableRecord` method, the user details are retrieved for sending agent-initiated messages in the `getUserDocument` method.

5. On the Extension Point form, click **Update**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Validate recipient IDs for agent-initiated messages

Use scripted extension points to call custom scripts for validating the format of a recipient ID associated with a messaging channel.

Before you begin

Install the Agent-Initiated Messaging Interface application. For more information, see Install agent-initiated messaging interface.

Role required: admin

About this task

By using extension points, you can easily integrate customizations without having to alter the base code. You can extend standard base functionality using customized scripts. For more information, see Using extension points to extend application functionality.

Procedure

1. Navigate to **All** > **System Extension Points** > **Scripted Extension Points**.
2. In the **API Name** column, search for and select **global.ChannelSendToValidation**.
3. On the Extension Point form, either modify a script include to use the `global.ChannelSendToValidation` extension point or create and register a custom script include.
   - Create and register a custom script include.
   - Modify the existing script include by going to the Implementations related list and selecting a script include in the **Class** column.

   Note:
   The `PhoneNumberValidationExtPointImpl` script include that use the `global.ChannelSendToValidation` extension point is available for validating recipient IDs profiles associated with the Conversational SMS service channel application.

4. Associate user profiles for an agent-initiated messages by adding the `global.ChannelSendToValidation` extension point to the script include.
   You can create multiple implementations for an extension point and provide an order number for each implementation. The implementation that has the lowest order number is executed first.

Customization	Implementation
Associate a channel ID for which the message was initiated	Include the `isValid` method in the `global.ChannelSendToValidation` extension point.
Retrieve the recipient ID associated with the channel for which the message was initiated	Include the `channelSendToValidation` method in the `sn_agent_initiated.AgentInitiatedMessagingUserDocument` extension point.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Based on the channel ID set in the `isValid` method, the recipient details are retrieved for validating a recipient ID in the `channelSendToValidation` method.

5. On the Extension Point form, click **Update**.

Determine whether messaging channels are available for agent-initiated messages

Use scripted extension points to call custom scripts for determining whether a messaging channel is applicable to a user profile in an agent-initiated message.

Before you begin

Install the Agent-Initiated Messaging Interface application. For more information, see Install agent-initiated messaging interface.

Role required: admin

About this task

By using extension points, you can easily integrate customizations without having to alter the base code. You can extend standard base functionality using customized scripts. For more information, see Using extension points to extend application functionality.

Procedure

1. Navigate to **All** > **System Extension Points** > **Scripted Extension Points**.
2. In the **API Name** column, search for and select **sn_agent_initiated.ChannelsQualifyingFoAgentMessaging**.
3. On the Extension Point form, create and register a custom script include.
4. Determine whether a messaging channel is applicable to a user profile in an agent-initiated message by adding the `sn_agent_initiated.ChannelsQualifyingForAgentMessaging` extension point to the script include.
   You can create multiple implementations for an extension point and provide an order number for each implementation. The implementation that has the lowest order number is executed first.

Customization	Implementation
Associate a messaging channel ID for agent-initiated messages with the custom script	Include the `isValidForChannel` method in the `sn_agent_initiated.ChannelsQualifyingForAgentMessaging` extension point.
Check whether a user qualifies for the messaging channel for agent-	Include the `isChannelValidForAgentInitiatedMessaging` method in the `sn_agent_initiated.ChannelsQualifyingForAgentMessaging` extension point.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Customization	Implementation
initiated messages	

Note:
Based on the messaging channel ID set in the `isValidForChannel` method, the users are evaluated for sending agent-initiated messages in the `isChannelValidForAgentInitiatedMessaging` method.

5. On the Extension Point form, click **Update**.

Components installed with Agent-Initiated Messaging Interface

Several types of components are installed with installation of the Agent-Initiated Messaging Interface application, including tables, plugins, and ServiceNow Store applications.

Note:
The Application Files table lists the components that are installed with this application. For instructions on how to access this table, see Find components installed with an application.

Tables installed

Table	Description
Agent initiated messaging configuration [sn_agent_initiated_msg_config]	Extends the application file. Base table for all service channel configurations for composing agent-initiated messages.

Plugins installed

Plugin	Description
Conversational Messaging (com.glide.messaging.awa)	Enables messaging actions that are performed when an event occurs.

ServiceNow Store applications installed

Application	Description
Agent Messaging Component	Contains UI components for composing agent-initiated messages.

Messaging channels for Agent-Initiated Messaging Interface

Install and configure applications to enable a messaging channel for use with the Agent-Initiated Messaging Interface application.

The following table describes the messaging channels available for use with the Agent-Initiated Messaging Interface application and applications required for using those messaging channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Messaging channels for Agent-Initiated Messaging Interface

Channel	Required applications
SMS	• Conversational SMS service channel • Twilio spoke • Conversational SMS Integration with Twilio **Note:** The Conversational SMS Integration with Twilio application installs the Conversational SMS service channel and Twilio spoke applications, if not already installed.

Associating user profiles on messaging interactions

Use extension points to call custom scripts.

Before you begin

Role required: admin

About this task

When a requester sends a message, the system checks if there is an existing user profile that has a matching identifier (such as a phone number) and channel details. If there is a matching user, then the system will populate the interaction record with the identifier, channel details, and the user profile in the Opened for field. If there is no user profile that matches the identifier and channel, then the system creates a channel user profile.

Procedure

1. Navigate to **All** > **System Extension Points** > **Scripted Extension Points**.
2. Click the desired extension point to view the record details.
   You can create multiple implementations for each extension point and assign an order number for each implementation. The implementation that has the lowest ordered applicable implementation is executed first.

Extension point	Description
global.ChannelUserProfileExtPoint	Use channel_user_id to find record to channel_user_profile user_table/ user_document
global.InteractionChannelUserProfileExtPoint	Defines how users are synchronized between the interaction and channel_user_profile tables
global.AgentInitiatedConversationUtil	Get From and To options to show in UI for agent initiated conversations

Controlling idle live chat sessions

Configure how active chat sessions are handled by the system when live chats become idle.

By default, the system automatically checks live chat sessions every two minutes through the Idle Chat Timer Task scheduled job to ensure that chat sessions are still active. If the requester

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

does not respond within 180 seconds (three minutes) during an active chat session, the session becomes idle. The user receives a reminder message that the conversation is timing out and asks if they are still there. If they don't respond, the system automatically cancels (times out) the chat session 360 seconds (six minutes) after the requester's last response.

You can change the idle chat reminder message and the default time after which the system displays the reminder message and closes an idle chat.

Important:

Idle live chats are not available for Connect Support. Starting with the Paris release, Connect Support no longer receives enhancements or non-priority bug fixes. Consider moving to ServiceNow® Advanced Work Assignment and Agent Chat in workspace to automatically assign chat requests and other work items to agents. For details, see Move from Connect Support to Advanced Work Assignment and Agent Chat.

Change the idle chat reminder message

The default idle chat reminder message displayed to requesters is: `The conversation is timing out, are you still there?` Agents receive the message: `User response will indicate if they want to continue the chat.`

You can modify the default message sent to requesters by updating the *com.glide.cs.idle_chat_reminder_message* property.

1. As admin, navigate to **All**, and then enter `sys_properties.list` in the filter.
2. Open the *com.glide.cs.idle_chat_reminder_message* property.
3. In the **Value** field, enter the new reminder message to be displayed.
4. Select **Update**.

Change the idle chat timeout values

Add the *com.glide.cs.idle_chat_reminder_timeout* and the *com.glide.cs.idle_chat_cancel_timeout* properties to the System Property [sys_properties] table to set the chat reminder message timeout and the idle chat cancel timeout values. Create both properties at the same time.

1. As admin, navigate to **All**, and then enter `sys_properties.list` in the filter.
2. Select **New** to add the *com.glide.cs.idle_chat_reminder_timeout* property.
   a. On the form, fill in the fields.

Field	Value
Name	System property name. Enter: `com.glide.cs.idle_chat_reminder_timeout`
Description	Explanation for this property. For example: `Idle chat reminder timeout (in seconds)`
Type	Data type. Select `integer`.
Value	Enter the number of seconds before the idle chat reminder message is displayed, after the requester's last response. This value must be equal to or greater than 120 seconds,

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Value
	since the Idle Chat Timer Task job runs every 120 seconds to check active chat sessions. For example, if the idle chat reminder message is to be displayed 5 minutes after the requester's last response, enter 300 seconds. **Note:** If you want to set an idle chat message reminder timeout that is under 120 seconds, you must also change the time at which the Idle Chat Timer Task job runs. The job must check for idle chats within a shorter time frame. For example, if the reminder message timeout is 60 seconds after the requester's last response, set the Idle Chat Timer Task job to run every 60 seconds. For more information on base system scheduled jobs, see System scheduler.

b. Select **Submit**.

3. In the System Properties table, select **New** to add the *com.glide.cs.idle_chat_cancel_timeout* property.

a. On the form, fill in the fields.

Field	Value
Name	System property name. Enter: `com.glide.cs.idle_chat_cancel_timeout`
Description	Explanation for this property. For example: `Idle chat cancel timeout (in seconds)`
Type	Data type. Select `integer`.
Value	Number of seconds before an idle chat is canceled (times out). This value must be larger than *com.glide.cs.idle_chat_reminder_timeout*, where the difference between this value and *com.glide.cs.idle_chat_reminder_timeout* is larger than or equal to 120 seconds (2 minutes, which is when the Idle Chat Timer Task job runs). For example, if the reminder message timeout value is 300 seconds (5 minutes), the idle chat cancel timeout value must be 420 seconds or greater.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Value
	Note: If you changed the Idle Chat Timer Task job, the difference between the chat cancel timeout value and the idle chat reminder timeout must be larger or equal to the Idle Chat Timer Task job time. For example, if the reminder timeout is 60 seconds and the Idle Chat Timer Task job is also 60 seconds, the idle chat cancel timeout value must be 120 seconds or greater.

b. Select **Submit**.

Set the inactivity timeout behavior

The *com.glide.cs.start_idle_timeout_after_agent_response* property determines the timeout behavior when inactivity is triggered. When this property is `true`, the inactivity timer does not start until the agent sends a non-automated response to the requester.

1. As admin, navigate to **All**, and then enter `sys_properties.list` in the filter.
2. Select **New** to add the *com.glide.cs.start_idle_timeout_after_agent_response* property.
   a. On the form, fill in the fields.

Field	Value
Name	System property name. Enter: `com.glide.cs.start_idle_timeout_after_agent_response`
Description	Explanation for this property. For example: `Timeout behavior when inactivity should be triggered.`
Type	Data type. Select `true/false`.
Value	Either `true` or `false`.

b. Select **Submit**.

Set the server disconnect timeout for guest conversations

The *com.glide.cs.chat_disconnect_timeout* property determines how long the system will wait to reconnect a disconnected conversation before it ends the chat. If communication is reestablished during that timeframe, the conversation resumes.

1. As admin, navigate to **All**, and then enter `sys_properties.list` in the filter.
2. Select **New** to add the *com.glide.cs.chat_disconnect_timeout* property.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

a. On the form, fill in the fields.

Field	Value
Name	System property name. Enter: `com.glide.cs.chat_disconnect_timeout`
Description	Explanation for this property. For example: `Timeout behavior for disconnected guest conversations.`
Type	Data type. Select `integer`.
Value	Number of seconds before a disconnected guest chat is canceled (times out). The client will try to reconnect during that time.

b. Select **Submit**.

Examples

These examples show how the *com.glide.cs.start_idle_timeout_after_agent_response* system setting may affect how the system handles idle chats. In the following examples, the inactivity timeout is set to 60 seconds and the inactivity reminder is set to 30 seconds.

Example 1: In this example, *com.glide.cs.start_idle_timeout_after_agent_response* does not affect how the system handles an idle chat.

1. Agent enters the chat.
2. System sends automated message `Thank you for contacting support. I am looking into your question now and will be with you shortly.`
3. Agent sends the message `What can I help you with today?`
4. If the requester does not respond after 30 seconds, then the system sends the message `The conversation is timing out, are you still there?`
5. If the requester does not respond within 60 seconds after the agent's message, then the system sends the message `It seems you have left the conversation` and ends the chat.

Example 2: In this example, *com.glide.cs.start_idle_timeout_after_agent_response* affects how the system handles an idle chat.

1. Agent enters the chat.
2. System sends automated message `Thank you for contacting support. I am looking into your question now and will be with you shortly.`
3. If the agent does NOT send a message, one of the following occurs:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- If *com.glide.cs.start_idle_timeout_after_agent_response* is not set or is set to false, then
  a. The system starts the inactivity timer.
  b. If the requester does not respond after 30 seconds, then the system sends the message `The conversation is timing out, are you still there?`
  c. If the requester does not respond within 60 seconds after the automated message, then the system sends the message `It seems you have left the conversation` and ends the chat.
- If *com.glide.cs.start_idle_timeout_after_agent_response* is set to true, the system does not start the inactivity timer and the chat will not time out.

Controlling the browser experience for chat guest sessions

Anonymous users (unauthenticated guests) can chat with support agents in the web chat client, without logging in to a service portal. Admins can control certain aspects of the conversational experience for unauthenticated guest users, such as enabling resumable chat sessions after a browser refresh.

When guest users refresh the browser window while chatting with an agent, the refresh automatically starts a new conversation and chat session. By default, the ongoing conversation and chat session history are not retained.

You can change the default guest session behavior to let your guest users resume an ongoing conversation and see the chat session history after a browser refresh. You can also set the duration of the guest chat session user cookie, to let guest users resume chat sessions after they close and reopen their browser.

Enable resumable guest sessions

As admin, use the *com.glide.cs.guest_session_resumable* system property to the change the default chat guest session behavior for guest users.

1. Navigate to **All**, and in the Filter enter `sys_properties.list`.
2. Open the *com.glide.cs.guest_session_resumable* property.
3. In the **Value** field, enter `true` to enable resumable guest chat sessions and retain the chat session history.
4. Select **Update**.

After a browser refresh, your guest users can continue their conversations with agents and see the chat session history in the chat panel.

Change the guest chat session cookie time

The guest chat session cookie time is the length of time (duration), in seconds, of the guest session user cookie. Use the *com.glide.cs.guest_session_cookie_max_age* property to change the guest session cookie time, in case your guest users want to resume a chat after closing and reopening their browser.

For security reasons, the default property value is -1, which means the guest session cookie is immediately deleted when the browser is closed. But you can specify a maximum time length that sets the duration of the guest session cookie, for example 900 seconds (15 minutes).

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. As admin, navigate to **All**, and in the Filter enter `sys_properties.list`.
2. Open the *com.glide.cs.guest_session_cookie_max_age* property.
3. In the **Value** field, enter the maximum length of time (seconds) for the guest session cookie.

   For example, the value `900` is the duration of the guest session cookie in seconds (15 minutes), to give your guest users time to resume a chat session after closing and reopening the browser.
4. Select **Update**.

Configuring quick actions

Quick actions are shortcuts that perform Agent Chat tasks. Agents can work more efficiently with customers by using quick actions because they don't have to enter as many characters to perform a task.

Activate quick actions

To enable your agents to use quick actions, you must activate the and related plugins for Advanced Work Assignment, which is required for chat in Workspace.

Default quick actions

The following quick actions are available by default with Workspace chat:

Command name	Toolbar button	Action	Default parameter
autopilot		Starts a Virtual Agent topic (Conversation Autopilot).	Available topics
help		Indicates to the chat supervisor that an agent needs help with a conversation. To use this quick action, new customers must enable Agent Chat and Agent Whisper and update customers must enable Agent Whisper on chat setup.	
r		Uses Response templates to insert as text in a conversation. **Note:** Only response templates that have a condition of *[Type] [is] [Chat]* are available in Agent Chat.	Available response templates
search-kb		Starts a KB article search. The agent is prompted to search for the relevant KB article. Based on the search term the agent enters, the agent is able to view the KB	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Command name	Toolbar button	Action	Default parameter
		articles that match the search term. The agent can then select the KB article.	
ta		Transfers the conversation to another agent.	Available agents
tq		Transfers the conversation to another queue.	Available queues

Creating a quick action

Create a quick action so that agents can use shortcuts for performing actions in Agent Chat.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Quick Actions** > **Actions**, and then select **New**.
2. On the form, fill in the fields.

Field	Description
Name	Name of the quick action.
Active	Option for activating the quick action.
Description	Description of the quick action.
Command Name	Text that triggers the quick action when entered after the forward slash (/) in a conversation.
Applies to	Work item that the quick action is available for. Filter the table that you select in the **Table** field to qualify a certain kind of work item. For example, to make the quick action available only for conversations that are assigned to Beth Anglin, you would first select the Interaction [interaction] table in the **Table**. Then, in the **Applies to** field, you would create the following filter: **[Assigned to] [is] [Beth Anglin]**.
Table	Work item table that the quick action is available for. **Note:** Quick actions are supported only in the Interaction [interaction] table.
Apply to all groups	Option for making the quick action available to all user groups.
Apply to groups	List of which groups can use the quick action. This field appears only if you clear the **Apply to all groups** option.
Script	JavaScript code to control what the quick action does.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	In this script, you have access to: ○ The *record* variable, which for Agent Chat is the Interaction [interaction] record ○ The *params* array, if you defined quick action parameters If provided, all free-form text entered after all the other parameters are captured as the last item in the *params* array. Set the value of *answer* as follows: `answer = { success: <Boolean>, message: <success_or_error_message> };` **Note:** If you do not script a message, the agent receives a default message instead.
Application	Application scope of the quick action.
Accepts string parameter	Option to indicate that the script accepts text input after any defined parameters.
Parameter label	Parameter name that displays next to the quick action.
Parameter hint text	Text that displays as a hint when the agent enters a quick action.

3. Select **Submit**.

What to do next

If your quick action requires a secondary menu, define a quick action parameter so that agents can further control the quick action. For more information, see Define a quick action parameter.

Optionally, you can make the quick action available in Agent Chat as a button. For more information, see Configuring a quick action button.

Defining a quick action parameter

Define a quick action parameter to allow agents to further control a quick action in Workspace chat.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Quick Actions** > **Parameters**, and then click **New**.
2. On the form, fill in the fields.

Field	Description
Name	Name of the parameter.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Action	Quick action that uses the parameter.
No Matching Results Message	Message to agents if no records match the record query. If you do not create a **No Matching Results Message**, a default message is provided.
Display value field	Field from the parameter record that appears in Workspace chat. This field appears when you select **Basic** in the **Query mode** field.
Query mode	Type of query. You can select **Scripted** or **Basic**. To query records with a script, select **Scripted**. To query records by whichever table that you specify in the **Table name** field, select **Basic**.
Table name	Table to query for parameters. This field appears when you select **Basic** in the **Query mode** field.
No Results Message	Message to agents if there are no available records to query. If you do not create a **No Results Message**, a default message is provided.
Value field	Field from the parameter record that agents can enter in Workspace chat to invoke the parameter item. For example, to transfer a conversation to Beth Anglin, an agent would enter `/ta "beth.anglin"`. In this case, the **User ID** field in the User [sys_user] record is the **Value field**. This field appears when you select **Basic** in the **Query mode** field.
Query Script	JavaScript code to determine which records qualify for your parameter. You are given a *query* variable that represents the search query that the agent provided. Set the value of the *answer* variable as follows: `answer = { items: [ { value: <value>, displayValue: <displayValue>} ] };` The array of items should contain objects with a *value* and a *displayValue*. **Note:** This field shows only if you select **Scripted** in the **Query mode** field.
Application	Application scope of the parameter.
Order	Order that the parameter is available for the quick action.

3. Click **Submit**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configuring a quick action button

Configure a quick action button so that agents can perform actions in Agent Chat with a single click.

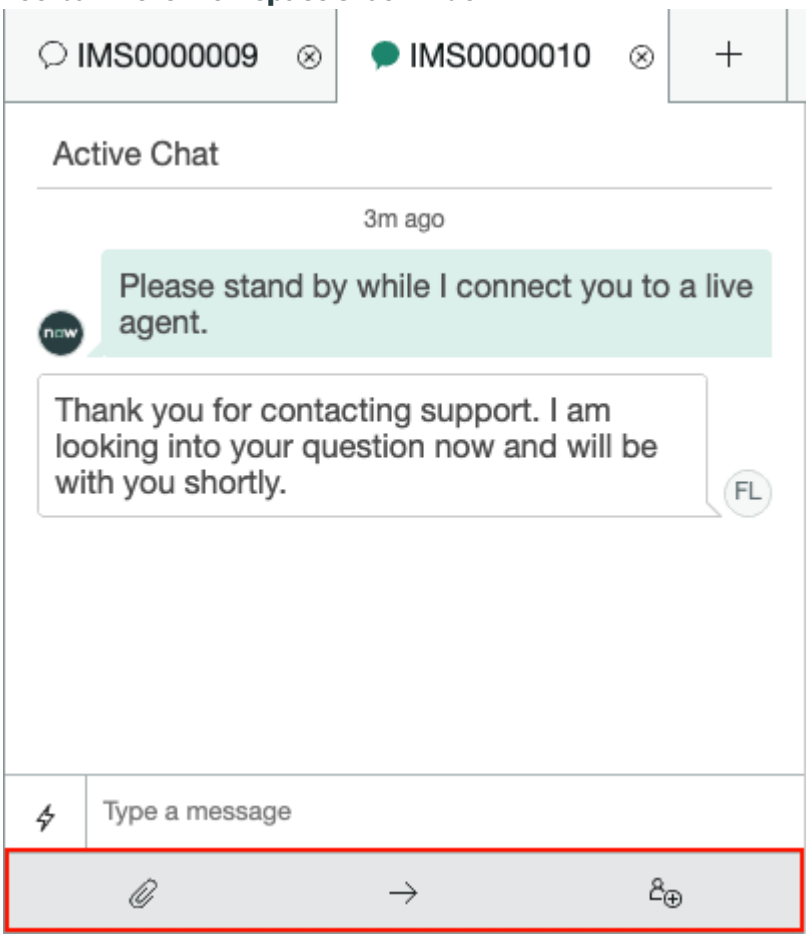
Before you begin

Role required: admin

About this task

The toolbar of the Workspace chat window contains three buttons. Selecting the left button ( ) attaches a file in a conversation, selecting the center button ( ) initiates a queue transfer, and selecting the right button ( ) initiates an agent transfer. You can't configure the left button, but you can assign different quick actions to the center and right buttons.

Toolbar in the Workspace chat window



Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Chat Settings** > **Agent Chat**.
2. In the Agent Experience section, select **View all** next to Quick actions.
   - To configure the arrow button ( ), select **Transfer to Queue**.
   - To configure the add user button ( ), select **Transfer to Agent**.
   - To create a new button, select **New**.
3. On the form, fill in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Quick Action	Action that is performed when the button is selected.
Name	Name of the quick action
Use custom icon	Select this if you want to specify what image should be used for the icon
Icon	Button icon that appears on the toolbar of the Workspace chat window.
Active	Select if you want this quick action to be active.
Application	Name of the application for which the icon display on the toolbar.
Order	Position of the button on the toolbar. If the value is 100, the button appears at the center of the toolbar. If the value is 101, the button appears at the right side of the toolbar. You can't change the button order.
Available on private chat tab	Select this to have the icon display on the Agent Chat toolbar.
Parameter value(s)	
Auto-submit	
Apply to all groups	

4. Save your changes.
   - To update an existing record, select **Update**.
   - To create a new record, select **Save**.

Setting up quick action toolbar controls

Customize the quick actions that appear on the chat toolbar.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Agent Chat** and then on the Agent Experience card, select **View All** next to Quick actions.
3. Do one of the following:
   - To create a quick action workspace action, select **New**.
   - To modify a quick action workspace action, select the quick action workspace action record you want to update.
4. On the screen, fill in the fields.

Configurable Toolbar Control

Field	Definition
Quick Action	Quick action performed.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Definition
Name	Name of the quick actions workspace action.
Use custom icon	Option to display a custom, downloaded icon in the toolbar.
Icon	Image to display on the toolbar when **Use custom icon** is selected. Select **Click to add...** and on the Choose an image screen, select an image file. **Note:** Use an image with a square aspect ratio.
Active	Indicates whether this configurable toolbar control is active.
Application	Application scope of the quick action.
Order	Value of this quick action. Quick actions are executed from lowest order to highest order, so a quick action with an order of 100 is considered before a quick action of 200.
Available on private chat tab	Option that defines whether the quick action is available on the private chat tab.
Applies to	Condition that determines when the quick action is available. ○ Add Filter Condition- Filter the table that you select in the **Table** field to qualify a certain type of work item. ○ Add "OR" Clause- Add an "or" clause to the condition. For example, to make the quick action available only for conversations assigned to Beth Anglin, you select the Interaction [interaction] table in the **Table**. Then, in the **Applies to** field, you create the following filter: **[Assigned to] [is] [Beth Anglin]**.
Parameter value(s)	Parameters needed for the quick action.
Auto-submit	Option for the agent to select a button and have the quick action and parameter post to the chat.
Apply to all groups	Option for making the quick action available to all user groups.

5. Select **Submit** or **Update**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Activating chat context quick actions

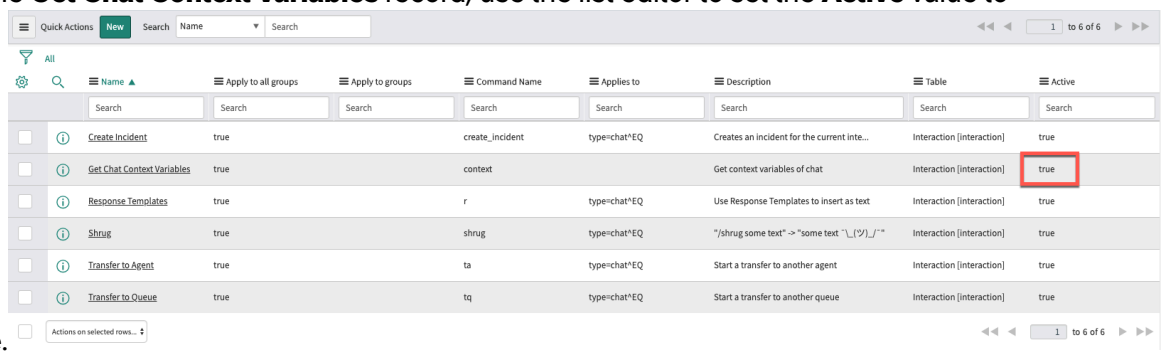
Activate context quick actions to enable agents to view context relevant to a chat interaction. When launched in a chat, display cards show: sysparm_portal, sysparm_page, table, sys_id, or sysparm_language.

Before you begin
Role required: admin

About this task
Context quick actions are a default quick action, but require activation.

Procedure

1. Navigate to **All** > **Quick Actions** > **Actions**.
2. In the **Get Chat Context Variables** record, use the list editor to set the **Active** value to true.



Sending missed chat activity emails

Send email to users with summaries of chat messages sent to them while they were offline.

Before you begin
Role required: virtual_agent_admin

About this task
You can send email summaries to an authenticated user or users who are verified by a live agent.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select the **General** tab.
3. In the **Missed activity emails** card, select **View Settings**.
4. Enable the Missed activity emails feature by toggling **Activate** option.
5. In the Offline threshold drop-down, set the time duration that the user is inactive before sending email notification.
   - 15 minutes (default)
   - 2 hours
   - 8 hours
   - Custom (enter a custom duration of minutes or hours)
6. Select **Save**.

Result
Email notifications of missed chat messages are automatically sent at the specified time interval.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Configuring Sensitive Data Handler

Detect and mask sensitive information that is shared in Agent Chat or Virtual Agent conversations.

Before you begin

Activate the Sensitive Data Handler plugin (com.glide.sensitive_data_handling).

Role required: admin, virtual_agent_admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Under **Sensitive data detection**, select **View all**.
3. Slide the **Active** toggle switch to enable sensitive data detection.
4. Select the appropriate conversation flow:
   a. Requester to agent - detect and mask sensitive data entered by the requester in an Agent Chat conversation.
   b. Agent to requester - detect and mask sensitive data entered by the agent in an Agent Chat conversation.
   c. Requester to Virtual Agent - detect and mask sensitive data entered by the requester during a Virtual Agent conversation.

   Note:
   You must select at least one conversation flow.

5. The *Regular Expressions* tab displays the existing expressions:

Regular Expressions

Field	Description
Name	Name of the regular expression.
Regular Expression	Pattern that defines the expression.
Number of characters to mask	Number of characters in the regular expression that are masked.
Start masking from	Direction the regular expression is masked: left to right or right to left.
Status	○ Active - this expression is masked. ○ Inactive - this expression isn't masked.
Order	Order in which the active regular expressions are analyzed against a message to determine if there are any matches.

6. Either select an existing expression to modify or create a new regular expression by selecting **New** and filling in the fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Sensitive Data Regex form

Field	Description
Name	Name of the regular expression.
Number of characters to mask	Number of characters in the regular expression that are masked.
Masking symbol	Symbol used in place of the sensitive data.
Status	○ Active - this expression is masked. ○ Inactive - this expression isn't masked.
Domain	Name of the domain that this regular expression affects. If you select **Global**, then the regular expression applies to both the agent and requester domains. For the agent and requester to see each other's domain, the administrator must do one of the following: ○ Include the domain where the regular expression should be visible as a child domain to the corresponding parent domain. ○ Grant necessary access to the appropriate domain if it's a sister domain. ○ Set the regular expression under a global domain.
Regular Expression	Pattern that defines the expression. Check your regular expression on a regex validation site such as https://regex101.com/
Order	Order in which the active regular expressions are analyzed against a message to determine if there are any matches.
Start masking from	Indicates whether the regular expression is processed from left to right or right to left.

7. On the **Agent system messages** tab, enter information for the message that the agent sees if they enter sensitive data:

Agent system messages

Field	Description
Description	Description of the system message.
Value	Exact wording of the system message that displays to the agent.
Updated	Date and time the message was most recently updated.
Updated by	Name of the user who most recently updated the message.

8. On the **Requester system messages** tab, enter information for the message that the requester sees if they enter sensitive data:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Requester system messages

Field	Description
Description	Description of the system message.
Value	Exact wording of the system message that displays to the requester.
Updated	Date and time the message was most recently updated.
Updated by	Name of the user who most recently updated the message.

9. Select **Save**.

Configuring Profanity Filter

Configure the Profanity Filter for Agent Chat to detect flagged words in the manner that best suits your company's needs.

Before you begin

Role required: admin, virtual_agent_admin


Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Chat Settings** > **Agent Chat**.
2. On the Chat settings card, select **View settings** next to Profanity detection.
3. On the Profanity detection page, slide the **Active** toggle switch to activate the profanity filter.
4. In the Choose how to detect flagged words card, configure the settings:

Option	Description
Use Machine Learning model to detect flagged words	Use model-based mode to determine which words should be marked as flagged words.
Use list of flagged words if no matches are found	Use a keyword-based approach to determine which words should be marked as flagged words. The list of flagged words can be configured on the Flagged Words tab.
Number of messages before notifying manager	If the number of messages with flagged words that an agent has sent is equal to or exceeds this number within the time threshold, the Profanity Filter sends a message to the manager.
Time threshold (in hours)	Number of hours during which the number of messages with flagged words is tracked.


5. On the *Flagged Words* tab, specify words that the Profanity Filter should flag:

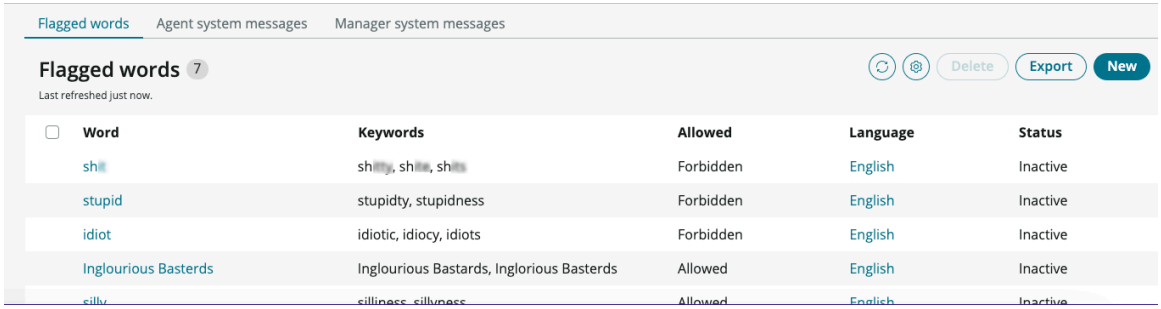© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Flagged words	
Word	Word that the Profanity Filter should flag.
Keywords	Similar words that the Profanity Filter should also flag.
Allowed	○ **Forbidden** - the word is considered profane and will be flagged. ○ **Allowed** - the word is not considered profane and will not be flagged.
Language	Language that the Profanity Filter applies to.
Status	○ **Active** - if the Profanity Filter detects this word, it will determine whether it is forbidden or allowed. ○ **Inactive** - if the Profanity Filter detects this word, it will not do anything.

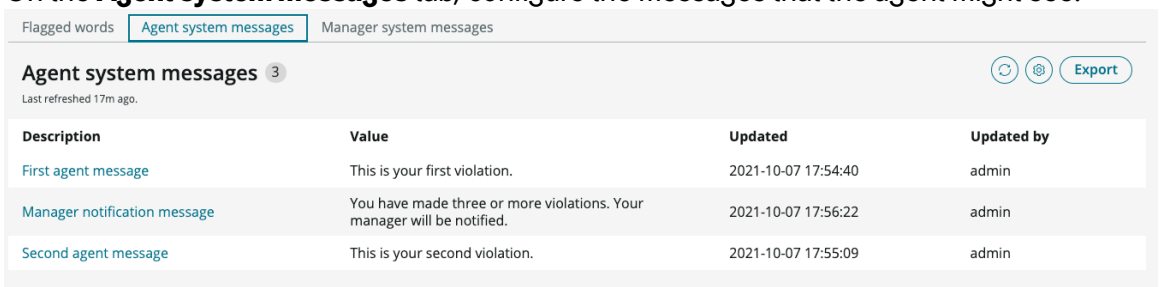
6. On the **Agent system messages** tab, configure the messages that the agent might see:



Agent system messages	
Description	Description of the system message.
Value	Exact wording of the system message that displays to the agent.
Updated	Date and time the message was most recently updated.
Updated by	Name of the user who most recently updated the message.

7. On the **Manager system messages** tab, configure the messages that the manager might see:

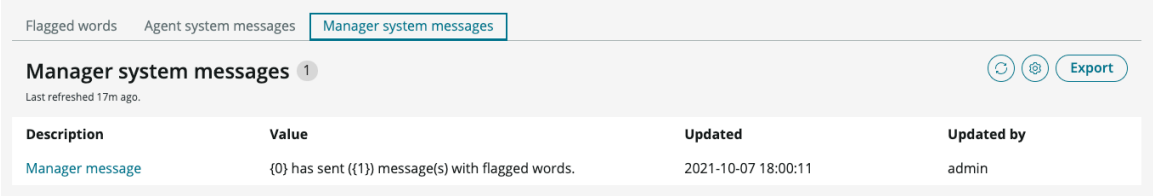© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Manager system messages	
Description	Description of the system message.
Value	Exact wording of the system message that displays to the manager.
Updated	Date and time the message was most recently updated.
Updated by	Name of the user who most recently updated the message.

Configuring Dynamic Translation for Agent Chat

Activate Dynamic Translation for Agent Chat (DTAC) so chat conversations can be translated from one language to another.

Dynamic Translation for Agent Chat Watch this video for more information on global support with Dynamic Translation for Agent Chat.

Prerequisite steps

These tasks must be completed prior to activating DTAC:

- Integrate with a translation service provider
- Migrate to version v3 of a translator configuration
- Translate a knowledge article

Activating DTAC

DTAC translates chat conversations from one language to another. The preferred languages for the agent and requester are based on their user profiles and a translation service translates the messages into the defined language of the other participant. Translation service providers support language detection for requesters who are not logged in to ServiceNow®, also referred to as guest users.

DTAC is inactive by default. Before activating DTAC, the following requirements must be completed:

- Dynamic translation
- Set up Agent Chat
- Activate a language

Activate the Dynamic Translation for Agent Chat plugin (com.glide.cs.dynamic.translation.agent.chat).

This also activates these plugins:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Dynamic Translation (com.glide.dynamic_translation)
- Conversational Dynamic Translation (com.glide.dynamic_translation.va_async)

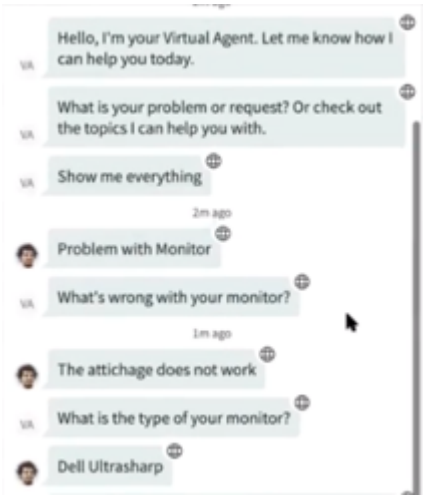
and these system properties:

- true - sync
- false - async
- absence of this property - async

Transferring from Virtual Agent to a live agent

Once an agent accepts a chat, they can see the chat history between the Virtual Agent and requester in their preferred language for more context.

Virtual Agent topics must be set up in the desired languages prior to using DTAC. To learn more about how to set up topics, see Virtual Agent Designer.



Translation support in chat conversations

When DTAC is enabled, these items are translated in chat conversations:


- Users' messages
- System messages
- Virtual Agent chat history
- Record card field values
- Rich controls

Type	Rich Control
User input	String
User input	Static choice list
User input	Reference choice
User input	Boolean
User input	Date time
User input	File picker

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Type	Rich Control
User input	Carousel
Bot response	Text
Bot response	Single link
Bot response	Multiple links
Bot response	Multi-flow output
Bot response	Script output
Bot response	Record card

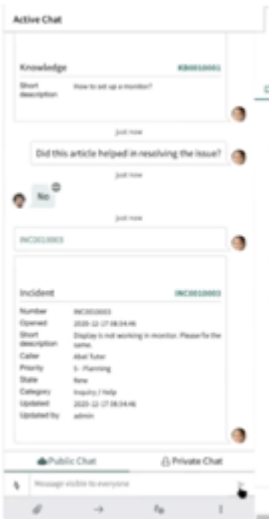DTAC does not support record card labels. For this functionality to operate, system localization properties must be configured. Navigate to **System Properties** > **System Localization**. For more information, see ServiceNow® product documentation on Localization settings.



Analytical reports for DTAC

You can generate a report that counts the number of DTAC chats, to assess how many conversations use the DTAC option.

Monitor the number of true values in the Translated column in the Interaction table. For more information, see the ServiceNow® product documentation on Interaction records in Workspace Interaction records in Agent Workspace.

Setting up conversation history

Enable and customize the conversation history options that are available on the conversation history screen.

Before you begin

Conversation history provides the capability to easily access historical conversations on the same channel. The agent can be more efficient by reviewing those conversations without opening multiple tabs and reviewing the transcripts. This page provides options to enable conversation history and to configure how many to display and optional filtered view for the agents.

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Agent Chat** and then on the Agent Experience card, select **View Settings** next to Conversation History.
3. To turn on conversation history, toggle on the Activate switch.
4. In the Number of conversations to display field, enter the number of previous conversations that should display on the screen.
   The maximum number of conversations that can display is 25.
5. To create a conversation history filter, select **New**.
6. On the Create New Conversation History Filter screen, fill in the fields.

Field	Definition
Name	Name of the conversation history filter.
Active	Select the check box if this filter should be applied.
Description	Description of the conversation history filter.
Order	Order in which the filters should be prioritized. The filter with the lowest order matching the agent's groups is used to filter the interactions.
Apply to all groups	Option for making the conversation history filter available to all user groups.

7. Select **Set conditions** to display the Condition dialog.
8. On the Condition dialog, build a filter for the conversation history.
   For more information, see Condition builder.
9. Select **Set**.
10. On the Create New Conversation History Filter screen, select **Submit** or **Update**.

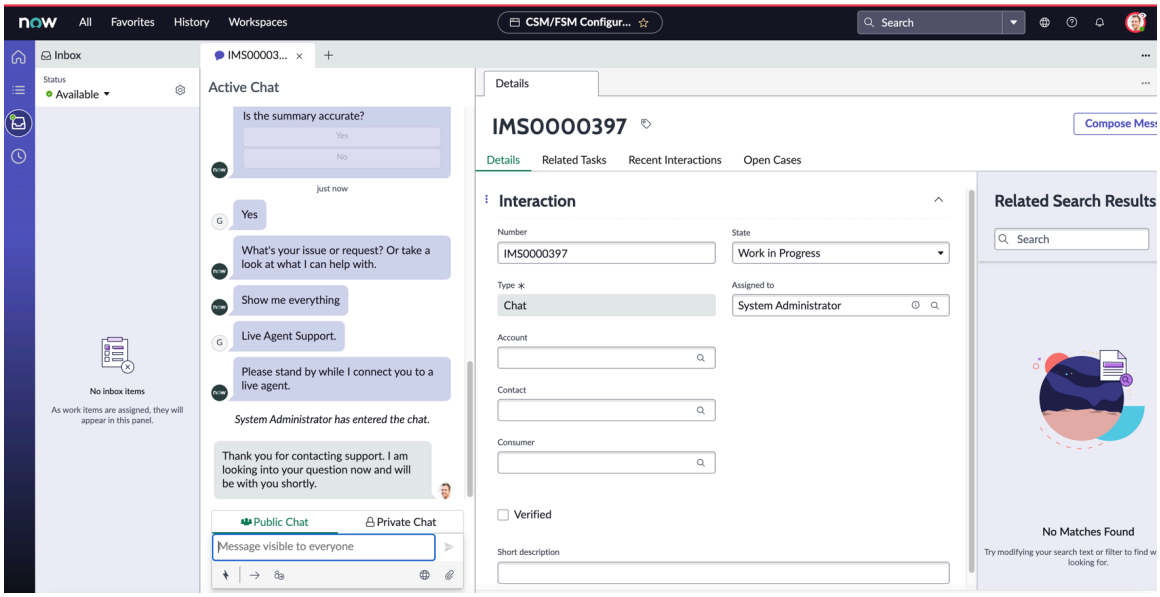
Using Agent Chat

Agent Chat enables live agents to have conversations with requesters and for managers to help agents and monitor them.

Workspace displays a chat inbox icon  that agents use to enter chats. Agents set their status to **Available** or **Away** to open or close their inbox for chat requests. The icon displays numbers when chats are waiting to be answered.

The chat interface is integrated into the workspace so agents can chat while working onscreen with other features provided by the workspace.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



The following sections explain how to use Agent Chat.

Using quick actions in Agent Chat

Use shortcuts, known as quick actions, for common activities that are performed frequently.

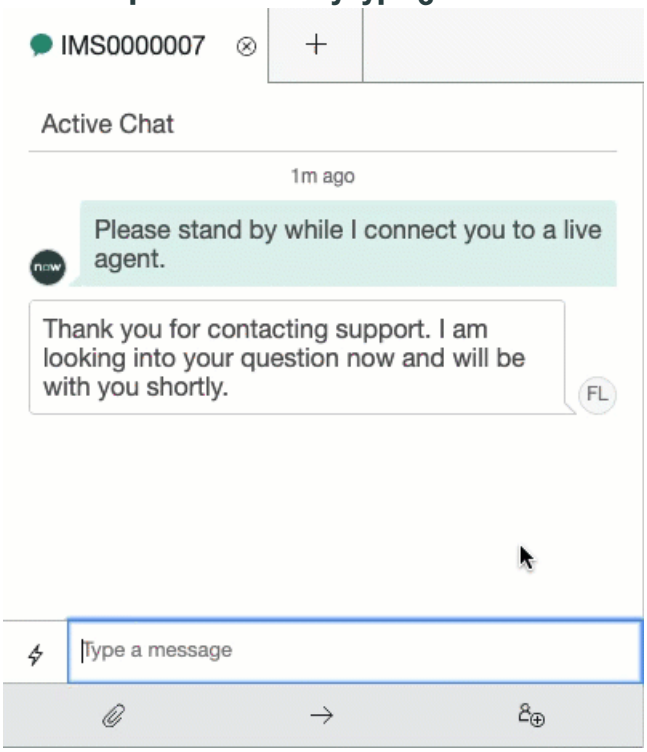
In Agent Chat, an agent can insert a quick action in any of the following ways:

- Enter a command after the forward slash (/).
- Select the lightning bolt icon (⚡) and select a quick action from the menu.
- Select the quick action button on the toolbar (if available).

For example, an agent can transfer a conversation to another queue by entering `/tq` in the message field.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Initiate a queue transfer by typing



An agent can also initiate a queue transfer by selecting the lightning bolt icon and then selecting **/tq** from the menu.

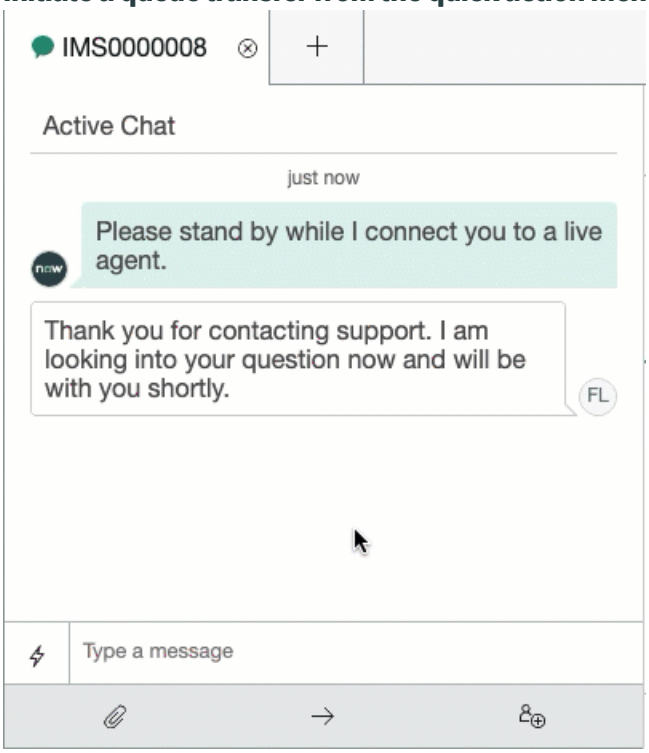
Initiate a queue transfer from the quick action menu



Alternatively, an agent can transfer to another queue by selecting the arrow button (→) on the toolbar.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

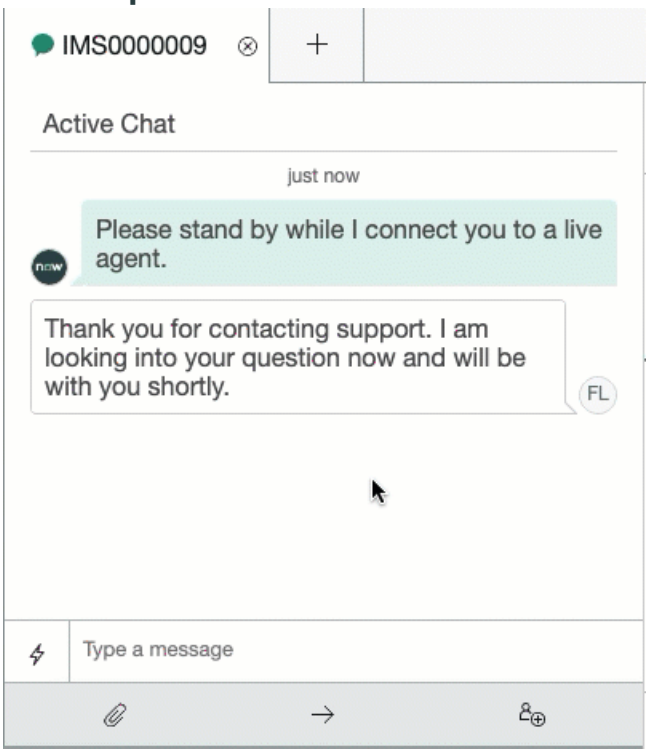
Initiate a queue transfer from the toolbar



Note:
Agents must have the quickactions_user role to use quick actions.

Display chat context details

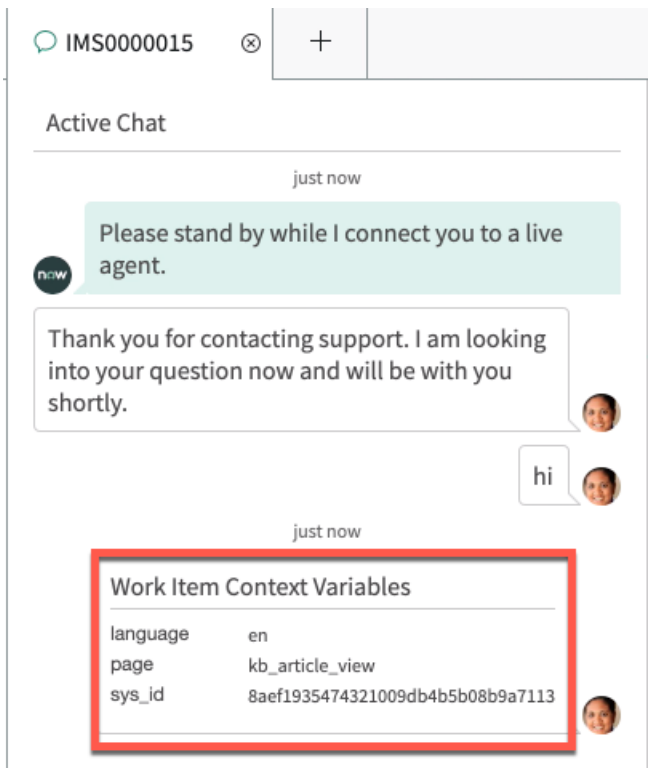An agent can view the context relevant to a chat interaction. An agent can use a context quick action to show a card with context variables: sysparm_portal, sysparm_page, table, sys_id, and sysparm_language. The agent can initiate this quick action by entering `/context` in the message field.




© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

An agent can use Now Assist context menu to generate a response to enter in a chat. The agent initiates this quick action by entering `/recommend` in the message input field. An error message appears if it takes too long to generate the recommended response or the LLM server isn't available.

Parameters

Some quick actions require a secondary menu so that agents can further control the quick action. For example, after an agent initiates a queue transfer, the agent must select which queue to transfer to. The items that appear on the secondary menu are called parameters.

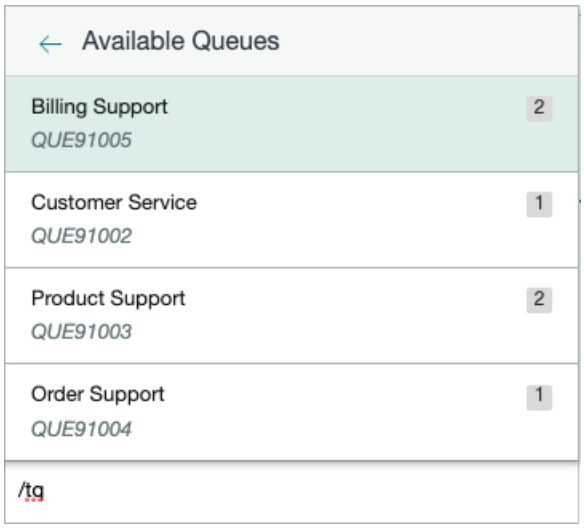The following figure shows that, after an agent inserts a quick action to transfer to another queue, the agent sees a list of available queues. The default parameters for the quick actions are queues that are available to agents.



To create a quick action that requires a secondary menu, you must define parameters for the quick action. For more information, see Define a quick action parameter.

Automatically displaying topics with Conversation Autopilot

Agents can use Conversation Autopilot to display Virtual Agent topics during Agent Chat conversations. While the requester interacts with the Virtual Agent topics, agents can multitask and work on other items. Conversation Autopilot is not available for HR Service Delivery (HRSD).

While talking to a requester in an Agent Chat conversation, agents can start Conversation Autopilot by using autopilot quick actions to invoke Virtual Agent topics. Depending on the information entered by the requester, agents can search for a specific Virtual Agent topic and display it with parameters. The requester views the topic and responds as needed and Virtual Agent captures the requester's input.

Note:
For the best experience, enable the Agent Chat setting that turns on system messages during autopilot. For details, see Setting up Agent Chat.

Configuring Autopilot

You must have the Glide Virtual Agent plugin and the Agent Chat plugin installed to view and access the quick action for Autopilot. Admins can setup which Virtual Agent topics are available to agents in Agent Chat.

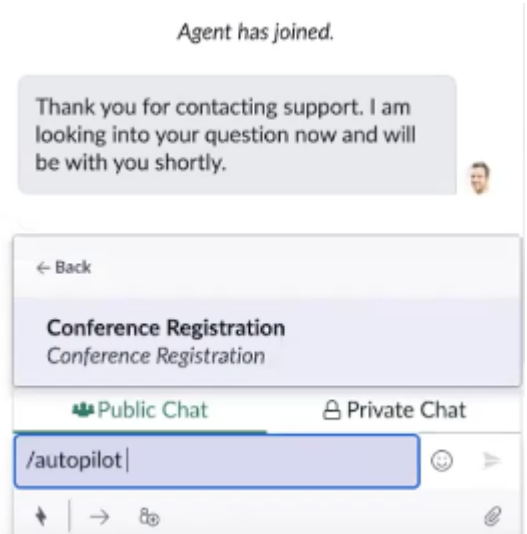
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Admins must be able to configure a quick action based on their organization's business need and set it up for agents to use as required.


For information on using quick actions in Agent Chat, see Using quick actions in Agent Chat.

Using Autopilot

The agent is able to use quick actions to search for and invoke an Autopilot topic of their choice during their conversation with a requester. The agent can only select Autopilot topics that are relevant to the channel. For example, only topics optimized for SMS are selectable when conversing with a requester who is using SMS.



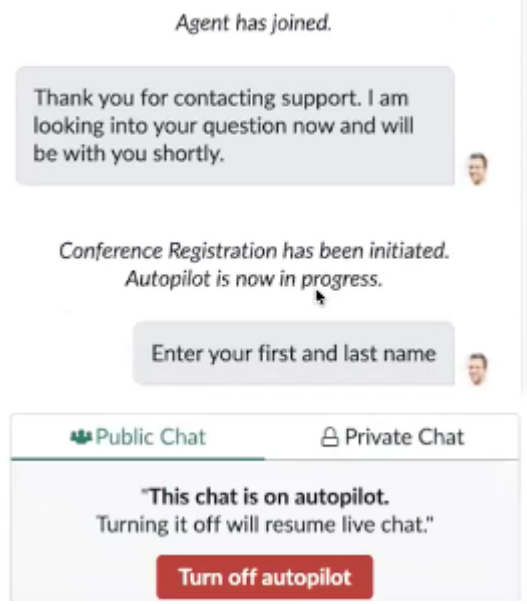
The agent is informed by system messages when an Autopilot topic has been initiated and ended. These messages can be configured by admins.



While Autopilot is on

While Autopilot is on, the requester can use the rich controls for text but agents see a read-only version of the rich controls rendered to the requester.

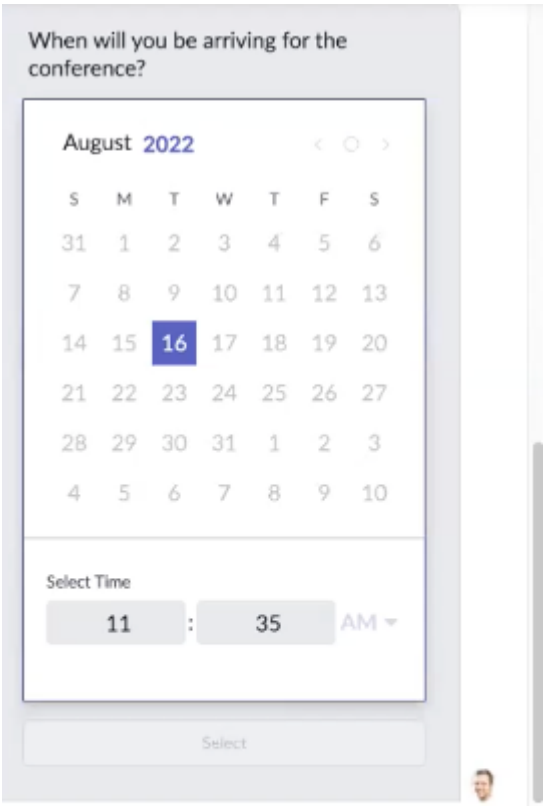
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



When Autopilot is in use, public chat with the requester is disabled, but agents can contact other agents and supervisors for help. If Agent Whisper is on, the **Private Chat** tab in Agent Whisper functions normally during Autopilot. While Autopilot is in use, the agent's capacity is not freed up and messaging actions configured by customers are disabled.

When Autopilot is ended

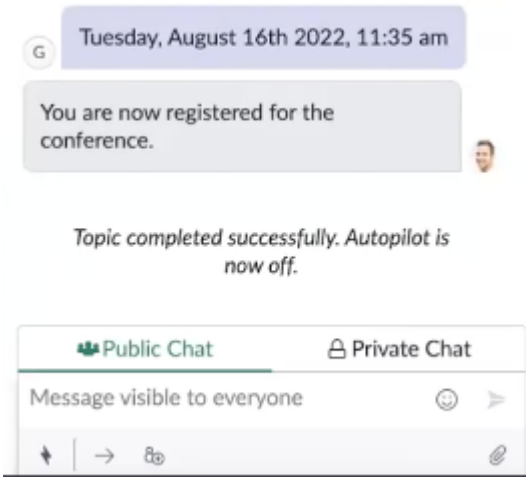The agent receives a desktop notification in the **Notifications** tab in Workspace stating that the Virtual Agent topic has ended or been completed by the requester. At this point, the agent resumes control of the conversation.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Conveying emotions using emojis

Use emojis in Agent Chat conversations to convey emotions to requesters. This helps requesters feel like they're having a conversation with a friend and builds customer brand loyalty.

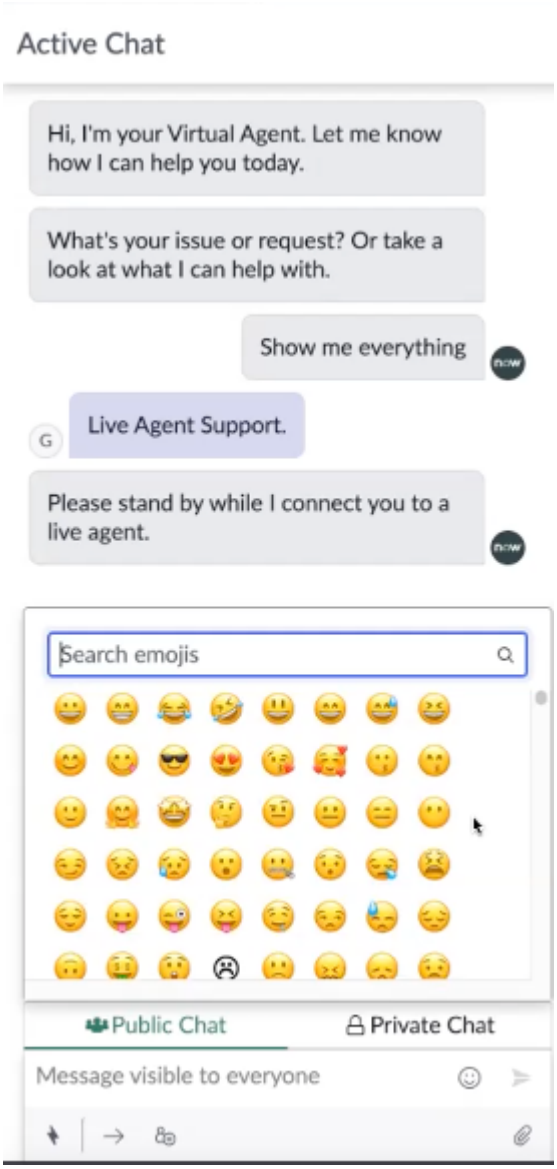
Before you begin

Emojis must be enabled before agents can use them in Agent Chat. See Setting up Agent Chat for instructions on enabling emojis.

Role required: admin


Procedure

1. While in an active chat, there are several ways to include an emoji:
   - Select the Insert emoji icon to display the emoji palette. Then select an emoji from the palette or search for an emoji by entering a name in the search bar of the emoji palette.




   - Enter a colon followed by the first few characters of the emoji name. When the pop-up menu of emojis displays, select one.

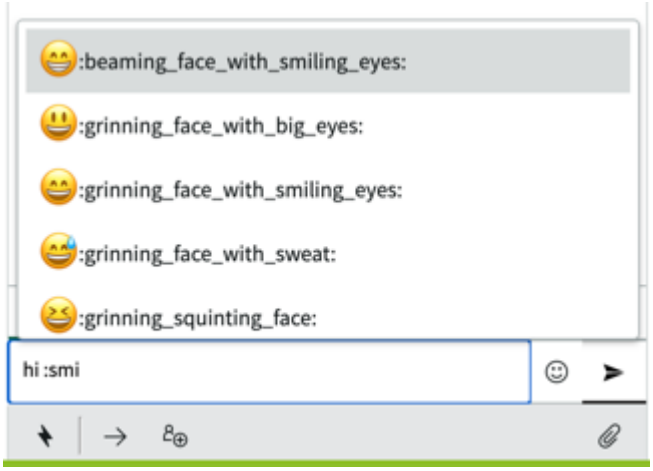
© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



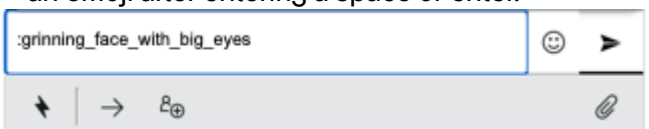- Enter a special character combination or short name which is automatically converted into an emoji after entering a space or enter.



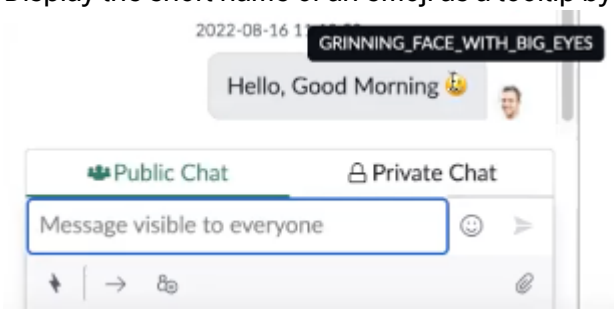2. Display the short name of an emoji as a tooltip by positioning the cursor over the emoji.




Conversing in a different language with Dynamic Translation for Agent Chat

Use Dynamic Translation for Agent Chat (DTAC) to have a chat conversation with a requester who uses a different language.

Translation indicators

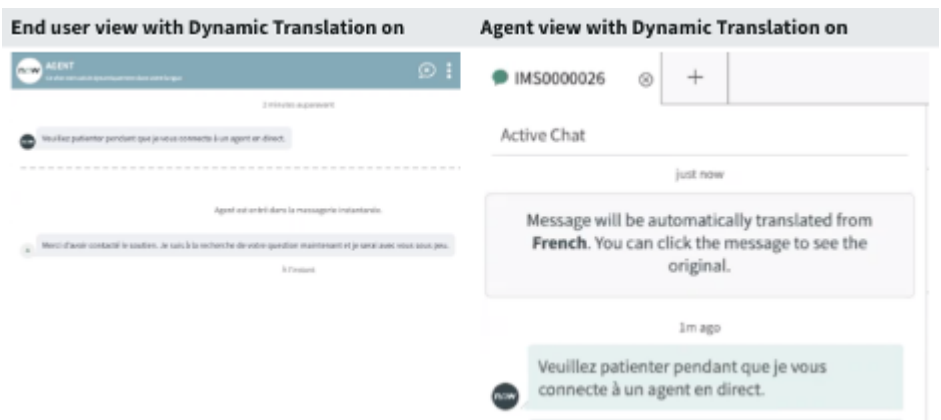When DTAC is enabled, both the agent and the requester will see a banner at the top of the chat conversation that indicates the conversation is being translated. Bilingual agents can determine if they're fluent enough in the requester's language to temporarily turn off DTAC for individual chat sessions as needed.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

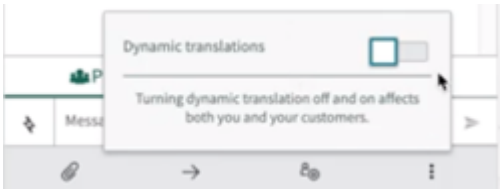
Dynamic translations control for bilingual agents

When a bilingual agent accepts a chat conversation to which they're fluent in the requester's language, DTAC is not necessary. With the Dynamic translations chat session control, agents can turn of DTAC for individual chat sessions.

Agents can select the ellipsis (⋮) at the bottom of the chat window then select the **Dynamic translations control** to the off position.

When DTAC is switched off, a notification displays at the top of the agent's and the requester's chat windows, highlighting the change in status, for this chat session.


The translation capability is switched off for both the requester and the agent, for this specific chat session. The selection in one chat session does not affect the selection in other chat sessions and the agent can turn DTAC off and back on within one chat session.



Troubleshoot translated messages

Translation services do not understand idioms or jargon and it is possible that some user messages are lost in translation. You can use the translation-indicator icon to view the requester's original message and look up its meaning as needed.

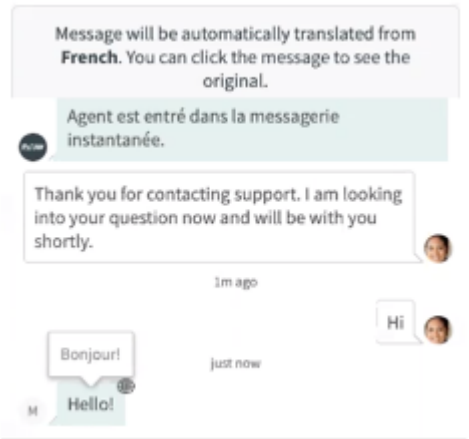You can navigate to the individual chat message and select the translation-indicator icon (🌐) to see the requester's original, untranslated message.




Translated chat transcripts

Two chat transcripts are generated at the end of each DTAC chat session. One for the requester to download and save in the requester's language. The other is the agent's transcript which contains the text as seen in the agent's chat window. If an agent used DTAC in part of the chat, the transcript contains both the translated and non-translated text. For more information, see Chat transcript downloads for requesters.

Chat transferred from Virtual Agent

Once you accept a chat from a requester, you can see the chat history between the Virtual Agent and requester in their preferred language for more context.

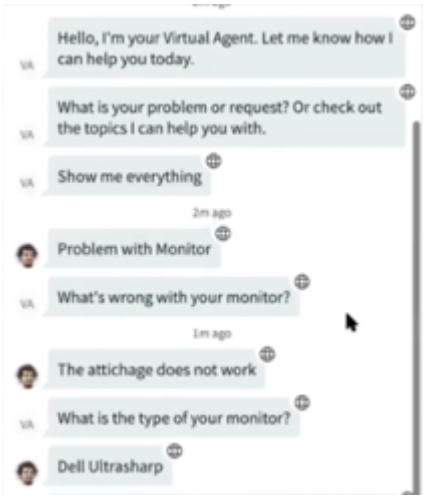© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Attachments within DTAC

When inserting an attachment into a chat, DTAC does not translate the file name or the contents of the attachment.

Sending an agent-initiated message during an async chat

Send a message to a requester even when the requester isn't online while working on issues in Workspace. A long-running conversation between an an agent and a requester who are not online concurrently is called an asynchronous, or async, chat.

Before you begin

Role required: admin

Procedure

1. On the Interaction record, select **Compose Message**.
   The Compose message form displays for interactions that aren't Chat or Messaging.
2. On the form, fill in the fields.

Compose Message form

Field	Value
Channel	Messaging channel with which agents can initiate messages to connect with requesters. For async chat, select **mweb**.
From	ID of the agent who is sending the message.
To	ID of the requester who will receive the message.
Message	Enter the message you want to send to the requester.
Attachment	Select **Attach File** to specify a file to attach to the message.

3. Select **Send**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Related topics

Asynchronous chat

Configure asynchronous chat for the web channel

Agent Chat reference

Reference topics provide descriptions about Agent Chat.

Domain separation and Agent Chat

Domain separation is supported in the Agent Chat application. Domain separation enables you to separate data, processes, and administrative tasks into logical groupings called domains. You can control several aspects of this separation, including which users can see and access data.

Support level: Standard

- Includes all aspects of **Basic** level support.
- Application properties are domain-aware as needed.
- Business logic: The service provider (SP) creates or modifies processes per customer. The use cases reflect proper use of the application by multiple SP customers in a single instance.
- The instance owner must configure the minimum viable product (MVP) business logic and data parameters per tenant as expected for the specific application.

Sample use case: An admin must be able to make comments required when a record closes for one tenant, but not for another.

For more information on support levels, see Application support for domain separation.

Requirements

All domain support features require the Domain Support - Domain Extensions Installer [com.glide.domain.msp_extensions.installer] plugin. For details, see Request domain separation.

Configuring Agent Chat with domain separation

Domain separation allows organizations to segment their data and processes based on specific criteria such as business unit, geography, or other factors.

A service provider (SP) has one chat setting (Agent Chat) record in the global domain when the instance is provisioned.

The admin of a subdomain can specify Agent Chat settings for that subdomain, such as work queues and assignment groups. For details, see Setting up Agent Chat.

When a user logs into a subdomain, a seeded Agent Chat settings record is created.

When using domain separation in Agent Chat, keep the following points in mind:

- Domain Separation applies to both the agent side and the customer side of the chat. This means that agents will only be able to access chat records and data that are in their domain, and customers will only be able to see chat records that are associated with their domain.
- Agent Chat records are automatically tagged with the domain of the agent who handled the chat. This ensures that the chat record is associated with the correct domain, and that agents can only view chat records that are associated with their domain.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- When an agent is assigned to a chat, the chat is automatically assigned to the domain of the agent. This ensures that the chat record is associated with the correct domain from the start.
- If an agent needs to transfer a chat to another agent or escalate the chat to a higher level of support, the chat is transferred to an agent who is in the same domain as the original agent. This ensures that the chat record stays within the correct domain.

Building a report to track the number of help requests

Create a report that tracks the number of help requests.

Before you begin

Role required: admin

Procedure

1. Activate the Interaction Events business rule.
   a. Navigate to **Interaction** > **All**.
   b. Right-click the **Number** heading.
   c. Click **Configure** > **Business Rules**.
   d. On the Business Rules screen under the **Name** column, click **Interaction Events**.
   e. On the Business Rules - Interaction Events screen, select the **Active** check box if it is not already selected.
   f. Click **Update**.
2. Create a new metric definition for Interaction "help requested" on the Metric Definition - New record screen by entering `Interaction` in the **Table** field and selecting **Help Requested** from the **Field** list.
   For detailed steps on creating metric definitions, see Define a metric.
3. Create a new chat as a requester.
4. Accept the same chat as an agent.
5. While still logged in as that agent, enter the quick action `/help`.
6. Navigate to **Metrics** > **Instances** and record the ID of the single instance record created for help_requested=true.
7. Navigate to the Admin window and open the interaction from the previous step.
8. Join the conversation (either privately or publicly).
9. Navigate to **Metrics** > **Instances** and observe that one instance record was created for help_requested=true.
   For more information about using the Metric Instance Table, see Metric instance.

Agent Chat Interaction related records

The Interaction related record [interaction_related_record] table tracks tasks and Knowledge Base (KB) articles that are created, updated, or viewed in the context of a particular interaction. The Interaction related record table references the interaction, related document, whether the relationship is to a task or KB article, and what type of operation on the related document formed the basis for the relationship.

Interaction related record table overview

The Interaction related record table tracks task and KB article records that were created, updated, or viewed in a particular interaction. The Interaction related record table records

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- the interaction
- the related document
- whether the relationship is to a KB article or a task
- what type of operation on the related document formed the basis of the relationship

Creating Interaction related records

Interaction related records can be created manually or automatically.

- Manually - records are manually created via an Interaction related record form. The form is opened on a workspace through an Associated record UI action. When this form is used to create the relationship, the operation field is not set to any value.
- Automatically created via business rules
- Automatically created via client calls from a workspace

Configuring automatic creation of interaction related records

You can update or create entries in the Interaction relationship policy [interaction_relationship_policy] table to manage which types of operations result in the auto-creation of interaction related records. These determine whether interaction related records may be created for each of the following actions:

- Insert - record created from workspace in the context of the interaction.
- Update - record updated from workspace in the context of the interaction.
- Mention - record number mentioned in a chat, resulting in the rendering of a record card.
- Open - record opened in workspace in the context of the interaction.
- Unknown - interaction related record created by automated logic other than via agent actions from workspace.

Two policies that are included with the base system govern behavior for relationships to the task and kb_knowledge table. To override behavior for a particular task type, you can add an additional entry for the appropriate Document

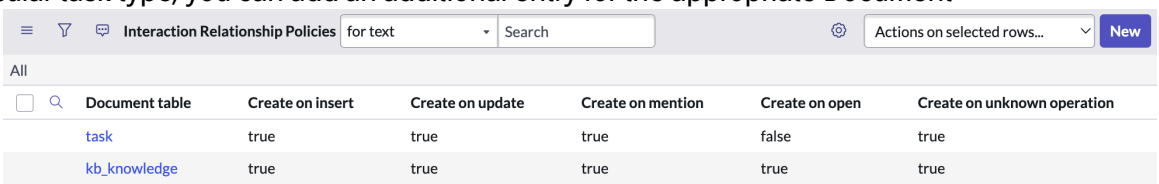


table.

The com.glide.interaction.autocreate_relationships property is set to true by default. If it is set to false, only relationships created via the interaction_related_record form are created. All others are blocked by the "Block relationship autocreation" business rule.

Sidebar

Agents can collaborate with others through Sidebar discussions, either as standalone conversations or linked to a Workspace record.

https://player.vimeo.com/video/995464032?h=eff269086e&badge=0&autopause=0&player_id=0&app_id=58479

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Get started

Explore	Configure
 Learn about Sidebar concepts and features.	 Install and configure Sidebar and activate relevant plugins.
Use	**Reference**
 Use Sidebar to help agents have discussions with others to solve issues faster.	 Get Sidebar details for domain separation.

Troubleshoot and get help

- Search the Known Error Portal for known error articles
- Contact Customer Service and Support

Exploring Sidebar

Using Sidebar, agents can have real-time collaboration with others as a standalone conversation or based around a Workspace record. These Sidebar discussions facilitate the exchange of information and knowledge to help resolve issues faster and with higher-quality outcomes.

Sidebar overview

An agent can initiate a Sidebar discussion as a standalone conversation or from a Workspace record. Agents enter preliminary information and context and adding subject matter experts. For Sidebar discussions created from a Workspace record, the agent can create multiple discussions for a record.

Sidebar workspaces

Sidebar is supported in these workspaces:

- Customer Service Management (CSM) Configurable Workspace.
- CSM Manager Workspace
- Human Resources (HR) Agent Workspace
- IT Service Management (ITSM) Manager Workspace

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Security Incident Response Workspace
- Vendor Management Workspace

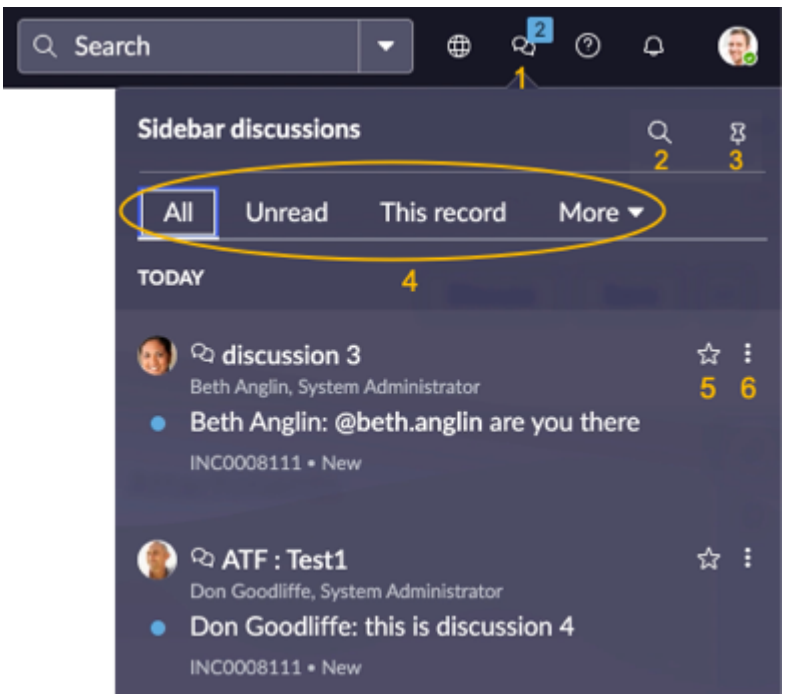
For information on adding the **Discuss** button to a supported workspace, see Adding the Discuss button.

For information on adding the **Discuss** button to any workspace not listed (such as the Service Operation Workspace), see KB article KB1213249.

Sidebar components

Sidebar discussion panel

When you select the Sidebar discussion icon, the Sidebar discussion panel appears:



The Sidebar discussion panel includes:

Icon	Description
1 -	Display Sidebar discussions dialog. If a number in a blue square appears, the number indicates the number of Sidebar discussions that are currently active.
2-	Search within the Sidebar discussions. When you select the Search icon, the **Search** field appears and you can enter the text you want to locate. The search results display below the search field and are grouped by user message then file name. Select **Cancel** to clear the


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Icon	Description
	search field and return to the Sidebar discussion. You can filter the search results by discussions, messages, and attachments and sort by most relevant or date. To use the Search KB quick action, enable AI Search. For more information, see AI Search and AI Search Availability [KB0867751].
3 -	Permanently pin the menu to the side of the screen.
4 - 	Select what types of discussions that you want to view: • All - all discussions. • Unread - all unread discussions. • This record - all discussions related to the record that's currently open in the background. The most recent information displays and is updated when a new message is received, there's an unread message, or a new discussion is created for the record. You can also create discussions for the record by selecting **New discussion**. • Mentions - discussions that mention you with @yourusername. • Favorites - discussions that you marked as favorites.
5 -	Marks the Sidebar discussion as a favorite. Discussions that have been marked as favorites display under the **Favorites** tab. You can undo a discussion as a favorite by selecting the star icon again.
6 -	Displays options for the discussion: • Dismiss discussion - close the discussion dialog (but don't exit the discussion). • Leave discussion - exit the discussion.


Docked chat windows

You can access multiple Sidebar discussions at the same time using the docked windows feature. Docked chat windows include these features:

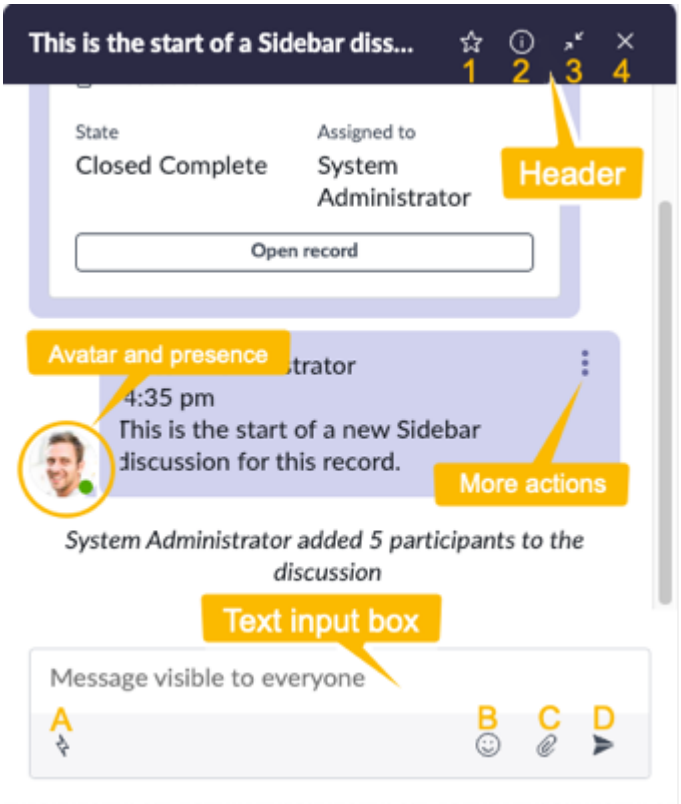© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Header icons

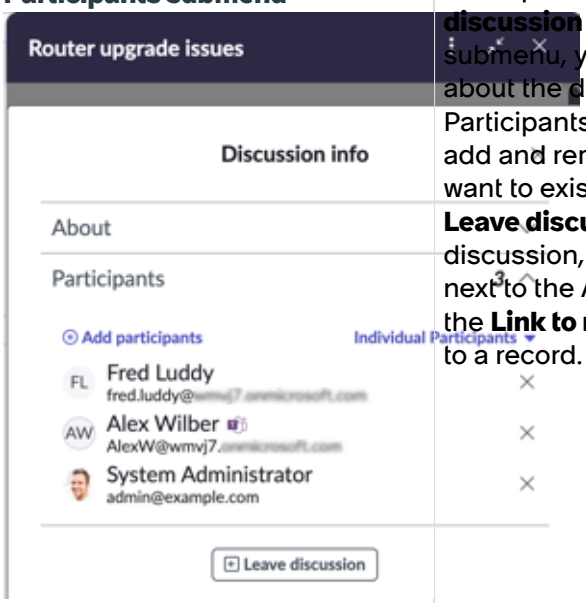Icon	Description
1 - ☆	Marks the Sidebar discussion as a favorite. Discussions that have been marked as favorites display under the **Favorites** tab. You can undo a discussion as a favorite by selecting the star icon again.
2 - ⓘ **Participants submenu** 	Opens the Discussion info panel that includes the About submenu, Participants submenu, and **Leave discussion** button. On the About submenu, you can view information about the discussion. On the Participants submenu, you can add and remove participants. If you want to exist the discussion, select **Leave discussion**. For a standalone discussion, select the drop-down arrow next to the About submenu and select the **Link to record** to link the discussion to a record.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Header icons (continued)

Icon	Description
3 - 	Collapses the discussion so it displays only as a tab at the bottom of the screen.
4 - 	Closes the window.

User avatar and presence

User avatar and presence	Description
	Displays the user's avatar and presence (online status). The dot indicates the user's presence depending on whether they're logged in to the platform: • Green dot - user is logged in. • No dot - user isn't logged in. • Orange dot - user recently logged out. If Sidebar and Microsoft Teams are integrated, Microsoft Teams users are differentiated from Sidebar users with a Microsoft Teams  icon. If Sidebar and Slack are integrated, Slack users are differentiated from Sidebar users with a Slack icon ().

More actions icon

Icon	Description
	Display additional actions for this message including: • Post to activity stream • Remove from activity stream • Edit message • Delete message

Text input box icons

Icon	Description
A - 	Access base system or custom quick actions. The agent can start a KB article search by selecting the quick actions icon

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Text input box icons (continued)

Icon	Description
	and then entering `search-kb`. The agent is prompted to search for the relevant KB article. Based on the search and the term that the agent enters, the agent is able to view the KB articles that match the search term. The agent can then select the KB article and include it in the discussion. The KB article is displayed as a record card in the Sidebar discussion. The KB article search is available with the base system. You can summarize a discussion by entering the `/summarize` quick action.
B - 	Display the emoji menu so you can add emojis to the discussion.
C - 	Add attachments to the current discussion so they can be shared with others in the discussion. You can drag files and select the send arrow icon or you can use the attachment icon.
D - 	Send the message.

If you minimize a docked window, it appears as a tab in the overflow menu at the bottom of the screen. Hovering over a minimized docked window shows the record number and chat title to help identify the content. You can select any tab to access that discussion again. The overflow menu can hold up to 25 docked windows and this limit is configurable. If there are more docked windows than can be displayed as tabs in the overflow menu, a tab with a number indicates how many extra docked windows aren't displayed.

Activity stream and Sidebar

To enable agents to post Sidebar discussions to the activity stream, you must integrate Sidebar with the activity stream. For instructions on integrating Sidebar with the activity stream, see Integrating Sidebar and activity stream. For information on using Sidebar with the activity stream, see Activity stream in Sidebar.

Installing and configuring Sidebar

The Sidebar configuration settings are available via the Sidebar tab under **Conversational Interfaces** > **Settings**. For instructions, see Installing Sidebar. After Sidebar is installed, see Configuring Sidebar for instructions on configuring the admin settings.

Using Sidebar

For information on how to use Sidebar, see Using Sidebar for more information.

Key Sidebar features include:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Custom discussion buttons
- Core UI forms with Sidebar
- Sidebar unread conversation badge count
- Docked chat window
- Favorite discussions
- Discussion information panel
- Discussion participant suggestions
- Quick actions
- Integration with activity stream
- Integration with AI search
- Drag-and-drop file sharing
- Emojis
- Mentioning a user with @

Using Sidebar and Microsoft Teams

After Sidebar and Microsoft Teams are integrated, users of both applications can collaborate with each other. For more information on integrating Sidebar with Microsoft Teams, see Sidebar and Microsoft Teams.

Core UI

You can create Sidebar discussions on interaction records from Next Experience Core UI.

Domain Separation

For information about domain separation in Sidebar, see Domain separation and Sidebar.

More information

To learn more, see the Now learning course on Sidebar.

Activity stream in Sidebar

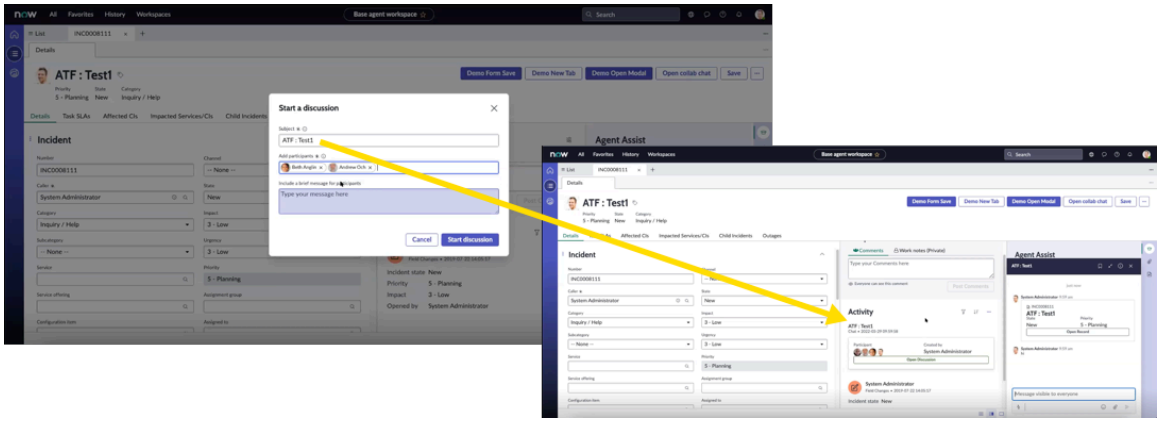
If Sidebar is integrated with the activity stream, you can create links to discussions and post discussion messages directly to the related record as an activity stream record.

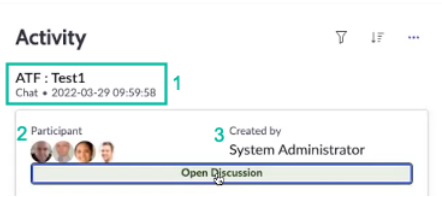
Note:
Sidebar and discussion tiles are available only with Next Experience and not in Core UI.

When a Sidebar discussion is created, a corresponding Sidebar discussion tile is automatically added to the activity stream. Users who have access to the record can also access the discussion from the activity stream. Sidebar users can post messages from discussions into the activity stream as Sidebar posted messages. These messages can be posted to the activity stream as editable entries that can be added and removed as necessary. For generalized information about activity streams, see Activity streams.

When you start a Sidebar discussion, a tile corresponding to the discussion is automatically added to the activity stream.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.






Sidebar tile

1	Sidebar discussion name, type of conversation, date/time discussion started.
2	Profile pictures of the participants (if there are more than 5 participants, then a badge displays the number of additional participants whose profile photos can't be seen.)
3	Name of user who created the Sidebar discussion.

The primary record card appears as part of the activity stream and displays the following:

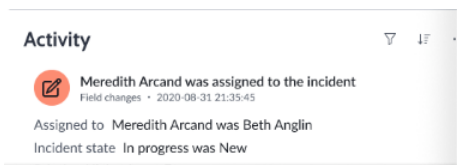- Record ID
- Short description
- Type
- State
- Assigned to
- Link that opens the record
- Priority (for task-based record cards)




Posting a message


You can select any message in the Sidebar discussion panel and post it to the activity stream. When you post a message from the Sidebar discussion to the primary records activity stream, the most important information is tied directly to the record. This enables you to access

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

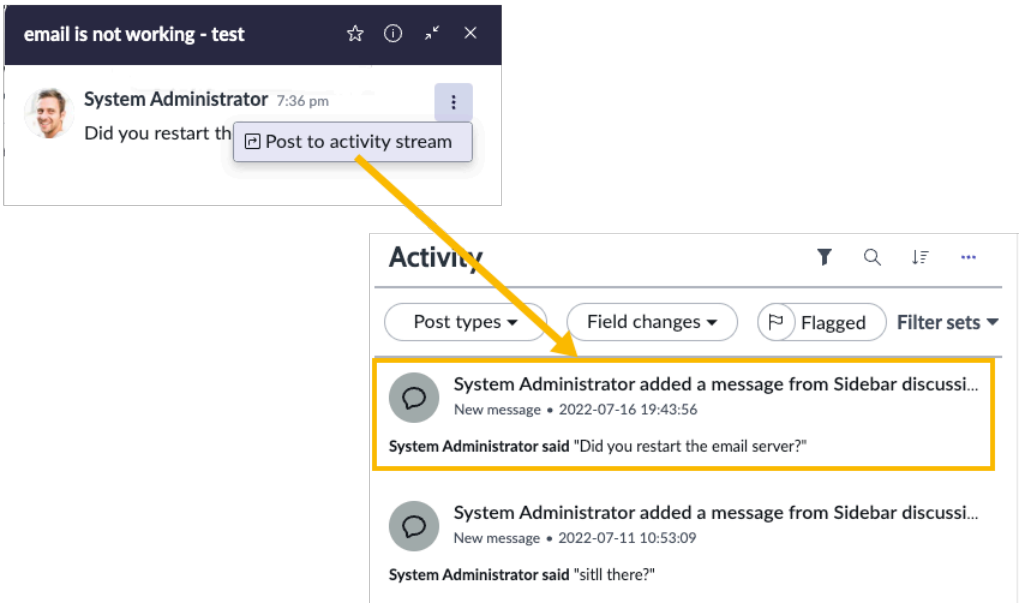collaborative conversations from a record so that you can add yourself to the discussion and view the conversation history.



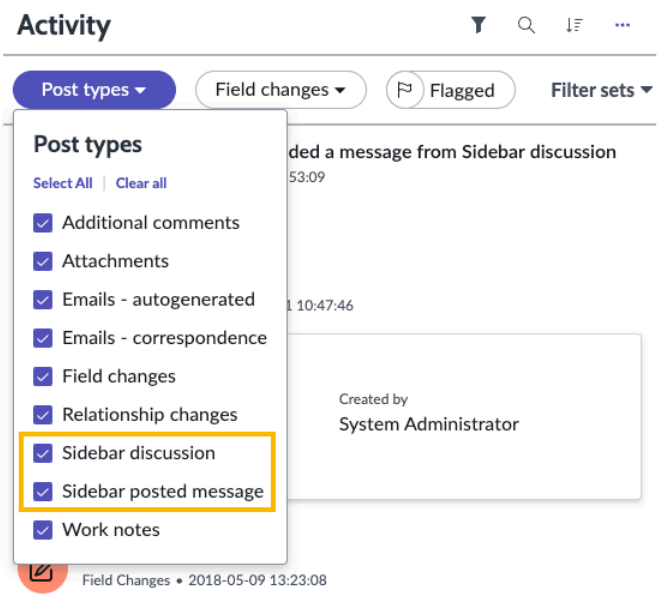
If Sidebar messages posted to the activity stream aren't appearing, ensure **Sidebar discussion** and **Sidebar posted message** are selected in the activity stream filter.



Pinning a discussion tile

To pin a discussion tile in the activity stream, select the pushpin icon to pin a discussion tile to the activity stream. Pinning a discussion tile ensures that the discussion always stays at the top of the activity stream.

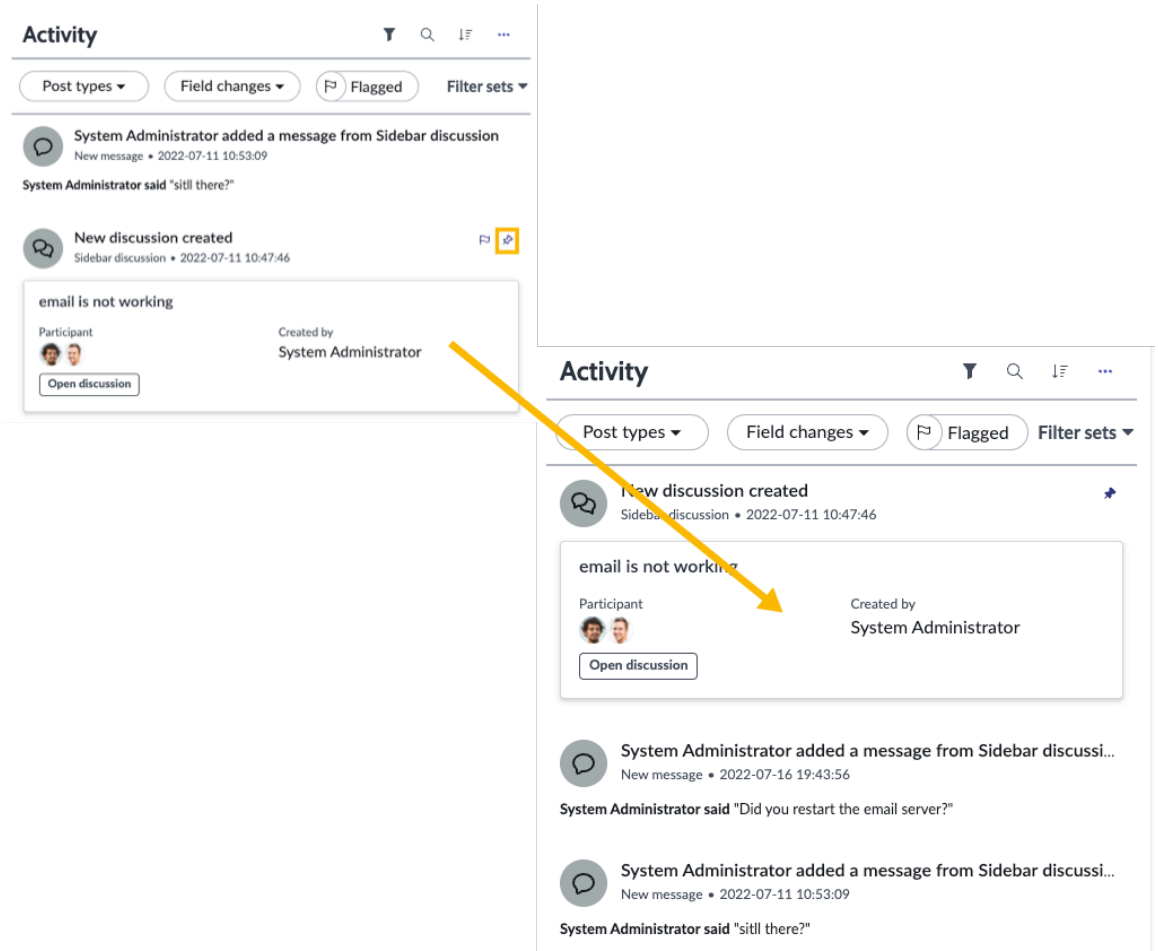© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Editing or Deleting a message in Sidebar

If you edit a message in a Sidebar discussion that was already posted to the activity stream, then any changes that you made to the message are reflected in the activity stream.

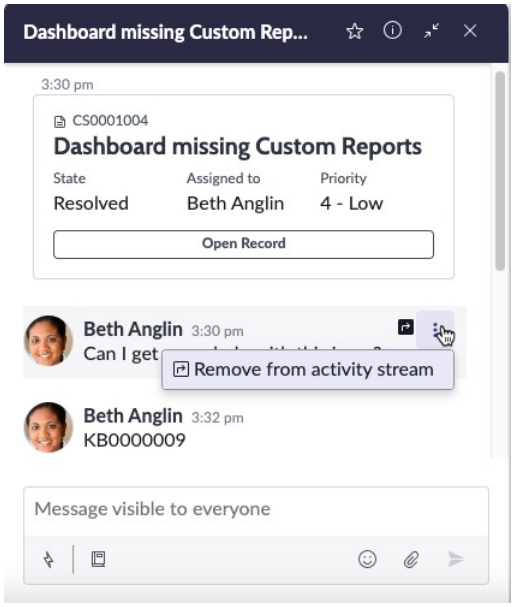
If you posted a message with an attachment in a Sidebar discussion and the message was already posted to the activity stream, any changes made to the attachment will be reflected in the activity stream. For example, if you post a message with an attachment in a Sidebar discussion and it's posted to the activity stream and you later delete the attachment and replace it with a different one, the activity stream displays the new attachment.

If you delete a message in a Sidebar discussion after the original message was already posted to the activity stream, then the message is removed from the activity stream.

Deleting a message from the activity stream

To remove a message from the activity stream, select the **More Actions** menu for each chat bubble within a Sidebar discussion and then select **Remove from activity stream**.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



Participant suggestions in Sidebar

Activate Participant suggestions to display a list of users and user groups who may be helpful additions to a Sidebar discussion.

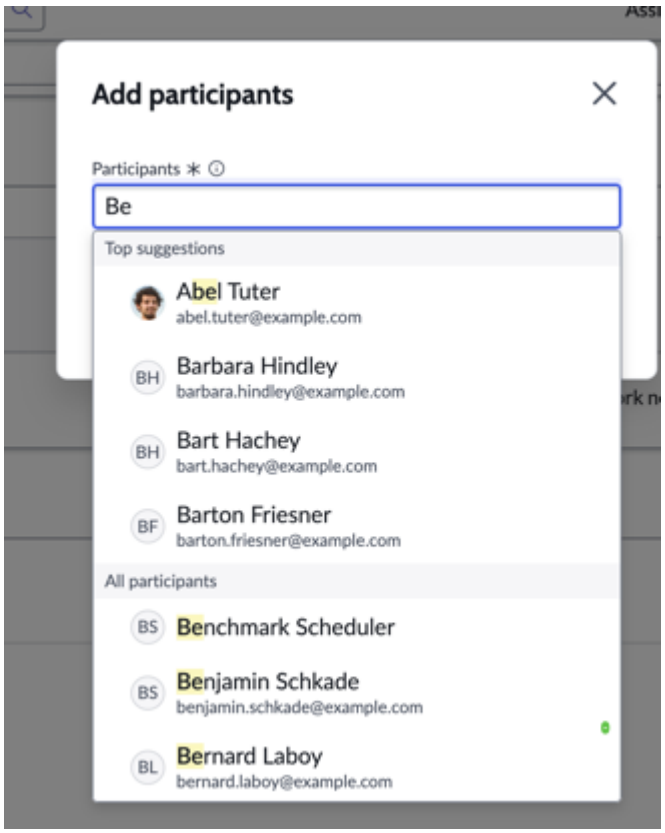When you add participants to a Sidebar discussion, a drop-down list displays users and user groups that can be added. If Participant suggestions are activated, the top of the list displays "top suggestions." The participant suggestions include users or user groups who may be helpful due to their related expertise and also have access to the record.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Requirements

Participant suggestions have the following requirements:

- Plugin requirements: To access the base Participant suggestions service, you must download the Participant suggestions plugin (com.glide.sn_participant_suggestions). Participant suggestions are optimized only for interactions, tasks, and the task's child tables. If you want to receive participant suggestions for any other table, you have to customize the Participant suggestions service. The Participant suggestions plugin works in conjunction with the Sidebar/ Omni-Experience Standard feature Set plugin. Both the Participant suggestions plugin and the Sidebar plugin must be installed before you can view the list of suggested users.
- Lookup table: The lookup table (suggestion_service_lookup) for participant suggestions applies only to the base Participant suggestion service and not to any third-party participant suggesting services.

Configuring Sidebar

Install and configure Sidebar so agents can have real-time collaboration with others.

Configuration overview

Configuring Sidebar involves installing Sidebar, adding the Discuss button, configuring the Sidebar member query, and configuring participant finder. There are also additional steps if you want to integrate Sidebar with Microsoft Teams.

1. Install Sidebar.

   You can install Sidebar, which is part of the Omni-Experience Standard Feature Set, if you have the admin role.

2. Set up Sidebar.

   Activate and configure options.

3. Add the Discuss button.

   Add the Discuss button to assets that do not have it installed and to custom workspaces where you need to enable Sidebar on an asset.

4. Configure the Sidebar member query.

   Configuring the Sidebar member query causes the participants list on the Start a Sidebar discussion screen to be pre-populated.

5. Enable Sidebar and Microsoft Teams users to communicate with each other by integrating the applications:

   a. Sidebar and Teams integration overview.

   b. Integrate Sidebar and Microsoft Teams.

   c. Enable or configure the Microsoft Teams integration.

Installing Sidebar

You can install Sidebar, which is part of the Omni-Experience Standard Feature Set, if you have the admin role.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Before you begin

Ensure that the application and all of its associated ServiceNow® Store applications have valid ServiceNow® entitlements. For more information, see Get entitlement for a ServiceNow product or application.

Role required: admin

About this task

The following items are installed with Sidebar:

- Plugins
- Roles
- Tables

Procedure

1. Navigate to **All** > **System Applications** > **All Available Applications** > **All**.
2. To find the Sidebar application, enter `omni-experience standard feature set` in the filter criteria.

   If you cannot find the application, you might have to request it from the ServiceNow Store.

   Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.
3. In the Application installation dialog box, review the application dependencies.

   Dependent plugins and applications are listed if they will be installed, are currently installed, or need to be installed. If any plugins or applications need to be installed, you must install them before you can install Sidebar feature.
4. **Optional:** If demo data is available and you want to install it, select the **Load demo data** check box.
   Demo data are sample records that describe application features for common use cases. Load the demo data when you first install the application on a development or test instance.
5. Select **Install**.
6. If you want to use the Search quick action, enable AI Search.
   For more information, see AI Search and AI Search Availability [KB0867751].

Setting up Sidebar

Enabling participant suggestions in Sidebar displays a list of knowledgeable users who can help with the issue. After you enable participant suggestions, you can configure who Sidebar decides is knowledgeable user and which groups have access. After installing Sidebar, activate and configure Sidebar so agents can collaborate with others to resolve issues.

Before you begin

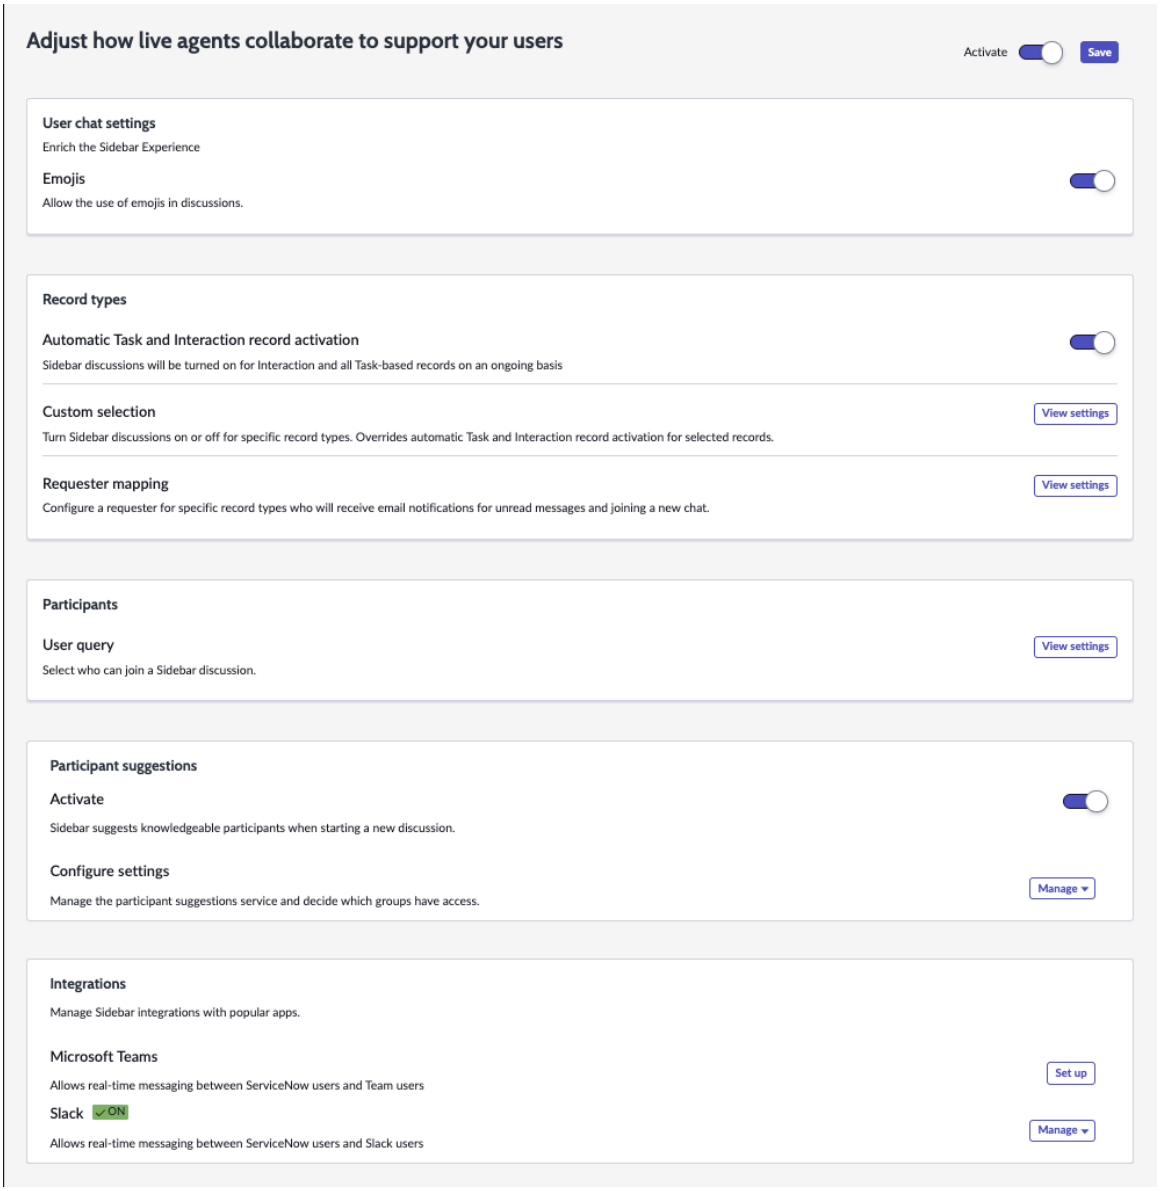
Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select **Sidebar** from the left menu.
   The Sidebar setting screen titled "Adjust how live agents collaborate to support your users" appears.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

3. Activate Sidebar by enabling the **Activate** option and selecting **Save**.
   The screen with the Sidebar configuration options appears.



4. Configure the options.

User chat settings

Field	Description
Emojis	Slide the toggle switch to activate or deactivate emojis.

Record types

Field	Description
Automatic Task and Interaction record activation	Slide the toggle switch to activate Sidebar discussions for interaction and task-based records.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Custom selection	Select **View settings** to display the Sidebar Enabled Tables screen.
Requester mapping	Select **View settings** to display the Collaboration Chat Requester Mapping screen. The requester is the person requesting the record and any updates about unread messages in related Sidebar discussions will be sent to the requester.


Participants

Field	Description
User query	If you select **View settings** one of the following lists displays: ○ Users that are automatically pre-filled for the agent to add to a discussion ○ Users that display when the agent searches for participants to add to a discussion For more details, see Configuring Sidebar member query.

Participant suggestions

Field	Description
Activate	Slide the toggle switch to activate or deactivate participant suggestions. Use the participant suggestions to display a list of users and user groups who may be helpful in the Sidebar discussion. For detailed information on participant suggestions, see Participant suggestions in Sidebar.
Configure settings	If you activate participant suggestions, the Manage drop-down list appears. Select a configuration option: ○ View Configuration - displays the Participant suggestions table and related lists. ○ View Permissions - displays the Participant suggestions permissions page where you configure whether participant suggestions display for specific groups or all groups. To enable all groups to view participant suggestions, select **Allow all groups** and then **Save**. Permissions can't be configured at an individual user level, so ensure that any users you want to be included belong to a relevant group.

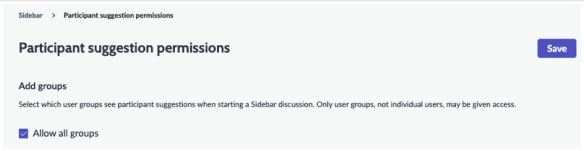© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	 For detailed information on participant suggestions configuration settings, see Participant suggestions in Sidebar.

Integrations

Field	Description
Microsoft Teams	If Sidebar isn't already integrated with Microsoft Teams, select **Set up** to configure the options for the first time. See Enable or configure the Microsoft Teams integration for more information. If Sidebar has already been integrated with Microsoft Teams, the Manage drop-down list appears. Select a configuration option: ○ View configuration (for more information, see Enable or configure the Microsoft Teams integration). ○ View permissions (for more information, see Manage Microsoft Teams permissions) ○ Remove integration - if you select this option, a warning message displays that the integration between Sidebar and Microsoft Teams will be removed. Select Cancel if you don't want to remove the integration or select Remove if you want to remove the integration.
Slack	If Sidebar isn't already integrated with Slack, select **Set up** to configure the options for the first time. If Sidebar has already been integrated with Slack, the Manage drop-down list appears. Select a configuration option: ○ View configuration ○ Remove - if you select this option, a warning message displays that the integration between Sidebar and Slack will be removed. Select Cancel if you don't want to remove the integration or select Remove if you want to remove the integration.

Sidebar can be integrated with either Microsoft Teams or Slack, it can't be integrated with both at the same time. The messaging system that is currently integrated with Sidebar is indicated with the On icon (ON) next to it.

5. Select **Save**.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Sidebar requester mapping

Create a requester mapping to define the requesting user for a record. This requester is used to identify the main contact for a record and Sidebar sends an email notification to the requester when they have unread messages in their discussions in the last 24 hours.

Before you begin
Role required: admin

Procedure

On the Collaboration Chat Requester Mapping screen, fill in the fields:

Field	Description
Active	Activates the requester-mapping record.
Inherit	Extends and applies the feature to the child tables.
Table	Table to which the requester mapping should be applied.
Order	Order of the configuration. You can define multiple requester mapping configurations for a single table. The system executes the query in the descending order.
Requester	Requester for a record.
Domain	Domain for the record.

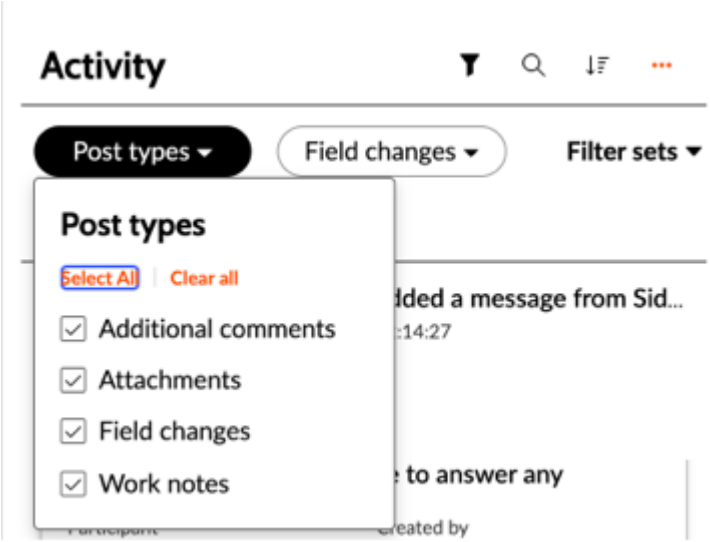
Integrating Sidebar and activity stream

For agents to post Sidebar discussions in the activity stream, Sidebar must be integrated with the activity stream and Sidebar options must display in the post filters. If the Sidebar options don't display in the post filters, you must add them.

Before you begin
Role required: admin


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
List of post types without Sidebar options:




Procedure

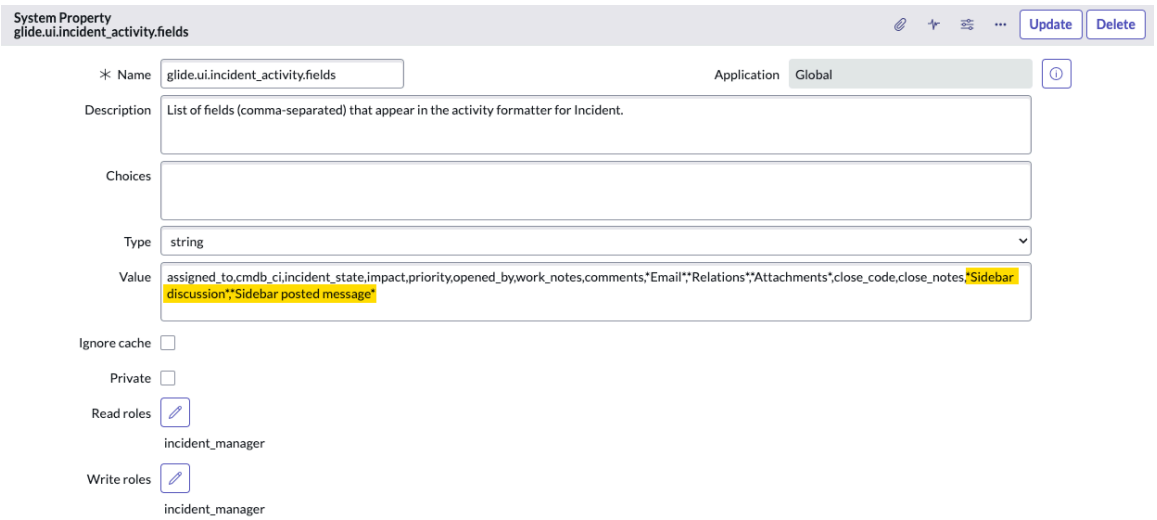1. If Sidebar was automatically installed in the workspace:
   a. Check the `sys_properties` file for the record glide.ui.{table_name}_activity.fields where {table_name} is the parent record table name.
   b. If the `sys_properties` file record exists for the record table, check whether it includes **Sidebar discussion** and **Sidebar posted message**. If it doesn't, add **Sidebar discussion** and **Sidebar posted message** at the end of the existing value.




2. If Sidebar was manually added for a record in a workspace:
   a. Check the `sys_properties` file for glide.ui.{table_name}_activity.fields where {table_name} is the parent record table name.
   b. If the `sys_properties` file record exists for the record table, check whether it includes **Sidebar discussion** and **Sidebar posted message**. If it doesn't, add **Sidebar discussion** and **Sidebar posted message** at the end of the existing value.

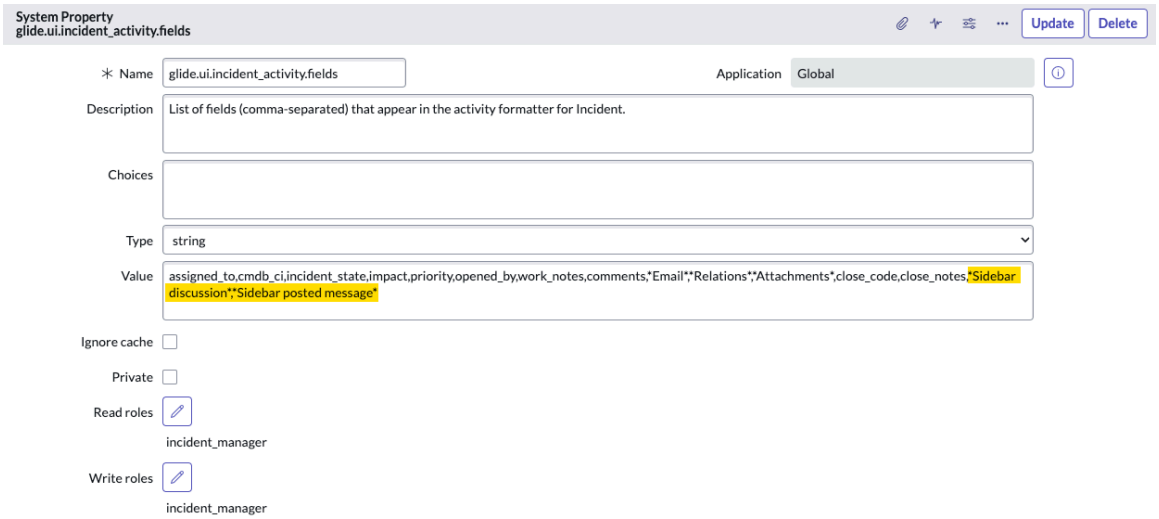© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.



c. If the `sys_properties` file record doesn't exist for the record table, it loads the default filters which contain Sidebar filters.

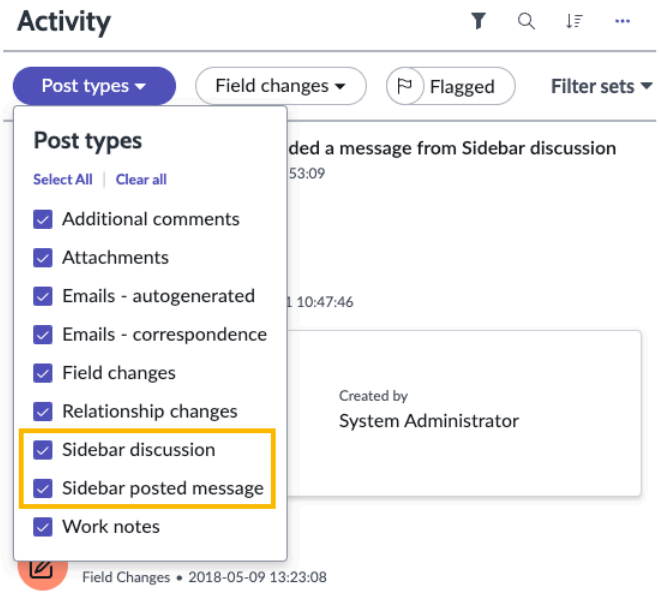Note:
List of post types with Sidebar options:



Adding the Discuss button

To use Sidebar, you must add the **Discuss** button to assets that do not have it automatically installed and to custom workspaces where you need to enable Sidebar on an asset. After you add the **Discuss** button, you can create Sidebar discussions.

Before you begin

Role required: admin

About this task

You do not need to add the **Discuss** button to these workspaces because it is automatically installed for the specified types:


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Workspace	Button shipped with base system
CSM Configurable Workspace	Case, interaction
CSM Manager Workspace	Case, interaction
FSM Dispatcher Workspace	Task, work order
HR Agent Workspace (Configurable only)	Case
HR Manager Workspace	Case, catalog task, change request, change task, incident, interaction, problem, request item
ITSM Manager Workspace	Catalog task, change request, incident, interaction, request, request item
Vendor Management Workspace	Change request, CMDB CI outage, core company, service credit

Note:
After you add the **Discuss** button, you must configure the activity stream. For more information, see Activity stream in Sidebar.

Procedure

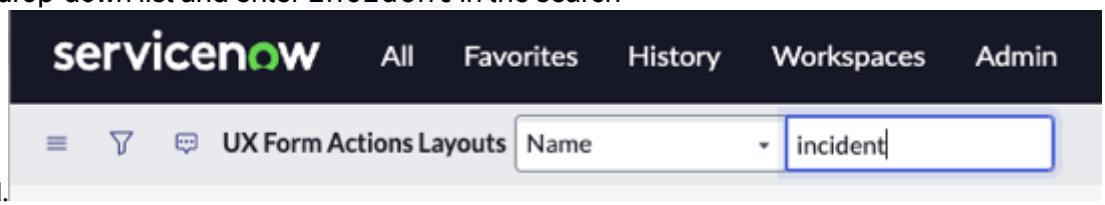1. Navigate to **All** > **UX Form Actions Configs**.
2. On the UX Actions Configurations screen, select the workspace where you want to add the **Discuss** button.
3. On the UX Form Actions Layouts screen, select **Name** from the drop-down list and enter `incident` in the search field.



4. Select the search result that has the name Incident and an Action Config of SOW Actions. The UX Form Actions Layout - Incident screen displays.
5. Check that you're in the correct application scope.

   Example
   For example, use workforce optimization configurable workspace core application for Manager Workspace Actions.
6. Select the UX Form Action Layout Items tab.
7. Create a new record or edit an existing one:
   - Create a new record - create a new UX Form actions layout record to add a Sidebar discussion button to assets that extend from task and interaction tables.

     a. Define the name and select the table from the drop-down menu.

     Note:
     The remaining fields should be filled in automatically. Note that Sidebar discussions only support tables that extend from the task and interaction tables.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

b. On the UX Form Actions Layout Item screen, enter this information:

Field	Value
Name	Open Collab Chat
Label	Discuss
Action	Open collab chat (Make sure the right action is selected as per your need. Either Open collab chat for Task or for Interaction. In this example we are configuring Discuss button on Incident, so we have used Open collab chat action for Task)
Application	Incident Management – Service Operations Workspace
Table	Global

c. If your organization has multiple UX Form Actions Layout items for Sidebar discussions, ensure that you relate the proper items to actions based on the label value.

d. Select `Save`.

- Edit an existing record.

a. Select `Edit`.

b. Search for label value "Discuss" in the Collection field.

c. Add it to the UX Form Actions Layout Item list.

d. Select `Save`.

e. If your organization has multiple UX Form Actions layout Items for Sidebar discussions, ensure that you relate the proper items to actions based on the label value.

8. In the filter navigation field, enter `sys_us_form_action_layout.list`.
9. Filter for name = Incident and Action Config = SOW.
10. Select the **UX Form - Action Layout Items** tab.
11. Select **New** to create a new entry and enter the following fields:

Field	Value
Name	Open Collab Chat
Label	Discuss
Action	Open collab chat (make sure the right action is selected as per your need Either Open collab chat for task or for interaction.)
Application	Incident Management - Service Operations Workspace
Table	global

12. Save the UX form Action Layout item..

What to do next

If you want to enable Sidebar for non-task tables and add the Discuss button to the layout, see Adding the Discuss button for non-task tables.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Adding the Discuss button for non-task tables

To use Sidebar in non-task tables, follow this procedure to add the Discuss button to the layout.

Before you begin

Role required: admin

Procedure

1. Enter `sys_declarative_action_assignment.list` in the filter navigator.
2. Filter the Action Label values that contain Open create collab chat modal.
3. Select the record result that you want to edit.
4. From the Open create collab chat modal Action Assignment, scroll down to Related Links and select the UX Add-on Event Mappings tab.
5. Open the UX Add-on Event Mapping record and verify if the Application field uses the Common Page Template.
6. Create a new UX Add-on Event Mapping by copying all field values from the base level Open create collab chat record including Source element ID, Source declarative Action, Target Event and Target Payload Mapping.
7. Search for the custom Parent Macroponent that your organization uses if needed.
8. Select **Save**.
9. If you're unsure of UX Macroponent being used within your Configurable Workspace, you can look up the Definition Record by navigating to UI Builder, selecting Menu > Developer > Open page definition.

Configuring Sidebar member query

Configuring the Sidebar member query pre-populates the participants list on the Start a Sidebar discussion screen.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. From the menu on the CI Admin Experience page, select Sidebar.
   The Sidebar settings screen with the heading "Adjust how live agents collaborate to support your users" displays.
3. From the Participants section on the Sidebar settings screen, select **View Settings**.
   The Sidebar Member Query screen displays.
4. Do one of the following:
   - To edit an existing query, select the name of the query.
   - To create a new query, select **New**.
5. Fill in the fields:

Field	Description
Name	Name of the member query.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Active	Indicates whether the query is active.
Type	From the drop-down list, select **Pre-fill** or **Search**. ○ Pre-fill: Automatically select all members of the assignment group. ○ Search: Add only members of the assignment group.
Order	Order in which the routing condition for this queue is considered, in comparison to other queues.
Application	Type of scoped application.
Condition Mode	Type of condition for routing work items in the query. From the drop-down list, select **Advanced** or **Simple**. ○ Simple: Specify a routing condition using the condition builder. ○ Advanced: Specify a JavaScript scripted condition.
Condition table	Displays if you selected **Simple** for the Condition Mode. From the drop-down list, select the table.
Condition	Displays if you selected **Simple** for the Condition Mode. Use the **Add Filter Condition** and **Add "OR" Clause** buttons to create the condition for the query.
Condition Script	Displays if you selected **Advanced** for the Condition Mode. Enter a JavaScript script to build the query.
User Query Mode	From the drop-down list, select **Advanced** or **Simple**. ○ Simple: Specify a routing condition using the condition builder. ○ Advanced: Specify a JavaScript scripted condition.
User Query Condition	Displays if you select **Simple** for the User Query Mode. Use the **Add Filter Condition** and **Add "OR" Clause** buttons to create the condition for the query.
User Query Script	Displays if you select **Advanced** for the User Query Mode. You can specify a JavaScript script to build the query.

6. Select **Submit**.

Sidebar and Microsoft Teams

Sidebar's integration with Microsoft Teams enables Sidebar users and Microsoft Teams users to communicate with each other from their respective platforms.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Monetization by Microsoft

The Sidebar-Microsoft Teams integration is available as a standard ServiceNow feature, however Microsoft intends to monetize any use of their Microsoft Teams API based on a rate charge per message:

- The rate charge applies each time the Microsoft Teams API is called. Charges apply for messages sent from your ServiceNow instance to Microsoft Teams and vice versa.
- The rate charge doesn't apply to "means to an end" actions such as searching for or adding users to a Microsoft Teams group chat, user presence, or reactions.
- To minimize the number of API calls to Microsoft Teams, the base system Sidebar-Microsoft Teams integration requires at least one participant is an external only user (a user that doesn't have a corresponding sys_user record). If you want to modify this base system behavior, see Manage Microsoft Teams permissions for information on how to add the internal user or group that the internal user is part of.

Microsoft bills ServiceNow customers directly via their Microsoft Azure account. For more information, see Licensing and payment requirements for the Microsoft Teams API.

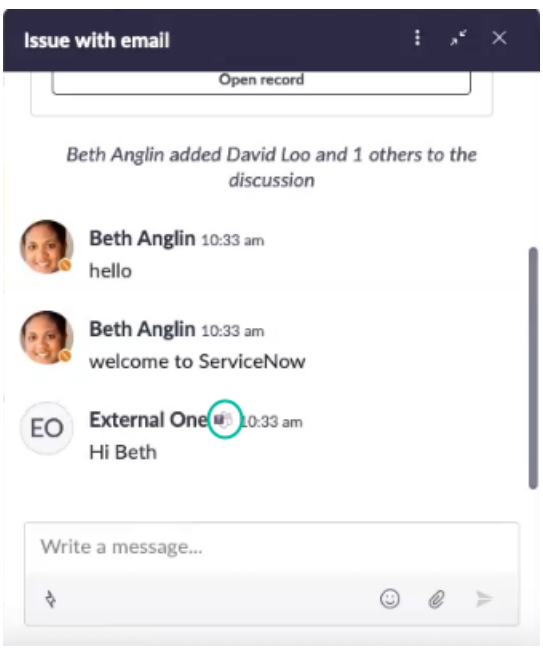
Authenticating Sidebar users in Microsoft Teams

A Sidebar user must already have a Microsoft Teams account to communicate with a Microsoft Teams user. Microsoft Teams authenticates each Sidebar user to confirm that they have a Microsoft Teams account. This authentication ensures that Microsoft Teams can create a group chat that includes the Sidebar user's Microsoft Teams account. If the Sidebar user has a Microsoft Teams account but isn't signed in, they're prompted to sign in.

Differentiating between Sidebar and Microsoft Teams users




To differentiate Sidebar users from Microsoft Teams users, a Microsoft Teams icon displays next to the Microsoft Teams users' names. This icon is visible in discussion windows and search results, but doesn't appear in the activity stream.

Examples with Microsoft Teams icon

Discussion window with Microsoft Teams icon	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

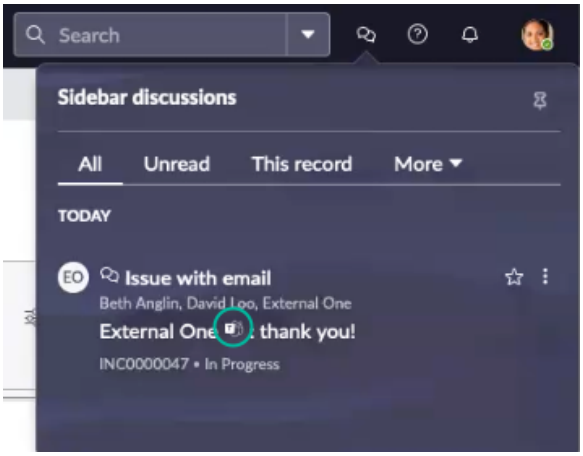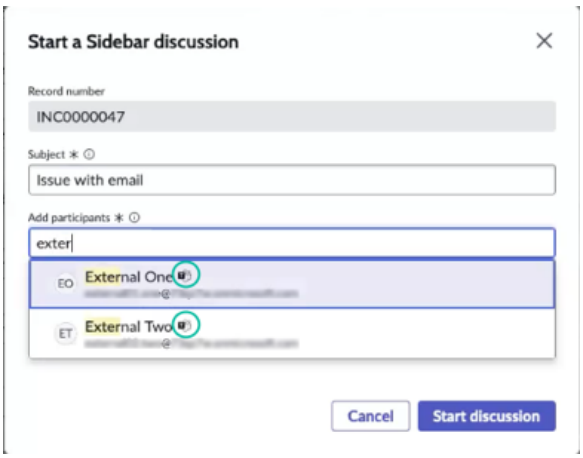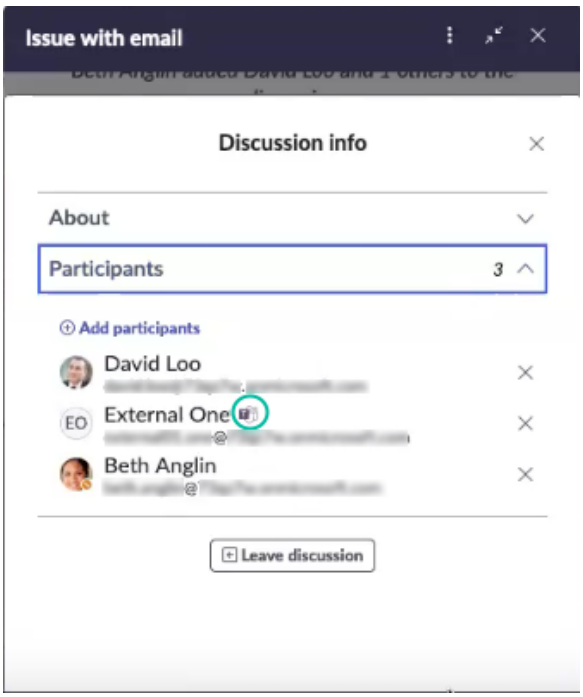Examples with Microsoft Teams icon (continued)

All tab on the Discussion window with Microsoft Teams icon	
Discussion window with Microsoft Teams icon next to search results	
Discussion info window with Microsoft Teams icon	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Adding users to a discussion

Sidebar users can enter the partial or full name of a user that they want to add to the discussion. If the user exists in the system, the user's name appears and can be selected to be added to the discussion. Users who have access to Microsoft Teams but not ServiceNow can be identified by the Microsoft Teams logo in their avatar image. Microsoft Teams users can add participants to the discussion by adding them to the group chat on Microsoft Teams. Doing this automatically adds those users to the discussion in Sidebar.

Note:
A maximum of 250 users can be added to a Microsoft Teams group chat.

Sending messages between Sidebar and Microsoft Teams

After Sidebar and Microsoft Teams are integrated, you can send these types of messages between the two applications:

- Messages with plain text
- Messages with emojis
- Messages with URLs
- Messages with attachments

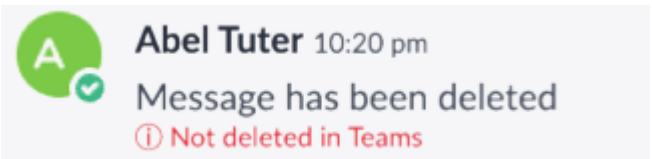
Actions performed in the Sidebar discussion are reflected in Microsoft Teams and actions performed in Microsoft Teams are reflected in Sidebar. If you reply to a message in a Microsoft Teams group chat, the message displays in Sidebar however, it doesn't display as a reply to the original message.

Errors messages appear in these situations:

- If Sidebar is unable to deliver a message to a Microsoft Teams user, the message "Not delivered in Teams" displays. Depending on how error message notifications in Sidebar are configured, the message displays to just the Sidebar user who sent the message or to all Sidebar users in the discussion.




- If you delete a message that you previously sent from Sidebar to Microsoft Teams but Microsoft Teams is unable to delete the message, then the message "Not deleted in Teams" displays.



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

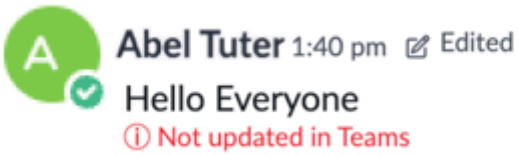- If you edit a message that you previously sent from Sidebar to Microsoft Teams but Microsoft Teams is unable to update the message, then the message "Not updated in Teams" displays.



Removing users from a discussion

Sidebar users can remove a Microsoft Teams user from a Sidebar discussion. When a Microsoft Teams user is removed from a discussion, Sidebar and Microsoft Teams users see a message that the user has been removed from the discussion. After a Microsoft Teams user is removed from the discussion, that user can still access the group chat on Microsoft Teams and view older messages, but they can no longer participate in the discussion. If a Microsoft Teams user leaves a discussion on their own, both Sidebar and Microsoft Teams users see a message that the Microsoft Teams user has left the discussion.

Message history

If the admin enables Microsoft Teams group chats for a user, the message history of any Sidebar discussions that the user is already participating in aren't preloaded in the Microsoft Teams group chat. In the Microsoft Teams group chat, the user will only receive messages that are sent after the admin enables them to receive Microsoft Teams group chats.

ServiceNow's access to Microsoft Teams messages

ServiceNow's access to Microsoft Teams group chats and messages is restricted to the ones generated as part of the Sidebar and Microsoft Teams integration.

Synchronizing of participants

The discussion participants aren’t synchronized if the integration between Sidebar and Microsoft Teams is changed multiple times.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Synchronizing example

Initial configuration



1. Admin activates the Sidebar-Teams integration.



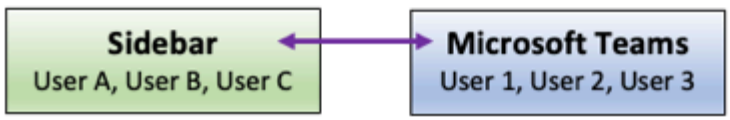
2. Admin deactivates the Sidebar-Teams integration.
3. Sidebar User A is removed from the discussion on Sidebar.
4. Teams User 3 is removed from the Teams group chat and User 4 is added to the Teams group chat.



5. Admin reactivates the Sidebar-Teams integration.

Result

Discussion groups are NOT updated and remain as they were before the Sidebar-Teams integration was deactivated (User A, User B, User C on Sidebar and User 1, User 2, and User 3 on Teams).



Domain separation with Sidebar-Microsoft Teams integration

If Sidebar is integrated with Microsoft Teams, domain separation isn't supported on the Microsoft Teams instance. As a result, the **Set up** button for Microsoft Teams is disabled on the Settings page. For example, if you've configured two domains on ServiceNow but use only one Microsoft Teams instance, you can't partition the Microsoft Teams instance to have part of it point to one domain and the other part to another domain.

Integrate Sidebar and Microsoft Teams

Enable conversations between Sidebar and Microsoft Teams users by integrating Sidebar with Microsoft Teams.

Follow these steps to integrate Sidebar and Microsoft Teams.

Note:
Some resources below require you to log in to sites like ServiceNow University, Now Create, or the ServiceNow Community. If the expected resource does not load, please log in and try to access the resource again.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. Install the store app on the Washington DC instance.
2. Create the Microsoft Teams developer account and Azure app. See KB article KB1225842 for more information.
3. Create the Microsoft Teams app. See KB article KB1225842 for more information.
4. Enable the Microsoft Teams integration using the information in Enable the Microsoft teams integration.

Enable or configure the Microsoft Teams integration

Enable or configure the Microsoft Teams integration as part of integrating Sidebar with Microsoft Teams.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select Sidebar.
3. On the Integrations card:
   - If Sidebar and Microsoft Teams are not already integrated, select **Set up**.
   - If Sidebar and Microsoft Teams are already integrated, select **View configuration** from the Manage drop-down list.
4. On the Microsoft Teams Integration screen, slide the activate toggle to allow or prevent Microsoft Teams users from participating in Sidebar discussions.
   - When this is switched on, Microsoft Teams users that previously had access to Sidebar will regain access and any Microsoft Teams users that are newly included will gain access to Sidebar.
   - When this is switched off:
     - Microsoft Teams users that previously had access to Sidebar will no longer have access to Sidebar.
     - Any Microsoft Teams users that are newly included will not gain access to Sidebar.
     - Existing discussions will become inactive in Microsoft Teams. Microsoft Teams users will still be able to access older messages in a Microsoft Teams group chat, but any messages sent in those group chats will not be sent to Sidebar.
     - Existing discussions will remain active for Sidebar users.
5. Enter **Client Secret**, **Callback URL**, and **Redirect URL**.

Note:
For more information about the Microsoft Azure Portal fields needed, see Use the portal to create an Azure AD application.

Field	Description
Application (client) ID	ID associated with the app created in the portal.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Directory (tenant) ID	ID associated with the Microsoft Teams organization that will be linked to Sidebar discussions.
App ID	ID used to subscribe to Sidebar conversations from Microsoft Teams.
Client Secret	Auto-assigned credentials used to authenticate the Microsoft Azure app with Microsoft. If this field is changed, then a new integration setup will be triggered.
Callback URL	Web location Microsoft Teams uses to send a response to Sidebar. For your own instance, add the value like https://your-instance.service-now.com/api/now/collaboration_chat_event_processor/chats. If this field is changed, then a new integration setup will be triggered.
Redirect URL	Web page that appears after you successfully log in to Microsoft Teams. If this field is changed, then a new integration setup will be triggered.

6. Select **Save**.

Manage Microsoft Teams permissions

Configure which groups or users can access Sidebar discussions in Microsoft Teams.

Before you begin

Role required: admin

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings**.
2. Select Sidebar.
3. From the **Manage** drop-down list on the Integrations card, select **View permissions**.
   The Microsoft Teams permissions page appears.
4. Select the **Groups** tab or the **Users** tab.

Groups tab

Field	Description
Filter by	Use the filter fields to limit which users display in the Available users list.
Apply Filter button	Select **Apply Filter** to limit the groups in the Available Groups list using the filter fields.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Available groups	Select the groups that can access the Sidebar discussions in Microsoft Teams.
Selected groups	List of the groups that can access Sidebar discussions in Microsoft Teams. To remove access, select X next to the group name. **Note:** All of the users in the selected group will have access to the discussions.

Users tab

Field	Description
Filter by	Use the filter fields to limit which groups display in the Available groups list.
Apply Filter button	Select **Apply Filter** to limit the users in the Available users list using the filter fields.
Available users	Select the users that can access the Sidebar discussions in Microsoft Teams.
Selected users	List of the users that can access Sidebar discussions in Microsoft Teams. To remove access, select X next to the user name.

5. Select **Save**.

Sidebar and Slack

Sidebar's integration with Slack enables Sidebar users and Slack users to communicate with each other from their respective platforms.

The base system Sidebar-Slack integration requires at least one participant is an external only user (a user that doesn't have a corresponding sys_user record).

Authenticating Sidebar users in Slack

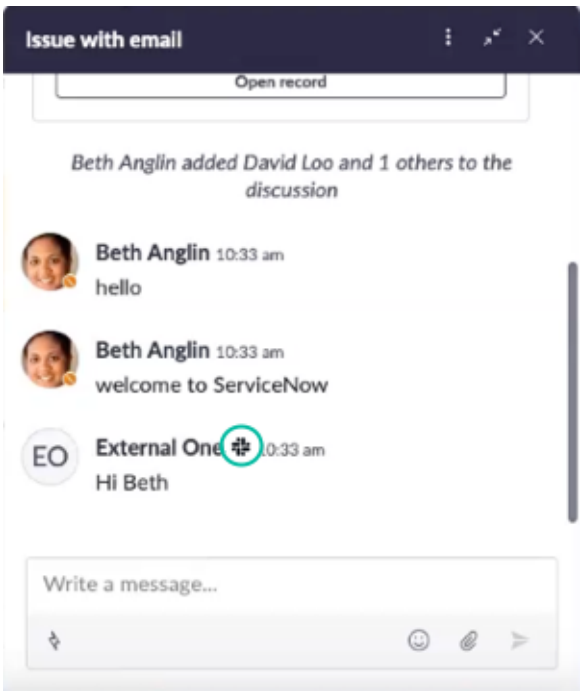
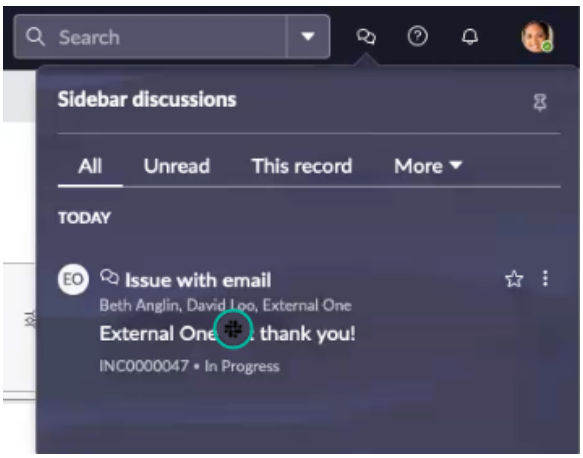
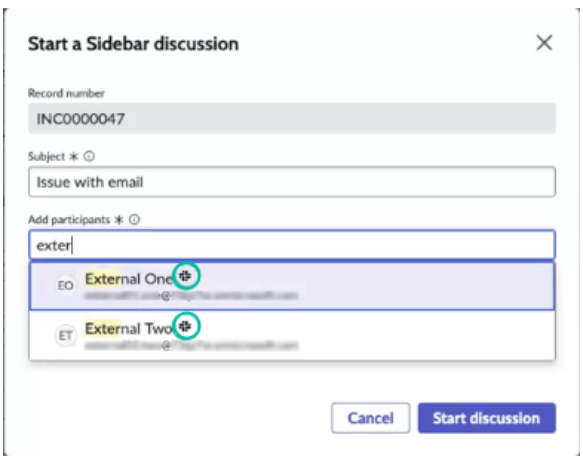
A Sidebar user must already have a Slack account to communicate with a Slack user. Slack authenticates each Sidebar user to confirm that they have a Slack account. This authentication verifies that Slack can create a private channel chat that includes the Sidebar user's Slack account. If the Sidebar user has a Slack account but isn’t signed in, they’re prompted to sign in.

Differentiating between Sidebar and Slack users

To differentiate Sidebar users from Slack users, a Slack icon ( ) displays next to the Slack users' names. This icon is visible in discussion windows and search results, but does not appear in the activity stream.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Examples with Slack icon

Discussion window with Slack icon	
All tab on the Discussion window with Slack icon	
Discussion window with Slack icon next to search results	

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

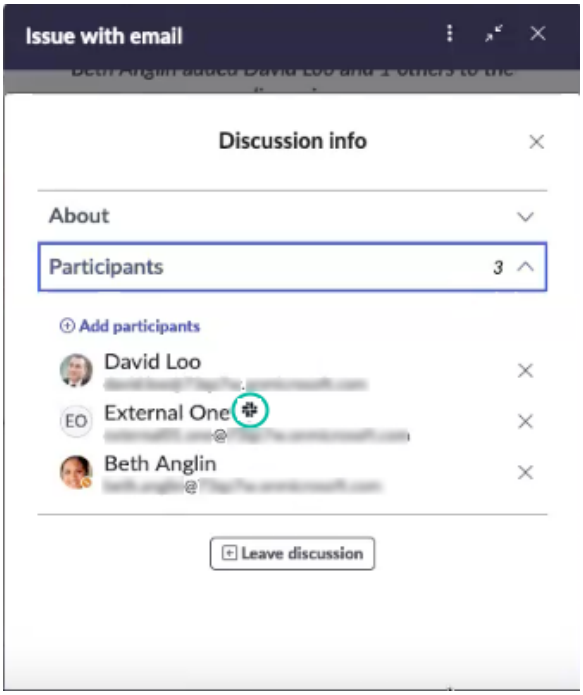Examples with Slack icon (continued)

Discussion info window with Slack icon	

Adding users to a discussion

Sidebar users can enter the partial or full name of a user that they want to add to the discussion. If the user exists in the system, the user's name appears and can be selected to be added to the discussion. Users who have access to Slack but not ServiceNow can be identified by the Slack logo in their avatar image. Slack users can add participants to the discussion by adding them to the group chat on Slack. Doing this automatically adds those users to the discussion in Sidebar.

Note:
A maximum of 250 users can be added to a Slack private channel.

Synchronizing Sidebar and Slack users

If Sidebar and Slack are integrated, a job runs every 30 minutes to synchronize the Sidebar and Slack users. If a Slack user's email matches a Sidebar user's email, the Slack user is mapped to the Sidebar user.

Validating messages

Messages that are sent from Slack to Sidebar are verified using Slack's signing secret.

Sending messages between Sidebar and Slack

After Sidebar and Slack are integrated, you can send these types of messages between the two applications:

- Messages with plain text
- Messages with images
- Messages with emojis
- Messages with URLs

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

- Messages with attachments
- Messages with links to ServiceNow records

Removing users from a discussion

Sidebar users can remove a Slack user from a Sidebar discussion. When a Slack user is removed from a discussion, Sidebar and Slack users see a message that the user has been removed from the discussion. After a Slack user is removed from the discussion, they can still access the group chat on Slack and view past messages, but they can no longer participate in the discussion. If a Slack user leaves a discussion on their own, both Sidebar and Slack users see a message that the Slack user has left the discussion.

Message history

If the admin enables Slack group chats for a user, the message history of any Sidebar discussions that the user is already participating in aren't preloaded in the Slack group chat. In the Slack group chat, the user will only receive messages that are sent after the admin enables them to receive Slack group chats.

ServiceNow's access to Slack messages

ServiceNow's access to Slack group chats and messages is restricted to the ones generated as part of the Sidebar and Slack integration.

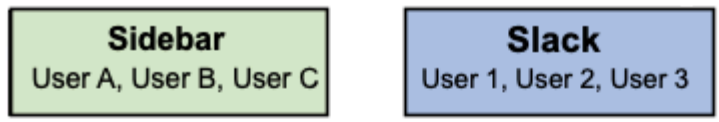
Synchronizing of participants

The discussion participants aren’t synchronized if the integration between Sidebar and Slack is changed multiple times.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Synchronizing example


Initial configuration



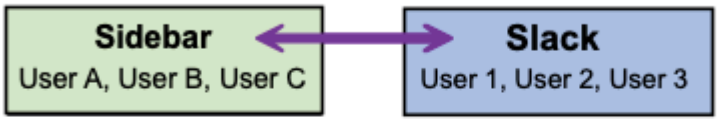1. Admin activates the Sidebar-Slack integration.



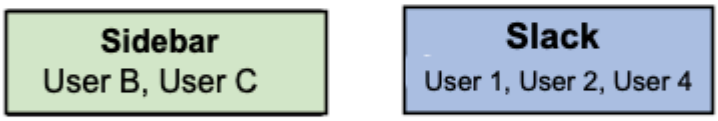
2. Admin deactivates the Sidebar-Slack integration.
3. Sidebar User A is removed from the discussion on Sidebar.
4. Slack User 3 is removed from the Slack private channel and User 4 is added to the Slack private channel.



5. Admin reactivates the Sidebar-Slack integration.

Result

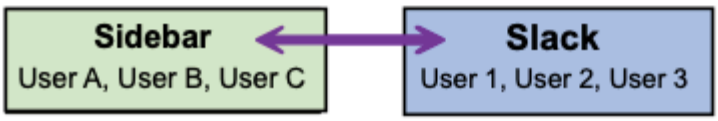Discussion groups are NOT updated and remain as they were before the Sidebar-Slack integration was deactivated (User A, User B, and User C on Sidebar and User 1, User 2, and User 3 on Slack).



Domain separation with Sidebar and Slack integration

If Sidebar is integrated with Slack, domain separation is not supported on the Slack instance. As a result, the **Set up** button for Slack is inactive on the Settings page. For example, if you've configured two domains on ServiceNow but use only one Microsoft Teams instance, you can't partition the Microsoft Teams instance to have part of it point to one domain and the other part to another domain.

Integrate Sidebar and Slack

Enable conversations between Sidebar and Slack users by integrating Sidebar with Slack.

Follow these steps to integrate Sidebar and Slack.

Note:
Some resources below require you to log in to sites like ServiceNow University, Now Create, or the ServiceNow Community. If the expected resource does not load, please log in and try to access the resource again.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

1. Set up the Slack account.
2. Add Slack users.
3. Enable Slack from ServiceNow.
4. Configure event subscription and Webhook URL.

Set up the Slack account

Set up the Slack account.

Before you begin
Role required: none

Procedure

1. From the Slack developer program, sign in to your Slack developer account.
2. On the Slack dashboard, select **Your apps** from the upper right-hand corner of the screen.
3. From the Your Apps screen, select **Create an App.**
4. On the Create an app dialog, select **From scratch**.
5. On the Name app & choose workspace dialog, fill out the fields:
   - App Name - name for the application you are going to create. Make a note of the app name because you will need it in the remaining procedures.
   - Pick a workspace to develop your app in - from the drop-down list, select the workspace where your app will reside. Make a note of the app name because you will need it in the remaining procedures.
6. Select **Create App**.
7. In a browser window, enter `https://api.slack.com/apps` and select the app you created in step 5.
8. From settings, select **Oauth & Permissions**.
9. In the Redirect URLs dialog, enter `https://{instance_url}/oauth_redirect.do`
10. Select **Add New Direct URL**.
11. Add these Oauth scopes from the User Token Scope section:

OAuth Scope	Description
channels:history	View messages and other content in a user's public channels.
channels:read	View basic information about public channels in a workspace.
channels:write	Manage a user's public channels and create new ones on a user's behalf.
channels:write.invites	Invite members to public channels.
chat:write	Send messages on a user's behalf.
files:write	Upload, edit, and delete files on a user's behalf.
groups:read	View basic information about a user's private channels.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

OAuth Scope	Description
groups:write	Manage a user's private channels and create new ones on a user's behalf.
groups:write.invites	Invite members to private channels.
im:read	View basic information about a user's direct messages.
im:write	Start direct messages with people on a user's behalf.
mpin:read	View basic information about a user's group direct messages.
mpin:write	Start group direct messages with people on a user's behalf.
users:read	View people in a workspace.
users:read.email	View email addresses of people in a workspace.

12. Add these Oauth scopes from the Bot Token Scope section:

OAuth Scope	Description
users:read	View people in a workspace.
users:read.email	View email addresses of people in a workspace.

Add Slack users

Invite users to Slack if the Slack users do not already exist.

Before you begin

Role required: admin

Procedure

1. In a browser window, enter `<workspace name>/admin` where `<workspace name>` is the name of the workspace you specified when you created the app in Set up the Slack account.
2. Select **Invite People**.
3. Add the email addresses of the users you want to add.
   Emails will be sent to the invited users.
4. Log in to the user email and accept the invitation.
5. Select **Launch** to launch the Slack chat panel.

Enable Slack from ServiceNow

Ensure the email field of system user records that will be mapped to Slack users are properly updated. This must be done before the scheduled job that syncs the users between Slack and ServiceNow runs.

Before you begin

Role required: admin

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Navigate to **All** > **Conversational Interfaces** > **Settings** > **Sidebar**.
2. In the Integrations section, select **Set up** for Slack.
3. On the Slack integration setup page, fill in the Slack credential fields:
   - Client ID - ID associated with the app you created.
   - Client Secret - auto-assigned client secret located on the Slack App Credentials screen.
   - Signing secret - auto-assigned signing secret located on the Slack App Credentials screen.
   - Bot User OAuth Token - auto-assigned token located on the Slack OAuth & Permissions screen. This field must begin with `xoxb`.
4. Select **Save**.
5. In the navigation filter, enter `sys_cs_collab_settings.list`.
6. On the Collab Chat Settings page, check that Enable Slack is set to true and that Preference Channel is set to Slack.

   Trouble?
   If Enable Slack is not set to true or the Preference Channel is not set to Slack, deactivate and then reactivate Slack.
7. In the navigation filter, enter `oauth_credential.list`.
8. On the OAuth Credentials page, check that a new record named Sidebar Slack Oauth Entity exists.
   This is the app level token that is required for the scheduled job to run successfully to sync the users.
9. In the navigation filter, enter `sys_cs_collab_provider_user_profile.list`.
10. On the Collaboration Chat Profiles page, check that Slack users have been imported properly.
11. Select **Discuss** and add at least one external user (a Slack user who does not have a ServiceNow account).

Configure event subscription and Webhook URL

Configure the event subscription and the Webhook URL.

Before you begin

Role required: admin

Procedure

1. Open the Slack app from step one.
2. Select **Event Subscriptions**.
3. In the Request URL field, enter the request URL.
   For example, enter `https://{instancename}/api/sn_oe_sfs/collaboration_slack_event_processor/chats`.
4. Select **Subscribe to events on behalf of users**.
5. Add these events:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Event Name	Description	Required Scope
member_joined_channel	A user joined a public channel, private channel, or MPDM.	channels:read or groups:read or mpim:read
member_left_channel	A user left a public or private channel.	channels:read or groups:read
message.channels	A message was posted to a channel.	channels:history
message.groups	A message was posted to a private channel.	groups:history
message.im	A message was posted in a direct message channel.	im:history

6. Select **Subscribe to bot Events**.
7. Add these events:

Event Name	Description	Required Scope
member_left_channel	A user left a public or private channel.	channels:read or groups:read
message.channels	A message was posted to a channel.	channels:history
message.im	A message was posted in a direct message channel.	im:history

Using Sidebar

You can create a Sidebar discussion for a task-based or interaction record or as a standalone conversation. Sidebar discussions for a task-based or interaction record can be created from a configurable workspace or a Next Experience Core UI record page.

To create a Sidebar discussion for a task-based or interaction record, see Create a Sidebar discussion for a record. To create a standalone Sidebar conversation, see Create a standalone Sidebar discussion.

Create a Sidebar discussion for a record

Collaborate with others by creating a Sidebar discussion for a task or interaction record. These discussions can be created from a Next Experience page or Core UI record page.

Before you begin

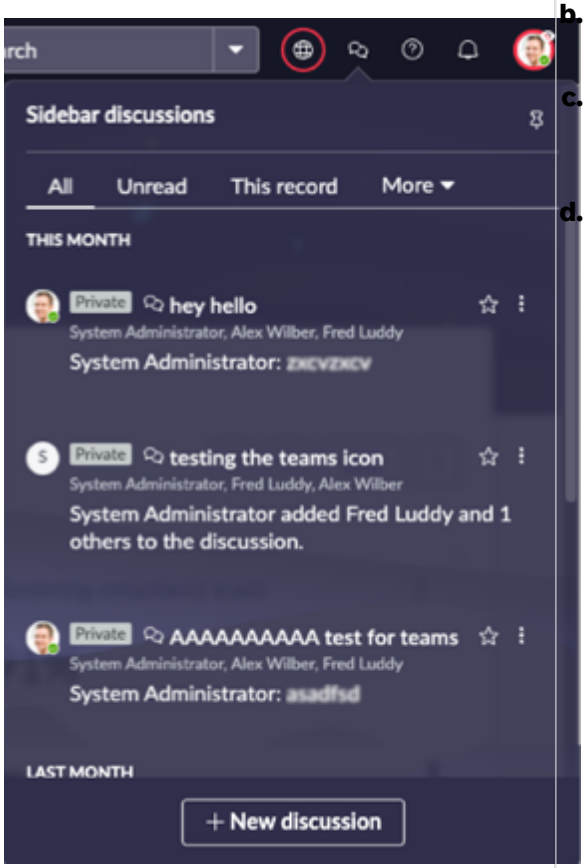
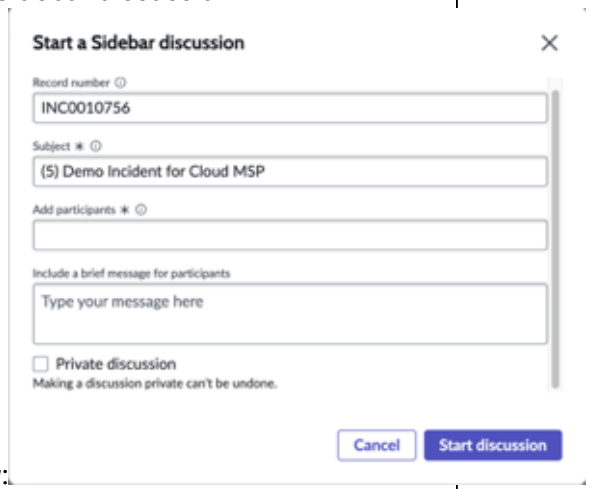
Role required: users with access to the record associated with the Sidebar discussion

Note:
To avoid incompatibilities with newer features, use Sidebar only on records that have an associated record number.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. Start a Sidebar discussion from a Next Experience page or a Core UI record:

Next Experience page	Core UI record
a. From the top menu, select the Sidebar discussion icon ( ) to display the Sidebar discussions window.  **b.** To display an existing Sidebar discussion, select it on the Sidebar discussion menu. **c.** Start a new Sidebar discussion by selecting **New discussion** to display the Start a Sidebar discussion window.	**a.** In the navigation filter, enter the type of record (interaction or task) for which you want to create a Sidebar discussion. **b.** Select **All** to display all records for the type you entered. **c.** On the Incidents or Tasks screen, select the record you want to create the Sidebar discussion for. **d.** On the Incident or Task screen, select **Discuss** to display the Start a Sidebar discussion window: 

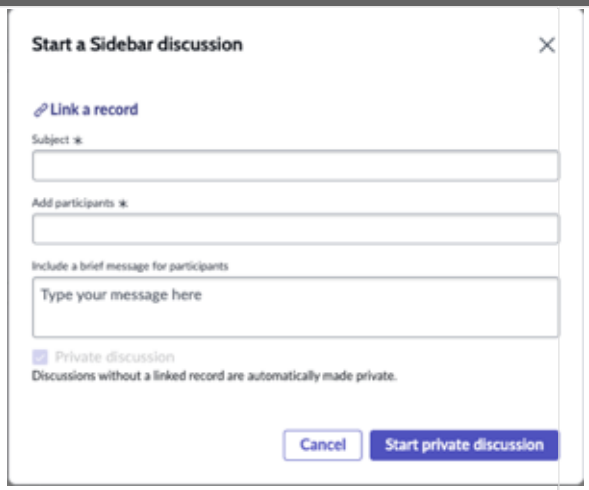© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Next Experience page	Core UI record
	
d. Select **Link a record** and enter the task or incident number in the Record number field.	

2. Fill in the fields on the Sidebar discussion window:

Field	Description
Record number	Record number associated with the Sidebar discussion.
Subject	This field is pre-populated with the record's short description. If the Subject starts with a number in parentheses, that number indicates what number this discussion is for the record. For example, if the subject line has "(2) Email issue," the "2" indicates the second discussion for the email issue record. You can edit or add to the Subject field.
Add participants	Select the user or user group to include in the discussion. If an assignment group was entered for this case/interaction/incident, this field is pre-populated with its members. ○ If you select individual users, only those users with access to the record can be added as participants. ○ If you select a user group, only those users within the group who have access to the record are added as participants. For more information, see Configuring Sidebar member query.
Include a brief message for participants	Enter a short message for the participants of the Sidebar discussion.
Private discussion	Select **Private discussion** to limit Sidebar discussion access to only the agent and other discussion participants. These

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
	discussions are marked "private" and can't be converted to not private. Participants can invite others to join the private discussion, provided the new participants have access to the record. Private discussions aren’t visible to non-participants in search results.


3. Select one of the following:
   - Start private discussion - start a private Sidebar discussion.
   - Start discussion - start a Sidebar discussion.
   - Cancel - cancel the discussion.
4. Once you start a discussion, you can edit and delete messages.

Option	Description
Edit a message	Select the More options icon next to the message and **Edit message**. The message appears in an Editing window where you can change the text. ○ You can only edit messages that you sent. ○ You can only edit one message at a time. ○ If you change the attachment of a message that you sent, both the old and new attachments display. ○ If a message you sent contains a URL, you can delete the message but you can't edit it.
Delete a message	Select the More options icon next to the message and **Delete Message**. A dialog displays asking if you’re sure you want to delete your message. Select **Delete** to delete the message or select **Cancel** to leave the message. ○ You can only delete messages that you sent. ○ After you delete a message, a notice with the date and time the message was deleted displays. ○ If you delete a message that mentions someone using @mention, then that @mention is also deleted. ○ You can't undo a deletion, after you delete a message it's gone.


5. To mention a user, enter `@user` (where `user` is the name of the user) or `@` to display a list of users and select someone from that list.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

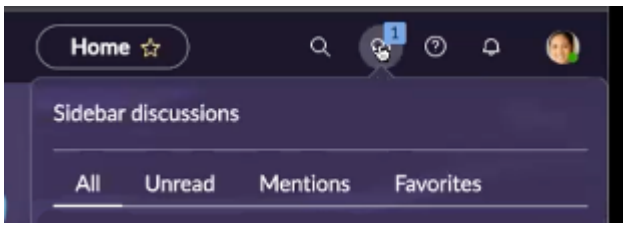- Only users who have access to the underlying record display in the list.
- The list is divided into users who are currently participating in the discussion (participants) and users who aren't (non-participants).
- The user is notified that they were mentioned in a Sidebar discussion message. The Sidebar discussions chat icon displays a number indicating unread messages or mentions.



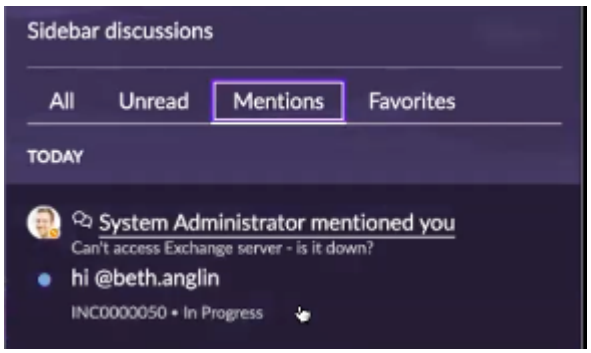- If the user selects the **Mentions** tab, the messages that mention the user with @user display.



- If the user selects the message preview card, the corresponding message displays with the exact message containing the @mention highlighted.

6. An email notification is sent to the user if:
   - the user doesn't read the messages within 24 hours. The email is sent as a reminder to view the messages and resume the discussion. See Sidebar requester mapping for more information about requester mapping for email notifications.
   - if a requester is added to an existing discussion.
7. To close the discussion dialog (but not exit the discussion), select the Close icon .

Create a standalone Sidebar discussion

Create a standalone Sidebar discussion that is not tied to a specific record.

Before you begin

Role required: none.

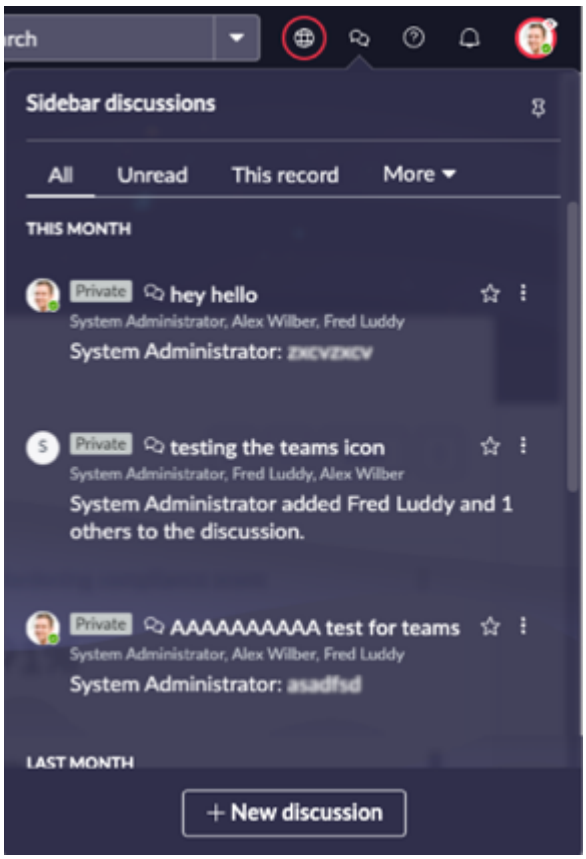
Starting a Sidebar discussion

Follow this procedure to start a Sidebar discussion:


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure

1. From the top menu, select the Sidebar discussion icon ( ) to display the Sidebar discussions window.



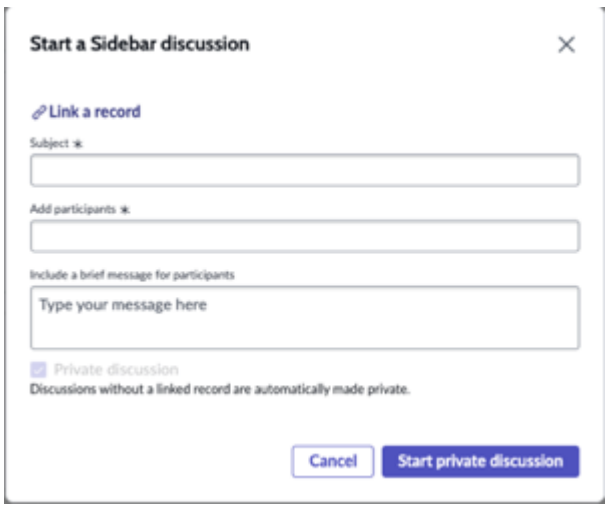2. To access an existing Sidebar discussion, select it from the Sidebar discussion menu.
3. Start a new Sidebar discussion by selecting **New discussion** to display the Start a Sidebar discussion window.



4. Fill out the fields:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Field	Description
Link a record	Select **Link a record** if you want to connect this Sidebar discussion to a record. (If you link to a record, the discussion will no longer be a standalone discussion.) A new discussion dialog appears and you can enter the record number of the record you want to link to. Any participants who do not have access to the record are automatically removed from the discussion.
Subject	Enter a brief description for the conversation.
Add participants	Select the user(s) or user group(s) to include in the discussion.
Include a brief message for participants	Enter a short message for the participants of the Sidebar discussion.
Private discussion	Standalone discussions are always private and access is limited to only the user and other discussion participants. These discussions are marked "private" and can't be converted to not private. Private discussions are not visible to non-participants in search results.


5. Once you start a discussion, you can edit and delete messages.

Option	Description
Edit a message	Select the More options icon next to the message and **Edit message**. The message appears in an Editing window where you can change the text. ○ You can only edit messages that you sent. ○ You can only edit one message at a time. ○ If you change the attachment of a message that you sent, both the old and new attachments display. ○ If a message you sent contains a URL, you can delete the message but you can't edit it.
Delete a message	Select the More options icon next to the message and **Delete Message**. A dialog displays asking if you're sure you want to delete your message. Select **Delete** to delete the message or select **Cancel** to leave the message.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Option	Description
	○ You can only delete messages that you sent. ○ After you delete a message, a notice with the date and time the message was deleted displays. ○ If you delete a message that mentions someone using @mention, then that @mention is also deleted. ○ You can't undo a deletion, after you delete a message it's gone.

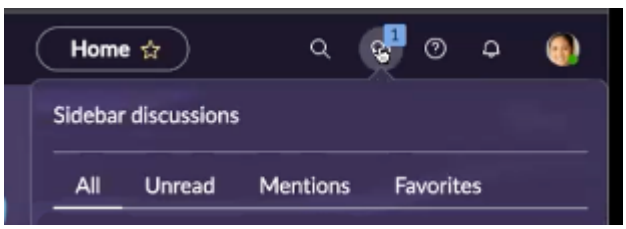6. To mention a user, enter `@user` (where `user` is the name of the user) or `@` to display a list of users and select someone from that list.
   - The list is divided into users who are currently participating in the discussion (participants) and users who aren't (non-participants).
   - The user is notified that they were mentioned in a Sidebar discussion message. The Sidebar discussions chat icon displays a number indicating unread messages or mentions.



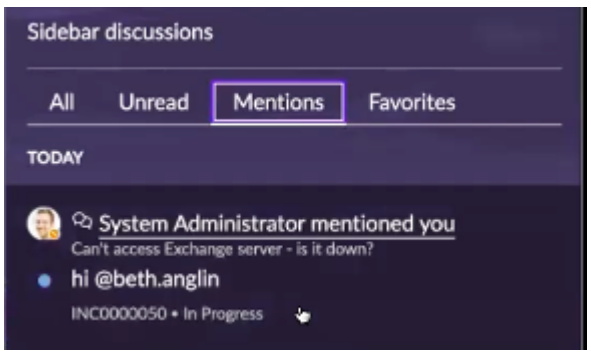   - If the user selects the **Mentions** tab, the messages that mention the user with @user display.



   - If the user selects the message preview card, the corresponding message displays with the exact message containing the @mention highlighted.

7. To close the discussion dialog (but not exit the discussion), select the Close icon .

Sidebar reference

Read information about how Sidebar works with domain separation.

Domain separation and Sidebar

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Domain separation and Sidebar

Domain separation is supported for Sidebar . Domain separation enables you to separate data, processes, and administrative tasks into logical groupings called domains. You can control several aspects of this separation, including which users can see and access data.

Support level: Standard

- Includes all aspects of **Basic** level support.
- Application properties are domain-aware as needed.
- Business logic: The service provider (SP) creates or modifies processes per customer. The use cases reflect proper use of the application by multiple SP customers in a single instance.
- The instance owner must configure the minimum viable product (MVP) business logic and data parameters per tenant as expected for the specific application.

Sample use case: An admin must be able to make comments required when a record closes for one tenant, but not for another.

For more information on support levels, see Application support for domain separation .

Overview of Domain separation and Sidebar

To set up domain separation for Sidebar, enable domain separation for your instance. If your instance has multiple domains, you can turn Sidebar on or off for each domain. No special configuration is needed to configure a domain-separated environment with Sidebar. Domain separation for Sidebar is supported only when domains are set up using a parent-child domain hierarchy.

Sidebar discussions are domain separated according to the base record (task or interaction record). You can see and create sidebar discussions only if you have access to the task or interaction record.

For example, say INC00001 belongs to the record created in the ACME domain and the Cisco domain doesn't have access to INC00001. Users that belong to the Cisco domain can't interact with Sidebar discussions based on INC00001.

Sidebar versions for domain separation

To fully utilize domain separation, you must be on both the Vancouver version and August version of the Sidebar store app (Omni Experience Standard Feature Set).

If you are a first time Sidebar user in Vancouver (you did not use Sidebar earlier and are not trued up to the Vancouver store app) and want to leverage domain separation, Sidebar is inactive by default. Navigate to the Conversational Interfaces settings page for each domain and activate Sidebar manually. Alternatively, you can access the sys_cs_collab_settings table and manually insert a new record for each domain.

There is a known issue with emojis not working as expected when used with domain separation. A workaround for this issue is to go to the Enable Emojis ACE Content block and update the record field with the sys_cs_collab_settings record's sys_id for the given domain.

Domain separation with the Sidebar and Microsoft Teams integration

If Sidebar and Microsoft Teams are integrated and configured, activating Sidebar prompts a message stating that the Microsoft Teams integration must be manually turned on and

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

deactivating Sidebar prompts a message stating that the integration with Microsoft Teams will also be turned off.

Domain separation will not work with Microsoft Teams if multiple domains are configured. Pairing a unique Microsoft Teams with each domain is not supported.

Related topics

Domain separation for service providers

Conversational Interfaces Diagnostic Tool

Use the Conversational Interfaces Diagnostic Tool to identify, troubleshoot, and find solutions for issues with conversational interfaces, before reaching out to Now Support.

Get started

Explore	Use
	
Learn about the features of the diagnostic tool.	Use the tool to resolve errors and solve configuration issues with Microsoft Teams and Advanced Work Assignment.

Troubleshoot and get help

- Virtual Agent and Natural Language Understanding (NLU) community forum
- Search the Known Error Portal for known error articles
- Contact Customer Service and Support

Exploring Conversational Interfaces Diagnostic Tool

The Conversational Interfaces Diagnostic Tool lets admins search for, identify, and resolve issues with conversational interfaces.

The Conversational Interfaces Diagnostic Tool lets admins search for, identify, and resolve issues with conversational interfaces.

Technical support engineers set up the Conversational Interfaces Diagnostic Tool on the server. Technical support engineers create and manage the Conversational Interfaces diagnostic category records and content that the Conversational Interfaces Diagnostic Tool uses.

After the technical support engineers create the diagnostic categories and content, admins can start using the Conversational Interfaces Diagnostic Tool on the chat widget. Admins must have the admin or virtual_agent_admin role.

The Conversational Interfaces Diagnostic Tool is available for both Virtual Agent and Virtual Agent Lite.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Note:
Before using the Conversational Interfaces Diagnostic Tool, admins must activate the Conversational Interfaces - Diagnostics plugin (sn_ci_diagnostics) available on the ServiceNow® Store store.

Request apps on the Store

Visit the ServiceNow Store website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the ServiceNow Store version history release notes.

Conversational Interfaces Diagnostic Tool workflow

After you've described the issue you want to solve, the Conversational Interfaces Diagnostic Tool workflow begins using the relevant diagnostic topics and topic blocks. These topics and topic blocks are used for identifying, diagnosing, solving, and collecting data for the issue described.

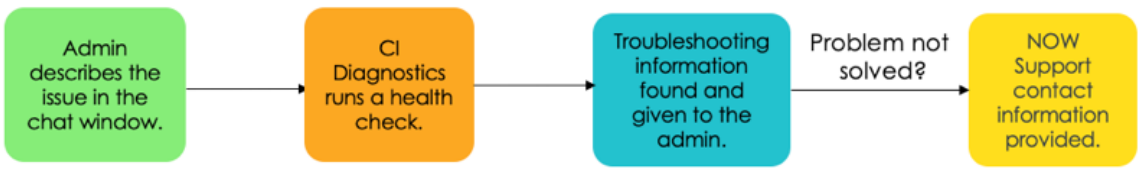
For example, the diagnostic workflow does the following:

- Prompts you for the required data, based on the issue you want to solve.
- Includes a list of Knowledge Base (KB) articles where you can find more information, as applicable. If you aren't finding the information you need, you can also search for additional KB articles.
- Gives you the option of downloading diagnostic support information.
- Lets you select another issue to solve.

The diagnostic workflow and the options and prompts you see correspond to the issue you are trying to diagnose and solve. The diagnostic workflow uses an AI Search filter as part of the diagnosis. For more information about AI Search and how to configure it, see Configuring AI Search.

The diagnostic topic block workflow also includes solutions for messaging integrations, such as Microsoft Teams. It also helps with Advanced Work Assignment configuration issues.

Conversational Interfaces Diagnostic Tool workflow



In the workflow, the admin describes the issue. The tool runs a health check and returns available troubleshooting information, as well as contact information for Now Support if the problem was not solved.

Conversational Interfaces Diagnostic Tool benefits

Benefit	Feature	Users
Diagnose general errors, such as error messages and system property issues.	Diagnose Conversational Interfaces errors	Admins

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Benefit	Feature	Users
Identify and solve Microsoft Teams configuration issues.	Diagnose Microsoft Teams configuration issues	Admins
Identify and resolve common Advanced Work Assignment (AWA) configuration issues.	Diagnose Advanced Work Assignment configuration issues	Admins

Using the Conversational Interfaces Diagnostic Tool

Use the tool to diagnose general Conversational Interfaces errors and system property settings, as well as issues with Microsoft Teams and Advanced Work Assignment configuration.

Diagnose Conversational Interfaces errors

Use the Conversational Interfaces Diagnostic Tool to resolve issues related to conversational interfaces such as error messages and system property issues before reaching out to Now Support.

Before you begin

Role required: virtual_agent_admin or admin

About this task

Use this task to resolve errors and find and change system property values.

Procedure

1. Start a conversation with the Virtual Agent chatbot.
2. At the greeting message, type `diagnostic pre chat`.
3. Describe the issue that you want to solve.

   If it is an error message issue, you can copy-and-paste or type the error message into the chatbot conversation.

   For system properties, you don't need to know the exact name of the system property. Type a feature name related to the property to see a list of matching system properties.

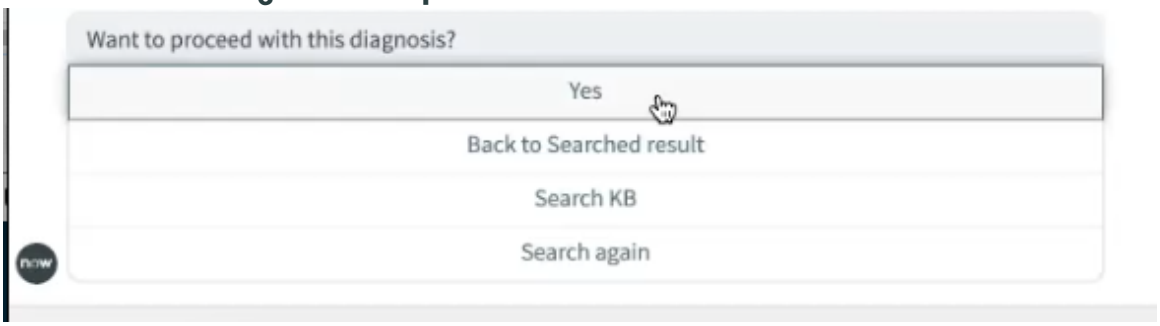
   When your input matches an existing system property, but that property isn't in your instance, you see the system property name followed by two dash lines. For example: `some.property.name--`

   Find or create the system property on your instance and make changes, as applicable.

   The tool displays a list of solutions.
4. Select the solution that you want to use.
   The Diagnostic Tool asks if you want to proceed with the diagnosis.


© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Proceed or search again chat response




5. Select **Yes** to continue.
   The tool initiates the workflow and leads you through the relevant prompts. The prompts you see depend on the issue you want to diagnose and solve.
6. Answer the prompts.
   When the diagnosis is complete, the Diagnostic Tool displays a recommended solution.

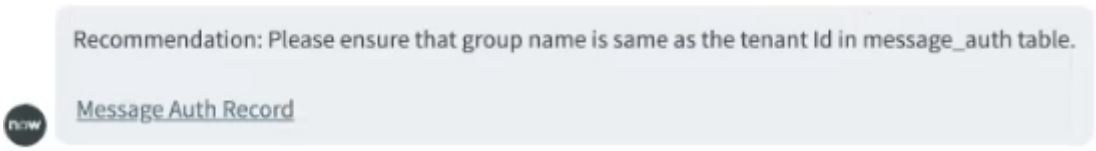Issue recommendation



Issue confirmation

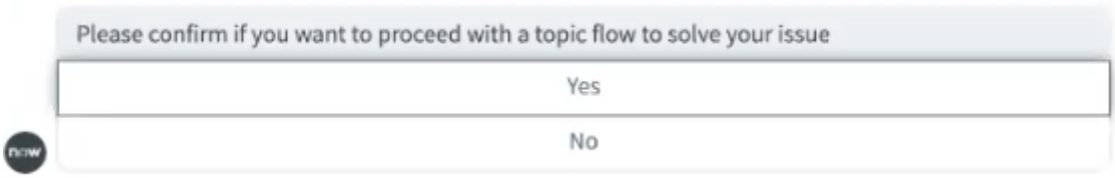


7. Select **Yes** to confirm, or select **No** to end the workflow.
   The Diagnostic Tool guides you through the relevant workflow. The options and prompts you see depend on the issue you want to solve. Reply to the prompts, as applicable. You may also see a link to the relevant Knowledge Base (KB) article where you can find more information.
8. Provide feedback.
   When asked whether the solution was helpful, select one of the following:
   - Select **Yes**, if the solution wasn't helpful.

     You are asked to provide additional information that helps fine-tune the solution.

     The prompts you see vary by the issue that you want to solve.
   - Select **No** to confirm that the solution was helpful and to exit the workflow.
   - You may see a link that you can use to download support data.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

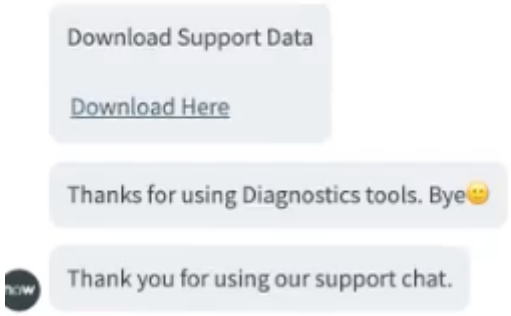Prompt to download support data



9. **Optional:** Click the link to download support data.

Diagnose Microsoft Teams configuration issues

Use the Conversational Interfaces Diagnostic Tool to identify and help solve Microsoft Teams configuration issues before reaching out to Now Support.

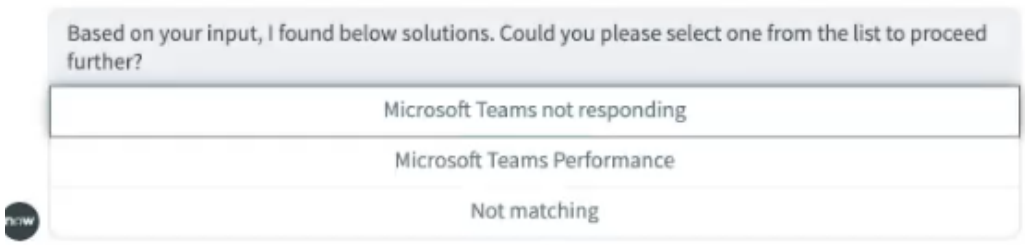
Before you begin

Role required: virtual_agent_admin or admin

Procedure

1. Start a conversation with the Virtual Agent chatbot.
2. At the greeting message, type `diagnostic pre chat`.
3. Describe the issue that you want to solve.
   For example, if the Microsoft Teams application isn't responding, you can type `no response`.
   The tool displays a list of solutions.


Example solutions for "no response"



4. Select the solution that you want to use.
   The Diagnostic Tool asks if you want to proceed with the diagnosis.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

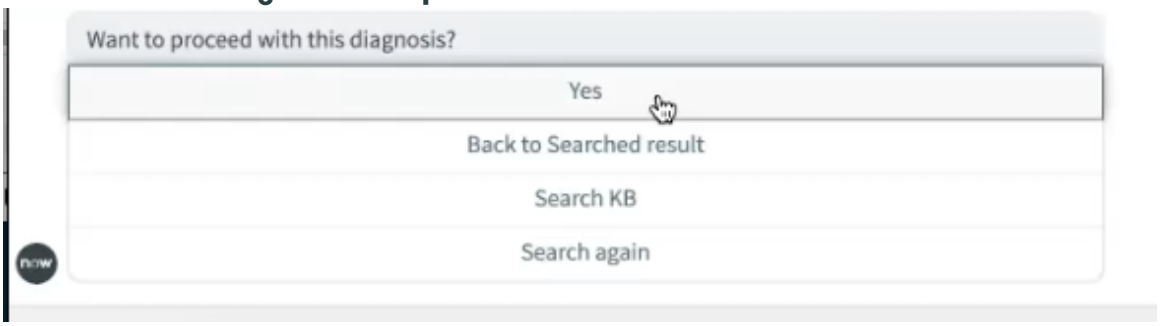Proceed or search again chat response



5. Select **Yes** to continue.
   Lists of Health Check Parameters and MS Teams Tenant Configurations display.


Health check parameters and tenant configuration status

Health Check Parameter	Value
Are all Nodes Online?	true
Does user have the admin role?	true
Is the Conversational Integration with Microsoft Teams plugin installed?	true
Are the dependent plugins installed?	true
Are the dependent store apps installed?	true
Are notifications enabled?	false

MS Teams Tenant Configurations	Value
Tenant ID	aadda82c-7cd1-4d94-a60a-1b1578428a0b
Has a record been created in the sys_cs_provider_application table?	true
Is a valid message_auth linked to the Provider Application?	true
Is the message_auth group name same as tenant_id?	false


6. Review the values for any parameters that are set incorrectly.
   For example, if a value is set to **False** when it should be set to **True**.
   When the diagnosis is complete, the Diagnostic Tool displays a recommended solution.

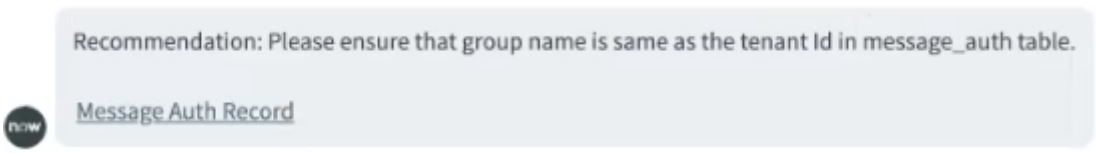Issue recommendation



© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

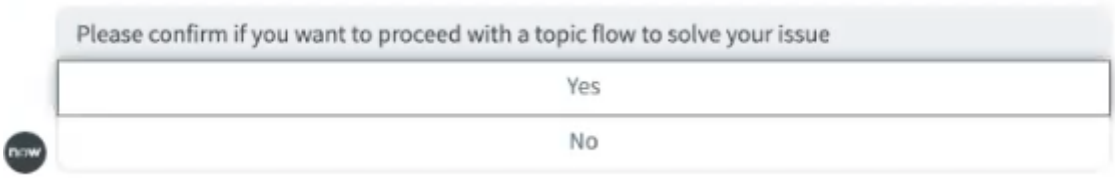Issue confirmation




7. Select **Yes** to confirm, or select **No** to end the workflow.
   The Diagnostic Tool guides you through the relevant workflow. The options and prompts you see depend on the issue you want to solve. Reply to the prompts, as applicable. You may also see a link to the relevant Knowledge Base (KB) article where you can find more information. For example, you may see a link to the Master KB article for common and known issues with Microsoft Teams.
8. Provide feedback.
   When asked whether the solution was helpful, select one of the following:
   - Select **Yes**, if the solution wasn't helpful.

     You are asked to provide additional information that helps fine-tune the solution. For example, you may be asked to provide the MS Teams Bot tenant ID, or asked if the instance has been cloned from another instance.

     The prompts you see vary by the issue that you want to solve.
   - Select **No** to confirm that the solution was helpful and to exit the workflow.
   - You may see a link that you can use to download support data.

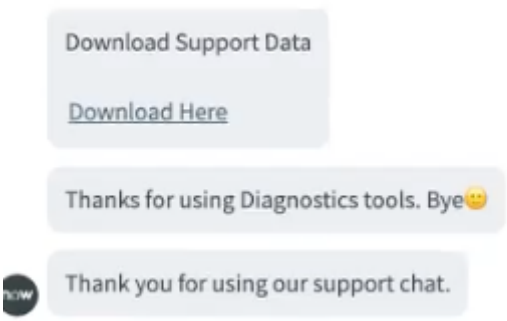     Prompt to download support data

9. **Optional:** Click the link to download support data.

Diagnose Advanced Work Assignment configuration issues

Use the Conversational Interfaces Diagnostic Tool to identify and resolve common Advanced Work Assignment (AWA) configuration issues before reaching out to Now Support.

Before you begin

Role required: virtual_agent_admin or admin

About this task

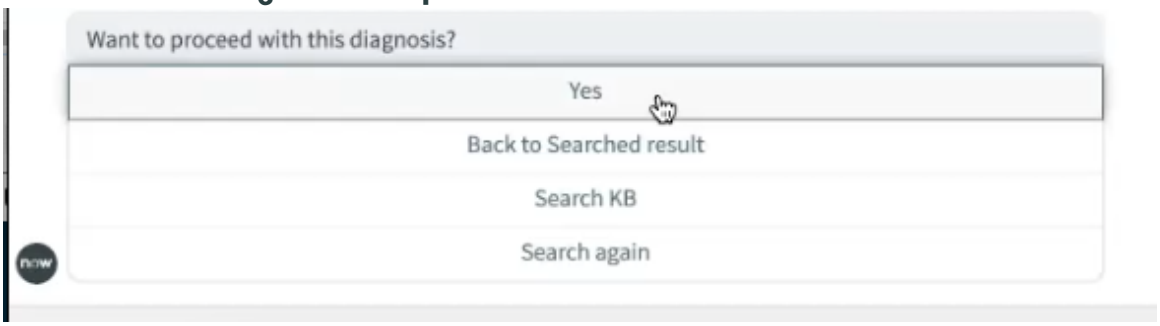
Solve issues with your AWA configuration. For example, you can solve issues such as **No Agents Available** messages.

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Procedure


1. Start a conversation with the Virtual Agent chatbot.
2. At the greeting message, type `diagnostic pre chat`.
3. Describe the issue that you want to solve.
   You can type or paste the error message into the chatbot conversation. For example, you can type `No Agents Available`.
   The tool displays a list of solutions.
4. Select the solution that you want to use.
   The solutions correspond to the issue that you want to solve.
   The Diagnostic Tool asks if you want to proceed with the diagnosis.

Proceed or search again chat response




5. Select **Yes** to continue.
   The tool initiates the workflow and leads you through the relevant prompts. The prompts you see depend on the issue you want to diagnose and solve.
6. Answer the prompts.
   When the diagnosis is complete, the Diagnostic Tool displays a recommended solution.

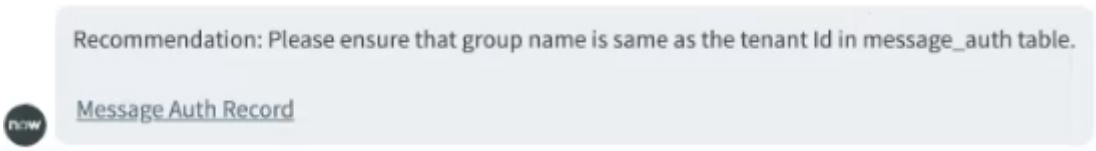Issue recommendation



Issue confirmation

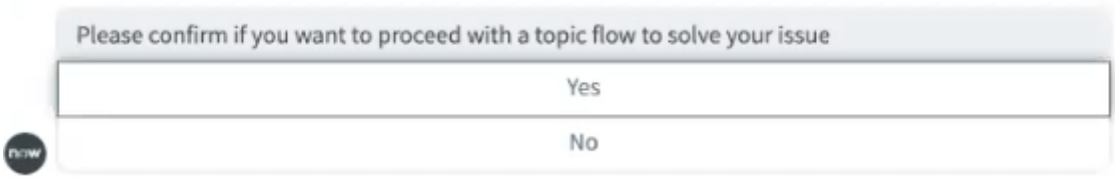

7. Select **Yes** to confirm, or select **No** to end the workflow.
   The Diagnostic Tool guides you through the relevant workflow. The options and prompts you see depend on the issue you want to solve. Reply to the prompts, as applicable. You may also see a link to the relevant Knowledge Base (KB) article where you can find more information.
8. Provide feedback.
   When asked whether the solution was helpful, select one of the following:

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

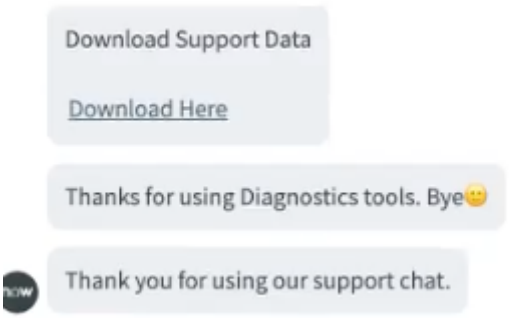
- Select **Yes**, if the solution wasn't helpful.

  You are asked to provide additional information that helps fine-tune the solution.

  The prompts you see vary by the issue that you want to solve.

- Select **No** to confirm that the solution was helpful and to exit the workflow.
- You may see a link that you can use to download support data.

Prompt to download support data



9. Optional: Click the link to download support data.

Additional resources for Conversational Interfaces

If you're looking for Conversational Interfaces (CI) best practices, troubleshooting, or other implementation guidelines, select a feature or resource type to discover ServiceNow® resources on other relevant websites.

Resource links

CI features	Resource type	Resources
Agent Chat	Getting Started	Agent Chat quick start guide (ServiceNow Community)
Agent Chat	FAQs	Agent Chat FAQ
Now Assist in Virtual Agent	Release notes	Now Assist in Virtual Agent release notes
Now Assist in Virtual Agent	Tips and examples	When to consider Now Assist in Virtual Agent How to request catalog items in Now Assist in Virtual Agent Now Assist in Virtual Agent conversational catalog ordering Migrating NLU topics to LLM
Sidebar	Release notes	Sidebar release notes

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.

Resource links (continued)

CI features	Resource type	Resources
Sidebar	Tips and examples	Enable Sidebar users to collaborate with Microsoft Teams users
Sidebar	FAQs	Sidebar FAQ
Virtual Agent	Release notes	Virtual Agent release notes
Virtual Agent	Getting Started	Virtual Agent and NLU Quick Start Guide
Virtual Agent	Best practices	The 7 habits for a highly effective chatbot
Virtual Agent	Tips and examples	Virtual Agent - Tips for Implementation Success Virtual Agent implementation checklist - a deeper dive
Virtual Agent	FAQs	Virtual Agent FAQs Virtual Agent NLU FAQs

© 2026 ServiceNow, Inc. All rights reserved.
ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries.
Other company names, product names, and logos may be trademarks of the respective companies with which they are associated.